


# OfficeLUX RAYET 2.0


40 | ↓ asymmetrisch | ↑ 165 x 130°



## LIGHT DISTRIBUTION CURVE

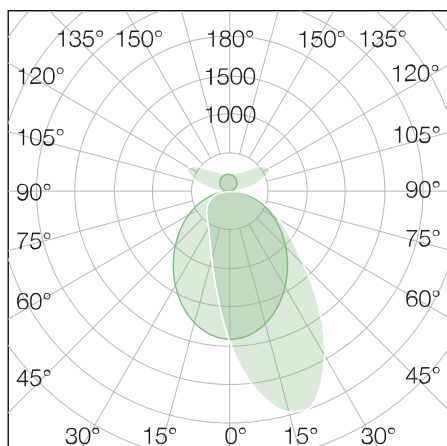

## TECHNICAL DRAWING

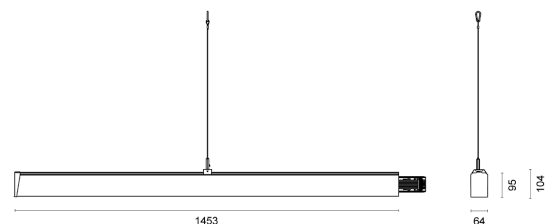

## LIGHT INFORMATION

beam angle	asymmetric 165 x 130°
color temperature	4.000 K
color tolerance	< 5 SDCM
color rendering index	> 80

## PROPERTIES

through-wiring	5 x 2,5 mm²
connection	Terminal: 5-pole max. 2,5 mm²
module per circuit breaker B10A	18
module per circuit breaker B16A	29
module per circuit breaker C10A	30
module per circuit breaker C16A	49
switching cycles	> 500.000
voltage range AC	220 – 240 V AC, 50/60Hz

## ORDER OVERVIEW

OfficeLUX RAYET 2.0 40   ↓ asymmetric   ↑ 165 x 130°	
product code	124022400152
EAN code	4260374018995
warranty	5 years

## ACCESSORIES

## PERFORMANCE

luminous efficiency	159 lm/W
system performance	39 W
luminous flux	6.200 lm
dimnable	No

## RESILIENCE

protection class	I
impact resistance	IK04
protection type	IP40
lifespan	> 50.000 h [L80, B10]
UV resistant	Limited
operating temperature	–20 to +45 °C
foodready	No

## MATERIAL

cover	diffuse cover
material (cover)	PMMA
material (housing)	Aluminium
housing color	Silvergrey

## SCOPE OF DELIVERY

Module includes 1x clip for ceiling installation
--

## DIMENSION

L x W x H / Ø (H2)	1450 x 64 x 95 (105) mm
weight	3,3 kg