IndustryLUX
LANARA 2.0

DALI | CE | D | IP 65 | IK 08 | | SWITCH | |

LIGHT DISTRIBUTION CURVE
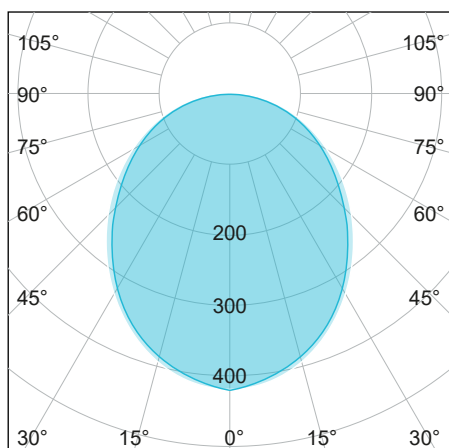
TECHNICAL DRAWING

LIGHT INFORMATION

beam angle	110°
color temperature	5.000 K
color tolerance	< 5 SDCM
color rendering index	> 83

PROPERTIES

through-wiring	7 x 1,5 mm²
connection	Terminal: 7-pole max. 2,5 mm²
module per circuit breaker B10A	5
module per circuit breaker B16A	8
module per circuit breaker C10A	8
module per circuit breaker C16A	14
switching cycles	> 500.000
voltage range AC	220 – 240 V AC, 50/60 HZ

ORDER OVERVIEW

IndustryLUX LANARA 2.0	
product code	441250150027
EAN code	4260374015130
warranty	5 years

ACCESSORIES

Mounting plate for 2-3 luminaires

PERFORMANCE

luminous efficiency	150 lm/W
system performance	150 W
luminous flux	22.500 lm
dimmable	Dip switch | DALI

RESILIENCE

protection class	I
impact resistance	IK08
protection type	IP65
lifespan	> 50.000 h [L80, B10]
UV resistent	Limited
operating temperature	–20 to +50 °C
foodready	Yes

MATERIAL

cover	diffuse cover
material (cover)	PC
material (housing)	PC,Aluminium
housing color	Black

SCOPE OF DELIVERY

includes 2x mounting clips

DIMENSION

L x W x H / Ø (H2)	1.215 x 150 x 82 (104) mm
weight	3,3 kg