


IndustryLUX LANARA 2.0

4000K



LIGHT DISTRIBUTION CURVE

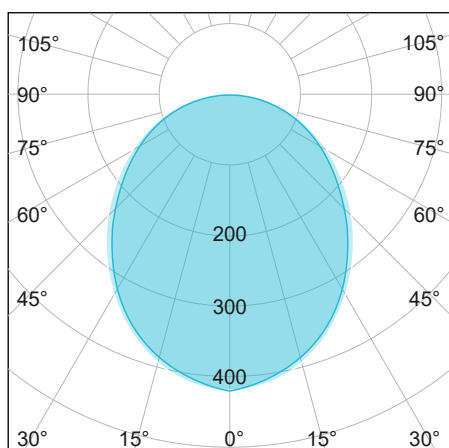

TECHNICAL DRAWING



LIGHT INFORMATION

| | |
|-----------------------|----------|
| beam angle | 110° |
| color temperature | 4.000 K |
| color tolerance | < 5 SDCM |
| color rendering index | > 83 |

PROPERTIES

| | |
|---------------------------------|-------------------------------|
| through-wiring | 7 x 1,5 mm² |
| connection | Terminal: 7-pole max. 2,5 mm² |
| module per circuit breaker B10A | 5 |
| module per circuit breaker B16A | 8 |
| module per circuit breaker C10A | 8 |
| module per circuit breaker C16A | 14 |
| switching cycles | > 500.000 |
| voltage range AC | 220 – 240 V AC, 50/60 HZ |

ORDER OVERVIEW

| | |
|------------------------------|---------------|
| IndustryLUX LANARA 2.0 4000K | |
| product code | 441240150162 |
| EAN code | 4260374018759 |
| warranty | 5 years |

ACCESSORIES

| |
|-----------------------------------|
| Mounting plate for 2-3 luminaires |
|-----------------------------------|

PERFORMANCE

| | |
|---------------------|-------------------|
| luminous efficiency | 150 lm/W |
| system performance | 150 W |
| luminous flux | 22.500 lm |
| dimnable | Dip switch DALI |

RESILIENCE

| | |
|-----------------------|-----------------------|
| protection class | I |
| impact resistance | IK08 |
| protection type | IP65 |
| lifespan | > 50.000 h [L80, B10] |
| UV resistant | Limited |
| operating temperature | –20 to +50 °C |
| foodready | Yes |

MATERIAL

| | |
|--------------------|---------------|
| cover | diffuse cover |
| material (cover) | PC |
| material (housing) | PC,Aluminium |
| housing color | Black |

SCOPE OF DELIVERY

| |
|----------------------------|
| includes 2x mounting clips |
|----------------------------|

DIMENSION

| | |
|--------------------|---------------------------|
| L x W x H / Ø (H2) | 1.215 x 150 x 82 (104) mm |
| weight | 3,3 kg |