



SDVR-110251-ZA 8CH 5 IN 1 DIGITAL VIDEO RECORDER (2MP)














MOBILE APP

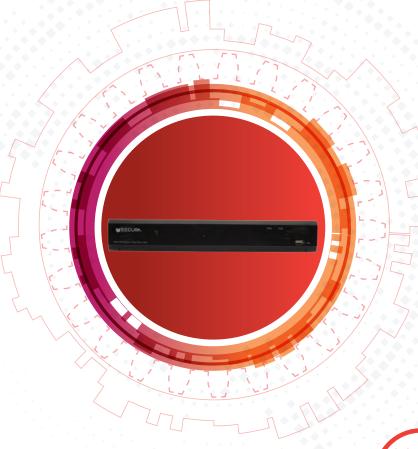

Product Highlights

- 5 in 1 8CH Metal DVR
- Supported Upto 2 MP Input
- Recording 15 FPS @ 1080N Resolution
- Supports Analogue/AHD/HDCVI/HDTVI/IP
- Supports 8CH BNC + 4CH IP
- Supports 1CH Audio
- Supports WIFI
- Supports P2P
- Supports 1 SATA upto 6 TB
- Supports Intelligent Function
- Supports HDMI/VGA
- Supports Free Dropbox upload upto 2 GB
- 12V DC/2A with 24W Power Consumption

WWW.SECURAWORLD.COM



Specifications

Model Number	SDVR-110251-ZA	
System		
Video System	PAL/NTSC	
Operating System	Linux (Embedded)	
Video IN		
No. of Channels	8ch BNC	
No.of Analogue/ AHD	8ch BNC + 4ch IP input	
/HDCVI / HDTVI/ IP Input	·	
Video Resolution Live	1080N	
Recording Speed	960 * 1080 @ 15 fps each ch, 720 @ 15 fps each ch, 960H @ 30 fps each ch	
Audio In / Out		
No. of Channels IN	1	
No. of Channels OUT	1	
Display		
Interface	1 HDMI, 1 VGA	
Multi Screen Display	1/4/12	
OSD Menu	Camera Title, Time, Video Loss, Camera Lock, Motion Detection, Recording	
Recording		
Compression	H.265 , H.264	
Resolution	Analog/AHD/HDCVI/HDTVI: 1080N/720P/960H IP: 2MP/720P/960H	
Record Rate	1080 @ 15 fps each ch, 720 @ 15 fps each ch, 960H @ 30 fps each ch	
Bitrate	32~6144 Kbps	
Frame Rate Live	25 fps @ 1080N	
Frame Rate Playback	15fps @ 8ch	
Record Interval	1 min - 9 min	
Total Bandwidth	16 Mbps	
Recording		
Playback	Synchronous Playback	
Search Mode	Time/Date, Alarm, Motion Detection and Exact Search	
Playback Function	Play, Pause, Stop, Rewind, Fast Play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Repeat, Shuffle, Backup Selection, Digital Zoom	
Video Detection & Alarm		
Trigger Events	Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot,	
Higger Events	Buzzer & Screen Tips	
Video Detection	Motion Detection, MD Zones : 396 (22 * 18) , Video Loss, Tampering & Diagnosis	
Storage		
Internal HDD	1 SATA upto 6 TB	
Backup		
USB	1 × 2.0, 1 × 3.0	
Network		
Interface	1 RJ-45 (100M)	
Network Function	HTTP, TCP/IP, IPv4/IPv6, WIFI, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, P2P, IP Search	
Smart Phone	Android & iOS	
Interoperability	ONVIF 2.42	




Specifications

.

H		
Auxilliary Interface		
RS485	Yes	
Electrical		
Power Supply	12V DC / 2A	
Power Consumption	24 Watts	
Enviromental		
Operating Temperature	-10°C - 50°C and 90% humidity or less than that	
Storage Temperature	Below 40°C	
Construction		
Dimensions	300 × 227 × 53mm	
Included Accessories	Power Supply, Mouse, Remote Control, HDD Connectors, Software CD, User Manual	
Certifications	CE, FCC, UL & RoHS	

Dimensions

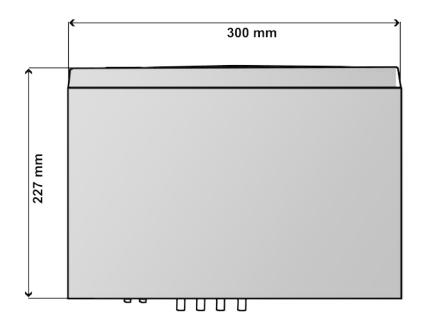

Rear Panel

