

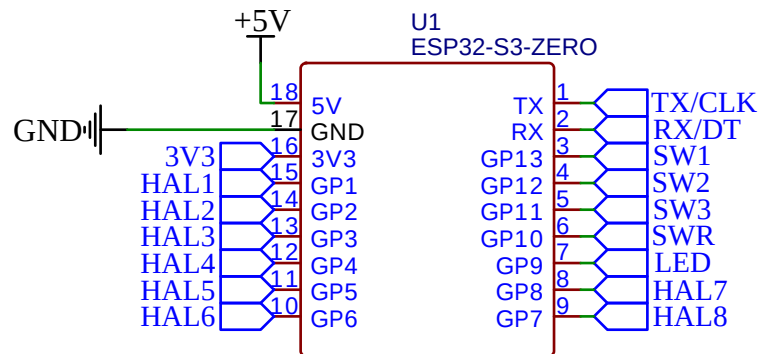



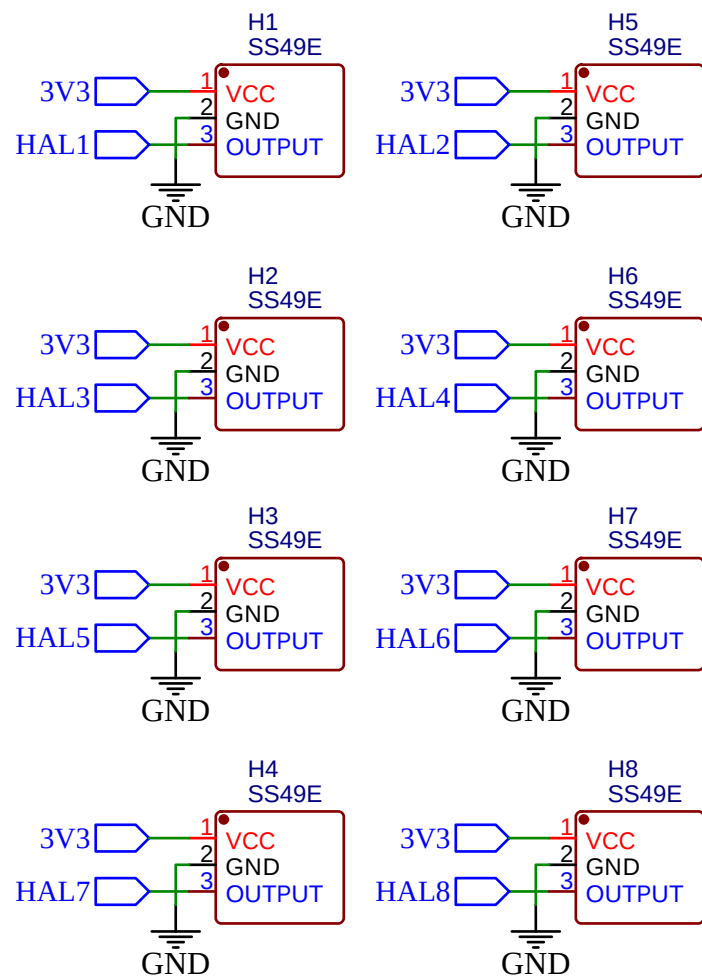


Design notes:

- For the HALL Effect sensors ADC1 has to be used. Use of ADC2 is prevented due to the WiFi OTA usage. We have to use GPIO's 1-10 for the HALL Effect sensors
- A rotary encoder uses two input pins.
- As Pogo pin we use the P75-J1 or the D2 pin (hole diameter 1.02mm)
- GPIO3 is a strapping pin for JTAG debugging. However, as long as no eFuses are burnt, the pin is safe to use.

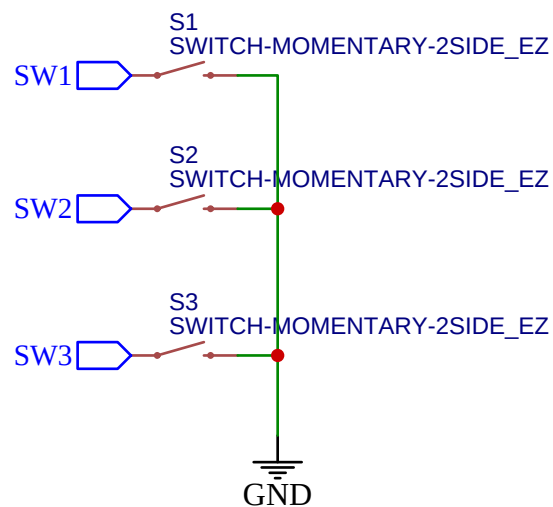

Logic Level converter

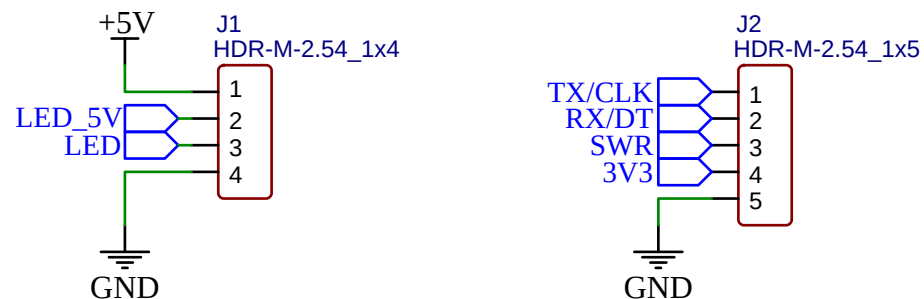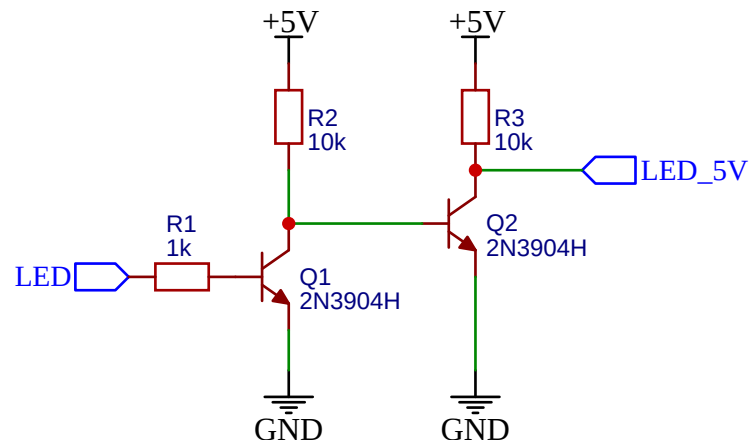

TITLE: SpaceMouse ESP32S3 Zero		REV: 1.0
	Company: Ratatosk	Sheet: 1/1
	Date: 2025-05-26 Drawn By: jarnob	