Requirements ΔWFE; Jitter = 5.8 mas; TA = 8.8 mas
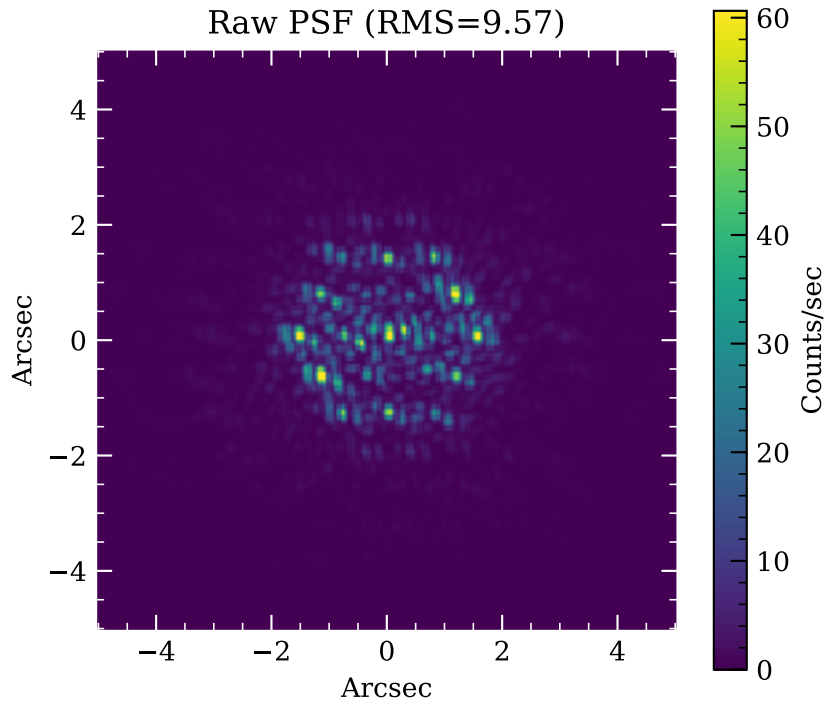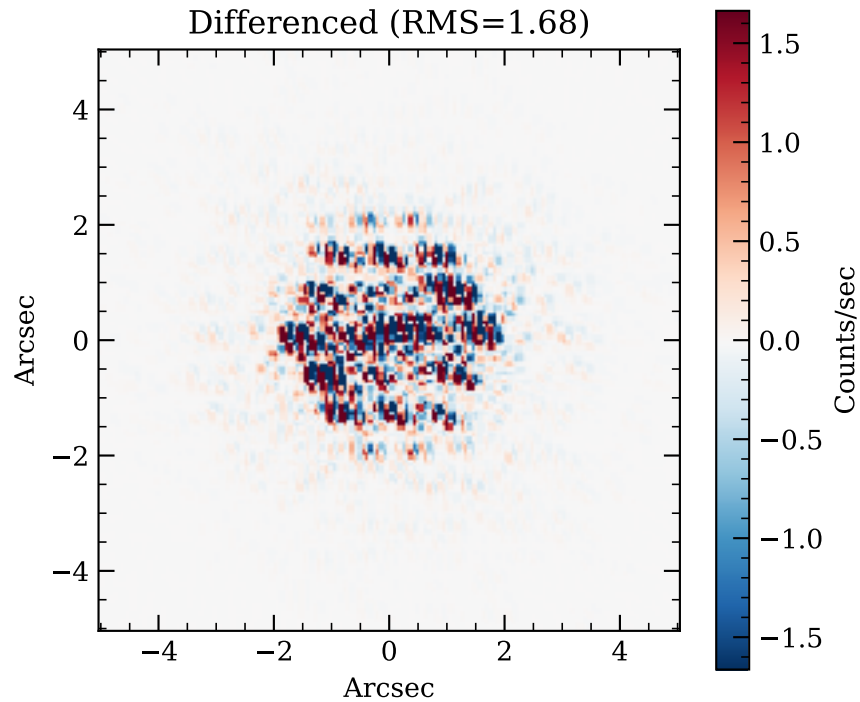

Raw PSF (RMS=9.57) — Differenced (RMS=1.68) — Aligned Diff (RMS=0.32)