Best Case ΔWFE; Jitter = 0.0 mas; TA = 6.3 mas
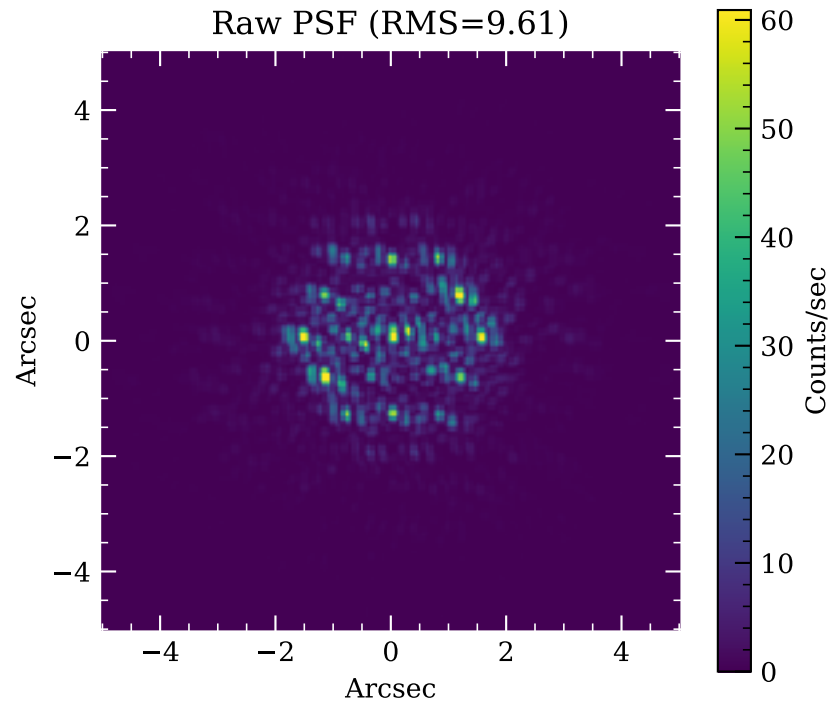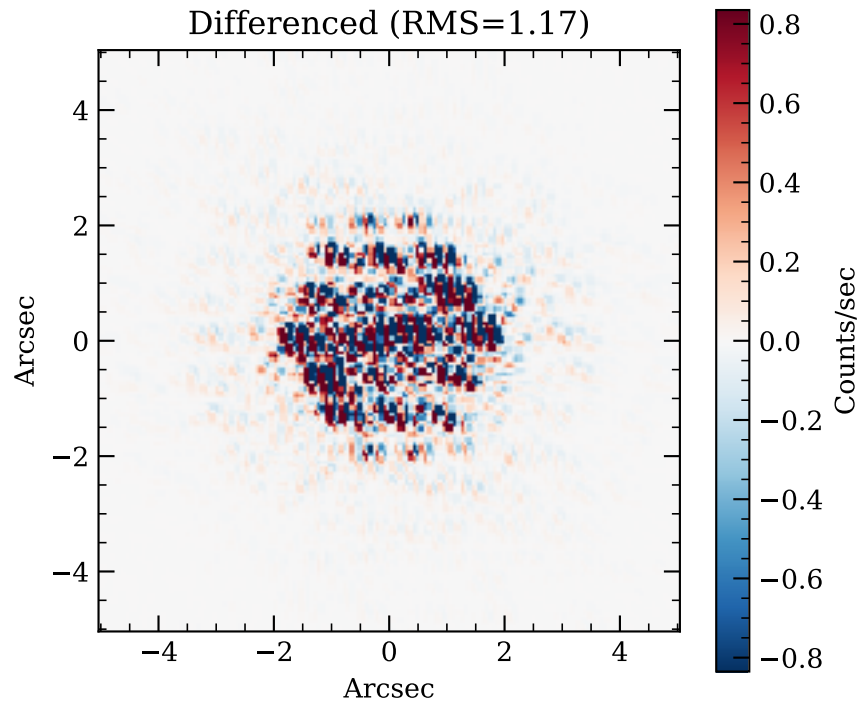
Raw PSF (RMS=9.61) — Differenced (RMS=1.17) — Aligned Diff (RMS=0.13)