Best Case ΔWFE; Jitter = 2.5 mas; TA = 0.0 mas
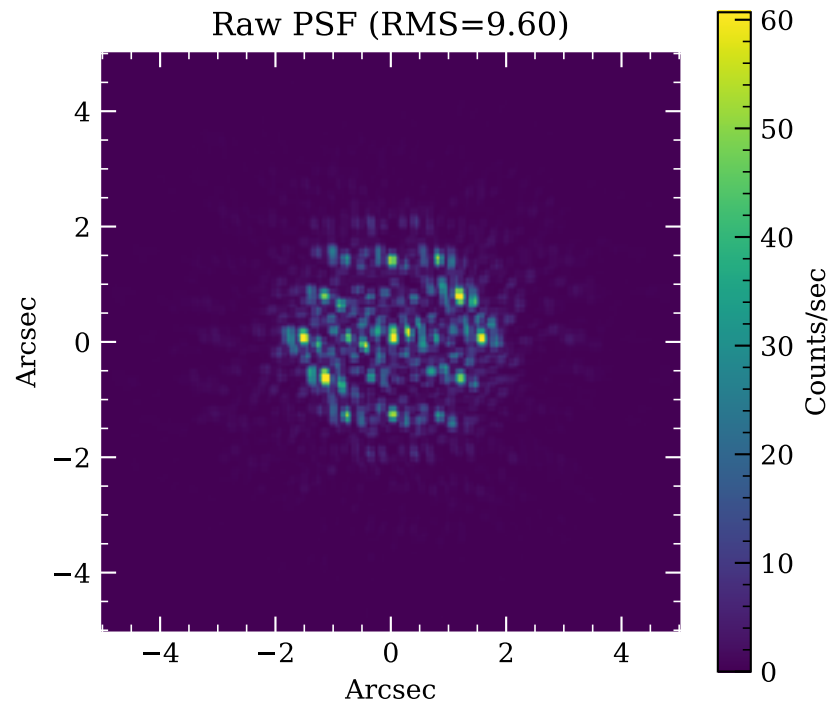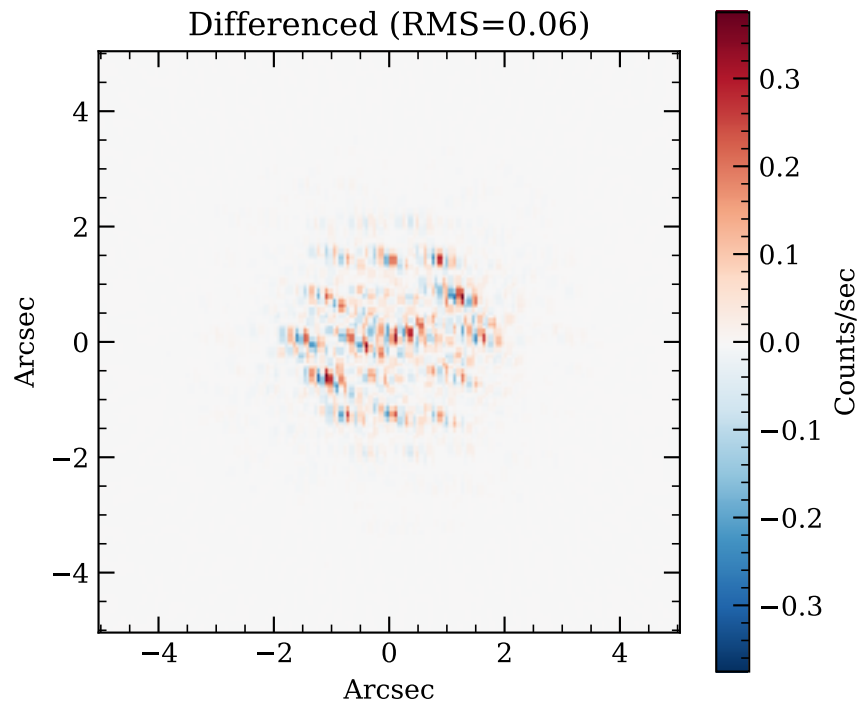
Raw PSF (RMS=9.60) — Differenced (RMS=0.06) — Aligned Diff (RMS=0.06)