

Unifast Technical Trading L.L.C

Your trusted source for premium building materials

► GET A QUOTE

LEARN MORE

About Us

Welcome to Unifast Technical Trading company, a dedicated source for fasteners, building materials, safety products, tools and equipments, hoses and fittings. We are your dependable partner in construction, providing top-notch products and unwavering support for your projects.

Our Mission

At Unifast Technical Trading company, our mission is to offer the finest quality building materials, ensuring your projects are built to last. We're here to simplify your construction needs and provide a seamless experience.

Products

FASTENERS

LEARN MORE

SAFETY PRODUCTS

LEARN MORE

VALVES AND FLANGES

LEARN MORE

BUILDING MATERIALS

LEARN MORE

TOOLS AND EQUIPMENTS

LEARN MORE

HOSES AND FITTINGS

LEARN MORE

What we do

We are dedicated to supply quality products and provide an overall service second to none. We have product range in fasteners, building materials, safety products, tools and equipments, Hoses and fittings providing the most efficient point of sales in GCC.

We providing competitive product line which are complying excellent quality parameters with international standard norms for Engineering, Fabrication, Marine, Oil and Gas, construction and EPC contracting companies. Supported by highly experienced and technically sound sales team deliver excellent results to meet the customers demand. Strategic location of warehouse and fleet of vehicles provide outstanding level of service to satisfy all customers' needs by providing time bound deliveries.

Our Services



QUALITY ASSURANCE

Quality is at the heart of everything we do. Our products undergo rigorous quality control measures, ensuring they meet and often exceed industry standards. We take pride in delivering only the best.



COST SAVINGS

Choose Unifast Technical Trading company for competitive pricing and cost-effective solutions. Our materials are designed to help you save on your construction projects.



SAFETY AND COMPLIANCE

Safety is our top priority. Our team undergoes rigorous training, and we strictly adhere to OSHA regulations. Our impeccable safety record speaks for itself.



CUSTOMER-CENTRIC APPROACH

We put our customers first. We value your feedback and strive to provide exceptional service. Our dedicated team is always ready to assist you with your inquiries and concerns.

Our Brands



Fasteners



Hex Bolts

Grade- 8.8 Full threaded/ Half Threaded

Black Finish
Electro Galvanized
Hot Dip Galvanized



Hex Bolts

ASTM A325M Heavy Hex Bolt Full threaded/ Half Threaded

Black Finish
Hot Dip Galvanized



Hex Bolts - Stainless Steel

SS316 / SS304 Hex Bolt Full threaded/ Half Threaded

B8/ B8M Heavy Hex Bolt Full threaded/ Half Threaded



Stud Bolts

ASTM A193 B7 / B7M / L7 / L7M / B16 / 8.8 - Full Threaded

Black Finish
Electro Galvanized
Hot Dip Galvanized
XYLAN 1070 PTFE COATED



STUD BOLTS - Stainless Steel

SS316L / SS316/ SS304 / B8 / B8M- Full Threaded



Shear Stud (Shear connector)



Anchor Bolts

Wedge Anchor bolts
Sleeve Anchor bolts
Hex Bolt Sleeve Anchor
Through Bolts
Drop in Anchor
Stud Anchor

Electro Galvanized (G.I)
Hot Dip Galvanized (HDG)
Stainless Steel - SS316
Stainless Steel - SS304



Foundation Anchor Bolts

Grade-4.6 / A36 / 50C / 90 8.8 / SS316 / SS304

Black Finish
Electro Galvanized
Hot Dip Galvanized



Threaded Bar

Grade-4.6 / 8.8 / B7 / B7M / B16 / 10.9

Self Finish
Electro Galvanized (GI)
Hot Dip Galvanized (HDG)



Threaded Bar - Stainless Steel

SS316L / SS316 / SS304 / Duplex



U bolts

Grade- 4.6 / A36 / 8.8 / B7 / SS316L / SS316 / SS304


Electro Galvanized (G.I)
Hot Dip Galvanized (HDG)
XYLAN 1070 PTFE Coated



Nuts and Washers

G.I Hex Nuts CL.8 Hex Nuts
CL.10 Hex Nuts
ASTM A563 10s Heavy Hex Nuts
ASTM A194 2H Heavy Hex Nuts
Dom Nuts
Flange Nuts
Butterfly Nuts
Thin/Half Nuts
Spring Nuts
SS316 Hex Nuts
SS304 Hex Nuts
Grade- 8 Heavy Hex nuts
Grade- 8M Heavy Hex Nuts

Black Finish
Electro Galvanized (G.I)
Hot Dip Galvanized (HDG)

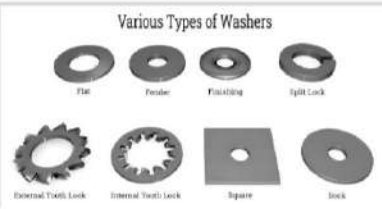

Washers

DIN125 Flat Washers
ASTM F436M WASHERS
Lock / Spring washers
Internal Tooth lock washers
External Tooth Lock washers
Square washers
Stainless Steel washers SS316L/ SS316 / SS304

Black finish
Electro Galvanized (G.I)
Hot Dip Galvanized (HDG)

Safety Products



Warning Tapes



Safety Helmet



Safety Shoes



Safety Cold Jacket



Safety Harness



Coverall Safeman



Life Jacket



Safety Vest



First Aid Kit



Coverall Tough Reflecting



Safety Gloves



Traffic Baton



Safety Baton Light



Signboard



Gumboot



Warning Light Solar Double Battery



Warning Light Solar Single Battery



PVC Road Cone



HDPE Road Cone



HDPE Flex Warning Post



HDPE Flex Warning Post With Handle



PU Flex Warning Post WL 14



LDPE Warning Post WL 19



Warning Tape WT AT3 – 3" X 300M



Warning Tape WT CH – 3" X 200M



Warning Tape DANGER / CAUTION WT AT1 – 3" X 250M



Wall Guards



Speed Ramps



Wheel Stoppers




Wheel Chock

Valves and Flanges



Plate Flange

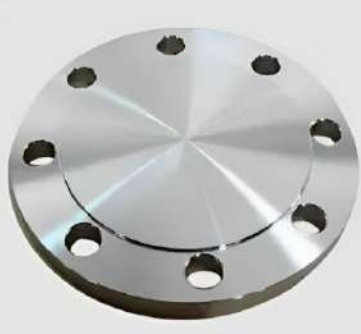

Blind Flange



Flat Welding Flange With Neck



Threaded Flange



Forged Carbon Steel Weld Neck Flange



Integral Flange



Class 150 Flanges



Ansi Cast Steel Gate Valve

Pressure: 150LB,300LB,600LB,900LB
Size: 1/2"~40".DN15~DN1000
Design Standard: API600,API6D
Face to Face: ASME B16.34
Flange Standard: ASME B16.10
Testing Standard: ASME B16.25



Ansi Cast Steel Globe Valve

ANSI Stainless Steel Ball Valve range:
Production
Size: 1/2"~24".DN15~DN600
Pressure: 150LB,300LB,600LB,900LB
ANSI Cast steel Globe Valve standard:
Design
Standard: API600,API6D,BS1873
Face to Face: ASME B16.34
Flange Standard: ASME B16.5
Testing Standard: API 598
ANSI Cast steel Globe Valve Material of
parts: Body: ASTM A216 WCB
Bonnet: ASTM A216 WCB
Stem: 2Cr13,SS304,SS316,Carbon Steel
Stem
Nut: brass,Ductile iron
Disc: ASTM A216 WCB
Seat: 13Cr13,Stellite
Hand wheel: ASTM A536 65-45-12
Bonnet bolt: ASTM A193 B7
Bonnet nut: ASTM A194 2H
Packing: Graphite



DIN Check Valve

DIN Check Valve range: Production Size:
2"-24" DN50-DN600mm
Pressure range: PN10,PN16
DIN Check Valve Standard: Design
Standard: DIN Face to Face: DIN3202 F6
Flange Standard: EN 1092-2
Testing Standard: ISO 5208 DIN Check
Valve main material of parts: Body: EN-GJL-
250
Bonnet: EN-GJL-250
Stem: 2Cr13/SS304/SS316/Carbon Steel
Stem
Nut: brass Disc: EN-GJL-250
Seat: Bronze,Brass
Hanger: EN-GJS-5007
Hanger pin: Stainless Steel
Cover Gasket: Graphite



DIN Ball Valve

DIN Ball Valve range: Production Size:
2"~8".DN50~DN200
Pressure: PN16
DIN Ball Valve standard Design Standard:
DIN 3357,EN12516
Face to Face: DIN 3202,EN558-1,DN15-
DN150(F4),DN200(F5)
Flange Standard: DIN2533,EN1092-2
Testing Standard:
EN12266,DIN3230,ISO5208
DIN Ball Valve main material of parts: Body:
GG25,GGG40
Bonnet: GG25,GGG40
Stem: 2Cr13/SS304/SS316/Carbon Steel
Ball: SS304,SS316
Gasket: PTFE
Seat: PTFE,RPTEF Stem Packing: PTFE
Handle: ASTM A536 65-45-12



DIN Butterfly Valve

DIN butterfly Valve range: Production Size:
1 1/2"~40".DN40~DN1000
Pressure: PN10,PN16
DIN butterfly Valve standard: Design
Standard: DIN Face to Face: DIN2501
Flange Standard: DIN3202
Testing Standard: EN12266
DIN butterfly Valve Material of parts: Body:
GG25
Stem: 2Cr13/SS304/SS316/Carbon Steel
Disc: Ductile Iron,SS304,SS316 Gasket:
NBR,PTFE,EPDM,Teflon
Seat: NBR,EPDM,PTFE,RPTFE
Packing: NBR,PTFE,EPDM,Teflon
Handle: ASTM A536 65-45-12



DIN Strainer

DIN strainer range: Production Size:
1/2"-24" DN15-DN600mm
Pressure range: PN10,PN16
DIN strainer Standard: Design Standard:
DIN Face to Face: DIN Flange Standard: EN
1092-2
Testing Standard: ISO 5208
DIN strainer main material of parts: Body:
EN-GJL-250,EN-GJS-5007
Bonnet: EN-GJL-250,EN-GJS-5007
Screen: 2Cr13/SS304/SS316
Plug: EN-GJL-250,brass Cover
Gasket: Graphite with soft steel,EPDM,NBR



45 Degree Butt Welded Elbow

Manufacturing Standards: ANSI
B16.9/16.28 Stainless Steel 45 Degree Butt
Weld Pipe Elbow Size: 1/2"—100"
Type: Same diameter and different
diameters, 1D 1.5D Material: CS
A105/SA105N,SS 304 304L 321 316 316L
Coating: Rust-Proof oil, black, yellow paint
Elbow: 30° 45°etc



180 DEGREE BUTT Welded Elbow

Manufacturing Standards: ASME/ANSI
B16.9, ASME B16.28, MSS-SP-43,
GB/T12459, GB/T13401, SH3408, SH3409,
JIS B2311/2220, DIN2617/2616/2615
Size: 1/2"–100" Type: Same diameter and
different diameters, 1D 1.5D 2D 3D 4D 5D
Material: CS A105/SA105N, SS 304 304L
321 316 316L
Coating: Rust-Prof oil, black, yellow paint
Elbow: 30° 45° 60° 90° 180°, etc

Building Materials



Tomax Platform Trolley



Industrial Wiping Rags



Jack Prop



Line Dori



Mason Brush



Lost Head Nail



Marble Chalk



Marble Glue



Marine Plywood



Locking Type Castor Wheel



Mini Spade



Metal Wire



Packing Machine




Noora Brush



Nylon Castor Wheel



Aluminium Hollow Section

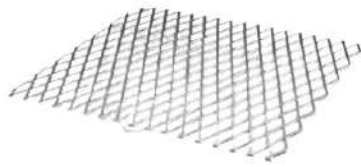

Aluminium Mesh



Roofing Nail



Angle Brush



Bar Bending Key



Bar Bending Plate



Base Plate



Binding Strip



Binding Wire



Binding Wire Black Annealed



Binding Wire Pvc Coated



Beach Umbrella



Chalk Powder



Chalkline Set



Chisel Flat & Pointed



Coco Brush



Cotton Rag



Common Wire Nail



Concrete Nail



Copper Clip



Coil Nail



Cotton Yarn Waste



Earth Clamp



Drill Bits



Crow Bar



Engineer Square



Fleece Rags



Fencing Mesh



Fiberglass Mesh



F Clamp



Fishing Line



Fisher Plug



Flickering Machine



Gland Packing



Floor Wiper



Foam Spray



Foldable Shovel



G Clamp



Garden Leaf Rake



Garden Rake



Floor Mop



Graphite Packing



Grating Clamp



Green Mesh



Hard Broom



Hard Brush Handle



Hessian Cloth



Tomax showels
Pointed and flat



Welding Set



PVC Packing Machine Set



PVC Tile Trim



Aluminium Cam Locks



Tomax Pallet Truck 3 Ton



Wheels



Blowers And Centrifugal Fans



Weighing Machines



Rotary Oil Pump

Tools And Equipments



Power Tools



Air Tools



Hand Tools



Workshop Equipments



Fluke And Meco Instruments



Telecommunication Tools



Cutting Tools



Construction Tools



Electrical Tools



Automobile Tools



Measuring Instruments

HOSES AND FITTINGS

MULTIPURPOSE HOSE MPH 20 BAR										
Part no.	Internal Diameter		Outside Diameter		Working Pressure		Burst Pressure		Weight	
	inch	mm	inch	mm	psi	bar	psi	bar	kg/m	lbs/ft
HYH00004	1/4	6.35	0.322	8.2	200	20	500	50	0.38	100
HYH00005	3/16	9.5	0.391	9.9	300	30	750	75	0.31	80
HYH00007	3/8	9.5	0.488	12.4	300	30	750	75	0.25	65
HYH00008	1/2	12.7	0.787	20.0	300	30	750	75	0.24	60
HYH00010	3/8	9.5	1.023	26.0	300	30	750	75	0.24	60
HYH00011	3/4	19.0	1.311	33.3	300	30	750	75	0.44	110
HYH00012	1	25.4	1.575	40.0	300	30	750	75	0.68	170
HYH00013	1 1/4	31.8	1.868	47.5	300	30	750	75	1.10	280
HYH00014	1 1/2	38.1	2.125	54.0	300	30	750	75	1.15	290

MultiPurpose Hose MPH 20 Bar

HYDRAULIC HOSE R1 SAE100 EN853										
Product Number	Hose ID		C.O.D	Max W.P		Min B.P		Weight		
	mm	in		MPa	psi	MPa	psi	mm	kg/m	
B15SH-08	8.3	1/4	14.3	22.5	3250	80	1000	100	0.23	
B15SH-09	9	5/16	15.7	21.5	3120	86	1230	118	0.27	
B15SH-10	10	3/8	18.1	18	2610	72	10440	125	0.34	
B15SH-11	12.5	1/2	25.4	16	2310	64	8960	160	0.45	
B15SH-16	16	5/8	34.5	13	1870	52	7140	205	0.51	
B15SH-19	19	3/4	39.5	10.5	1520	42	6090	240	0.66	
B15SH-25	25	1	39.5	8.7	1260	35	5090	300	1	
B15SH-32	31.5	1 1/4	48.3	6.3	910	28	3610	420	1.35	
B15SH-38	38	1 1/2	57.1	5	720	20	2890	500	1.64	
B15SH-51	51	2	66.5	4	580	16	2320	630	2.2	

Hydraulic Hose R1 SAE100 EN853

HYDRAULIC HOSE R2 SAE100 EN853										
Product Number	Hose ID		C.O.D	Max W.P		Min B.P		Weight		
	mm	in		MPa	psi	MPa	psi	mm	kg/m	
B52SH-06	6.3	1/4	15.7	40	5801	160	23204	100	0.34	
B52SH-08	8	5/16	17.3	35	5076	140	20004	115	0.39	
B52SH-10	10	3/8	19.7	33	4785	132	18944	130	0.49	
B52SH-15	12.5	1/2	25	27.5	3989	110	16096	160	0.59	
B52SH-16	16	5/8	26.2	25	3625	100	14500	210	0.71	
B52SH-19	19	3/4	30.1	21.5	3118	86	12472	240	0.89	
B52SH-25	25	1	38.9	16.5	2381	65	9430	300	1.13	
B52SH-32	31.5	1 1/4	48.5	12.5	1815	50	7232	400	2.21	
B52SH-38	38	1 1/2	55.9	9	1305	36	5220	500	2.41	
B52SH-51	51	2	66.6	8	1160	32	4640	610	3	

Hydraulic Hose R2 SAE100 EN853

HYDRAULIC HOSE 4SP EN856										
Product Number	Hose ID		C.O.D	Max W.P		Min B.P		Weight		
	mm	in		MPa	psi	MPa	psi	mm	kg/m	
S54SP-10	10	3/8	22.2	44.5	6404	178	25816	180	0.76	
S54SP-12	12.5	1/2	25.4	41.5	6009	168	24076	210	0.88	
S54SP-16	16	5/8	29	33	5006	140	20006	270	1.1	
S54SP-19	19	3/4	33	33	5006	140	20006	300	1.47	
S54SP-25	25	1	40.9	29	4206	113	16364	340	1.98	
S54SP-32	31	1 1/4	52.4	21	3045	84	12185	460	2.55	
S54SP-38	38	1 1/2	58.9	16.5	2381	74	10711	560	3.26	
S54SP-51	51	2	71.4	9.5	1365	60	8572	660	4.92	

Hydraulic Hose 4SP EN856

HYDRAULIC HOSE 4SH EN856										
Product Number	Hose ID		C.O.D	Max W.P		Min B.P		Weight		
	mm	in		MPa	psi	MPa	psi	mm	kg/m	
S54SH-19	19	3/4	33	42	6092	168	24166	280	1.62	
S54SH-25	25	1	39.9	38	5511	152	22048	340	2.12	
S54SH-32	31	1 1/4	47.1	32.5	4714	130	18855	450	2.55	
S54SH-38	38	1 1/2	55.1	29	4206	116	16814	560	3.26	

Hydraulic Hose 4SH EN856



Reinforced Transparent Hoses




Fire Hoses



Hydraulic Fittings

Contact us

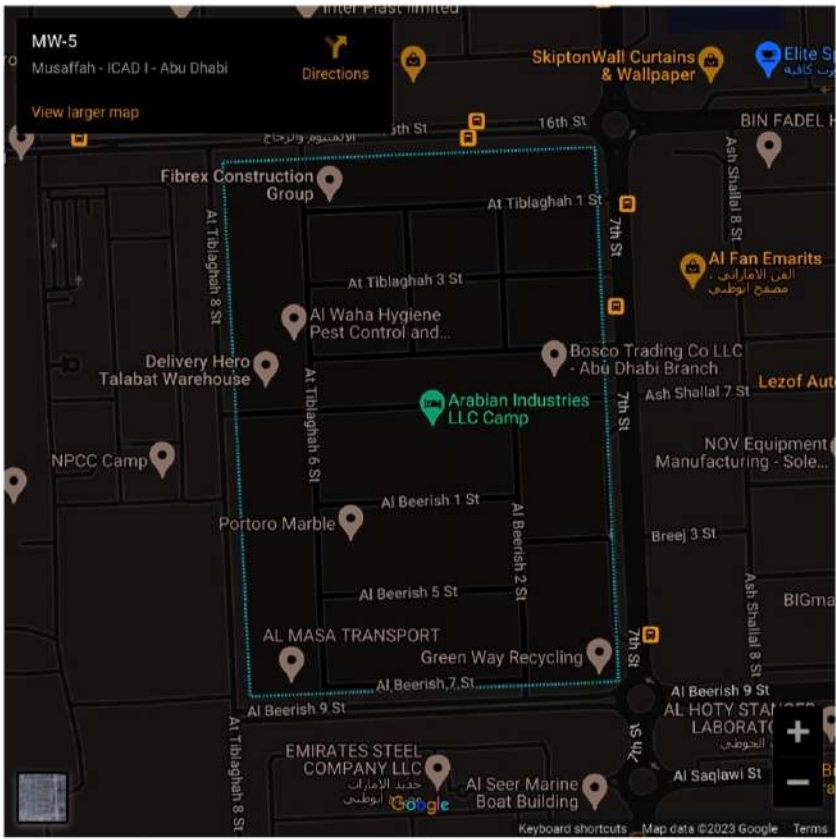

MW-5
Musaffah Industrial Area
Abu Dhabi
UAE
Office No.3

00971-555584865
00971-558963497

sales@unifastgroup.com
info@unifastgroup.com