BUILDING ENERGY SIMULATION



For Users of EnergyPlus, SPARK, DOE-2, BLAST, Genopt, Building Design Advisor, ENERGY-10 and their Derivatives

What's Inside?





- 5 International Weather Data for EnergyPlus
- **9** Ask an EnergyPlus Expert: EnergyPlus System Types, Blinds and Slats, Cooling Coil Controls, Master Meter Reports
- 12 Fall and Winter Educational Programs from Pacific Gas & Electric
- 14 DOE-2 Puzzler: DX Units
- **15** "Adapting DOE-2 to Meet the Research Interests of the Egyptian Housing Bureau and Building Research Center"
- 20 Free IBPSA-USA Membership
- 34 New DOE-2 Consultant: Daniel A. Katzenberger, P.E., of Edina, MN

Software

- 11 BLAST News
- 22 Building Design Advisor 2.0
- 13. 26 DOE-2.1E
 - 14 Training and Help Desk
 - 26 Software and Services
- 22 DoeRayMe, a New Screening Tool Application
- 20 DrawBDL 3.0, New and Improved!
- 23 ENERGY-10 1.5
- 5, 25 EnergyPlus 1.0.2
 - 1 User Group Weather Data
 - 21 User Group
 - 25 Software and Services
- 21 GenOpt 1.1.2
- 10 Building Energy Software availble from Lawrence Berkeley National Laboratory
- 36 Support Tools for EnergyPlus and DOE-2 from The Deringer Group
- 2 VisualSPARK 1.0.2

Departments.....


- 22 BLDG-SIM Mailing List
- 24 Meetings, Conferences, Symposia



Join the EnergyPlus User Group

The developers of EnergyPlus have formed a support group to foster discussion and maintain an archive of information for program Users.

We invite questions about program usage and suggestions for improvement to the code. Go to **groups.yahoo.com/group/EnergyPlus_Support/**







SPARK is an equation-based simulation environment that allows you to build customized models of complex physical processes by connecting calculation objects that represent system components like walls, fans, heat exchangers, chillers, ducts, mixing boxes, controls, etc. It is aimed at the simulation of innovative and/or complex building systems that are beyond the scope of whole-building programs like DOE-2 and EnergyPlus. VisualSPARK adds a graphical user interface to SPARK to simplify use of the program.

VisualSPARK 1.0.2 Released!

VisualSPARK 1.0.2 may be downloaded free of charge from

http://SimulationResearch.lbl.gov > VisualSPARK

New Features

Sparse linear solution technique

- Added sparse linear solution method based on the C library umfpack (http://www.cise.ufl.edu/research/sparse/umfpack)
 v3.2 by Tim Davis. This new solution method is selected by specifying the value 4 for the key
 MatrixSolvingMethod in the problem.prf file. It does not rely on vendor-specific BLAS routines but instead on vanilla C code, thus ensuring portability of the SPARK program.
- Significant gains in calculation speed by many orders of magnitude have been observed on large problems for which the Jacobian matrix is typically more than 90% sparse.

Automatic Jacobian refresh strategy

- Added value 0 as a possible choice for the TrueJacobianEvalStep key in the problem.prf file. The value 0 indicates that the Jacobian matrix will be refreshed automatically by the solver code whenever it is needed to ensure robust and fast convergence. The refresh strategy is based on the convergence behavior of the weighted residual norm and of the increment norm between successive iterations.
- For values larger than zero, the key TrueJacobianEvalStep still specifies the iteration frequency at which the Jacobian should be reevaluated.

Statistics log file

- At the end of the simulation, *solver* generates a log file with performance statistics about the solver operation. In particular, you can find information on:
 - the preference settings used for the simulation for each strong component;
 - the average sparsity of the Jacobian matrix and the number of times it has been refreshed; and the operation of both
 the linear solver and the nonlinear solver with average calculation times. This information can be used to
 compare the computational efficiency of solving models with different formulations or different preference
 settings.

Full affine invariant scaling scheme

- Replaced previous scaling schemes with a single scaling scheme that achieves fully affine invariant scaling in both the variable space and the residual space. This makes *solver* less sensitive to changes in the variable units and to formulations where the variables show very different orders of magnitude.
- If convergence difficulties are encountered with a particular problem, the full scaling scheme should be selected in the problem.prf file to improve the numerical behavior of *solver*.

Absolute tolerance property for each problem variable

- A new variable property, ATOL, was added to the SPARK language on the PROBE, PORT and LINK statements in order to specify the absolute tolerance for each problem variable. The ATOL property should be set to the absolute value at which the variable in question is essentially insignificant.
- In *solver*, added support to load the ATOL property for each problem variable, thus replacing the AbsTolerance keyword previously specified in the **problem.prf** file at the component level.
- Improved the input handler to allow it to read in properties of problem variables along with the variable values at the specified time stamps. The syntax to specify the property ATOL of the variable X is the qualified name X: ATOL. The input handler can read in values for any variable properties, namely MIN, MAX, ATOL and INIT.

Problem driver API

- The problem driver application programming interface (API) added to VisualSPARK 1.0.2 allows an advanced user to:
 - customize the sequence of operations to re-solve the same problem,
 - manage and solve multiple problems,
 - retrieve solution values and specify new inputs for a new simulation of the same problem, and
 - change runtime parameters (e.g., to perform sensitivity analysis).
- We have also modified the main.cpp file that implements the main SPARK driver function to use the new set of API.
 Comprehensive documentation on how to write such a problem driver function is available at http://simulationresearch.lbl.gov VisualSPARK.

Default preferences in setupcpp

- Added support for default values for the component preferences specified in a file called default.prf and residing in the
 working directory. The default values are used to populate the template preference file associated with the solution
 sequence generated by setupcpp for the problem.
- If the file exists upon calling *setupcpp*, the values in the file are used in place of the hard-coded default preference settings. If no such file exists, then *setupcpp* will generate a template file with the hard-coded default preferences for possible future modification by the user.

Changes

Documentation

- Merged glossary of terms between the SPARK Reference Manual and the VisualSPARK Users Guide.
- Enforced text conventions throughout the documentation to better distinguish the different elements of the SPARK language.

Parser

• Discontinued usage of the keyword UPDATE_FROM_LINK in LINK, PORT and PROBE statements and replaced it with the keyword INPUT_FROM_LINK that better reflects its behavior

Solver

Improved convergence strategy

• In order to ensure that badly-scaled systems are solved with satisfactorily precision, we now force the convergence check in the non-linear solver to occur in the variable space, i.e. solely based on the increments value, after the first iteration. This represents a change from *VisualSPARK* 1.0.1 where a successful residual check carried out even after the first iteration was a sufficient condition to stop the iteration. The convergence test is stricter and more robust, especially for problems with variables with very different order of magnitudes.

Variable scales based on individual absolute tolerances

• The introduction of the ATOL property in the SPARK language allows to consider an individual absolute tolerance for each problem variable, as opposed to for each strong component as in VisualSPARK 1.0.1. The convergence check in the nonlinear solver and the computation of the cost function used with the backtracking Newton schemes have been updated to support the new absolute tolerance mechanism.

Graphical User Interface

- Changed default wall clock settings to year 2002
- Changed title of button from "MODIFY" to "MODIFY CLASS PATH"
- Added support for new solver features in the component preferences editor
- The absolute tolerance entry has been removed from the component preferences editor because it is now specified on a variable-by variable basis.
- Added the sparse LU matrix solving method in the component preferences editor.
- Reduced scaling types to "None" and "Full" in place of the former scaling options in VisualSPARK 1.0.1.

Bug Fixes

Documentation

• Corrected typo in description of the macro links where the single quote ' used to prefix an object name in a hierarchy of objects was replaced with the single quote ` as prescribed by the SPARK syntax.

has been replaced with

obj1`obj2`obj3~linkname

 SPARK documentation may now be downloaded as pdf files; right-click on links below or go to http://SimulationResearch.lbl.gov

 VisualSPARK.

SPARK Reference Manual, VisualSPARK Users Guide, SPARK Library Functions, SPARK Problem Driver API.

Parser

- Fixed a bug in the PARAMETER keyword (did not work when there was more than one PARAMETER statement in one class).
- Fixed infinite loop bug caused by aliased variables. Aliased variables are created in LINK statements that do NOT contain obj.port connections.

Setupcpp

• Write out error message showing the calling syntax if *setupcpp* is executed with no argument at the command-line instead of crashing.

Solver

• Fixed bug in *sparksym* for the *mathomatic* symbolic solver that limited to 14 the number of variables allowed in the equation to be processed.

SPARK was developed by the Simulation Research Group of Lawrence Berkeley National Laboratory and by Ayres Sowell Associates, with support from the Assistant Secretary for Energy Efficiency and Renewable Energy, Office of Building Technology Programs of the U.S. Department of Energy, program manager Dru Crawley.

VisualSPARK 1.0.2 may be downloaded free of charge from

http://SimulationResearch.lbl.gov > VisualSPARK

EnergyPlus Version 1.0.2

To download a free copy of the program go to www.energyplus.gov



International Weather Data for EnergyPlus

One of the most common questions asked of the EnergyPlus Development Team is 'where can I get weather data for my location?' In the US and Canada, there are good-quality, free, public-domain data (TMY2 and CWEC). For other locations, it's a bit tougher. ASHRAE (TC 4.2 Weather Information) sponsored development of IWEC (International Weather for Energy Calculations) data for 227 locations in more than 70 countries outside the US and Canada. In your country, the local meteorological office often has better and more complete data than is available through the World Meteorological Organization (and in the US, the National Climatic Data Center, where ASHRAE obtained the source hourly data for the IWEC). If there wasn't enough good quality data available, there is no location in the IWEC.

Below is the list of international locations (IWEC) that will be available (again) soon from ASHRAE. We have licensed the data for EnergyPlus users at no cost. We will place the new IWEC data on our web site (www.energyplus.gov) as soon as it becomes available. If you have data for locations that are not listed below and would be willing to share the data with other EnergyPlus users, please contact Dru Crawley (Drury.Crawley@ee.doe.gov).

INTERNATIONAL WEATHER FOR ENERGY CALCULATIONS (IWEC WEATHER FILES) Station_name,Country,Time Zone,Latitude (deg min),Longitude (deg min),Elevation (m)

Algeria	ALGIERS,DZA,+ 01 00,N 36 43,E 003 15,25
Australia	
BUENOS AIRES, ARG, - 03 00, S 34 49, W 058 32, 20	LEARMONTH,AUS,+ 08 00,S 22 14,E 114 05,6
ADELAIDE, AUS, + 09 30, S 34 56, E 138 31,4	MELBOURNE,AUS,+ 10 00,S 37 40,E 144 50,141
BRISBANE,AUS,+ 10 00,S 27 23,E 153 06,5	PERTH,AUS,+ 08 00,S 31 56,E 115 57,29
CANBERRA,AUS,+ 10 00,S 35 18,E 149 11,577	PORT HEDLAND, AUS, + 08 00, S 20 14, E 119 06,8
DARWIN,AUS,+ 09 30,S 12 24,E 130 52,30	SYDNEY,AUS,+ 10 00,S 33 57,E 151 11,3
Austria	31211, 133, 10 33, 3 33 31, 1 1 1 1 1 1, 3
GRAZ,AUT,+ 01 00,N 47 00,E 015 26,347	SALZBURG.AUT,+ 01 00.N 47 48.E 013 00.450
INNSBRUCK,AUT,+ 01 00,N 47 16,E 011 21,593	VIENNA SCHWECHAT, AUT, + 01 00,N 48 07,E 016 34,190
LINZ,AUT,+ 01 00,N 48 14,E 014 12,313	VIENNA SCHWECHAT,AOT, 1 01 00,11 40 07,E 010 34,190
Belarus	MINSK,BLR,+ 02 00,N 53 52,E 027 32,234
Belgium	WIII 4011, DE11, 1 02 00, 14 00 02, E 021 02, 204
	CAINT HUDEDT DEL + 04 00 N 50 00 E 005 04 557
BRUSSELS,BEL,+ 01 00,N 50 54,E 004 32,58	SAINT HUBERT,BEL,+ 01 00,N 50 02,E 005 24,557
OOSTENDE,BEL,+ 01 00,N 51 12,E 002 52,5	LA DAZ DOL. 04.00 0.40 04.W 000.44.4040
Bolivia	LA PAZ,BOL,- 04 00,S 16 31,W 068 11,4042
Bosnia and Herzegovina	BANJA LUKA,BIH,+ 01 00,N 44 47,E 017 13,156
Brazil	
BELEM,BRA,- 03 00,S 01 23,W 048 29,16	SAO PAULO,BRA,- 03 00,S 23 37,W 046 39,803
BRASILIA,BRA,- 03 00,S 15 52,W 047 56,1061	BANDAR SERI BEGAWAN,BRN,+ 08 00,N 04 56,E 114 56,15
RECIFE,BRA,- 03 00,S 08 06,W 034 53,19	
Bulgaria	
PLOVDIV,BGR,+ 02 00,N 42 08,E 024 45,185	VARNA,BGR,+ 02 00,N 43 12,E 027 55,43
SOFIA,BGR,+ 02 00,N 42 44,E 023 23,595	
Chile	
ANTOFAGASTA,CHL,- 04 00,S 23 26,W 070 26,120	PUNTA ARENAS, CHL, - 04 00, S 53 00, W 070 51, 37
CONCEPCION.CHL,- 04 00,S 36 46,W 073 03,16	SANTIAGO,CHL,- 04 00,S 33 23,W 070 47,476
EASTER ISLAND, CHL, - 06 00, S 27 09, W 109 25,47	

Continued ...

INTERNATIONAL WEATHER FOR ENERGY CALCULATIONS (IWEC WEATHER FILES) Station_name,Country,Time Zone,Latitude (deg min),Longitude (deg min),Elevation (m)

China	LANZHOLL CLIN + 00 00 N 2C 02 F 402 F2 4540
BEIJING,CHN,+ 08 00,N 39 48,E 116 28,32 GUANGZHOU,CHN,+ 08 00,N 23 08,E 113 19,8	LANZHOU,CHN,+ 08 00,N 36 03,E 103 53,1518 SHANGHAI,CHN,+ 08 00,N 31 10,E 121 26,7
HARBIN,CHN,+ 08 00,N 45 43,E 126 41,143	
KUNMING,CHN,+ 08 00,N 25 01,E 102 41,1492	SHENYANG,CHN,+ 08 00,N 41 47,E 123 29,43 URUMQI,CHN,+ 08 00,N 43 50,E 087 32,786
Colombia	BOGOTA,COL,- 05 00,N 04 42,W 074 08,2548
Cuba	HAVANA,CUB,- 05 00,N 22 59,W 082 24,59 LARNACA,CYP,+ 02 00,N 34 53,E 033 38,2
Cyprus	LARNACA,C17,+ 02 00,N 34 33,E 033 36,2
Czech Republic	DDA OUE 075 + 04 00 N 50 00 F 044 47 000
OSTRAVA,CZE,+ 01 00,N 49 43,E 018 11,256	PRAGUE, CZE, + 01 00, N 50 06, E 014 17,366
Denmark	COPENHAGEN, DNK, + 01 00, N 55 38, E 012 40,5
Ecuador	QUITO,ECU,- 05 00,S 00 09,W 078 29,2812
Egypt	
ASWAN,EGY,+ 02 00,N 23 58,E 032 47,194	CAIRO,EGY,+ 02 00,N 30 08,E 031 24,74
Fiji	NADI,FJI,+ 12 00,S 17 45,E 177 27,18
Finland	
HELSINKI,FIN,+ 02 00,N 60 19,E 024 58,56	TAMPERE,FIN,+ 02 00,N 61 25,E 023 35,112
France	
BORDEAUX,FRA,+ 01 00,N 44 50,W 000 42,61	MONTPELLIER,FRA,+ 01 00,N 43 35,E 003 58,6
BREST,FRA,+ 01 00,N 48 27,W 004 25,103	NANCY,FRA,+ 01 00,N 48 41,E 006 13,217
CLERMONT-FERRAND,FRA,+ 01 00,N 45 47,E 003 10,330	NANTES,FRA,+ 01 00,N 47 10,W 001 36,27
DIJON,FRA,+ 01 00,N 47 16,E 005 05,227	NICE,FRA,+ 01 00,N 43 39,E 007 12,10
LYON,FRA,+ 01 00,N 45 44,E 005 05,240	PARIS ORLY,FRA,+ 01 00,N 48 44,E 002 24,96
MARSEILLE,FRA,+ 01 00,N 43 27,E 005 14,36	STRASBOURG,FRA,+ 01 00,N 48 33,E 007 38,154
Germany	
BERLIN,DEU,+ 01 00,N 52 28,E 013 24,49	KOLN,DEU,+ 01 00,N 50 52,E 007 10,99
BREMEN, DEU, + 01 00, N 53 03, E 008 48,5	MANNHEIM, DEU, + 01 00, N 49 31, E 008 33, 100
DUSSELDORF,DEU,+ 01 00,N 51 17,E 006 47,44	MUNICH,DEU,+ 01 00,N 48 08,E 011 42,529
FRANKFURT AM MAIN, DEU, + 01 00, N 50 03, E 008 36,113	STUTTGART,DEU,+ 01 00,N 48 41,E 009 13,419
HAMBURG,DEU,+ 01 00,N 53 38,E 010 00,16	
Great Britain	HEMORY ORD : 00 00 N 50 44 E 004 44 44
ABERDEEN/DYCE,GBR,+ 00 00,N 57 12,W 002 13,65	HEMSBY,GBR,+ 00 00,N 52 41,E 001 41,14
AUGHTON,GBR,+ 00 00,N 53 33,W 002 55,56	JERSEY/CHANNEL ISLANDS,GBR,+ 00 00,N 49 13,W 002 12,84
BELFAST,GBR,+ 00 00,N 54 39,W 006 13,81	LEUCHARS,GBR,+ 00 00,N 56 23,W 002 52,12
BIRMINGHAM,GBR,+ 00 00,N 52 27,W 001 44,99	LONDON/GATWICK,GBR,+ 00 00,N 51 09,W 000 11,62
FINNINGLEY,GBR,+ 00 00,N 53 29,W 001 00,17 Greece	OBAN,GBR,+ 00 00,N 56 25,W 005 28,4
	THESSAL ONLY CDC + 02 00 N 40 24 E 022 59 4
ANDRAVIDA,GRC,+ 02 00,N 37 55,E 021 17,12 ATHENS,GRC,+ 02 00,N 37 54,E 023 44,15	THESSALONIKI,GRC,+ 02 00,N 40 31,E 022 58,4
Hungary	
DEBRECEN,HUN,+ 01 00,N 47 29,E 021 38,112	SZOMBATHELY,HUN,+ 01 00,N 47 16,E 016 38,221
lceland	REYKJAVIK,ISL,+ 00 00,N 64 08,W 021 54,61
India	TETTOAVII, IOE, 1 00 00, IN 04 00, VV 021 04,01
AHMADABAD,IND,+ 05 30,N 23 04,E 072 38,55	MADRAS,IND,+ 05 30,N 13 00,E 080 11,16
BOMBAY,IND,+ 05 30,N 19 07,E 072 51,14	NAGPUR,IND,+ 05 30,N 21 06,E 079 03,310
CALCUTTA, IND, + 05 30, N 19 07, E 072 51, 14	NEW DELHI.IND.+ 05 30.N 28 35.E 077 12.216
GOA/PANAJI,IND,+ 05 30,N 22 39,E 066 27,6 GOA/PANAJI,IND,+ 05 30,N 15 29,E 073 49,60	TRIVANDRUM,IND,+ 05 30,N 08 29,E 077 12,210
Ireland	11X1VA11D1XUIVI,11VD, 1 00 00,1V 00 28,E 0/0 0/,04
BELMULLET, IRL, + 00 00, N 54 14, W 010 00, 10	KILKENNY.IRL.+ 00 00.N 52 40.W 007 16.64
BIRR,IRL,+ 00 00,N 53 05,W 007 53,72	MALIN,IRL,+ 00 00,N 55 22,W 007 10,64
CLONES,IRL,+ 00 00,N 53 05,W 007 53,72 CLONES,IRL,+ 00 00,N 54 11,W 007 14,89	VALENTIA OBSERVATORY,IRL,+ 00 00,N 51 56,W 010 15,14
DUBLIN.IRL,+ 00 00,N 53 26,W 006 15,85	VALLIVITA OBSERVATORT, IRE, T 00 00, N 31 30, W 010 13, 14
Israel	JERUSALEM,ISR,+ 02 00,N 31 47,E 035 13,782
131 001	ULINOUALLIVI,IOIN, 1 UZ UU,IN UT +1,E UUU 10,10Z

Continued ...

INTERNATIONAL WEATHER FOR ENERGY CALCULATIONS (IWEC WEATHER FILES) Station_name,Country,Time Zone,Latitude (deg min),Longitude (deg min),Elevation (m)

Italy	
BRINDISI,ITA,+ 01 00,N 40 39,E 017 57,10	PALERMO,ITA,+ 01 00,N 38 11,E 013 06,34
GENOVA,ITA,+ 01 00,N 44 25,E 008 51,3	PISA,ITA,+ 01 00,N 43 41,E 010 23,1
MESSINA,ITA,+ 01 00,N 38 12,E 015 33,51	ROME,ITA,+ 01 00,N 41 48,E 012 14,3
MILAN,ITA,+ 01 00,N 45 37,E 008 44,211	TORINO,ITA,+ 01 00,N 45 13,E 007 39,287
NAPLES,ITA,+ 01 00,N 40 51,E 014 18,72	VENICE,ITA,+ 01 00,N 45 30,E 012 20,6
Japan	- , , , , -
KAGOSHIMA,JPN,+ 09 00,N 31 34,E 130 33,5	SAPPORO,JPN,+ 09 00,N 43 03,E 141 20,19
MATSUMOTO,JPN,+ 09 00,N 36 15,E 137 58,611	SHIMONOSEKI,JPN,+ 09 00,N 33 57,E 130 56,19
MIHO (CIV/JASDF), JPN, + 09 00, N 35 29, E 133 15,9	TOKYO HYAKURI,JPN,+ 09 00,N 36 11,E 140 25,35
NAGOYA,JPN,+ 09 00,N 35 15,E 136 56,17	TOSASHIMIZU,JPN,+ 09 00,N 32 43,E 133 01,33
OSAKA,JPN,+ 09 00,N 34 47,E 135 27,15	103A3HIIVIIZU,JFN,+ 09 00,N 32 43,E 133 01,33
Kazakstan	SEMIPALATINSK,KAZ,+ 06 00,N 50 21,E 080 15,196
	NAIROBI,KEN.+ 03 00.S 01 19.E 036 55,1624
Kenya	NAIRODI, NEIN, + 03 00, 3 01 19, E 030 33, 1024
Korea (North)	DIV(01/01/01/01 DD)/
CH'ONGJIN,PRK,+ 09 00,N 41 47,E 129 49,43	P'YONGYANG,PRK,+ 09 00,N 39 02,E 125 47,38
HAEJU,PRK,+ 09 00,N 38 02,E 125 42,81	
Korea (South)	
INCH'ON,KOR,+ 09 00,N 37 29,E 126 33,70	KWANGJU,KOR,+ 09 00,N 35 08,E 126 55,72
KANGNUNG,KOR,+ 09 00,N 37 45,E 128 54,27	ULSAN,KOR,+ 09 00,N 35 33,E 129 19,33
Libya	TRIPOLI,LBY,+ 02 00,N 32 40,E 013 09,81
Lithuania	KAUNAS,LTU,+ 02 00,N 54 53,E 023 53,75
Macau	MACAU,MAC,+ 08 00,N 22 12,E 113 32,86
Madagascar	ANTANANARIVO,MDG,+ 03 00,S 18 48,E 047 29,1276
Malaysia	711711111111111111111111111111111111111
GEORGE TOWN.MYS.+ 08 00.N 05 18.E 100 16.4	KUALA LUMPUR,MYS,+ 08 00,N 03 07,E 101 33,22
KOTA BAHARU,MYS,+ 08 00,N 06 10,E 102 17,5	KUCHING,MYS,+ 08 00,N 01 29,E 110 20,27
Martinique	FORT-DE-FRANCE,MTQ,- 04 00,N 14 36,W 061 00,4
•	FORT-DE-FRANCE, WITQ, - 04 00, IN 14 30, W 00 1 00,4
Mexico	VEDACDUZ MEV. 00 00 NI 40 40 W 000 00 44
ACAPULCO,MEX,- 06 00,N 16 46,W 099 45,5	VERACRUZ,MEX,- 06 00,N 19 12,W 096 08,14
MEXICO CITY,MEX,- 06 00,N 19 26,W 099 05,2234	
Mongolia	
ULAANBATAAR,MNG,+ 08 00,N 47 56,E 106 59,1316	ULAANGOM,MNG,+ 08 00,N 49 53,E 092 05,936
Morocco	CASABLANCA/NOUASSER,MAR,+ 00 00,N 33 22,W 007 35,206
Netherlands	
AMSTERDAM,NLD,+ 01 00,N 52 18,E 004 46,-2	GRONINGEN,NLD,+ 01 00,N 53 08,E 006 35,4
BEEK,NLD,+ 01 00,N 50 55,E 005 47,116	
New Zealand	
AUCKLAND,NZL,+ 12 00,S 37 01,E 174 48,6	WELLINGTON,NZL,+ 12 00,S 41 18,E 174 47,67
CHRISTCHURCH,NZL,+ 12 00,S 43 29,E 172 33,34	
Norway	
BERGEN,NOR,+ 01 00,N 60 18,E 005 13,50	OSLO/FORNEBU,NOR,+ 01 00,N 59 54,E 010 37,17
Pakistan	KARACHI,PAK,+ 05 00,N 24 54,E 067 08,22
Paraguay	ASUNCION,PRY,- 04 00,S 25 15,W 057 34,101
Peru	, , , , , , , , , , , , , , , , , , , ,
AREQUIPA,PER,- 05 00,S 16 19,W 071 33,2520	LIMA,PER,- 05 00,S 12 00,W 077 07,13
CUZCO,PER,- 05 00,S 13 33,W 071 59,3249	2
Philippines	MANILA,PHL,+ 08 00,N 14 31,E 121 00,21
Poland	
KOLOBRZEG,POL,+ 01 00,N 54 11,E 015 35,5	POZNAN,POL,+ 01 00,N 52 25,E 016 50,92
KRAKOW,POL,+ 01 00,N 50 05,E 019 48,237	
	WARSAW,POL,+ 01 00,N 52 10,E 020 58,107
Portugal	EADO DDT + 00 00 N 27 04 W 007 50 4
BRAGANCA,PRT,+ 00 00,N 41 48,W 006 44,692	FARO,PRT,+ 00 00,N 37 01,W 007 58,4
COIMBRA,PRT,+ 00 00,N 40 12,W 008 25,140	LAJES,PRT,- 01 00,N 38 46,W 027 06,55
EVORA,PRT,+ 00 00,N 38 34,W 007 54,321	PORTO,PRT,+ 00 00,N 41 14,W 008 41,73

Continued ...

INTERNATIONAL WEATHER FOR ENERGY CALCULATIONS (IWEC WEATHER FILES) Station_name,Country,Time Zone,Latitude (deg min),Longitude (deg min),Elevation (m)

Romania	
BUCHAREST,ROM,+ 02 00,N 44 30,E 026 08,91	CRAIOVA,ROM,+ 02 00,N 44 14,E 023 52,195
CLUJ-NAPOCA,ROM,+ 02 00,N 46 47,E 023 34,413	GALATI,ROM,+ 02 00,N 45 30,E 028 01,72
CONSTANTA,ROM,+ 02 00,N 44 13,E 028 38,14	TIMISOARA,ROM,+ 02 00,N 45 46,E 021 15,88
Russia	
ARKHANGEL'SK,RUS,+ 04 00,N 64 32,E 040 28,13	OMSK,RUS,+ 06 00,N 54 56,E 073 24,123
CHITA,RUS,+ 09 00,N 52 01,E 113 20,685	SAINT-PETERSBURG,RUS,+ 03 00,N 59 58,E 030 18,4
EKATERINBURG,RUS,+ 05 00,N 56 48,E 060 38,237	SAMARA,RUS,+ 04 00,N 53 15,E 050 27,44
IRKUTSK,RUS,+ 08 00,N 52 16,E 104 21,513	YAKUTSK,RUS,+ 09 00,N 62 05,E 129 45,103
MOSCOW,RUS,+ 03 00,N 55 45,E 037 38,156	
Saudi Arabia	RIYADH,SAU,+ 03 00,N 24 42,E 046 48,612
Senegal	DAKAR,SEN,+ 00 00,N 14 44,W 017 30,24
Singapore	SINGAPORE,SGP,+ 08 00,N 01 22,E 103 59,16
Slovakia	
BRATISLAVA,SVK,+ 01 00,N 48 12,E 017 12,130	KOSICE,SVK,+ 01 00,N 48 42,E 021 16,232
Slovenia	LJUBLJANA,SVN,+ 01 00,N 46 13,E 014 29,385
South Africa	
CAPE TOWN,ZAF,+ 02 00,S 33 59,E 018 36,42	
JOHANNESBURG,ZAF,+ 02 00,S 26 08,E 028 14,1700	
Spain	
BARCELONA,ESP,+ 01 00,N 41 17,E 002 04,6	SANTANDER,ESP,+ 01 00,N 43 28,W 003 49,40
MADRID,ESP,+ 01 00,N 40 27,W 003 33,582	SEVILLA,ESP,+ 01 00,N 37 25,W 005 54,31
PALMA,ESP,+ 01 00,N 39 33,E 002 44,8	VALENCIA,ESP,+ 01 00,N 39 30,W 000 28,62
Sweden	
GOTEBORG LANDVETTER,SWE,+ 01 00,N 57 40,E 012 18,169	OSTERSUND/FROSON,SWE,+ 01 00,N 63 11,E 014 30,370
KARLSTAD,SWE,+ 01 00,N 59 22,E 013 28,55	STOCKHOLM ARLANDA,SWE,+ 01 00,N 59 39,E 017 57,61
KIRUNA,SWE,+ 01 00,N 67 49,E 020 20,452	
Switzerland	GENEVA,CHE,+ 01 00,N 46 15,E 006 08,416
Syria	DAMASCUS,SYR,+ 02 00,N 33 25,E 036 31,605
Taiwan	TAIPEI,TWN,+ 08 00,N 25 04,E 121 33,6
Thailand	BANGKOK,THA,+ 07 00,N 13 55,E 100 36,12
Tunisia	TUNIS,TUN,+ 01 00,N 36 50,E 010 14,4
Turkey	
ANKARA,TUR,+ 02 00,N 40 07,E 032 59,949	IZMIR,TUR,+ 02 00,N 38 30,E 027 01,5
ISTANBUL,TUR,+ 02 00,N 40 58,E 028 49,37	
Ukraine	
KIEV,UKR,+ 02 00,N 50 24,E 030 27,168	ODESSA,UKR,+ 02 00,N 46 27,E 030 42,35
United Arab Emirates	ABU DHABI,ARE,+ 04 00,N 24 26,E 054 39,27
Uruguay	MONTEVIDEO,URY,- 03 00,S 34 50,W 056 00,32
Uzbekistan	TASHKENT,UZB,+ 05 00,N 41 16,E 069 16,458
Venezuela	CARACAS,VEN,- 04 00,N 10 36,W 066 59,48
Vietnam	HANOI,VNM,+ 07 00,N 21 01,E 105 48,6
Yugoslavia	
BELGRADE,YUG,+ 01 00,N 44 49,E 020 17,99	
Zimbabwe	PODGORICA,YUG,+ 01 00,N 42 22,E 019 15,33 HARARE,ZWE,+ 02 00,S 17 55,E 031 08,1503

If you want to know more about weather data in EnergyPlus and how to use the WeatherConverter, go to the DocMainMenu (under Start, Programs, EnergyPlus Programs) and click on Auxiliary Programs and Developer Guides. Then click on Auxiliary Program Information. The Weather Converter is discussed beginning on page 16.

Thanks, EnergyPlus Development Team

EnergyPlus is being developed by University of Illinois, CERL, and Lawrence Berkeley National Laboratory, with the assistance of the Florida Solar Energy Center, GARD Analytics, the University of Wisconsin, Oklahoma State University and others. Development of EnergyPlus is supported by the U. S. Department of Energy, Dru Crawley, Program Manager.



Ask An EnergyPlus Expert



Question:

Does EnergyPlus support heating or cooling systems other than air conditioning systems? I am thinking of water systems like underfloor heating, active wall/ceiling systems and radiator systems.

Answer:

Yes, it can do all of these. In addition to forced air systems using DX and chilled water cooling, EnergyPlus can model hot water radiators (BASEBOARD HEATER:Water:Convective), heated and cooled surfaces (LOW TEMP RADIANT SYSTEM:HYDRONIC, LOW TEMP RADIANT SYSTEM:ELECTRIC) and gas or electric radiant heaters (HIGH TEMP RADIANT SYSTEM).



Question:

I noticed in the EnergyPlus Input/Output Reference Manual that Fig. 5 (p. 60) does not show blinds consisting of slats. Further the verbal description of slat details in the Manual is unclear

My question, then, is this: What is the slat width and the slat separation?

Answer:

In the field descriptions for Material:WindowBlind, the references to Fig. 5 are incorrect; they should all be references to Fig. 6, found on p. 66. Our apologies for the confusion. Also, check out the "blinds" section of the Engineering Doc Reference under "Optical Properties of Windows". There is also an example file: PurchAirWindowBlind.idf which may illustrate the use for you.

Question:

I am having trouble getting my controls to work for a single duct VAV with reheat.

My cooling coil is producing 28F discharge air and my reheat terminals are running full reheat.

Answer:

See the VAVSingleDuctReheat.idf example in EnergyPlus\Examples\Misc to see how the cooling coil controls should be set up.

Question:

If the building's electric consumption only depends on the lighting and the electric equipment, then where do I input the chiller and chilled water pump electric consumption to effect the building total electric consumption? If i change the nominal capacity in CHILLER:ELECTRIC, the result on total building electric consumption doesn't change at all. What is the effect of CHILLER:ELECTRIC in this building simulation?

Answer:

To report the master meter for the entire building, including HVAC equipment, add the following to your input file: report meter, electricity:facility, hourly; (or monthly, or environment)
To see just the electric consumption of the chiller, add this:

report variable, *, Chiller Electric Consumption, hourly;

See the Input Output Reference, pp. 530-537 for more information.

Building Energy Software from Lawrence Berkeley National Laboratory

Free Downloads			
BDA 2.0 (Building Design Advisor) A beta version of 3.0 is available from vpal@lbl.gov	gaia.lbl.gov/BDA		
COMIS (multi-zone air flow and contaminant transport model)	www-epb.lbl.gov/comis		
EnergyPlus 1.0.2 (new-generation whole-building energy analysis program, based on BLAST and DOE-2)	www.energyplus.gov or SimulationResearch.lbl.gov > EnergyPlus		
GenOpt®1.1.2 (generic optimization program)	SimulationResearch.lbl.gov > GenOpt		
RADIANCE (analysis and visualization of lighting in design) Desktop Radiance (integrates the Radiance Synthetic Imaging System with AutoCAD Release 14)	radsite.lbl.gov/radiance/ radsite.lbl.gov/deskrad/		
RESEM (Retrofit Energy Savings Estimation Model) (calculates long-term energy savings directly from actual utility data)	eetd.lbl.gov/btp/resem.htm		
SUPERLITE (calculates illuminance distribution for room geometries)	eetd.lbl.gov/btp/superlite2.html		
THERM 2.1a (models two-dimensional heat-transfer effects in building components where thermal bridges are of concern)	windows.lbl.gov/software/therm/therm.html		
VisualSPARK 1.0.2 (Simulation Problem Analysis and Research Kernel) (connect component models to simulate innovative building envelope and HVAC systems)	SimulationResearch.lbl.gov > VisualSPARK		
WINDOW 5 (thermal analysis of window products)	windows.lbl.gov/software/window/ window.html		
Free Software / Request by Fax	c from 510.486.4089		
RESFEN 3.1 (choose energy-efficient, cost-effective windows for a given residential application)	windows.lbl.gov/software/resfen/resfen.html		
Web Based			
Home Energy Saver (quickly computes home energy use) and Home Improvement Tool (simplified Home Energy Saver)	hes.lbl.gov and hit.lbl.gov		
Purchase			
ADELINE 2.0 (daylighting performance in complex spaces)	radsite.lbl.gov/adeline/		



California Energy Commission Webcast of Energy Code Training
January 15, 2003 - Live and OnLine
Register at http://www.energyvideos.com

BLAST*news*

www.bso.uiuc.edu

Building Systems Laboratory, 30 Mech Eng Bldg. University of Illinois, 1206 West Green Street Urbana, IL 61801

Tel: (217) 333-3977 - Fax: (217) 244-6534 support@blast.bso.uiuc.edu

The **Building Loads Analysis and System Thermodynamics (BLAST** program predicts energy consumption, energy system performance and cost for new or existing (pre-retrofit) buildings.

BLAST contains three major sub-programs:

- Space Load Prediction computes hourly space loads in a building based on weather data and user inputs detailing the building construction and operation.
- Air Distribution System Simulation uses the computed space loads, weather data, and user inputs.
- Central Plant Simulation computes monthly and annual fuel and electrical power consumption.

Heat Balance Loads Calculator (HBLC)

The BLAST graphical interface (HBLC) is a Windowsbased interactive program for producing

BLAST input files. You can download a demo version of HBLC (for MS Windows) from the BLAST web site (User manual included).

HBLC/BLAST Training Courses

Experience with the HBLC and the BLAST family of programs has shown that new users can benefit from a session of structured training with the software. The Building Systems Laboratory offers such training courses on an as needed basis typically at our offices in Urbana, Illinois.

WINLCCID 98


LCCID (Life Cycle Cost in Design) was developed to perform Life Cycle Cost Analyses (LCCA) for the Department of Defense and their contractors.

To order BLAST-related products, contact the Building Systems Laboratory at the address above.			
Program Name	Order Number	Price	

PC BLAST Includes: BLAST, HBLC, BTEXT, WIFE, CHILLER, Report Writer, Report Writer File Generator, Comfort Report program, Weather File Reporting Program, Control Profile Macros for Lotus or Symphony, and the Design Week Program. The package is on a single CD-ROM and includes soft copies of the BLAST Manual, 65 technical articles and theses related to BLAST, nearly 400 processed weather files with a browsing engine, and complete source code for BLAST, HBLC, etc. Requires an IBM PC 486/Pentium II or compatible running MS Windows 95/98/NT.	3B486E3-0898	\$1500
PC BLAST Package Upgrade from level 295+	4B486E3-0898	\$450
WINLCCID 98: executable version for 386/486/Pentium	3LCC3-0898	\$295
WINLCCID 98: update from WINLCCID 97	4LCC3-0898	\$195

The last four digits of the catalog number indicate the month and year the item was released or published. This will enable you to see if you have the most recent version. All software will be shipped on 3.5" high density floppy disks unless noted otherwise.







DOE-2



DOE-2.1E (v. 119) 1,000-Zone version for Windows from ESTSC; other vendors of DOE-2 based programs are listed on our website: http://SimulationResearch.lbl.gov > DOE-2

Cost is as follows:

\$ 300 U.S. Government, non-profit Educational

\$ 575 U.S., Mexico, Canada

\$ 1268 Japan only

\$ 1075 All Other Non-U.S.

DOE-2 Documentation on a CD from ESTSC - Cost US\$100

What is included on the CD?

- DOE-2 Reference Manual (Part 1)
- DOE-2 Reference Manual (Part 2)
- DOE-2 BDL Summary (2.1E)
- DOE-2 Engineers Manual (2.1A)
- DOE-2 Supplement to the Reference Manual (2.1E)

Order Software and ESTSC Documentation

Ed Kidd

NCI Information Systems, Inc.

Energy Science and Technology Software Center (ESTSC)

P.O. Box 1020

Oak Ridge, TN 37831

Phone: 865/576-1037

Fax: 865/576-6436

Email: estsc@adonis.osti.gov

Purchase DOE-2 Documentation

DOE-2 Sample Run Book (2.1E) -- The Sample Run book is the only remaining DOE-2 manual not available electronically. It must be purchased separately from NTIS; information is at http://SimulationResearch.lbl.gov > DOE-2 > Documentation

Free DOE-2 Documentation (http://SimulationResearch.lbl.gov > DOE-2 > Documentation)

- DOE-2 Basics (2.1E)
- Update Package #1: DOE-2.1E Basics, the Supplement and BDL Summary
- Update Package #2: (Version 107, DOE-2.1E) BDL Summary and Supplement.

DOE-2 Basics and Update Packages 1, 2, 3 and 4 are not included on the ESTSC CD. They consist of scanned pdf files and may be downloaded from our web site. You may also request the same information on a CD by sending email to klellington@lbl.gov.

The update files need to be printed and the update pages inserted into the existing DOE-2 manuals.

DOE-2 listings are continued on the next page

--Continued—

Free DOE-2 Documentation (http://SimulationResearch.lbl.gov > DOE-2 > Documentation)

- Update Package #3: Appendix A of the Supplement.
- Update Package #4: (1000-zone DOE-2.1E)
 BDL Summary.
- DOE-2 Modeling Tips (pdf)

Note that the Update Packages are **not** cumulative and each one contains different information. You have to download all four packages to update the DOE-2 documentation completely.

DOE-2 Modeling Tips is a compilation of all the "how to" articles from the *Building Energy Simulation User News* (through 2001).

DOE-2 Training

Private or group DOE-2 courses for beginning and advanced users: Contact Marlin Addison at (602) 968-2040, marlin.addison@doe2.com

DOE-2 Help Desk

Email, phone or fax the Simulation Research Group with your questions (klellington@lbl.gov). Phone: (510) 486-5711, Fax: (510) 486-4089



Question:

I've got some basic questions about DX Units. Does the DX mean direct expansion system?

Answer:

Yes, DX stands for direct expansion. Of course this means nothing by itself, but in general it means a small or medium sized system (up to say 400 kW) which uses the refrigerant evaporator to directly cool supply air. This would be in

contrast to a central chiller/chilled water system in which the evaporator is used to chill water which is then pumped around the system to the various cooling coils. Most often the DX units have air-cooled condensers. The typical applications are residential room (window) air conditioners or split system air-to-air heat pumps, or commercial rooftop (packaged) units, used for modest-sized commercial buildings.

Question:

What is the typical COP for that system compared to normal chiller based system, where the COP is more than 3?

Answer:

DX systems tend to be less efficient than central chillers since they are often cheaply built and usually have air-cooled condensers. But the COP can definitely be above 3, maybe 3.4.

Question:

Is it possible to use free cooling with DX cooling?

Answer:

These units are factory built, usually of low quality; I've never heard of free cooling from a cooling tower with these units. They usually do have an outside air economizer capability. You could certainly hand-build a DX unit with free cooling.

Question:

How can it be modeled in DOE-2?

Answer:

The Packaged Variable air Volume System (PVAV) system would be the way to go.

Adapting DOE-2 to Meet the Research Interests of the Egyptian Housing Bureau and Building Research Center

by
Joe Huang (yjhuang@lbl.gov)
Simulation Research Group
Building Technologies Department
Environmental Energy Technologies Division
Lawrence Berkeley National Laboratory

For the past two years, the author has been working with Joe Deringer of The Deringer Group in Berkeley and Prof. Moncef Krarti of the University of Colorado to provide technical assistance to the Housing Bureau of Egypt to develop building energy standards for that country (see http://www.icbec.org/EgyptHome.htm for details).

DOE-2 was recommended as the simulation tool. User training was provided both in Egypt and the U.S. Training was first done with a user-friendly version of DOE-2 (*VisualDOE* which has a graphical interface) and then migrated to a standard version of DOE-2.1E as the Housing Bureau staff gained more familiarity with the text-based input and output. To facilitate running parametric simulations, The Deringer Group developed a simple but effective Windows-based procedure called *doe2parm* (see http://www.icbec.org/Egypt/Software/DOE2Parm.htm for details).

The following two sections describe specialized applications of DOE-2 that were developed in response to the needs of the project; we hope they will be of interest to other building energy simulation professionals.

Modeling Thermal Comfort Using the DOE-2 Program

Since many residential buildings in Egypt do not have mechanical air-conditioning, the Housing Bureau wanted to know what the indoor thermal conditions were when only natural ventilation or ceiling fans were available, and what improvements could be expected if building standards were adopted.

To evaluate indoor thermal comfort conditions, a DOE-2 Function was written to derive the Predicted Percent Dissatisfied (PPD) and Predicted Mean Vote (PMV) based on the Fanger Model. The calculations in this Function followed the derivation given in a paper by one of the team members (Holz et al. 1996). The Fanger Model, like other comfort models, requires as input the Mean Radiant Temperature (MRT) of the space. DOE-2, however, usually calculates only the indoor air temperature and not the inside surface temperatures on which the MRT is based. To address this deficiency, in 1994 Markus Koschenz, a researcher from the Swiss Bureau of Standards (EMPA), added a module to DOE-2.1E that back-calculated the inside surface temperatures and then, using these figures, calculated the Mean Radiant and Effective Temperatures. This modification was described in "Calculation of Surface Temperatures in DOE-2" in Volume 20, No. 2 (Summer 1999) of the *Building Energy Simulation User News* (follow this link to an updated version of the article:

http://simulationresearch.lbl.gov/dirsoft/un articles.pdf).

One of the most problematic aspects in writing a DOE-2 Function is determining where a program variable of interest can be accessed. This problem is especially tricky when the variable, i.e., Mean Radiant Temperature, is a later addition that is calculated after the DOE-2 SYSTEM calculations for each hourly time step have been completed. Since there are no Function access points within the EMPA modifications, the only way to access the Mean Radiant and Effective Temperatures is to write them to a SYSTEMS hourly-report, and have the function loop through the HOURLY-REPORT array at the conclusion of each time step to pick up the temperatures.

Therefore, to properly run the PPMV Function shown below requires these two changes to your input:

- 1. The option for calculating Inside Surface Temperatures is turned on, i.e., under the BUILDING-LOCATION command, add SURF-TEMP-CALC = YES.
- 2. The Mean Radiant Temperature (Variable 91) and Effective Temperature (Variable 92) for each zone of interest are written to an hourly-report file. Here is a sample hourly-report input for a two-zone building:

```
HRSCH=SCHEDULE THRU DEC 31 (ALL) (1,24) VALUES=(1) ..

RB1=REPORT-BLOCK VARIABLE-TYPE=ZONE_1 VARIABLE-LIST=(91,92) ..

RB2=REPORT-BLOCK VARIABLE-TYPE=ZONE_2 VARIABLE-LIST=(91,92) ..

SHR=HOURLY-REPORT REPORT-SCHEDULE=HRSCH
```

```
REPORT-BLOCK=(RB1, RB2) ..
```

Like other functions, PPMV func should be inserted in the SYSTEMS input after the END command but before the COMPUTE SYSTEM command. If everything is set up correctly, the DOE-2 output will contain the PPD and PMV every hour for each zone, so you should be prepared for rather large output files. In addition, whenever DOE-2 is used with SURF-TEMP-CALC=YES, it generates a huge fort.15 file and a smaller fort.16 file. These should be deleted as they are temporary binary files with no further use.

If there are any questions in the use of this function, please e-mail Joe Huang at YJHuang@lbl.gov.

----- function ppmv.func follows -----

```
FUNCTION NAME=PPMV ..
ASSIGN MON=IMO DAY=IDAY HR=IHR
      TNTLZE=TNTLZE
       IP=IP
      NPLSYS=NPLSYS
      IPLSYS=IPLSYS
      ISZONES=ISZONES
      NZONES=NZONES
      NPT-NPT
      NSP=NSP
       ZP1=ZP1
      ZP2=ZP2
      ZP2 EDTT=ZP2--EDTT
      IZNBUFP=IZNBUFP
      NZD=NZD
      ZNAM1=ZONE-NAME
      ta=TNOW
      VNTCFM=VNTCFM
      CFMZ=CFMZ
      Wa=HUMRAT
      Patm=PATM
    $ VS=WNDSPD
                    using outside wind speed as interim air speed
      Msi=metabolic rate[] $ W/m2 range 57-95
      Wsi=work rate[]
                           $ W/m2 generally 10% of above
      IPFLAG=PPMV print[] $ 0=detailed, 1=hourly
       IclSUM=clo sum[]
                           $ fraction
      fanon=ceilfan stp[] $ ceil fan on temp (C)
      acon=aircond stp[] $ A/C on temp (C)
CALCULATE ..
     NPL=IP
     NS=0
100
     NS=NS+1
     IF (NS.GT.NPLSYS) GO TO 199
     NSP=IACCESS (IPLSYS+NS-1)
     ZP1=ISZONES
     I=0
200
    I=I+1
     IF (I.GT.NZONES) GO TO 299
     ZP2=ZP2 EDTT
     IPTR=IZNBUFP-1
     TMRX=ACCESS (IPTR+91)
     WZONEX=ACCESS (IPTR+93)
     PRINT 5, CFMZ, VNTCFM
     FORMAT (2F10.2)
С
     ZP1=ZP1+NZD
C
С
   PPMV follows
С
  set Metabolic and clothing values
С
     IF (MON.LT.5) Icl=IclWin
     IF (MON.GE.5.AND.MON.LE.9) Icl=IclSum
     IF (MON.GT.9) Icl=IClWin
 convert units from SI to IP
     M = Msi/3.1536
     W = Wsi/3.1536
```

```
tac = (ta-32)/1.8
      tmrc = (tmrx-32)/1.8
      pasi = 689.5*Patm
C assume ceiling fans are used when air temperature is
C between ceilfan (fanon) and a/c (acon) setpoints
  and provides 0.25 m/sec (50 fpm) air motion
      VS = 0
      if (tac.gt.fanon.and.tac.le.acon) VS = 50
      vssi = VS*0.005
  calculate (M-W) and Rcl
      MW = M - W
      Rcl = 0.88*Icl
  convert inHg to PSI and calculate Pa
      Patmx=Patm*0.49116
      Pa = Patmx/(1.0+0.622/Wa)
  calculate tcl
      tcl = MW - 0.97*(5.73-0.22*MW-6.9*Pa) - 0.42*(MW-18.43)
      tcl = tcl - 0.0173*M*(5.87-6.9*Pa) - 0.00077*M*(93.2-ta)
      tcl = 96.3 - 0.156*MW - Rcl*tcl
 calculate (tcl+460) **4
      tc14 = 4*alog(tc1+460)
      tcl4 = exp(tcl4)
  calculate (tmrx+460) **4
      tmrx4 = 4*alog(tmrx+460)
      tmrx4 = exp(tmrx4)
C calculate hc
      tcl ta = 0.25*alog(abs(tcl-ta))
      tcl ta = 0.361*exp(tcl ta)
      if (VS.GT.0) vsqrt = 0.151*sqrt(VS)
      if (VS.EQ.0) vsqrt = 0
      if (tcl_ta.gt.vsqrt) hc = tcl_ta
  if (tcl_ta.le.vsqrt) hc = vsqrt
calculate fcl
      if (Icl.le.0.5) fcl = 1.0 + 0.2*Icl
      if (Icl.gt.0.5) fcl = 1.05 + 0.1*Icl
 calculate L
      L = MW - 1.196*0.00000001*fcl*(tcl4 - tmrx4)
      L = L - fcl*hc*(tcl-ta)-0.97*(5.73-0.022*MW) - 6.9*Pa
      L = L - 0.42*(MW-18.43) - 0.0173*M*(5.87-6.9*Pa)
      L = L - 0.00077*M*(93.2-ta)
  convert to SI
      tclc = (tcl-32)/1.8
      Lsi = L*3.1536
  calculate PMV and PPD
      PMV = (0.303*exp(-0.036*M) + 0.028)*L
      PMV2 = PMV*PMV
      PMV4 = PMV2*PMV2
      PPD = 100 - 95*exp(-1.0*(0.03353*PMV4 + 0.2179*PMV2))
      IF (INILZE.LT.8) RETURN
      ICOUNT = ICOUNT + 1
      IF (IPFLAG.GT.0) GO TO 205
      IF (ICOUNT.EQ.1) PRINT 1
     FORMAT (/13X, 4HZone, 4x, 2HIS, 1x, 2HIZ, 3x, 2HTa, 2x, 3HTmr,
              3x, 2HWa, 4x, 2HWS, 3x, 2HPa, 4x, 3Htcl, 4x,
              1HL, 5x, 3HPMV, 3x, 3HPPD)
     PRINT 20, MON, DAY, HR, ACCESS (ZP2), ACCESS (ZP2+1), NS, I,
               tac, tmrc, Wa, vssi, pasi, tclc, Lsi, PMV, PPD
     FORMAT (3F4.0,1X,2A4,F3.0,F3.0,2F5.1,F6.3,F5.2,
             f7.0, f5.1, f7.1, f6.1, f6.1)
      GO TO 210
205
      CONTINUE
      IF (IPFLAG.GT.1) GO TO 207
      IF (ICOUNT.EQ.1) PRINT 2
     FORMAT(/14X,4HZone,5x,2HIS,2x,2HIZ,2x,2HTa,4x,3HTmr,
              5x, 3HPMV, 3x, 3HPPD)
     PRINT 22, MON, DAY, HR, ACCESS (ZP2), ACCESS (ZP2+1), NS, I,
               tac, tmrc, PMV, PPD
 22
    FORMAT(1X,3F4.0,1X,2A4,1x,F2.0,1x,F3.0,2F6.1,f7.2,f6.1)
      GO TO 210
207
     CONTINUE
```

```
С
      monthly hourly print not implemented !
С
      store monthly hourly values
C
      data(HR) = data(HR) + PMV
210
      CONTINUE
      ZP1=ZP1+NZD
      GOTO 200
299
      CONTINUE
      GOTO 100
199
      CONTINUE
```

Modeling Domes in DOE-2

The Egyptian researchers expressed the need to model domes and vaults, which are prevalent in Egyptian architecture. In response, I wrote an awk script that generates DOE-2 BDL input lines for a dome composed of A rows, each containing A*4 quadrilateral polygons, with one flat polygon with A*4 sides on the top, and two flat roofs surrounding the base, which I call the skirt. A, the dome radius and the location of the dome center are specified in a small input file read by the awk script, with one line for each polygon. The input file contains the following 5 numbers: dome radius, number of rows (A), the length of the square roof, and the X and Y coordinates for the dome center. For example, Figure 1 shows the result for a dome with a radius of 5 made up of 3 rows, flat roof with a length of 15, and located at the origin (X=0, Y=0). Figure 2 shows a more detailed model of the same dome, but now made up of 7 rows.

The proper syntax to generate the DOE-2 input file lines is

awk -f dome.awk dome.dat > dome.bdl

where dome awk is the awk file, dome dat is the short input file, and dome bdl is the output BDL file. Both drawings were made running the BDL files through DrawBDL 3.0.

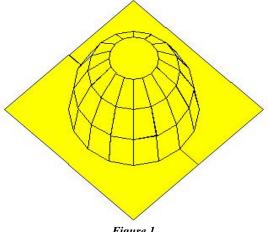


Figure 1

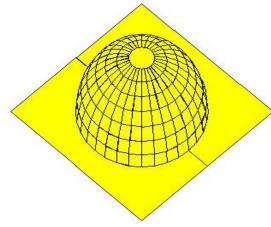


Figure 2

Listing for dome.awk -----

this awk script generates DOE-2 BDL input for a dome composed of "arcs" x "rows" of quadrilateral polygons and one polygon with "arcs" sides on the # top. Syntax is awk -f dome.awk dome.dat > dome.bdl where dome.dat is a file with 1 line per dome, each line containing 4 numbers for the dome radius, # number of rows (integer) for dome, the length of the square roof, and the X Y coordinates at the dome center -- Joe Huang 22 July 02


```
\{angle = 2*3.14159263/360.\}
{r = $1 ; rows = $2; rflgth = $3}
\{arcs = $2*4 ; ang1 = 360/arcs ; ang2 = ang1/2 \}
{if (NR==1) printf("INPUT LOADS ..\nBUILDING-LOCATION AZ 0 ..\n") }
{printf("DOME%d SPACE X %1.2f Y %1.2f ..\n", NR, $4, $5) }
{for (i=1;i<=arcs;i++) az[i]=ang1*i - ang2 }
{rowlqth =2*r*sin(360*angle/(arcs*2))}
{for (i=1;i<=rows;i++)
  rowtilt[i] = (90+ang2)-(ang1*i)
  rowht[i] = r*sin(rowtilt[i]*angle)
  rowz[i] = r*sin((i-1)*ang1*angle)
  rowwd[i] = 2*r*sin(ang2*angle)*cos((i-1)*ang1*angle)
```

```
{for (i=1;i<=rows;i++)
   i=i+1
   rowstart[i] = (rowwd[i] + rowwd[j])/2
   rowend[i] = (rowwd[i] - rowwd[j])/2
   printf("SET-DEFAULT FOR ROOF Z %1.2f TILT %d ..\n",rowz[i],rowtilt[i])
   if (i < rows)
     {
      for (k=1; k \le arcs; k++)
         rowx[i,k] = r*sin(ang1*k*angle)*cos((i-1)*ang1*angle)
         rowy[i,k] = r*cos(ang1*k*angle)*cos((i-1)*ang1*angle)
         if (k == 1)
           {
            printf("DOME%d%d-%dP
                                    POLYGON
                                                  (0,0)
                                                             (%1.2f,0)
                                                                            (%1.2f,%1.2f)
                                                                                             (%1.2f,%1.2f)
...n", NR, i, k, rowwd[i], rowstart[i], rowlgth, rowend[i], rowlgth)
            printf("DOME%d%d-%d
                                 ROOF POLYGON
                                                     DOME%d%d-%dP
                                                                     X
                                                                            %1.2f
                                                                                    Y
                                                                                         %1.2f
                                                                                                    ΑZ
                                                                                                          કd
...n", NR, i, k, NR, i, k, rowx[i, k], rowy[i, k], az[k])
         else
          printf("DOME%d%d-%d
                                                                         %1.2f
                                  ROOF
                                            LIKE
                                                    DOME%d%d-1
                                                                 X
                                                                                  Υ
                                                                                          %1.2f
                                                                                                   AΖ
                                                                                                          용선
...n", NR, i, k, NR, i, rowx[i, k], rowy[i, k], az[k])
   else
      printf("DOME%d%d-1P POLYGON ",NR,i)
    for (k=1; k \le arcs; k++)
      for (k=arcs; k>=1; k--)
         rowx[i,k] = r*sin(ang1*k*angle)*cos((i-1)*ang1*angle)
         rowy[i,k] = r*cos(ang1*k*angle)*cos((i-1)*ang1*angle)
         1 = k-1
         if (1%5 == 0) printf "n "
         printf("(%1.2f,%1.2f) ",rowx[i,k],rowy[i,k])
if (k== arcs) printf " .. \n"
         if (k== 1) printf " .. \n"
      printf("DOME%d%d-1 ROOF POLYGON DOME%d%d-1P X 0 Y 0 AZ 0 TILT 0 .. \n", NR,i, NR,i)
  }
END {
printf("SKIRT-EP POLYGON (0,%d) (0,%d) (%d,%d) (%d,%d) (0,%d) \n",-r,-rflgth/2,rflgth/2,-
rflgth/2,rflgth/2,rflgth/2,rflgth/2,r)
halfarc=arcs/2 - 1
for (k=1; k \le halfarc; k++)
  rowx[1,k] = r*sin(ang1*k*angle)
   rowy[1,k] = r*cos(ang1*k*angle)
   1 = k-1
   if (1\%5 == 0 \&\& k > 1) printf "\n"
   printf("(%1.2f, %1.2f) ", rowx[1, k], rowy[1, k])
   if (k == halfarc) printf " .. \n"
printf("SKIRT-E ROOF POLYGON SKIRT-EP X 0 Y 0 Z 0 AZ 0 TILT 0 .. \n")
printf("SKIRT-WP POLYGON (0,%d) (0,%d) (%d,%d) (%d,%d) (0,%d) (0,%d) \n",r,rflgth/2,-rflgth/2,-rflgth/2,-
rflqth/2,-rflqth/2,-rflqth/2,-r)
for (k=halfarc; k<=arcs; k++)</pre>
   rowx[1,k] = r*sin(ang1*k*angle)
   rowy[1,k] = r*cos(ang1*k*angle)
   1 = k-1
   if (1\%5 == 0) printf "\n"
   printf("(%1.2f, %1.2f) ",rowx[1,k],rowy[1,k])
   if (k== arcs) printf " .. \n"
printf("SKIRT-W ROOF POLYGON SKIRT-WP X 0 Y 0 Z 0 AZ 0 TILT 0 .. \n")
print "END .."
print "STOP .."
```

DrawBDL 3.0: New and Improved!

Joe Huang and Associates is pleased to announce Version 3.0 of the *DrawBDL* program for viewing the building geometry in DOE-2 input and output files. We have completely rewritten *DrawBDL* using C++ to run in a native 32 bit environment such as Windows 95/2000/NT. In addition to having a somewhat different look and feel, Version 3.0 has the following improvements:

- 1. New user interface with a hierarchical tree showing all building surfaces.
- No limit on the number of building surfaces, except for the amount of memory available on the computer.
- For building surfaces, the expanded data window shows not only the input values, but also their locations in the global coordinate system; for spaces, the data window shows the gross and net areas of walls, windows, doors, roofs, and skylights.
- Displays surfaces input as two-dimensional or three-dimensional polygons (please see DOE-2.1E Documentation Update #2 http://SimulationResearch.lbl.gov/dirsoft/21e update2.pdf for the syntax to input surfaces as polygons).

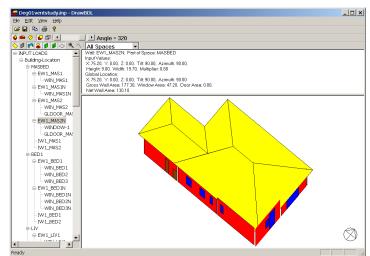

DrawBDL 3.0

- 5. Changing the sort order of building surfaces used in the display; this allows users to "touch up" the shaded drawings for use in presentations.
- 6. Output the surface data in *EnergyPlus* *.idf format. This is helpful for *DrawBDL* users who wish to convert their DOE-2 input files into *EnergyPlus* input files. Since *DrawBDL* reads and stores only building surface data, the converted *EnergyPlus* file is a partial file containing only the inputs for building surfaces.

The price for DrawBDL 3.0 is \$125 plus shipping. For more information or to order, please contact

Joe Huang and Associates
31 Sarah Lane
Moraga CA 94553
Phone 925-247-9180
email: tmchow@compuserve.com

FREE Membership in 2002!!!

International Building Performance Simulation Association USA Affiliate

The IBPSA-USA Board of Directors has waived the annual membership fee for 2002 so joining our organization is easier than ever. If you want to become a member, send an email with your name, company, mailing and email address, and phone and fax numbers to Rick Strand (r-strand@uiuc.edu). You will receive a confirmation email to indicate that you have been accepted for membership.



www.ibpsa.org

EnergyPlus Weather Data

The EnergyPlus development team is pleased to announce that our web site now offers more than 570 weather locations available for download and ready to use with EnergyPlus. There are 275 locations in the United States, 16 California thermal zones, 55 Canadian locations, and 233 international locations in more than 80 countries.



Go to www.energyplus.gov

On the right side, under Weather Data, click on one of the following links: USA, California, Canada or International.

We recommend that you also download the weather utility RPT file for each location. The RPT file includes design data where available, statistics for the weather file, including typical and extreme periods (hottest summer week, coldest winter week, typical spring week, etc), Koppen climate classification, heating and cooling degree days, monthly average minimum and maximum dry bulb and dew point temperatures, undisturbed ground temperatures, direct and diffuse solar radiation, relative humidity, and wind speed and direction.



GenOpt 1.1.2

Generic Optimization Program

GenOpt is a multi-parameter optimization program; it automatically finds the values of user-selected design parameters that minimize a cost function, such as annual energy use, calculated by an external simulation program like EnergyPlus, SPARK, DOE-2, BLAST, TRACE, TRNSYS, etc.

GenOpt can be used with any simulation program that has text-based input and output. It also offers an interface for adding custom optimization algorithms to its library.

Release of GenOpt 1.1.2

GenOpt 1.1.2 fixes problems in reading simulation output files where the objective function value is followed by a comma. Such output strings can be found, for example, in some EnergyPlus outputs.

Also, a method called 'postProcessObjectiveFunction(int, double[] f)' has been added to the file named 'Optimizer.java'. You can modify this function to easily implement post-processing of the objective function value, such as adding two outputs to seek the minimum of the sum of the two outputs.

Example files have been added to the *GenOpt* web page (http://SimulationResearch.lbl.gov > GenOpt) to help users set up the program to optimize EnergyPlus simulations. *GenOpt* input files still have the same syntax as in version 1.1.1. Therefore, your *GenOpt* input files are compatible with the new version.

GenOpt 1.1.2 (with user manual) may be downloaded free of charge from

http://SimulationResearch.lbl.gov > GenOpt

Building Design Advisor 3.0

Decision making through the integrated use of multiple simulation tools and databases

The **Building Design Advisor (BDA)** is a Windows[®] program that addresses the needs of building decision-makers from the initial, schematic phases of building design through the detailed specification of building components and systems. The BDA is built around an object-oriented representation of the building and its context, which is mapped onto the corresponding representations of multiple tools and databases. It then acts as a *data manager* and *process controller*, automatically preparing input to simulation tools and integrating their output in ways that support multi-criterion decision-making. BDA 3.0 includes links to **SGE** (a grapical editor for schematic design), **DElight** (a daylighting simulation tool), **ECM** (a simplified electric lighting simulation tool) and the **DOE-2.1E** building energy simulation program.

ECM, an **electric lighting simulation tool**, is integrated through BDA with DOE-2. BDA's Schematic Graphic Editor (**SGE**) allows placement of electric lighting luminaires and specification of reference points for daylight-based electric lighting controls. Moreover, BDA has the capability of **running DOE-2 parametrically** to generate a plot that shows the relationship between effective aperture and energy requirements. There is also the added functionality of working with either **English units or Metric units**.

Current development efforts are focused on the completion of BDA 3.1, which includes computation of operating energy costs. To download a free copy of BDA 3.0, go to

http://gaia.lbl.gov/BDA/index.html

The BDA source code is available for licensing; if interested, please contact Dr. Papamichael at K Papamichael@lbl.gov.

For Beta Testing of BDA 3.1, contact Kosta Papamichael at k_papamichael@lbl.gov.



BLDG-SIM is a mailing list for users of building energy simulation programs like EnergyPlus, DOE-2, Trace-600, HAP, BLAST, ESP, SERIRES, TRNSYS, TASE, ENERGY-10 and others. Because building simulation professionals are located worldwide, the BLDG-SIM list is an attempt to foster the development of a community of those users. Users of all levels of expertise are welcome and are encouraged to share their questions and insights about these programs. The web page for BLDG-SIM is http://www.gard.com/bldg-sim.htm Jason Glazer, P.E., Of GARD Analytics, Inc. Is the list administrator (jglazer@gard.com).



You are invited to test **DoeRayMe**, a new DOE-2.1E screening tool application currently being developed by Jason Glazer, P. E., of GARD Analytics, Inc. **DoeRayMe** is a simple and flexible interface that uses a specially developed DOE-2 input file (template) that contains special codes describing the parameters available to



be changed in the user interface. This allows new screening tools to be developed by any DOE-2 user. Please visit the **DoeRayMe** web site at http://www.gard.com/DoeRayMe.

ENERGY-10, VERSION 1.5

ENERGY-10 is a design tool for smaller residential or commercial buildings that are less than 10,000 ft² or buildings that can be treated as 1- or 2-zone increments. It performs whole-building energy analysis for 8760 hours/year, including dynamic thermal and daylighting calculations. ENERGY-10 was specifically designed to facilitate the evaluation of energy-efficient building features in the very early stages of the design process.

Version 1.5 Upgrades

Life Cycle Costs

A whole new capability is included to evaluate life-cycle costs. The year-by-year cash flow of the building is determined and discounted to the present value. The difference between Bldg-1 and Bldg-2 is determined in terms of net present value, NPV (the difference in life-cycle costs), internal rate of return, benefit-to cost ratio, or simple payback.

Up-to-date compiler

The entire program has been ported to 32-bit and (with the exception of the CNE thermal simulation engine) programmed in Visual C++ 6.0, the current Microsoft compiler. One benefit that users will appreciate is that it is no longer necessary to close ENERGY-10 before starting a new project.

More Wall Layers

In previous versions, you were restricted to 6 layers in a wall construction. This has now been expanded by 3, giving you the opportunity to define a 7-layer wall plus two air films.

New Graphs

Graphs are programmed in a new and powerful graphing package (Olectra).

New Reports

A Cost Summary report tabulates the results of the life cycle cost evaluation. An HVAC and EES Cost report details the components of HVAC cost and each of the EES costs. A Peak Loads report identifies the peak loads and corresponding HVAC rated capacities for the AutoSize calculations and also the peak loads and consumptions during the annual simulation showing when the peaks occurred.

Douglas K. Schroeder 1331 H Street N.W., #1000 Washington, DC 20004



Tel: 202.628.7400 ext 210

Fax: 202.383.5043 www.sbicouncil.org

Sustainable Buildings Industry Council (SBIC)

ENERGY-10 User Group at http://www.sbicouncil.org/forum

SBIC Bookstore at http://www.sbicouncil.org/store/resources.php#pubs

Meetings, Conferences, Symposia


2002				
December 4-6 2002	Advances in Building Technology	AB	To be held in Hong Kong Contact: clyystui@polyu.edu.hk http://www.polyu.edu.hk/~fclu/ABT21002	
December 16-18 2002	6 th International Conf Simulation in	•	To be held in Liege, Belgium Contact: michele.deprez@ulg.ac.be http://www.ulg.ac.be/labothap	THERMO OWNERSHE DE LEGE
		2	003	
January 25-29 2003	ASHRAE Winter Meeting	ASHRAE	To be held in Chicago, IL Contact: jyoung@ashrae.org http://www.ashrae.org	
May 20-22 2003	11 th National Confere Building Commission	aller and	To be held in Palm Springs, CA http://www.peci.org/ncbc	
June 28-July 2 2003	ASHRAE Annual Meeting	ASHRAE	To be held in Kansas City, MO Contact: jyoung@ashrae.org http://www.ashrae.org	
August 11-14 2003	IBPSA Building Simulation 2003	Building Simulation 11-14 augustus 2003 Eindhoven Netherlands	To be held in Eindhoven, the Netherlands http://www.ibpsa.org	

Directory of Software and Services for EnergyPlus

Program Name	Description		Cost
EnergyPlus 1.0.2	Downloadable from www.energyplus.gov	Support EnergyPlus-Support@gard.com Support Group groups.yahoo.com/group/EnergyPlus_Support	Free

Support Tools for EnergyPlus

Program Name	Description	Cost
EnergyPlus Interface Support Tools The Deringer Group, Inc. 1349 Addison Street Berkeley, CA 94702 Tel: (510) 843-9000 Fax: (510) 843-9005 www.deringergroup.com	EnergyPlus Online Simulations – online and embedded in the EcoAdvisor set of online training modules on sustainable buildings. These tools can be used by anyone and require no special knowledge of EnergyPlus. EnergyPlus Interface Support Tools EzPlus-Parm is a standalone Windows tool intended primarily for EnergyPlus parametric analysis. It was designed to simplify the running of multiple parametric EnergyPlus simulations and helps a user organize and edit files. DrawEzPlus is a 3-D geometry rendering tool that displays the 3-D geometry imbedded in an EnergyPlus file.	Free

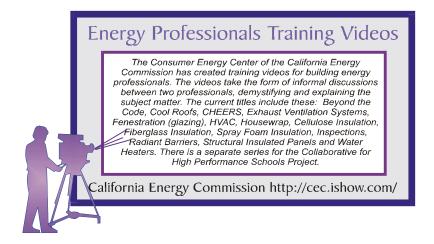

Directory of Software and Services for DOE-2

ESTSC Versions of DOE-2

Program Name	Description		Cost	
DOE-2.1E (Ed Kidd or Walt Kelly) estsc@adonis.osti.gov ESTSC P.O. Box 1020 Oak Ridge, TN 37831-1020 Ph: 865-576-2606 / Fx: 576-2865 www.osti.gov/estsc	Source code, executable code and complete current documentation for: DOE-2.1E/Version 117 1000-zone version OS: Windows, SUN UNIX	Support Limited operational support (telephone assistance for installation, media or platform questions).	Windows U.S. Govt/Non-Profit/Educ U.S. Public, Mexico, Canada Japan Other Foreign	\$ 300 \$ 575 \$1268 \$1075

Commercial Versions of DOE-2

Program Name	Description		Cost
ADM-DOE-2 (Richard Burkhart) ADM Associates 3239 Ramos Circle Sacramento, CA 95827-2501 Ph: 916-363-8383, Fx: 363-1788 www.adm-energy.com	Use on 386/486 PCs with a math co-processor and 4MB of RAM. The package contains everything needed to run the program: program files, utilities, sample input files, and weather files. More than 300 weather files available. OS: DOS, Windows 95	Input	\$395 + \$15/SH including one set weather data (your choice) and documentation
Compare-IT (Matt Brost) RLW Analytics, Inc. info@rlw.com 1055 Broadway, Suite G Sonoma, CA 95476 Ph: 707-939-8823, Fx: 939-9218 www.rlw.com	Compare-IT allows DOE-2 professionals to add value to their projects by giving clients "what-if" scenarios using DOE-2. The interface is designed for novice energy analysts and the GUI can be customized for each client's particular interests. Based DOE-2.1E. OS: DOS, Windows (98, 95, NT)	Input: Customizable windows GUI dynamically built based on DOE-2 macros. Output Support	\$500 consultant \$2000 client Documentation available
DOE-Plus (Steve Byrne) Item Systems byrne @ item.com 321 High School Road NE Box 344 Bainbridge Island, WA 98110 Ph: 206-855-9540 / Fx: 855-9541 http://www.item.com/doeplus.htm	Complete support for all DOE-2 commands. Utility programs included: Prep, Demand Analyzer, weather processor. Over 500 worldwide weather files. Imports BDL files created with a text editor or other program. Based on DOE-2.1E. OS: DOS, Windows (3.1, 95, NT)	Input Interactive, graphical, fill-in-the-blanks Output Customizable tables and graphics	\$895 with DOE-2 and doc \$495 without DOE-2 Source code not available.

Note: We list third-party DOE-2-related products and services for the convenience of program users, with the understanding that the Simulation Research Group does not have the resources to check the DOE-2 program adaptations and utilities for accuracy or reliability.

Commercial Versions of DOE-2 (continued)

Program Name	Description		Cost
EnergyPro 3.0 (D. Vonderkulen) demian@energysoft.com Gabel Dodd/EnergySoft LLC 100 Galli Drive #1 Novato, CA 94949-5657 Ph: 415-883-5900, Fx: 883-5970 www.energysoft.com	Performs nonresidential load calculations for HVAC equipment sizing. Electronically exports forms to AutoCad for inclusion on blueprints. On-line help. 344 weather files for the U.S. and Canada. OS : DOS, Windows (95, NT). For California Users: Performs Title 24 compliance calculations, includes state-certified HVAC and DHW Equipment directories, Title 24 tailored lighting calculations. Based on ESTSC DOE-2.1E	Input: Graphical Output: Graphs, forms Support Unlimited support	DOE-2 Module: Non-residential \$700 ^{1,2} Residential \$250 ^{1,2} Program Interface \$195 ³ ¹ price reflects cash discount ² includes documentation ³ required
EZDOE (Bill Smith) bsmith @ elitesoft.com Elite Software P.O. Box 1194 Bryan, TX 77806 Ph: 409-846-2340 / Fx: 846-4367 http://www.elitesoft.com/web/hvacr/ elite_ezdoe_info.html	Provides full screen, fill-in-the-blank data entry, dynamic error checking, context-sensitive help, mouse support, graphic reports, a 750-page user manual, and extensive weather data. Full implementation of DOE-2 on DOS-based 386 and higher computers. On-line help. Some weather files. Based on DOE-2.1E. OS: DOS	Input Fill-in-the-blanks Output Standard DOE reports plus some custom graphic reports Support Unlimited phone support	\$1295 w/documentation Source code not available.
FTI/DOE2 (Scott Henderson) info @ finite-tech.com Finite Technologies Inc. 3763 Image Drive Anchorage, Alaska 99504 Ph: 907-333-8937, Fx: 333-4482 http://www.finite-tech.com/ FTIDOE2001.htm	Version 3.0 Release FTI/DOE is 100% compatible with LBNL version. Source code versions will compile with most F77-compliant compilers. On-line help: 344 weather files for the U.S. and Canada. Based on ESTSC DOE-2.1E. No demo, 30-day trial period OS: DOS, Windows (3.x, 95, NT) AIX, ULTRIX, VMS, Linux, NeXTStep,	Input Version 2.x: text based Version 3.x: graphical Output All standard DOE-2 reports Run time and status graphics Support 90-days free; then cost is \$ 35 each email per incident \$ 55 per hour per incident \$ 125 per hour for engineering advice.	\$ 995.99 US w/documentation \$1066 Int'l w/documentation \$4999.99 Source code
PRC-DOE-2 (Paul Reeves) Paul.Reeves@DOE2.com Partnership for Resource Conservation 140 South 34 th Street Boulder, CO 80303 Ph: 303-499-8611, Fx: 554-1370	Text-based version of DOE-2 includes documentation. Extensive information on new features, including information on new system types, new commands, new options, etc., added to later versions of 2.1E. OS: DOS, Windows (95, NT)	Input_Standard text-based Output Support_Unlimited support.	\$ 495 w/documentation Source code not available.
VisualDOE 3.0 (Eric Kolderup) Charles Eley Associates 142 Minna Street (2 nd floor) San Francisco, CA 94105 Ph: 415-957-1977 - Fax 1381 www.eley.com, support@eley.com	Fast construction of building geometry with pre-defined blocks and drawing interface. Import zone shapes from CADD file (dxf). Point+click to define zone properties and HVAC systems. Dynamic 3-D model views. Online help. LiveUpdate through internet. 400+ US, foreign weather files. OS: Windows 95/98/NT/ME/2000/XP	Output Graphical 60% discount for \$3000 Site licer	al upgrade from version 2.6 or educational use nse (up to 8 registration keys) e license (up to 15 registration keys)

Support Tools for DOE-2

Program Name	Description	Cost
DOE-2 Parametric Study Tool The Deringer Group, Inc. 1349 Addison Street Berkeley, CA 94702 Ph: (510) 843-9000, Fx: -9005 www.deringergroup.com	DOE2PARM – is an MS Windows-based tool that permits you to run, edit and link all the related input and output files together in the same window.	Free!
DrawBDL 3.0 Joe Huang & Associates 31 Sarah Lane Moraga CA 94553 Ph: 925-247-9180	DrawBDL , Version 2.1, is a graphic debugging and drawing tool for DOE-2 building geometry . DrawBDL reads your BDL input and makes a rotate-able 3-D drawing of your building with walls, windows, and building shades shown in different colors for easy identification. OS: DOS, Windows (3.1, 95, 98, NT) [Works with 2.1E] email: tmchow@compuserve.com	\$125.00 plus shipping
PRC-TOOLS (Paul Reeves) PRC 140 South 34 th Street Boulder, CO 80303 Ph: 303-499-8611 / Fx: 554-1370	PRC-Tools aid in extracting, analyzing, and formatting DOE-2 output. PRC-Grab automates the process of extracting any number of answers from DOE-2 standard output files. PRC-Hour and PRC-Peak format the hourly output and create Peak-Day and Average-Day load shapes for any number of periods and for any combination of hourly values. OS: Windows (95, 98, NT) [Works with 2.1E]	\$99.00
RIUSKA (Tuomas Laine) Olof Granlund Oy P O Box 59 Helsinki, FIN-00701 Finland (tuomas.laine@granlund.fi) Ph: +358 (9) 351031 / Fx: 35103421	With RIUSKA user can add building envelope materials, internal loads and HVAC-system into the created 3D-model of the building and perform thermal calculations. RIUSKA can be used for space simulations to dimension cooling or heating equipments, or for energy calculations of the whole building. OS: Windows (95, 98, NT) [Works with 2.1E]	Contact Tuomas Laine for pricing.
Visualize-IT (Matt Brost) RLW Analytics, Inc. mattb@rlw.com 1055 Broadway, Suite G Sonoma, CA 95476 Ph: 800-472-6716 Fx: 707-939-8823 www.rlw.com/visualize_it.html	Visualize-IT 2.0 is a Windows application designed to help you explore and summarize short-interval time series data, e.g., measurements taken once every 15 minutes over a period of weeks, months or years. Visualize-IT has been developed specifically for electric and gas load data measuring class profiles, market-segments, individual customer sites or specific end uses. Customized DOE2.1e hourly output importer. Visualize-IT is highly useful and informative for looking at DOE2 output and/or comparing to interval metered data. It is equally useful for other time series measurements such as weather, industrial process control, and water quality. OS: Windows 95, 98 and NT	\$500.00 per set Volume Discounts Available

Special Versions of DOE-2

Program Name	Description	Cost
CBIP cbip.nrcan.gc.ca/cbip.htm Office of Energy Efficiency Natural Resources Canada 580 Booth St., 18th Floor Ottawa ON K1A 0E4, CANADA	Natural Resources Canada's Commercial Building Incentive Program (CBIP) offers a financial incentive for the incorporation of energy efficiency features in new commercial and institutional building designs. The objective of this new incentive is to encourage energy-efficient design practices and to bring about lasting changes in the Canadian building design and construction industry. The program will be offered until March 31, 2004.	Web Based (free)
Cool Tools (Peter Turnbull) Pacific Gas & Electric Company pwt1@pge.com www.hvacexchange.com/cooltools/	The CoolTools TM project objective is to develop, disseminate and promote an integrated set of tools for design and operation of chilled water plants. CoolTools products are Internet based, public domain resources available to building owners, design professionals, and operators involved in both new construction and retrofits.	Web Based (free)
DesiCalc GRI-98/0127 www.desicalc.com	DesiCalc screens desiccant cooling applications . It estimates annual or monthly energy loads, using hour-by-hour simulations, and costs for 11 typical commercial buildings in 236 geographical locations in the US. Includes the latest TMY2 meteorological database [Based on DOE-2.1E] OS: Windows 3.1, 95, 98, NT	\$295 w/doc +8.75% tax in IL +4.5% tax in VA S/H add \$20
Energy Gauge USA (Danny Parker) Florida Solar Energy Center 1679 Clearlake Road Cocoa, FL 32922 energygauge.com	Energy Gauge USA allows the simple calculation and rating of residential building energy use in the US. The simulation calculates a six-zone model of the residence (conditioned zone, attic, crawlspace, basement, garage and sunspace) with the various buffered spaces linked to the interior as appropriate. TMY weather data for the program are available for 239 US locations. [Based on DOE-2.1E] OS: Windows 95, 98, NT	Contact Danny Parker at FSEC for availability.
Home Energy Saver (Residential DOE-2) hes.lbl.gov	Calculation of residential energy consumption using DOE-2.1E. The program performs a full annual simulation for a typical weather year (involving 8760 hourly calculations) from 239 locations around the United States in about 10-20 seconds.	Web Based (free)
PERFORM 2001 California Energy Commission 1516-9 th St., MS-13 Sacramento, CA 95814 Ph: 916-654-5385	Created for the State of California Energy Commission's, Title 24 energy code . Perform 2001 is an interface shell with DOE-2 as the engine. PERFORM 2001 calculates building energy consumption for space heating, space cooling and domestic hot water heating, and compares the energy consumption of the building design against the requirements of the standards. DOS input. Output is only California Title 24 compliant. [Based on DOE-2.1E] Technical support \$100/year from Gabel-Dodd Energy Soft LLC, Call 415-883-5900 for details.	\$250 including PERFORM 2001 program and manual on CD. (VISA/MC) Order #PS-400-04-017 www.energy.ca.gov/reports/ reports_400.html
RESFEN-3.1 Building Technologies, MS 90-3111 Lawrence Berkeley Laboratory Berkeley, CA 94720	RESFEN calculates the energy and cost implications of a building's windows compared to insulated walls. The relative energy and cost impacts of two different windows can also be compared against each other. RESFEN calculates the heating and cooling energy use and associated costs, also the peak heating and cooling demand for specific window products. [Based on DOE-2.1E] OS: Windows 95, 98, NT	Free! Download from windows.lbl.gov/software/ resfen

INTERNATIONAL DOE-2 RESOURCE CENTERS

The people listed here have agreed to be primary contacts for DOE-2 program users in their respective countries. Each resource center has the latest program documentation, all back issues of the User News, and recent LBNL reports pertaining to DOE-2. Users may make arrangements to photocopy the new material for a nominal cost. We hope to establish centers in other countries; please contact us if you want to establish a center in your area.

Australia and Australasia

P. C. Thomas, SOLARCH, University of New South Wales, Sydney 2052, Australia

Tel: +61 2 9385 6373 / Fax: +61 2 9385 6735, email PC.Thomas@unsw.EDU.AU www.fbe.unsw.edu.au/units/solarch

Murray Mason, ACADS BSG, 18 High Street, Glen Iris, VIC. 3146, Australia / Tel: +61 39 885 6586 / Fax: +61 39 885 5974

Brazil

Prof. Roberto Lamberts, Universidade Federal de Santa Catarina, Campus Universitario-Trindade, Cx. Postal 476, 88049-900 Florianopolis SC, BRASIL lamberts@ecv.ufsc.br / Tel: +55 48 331 9272/ Fax: +55 48 331 9770

Czech Republic

Faculty of Civil Engineering, Dept. of Environmental and Building Services Engineering, Czech Technical University in Prague, Thakurova 7, 166 29 Praha 6, CZECH REPUBLIC www.fsv.cvut.cz/ascii/index.htm Tel: +42 2 2435 4327

Egypt

Dr. Ossama A. Abdou, Center for Building Environmental Studies and Testing (C-Best), 15-El-Shibani Street, Almanza, Cairo, Egypt Tel: +20 2 391 1137 or +20 2 417 4583 / Fax: +20 2 519 4343 / oabdou@hotmail.com

Germany

B. Barath or G. Morgenstern, Ingenieurbüro Barath & Wagner GmnH, Postfach 20 21 41, D-41552 Kaarst, Germany Tel: +49 2 131 7574 9012 G. Morgenstern / Fax: +49 2 131 7574 9029

Hong Kong, China, Taiwan, Japan

Dr. Sam C. M. HUI or K.P. Cheung, Dept of Architecture, University of Hong Kong, Pokfulam Road, Hong Kong (SAR), CHINA / cmhui@hku.hk or kpcheung@hku.hk / http://arch.hku.hk/research/BEER/DOE-2/DOE-2.htm

Tel: +852 2859 2123 Sam Hui / Fax: +852 2559 6484

India

Jiten Prajapati or Anil K. Anand, Energy Systems Engineering, IIT-Mumbai, Powai, Mumbai 400 076, INDIA Tel: +91 022 578 2545 x7378

Italy

Marco Rapella, Managing Director Divisione Energie, Openplan SRL, c.so di Porta Nuova 13/15, 20121 Milano, Italy Tel: 39 02 626 94252, fax 36 02 2901 0531, marco.rapella@openplan.it, www.openplan.it

Korea (Chungnam)

Dr. Jun Tae Kim, Department of Architectural Engineering, Kongju National University, 182 Sinkwan-dong, Kongju, Chungnam 314-701, Republic of Korea / itkim@knu.kongju.ac.kr / Tel: +82 416 850 8653 / Fax +82 416 856 9388

Korea (Seoul)

Dr. Jung-Ho Huh, Ph.D., Assistant Professor, Dongdaemoon-Gu Jeonnong-Dong 90, Dept. of Architectural Engineering, The University of Seoul, Seoul 130-743, Korea. --huhj0715@uoscc.uos.ac.kr, Tel: +02-2210-2616 / Fax: +02-2248-0382

Korea (Taejon)

Dr. Euy-Joon Lee and Jong-Ho Yoon, Passive Solar Research Team, Bldg 2, Room 202, Korea Institute of Energy Research, Daeduk Science Town, 71-2 Jang-Dong, Yusong-Gu, Taejon 305-343, Republic of Korea. -- Lee: ejlee@kier.re.kr, Yoon: yesru@kier.re.kr
Tel: +82 42 860 3514 / Fax: +82 42 860 3132

INTERNATIONAL DOE-2 RESOURCE CENTERS (continued)

New Zealand

Tan Yune, Architecture Department, The University of Auckland, Private Bag 92019, Auckland, New Zealand tanyune@ccu1.auckland.ac.nz / Tel: +64 9 373 7999 x5647 / Fax: +64 9 373 7410

Portugal, Spain, Italy, and Greece

Antonio Rego Teixeira, INETI, Departamento de Energias Renováveis (DER), Estrada do Paco do Lumiar, 1649-038 Lisboa, Portugal rego.teixeira@mail.ineti.pt / Tel: +351 21 712 7237 / Fax: +351 21 712 7195

Singapore, Malaysia, Indonesia, Thailand, and the Philippines

WONG Yew Wah (Raymond), Nanyang Technological University, School of Mechanical and Production Engineering, Nanyang Avenue, Singapore 2263, Republic of Singapore, mywwong@ntu.edu.sq / Tel: +65 790 5543 / Fax: +65 791 1859

South Africa

Prof. L. J. Grobler, School of Mechanical and Materials Engineering, University of Potchefstroom, Private Bag X6001, Potchefstroom 2520, South Africa, mgiljg@puknet.puk.ac.za / Tel: +27 148 299 1328 / Fax: +27 148 299 1320

Switzerland

René Meldem, BG ingenieurs Conseils SA, 61 Avenue de Cour, Case postale, CH-1000 Lausanne, Switzerland Tel: +41 21 618 1111, Fax: +41 21 618 1122, rene.meldem@bg-21.com

Disclaimer: The Building Energy Simulation User News was prepared as an account of work sponsored by the United States Government (USG). While this document is believed to contain correct information, neither the USG nor any agency thereof, nor the Regents of the University of California (RUC), nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process or service by its trade name, trademark, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the USG or any agency thereof, or the RUC. The views and opinions of authors expressed herein do not necessarily state or reflect those of the USG or any agency thereof or of the Regents of the University of California

INTERNATIONAL DOE-2 ENERGY CONSULTANTS

Australia

P. C. Thomas, Sustainable Building & Energy Consultants, 6/52 Houston Road, Kingsford NSW 2032, Australia.

Tel/Fax: +61 2 9662 0205, Mobile +61 417 405 478, pc thomas@iname.com

Paul Bannister, Energy Group, Ltd., Unit 9, 14 Lonsdale Street, P. O. Box 25, Braddon, ACT 2612, Australia, Tel: 61 2 6257 7066, Fax 61 2 6257 7063, paul@xgl.com.au, www.eglnet.com

Belgium

Andre Dewint, S.A. Alpha Pi n.v., Avenue Franklin Roosevelt 74 bte 2, B-1000 Bruxelles, BELGIUM, Tel: +32 2 343 4251 / Fax: +32 2 343 0377, andewint@vub.ac.be

Canada

Curt Hepting, P.Eng. EnerSys Analytics, 2989 Delahaye Drive, Coquitlam, B.C. V3B 6Y9 Canada chepting@enersys.ca, www.enersys.bc.ca/homepage Tel: (604) 552-0700 / Fax (604) 552-0713

Dejan Radoicic, D. W. Thomson Consultants, Ltd., 1985 West Broadway #200, Vancouver, BC V6J 4Y3, Canada Tel (604) 731-4921 / Fax (604) 738-4420, dwtvan@dwtc.bc.ca, www.dwtc.bc.ca

INTERNATIONAL DOE-2 ENERGY CONSULTANTS (continued)

Australia

Neil A. Caldwell, PE, Ameresco Canada, Inc., 1730 - 401 West Georgia St., Vancouver, BC V6B 5A1 Canada ,Tel (604) 684-4984 / Fax (604) 684-4985 ncaldwell@ameresco.com

Dr. Stephane Bilodeau, PE, President, Groupe Enerstat, Inc., 79 Wellington North #202, Sherbrooke (Quebec) J1H 5A9, Canada sbilodeau@groupeenerstat.com, www.groupeenerstat.com/english/index.htm / Tel: (819) 562-8040 / Fax (819) 562-5578

Gordon Shymko, G.F. Shymko & Associates, Inc., 129 Evergreen Crescent S.W., Calgary, Alberta T2Y 3R2, Canada, gfshymko@home.com, Tel: (403) 254-4776, Fax: (403) 254-4795.

Germany

Jens Grundt and Ludwig Michel, GMW-Ingenieurburo, Die Planer Villa, Bünteweg 10a, 30559 Hannover, Lower Saxony, Germany Tel: +49 0511 58 59 48 -11/Fax +49 0511 58 59 48 -48 www.gmw-ingenieurbuero.de j.grundt@gmw-ingenieurbuero.de

Italy

Marco Rapella, Managing Director Divisione Energie, Openplan SRL, c.so di Porta Nuova 13/15, 20121 Milano, Italy Tel: 39 02 626 94252, fax 36 02 2901 0531, marco.rapella@openplan.it, www.openplan.it

Ireland

Paul Overy, Overy + Associates, Mechanical and Electrical Consulting Engineers, 43 Parnell Street, Clonmel, Co Tipperary, Ireland Tel: +353 (0)52-27667, Fax: +353 (0)52-29238 www.overy-assoc.com

Switzerland

René Meldem, BG ingenieurs Conseils SA, 61 Avenue de Cour, Case postale, CH-1000 Lausanne, Switzerland Tel: +41 21 618 1111. Fax: +41 21 618 1122. rene.meldem@bg-21.com

Philip Schluchter, Institut fur Bauphysik Klein, Urs Graf-Strasse 1, CH-4052 Basel, Switzerland

Gerhard Zweifel, Hochschule Technik + Architektur Luzern, Technikumstrasse 21 Abt. HLK, CH-6048 Horw, Switzerland gzweifel@ztl.ch Tel: +41 349 3349, Fax: 349 3960

Markus Koschenz, Building Equipment Section 175, EMPA, 129 Überlandstrasse, CH-8600 Dübendorf, Switzerland Markus.Koschenz@empa.ch, Tel: +41 1823 5511, Fax: 821-6244

United Kingdom

Dr. Peter Simmonds, Ove Arup and Partners, Ltd., 13 Fitzroy Street, London W1P 6BQ, UNITED KINGDOM.

Tel: +44 20-7465-3637 / Fax: 7465-3667, peter.simmonds@arup.com / www.arup.com

U.S. DOE-2 ENERGY CONSULTANTS

Arizona				
Dale R. Broughton, P.E. drb6@home.com	Quantum Computer Resources www.qcr-usa.com	20833 North 1 st Street	Phoenix, AZ 85027	(623) 780-3496 fax: 322-0049
Henny van Lambalgen, P.E. henny@questenergy.com	Quest Energy Group, LLC www.questenergy.com	4324 East Pearce Road	Phoenix, AZ 85044	(480) 753-5590 fax 753-1215
Marlin S. Addison marlin.addison@doe2.com	M. S. Addison & Associates	1215 West 12th Place	Tempe, AZ 85281	(480) 968-2040 fax: 968-2053
Chuck Sherman ces@essinc.com	ESSengineering	2141 East Broadway, #211	Tempe, AZ 85282	(480) 784-4500 fax: 784-4800

U.S. DOE-2 ENERGY CONSULTANTS (continued)

California				
Joseph Deringer, Peter Zhang	The Deringer Group, Inc.	1349 Addison Street	Berkeley, CA 94703	(510) 843-9000
jderinger@deringergroup.com	www.deringergroup.com		, ,	fax: 843-9005
M. Gabel, R. Howley	Gabel Associates, LLC	1818 Harmon Street	Berkeley, CA 94703	(510) 428-0803
office@gabelenergy.com	www.gabelenergy.com		• .	fax: 428-0324
George Marton	1129 Keith Avenue		Berkeley, CA 94708	(510) 841-8083
Leo Rainer	Davis Energy Group, Inc.	123 C Street	Davis, CA 95616	(916) 753-1100
lirainer@davisenergy.com	www.davisenergy.com			, ,
Lisa Heshong	The Heshong Mahone Group	11626 Fair Oaks Blvd, #302	Fair Oaks, CA 95628	(916) 962-7001
Doug Mahone	www.h-m-g.com			fax: 962-0101
Cliff Gustafson,	Taylor Systems Engineering. Inc.	9801 Fair Oaks Blvd., #100	Fair Oaks, CA 95628	(916) 961-3400
James Trowbridge, P.E.	www.tse-inc.net			fax: 961-3410
Tom Lunneberg, PE	Constructive Tech. Group	16 Technology Dr., #109	Irvine, CA 92618	(949) 790-0010
tlunneberg@ctg-net.com	www.ctg-net.com/main.htm			, ,
David J. Schwed	Romero Management Associates	1805 West Avenue K	Lancaster, CA 93534	(805) 940-0540
rma@as.net	www.asnet/~rma/index.htm			, ,
Martyn C. Dodd	Gabel Dodd/EnergySoft, LLC	100 Galli Drive, # 1	Novato, CA 94949	(415) 883-5900
support@energysoft.com	www.energysoft.com	,	,	fax: 883-5970
Jim Kelsey PE, Kevin Warren	kW Engineering	360-17 th Street #100	Oakland, CA 94612	(510) 834-6420
kelsey@kw-engineering.com	www.kw-engineering.com			fax: 834-6373
Patrick Nkwocha, PE	Global Tech Services	3360 Foothill Blvd., #108	Pasadena, CA 91107	(626) 583-8205
UPat@worldnet.att.net				fax: 583-8206
John F. Kennedy, PE	GeoPraxis, Inc.	205 Keller Street	Petaluma, CA 94952-3874	(707) 766-7010
info@geopraxis.com	www.geopraxis.com			fax: 766-7014
Greg Cunningham	ESSengineering	114 Sansome St., #1201	San Francisco, CA 94104	(415) 296-9760
gwc@essinc.com				fax: 784-9761
Charles Eley, Eric Kolderup	Eley Associates	142 Minna Street	San Francisco, CA 94105	(415) 957-1977
info@eley.com	www.eley.com			fax: 957-1381
Chandra Shinde, PE	Envirodesign Group	19613 El Camino Esplanade	Walnut, CA 91789-2138	(909) 598-1980
Colorado				
Fred Porter	Architectural Energy Corp	2540 Frontier Ave, #201	Boulder, CO 80301	(303) 444-4149
	3, F			fax: 444-4304
Ellen Franconi	Nexant	1401 Walnut Street, #403	Boulder, CO 80302	(303) 440-4343
	-			fax: 440-6644
Susan Reilly	Enermodal Engineering	1554 Emerson Street	Denver, CO 80218	(303) 861-2070
denver@enermodal.com	3 - 3		-,	fax: 830-2016
Joel Neymark, PE	J. Neymark & Associates	2140 Ellis Street	Golden, CO 80401	(303) 384-3672
neymarkj@qwest.net	,		- ,	fax: 384 9427
			0	
Norm Weaver, PE	Interweaver Consulting	P.O. Box 775444	Steamboat Springs, CO 80477	(970) 870-1710

U.S. DOE-2 ENERGY CONSULTANTS (continued)

			,	
Connecticut				
Adrian Tuluca	Steven Winter Associates	50 Washington Street	Norwalk, CT 06854	(203) 857-0200
swa@swinter.com	www.swinter.com			fax: 852-0741
Florida				
Philip Wemhoff	9765 MacArthur Court North		Jacksonville, FL 32246	(904) 645-5342
wemhoffp@buildingsleuth.com			*	,
Dr. Paul Hutchins PE,CEM	Reynolds Smith & Hills, Inc.	4651 Salisbury Road	Jacksonville, FL 32256	(904) 279-2277
	www.rsandh.com		_	fax: 279-2491
Georgia				
Lung-Sing Wong, PE	Building Performance Engineers	3060 Wanda Woods Drive	Atlanta, GA 30340	(770) 270-0100
lswong@bpe-inc.com	www.bpe-inc.com			
Illinois				
Gary H. Michaels, PE	G.H. Michaels Associates	1512 Crain Street	Evanston, IL 60202	(847) 869-5859
Prem N. Mehrotra	General Energy Corp.	230 Madison Street	Oak Park, IL 60302	(708) 386-6000
Robert Henninger, PE	GARD Analytics, Inc.	1028 Busse Highway	Park Ridge, IL 60068-1802	(847) 698-5686
rhenninger@gard.com	www.gard.com			
Kansas				
Dr. Brian A. Rock, PE	U. Kansas, A/E Dept, Marvin Hall	barock@ukans.edu	Lawrence, KS 66045-2222	(785) 864-3603
Massachusetts				
C. Kalasinsky PE, T.Chan	R.G. Vanderweil Engrs., Inc.	274 Summer Street	Boston, MA 02458-1113	(617) 423-7423
	www.vanderweil.com			fax: 423-7401
Mark Mullins	Select Energy Services	24 Prime Parkway	Natick, MA 01760	(508) 653-0456
	www.selectenergysi.com	_		fax: 653-0266
Michael Andelman	JRMA & Associates	421 Watertown St.	Newton, MA 02210	(617) 964-8889
andelman@jrma-ae.com	www.jrma-ae.com	-	·	fax: 964-7881
Minnesota				
Daniel A. Katzenberger, P.E.	Katzenberg USA Inc.	7540 Edinborough Way, 1303	Edina, Minnesota, MN 55435	(952) 893-7379
dan@k-usa.com	http://www.k-usa.com			fax 952-835-1442
Missouri				
Mike Roberts	Roberts Engineering Co.	11946 Pennsylvania	Kansas City, MO 64145	(816) 942-8121
Bruce A. Leavitt, PE	Wm. Tao & Associates Inc.	2357-59 th Street	St. Louis, MO 63110	(314) 644-1400
Montana				
Michael W Harrison, PE	Harrison Engineering	139 Bluebird Lane	Whitehall, Montana 59759	(406) 287-5370
Nebraska				
Philip M. Schreier, PE	Farris Engineering	11239 Chicago Circle	Omaha, NE 68154-2634	(402) 330-5900

U.S. DOE-2 ENERGY CONSULTANTS (continued)

New York				
Robert E. Gibeault	PB Power, Inc.	1873 Western Avenue #201	Albany, NY 12203	(518) 862-0012
gibeault@pbworld.com	www.pbworld.com			fax: 862-1608
J. Fireovid, P.E.,	SAIC Energy Solutions Div.	421 New Karner Road	Albany, NY 12205	(518) 452-8800
K. Yousef, P.E.	www.saic.com			fax: 452-8111
Dave Pruitt, Scott Frank	Jaros, Baum & Bolles www.jbb.com	80 Pine Street	New York, NY 10005	(212) 530-9300
North Carolina				
Gopal Shiddapur, PE	DukeSolutions (MC: ST05A)	230 S. Tryon Street, # 400	Charlotte, NC 28202	(704) 373-4439
gsshidda@duke-energy.com	duke-energy.com	,	,	fax: 373-4872
Oregon	·			
Carol Gardner	Gardner Energy Management	PO Box 12549	Portland, OR 97212-0549	(503) 223-4847
Saror Saranor	Services	1 0 Box 12010	1 ordana, 01 (01212 0010	fax: 223-8486
John P. Karasaki, P.E.	CBG Consulting Engineers	6650 S. W. Redwood Lane #355	Portland, OR 97224	(503) 620-3232
jpkarasa@cbg-engrs.com	0 0			fax: 620-0346
Pennsylvania				
Kimberly Byk, wba@utcorp.com	Wood, Byk & Associates, Inc.	829 Meadowview Road	Kennett Square, PA 19348	(610) 347-0710
, , , , S	, , , , , , , , , , , , , , , , , , , ,			fax: 347-0711
Texas				
Jeff S. Haberl jhaberl@esl.tamu.edu	Energy Systems Laboratory	Texas A&M University	College Station., TX	(409) 845-6065
	esl.tamu.edu		77843-3123	(***)*******
Tarek Bou-Saada	bousaada@flash.net	4410 Grand Cayman Drive	Sugar Land, TX 77479	(281) 265-9139
Virginia				
Jay Hall	ICF Consulting	9300 Lee Highway	Fairfax, VA 22031	(410) 263-3162
jayhall@icfconsulting.com		5555 <u>255 i iigiiii a</u> j		fax (703) 934-3530
Kurmit C. Rockwell, P.E. CEM	XENERGY	4400 Fair Lakes Court	Fairfax, VA 22033-3811	(703) 631-6912
krockwell@xenergy.com			,	fax: 631-4119
Dave Walker walkeng@swva.net	Walker Engineering	P.O. Box 366, 4230 Pulaski Giles	Staffordsville, VA 24167	(540) 921-4544
	www.swva.net/walkeng	Turnpike		fax: 921-4548
Washington				
Steve Byrne	ITEM Systems, suite 344	321 High School Road NE	Bainbridge Island, WA 98110	(206) 855-9540
		3	5 ,	,
byrne@item.com	www.halcyon.com/byrne/item.htm			
byrne@item.com Gregory J. Banken, PE	Q-Metrics, Inc.	P.O. Box 3016	Woodinville, WA 98072-3016	(425) 825-0200

Support Tools for EnergyPlus and DOE-2 from The Deringer Group

EzPlus-Parm

This is a standalone Windows tool intended for EnergyPlus parametric analysis. It was designed to simplify the running of multiple parametric EnergyPlus simulations by helping a user organize and edit all needed files.

Draw EzPlus

www.deringergroup.com • www.deringergroup.com

A tool that displays the 3-D geometry embedded in an EnergyPlus file. The user can toggle between line and surface (fill) presetation modes, and can select to draw any mix of key building objects – floor, walls, roof, windows, and attached and detached shading.

EnergyPlus Online Simulations

One set of tools is online and embedded in the EcoAdvisor, a set of online training modules for sustainable buildings. These tools can be used by anyone and require no special knowledge of EnergyPlus.

EnergyPlus Interface Support Tools

This is a set of stand-alone Windows-based tools intended to make the text-based use of EnergyPlus faster, easier, and more accurate.

DOE-2 Parametric Study Tool -- DOE2Parm

DOE-2 parametric analysis can be complicated because you need to link, run and edit multiple files that can be located anywhere on your computer. DOE2Parm allows you to run the parametric analysis in the same window. DOE2Parm is an MS Windows-based tool.



Founded in 1980, The Deringer Group (TDG)
specializes in sustainable and energy efficient
building design projects and studies
throughout the world. TDG is developing
several support tools for EnergyPlus, all of
which may be freely downloaded.

• www.deringergroup.com • www.deringergroup.com • www.deringergroup.com • www.deringergroup.com

• www.deringergroup.com • www.deringergroup.com •