


Synthetic controller performance brief

Meridian Controls reference scenario. These invented figures demonstrate extraction and are not hardware guarantees.

Variant	Throughput	Width
A	120 messages/s	4.25 in
B	180 messages/s	8.2 cm
C	240 messages/s	110 mm

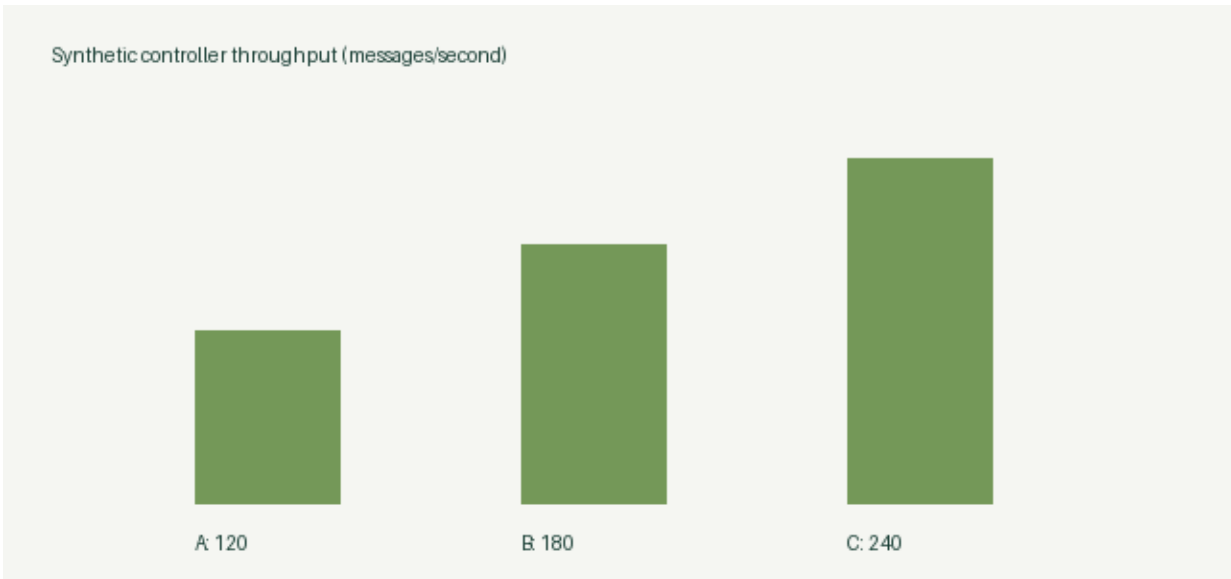

Equation: throughput = processed messages / elapsed seconds. Scaled value = raw / 65535 * 10 V.