



Conventional workflow

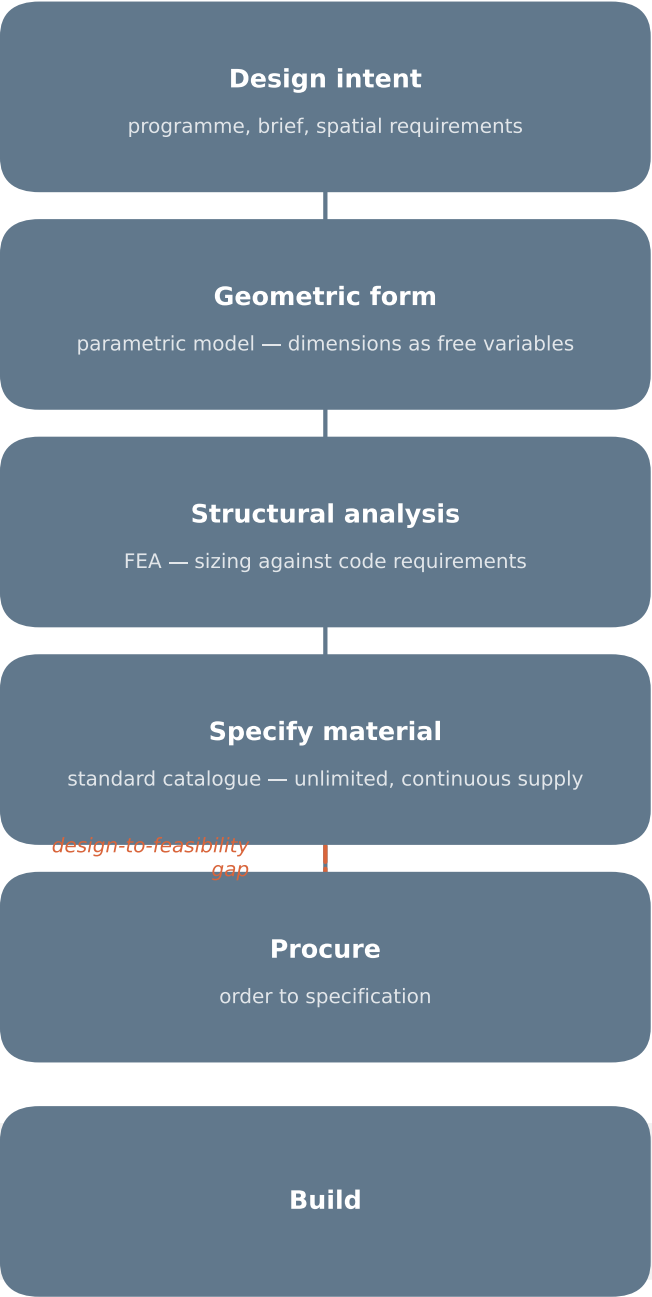

Inventory-driven workflow

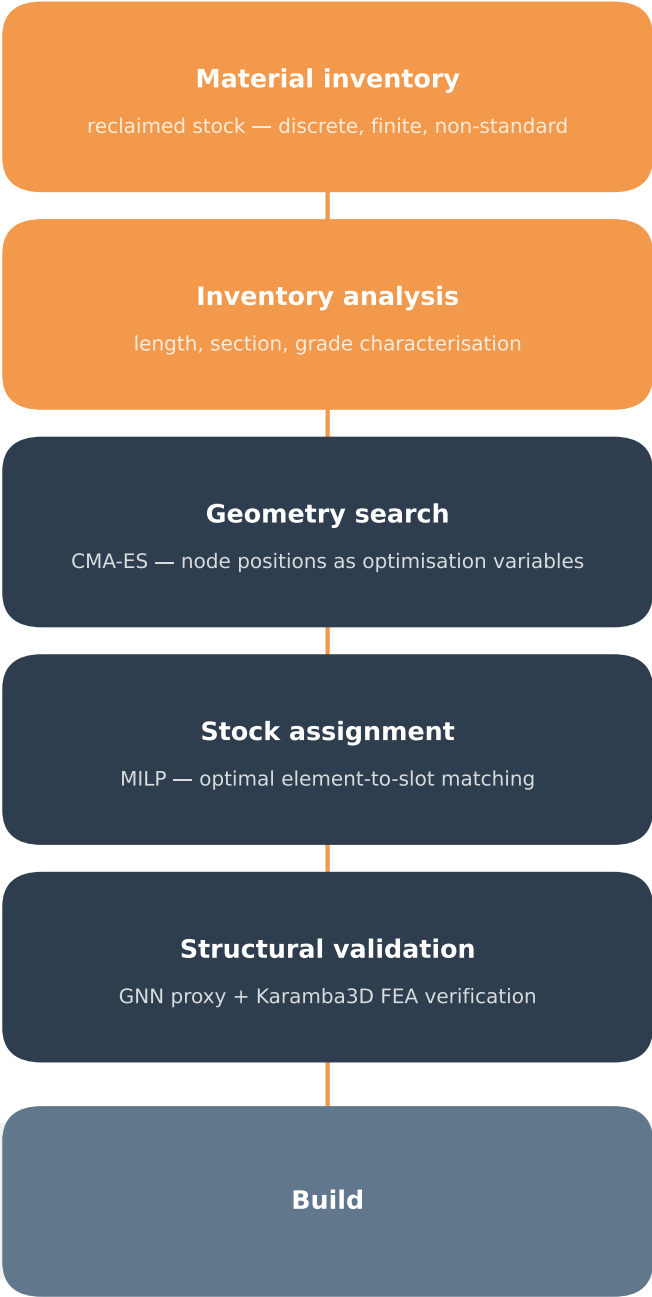

fitness
feedback

design-to-feasibility
gap

- Conventional — new / standard material
- Inventory-driven — reclaimed stock input
- Shared computational stage
- Design-to-feasibility gap

Figure X — Conventional workflow (left) vs. inventory-driven workflow (right). The dashed red arrow marks the design-to-feasibility gap that arises when reclaimed stock is substituted after geometry is fixed. The inventory-driven workflow resolves this by treating the stock as the primary design input.