


Node feature vector

$\mathbf{f}_v \in \mathbb{R}^{10}$ — one vector per node

#	feature	description	unit
0	x	x-coordinate (centroid-normalised) -7.54	m
1	y	y-coordinate (centroid-normalised) -4.27	m
2	z	z-coordinate (centroid-normalised) 0.66	m
3	T_x	Translational restraint x (1=fixed) 1	{0,1}
4	T_y	Translational restraint y (1=fixed) 1	{0,1}
5	T_z	Translational restraint z (1=fixed) 1	{0,1}
6	R_x	Rotational restraint x (1=fixed) 0	{0,1}
7	R_y	Rotational restraint y (1=fixed) 0	{0,1}
8	R_z	Rotational restraint z (1=fixed) 0	{0,1}
9	F_z	Applied vertical load (—=downward) -6.42	N

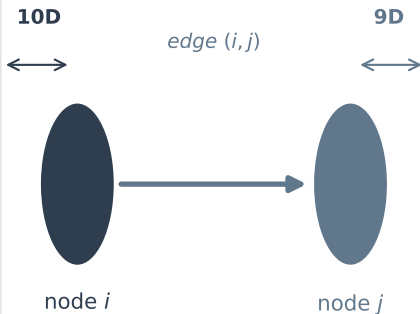

row colour groups



spatial · section



restraints · stiffness



load · pre-computed

Edge feature vector

$\mathbf{f}_e \in \mathbb{R}^9$ — one vector per member

#	feature	description	unit
0	b	Cross-section width 0.14	m
1	h	Cross-section depth 0.16	m
2	L	Installed member length 1.03	m
3	E	Elastic modulus 11.0×10^9	Pa
4	I_y	Second moment of area (strong axis) 4.78×10^{-5}	m ⁴
5	I_z	Second moment of area (weak axis) 3.66×10^{-5}	m ⁴
6	J	Torsional constant 2.25×10^{-6}	m ⁴
7	EA/L	Axial stiffness per unit length 2.39×10^8	N/m
8	$\hat{N}$	Mean-stiffness FEM force estimate $-35\,000$	N