Motor heat fin — view from the PETG tab side

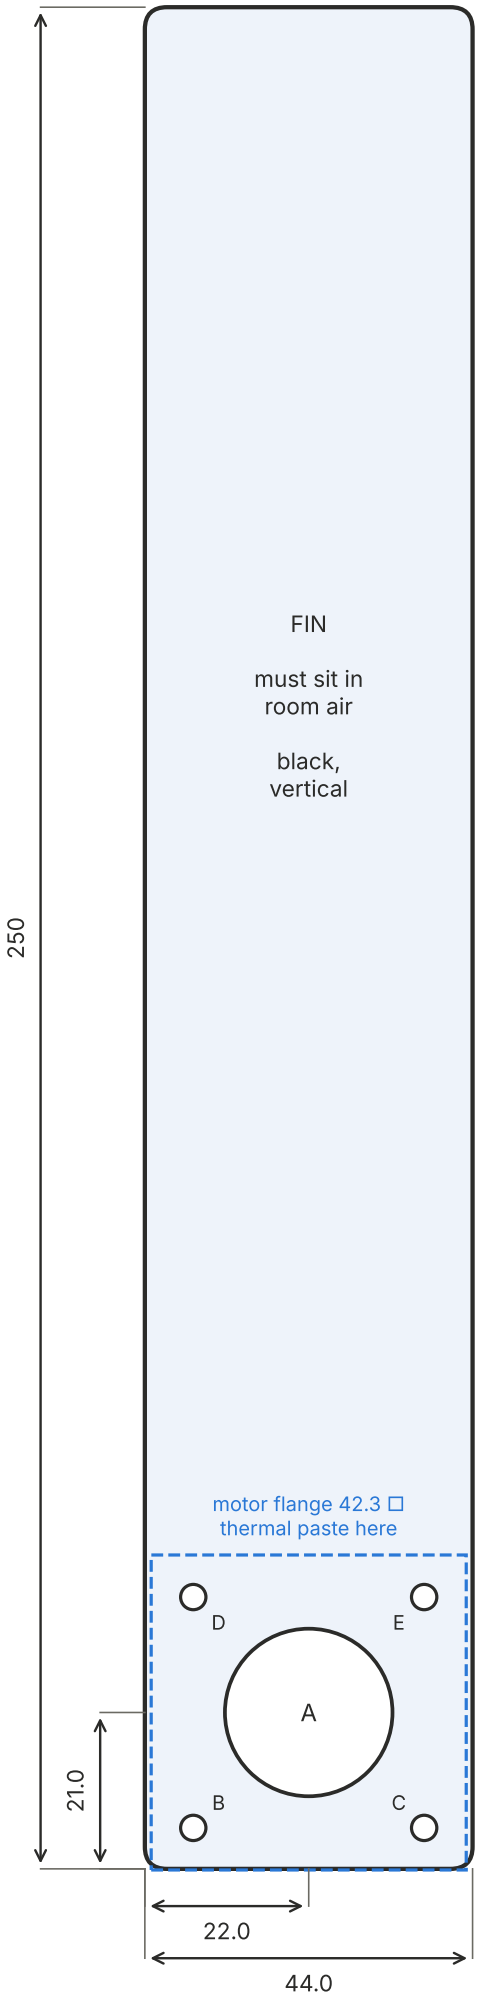

HOLE TABLE (origin = bottom-left corner)

ID	Size	X	Y	Purpose
A	Ø22.5 thru	22.0	21.0	motor pilot
B	Ø3.4 thru	6.5	5.5	M3 motor bolt
C	Ø3.4 thru	37.5	5.5	M3 motor bolt
D	Ø3.4 thru	6.5	36.5	M3 motor bolt
E	Ø3.4 thru	37.5	36.5	M3 motor bolt

Material: 3.175 mm (1/8") 6061-T6 or 5052-H32 plate

Blank: 44.0 x 250 mm (shear), tol +/-0.5

Holes: positions +/-0.1 relative to each other;
datum = BOTTOM edge + LEFT edge (drill all 5
in one setup on the mill)

Corners: break edges; R3 optional

Deburr both faces; motor face must stay flat

Finish: matte black paint EXCEPT the motor
contact square (thermal paste there)

Mass: 91 g

BOTTOM edge sits on the slide-in deck;
motor axis 21 mm above it (v3 STEP)

Bolt-hole edge to plate side: 4.8 mm

Stack: motor | plate | 5 mm PETG tab
→ M3 × 12 motor bolts (was x 10)
→ motor + spool move 3.2 mm along the shaft

Cover fin pocket: slot (T+0.8) x 44.8 open to
the mating face; 10-12 mm air each face;
floor >= 25.5 mm above shaft; open top + side