
HOLE TABLE (mm [inch]) - mill setup: datum A = bottom edge, datum B = long side (228.6 mm edge)

ID	Ø mm [in]	X from B	X from left	Y from A
1	22.5 [0.886]	22.00 [0.866]	20.00 [0.787]	21.00 [0.827]
2	3.4 [0.134]	37.50 [1.476]	4.50 [0.177]	5.50 [0.217]
3	3.4 [0.134]	6.50 [0.256]	35.50 [1.398]	5.50 [0.217]
4	3.4 [0.134]	37.50 [1.476]	4.50 [0.177]	36.50 [1.437]
5	3.4 [0.134]	6.50 [0.256]	35.50 [1.398]	36.50 [1.437]


NOTES

1. MATERIAL: 6061-T6 (OR 5052-H32), 1/8 IN PLATE (3.175 mm).
2. FINISH: MATTE BLACK PAINT EXCEPT THE MOTOR CONTACT SQUARE
   (the 42.3 mm square contact area: bare, thermal paste).
3. ALL HOLES THRU, ±0.1 RELATIVE TO EACH OTHER; DRILL ALL 5
   IN ONE SETUP FROM DATUMS A AND B. OUTLINE ±0.5, SHEARED OR SAWN.
4. BREAK ALL EDGES, DEBURR BOTH FACES; MOTOR FACE FLAT, NO BURRS.
5. OUTLINE AND HOLES = Heat_horn of Assem_laundry_v3_step_1021
   (cad/reference/station_1021/Heat_horn.step); thickness changed only.
6. STACK: MOTOR | FIN | 5 mm PETG TAB, M3 x 12 SCREWS FROM THE
   SPOOL SIDE. MOTOR + SHAFT SIT 1.175 mm AWAY FROM THE SPOOL
   vs the 2.0 mm CAD fin.
7. MASS 72.6 g (0.160 lb) EACH, VOLUME 26906 mm3.
8. PROTOTYPE ONLY: 0.019 in (0.483 mm) SHEET,
   SAME OUTLINE (heat_fin1021_0p019_asm1021.step).

FRONT VIEW from the motor side 1:1

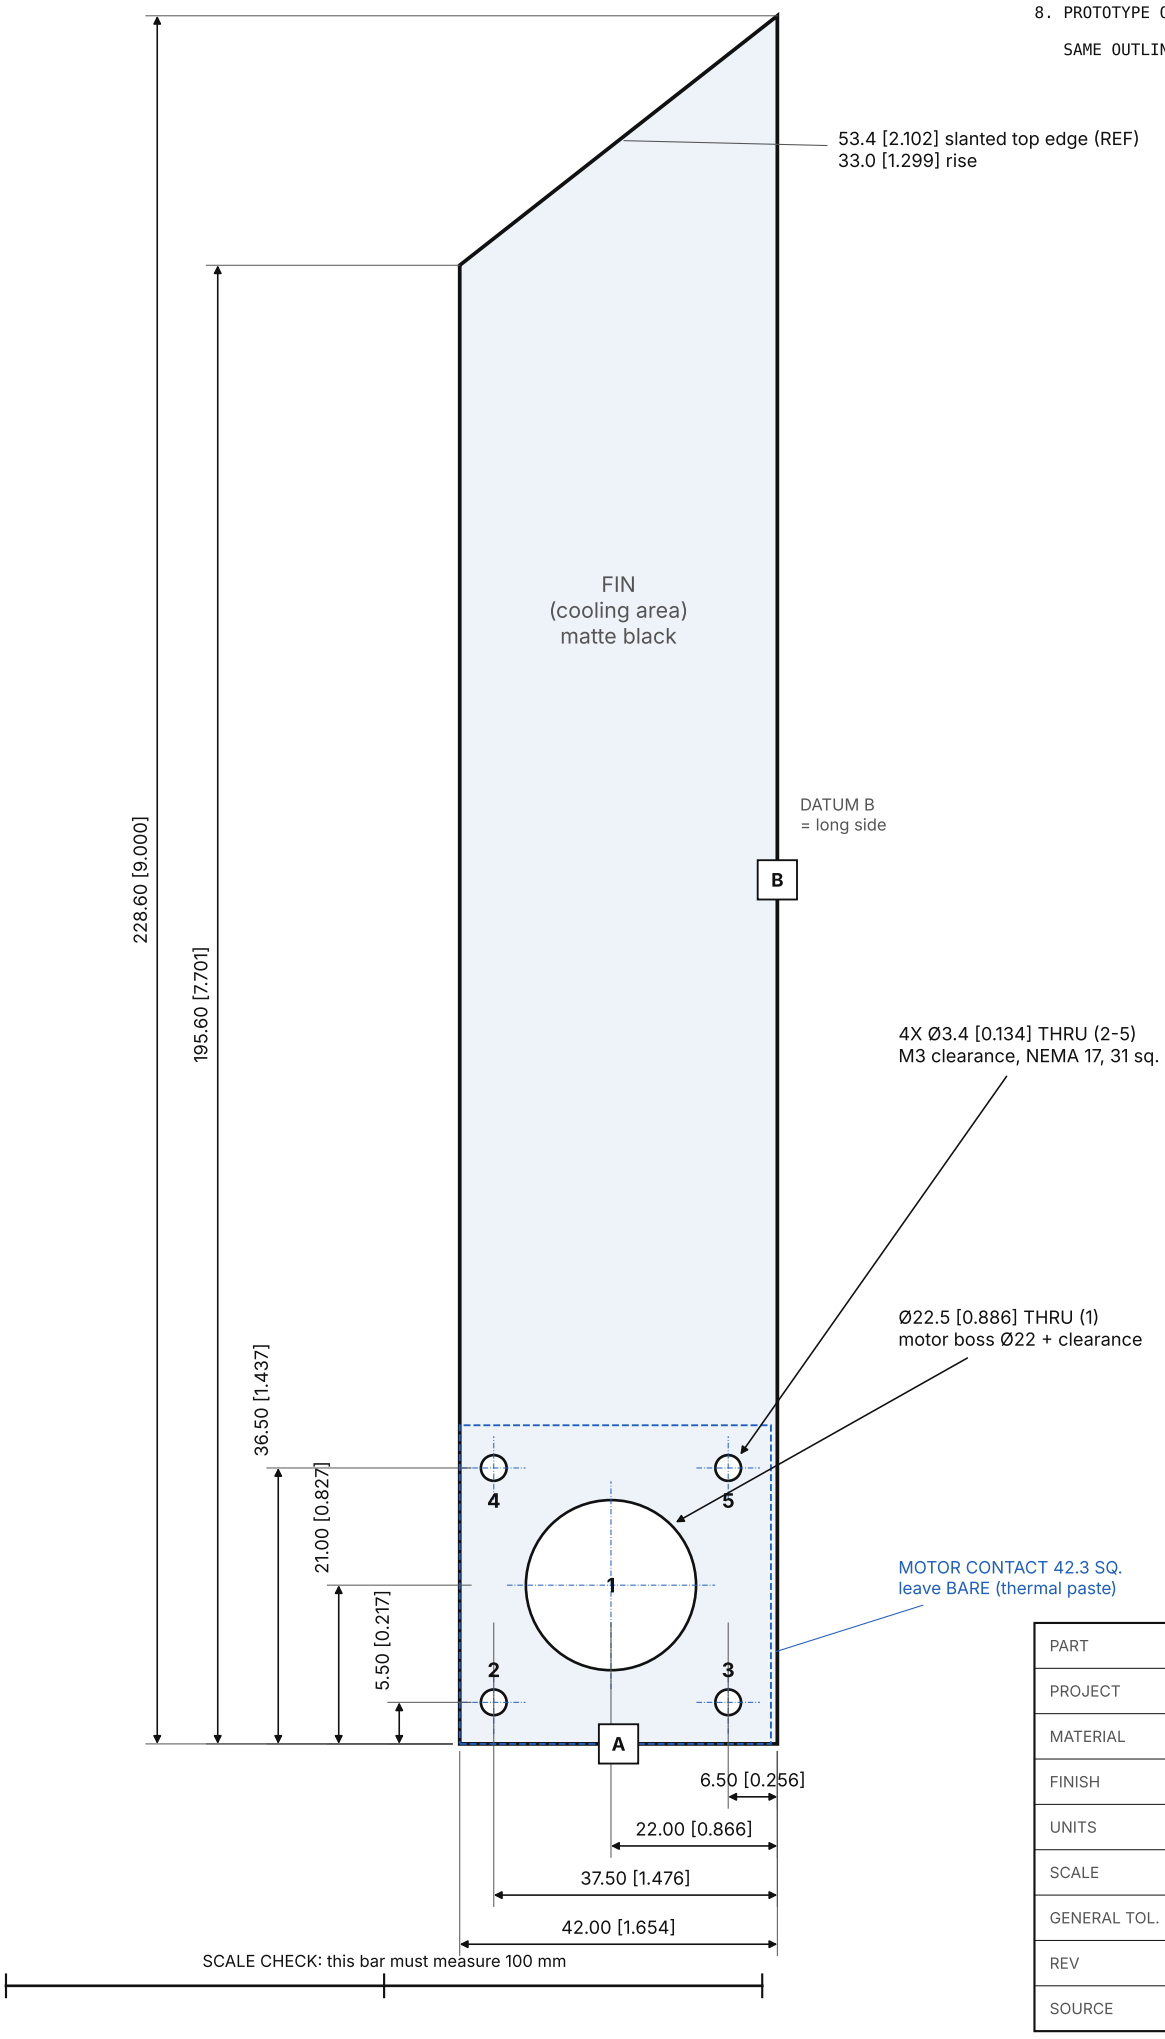

EDGE VIEW 1:1



PART	HEAT FIN 1021 (heat_fin1021)
PROJECT	RoomCleaner winch station, 10/21 assembly
MATERIAL	6061-T6 (or 5052-H32), 1/8 in plate
FINISH	matte black paint, motor square bare
UNITS	mm [inch]
SCALE	1:1 on A3 (print at 100 %)
GENERAL TOL.	outline ±0.5, holes ±0.1 rel.
REV	A 2026-10-22
SOURCE	cad/parts/heat_fin1021.py