Motor heat fin — view from the PETG tab side

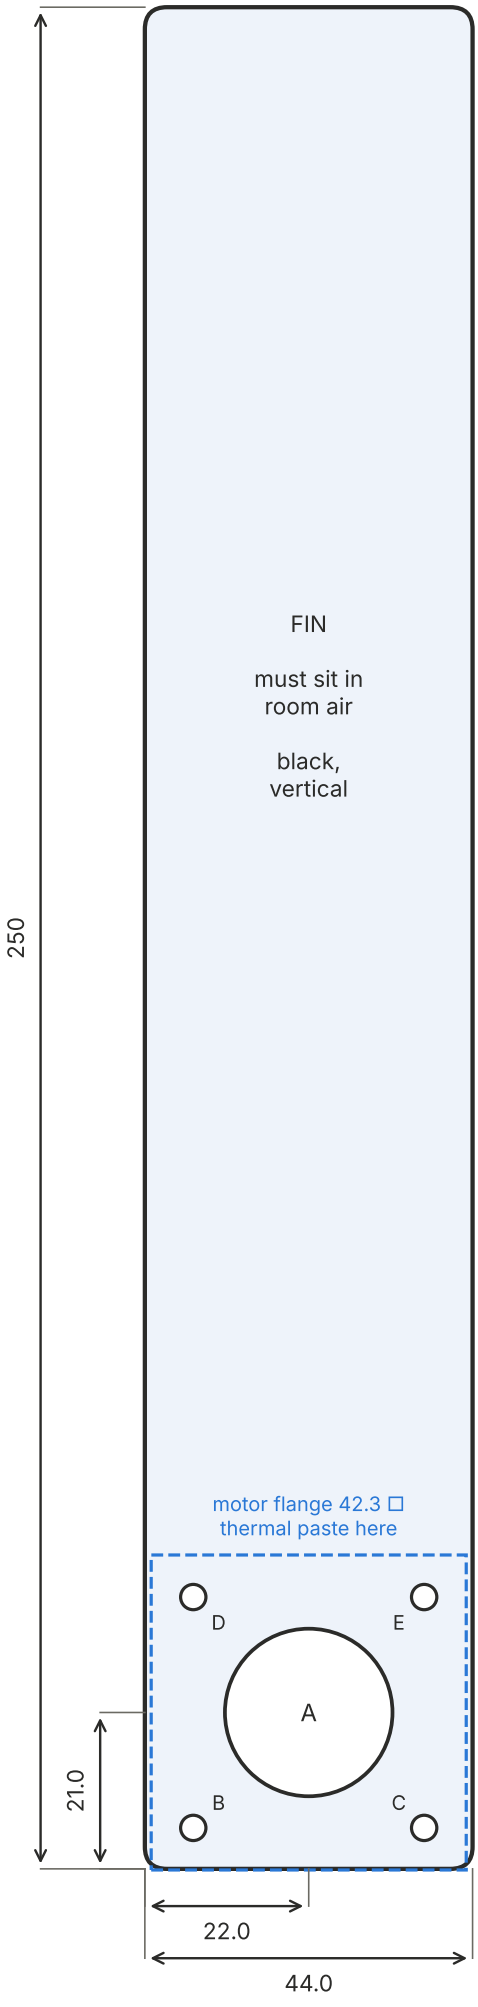


**HOLE TABLE (origin = bottom-left corner)**

| ID | Size | X | Y | Purpose |
|---|---|---|---|---|
| A | Ø22.5 thru | 22.0 | 21.0 | motor pilot |
| B | Ø3.4 thru | 6.5 | 5.5 | M3 motor bolt |
| C | Ø3.4 thru | 37.5 | 5.5 | M3 motor bolt |
| D | Ø3.4 thru | 6.5 | 36.5 | M3 motor bolt |
| E | Ø3.4 thru | 37.5 | 36.5 | M3 motor bolt |

Material: 3.175 mm (1/8") 6061-T6 or 5052-H32 plate

Blank: 44.0 x 250 mm (shear), tol +/-0.5

Holes: positions +/-0.1 relative to each other;
datum = BOTTOM edge + LEFT edge (drill all 5
in one setup on the mill)

Corners: break edges; R3 optional

Deburr both faces; motor face must stay flat

Finish: matte black paint EXCEPT the motor
contact square (thermal paste there)

Mass: 91 g

BOTTOM edge sits on the slide-in deck;
motor axis 21 mm above it (v3 STEP)

Bolt-hole edge to plate side: 4.8 mm

Stack: motor | plate | 5 mm PETG tab
→ M3 × 12 motor bolts (was x 10)
→ motor + spool move 3.2 mm along the shaft

Cover fin pocket: slot (T+0.8) x 44.8 open to
the mating face; 10-12 mm air each face;
floor >= 25.5 mm above shaft; open top + side