

DoorLock_Electronics

Variant: Prototype


Draft


Design by Guillermo Royo


Page	Index	Page	Index
1	Cover	11	>PAGE11
2		12	>PAGE12
3	>PAGE3	13	>PAGE13
4	>PAGE4	14	>PAGE14
5	>PAGE5	15	>PAGE15
6	>PAGE6	16	>PAGE16
7	>PAGE7	17	>PAGE17
8	>PAGE8	18	>PAGE18
9	>PAGE9	19	>PAGE19
10	>PAGE10	20	>PAGE20

SCHEMATICS STATUS NOTE:
DRAFT, PRELIMINARY, CHECKED, RELEASED

2502_Safety_halls
08/05/2025 7:41
Sheet: >SHEET2

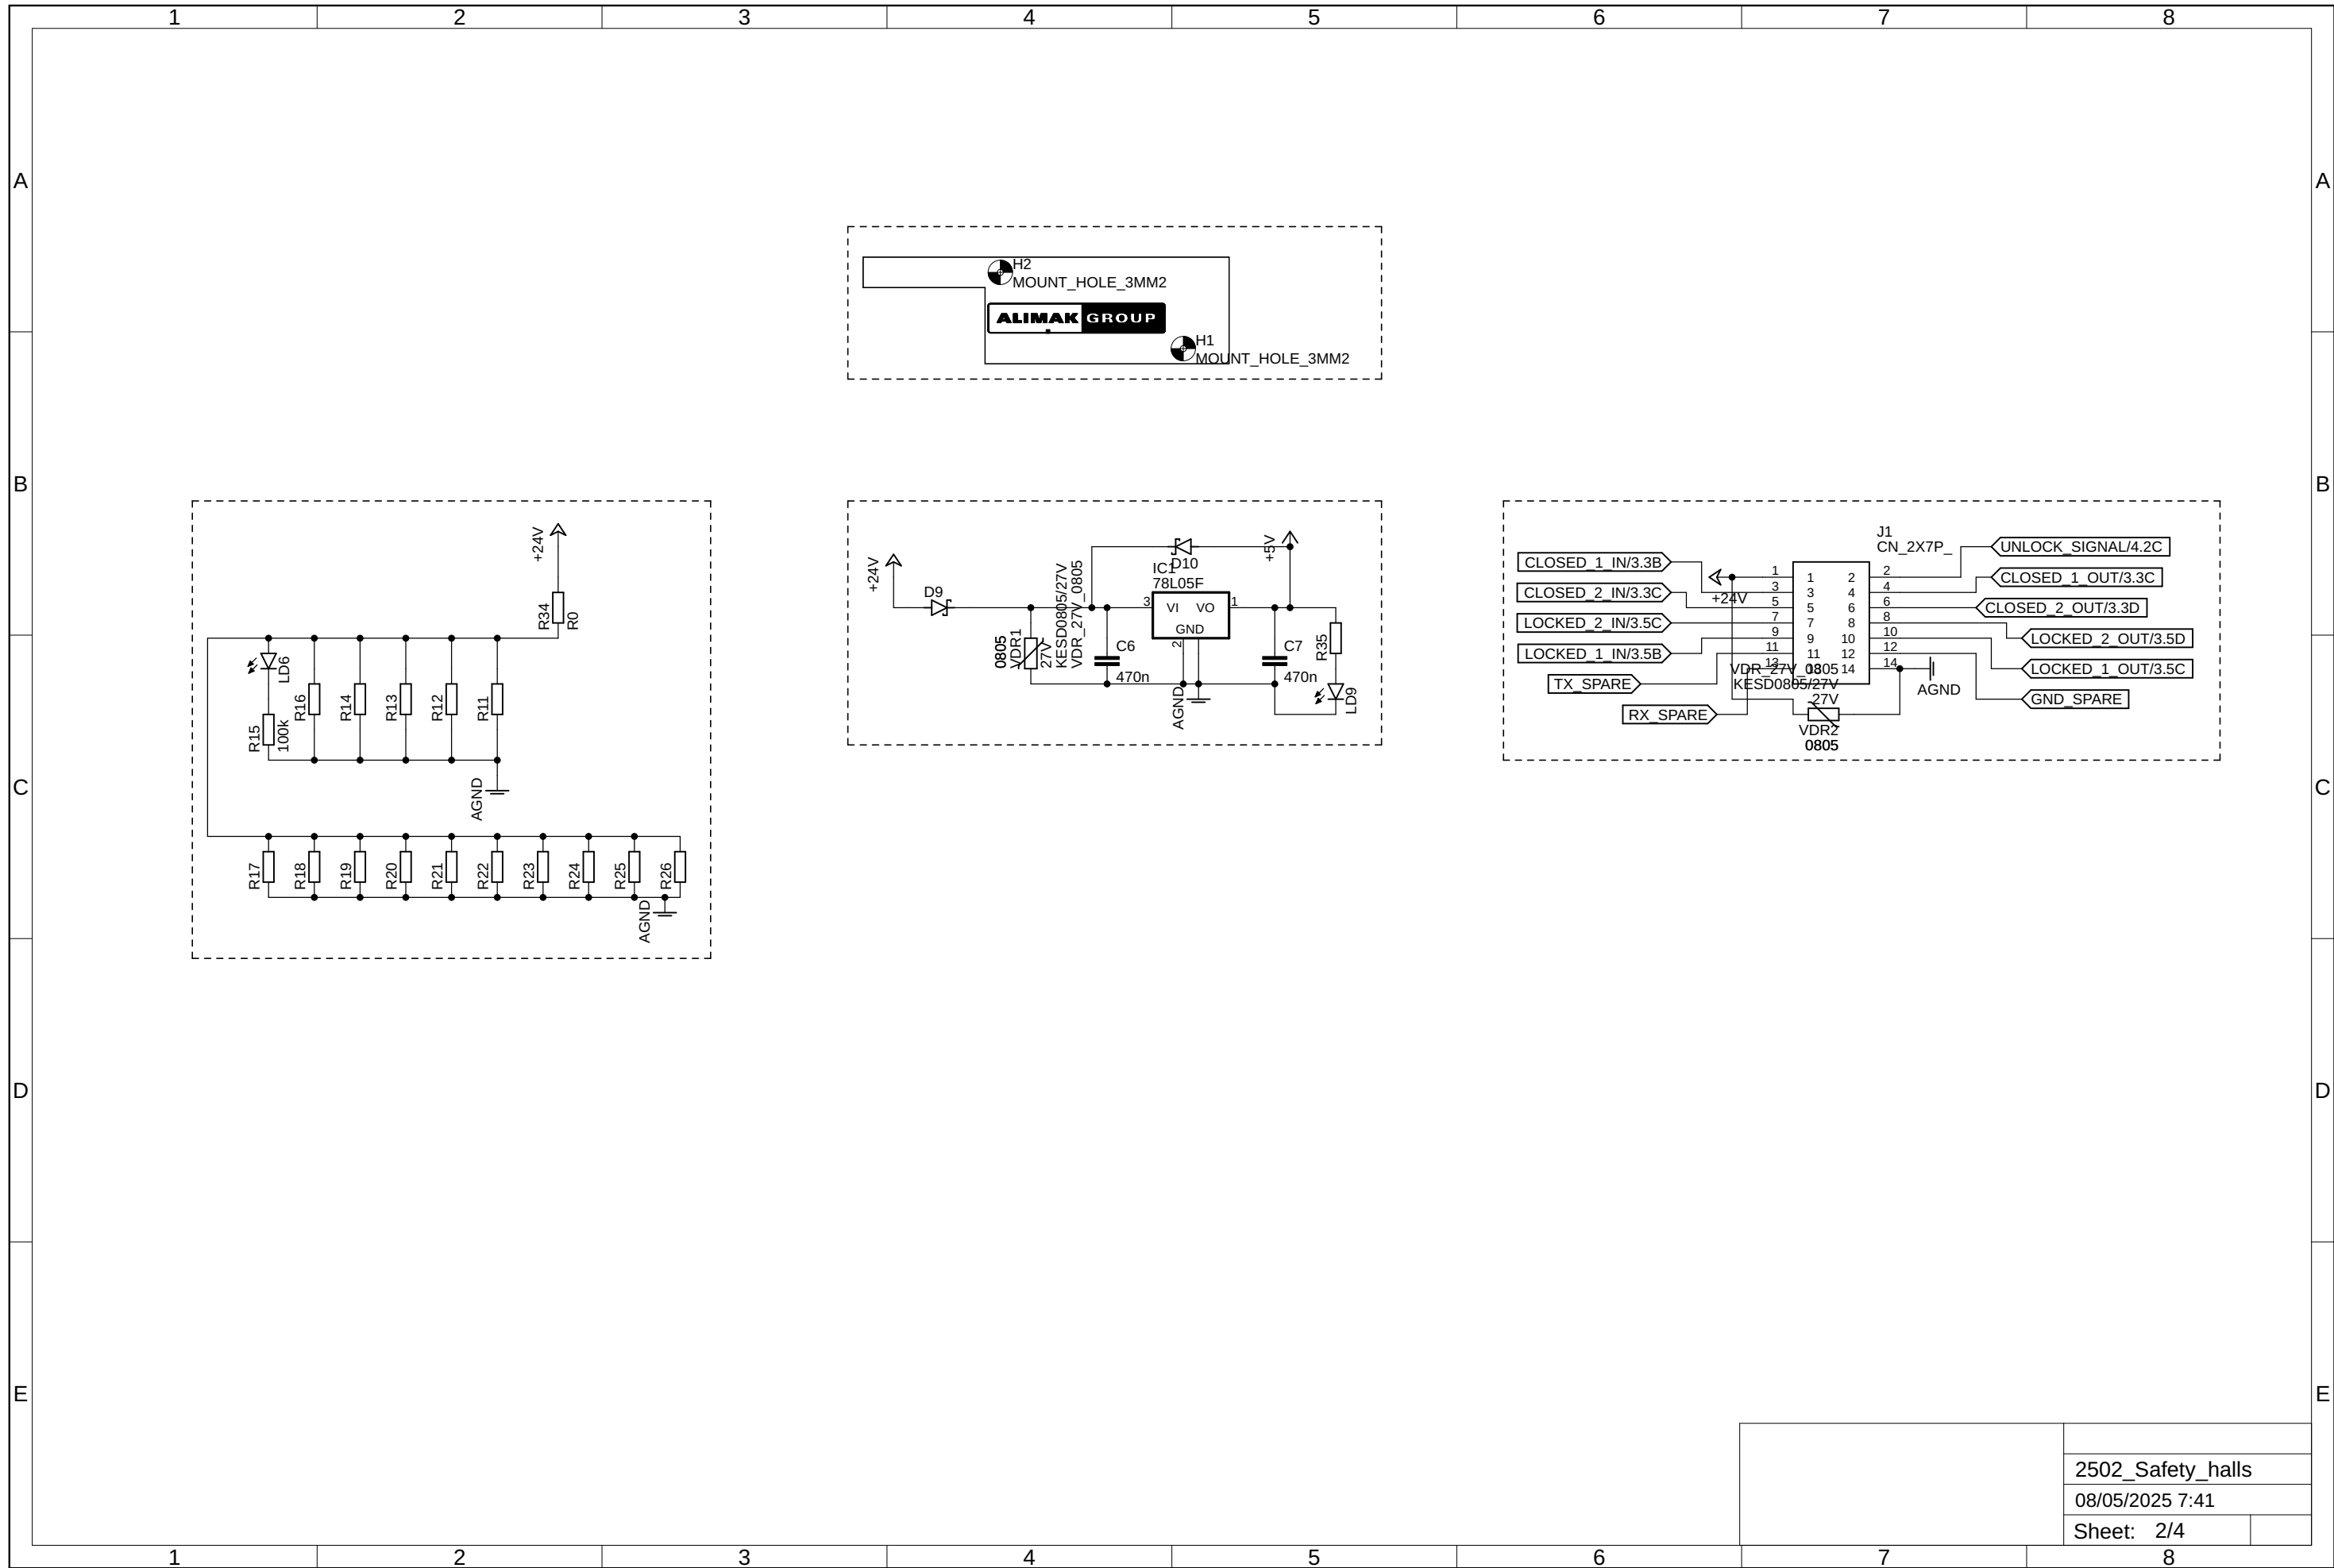

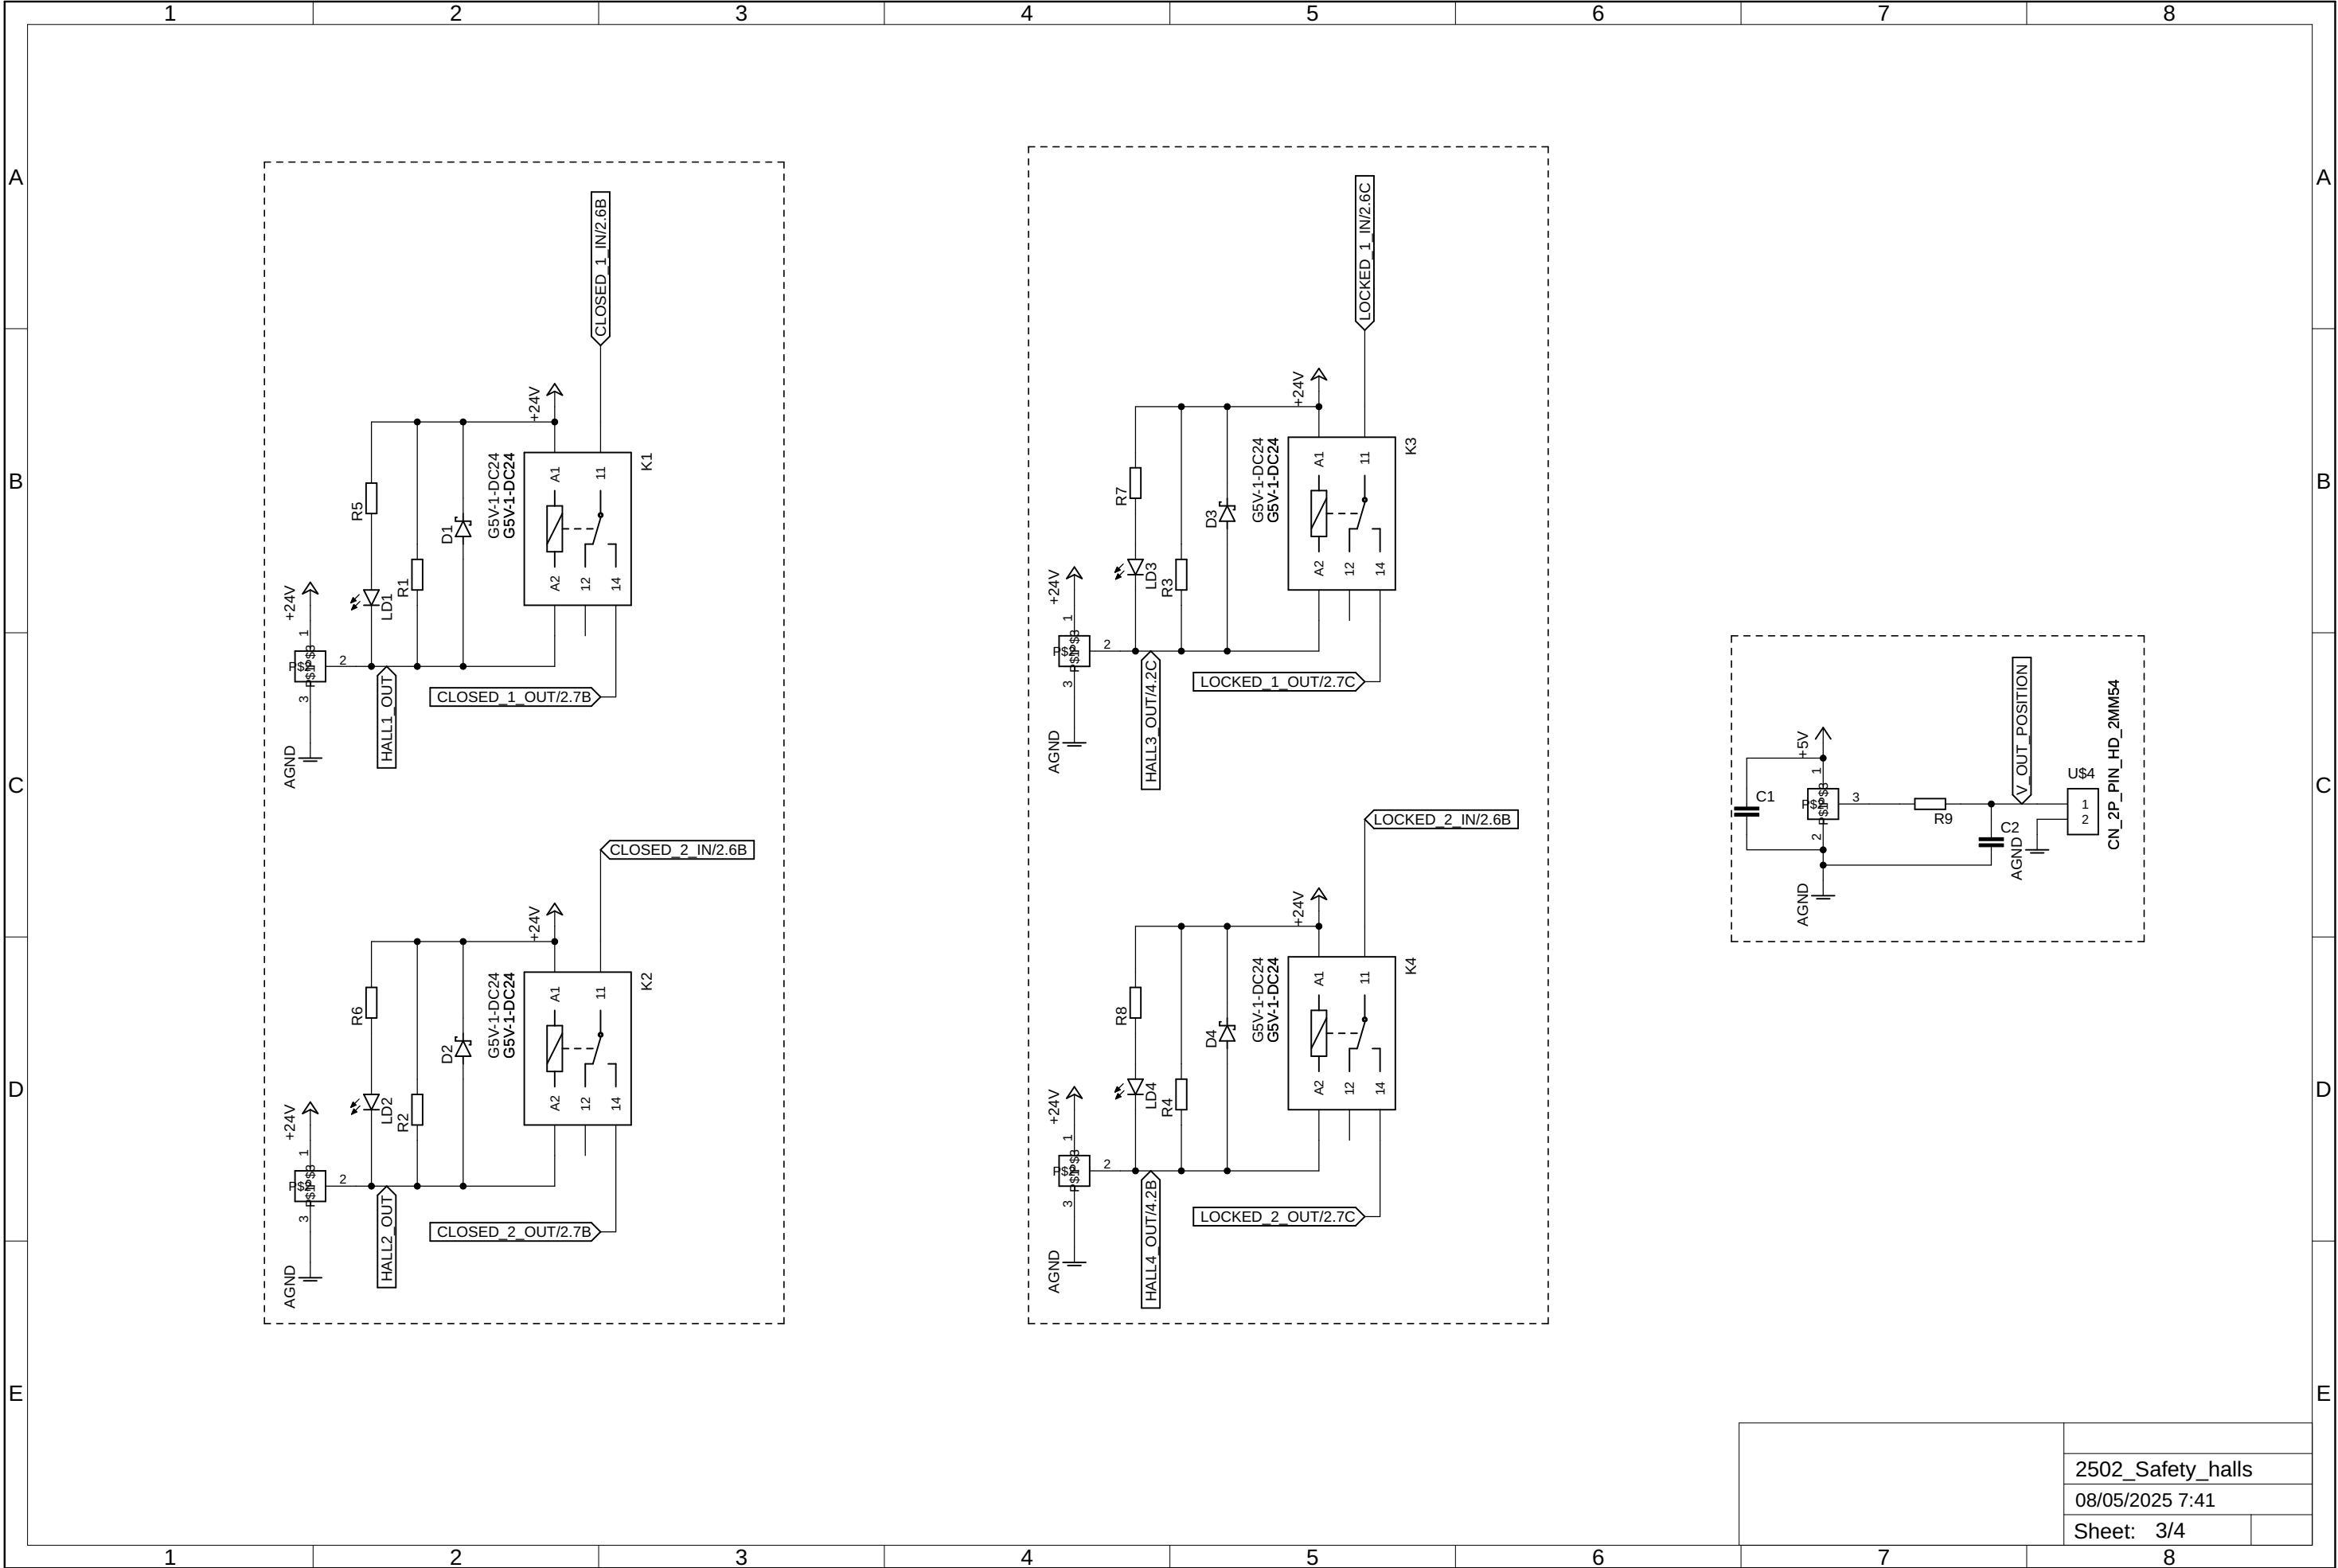

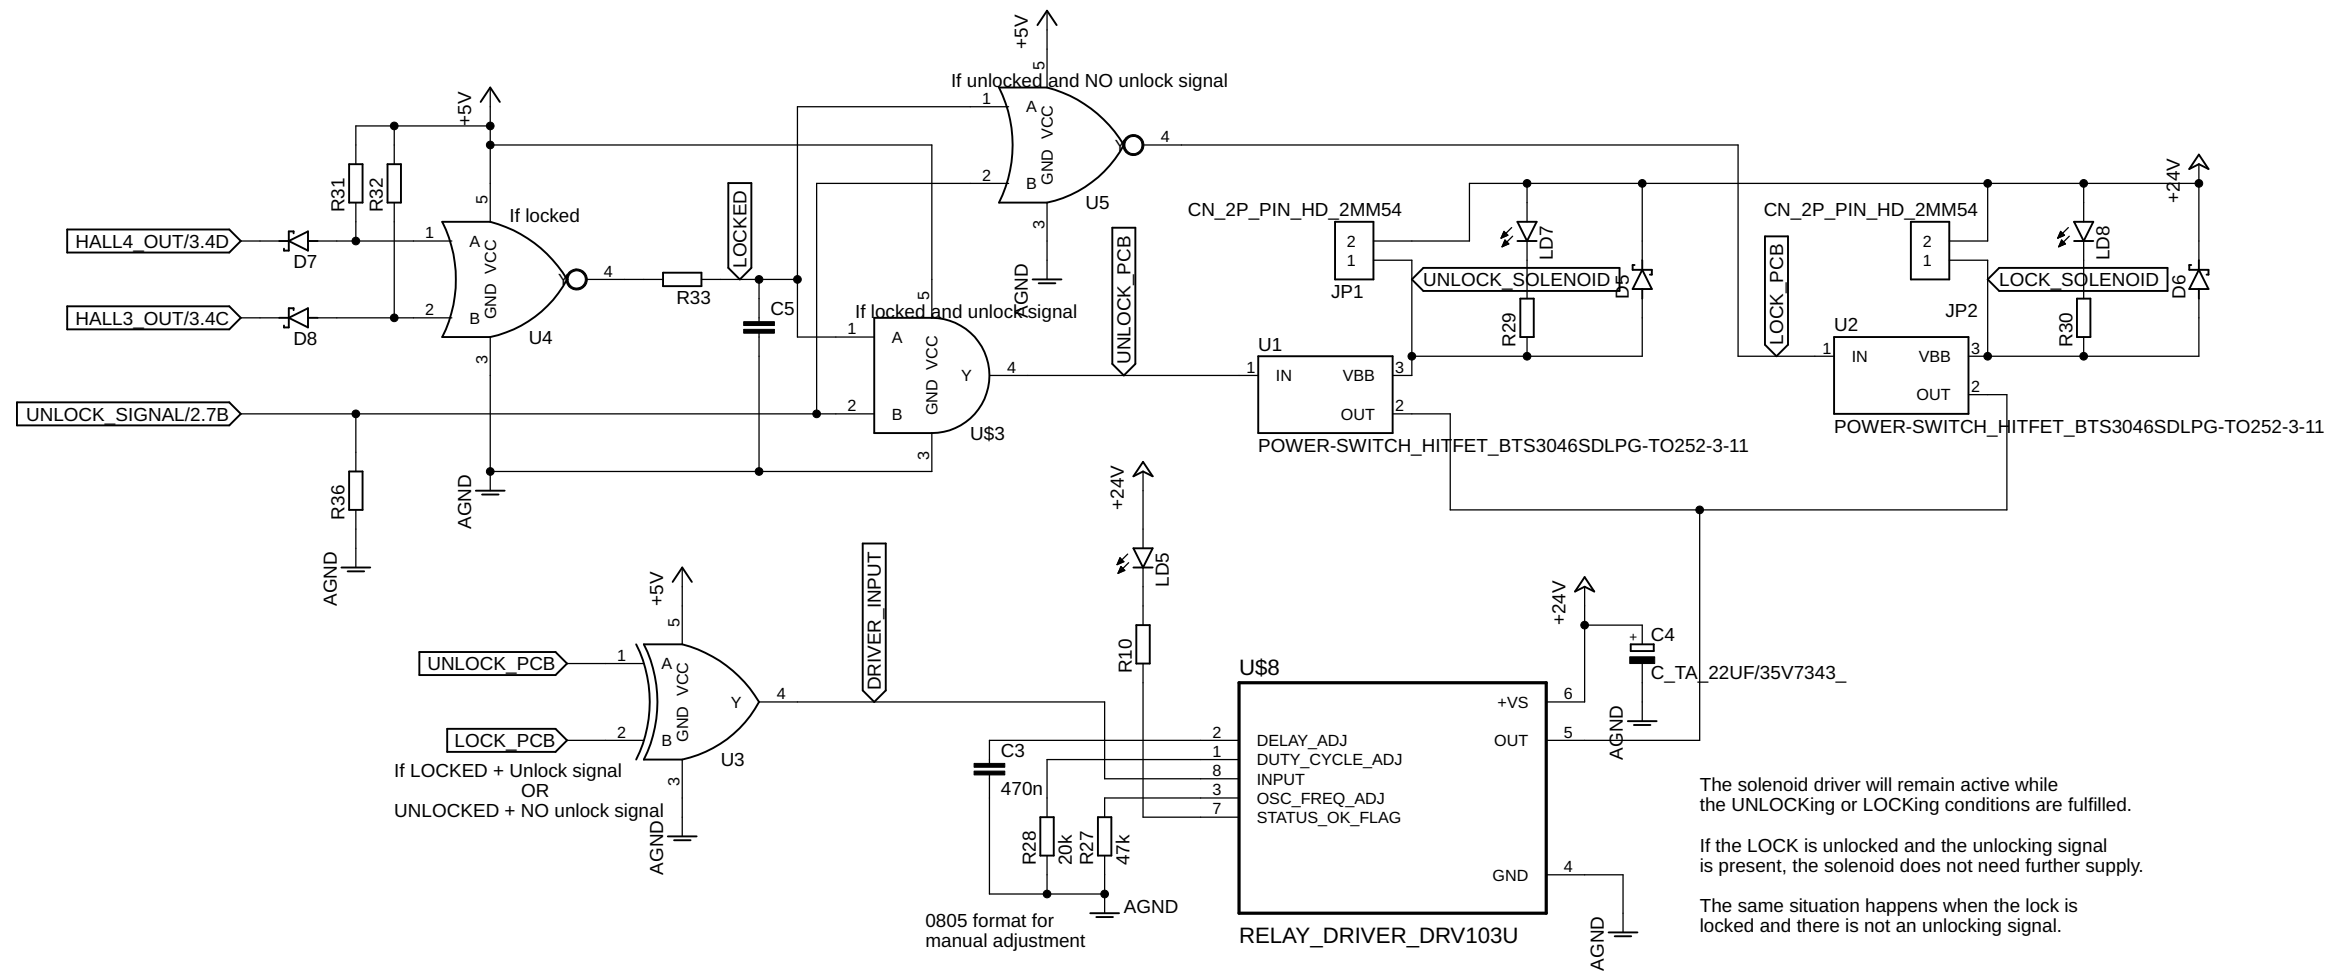

The solenoid driver will remain active while the UNLOCKing or LOCKing conditions are fulfilled.

If the LOCK is unlocked and the unlocking signal is present, the solenoid does not need further supply.

The same situation happens when the lock is locked and there is not an unlocking signal.