



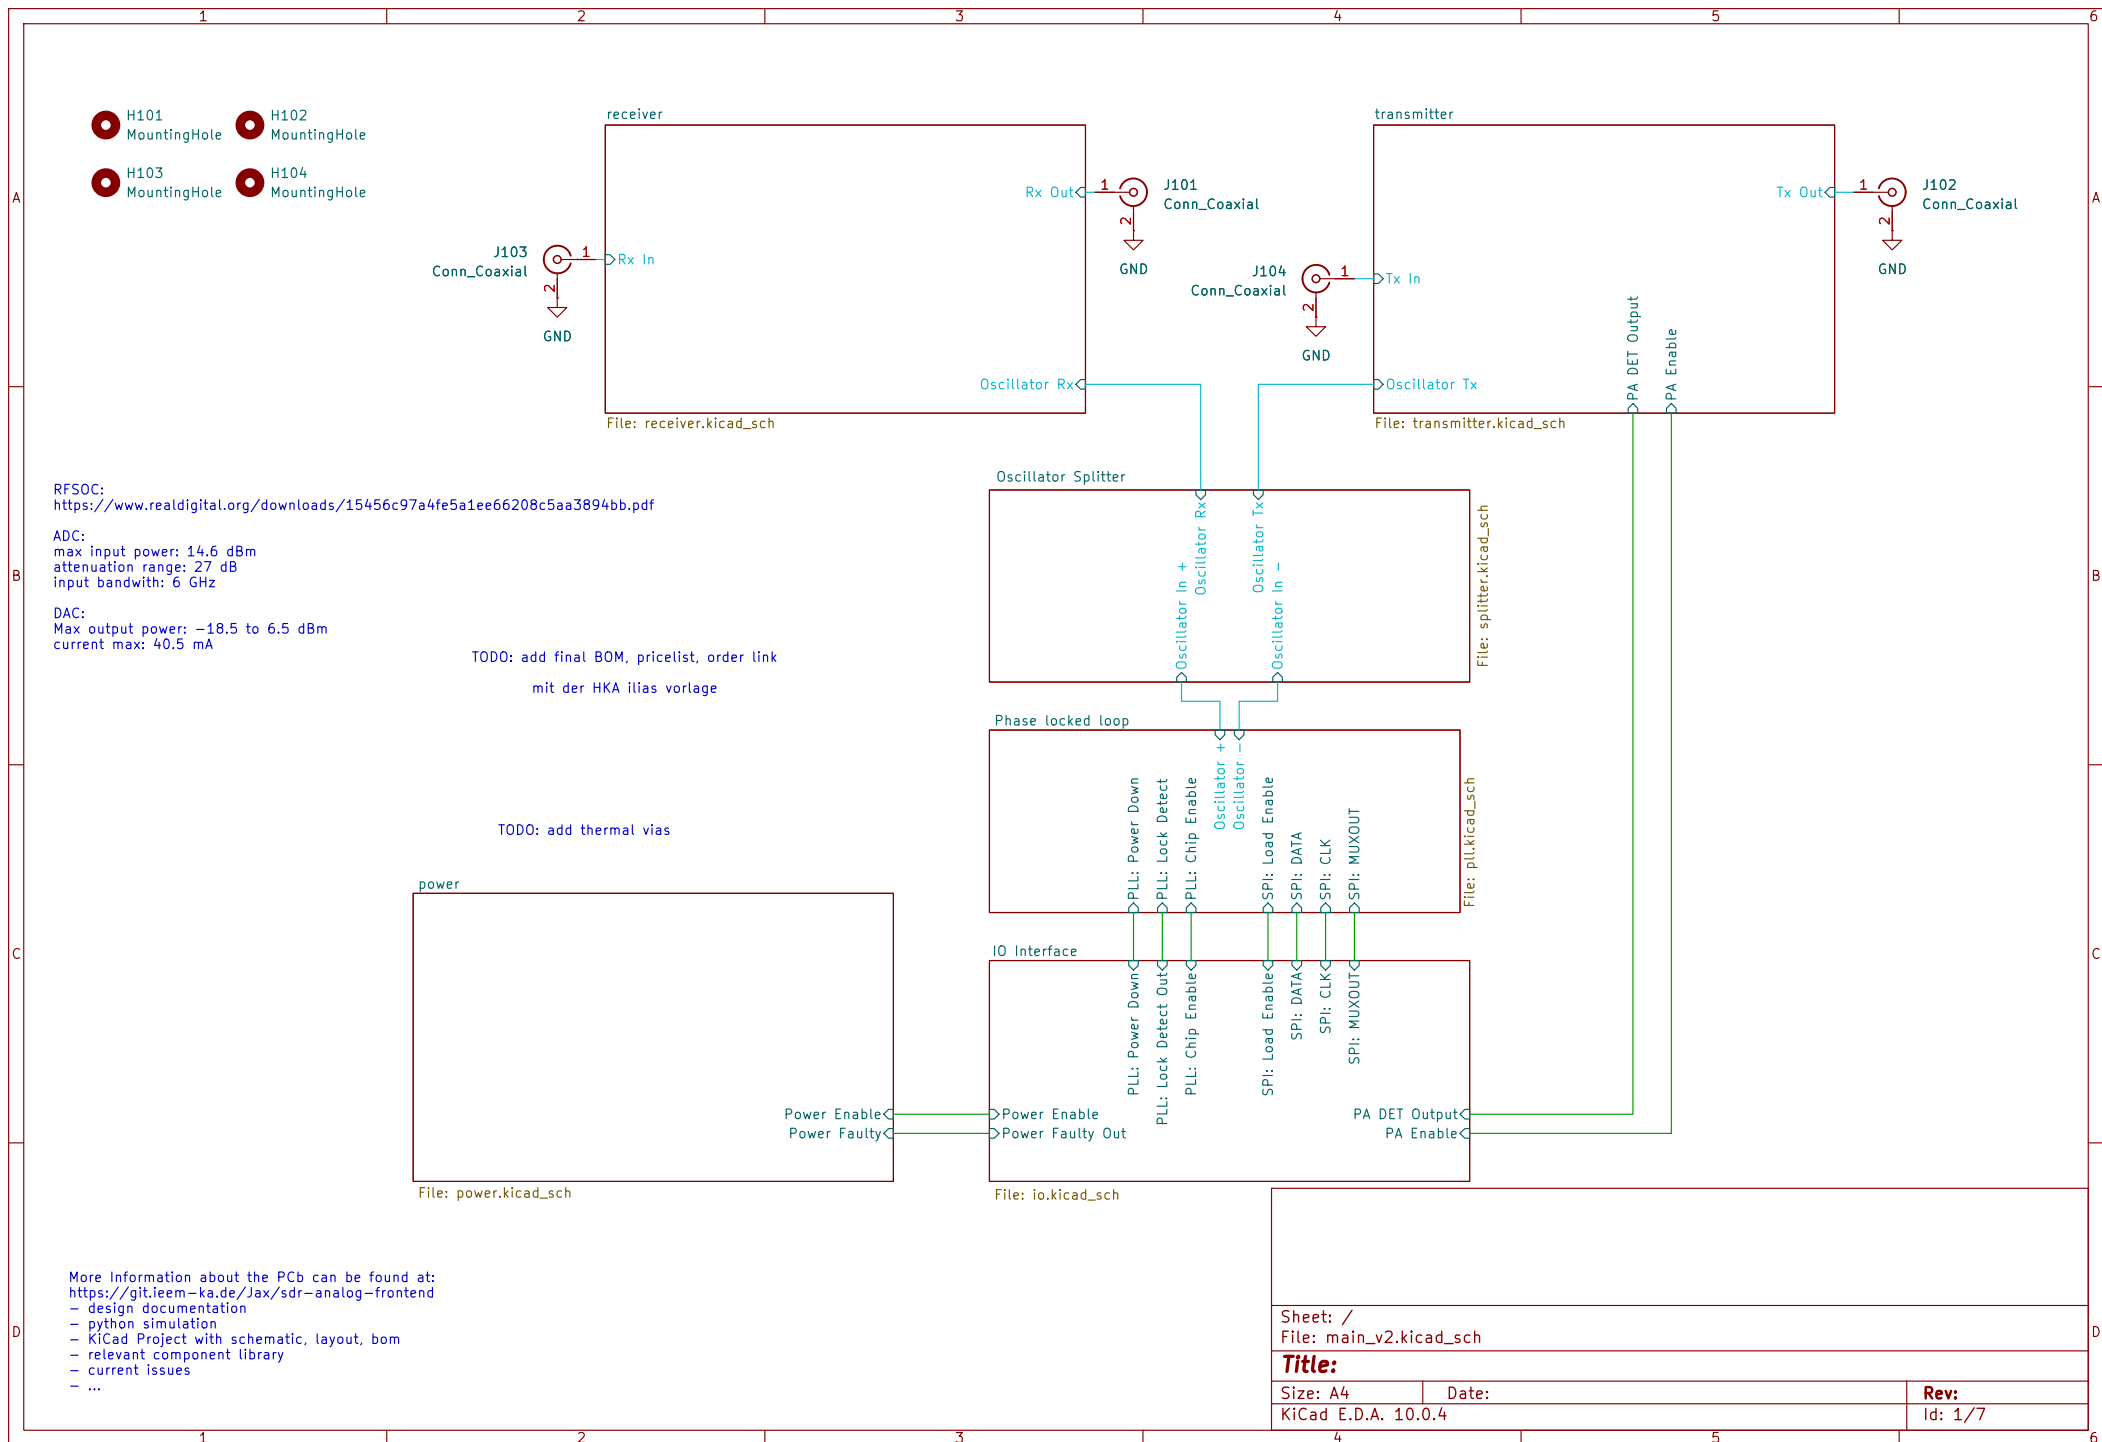

Place close together!

5V Input Voltage

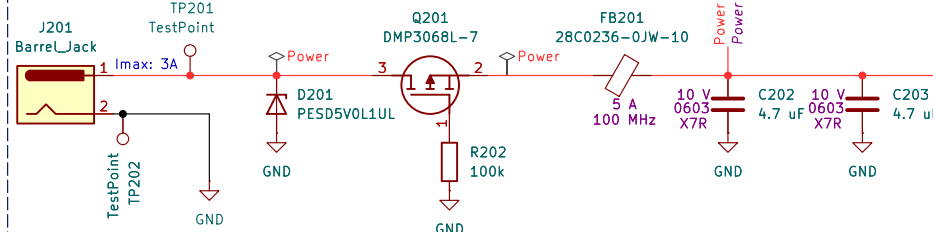


ESD Protection Reverse Polarity Protection Noise Reduction

Power In

Place close together!

Load Management

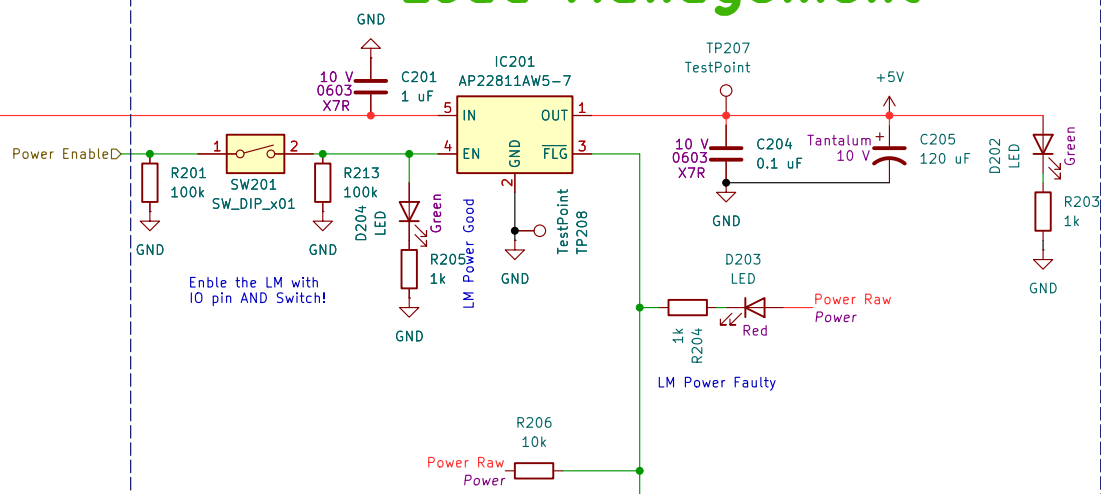

Enable the LM with IO pin AND Switch!


LM Power Good

LM Power Faulty

Place close together!

Place Thermal Vias for Heat Dissipation!

3.3V LDO

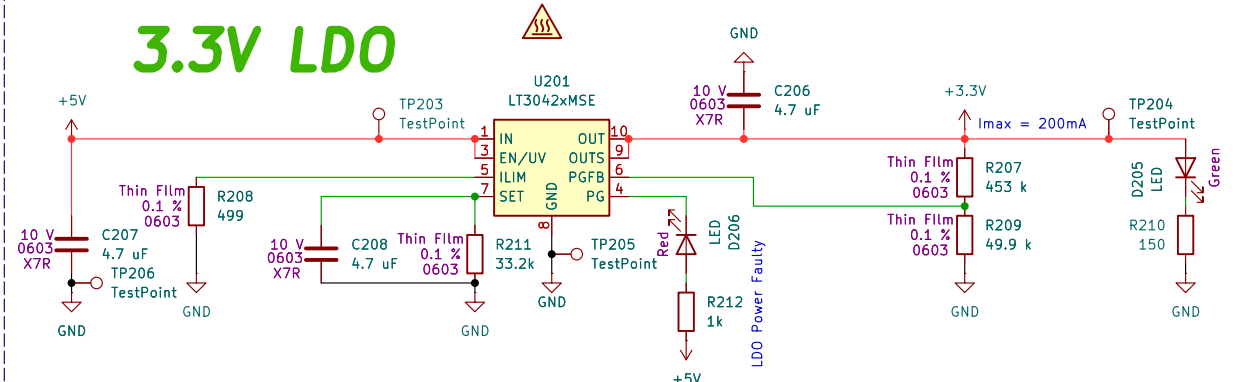

From Simulation:

5.0 V
typ 0.65 A
max 0.81 A

3.3 V
typ 0.13 A
max 0.18 A
heat: 1.7 V * 0.13 A = 221 mW

Total
typ 0.78 A
max 0.99 A

Sheet: /power/
File: power.kicad_sch

Title:


Size: A4


Date:

KiCad E.D.A. 10.0.4

Rev:

Id: 2/7

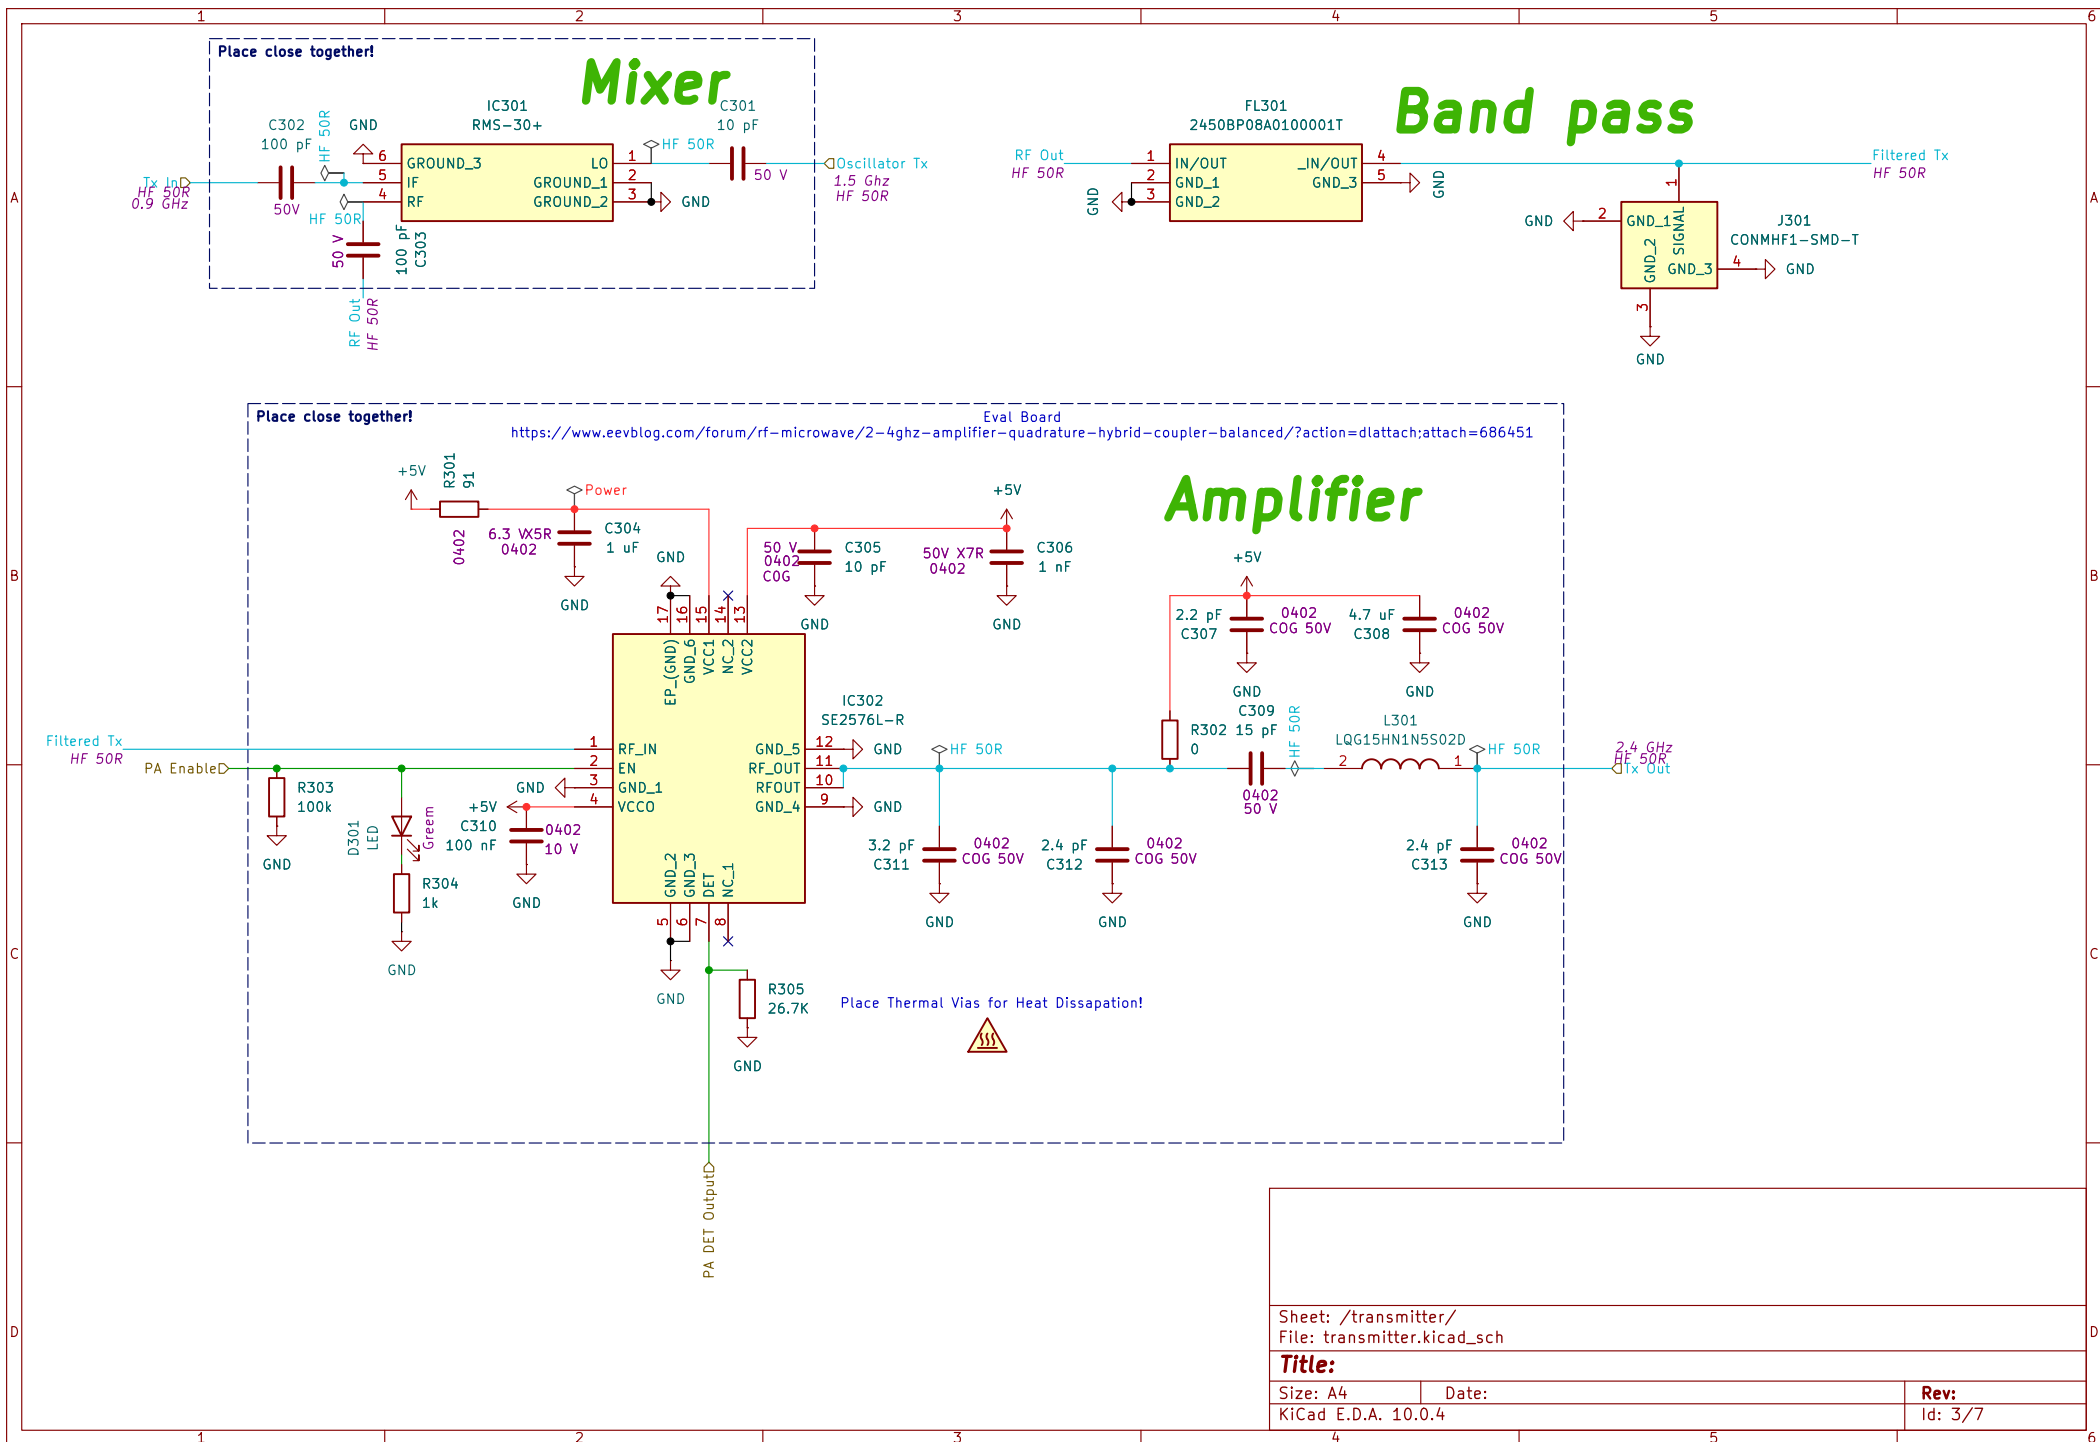

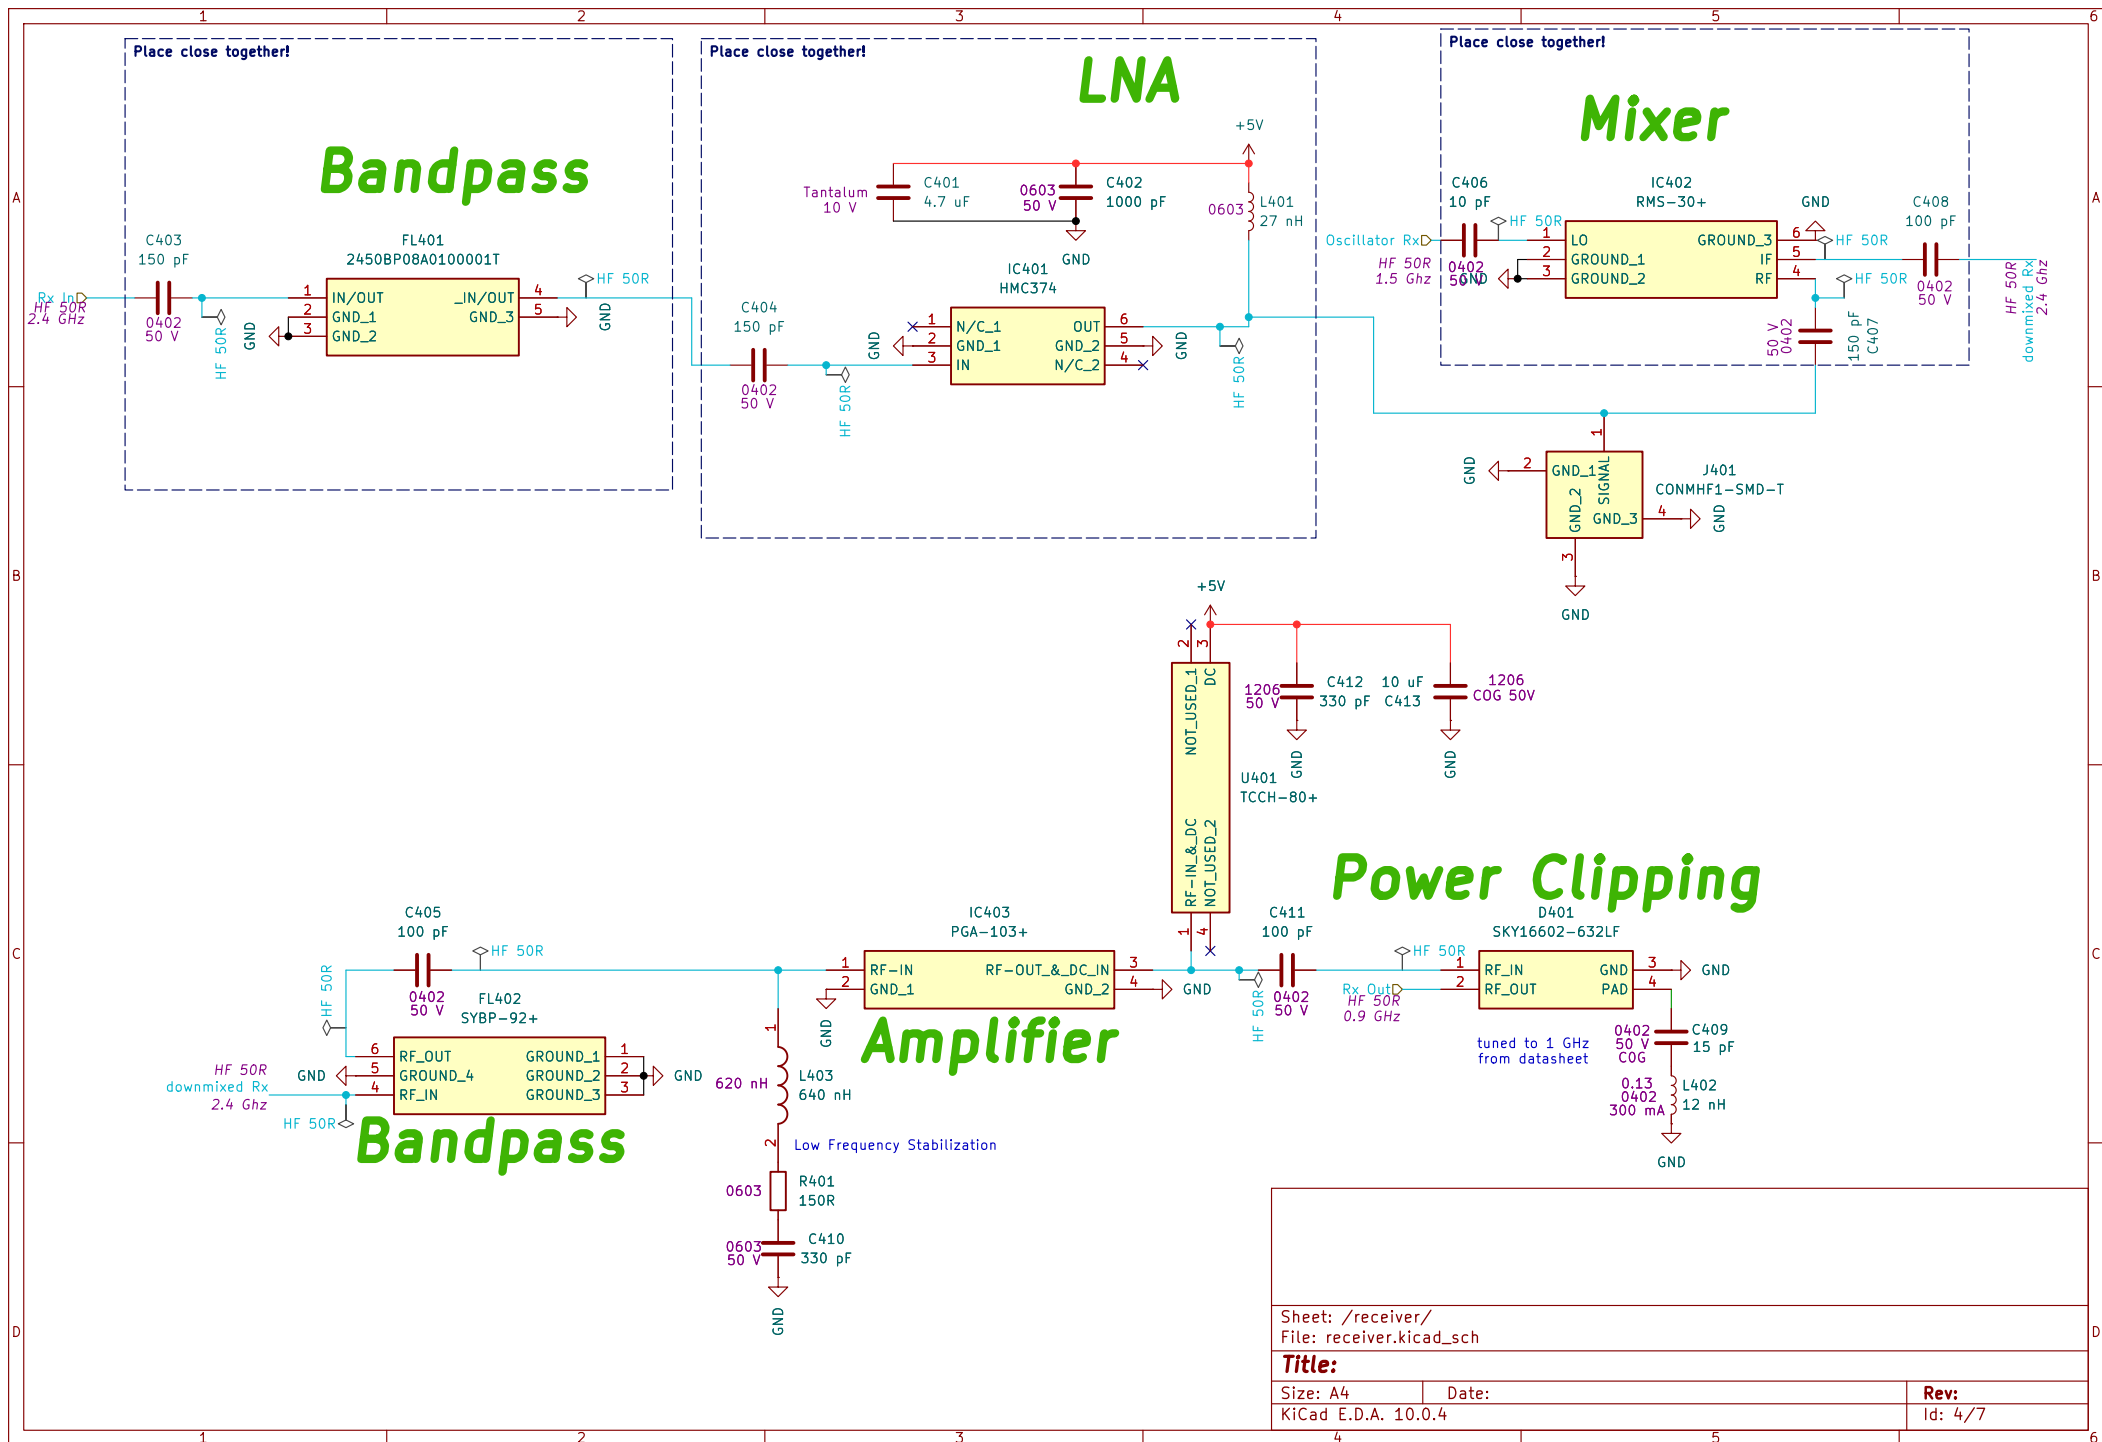

Place close together!

Place Thermal Vias for Heat Dissipation!




Select Default Behavior on Startup. Low Signal means Device is off.

High Signal enables Data loading

SPI: CLKD
SPI: DATAD
SPI: Load Enabled

PLL: Chip Enabled
PLL: Power DownD

TCXO
HF 50R
26 Mhz

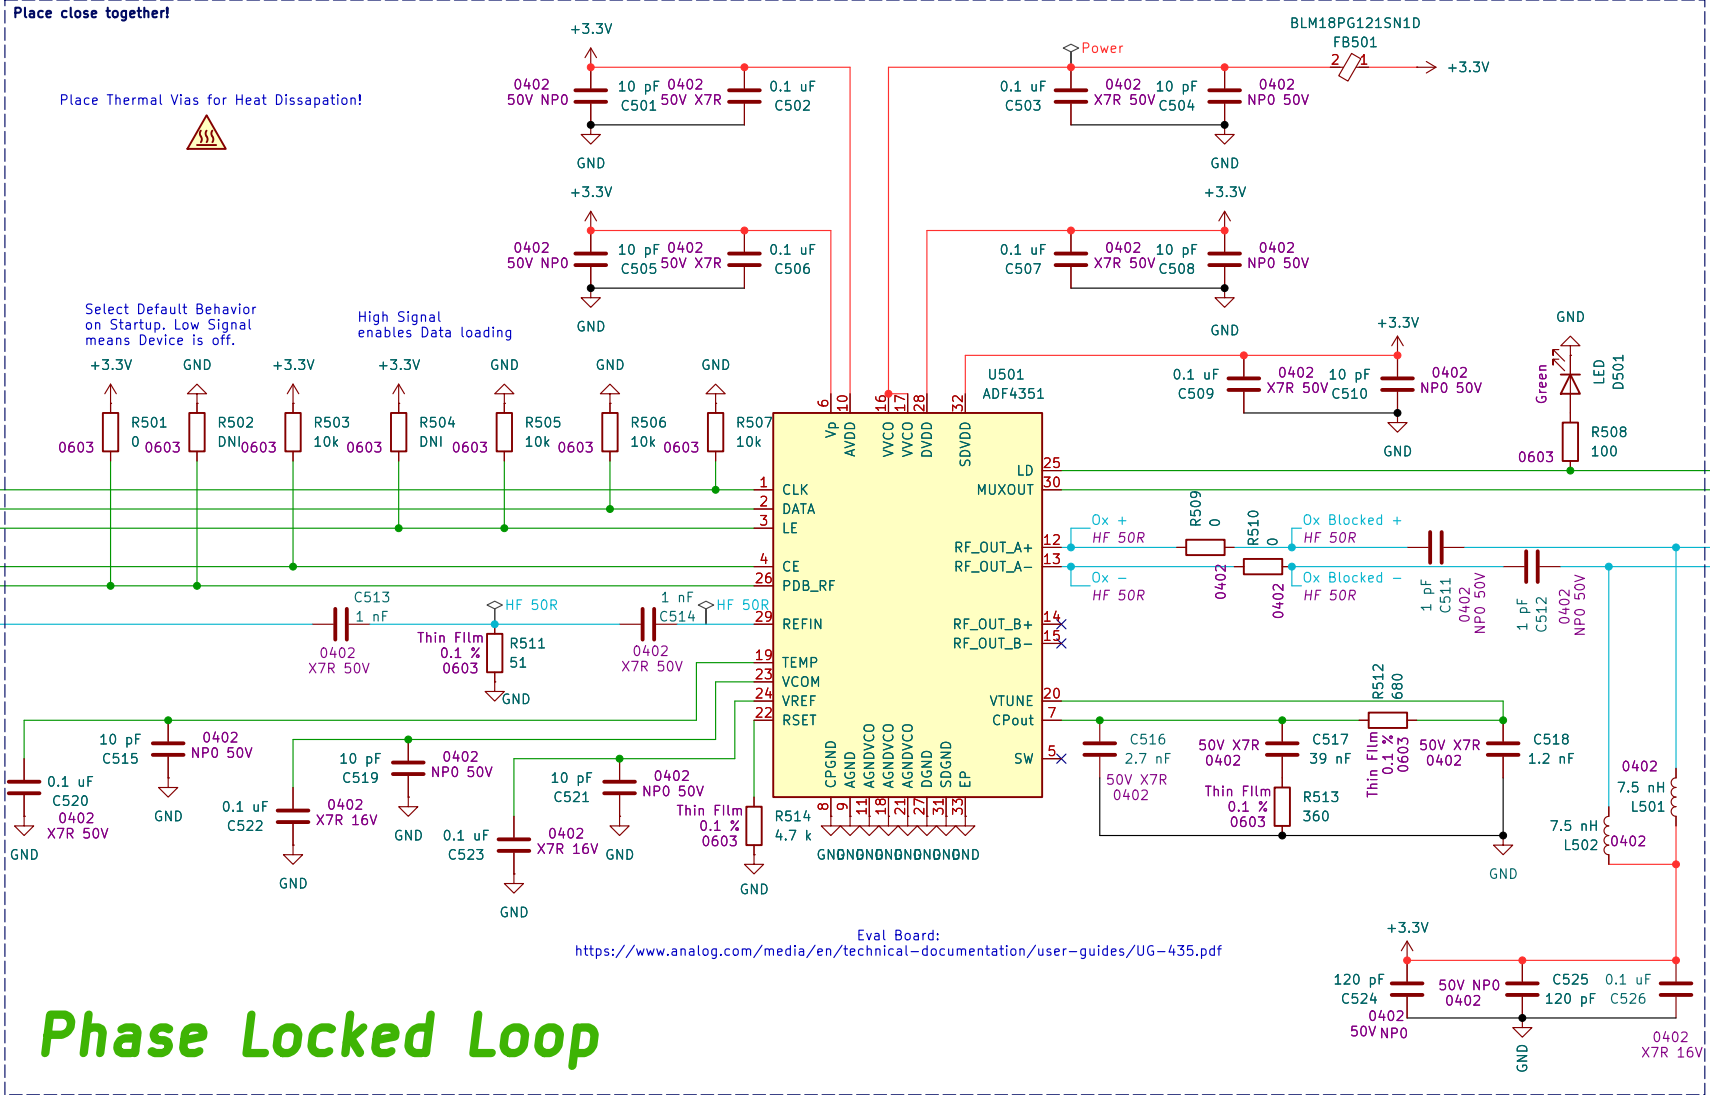


Eval Board:
<https://www.analog.com/media/en/technical-documentation/user-guides/UG-435.pdf>

Phase Locked Loop

Place close together!

TCXO

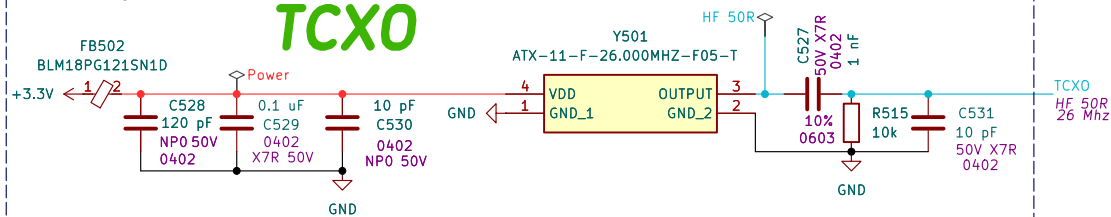

Sheet: /Phase locked loop/
File: pll.kicad_sch

Title:

Size: A4

KiCad E.D.A. 10.0.4


Date:

Rev:

Id: 5/7


Low Pass Filter

Balun 1:2

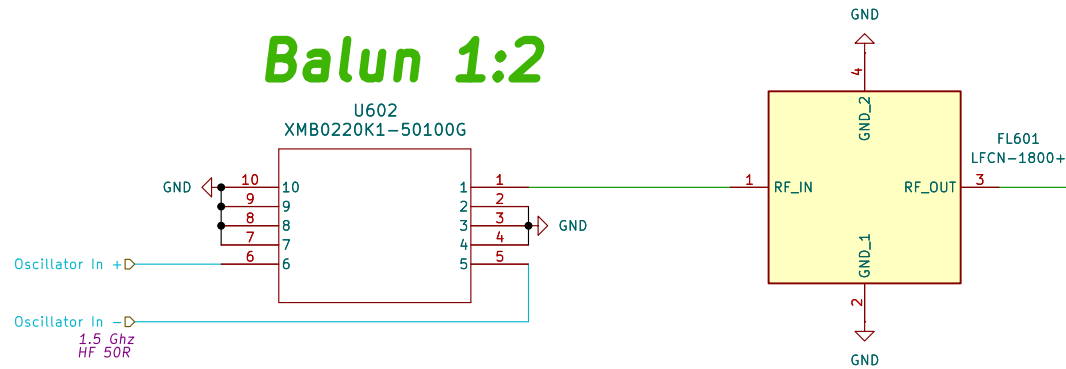

Place close together!


Power Splitter

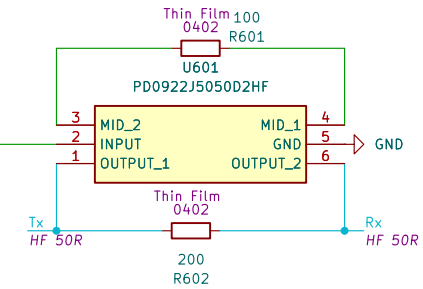

Place close together!

Amplifier Tx


https://www.minicircuits.com/pcb/WTB-653+_P02.pdf

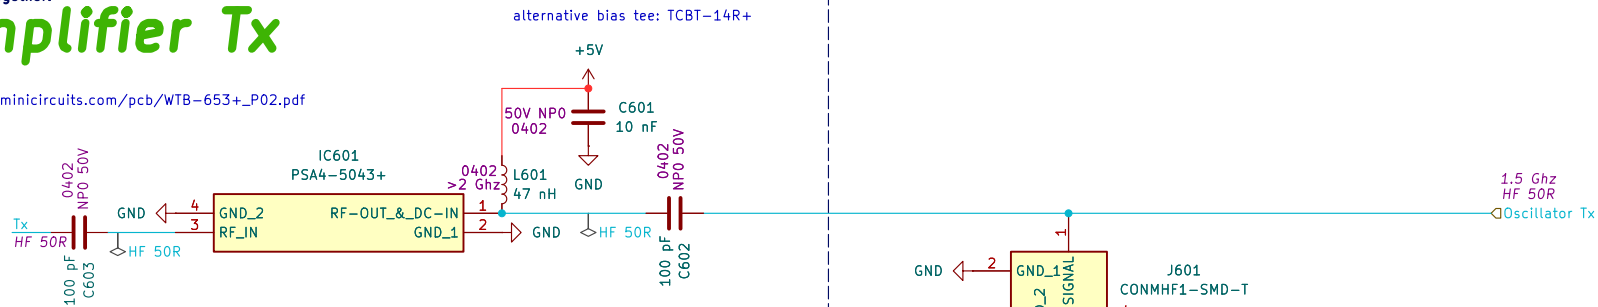

Place close together!

Amplifier Rx

https://www.minicircuits.com/pcb/WTB-653+_P02.pdf

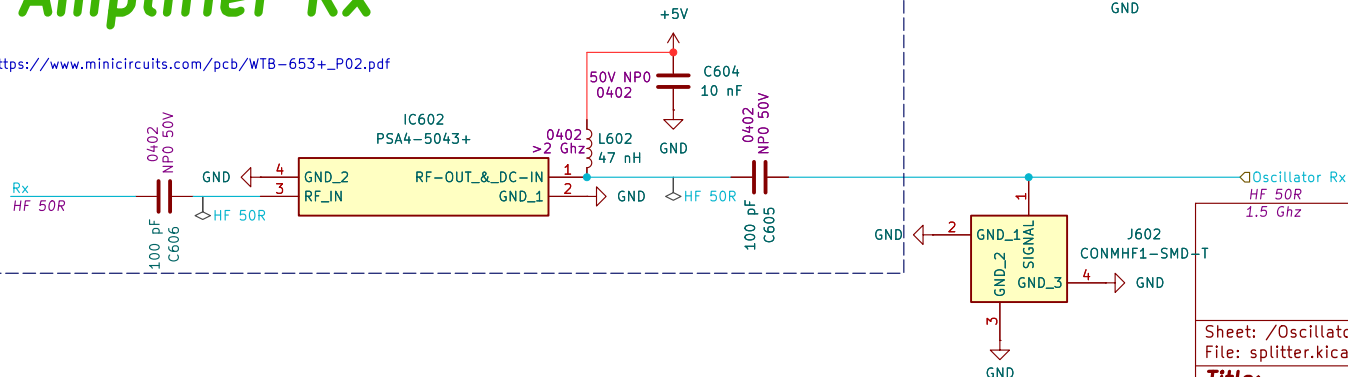

Sheet: /Oscillator Splitter/
File: splitter.kicad_sch

Title:



Size: A4

Date:

KiCad E.D.A. 10.0.4

Rev:

Id: 6/7

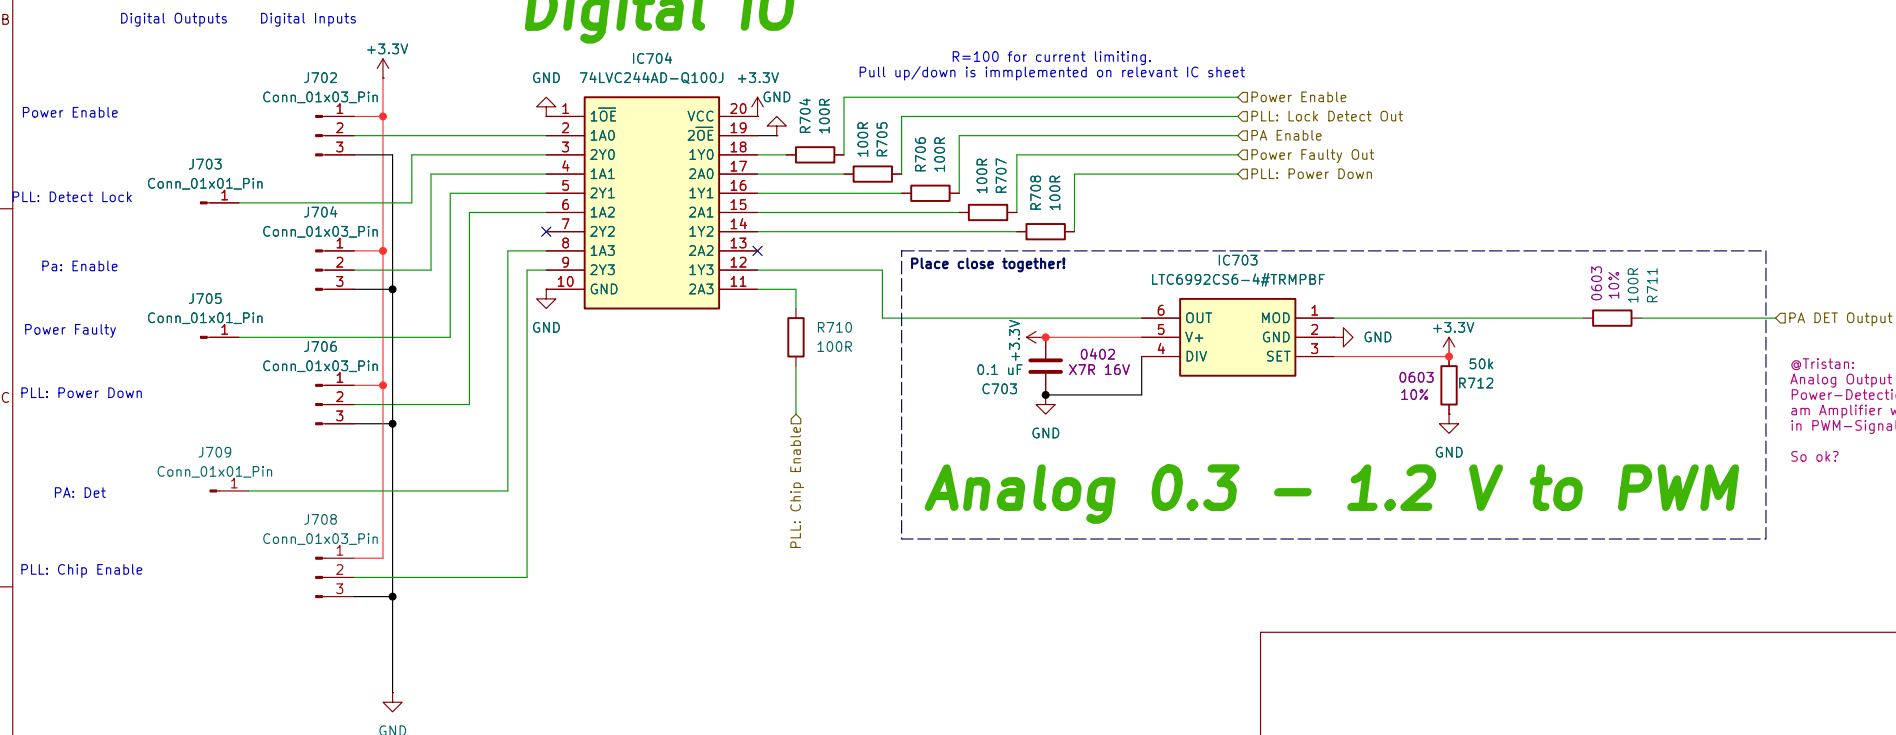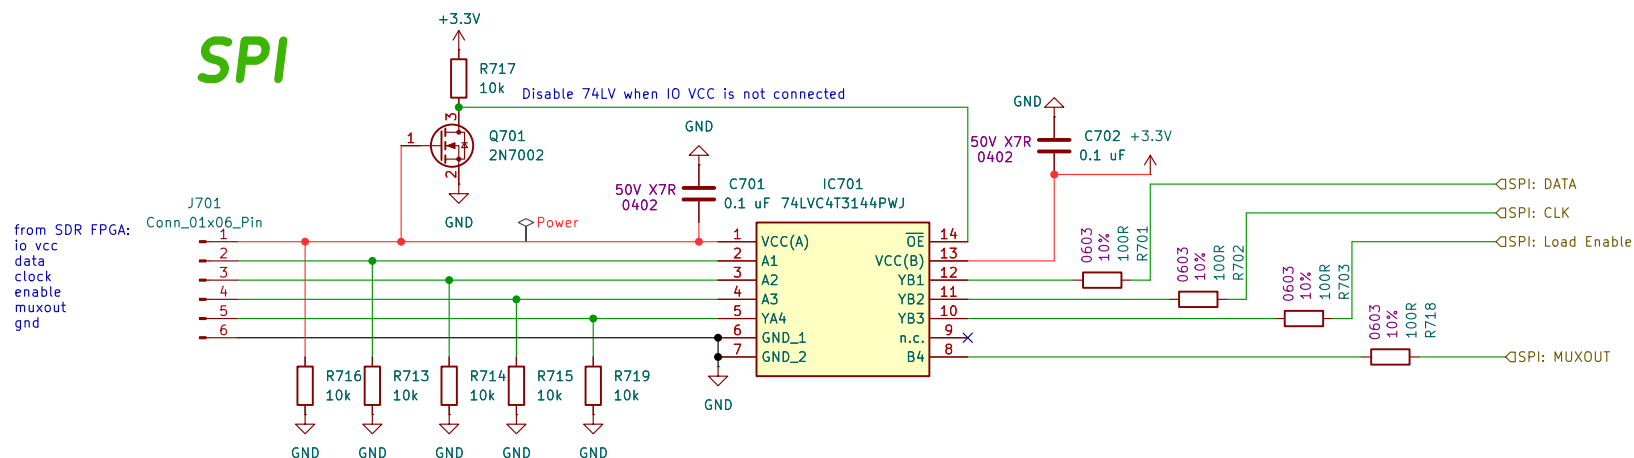

Analog 0.3 – 1.2 V to PWM

@Tristan:
Analog Output des
Power-Detection-Pins
am Amplifier wird
in PWM-Signal gewandelt.
So ok?