



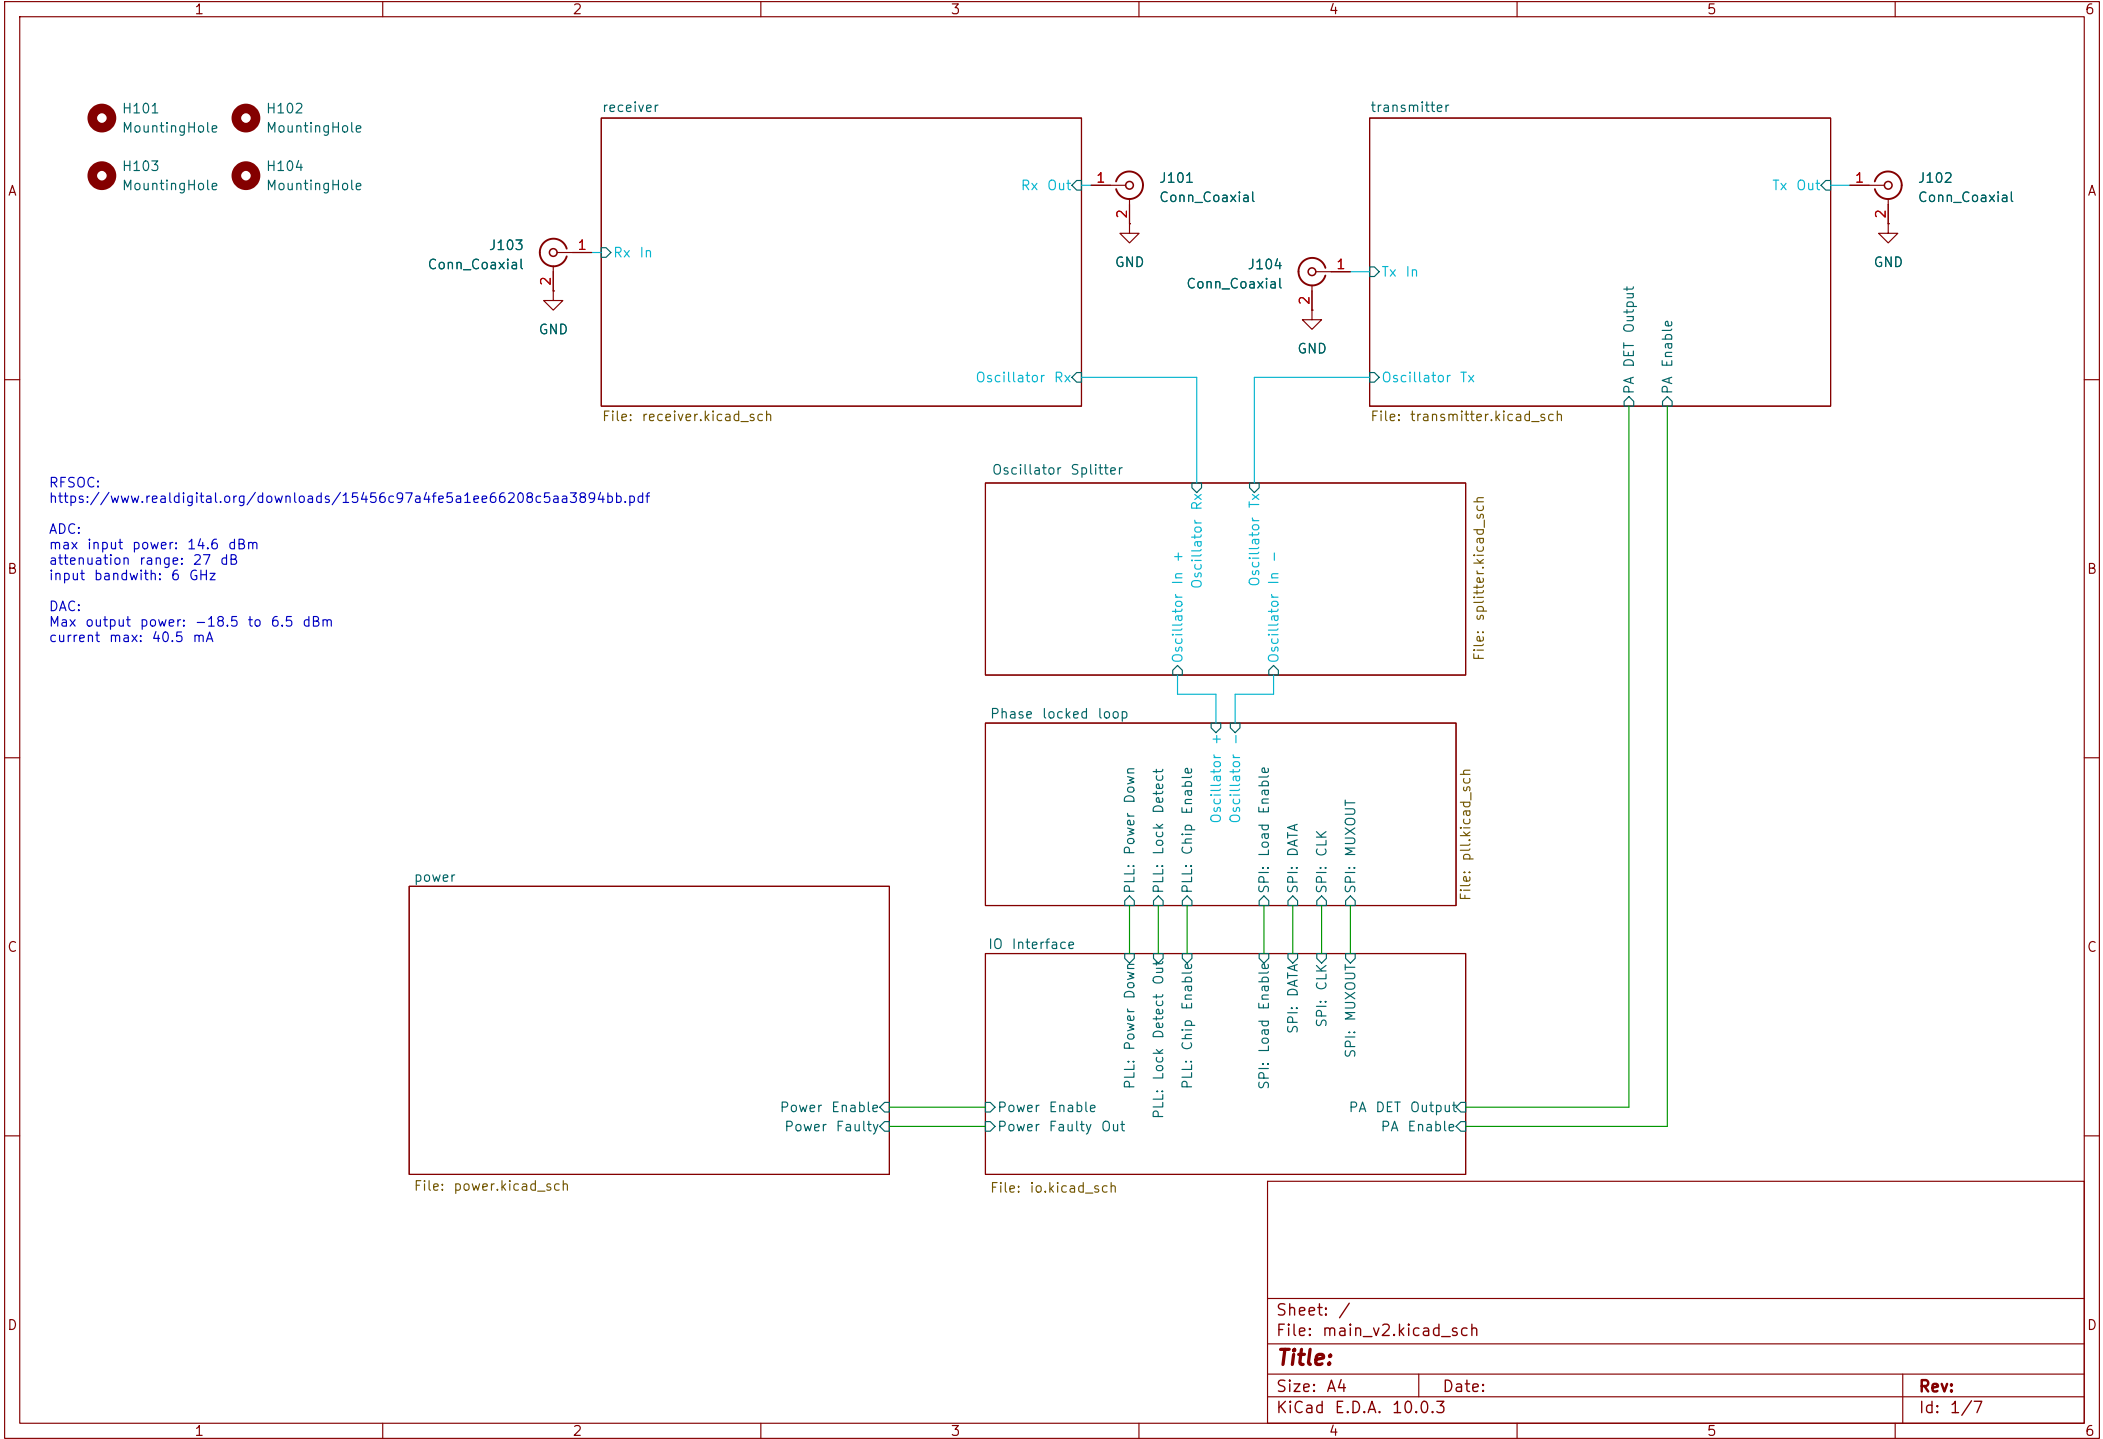

Place close together!


Power In

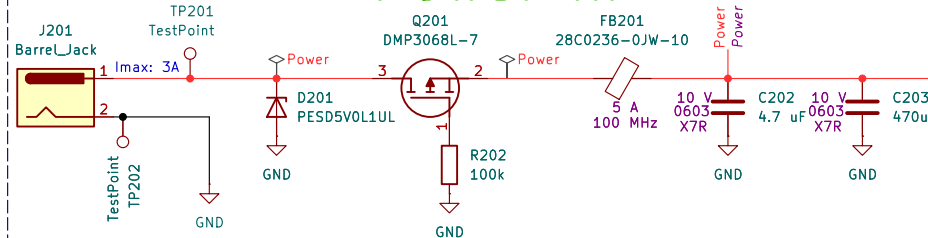

ESD Protection Reverse Polarity Protection Noise Reduction

Place close together!

Load Management

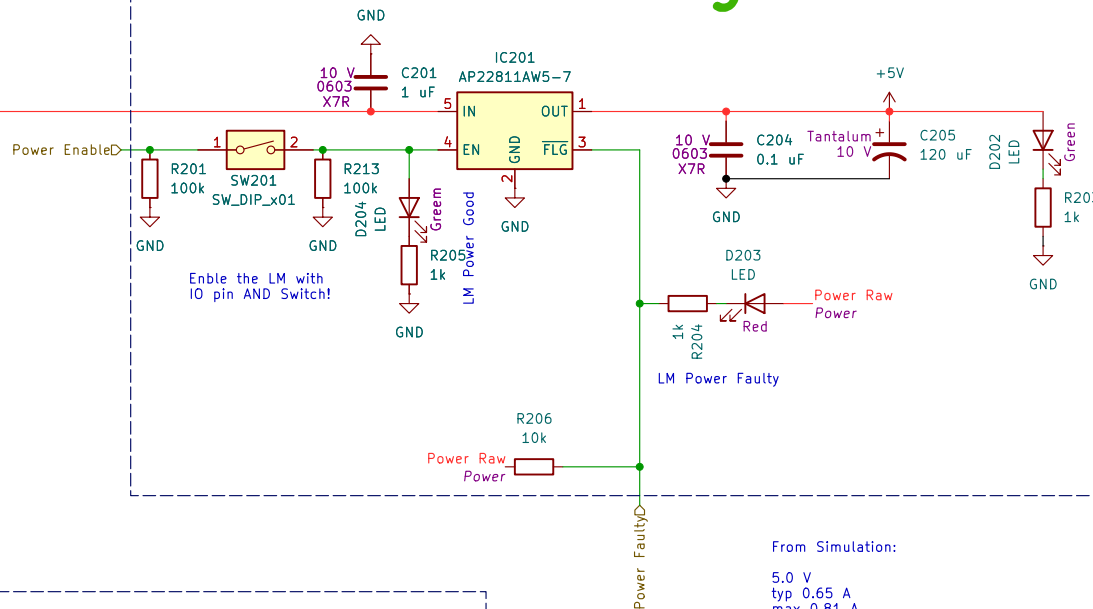

From Simulation:

5.0 V
typ 0.65 A
max 0.81 A


3.3 V
typ 0.13 A
max 0.18 A
heat: 1.7 V * 0.13 A = 221 mW

Total
typ 0.78 A
max 0.99 A

Place close together!

Place Thermal Vias for Heat Dissipation!

3.3V LDO

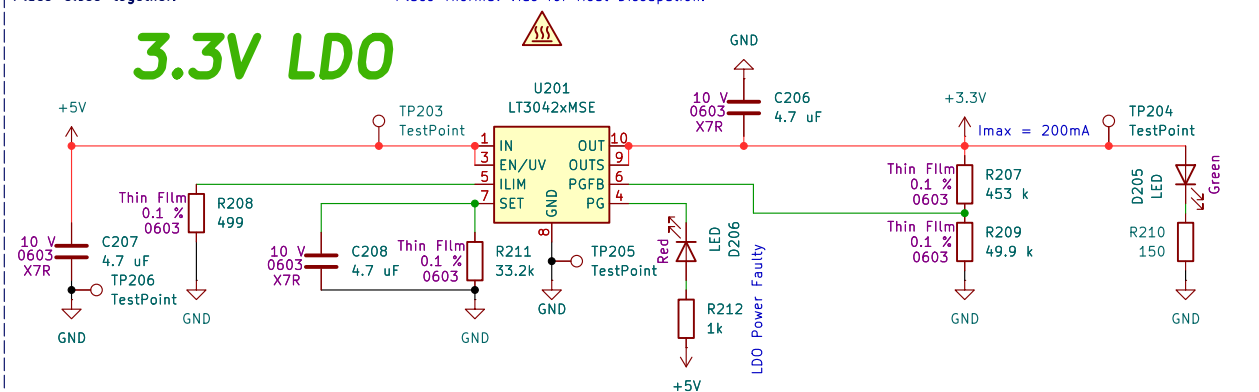

Sheet: /power/
File: power.kicad_sch


Title:


Size: A4
KiCad E.D.A. 10.0.3

Date:


Rev:

Id: 2/7

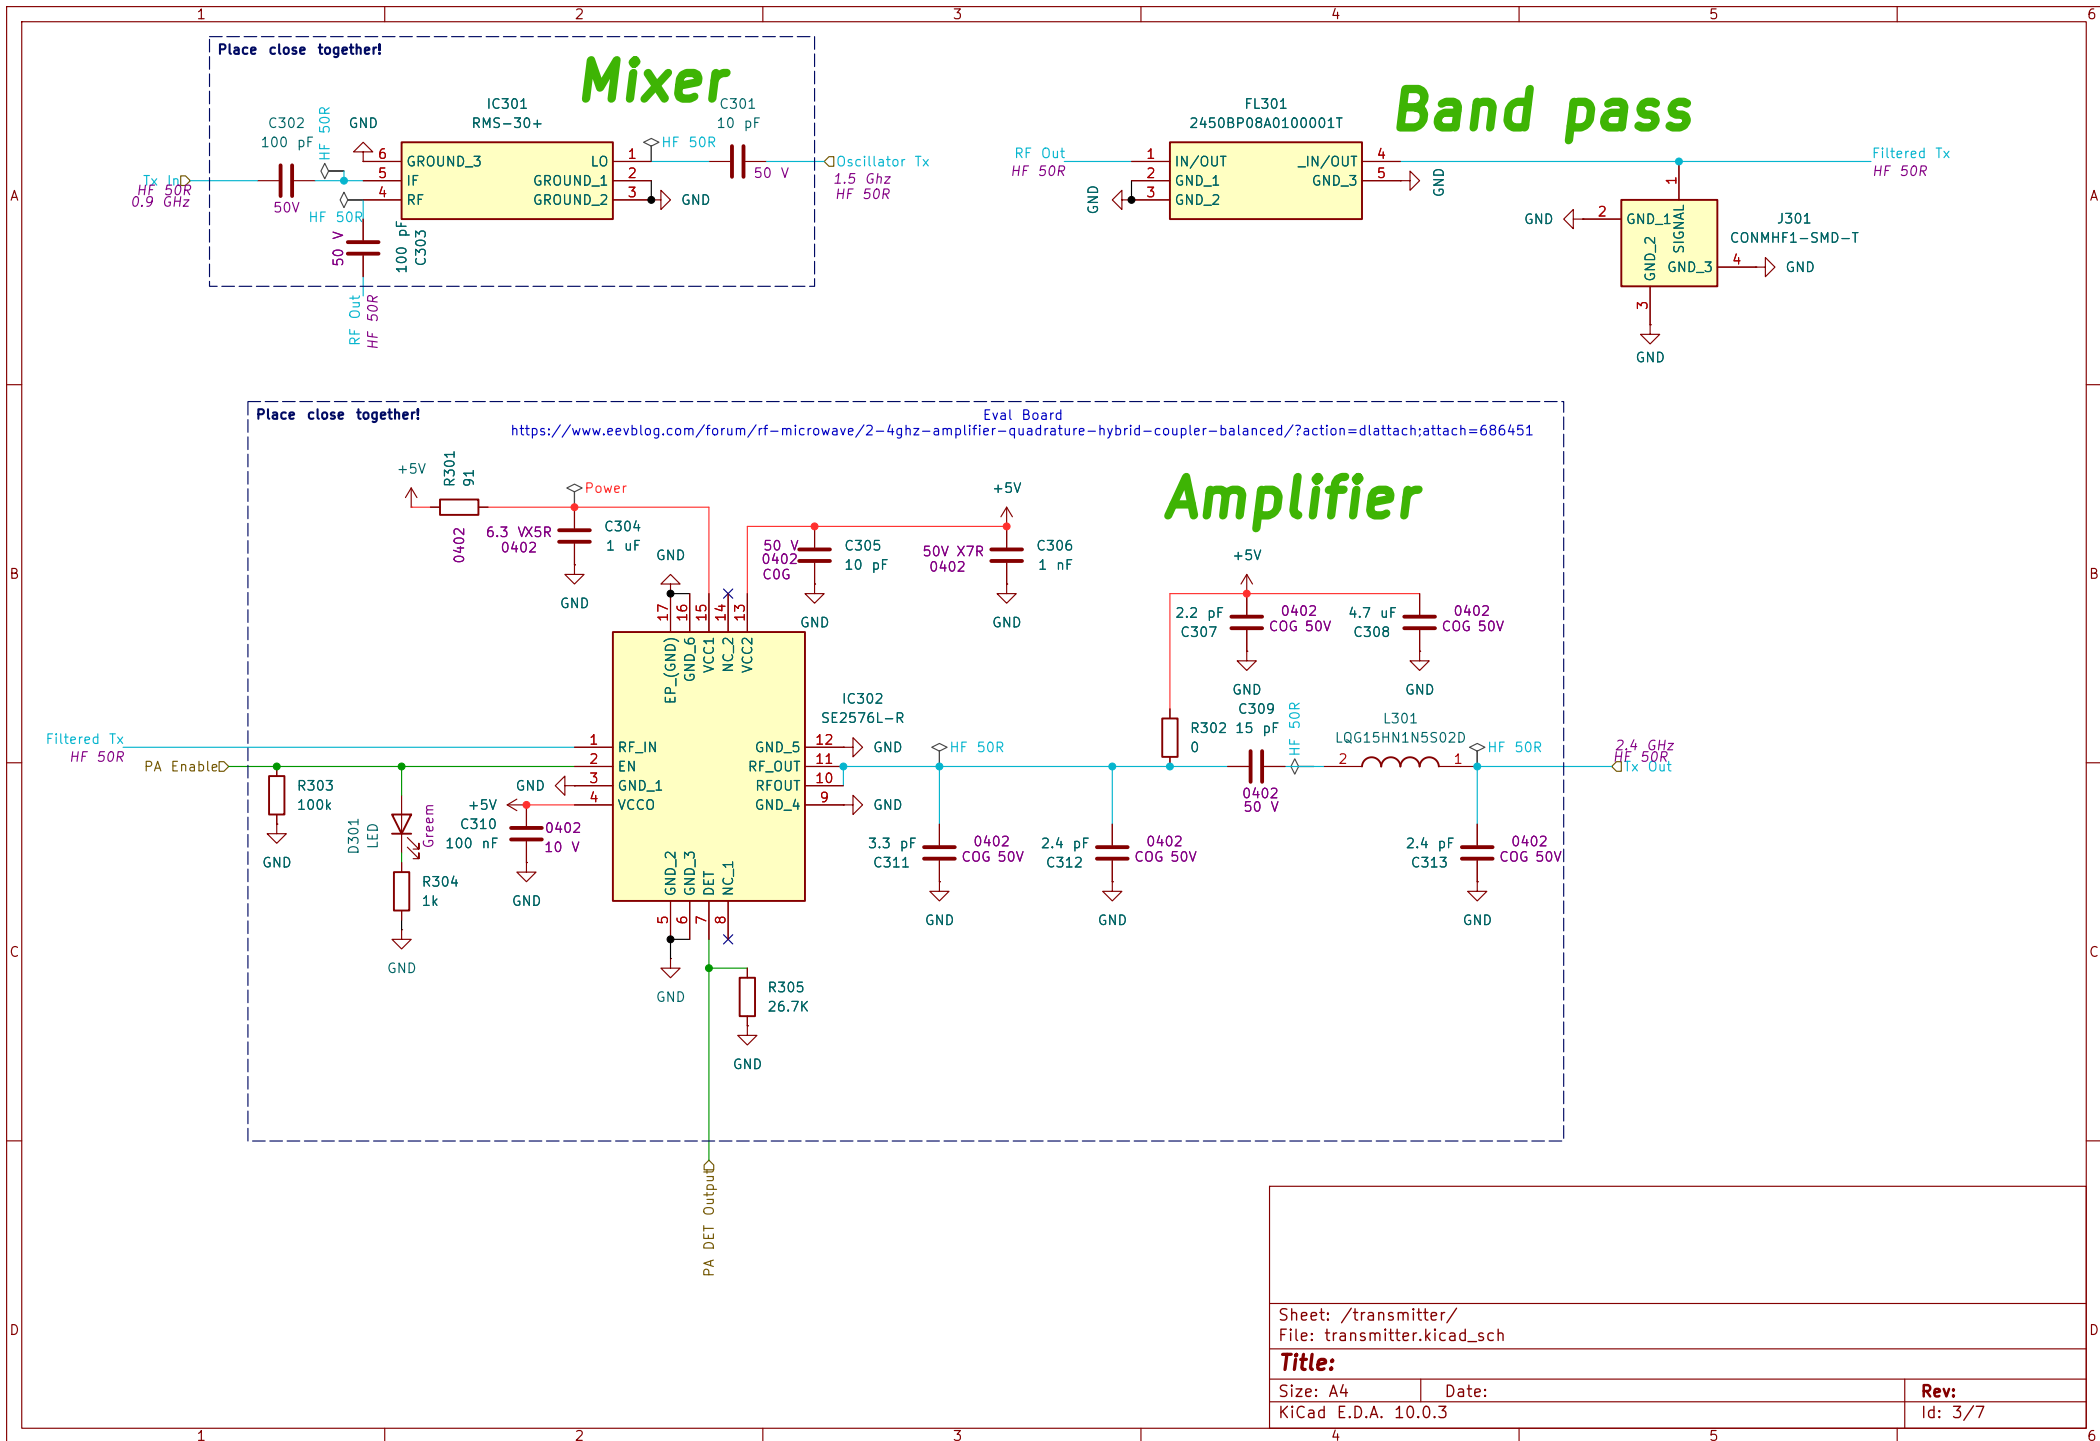

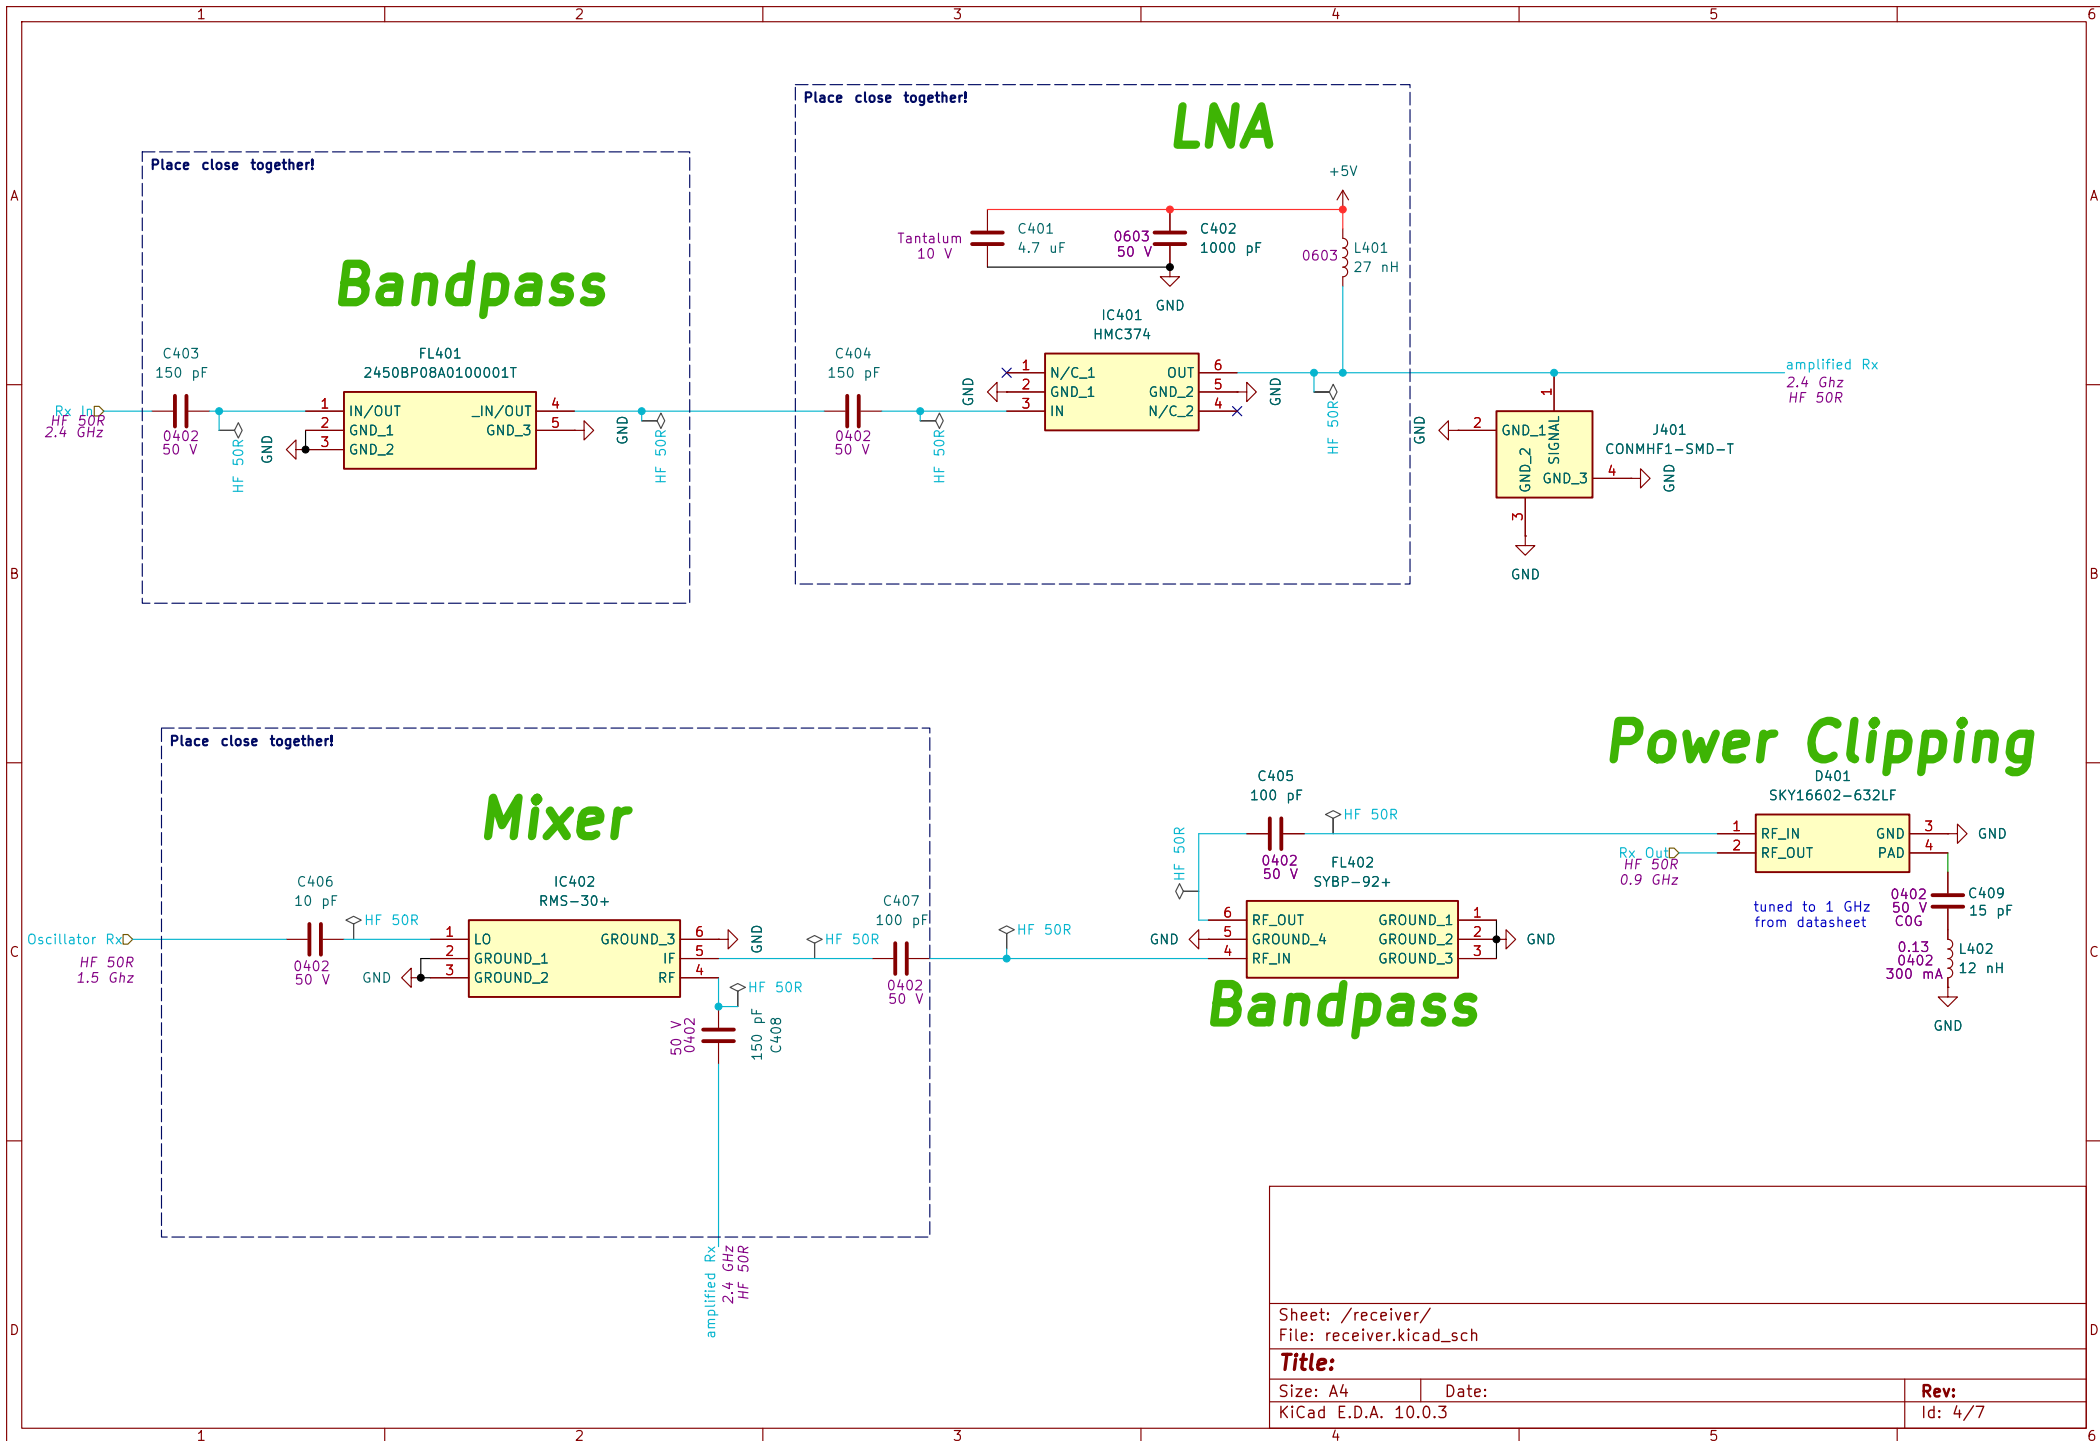


Place close together!

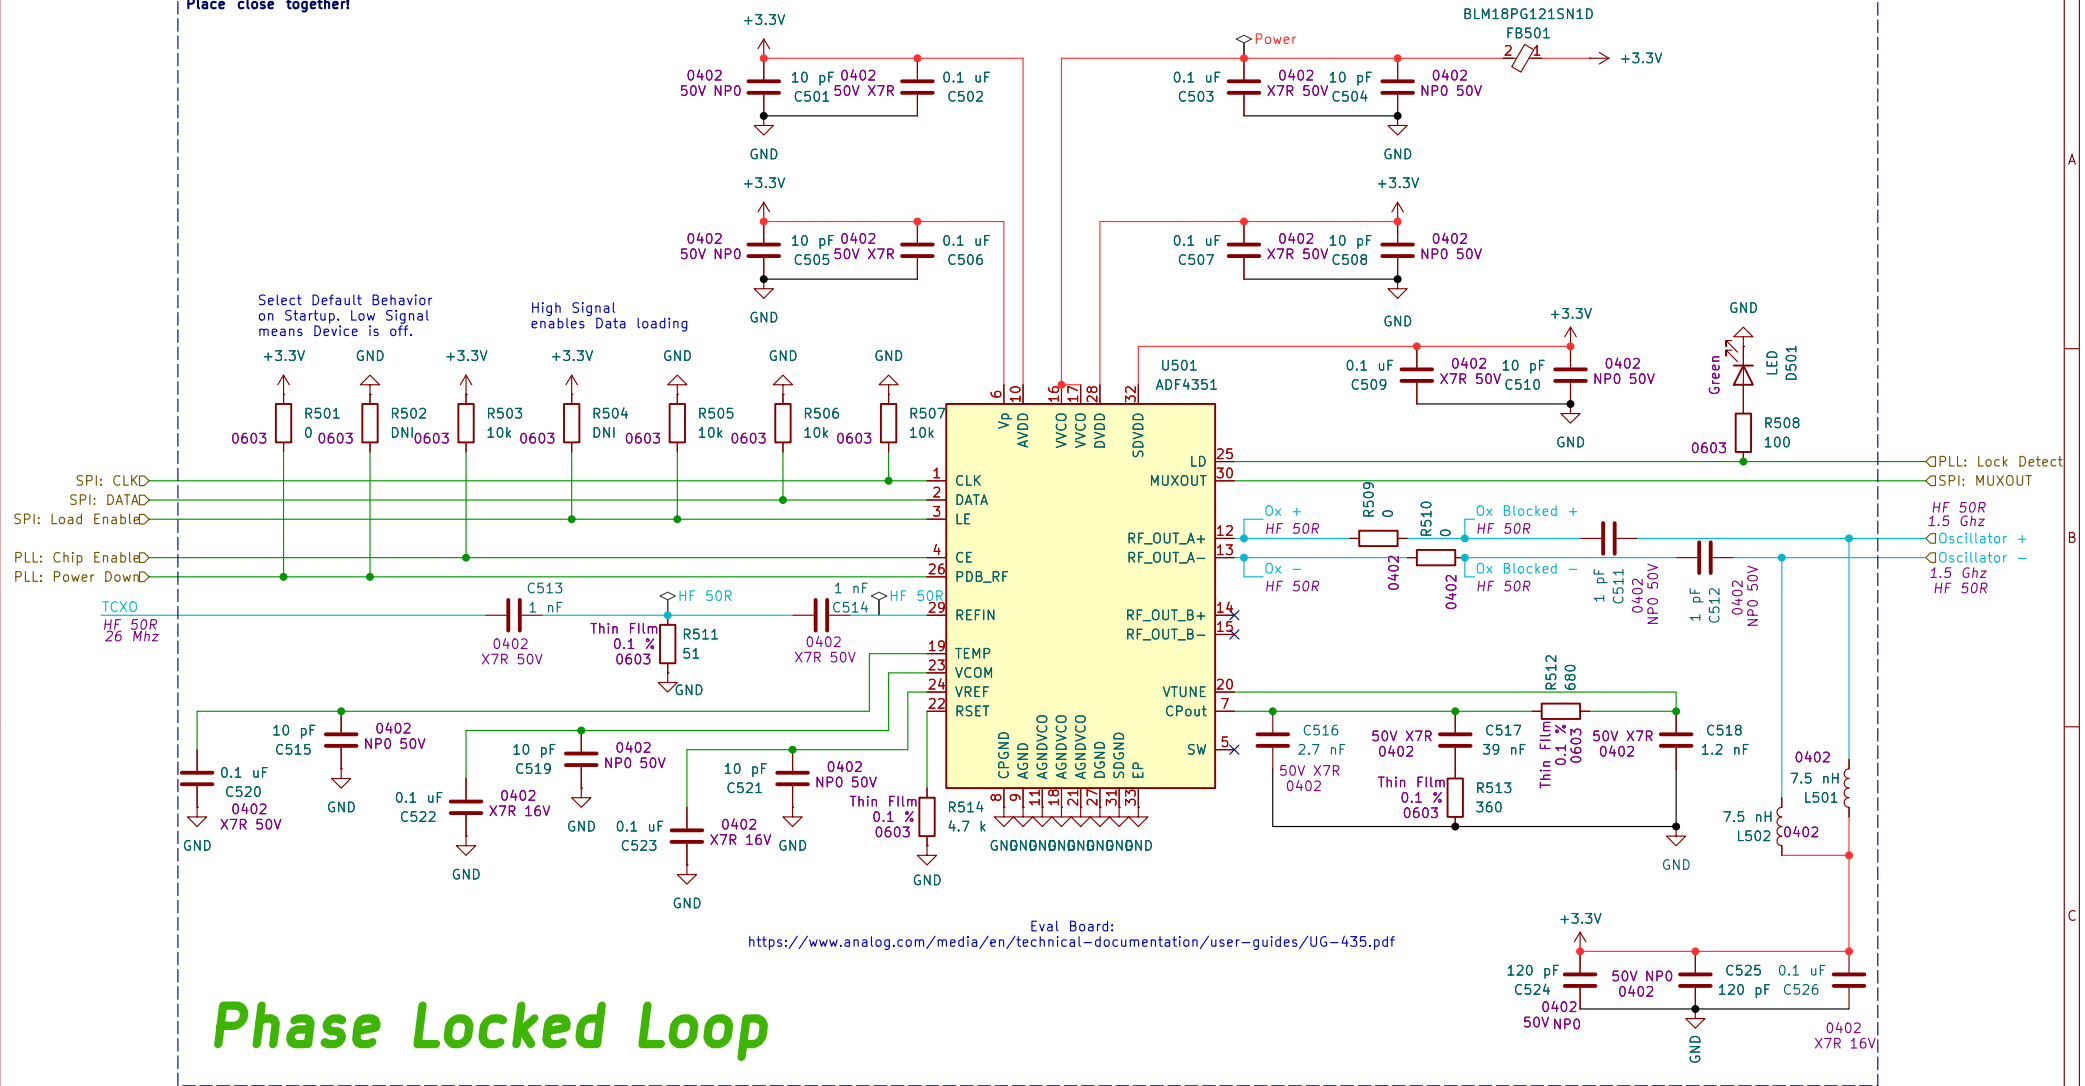

Phase Locked Loop

Place close together!

TCXO

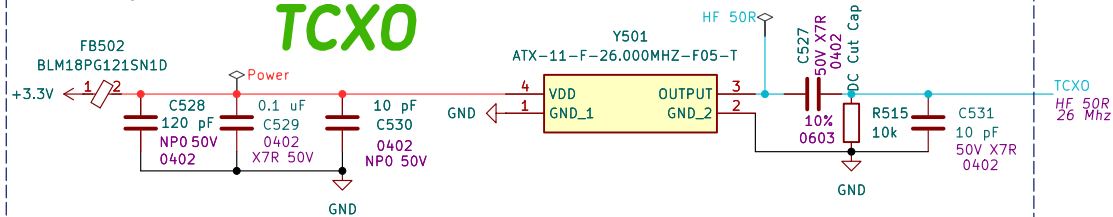

Sheet: /Phase locked loop/
 File: pll.kicad_sch

Title:

Size: A4

Date:


KiCad E.D.A. 10.0.3

Rev:

Id: 5/7


Low Pass Filter

Balun 1:2

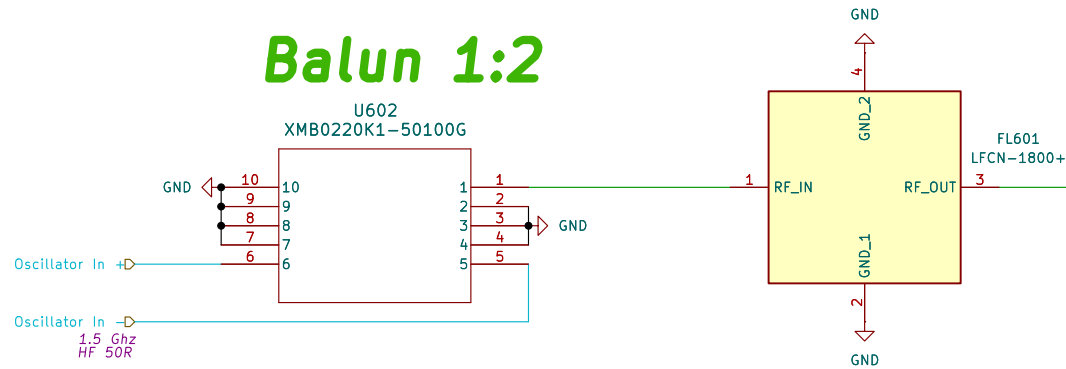

Place close together!


Power Splitter

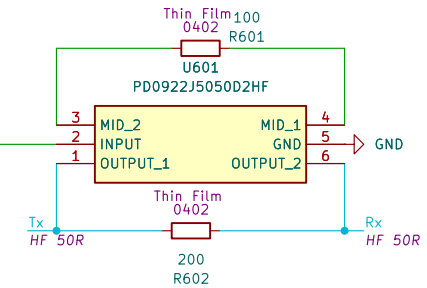

Place close together!

Amplifier Tx


https://www.minicircuits.com/pcb/WTB-653+_P02.pdf

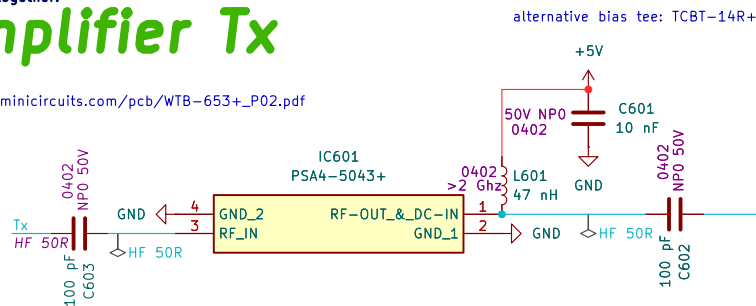

Place close together!

Amplifier Rx

https://www.minicircuits.com/pcb/WTB-653+_P02.pdf

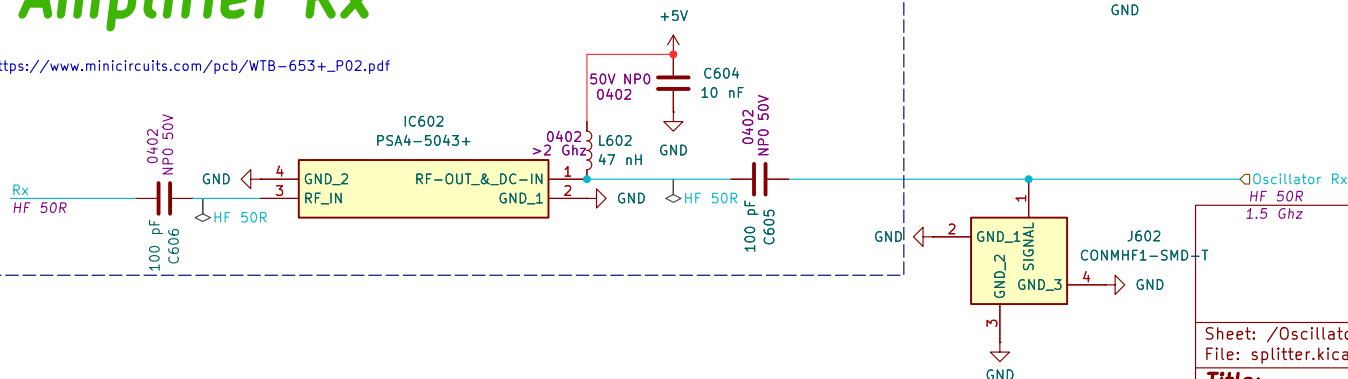

Sheet: /Oscillator Splitter/
File: splitter.kicad_sch

Title:



Size: A4

Date:

KiCad E.D.A. 10.0.3

Rev:

Id: 6/7

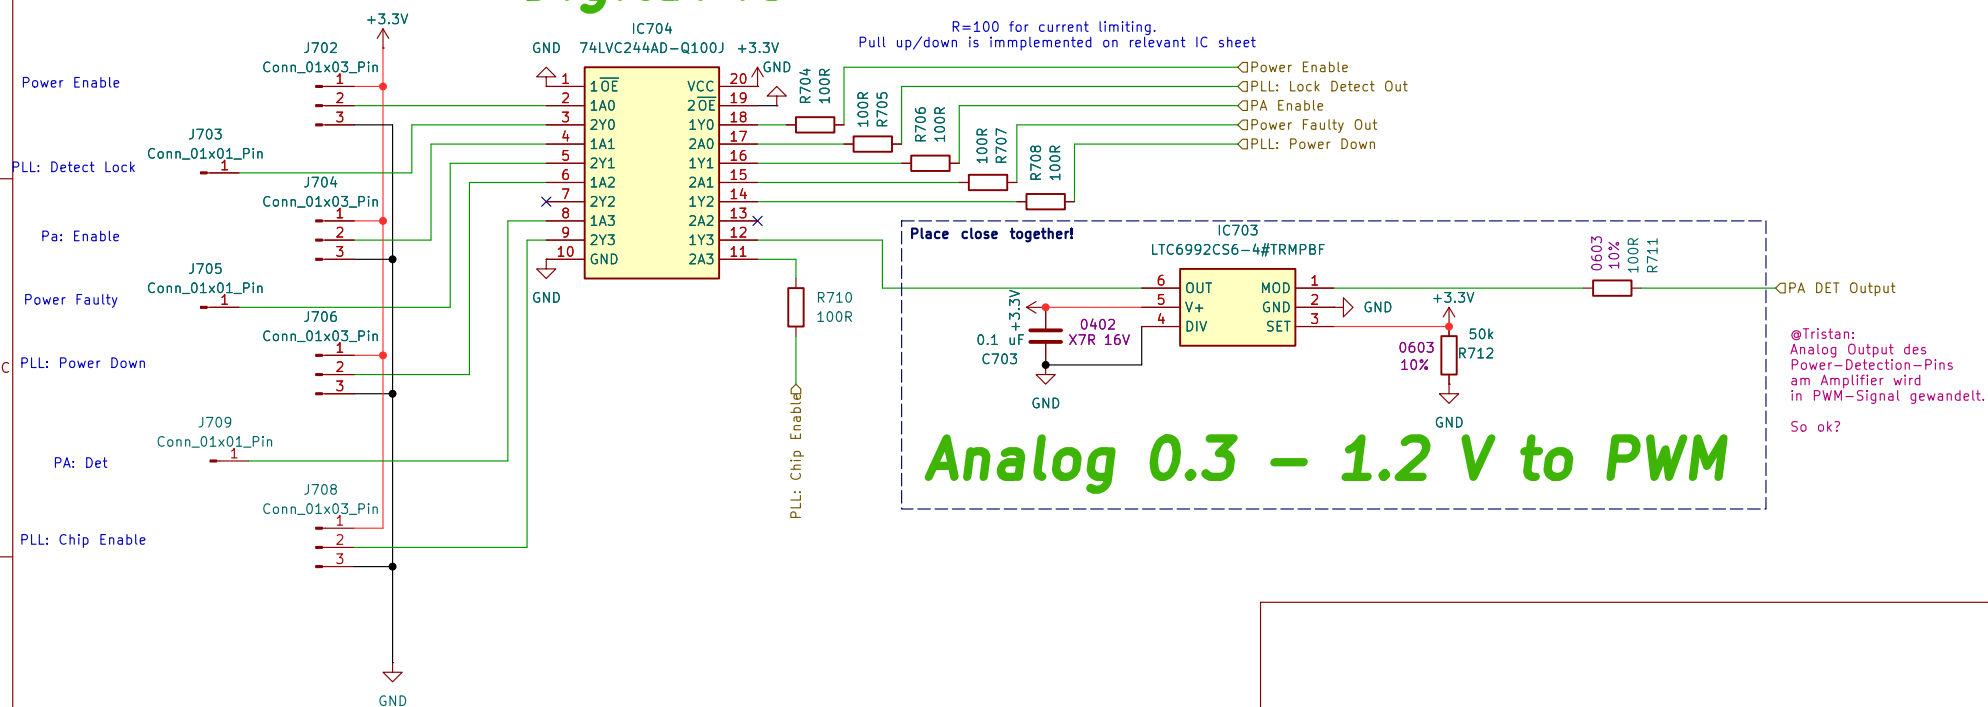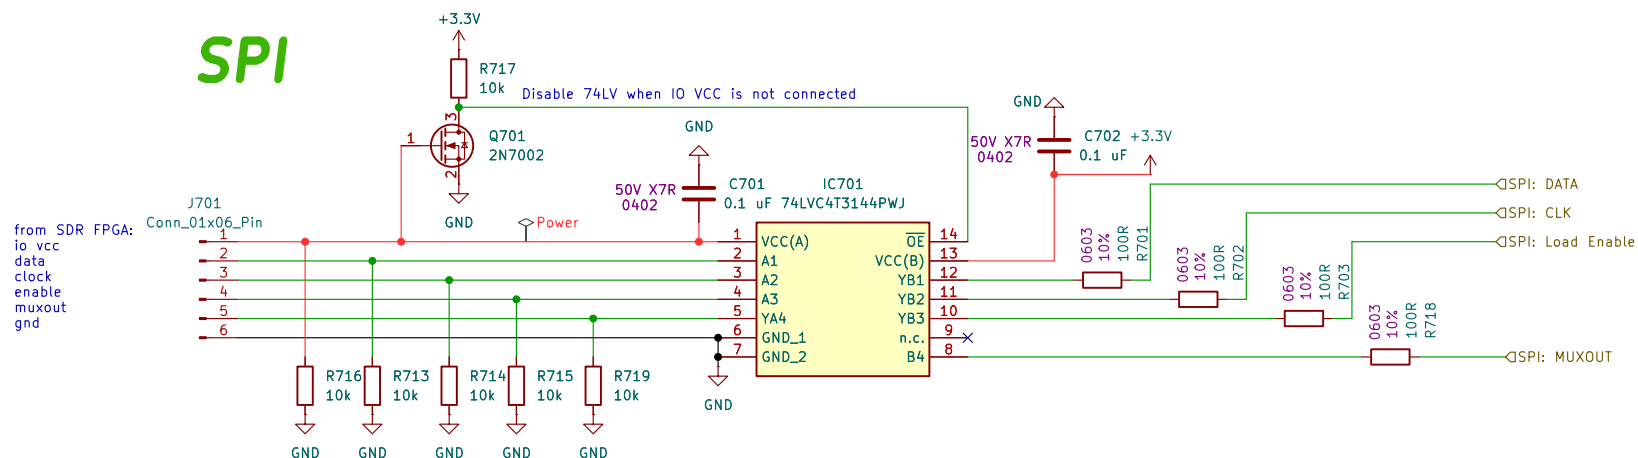

@Tristan:
Analog Output des
Power-Detection-Pins
am Amplifier wird
in PWM-Signal gewandelt.
So ok?