



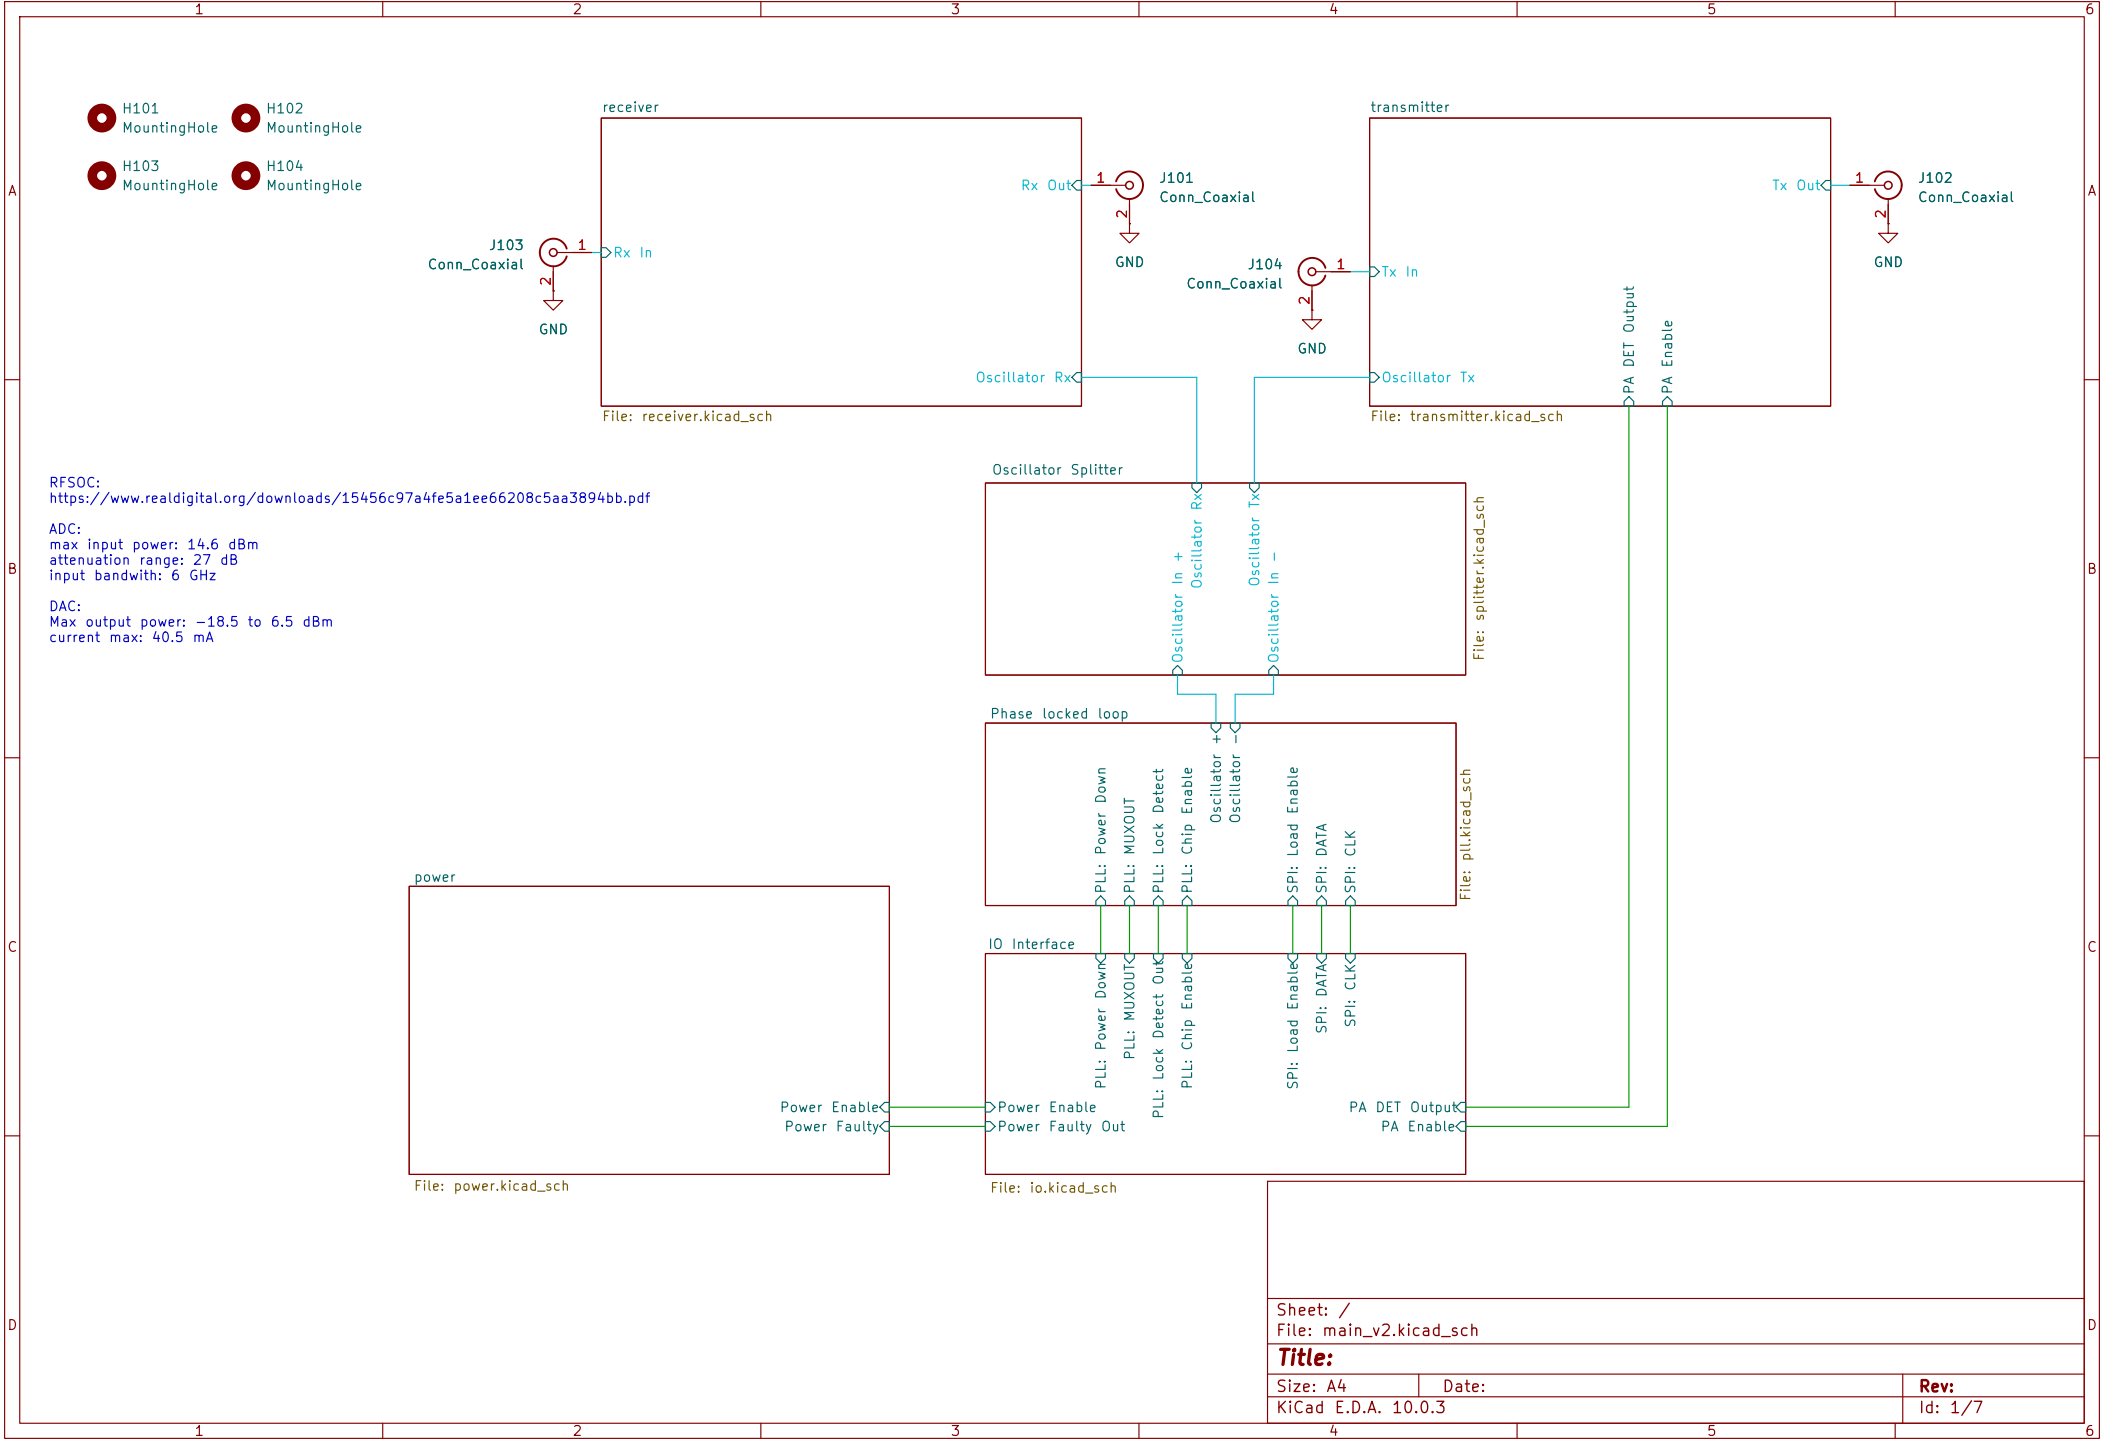

Place close together!


Power In

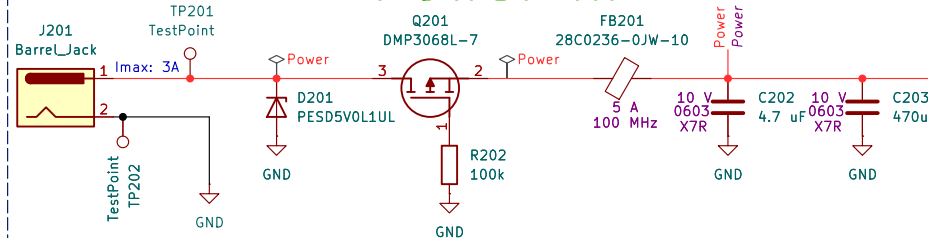

ESD Protection Reverse Polarity Protection Noise Reduction

Place close together!

Load Management

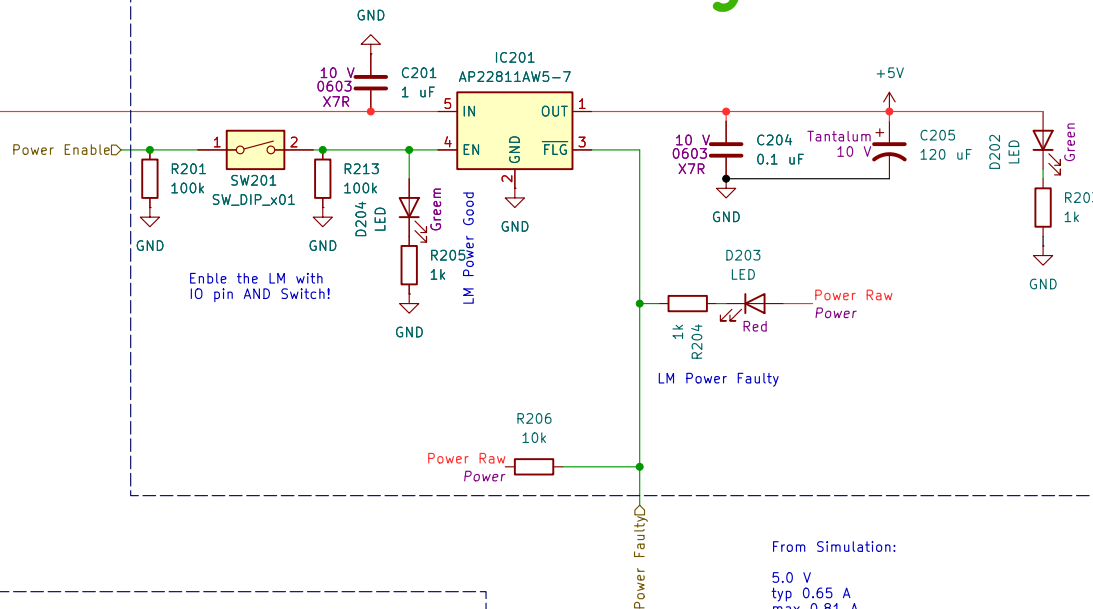

Enable the LM with IO pin AND Switch!


LM Power Good

LM Power Faulty

Place close together!

Place Thermal Vias for Heat Dissipation!

3.3V LDO

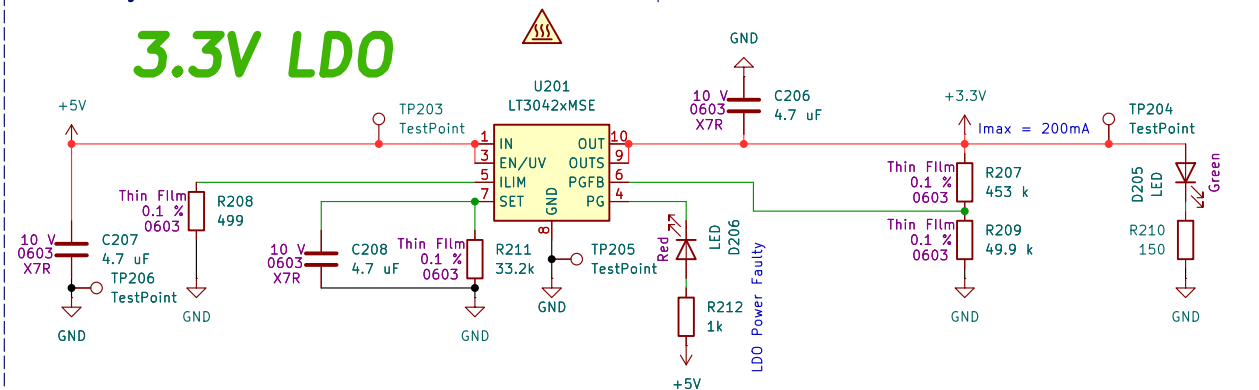

From Simulation:

5.0 V
typ 0.65 A
max 0.81 A

3.3 V
typ 0.13 A
max 0.18 A
heat: 1.7 V * 0.13 A = 221 mW

Total
typ 0.78 A
max 0.99 A

Sheet: /power/
File: power.kicad_sch


Title:

Size: A4
KiCad E.D.A. 10.0.3

Date:


Rev:

Id: 2/7

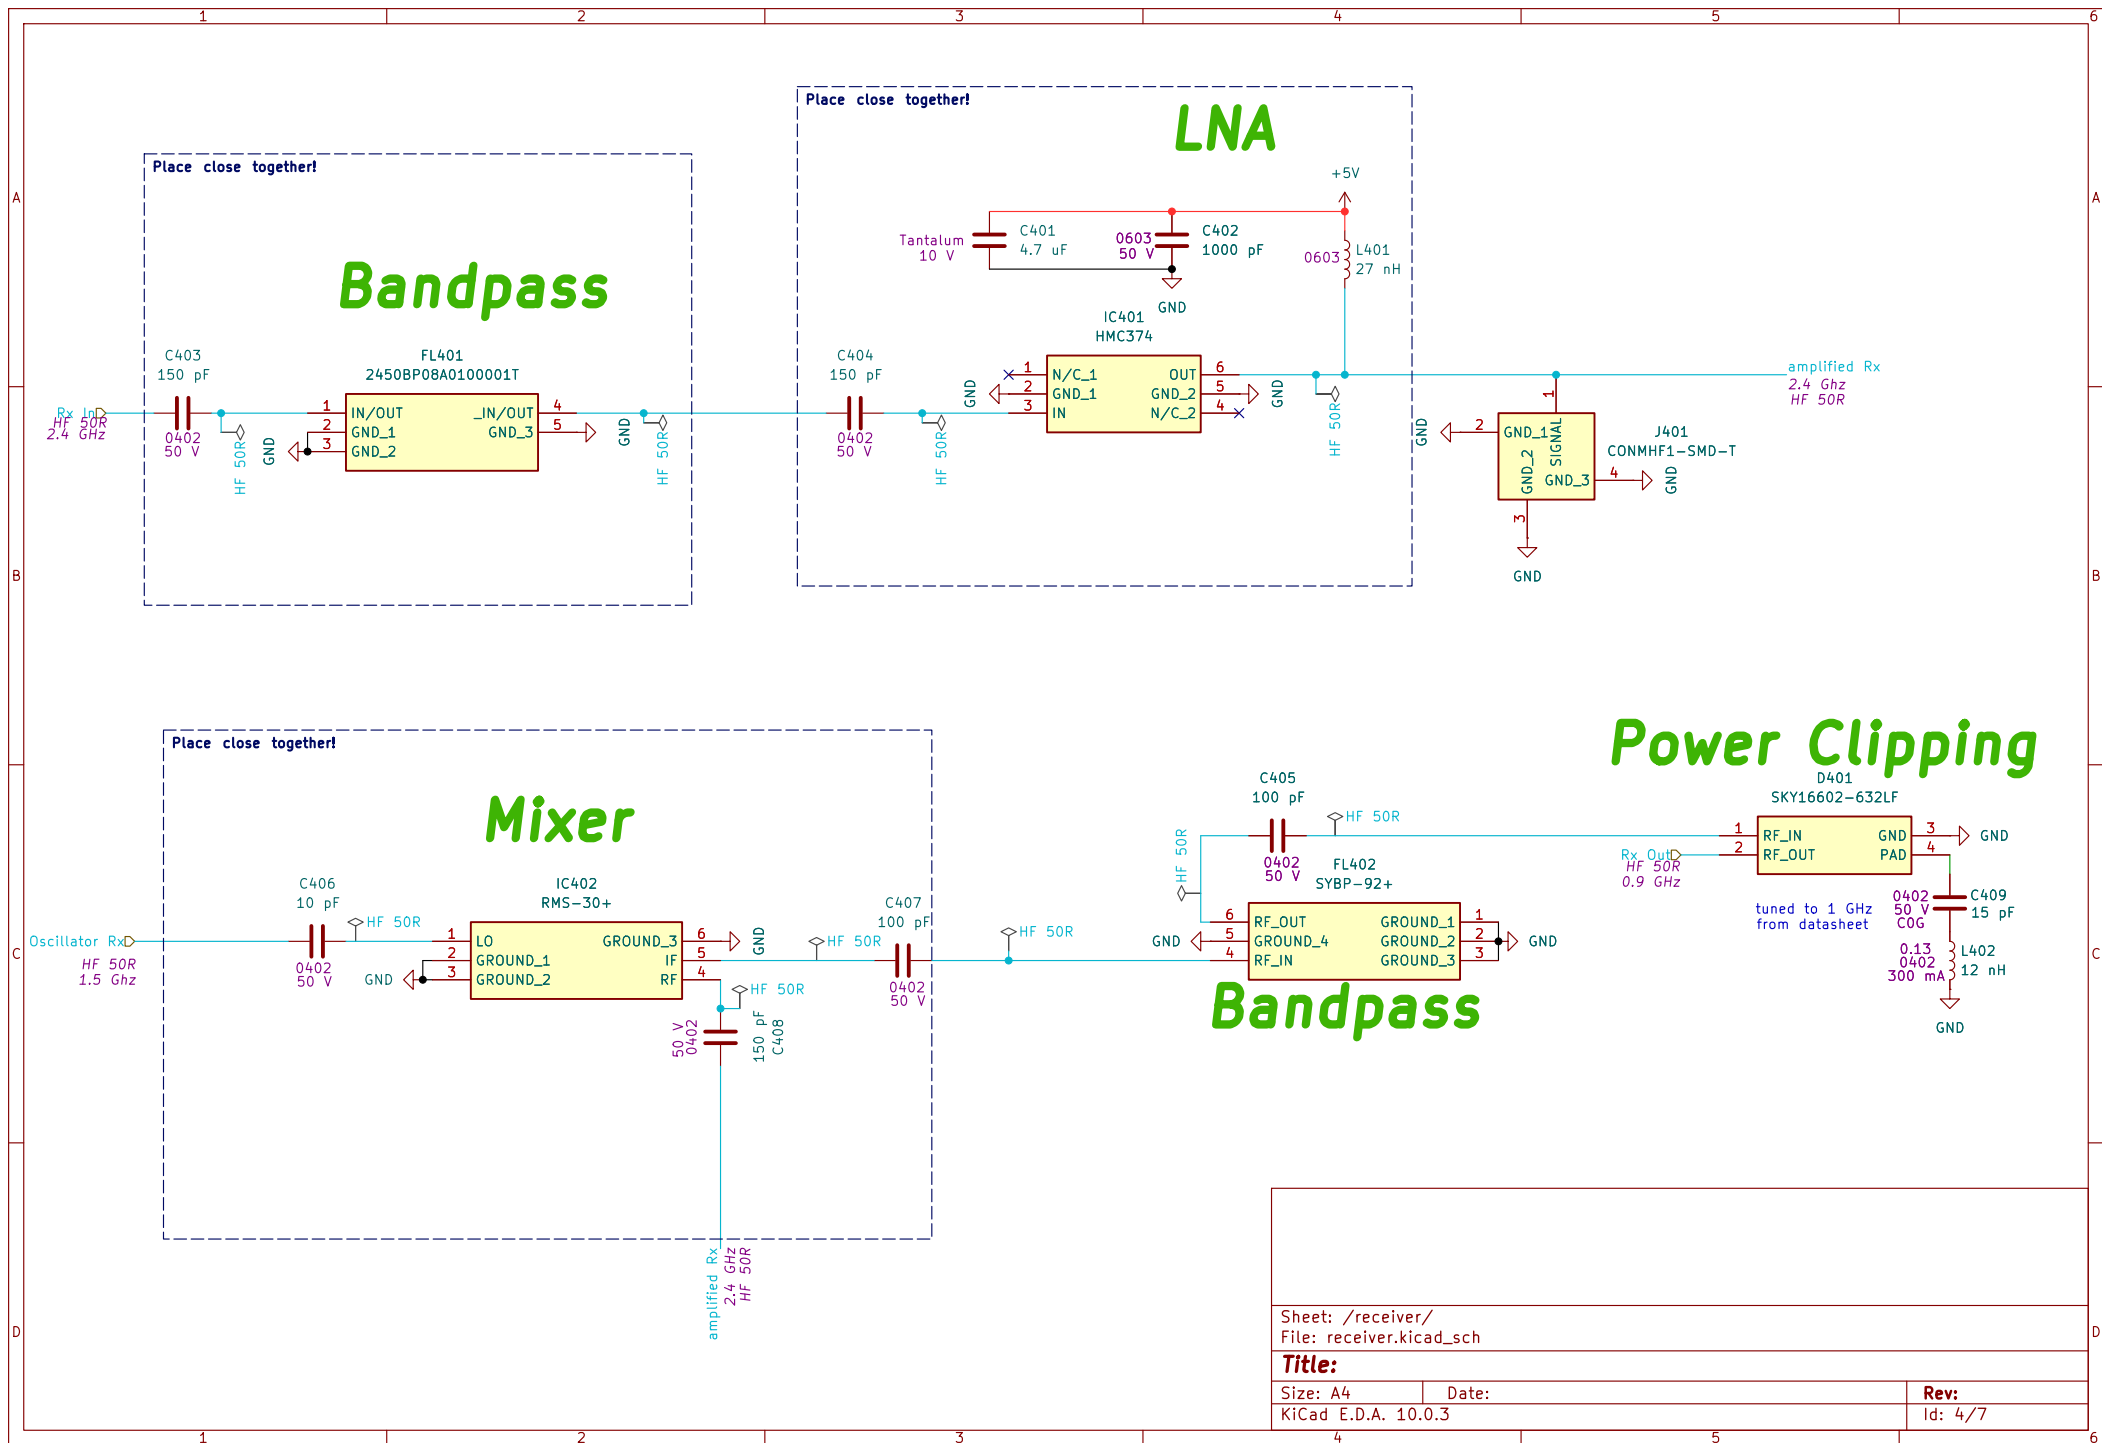

Sheet: /receiver/		
File: receiver.kicad_sch		
Title:		
Size: A4	Date:	
KiCad E.D.A. 10.0.3	Rev: Id: 4/7	


Place close together!

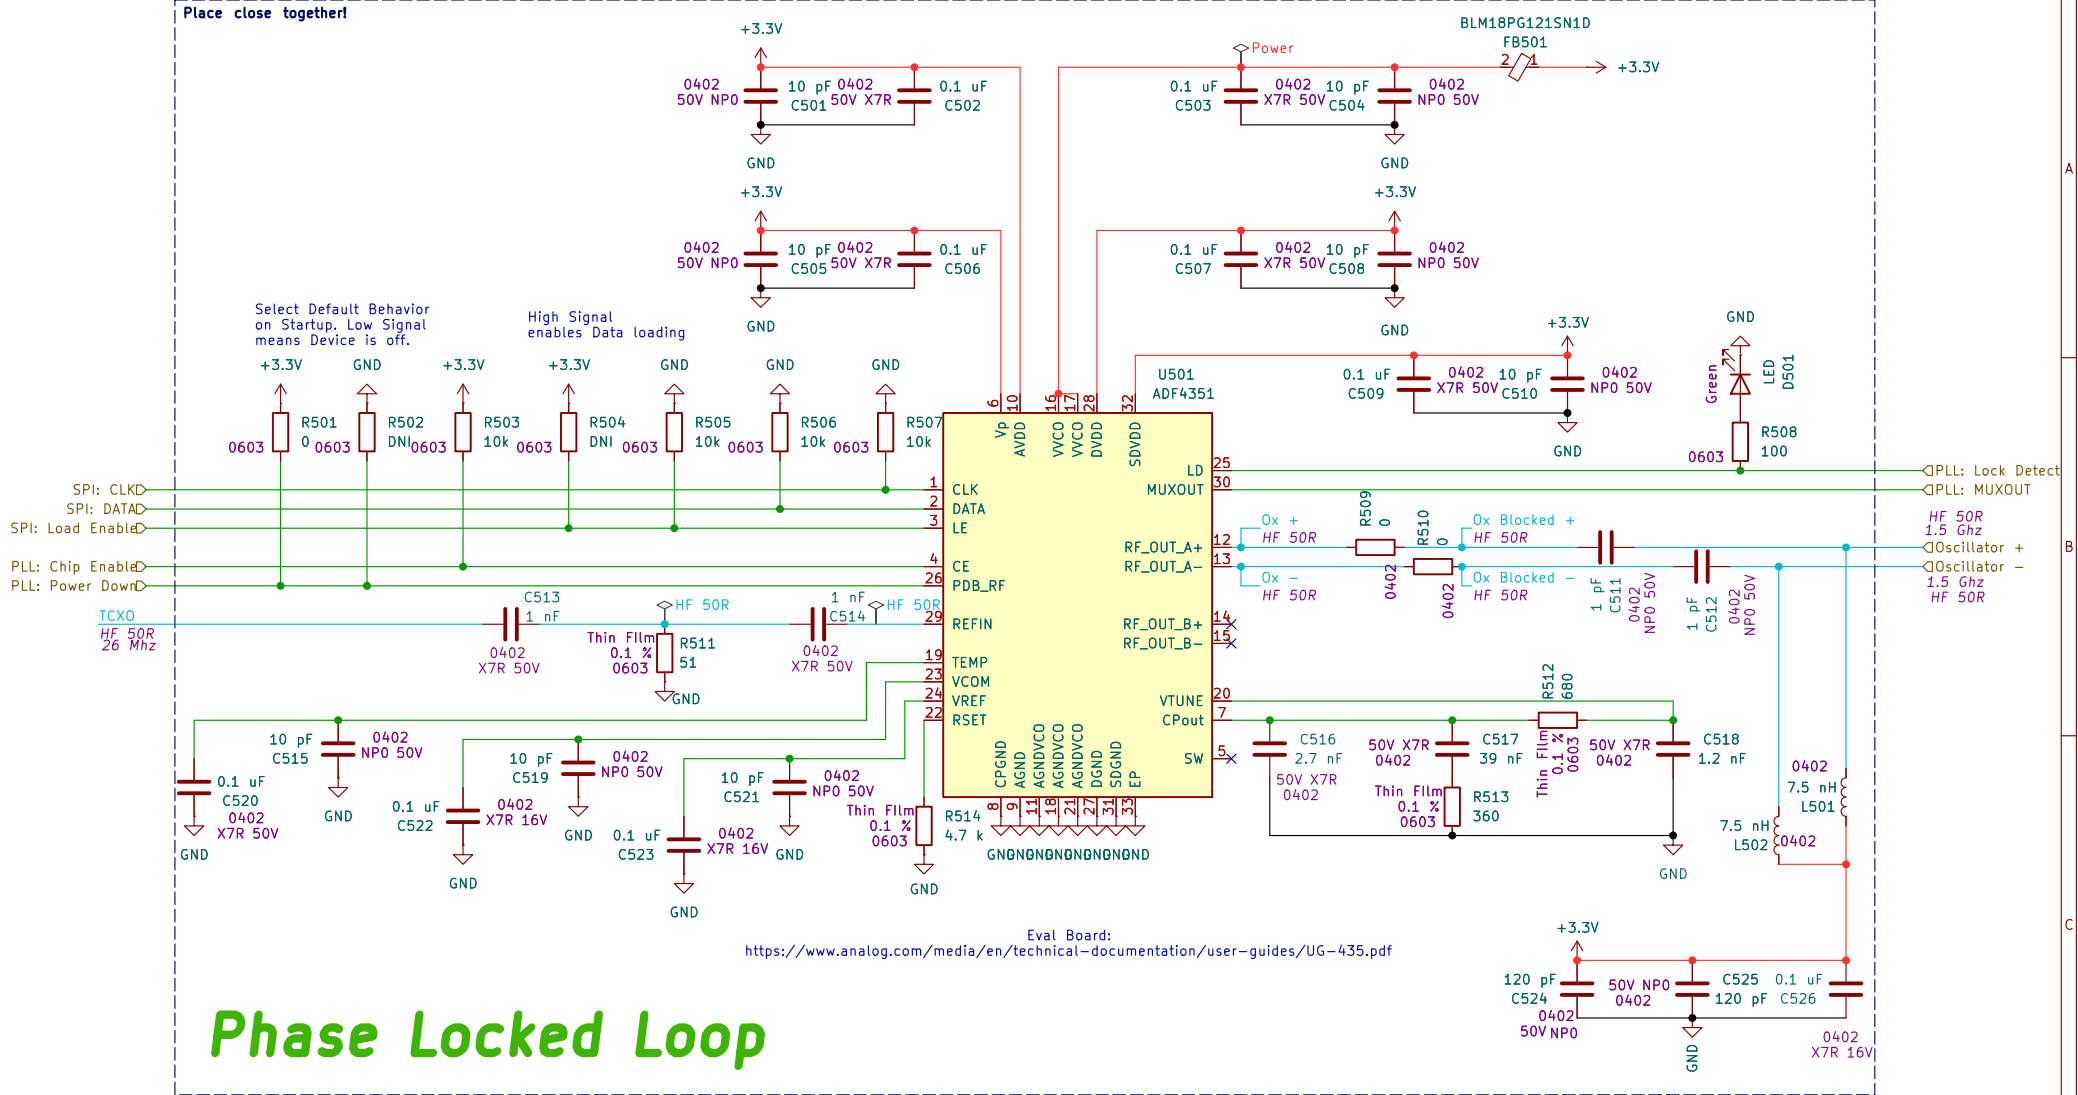

Eval Board:
<https://www.analog.com/media/en/technical-documentation/user-guides/UG-435.pdf>

Place close together!

TCXO

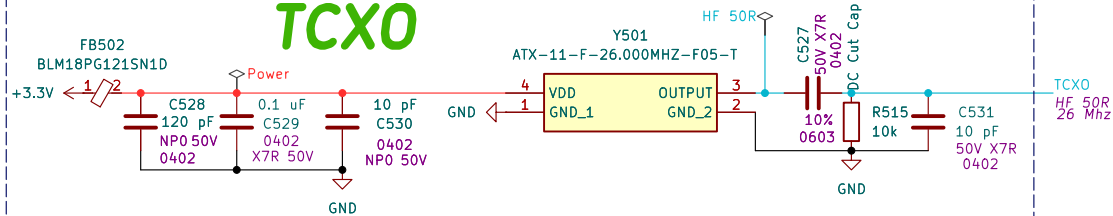

Sheet: /Phase locked loop/
 File: pll.kicad_sch

Title:

Size: A4

Date:


KiCad E.D.A. 10.0.3

Rev:

Id: 5/7


Low Pass Filter

Balun 1:2

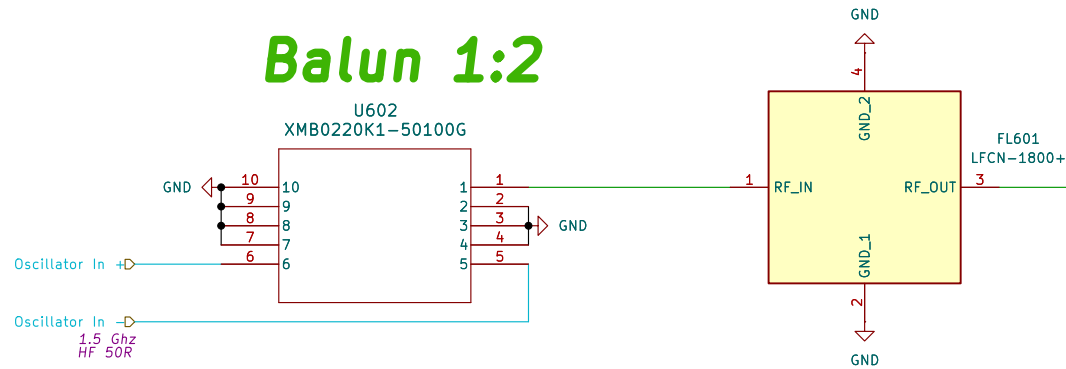

Place close together!


Power Splitter

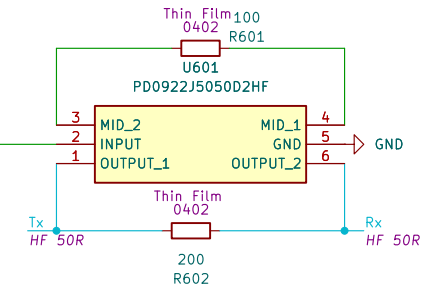

Place close together!

Amplifier Tx


https://www.minicircuits.com/pcb/WTB-653+_P02.pdf

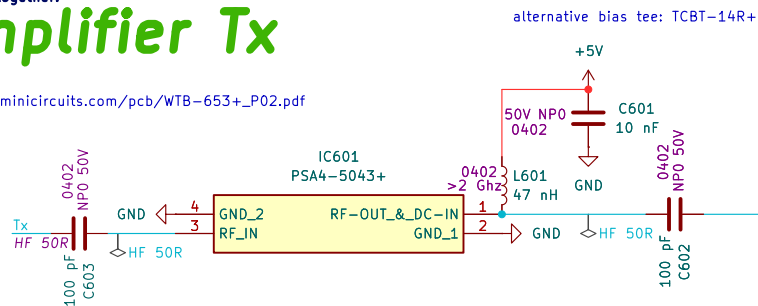

Place close together!

Amplifier Rx

https://www.minicircuits.com/pcb/WTB-653+_P02.pdf

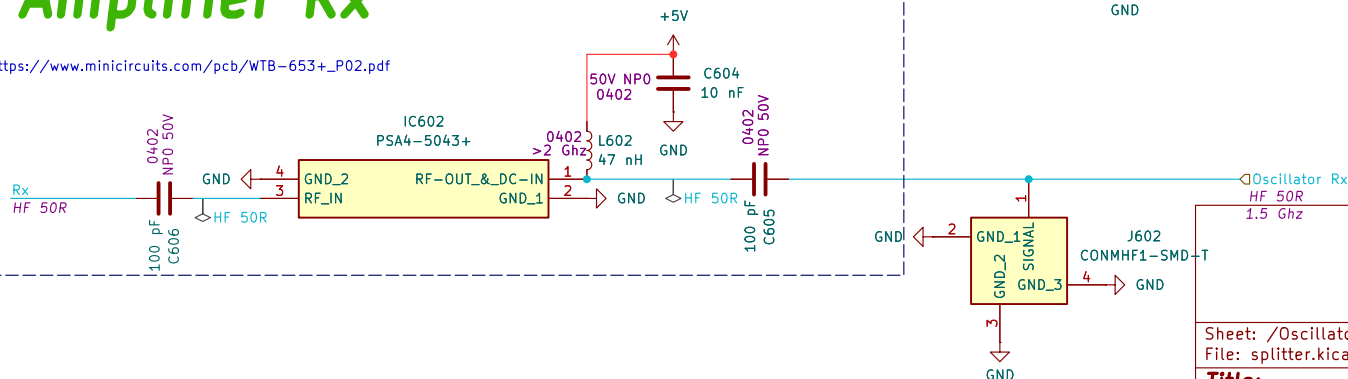

Sheet: /Oscillator Splitter/
File: splitter.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. 10.0.3

Rev:

Id: 6/7

