

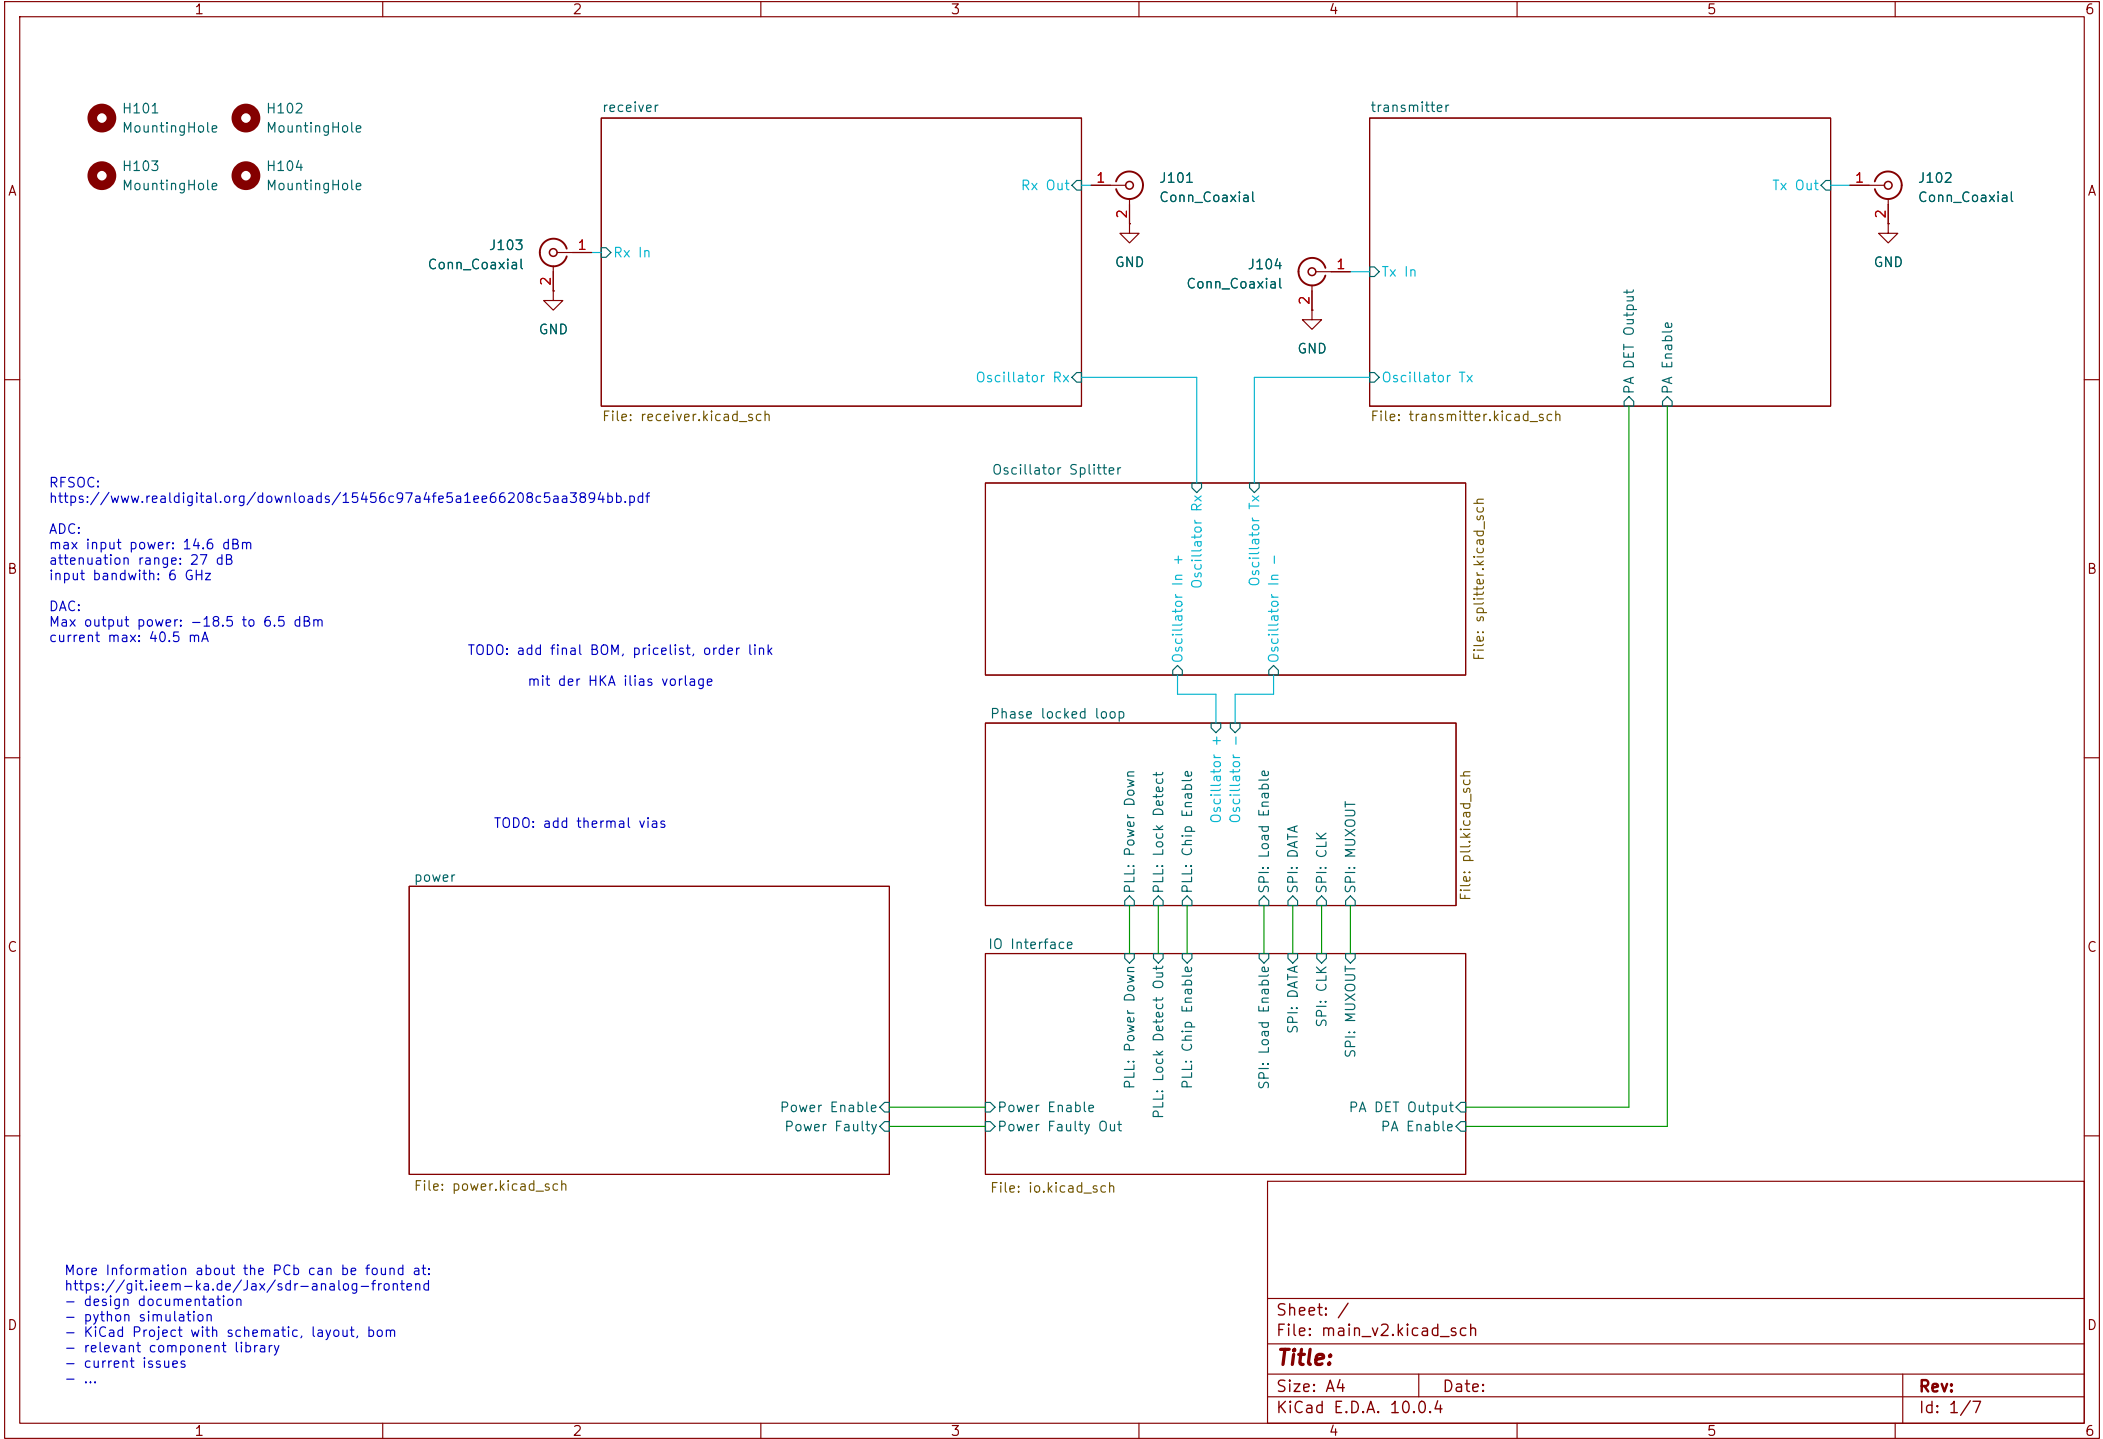
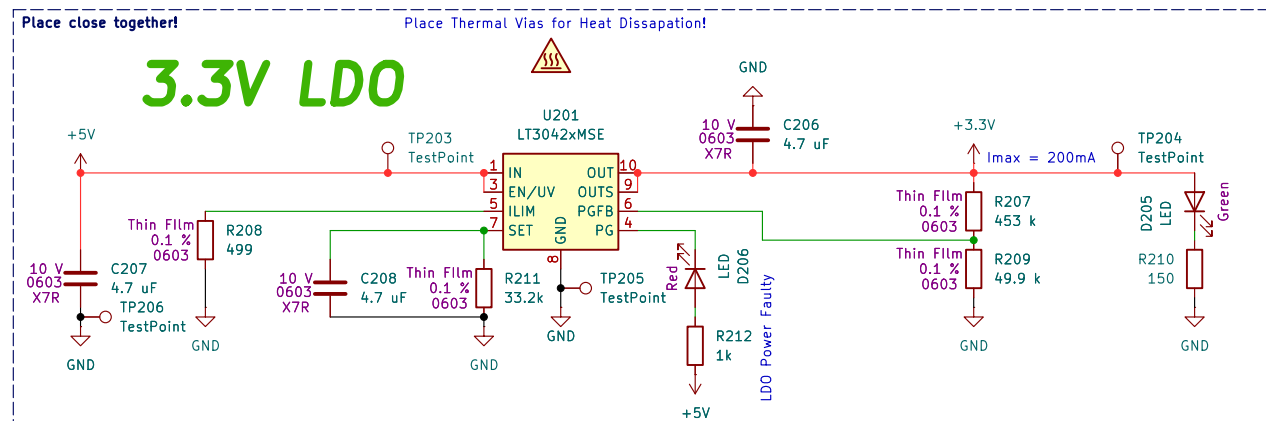


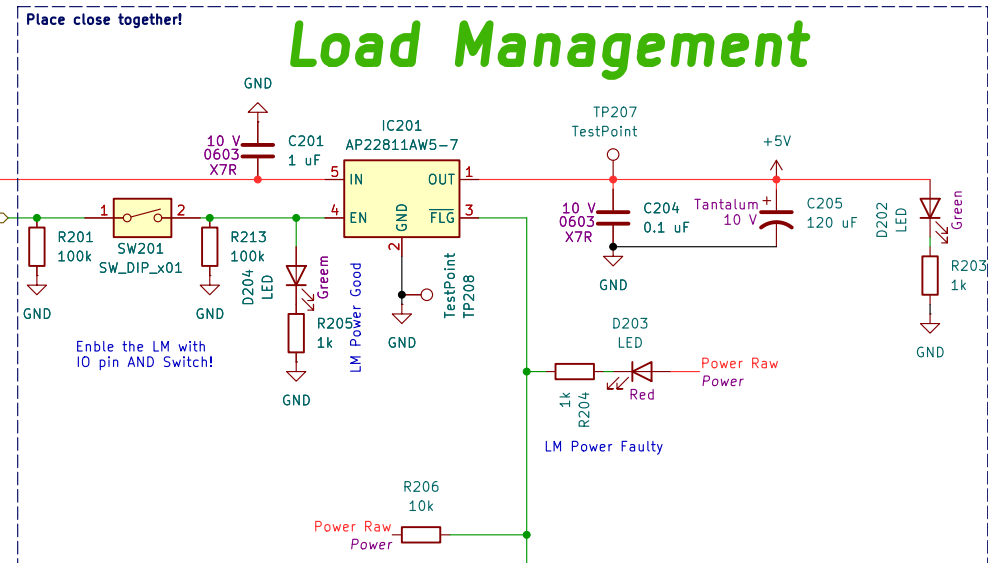

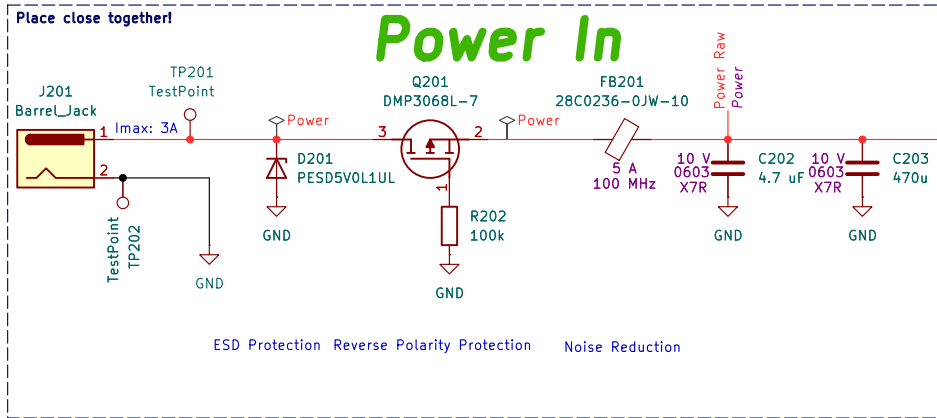

From Simulation:

5.0 V
typ 0.65 A
max 0.81 A

3.3 V
typ 0.13 A
max 0.18 A
heat: 1.7 V * 0.13 A = 221 mW

Total
typ 0.78 A
max 0.99 A

Sheet: /power/
File: power.kicad_sch

Title:


Size: A4

Date:

KiCad E.D.A. 10.0.4

Rev:

Id: 2/7

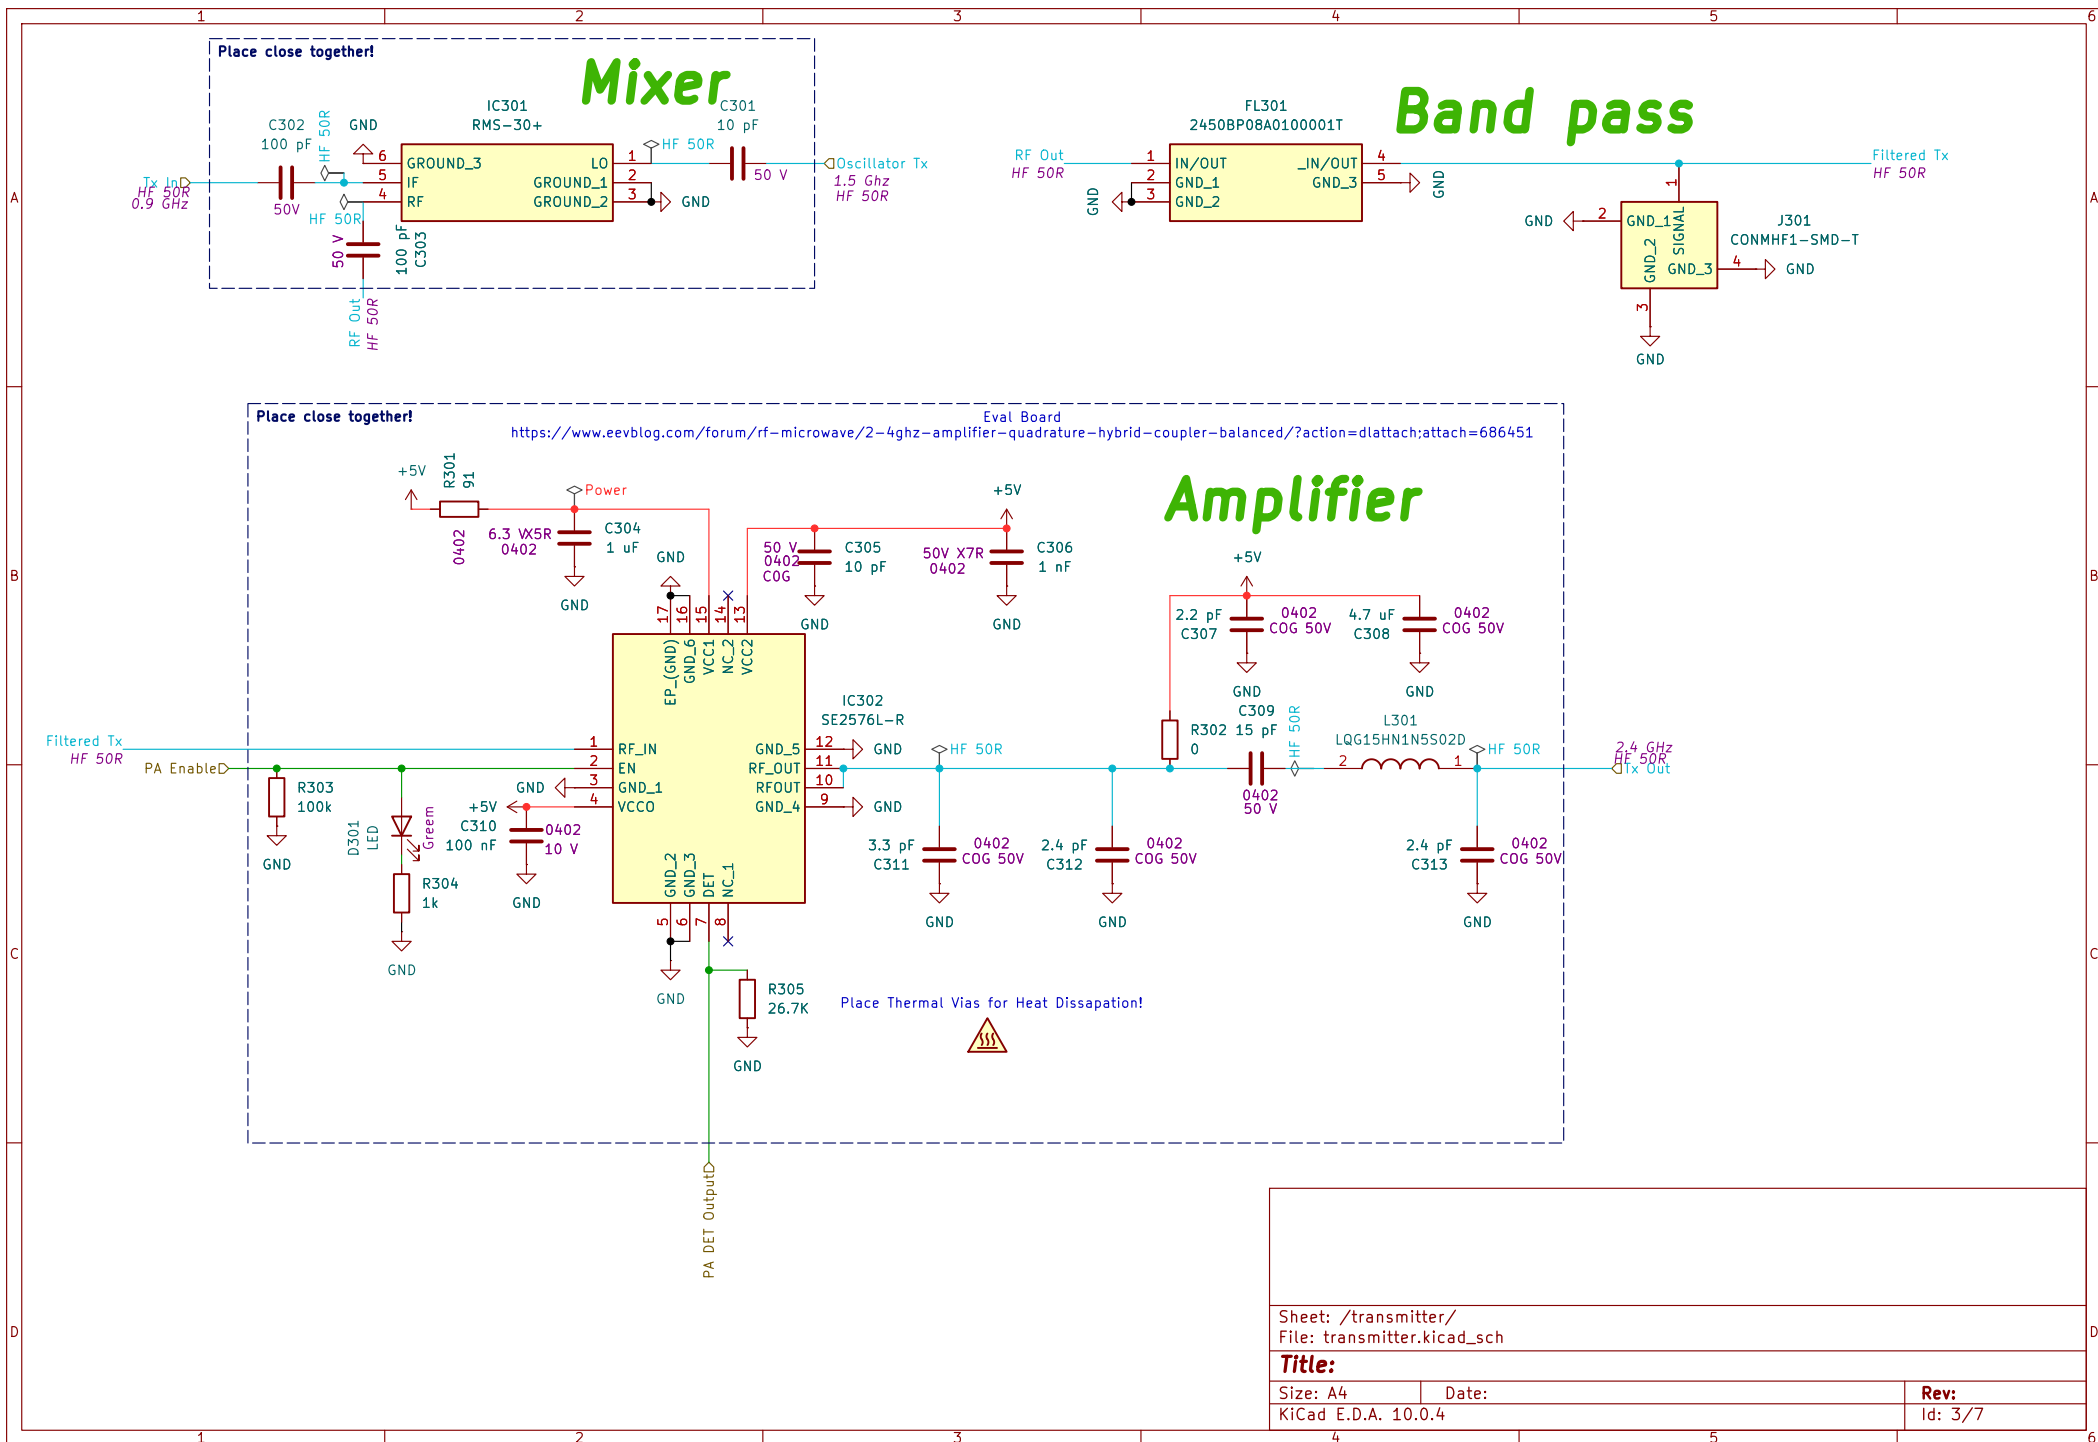

Sheet: /transmitter/
File: transmitter.kicad_sch

Title:


Size: A4


Date:

KiCad E.D.A. 10.0.4

Rev:


Id: 3/7

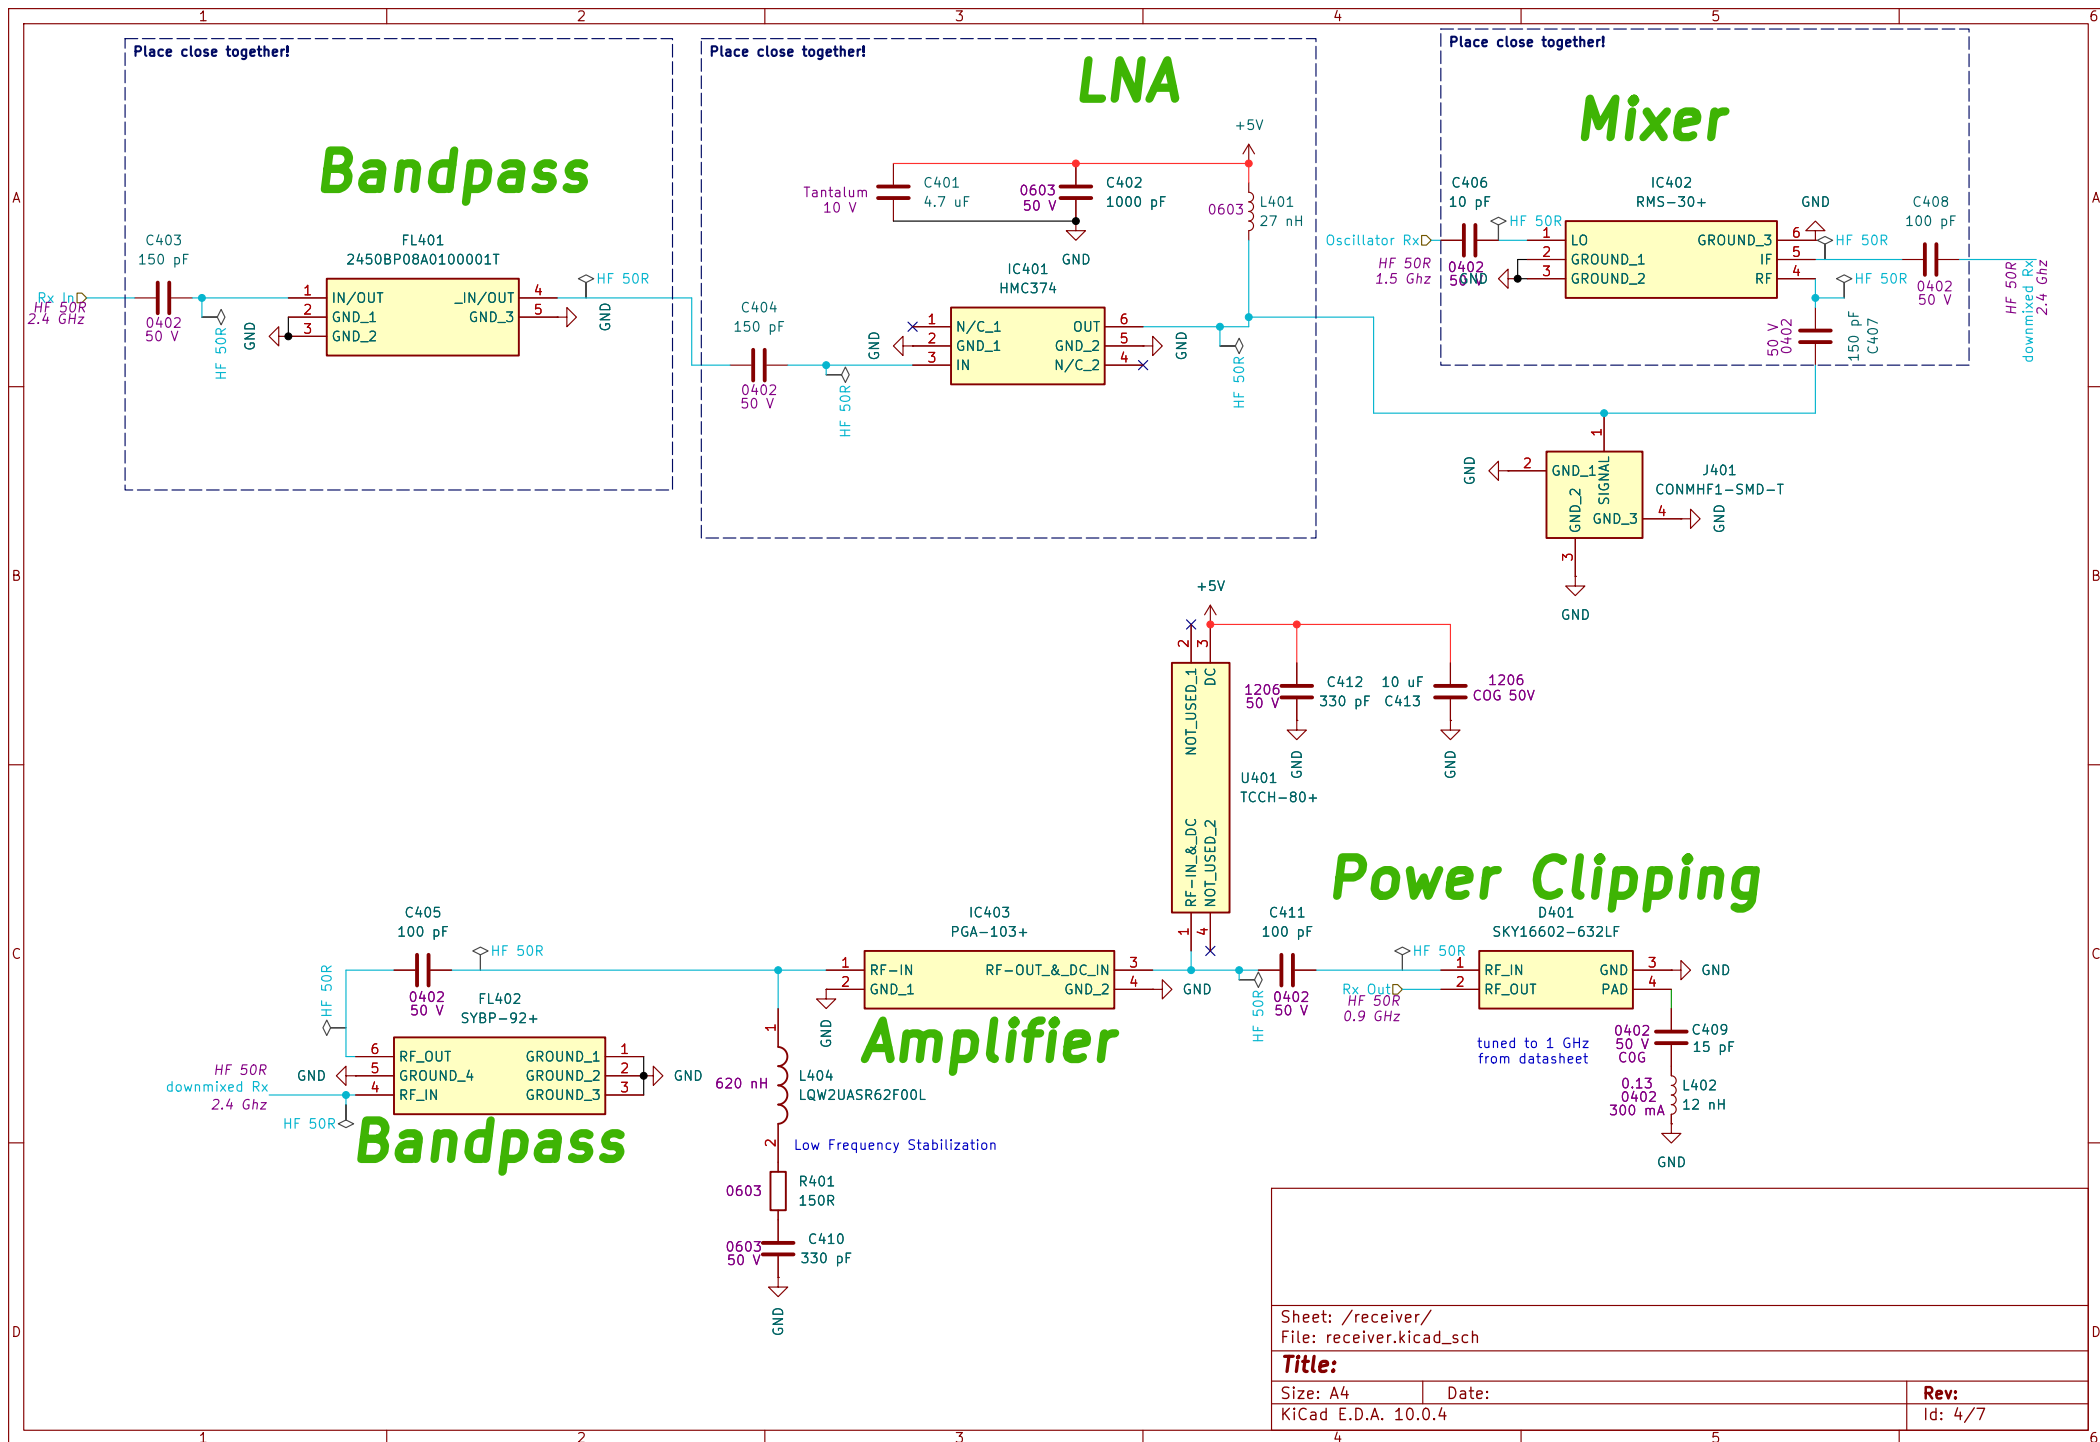

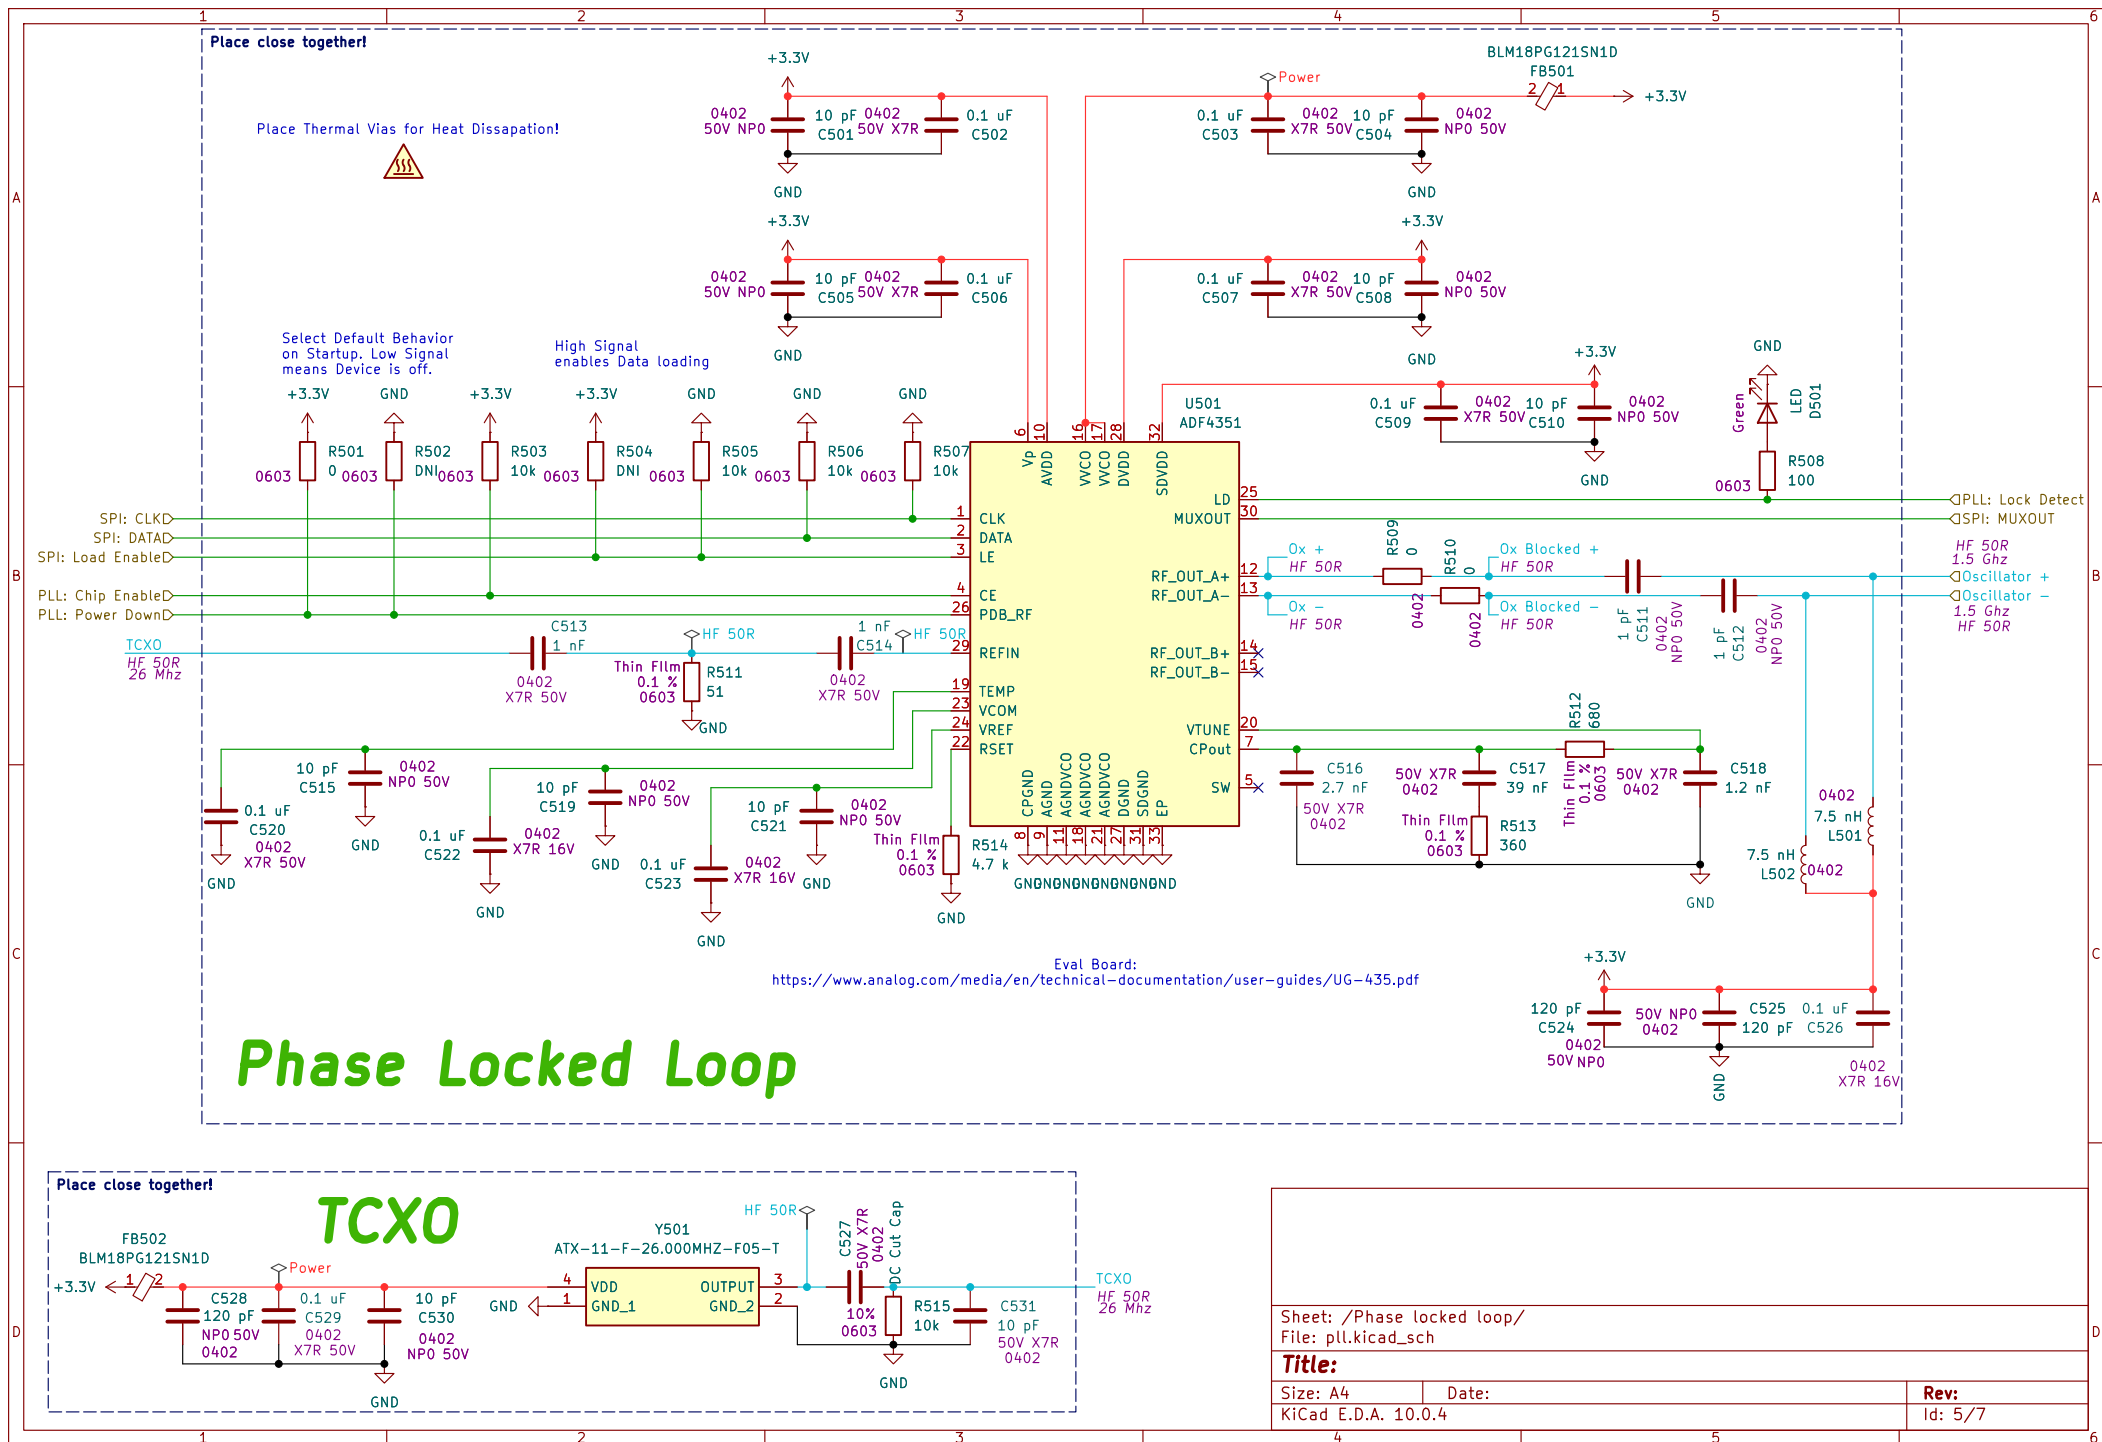


Low Pass Filter

Balun 1:2

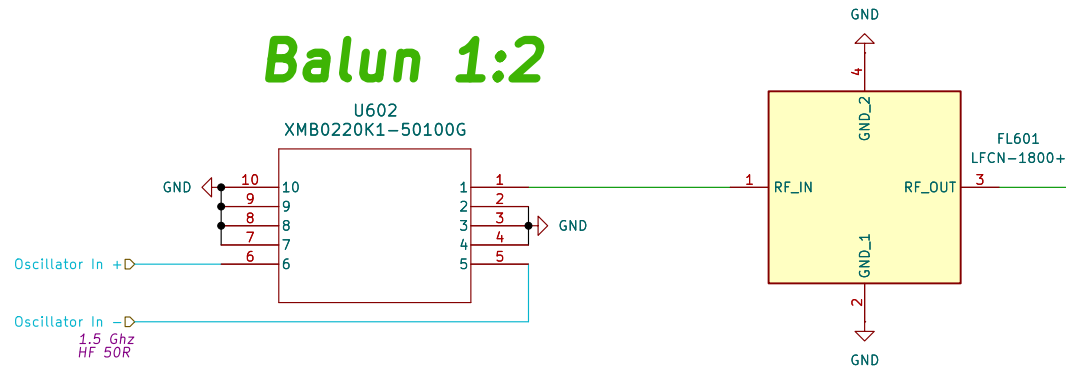

Place close together!


Power Splitter

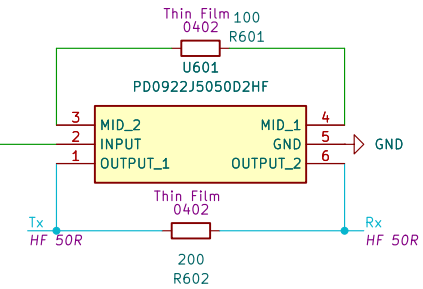

Place close together!

Amplifier Tx


https://www.minicircuits.com/pcb/WTB-653+_P02.pdf

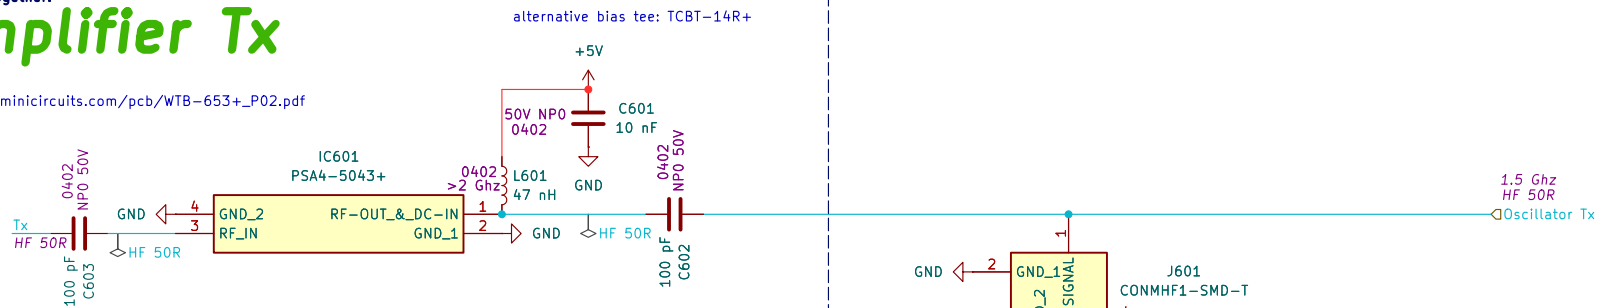

Place close together!

Amplifier Rx

https://www.minicircuits.com/pcb/WTB-653+_P02.pdf

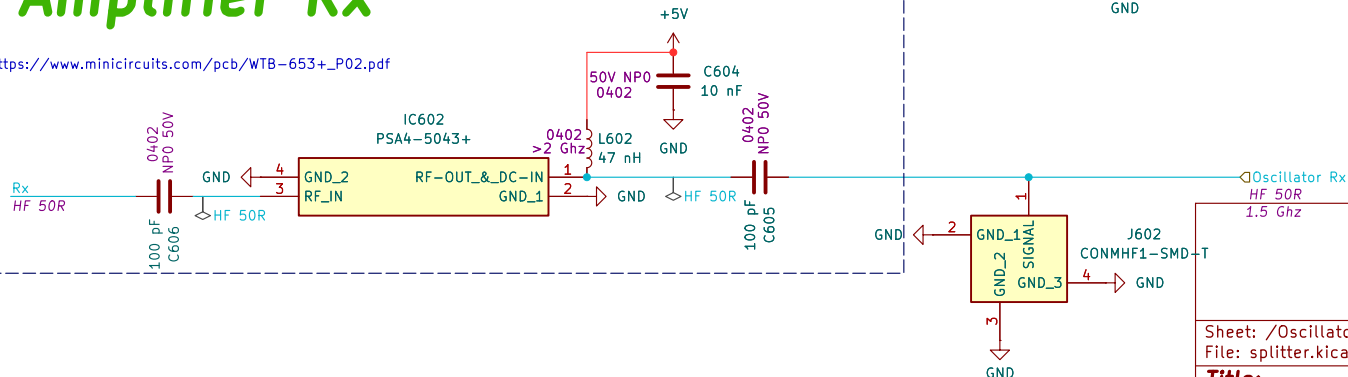

Sheet: /Oscillator Splitter/
File: splitter.kicad_sch

Title:



Size: A4

Date:

KiCad E.D.A. 10.0.4

Rev:

Id: 6/7

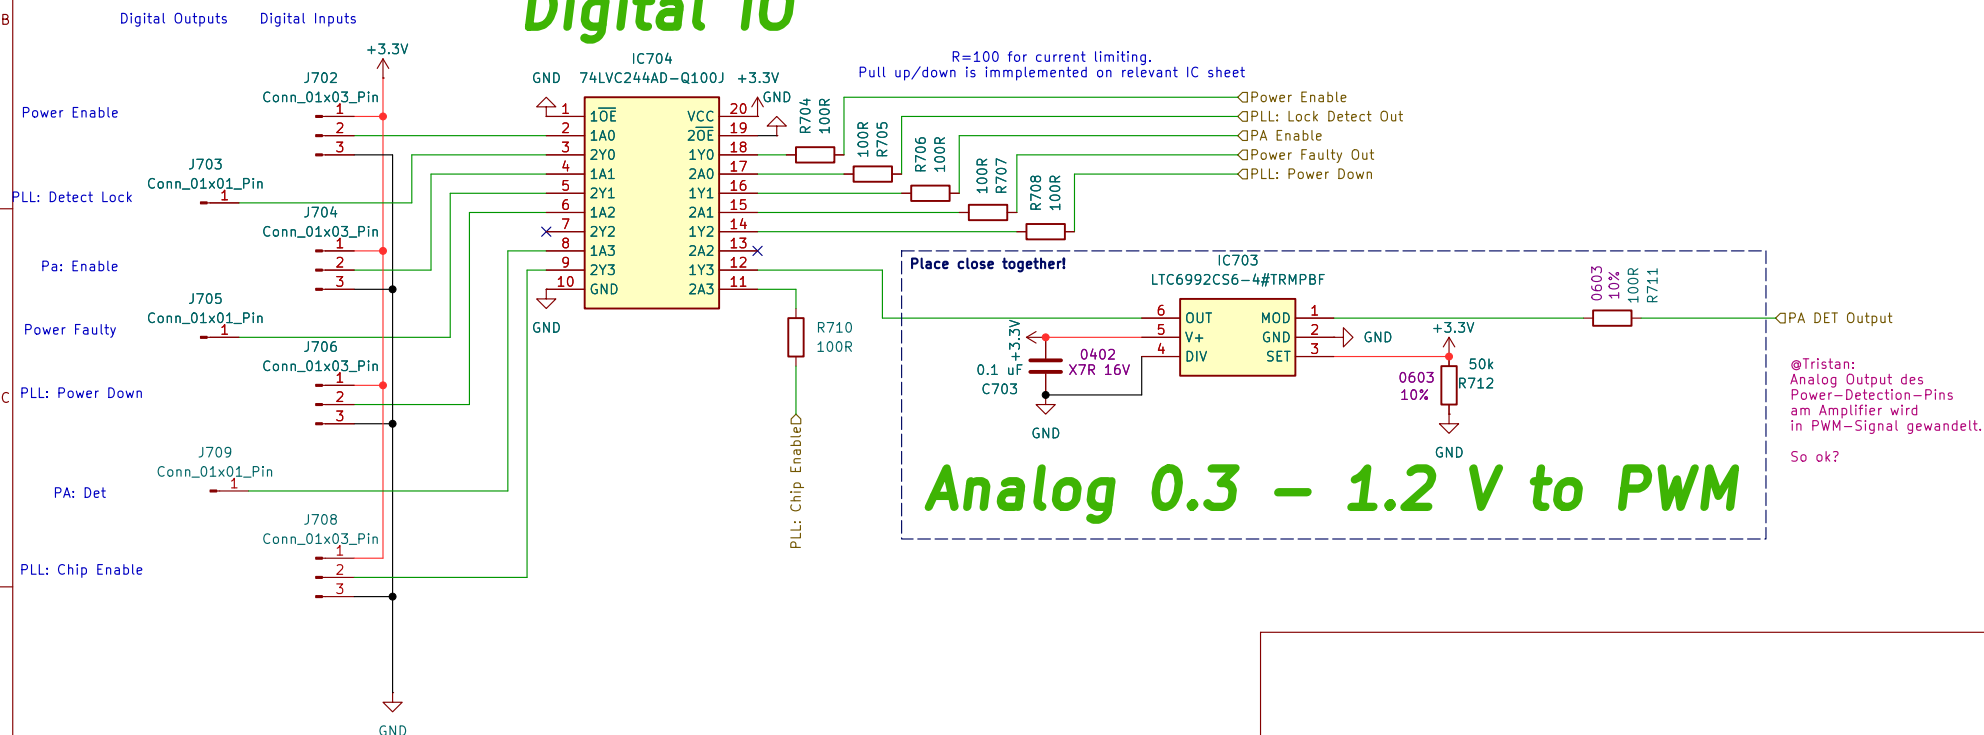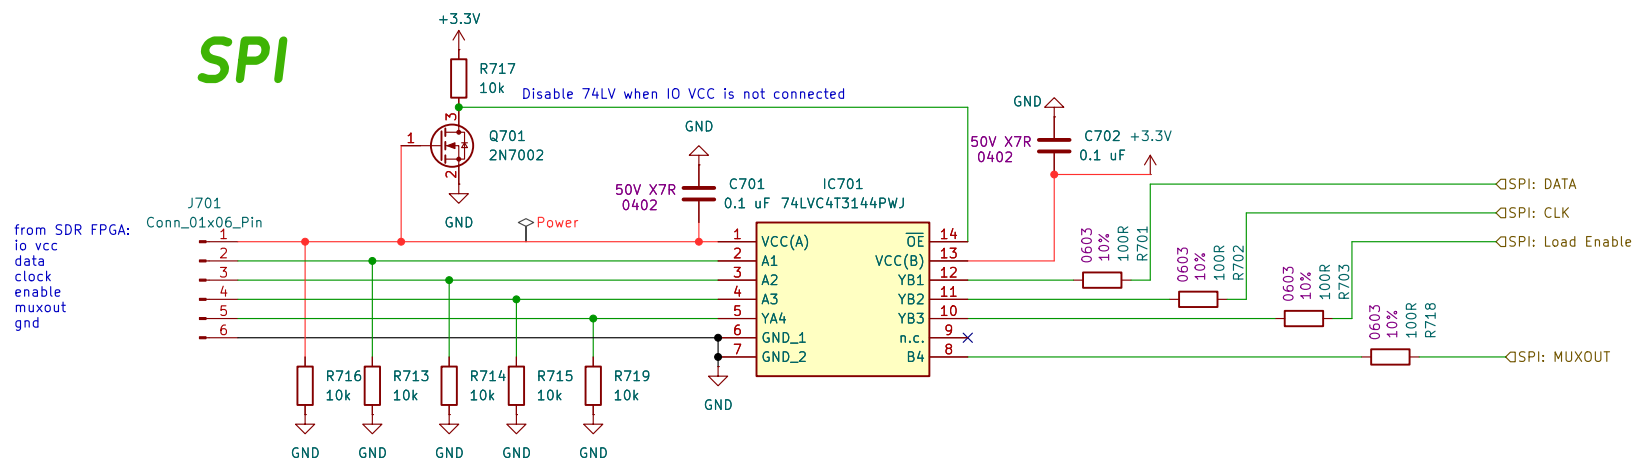

Analog 0.3 – 1.2 V to PWM

@Tristan:
Analog Output des
Power-Detection-Pins
am Amplifier wird
in PWM-Signal gewandelt.
So ok?