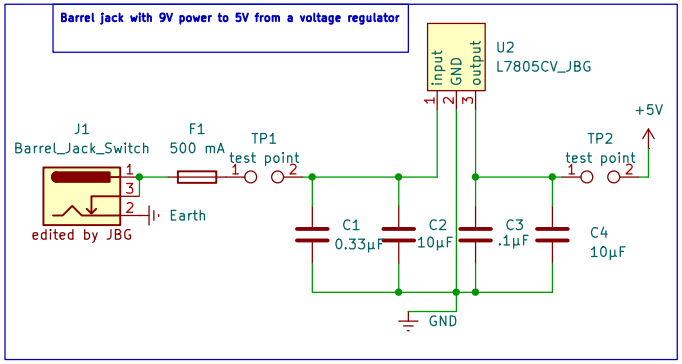
Barrel jack with 9V power to 5V from a voltage regulator
U2
L7805CV_JBG
input
GND
output
J1
Barrel_Jack_Switch
edited by JBG
F1
500 mA
TP1
test point
Earth
C1
0.33µF
C2
10µF
C3
.1µF
C4
10µF
TP2
test point
+5V
GND

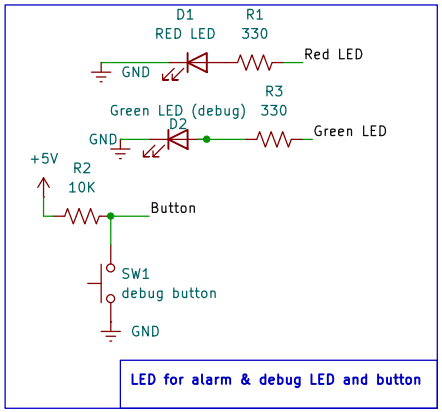
D1
RED LED
R1
330
Red LED
GND
R3
Green LED (debug)
330
D2
Green LED
+5V
R2
10K
Button
SW1
debug button
GND
LED for alarm & debug LED and button

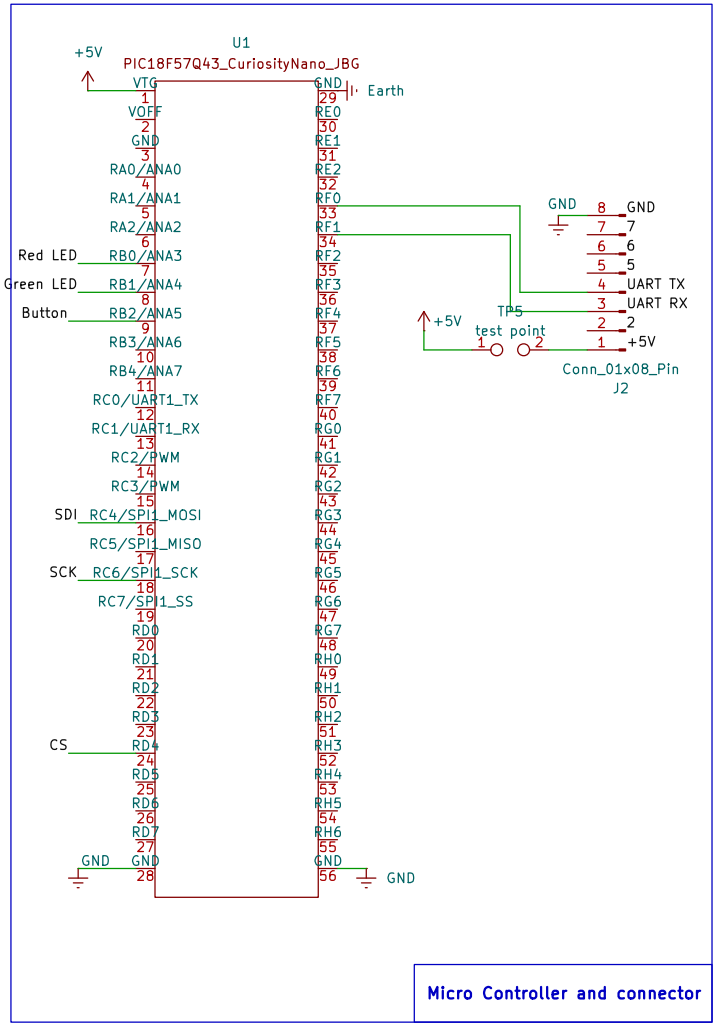
U1
PIC18F57Q43_CuriosityNano_JBG
+5V
VTG
VOFF
GND
RA0/ANA0
RA1/ANA1
RA2/ANA2
Red LED
RB0/ANA3
Green LED
RB1/ANA4
Button
RB2/ANA5
RB3/ANA6
RB4/ANA7
RC0/UART1_TX
RC1/UART1_RX
RC2/PWM
RC3/PWM
SDI
RC4/SPI1_MOSI
RC5/SPI1_MISO
SCK
RC6/SPI1_SCK
RC7/SPI1_SS
RD0
RD1
RD2
RD3
CS
RD4
RD5
RD6
RD7
GND
GND
Earth
RE0
RE1
RE2
RF0
RF1
RF2
RF3
RF4
RF5
RF6
RF7
RG0
RG1
RG2
RG3
RG4
RG5
RG6
RG7
RH0
RH1
RH2
RH3
RH4
RH5
RH6
GND
GND
GND
TP5
test point
+5V
GND
8
7
6
5
UART TX
UART RX
2
+5V
Conn_01x08_Pin
J2
Micro Controller and connector

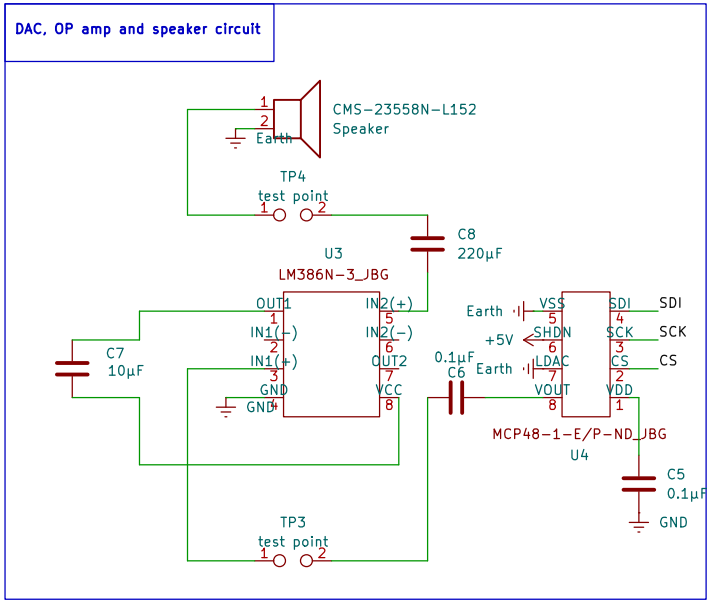
DAC, OP amp and speaker circuit
CMS-23558N-L152
Speaker
Earth
TP4
test point
C8
220µF
U3
LM386N-3_JBG
OUT1
IN1(-)
IN1(+)
GND
IN2(+)
IN2(-)
OUT2
VCC
C7
10µF
GND
Earth
+5V
0.1µF
C6
VSS
SHDN
LDAC
VOUT
SDI
SCK
CS
VDD
SDI
SCK
CS
MCP48-1-E/P-ND_JBG
U4
C5
0.1µF
GND
TP3
test point