OPENKEYS R0.4

74 x 98 x 20 mm

ASSEMBLY / ELECTRICAL PCB CANDIDATE - PHYSICAL QUALIFICATION REQUIRED

USB-C female / white16x2 LCD / device fingerprint

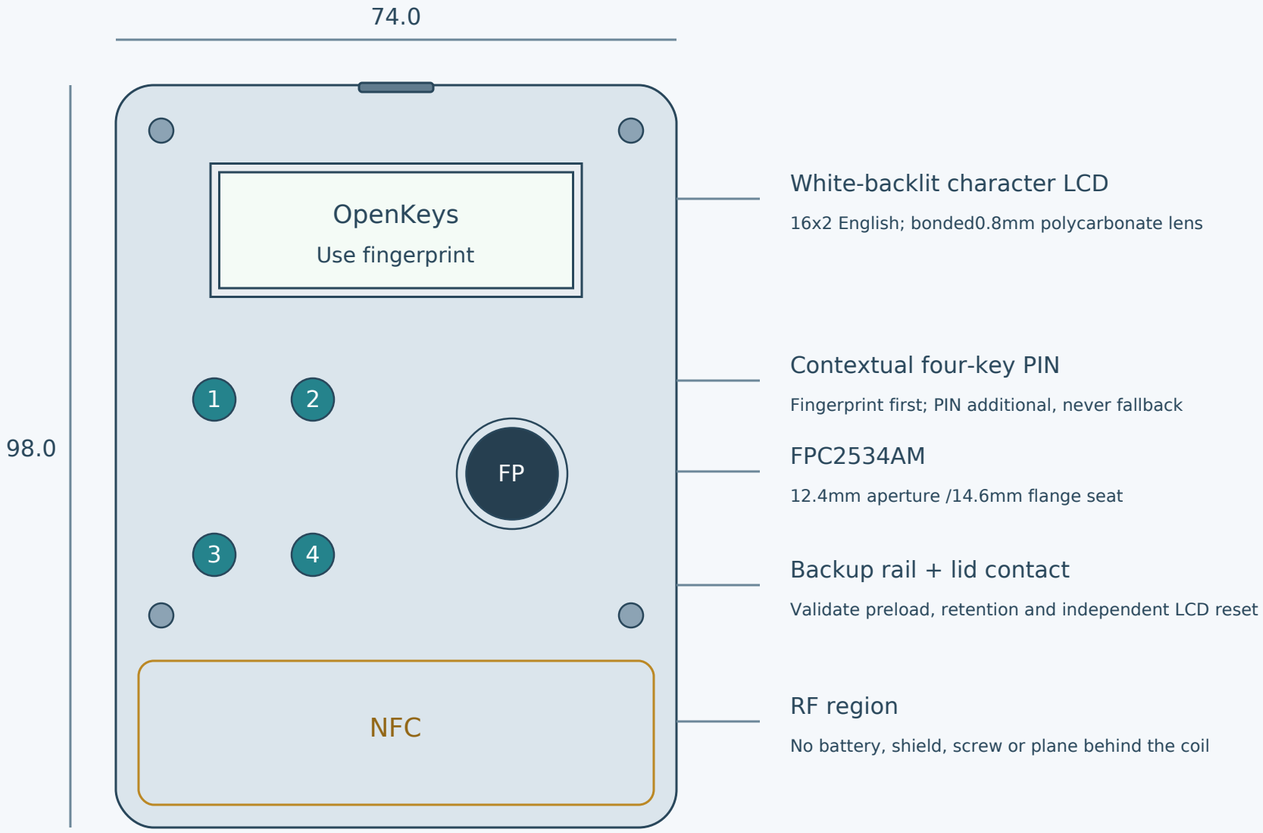

FRONT

White-backlit character LCD

16x2 English; bonded0.8mm polycarbonate lens

Contextual four-key PIN

Fingerprint first; PIN additional, never fallback

FPC2534AM

12.4mm aperture /14.6mm flange seat

Backup rail + lid contact

Validate preload, retention and independent LCD reset

RF region

No battery, shield, screw or plane behind the coil

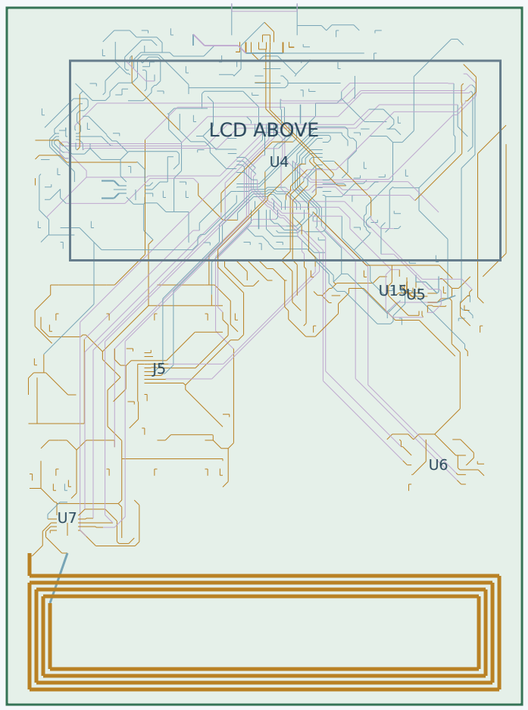

ACTUAL PCB LINEWORK

F.Cu / B.Cu / In2 signals; In1 ground

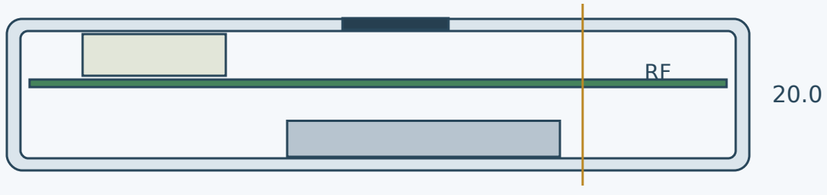

SECTION / PCB1.0 / wall1.8 / floor1.6

ASSEMBLY NOTES

PCB and enclosure controls checked together.

FP tail left, contacts down; pin1 at lower edge.

Support sensor back; do not clamp the flex bend.

500mAh protected pack plus attached10k NTC.

0.50W input budget; cell charge up to0.42W.

No IP rating or physical-attack certificate.

CAD AND SIMULATION ARE ENGINEERING EVIDENCE / QUALIFY BEFORE REAL KEY PROVISIONING