OPENKEYS R0.3

74 x 98 x 20 mm

DIMENSIONED ENGINEERING REVIEW / NOT FOR MANUFACTURE

Single USB-C / 16x2 white LCD / fingerprint mandatory

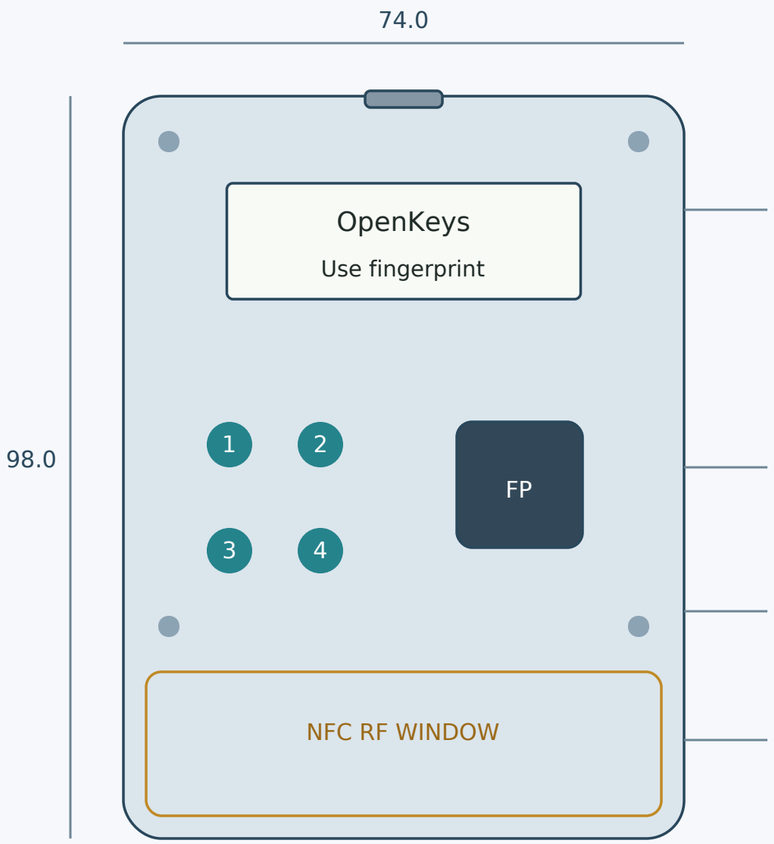

FRONT

White-backlit character LCD

16 columns x 2 lines; English; full identity paging

Fingerprint + contextual keys

PIN only after fingerprint; PIN never a fallback

Lid-open contact + backup rail

Internal actuator; powered-off tamper requires VBAT/LSE

RF-only region

No battery, shield, screws or copper planes here

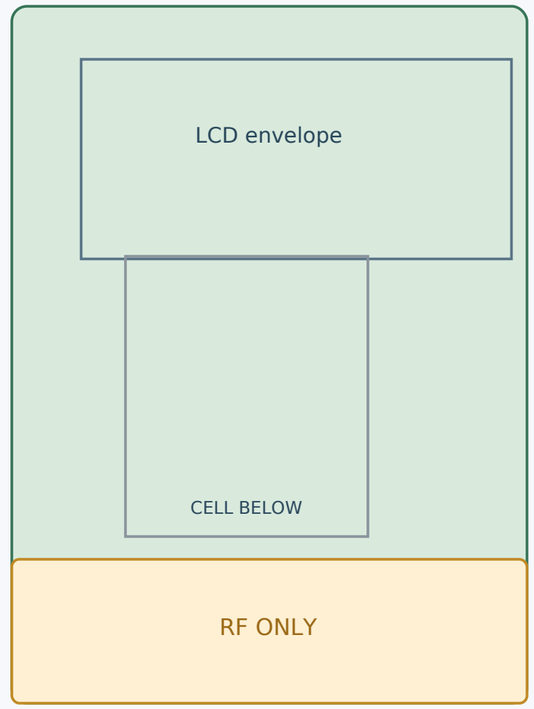

68 x 92 x 1.0 / 4 LAYERS

UNROUTED PLACEMENT STUDY

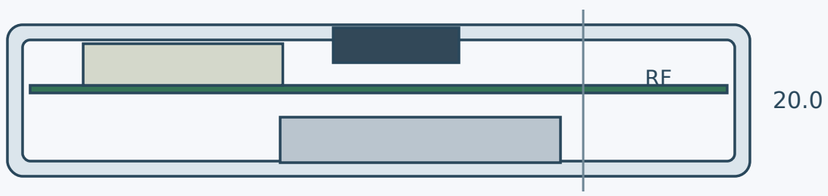

SECTION / enclosure1.6mm / PCB1.0mm

ASSEMBLY LIMITS

LCD selected; FP/body/connector fit needs actual samples.

Protected500mAh pack target:32x37x6mm incl PCM/NTC.

Polymer shell; four M2 fasteners; captive button plungers.

Tamper contact travel/preload must be measured, not assumed.

Target mass60-100g is a budget, not measured product weight.

No IP rating, physical-attack certification or battery-life claim.

REVIEW DRAWING / NO GERBER RELEASE / ASSEMBLY + RF + SECURITY TESTS PENDING