OPENKEYS / R0

MECHANICAL DESIGN REVIEW · 2026-11-08

44 × 88 × 16 mm

All dimensions in mm · connector/module envelopes provisional

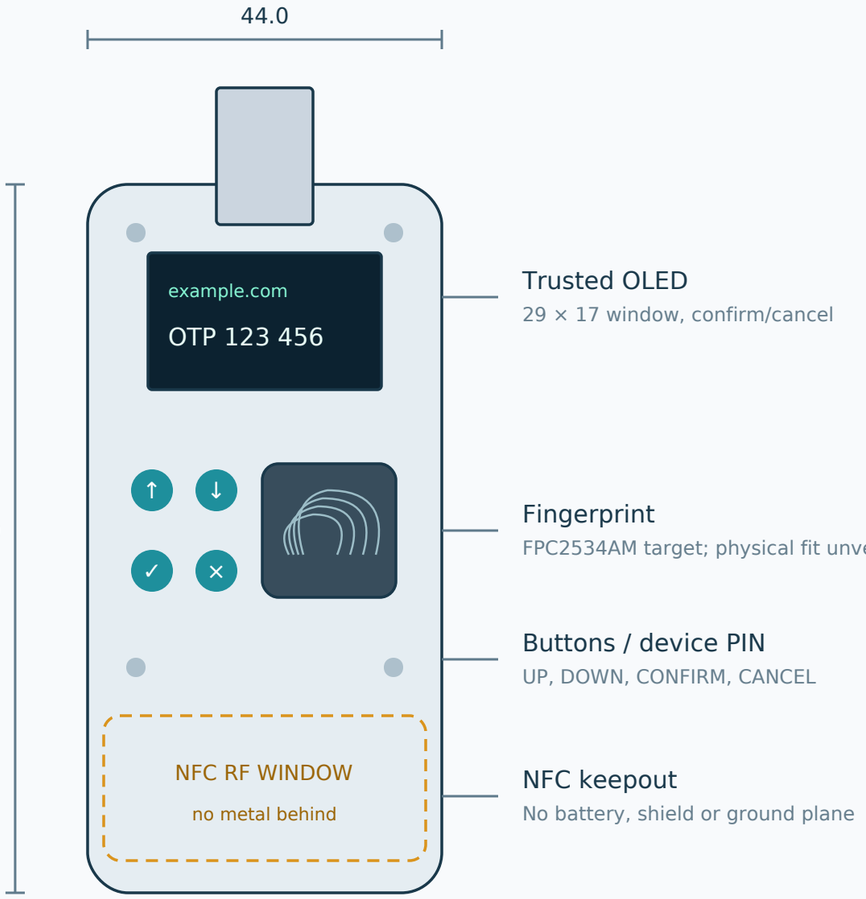

FRONT

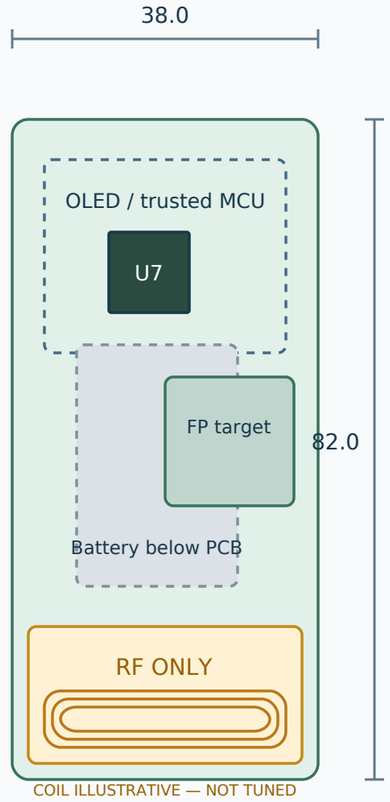

PCB PARTITION / 4 LAYERS

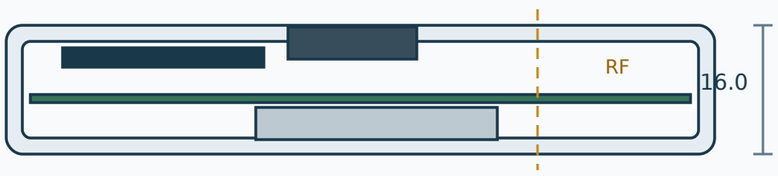

SECTION A–A · enclosure 1.6 mm / PCB 1.0 mm

ASSEMBLY NOTES

4 × M2 screw positions: (6,6), (38,6), (6,60), (38,60)

Base + lid + four captive plungers; PETG/ABS prototype

Protected 1S 200 mAh battery envelope: 20 × 30 × 4

NFC screen/fingerprint operation requires battery power

Pin order, connector cutouts, tolerance and drop tests pending

DESIGN REVIEW ONLY · NO GERBER RELEASE · NO CLAIM OF SCA / EMC / FIDO CERTIFICATION