



REVISONS		DESCRIPTION\DATE
ISS	SYMBOL	
A1		由BJ-7846-82BGTG001-R 轉來\08/17/06'
A2		更改 INSULATOR 材質標示為 PTFE\05/30\16'
A3		增加建議架設孔\07/18/17'

FOR CUSTOMER(WEB)



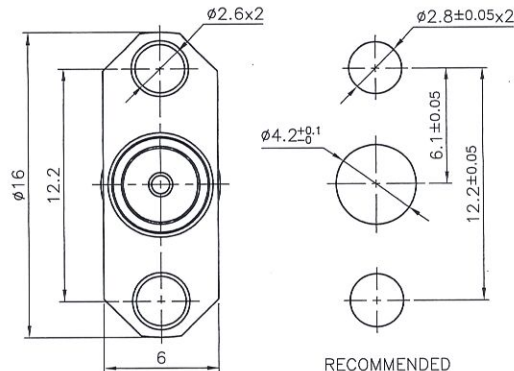

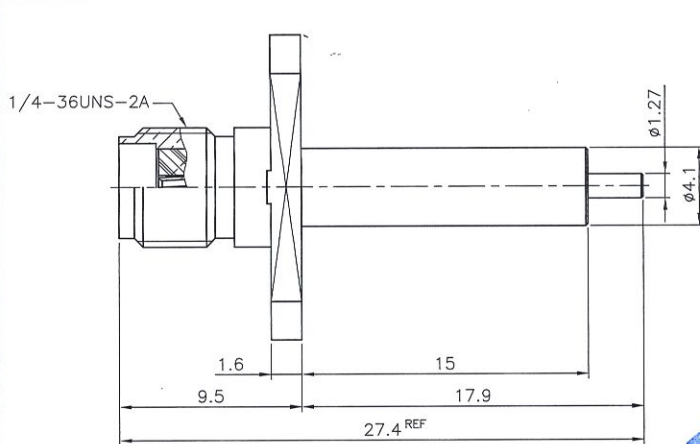

RECOMMENDED
MOUNTING HOLE
(建議架設孔)

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. BERYLLIUM COPPER PER QQ-C-530



HSF COMPLIANT

						DIMENSIONS ARE IN MILLIMETERS				PART NO.		 <div>帛江科技股份有限公司 BO-JIANG TECHNOLOGY CO., LTD.</div>			
						UNLESS OTHERWISE SPECIFIED TOLERANCES (一般公差)				APPROVED	DATE		TITLE SMA PANEL RECEPT JACK (EXPOSED PTFE)		
	LOCK RING	NOTE 1	NOTE 2			0.5~6 = ±0.2					07/18/17'			DRAWING NO. 7869ES507BD000B	
	INSULATOR	PTFE	WHITE			>6~30 = ±0.4				CHECKED	DATE				FILE NO. Z:\NND\7869\ES\507\000\7869ES507BD000B-A3
	CONTACT PIN	NOTE 4	NOTE 3			>30~120 = ±0.6									
	INSULATOR	PTFE	WHITE			>120~315 = ±1					07/18/17'				
	BODY	NOTE 1	NOTE 2			>315~1000 = ±1.6				DRAWN	DATE				
						ANGLES(角度) = ±5'					07/18/17'				
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	4/1	ISSUE	A3						