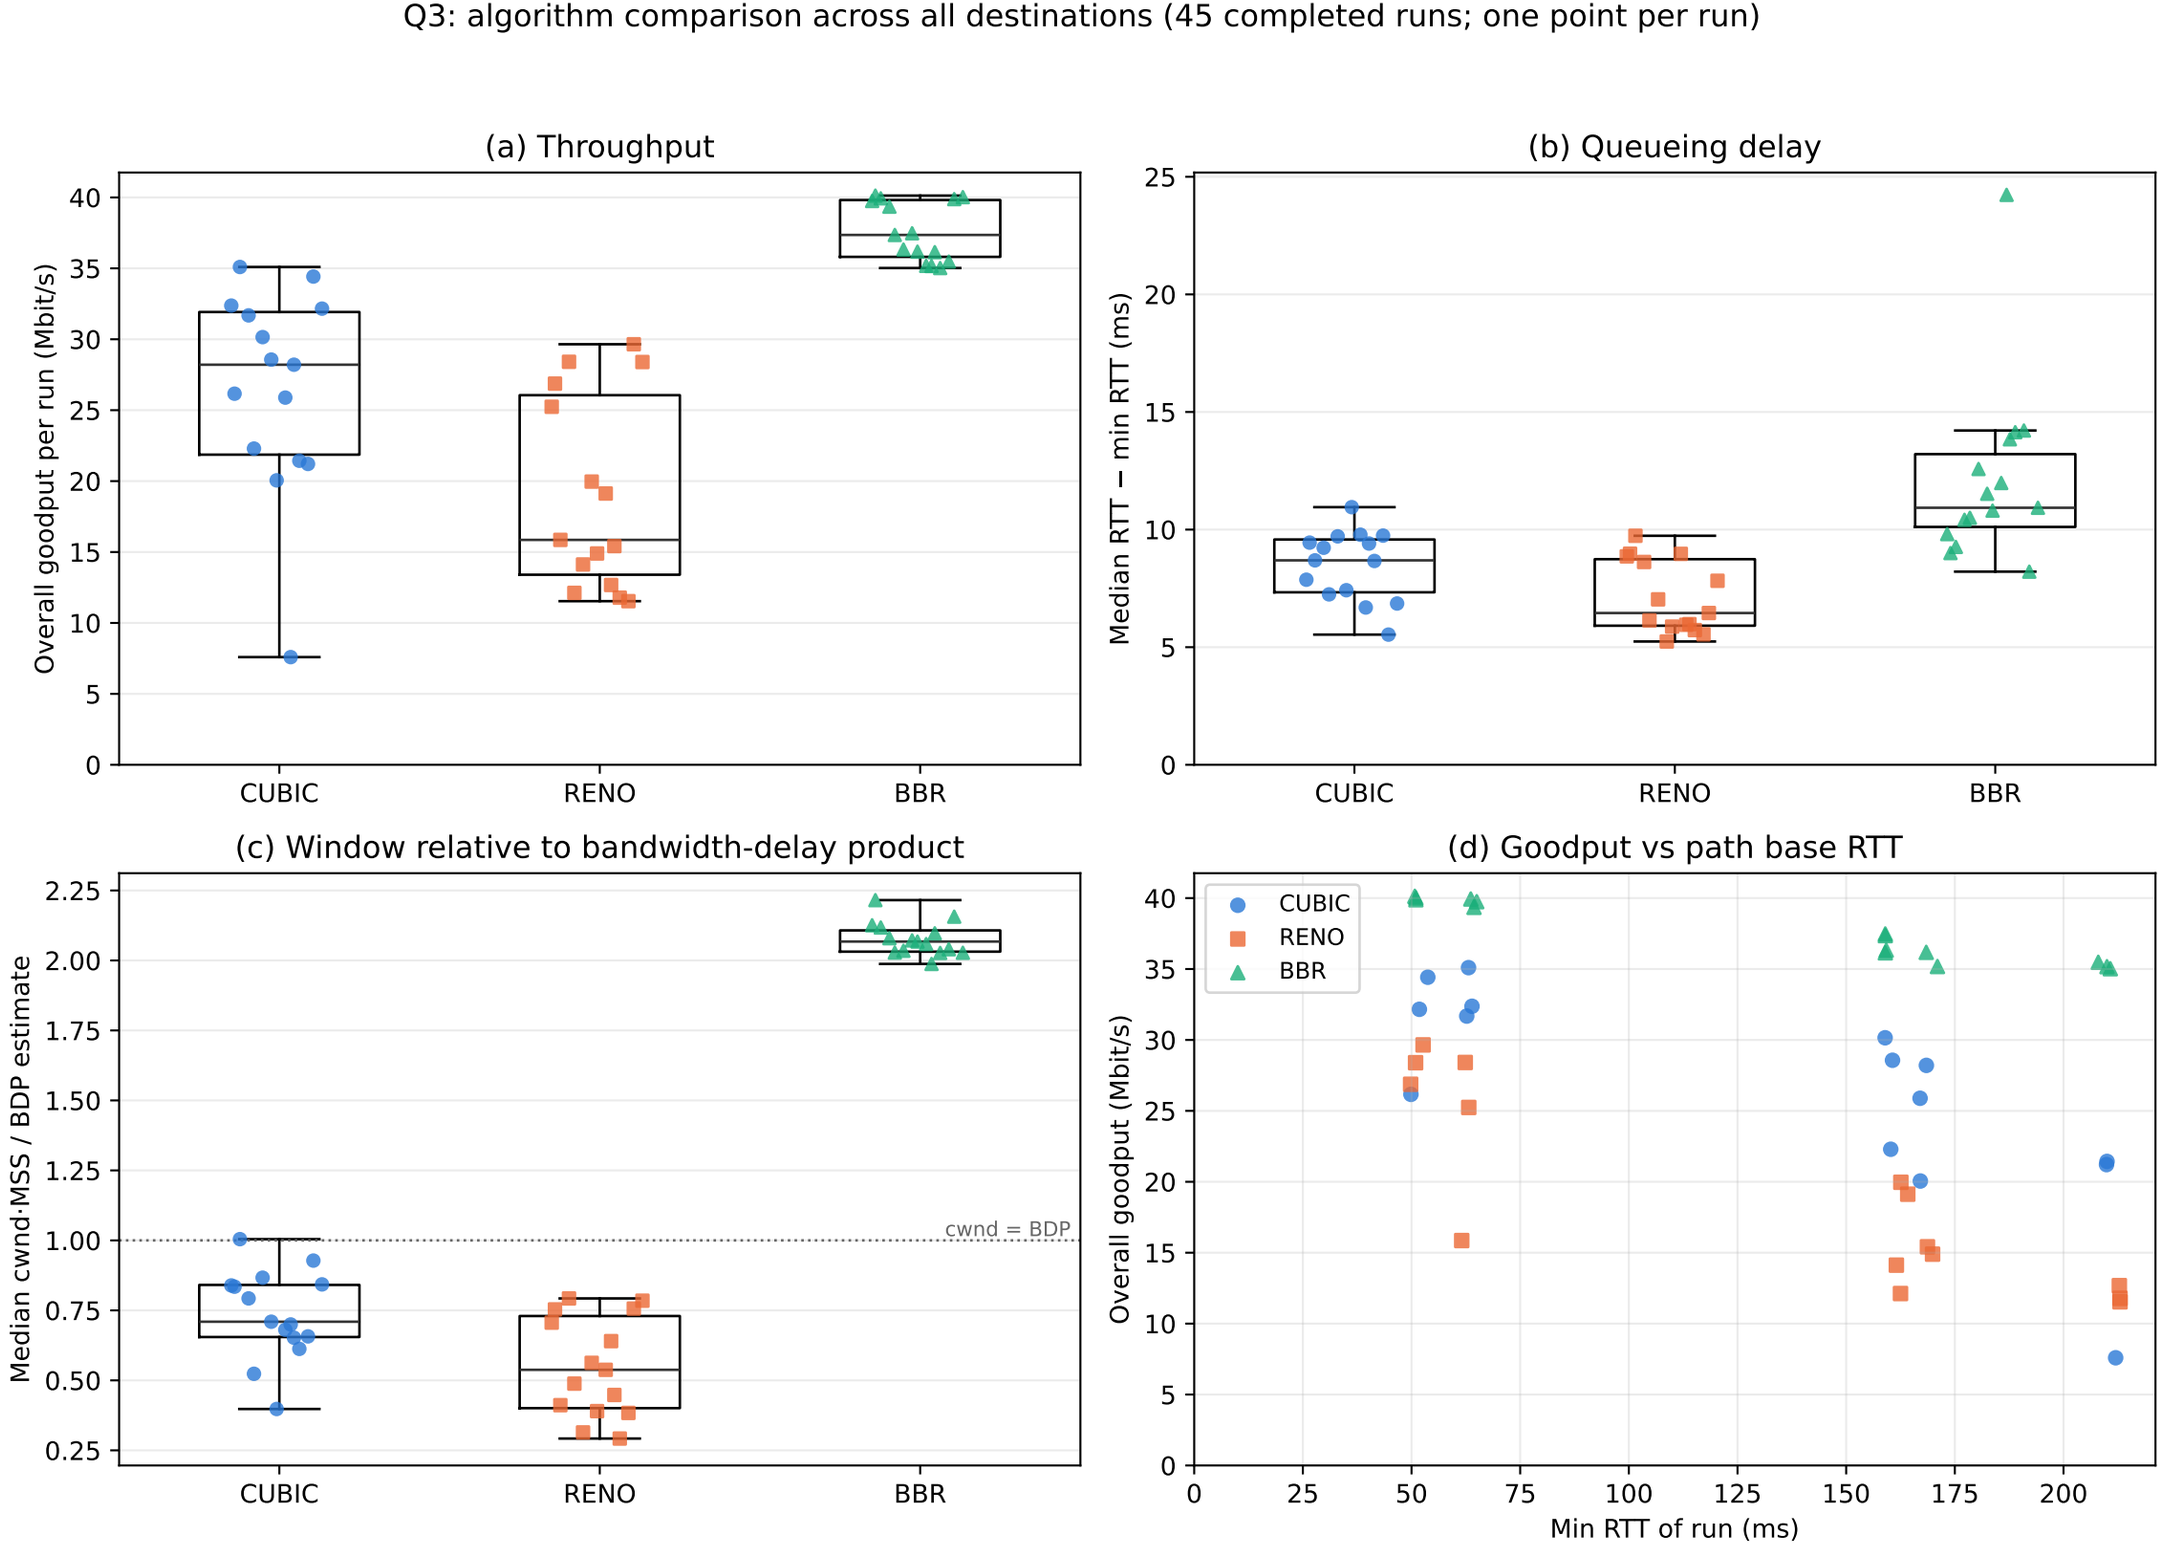
Q3: algorithm comparison across all destinations (45 completed runs; one point per run)
(a) Throughput
Overall goodput per run (Mbit/s)
0
5
10
15
20
25
30
35
40
CUBIC
RENO
BBR
(b) Queueing delay
Median RTT − min RTT (ms)
0
5
10
15
20
25
CUBIC
RENO
BBR
(c) Window relative to bandwidth-delay product
Median cwnd·MSS / BDP estimate
0.25
0.50
0.75
1.00
1.25
1.50
1.75
2.00
2.25
cwnd = BDP
CUBIC
RENO
BBR
(d) Goodput vs path base RTT
CUBIC
RENO
BBR
Overall goodput (Mbit/s)
0
5
10
15
20
25
30
35
40
0
25
50
75
100
125
150
175
200
Min RTT of run (ms)
BDP estimate = max kernel delivery rate × min RTT. Public paths change between runs.