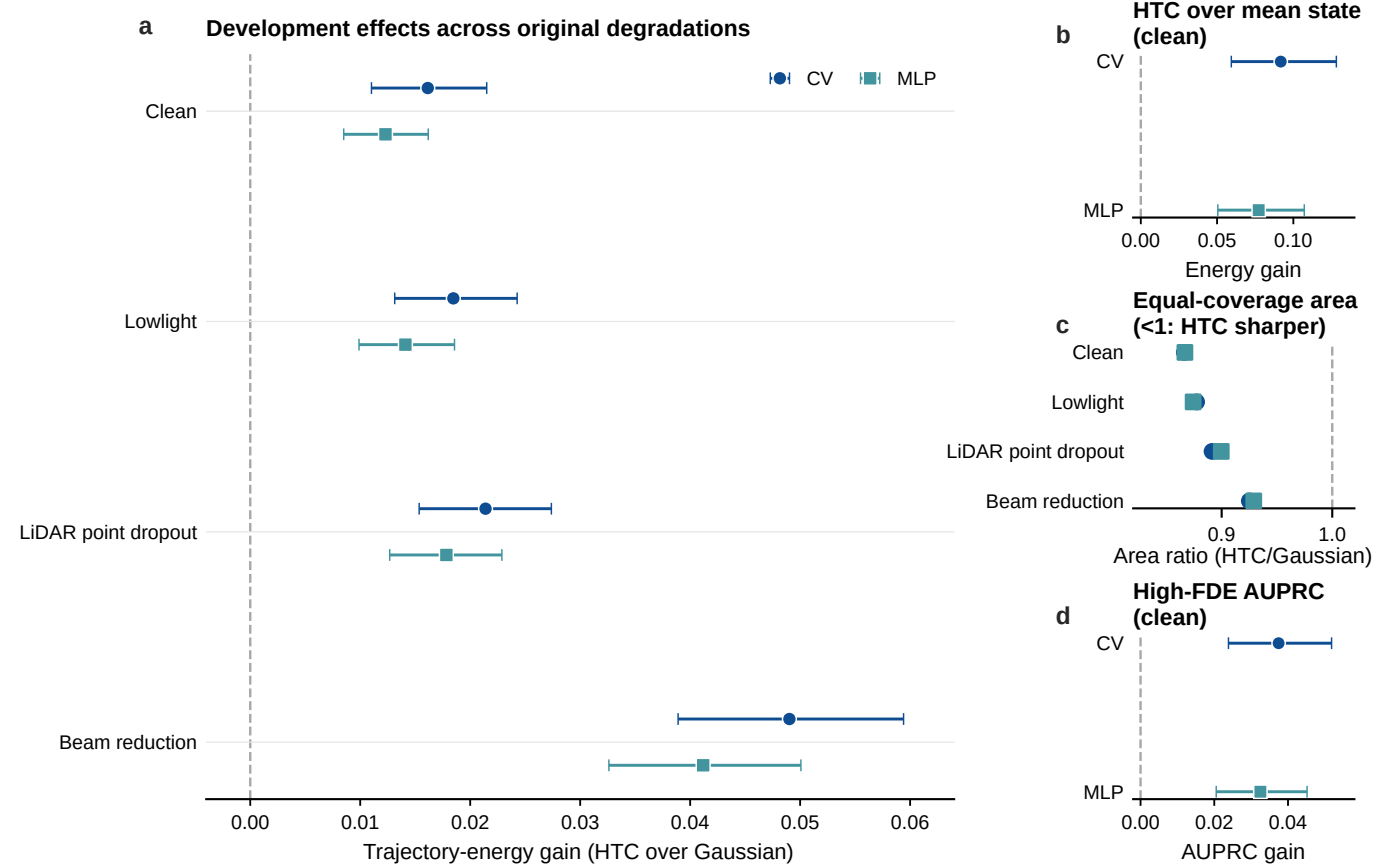
a
Development effects across original degradations
CV
MLP
Clean
Lowlight
LiDAR point dropout
Beam reduction
0.00
0.01
0.02
0.03
0.04
0.05
0.06
Trajectory-energy gain (HTC over Gaussian)
b
HTC over mean state (clean)
CV
MLP
0.00
0.05
0.10
Energy gain
c
Equal-coverage area (<1: HTC sharper)
Clean
Lowlight
LiDAR point dropout
Beam reduction
0.9
1.0
Area ratio (HTC/Gaussian)
d
High-FDE AUPRC (clean)
CV
MLP
0.00
0.02
0.04
AUPRC gain