


Proportional loading: 20 mm notches, shear/tension displacement ratio 0.6

(a) Shear response



(b) Normal response

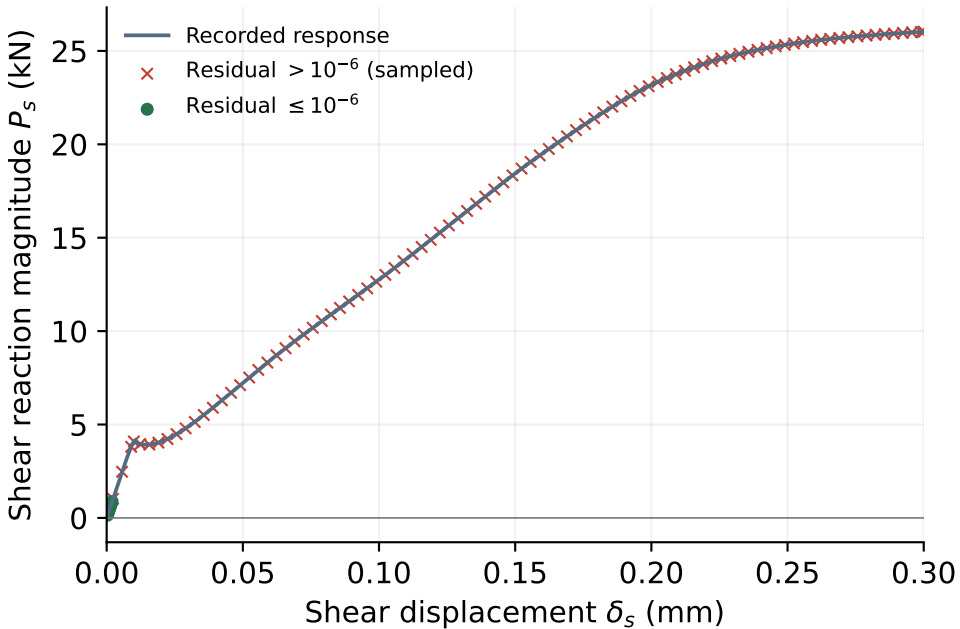