Baker Atlas

BAKER HUGHES

RESERVOIR CHARACTERIZATION INSTRUMENT SM SampleView SM GAMMA RAY LOG

FILE NO:		COMPANY	PEAK PETROLEUM INDUSTRIES NIGERIA LTD
API NO:	SCALE 1:200	WELL	BILABRI D3
		FIELD	BILABRI
		RIG NAME	BULFORD DOLPHIN

Ver. 3.87
FIELD PRINT
TIGHT HOLE

LOCATION:
NORTH: 515,558.23 M
EAST: 731,847.1 M

OTHER SERVICES
SPECTRALOG
HDIL/XMAC/GR
SWC/GR

PERMANENT DATUM	MSL	ELEVATION	0 M		
LOG MEASURED FROM	DF	25 M	ABOVE P.D.		
DRILL. MEAS. FROM	DF				

ELEVATIONS:
KB
DF 25 M
GL -145 M

DATE		27-OCT-2006			
RUN	TRIP	1	1		
SERVICE ORDER		NG543429			
DEPTH DRILLER		2555 M			
DEPTH LOGGER		N/A			
BOTTOM LOGGED INTERVAL		2544 M			
TOP LOGGED INTERVAL		2395 M			
CASING DRILLER		13.375 IN	@829 M	@	
CASING LOGGER		NOT LOGGED			
BIT SIZE		12.25 IN			
TYPE OF FLUID IN HOLE		OBM			
DENSITY	VISCOSITY	10.1 LB/G	63 S		
PH	FLUID LOSS	N/A	23 C3		
SOURCE OF SAMPLE		N/A			
RM AT MEAS. TEMP.		N/A	@N/A	@	
RMF AT MEAS. TEMP.		N/A	@N/A	@	
RMC AT MEAS. TEMP.		N/A	@N/A	@	
SOURCE OF RMF	RMC	N/A	N/A		
RM AT BHT		N/A	@N/A	@	
TIME SINCE CIRCULATION		56 HOURS			
MAX. RECORDED TEMP.		201.9 DEGF			
EQUIP. NO.	LOCATION	HSL-8706	PH		
RECORDED BY		T. OGILVIE / A. GREEFF			
WITNESSED BY		CHARLES OGBOBE			

IN MAKING INTERPRETATIONS OF LOGS OUR EMPLOYEES WILL GIVE CUSTOMER THE BENEFIT OF THEIR BEST JUDGEMENT. BUT SINCE ALL INTERPRETATIONS ARE OPINIONS BASED ON INFERENCES FROM ELECTRICAL OR OTHER MEASUREMENTS, WE CANNOT, AND WE DO NOT GUARANTEE THE ACCURACY OR CORRECTNESS OF ANY INTERPRETATION. WE SHALL NOT BE LIABLE OR RESPONSIBLE FOR ANY LOSS, COST, DAMAGES, OR EXPENSES WHATSOEVER INCURRED OR SUSTAINED BY THE CUSTOMER RESULTING FROM ANY INTERPRETATION MADE BY ANY OF OUR EMPLOYEES.

BOREHOLE RECORD		
BIT SIZE	FROM	TO
12.25 IN	840 M	2555.0 M

CASING RECORD				
SIZE	WEIGHT	GRADE	FROM	TO
13.375 IN	68 LB/F	K-55	0 M	829 M

REMARKS

RUN 1 TRIP 1 :

1. ALL TOOLS WERE CONVEYED ON WIRELINE.

2. DEPTH CORRELATED TO BAKER ATLAS HDIL/XMAC/ZDL/CN/GR LOGGED ON 27-OCT-2006.

3. 28 PRESSURE TESTS WERE PERFORMED:
   14 GOOD TESTS
   4 REPEAT TESTS
   4 TIGHT TESTS
   4 NO SEAL ATTEMPTS
   2 LOST SEAL ATTEMPTS

4. 6 SAMPLES WERE REQUESTED:
   6 SAMPLES ATTEMTED
   4 SAMPLES RECOVERED

SEE SAMPLE SUMMARY SHEET FOR DETAIL

5. PROBLEMS WITH LOSE OF SEAL WAS EXPERIENCED DURING SAMPELING.

EQUIPMENT DATA					
RUN	TRIP	TOOL	SERIES NO.	SERIAL NO.	POSITION
2	1	SWVL	3944XD	10194107	DECENTRALISED
2	1	DHPA	4430XB	179290	DECENTRALISED
2	1	TTRM	3981XA	10218739	DECENTRALISED
2	1	COMR	3514XB	10176836	DECENTRALISED
2	1	GR	1329XB	10194153	DECENTRALISED
2	1	ORIT	4401XB	167794	DECENTRALISED
2	1	RCI	1970CB	154328	STAND-OFF
2	1	RCI	1970EB	189725	STAND-OFF
2	1	RCI	1970WA	369659	STAND-OFF
2	1	RCI	1970IB	369821	STAND-OFF
2	1	RCI	1970OB	10161283	STAND-OFF
2	1	RCI	1970RB	179653	STAND-OFF
2	1	RCI	1970BB	189606	STAND-OFF
2	1	RCI	1970MB	10164195	STAND-OFF
2	1	RCI	1972XA	10061656	FREE

INSTRUMENT CONFIGURATION

Source File: /dat1a/peak/bilabari_D3/j800g~peakRCI-tdg

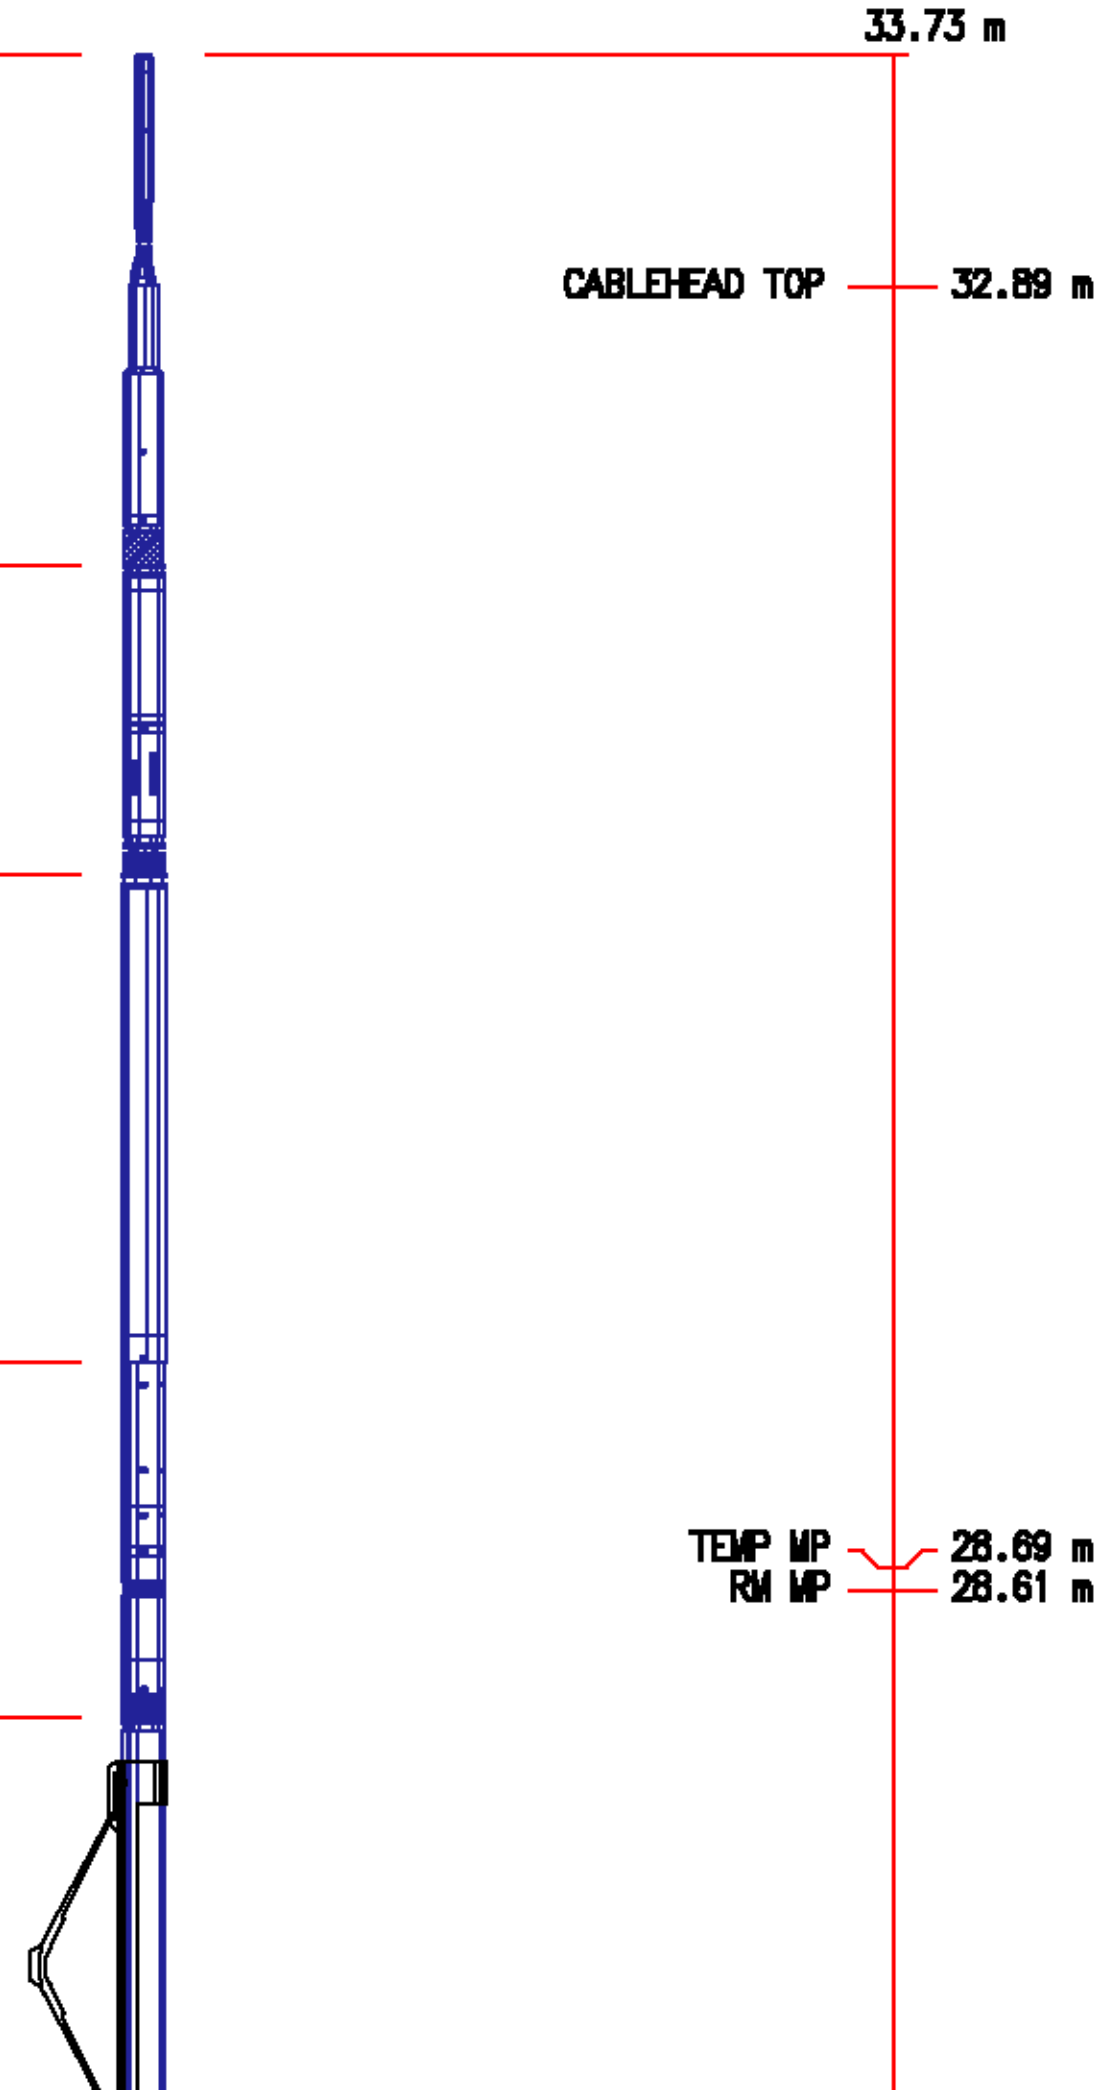

CABLEHEAD
Series : CABL338
Mnemonic : CBLH
Diameter : 3.38"
Weight : 10.9 kg
Length : 167.6 cm
Measure Point: 83.8 cm: CABLEHEAD TOP

SWIVEL
Series : 3944XB
Mnemonic : SWVL
Diameter : 3.38"
Weight : 29.5 kg
Length : 101.6 cm

DOWNHOLE POWER ADAPTER
Series : 4430XA
Mnemonic : DHPA
Diameter : 3.62"
Weight : 36.4 kg
Length : 160.7 cm

TTRM SUB
Series : 3981XA
Mnemonic : TTRM
Diameter : 3.63"
Weight : 36.4 kg
Length : 116.8 cm
Measure Point: 42.2 cm: TEMP MP
Measure Point: 34.5 cm: RM MP

WTS COMMON REMOTE
Series : 3514XB
Mnemonic : WTS
Diameter : 3.63"
Weight : 65.5 kg
Length : 189.5 cm

DIGITAL SPECTRALOG
Series : 1329XA
Mnemonic : DSL
Diameter : 3.63"
Weight : 64.5 kg
Length : 222.8 cm
Measure Point: 46.8 cm: GR MP

GR MP — 24.63 m

DIGITAL ORIENTATION
Series : 4401XB
Mnemonic : ORIT
Diameter : 3.38"
Weight : 53.6 kg
Length : 329.4 cm
Measure Point: 0.0 cm: ORIENT MP

ORIENT MP — 20.85 m

RCI HYDRAULIC POWER SECTION
Series : 1970CB
Mnemonic : RCI
Diameter : 4.75"
Weight : 113.6 kg
Length : 330.9 cm

RCI ELECTRONICS SECTION
Series : 1970EB
Mnemonic : RCI
Diameter : 4.38"
Weight : 45.5 kg
Length : 112.0 cm

RCI SIX TANK SECTION (A)
Series : 1970WA
Mnemonic : RCI
Diameter : 4.75"
Weight : 141.8 kg
Length : 393.7 cm

RCI FLUID CHARACTERIZATION WITH FLUOR
Series : 1970IB
Mnemonic : NIR
Diameter : 4.87"
Weight : 90.9 kg
Length : 309.4 cm

RCI AUX POWER SECTION
Series : 19700B
Mnemonic : RCI
Diameter : 4.87"
Weight : 61.8 kg
Length : 133.6 cm

RCI PUMPTHRU SECTION
Series : 1970RB
Mnemonic : RCI
Diameter : 4.75"
Weight : 113.6 kg
Length : 240.4 cm

RCI DRAW DOWN SECTION
Series : 1970BB
Mnemonic : RCI
Diameter : 4.75"
Weight : 113.6 kg
Length : 233.7 cm

RCI SINGLE PACKER SECTION
Series : 1970MB
Mnemonic : RCI
Diameter : 4.75"
Weight : 155.5 kg
Length : 290.7 cm
Measure Point: 38.1 cm: PACKER MP

RCI WTS CROSSOVER SUB
Series : 1972XA

BULL PLUG 3 1/8

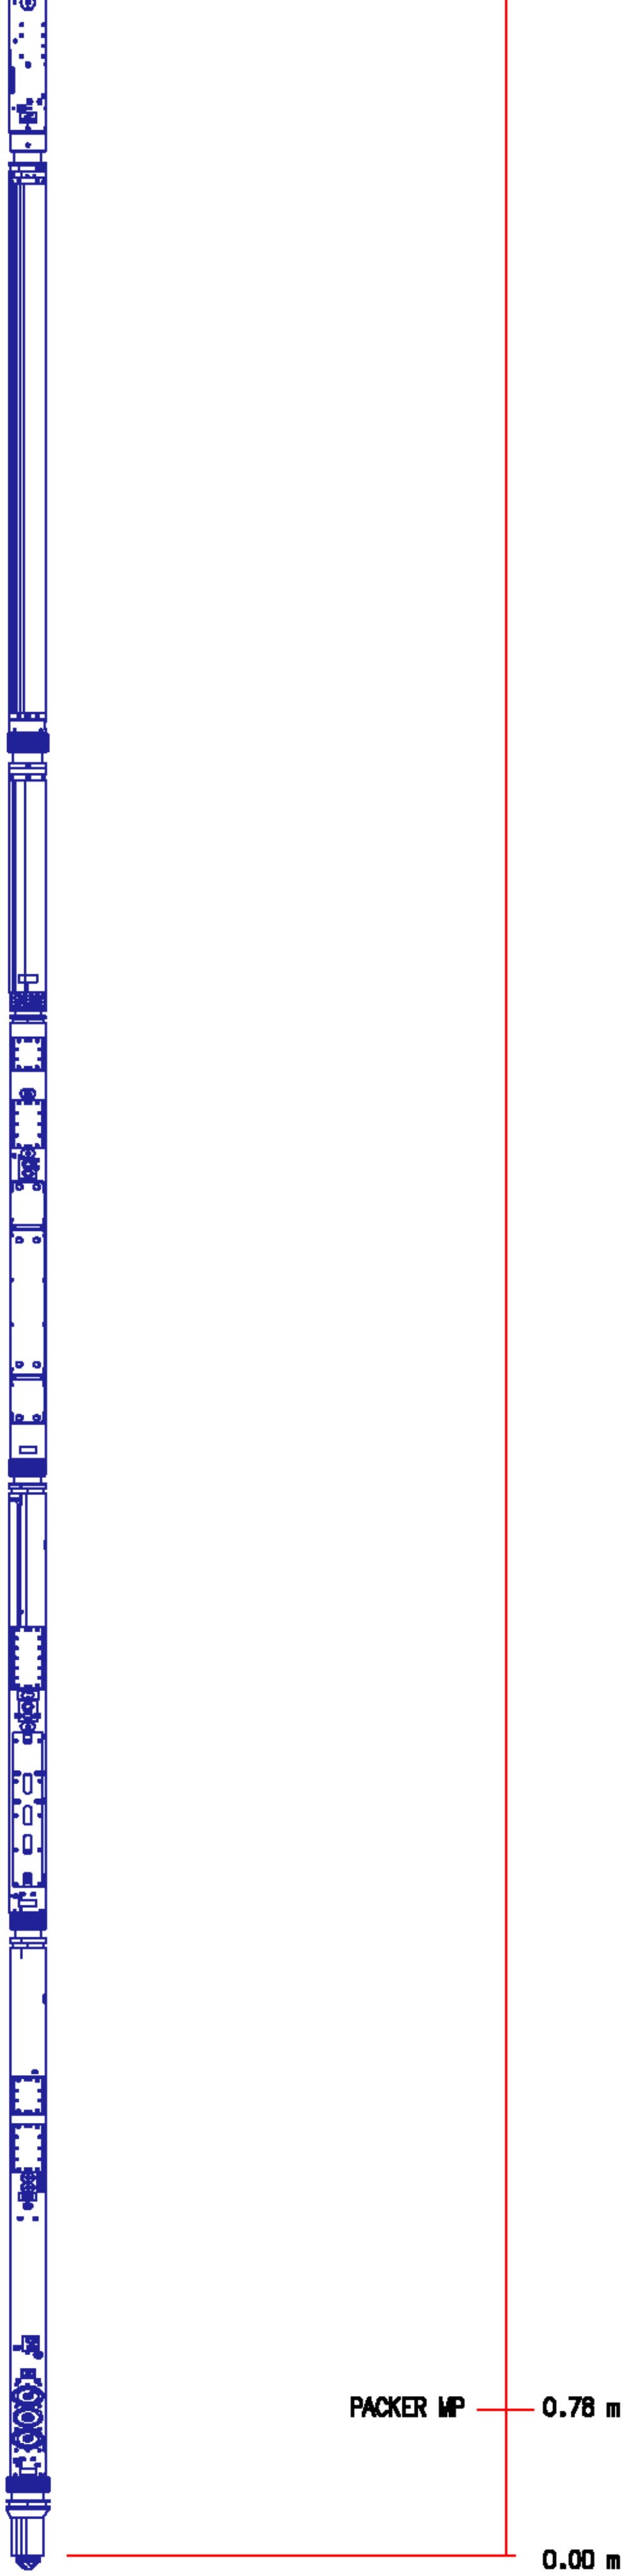

TOTAL LENGTH: 33.80 m
TOTAL WEIGHT: 1161.4 kg
MAX DIAMETER: 0'4.87"

RCI SAMPLE SUMMARY REPORT

Company Name	PEAK PETROLEUM
Well Name	BILABARI D3
Field	
Report Date/Time	29-OCT-2006

Run	2
Operation	RCI
Trip	1

Packer Type	
Packer Kit Type	G5
Filter Size	
Temp Reference (APQK/APQL/PVTT/Other)	RTDMB

Rubber Durometer	
Packer Kit Size	17.5"
Pump Size	56.7cc & 500cc

Group	Field	Sample 1	Sample 2	Sample 3
General	Sample Number	1	2	3
	Tank Serial Number	190381	190579	369047
	File Number	39	43	62
	MD (M)	2418.00	2416.27	2414.2
	TVD (M)	2418	2416.27	2414.2
	Hydrostatic Pressure (PSI)	4266.09	4257.66	4253.9
	Date/Time	28-OCT-2006/05:45	28-OCT-2006/07:30	28-OC
Clean Out	FBU Pretest (PSI)	3759.29	3759.55	3757.6
	Min. Obs. Pressure (PSI)	3747.87	3749.59	3295.4
	Initial Temp (F)	196.729	198.0	199.1
	Volume (L)	9.5	17.5	5.5
	Time Elapsed (sec)	2857	3629	2472
	Fluid ID Method (SampleView or RC)	SampleView	SampleView	Sample
Tank Filling	Min. Obs. Pressure (PSI)	3747.87	3749.59	3295.4
	Tank Closing Pressure (PSI)	7820	7820	7815
	Final Temp at Closing (F)	197.6	198.6	199.8
	Time to Fill (sec)	387	453	325
	Volume Pumped (CC)	1714	2441	1355
	Tank Size (CC)	840	840	840
	Initial N2 Charge (PSI) @ Temp (F)	/	/	
Sample Recovery	Opening Pressure (PSI) @ Temp (F)	/	/	
	Sample Transferred (Yes/No)			
	Final N2 Charge (PSI) @ Temp (F)	/	/	
	Comments			

	4	5
7	369107	369112
	77	77
24	2415.02	2415.02
24	2415.02	2415.02
01	4244.34	4244.34
T-2006/11:45	28-OCT-2006/17:00	28-OCT-2006/17:00
39	3758.89	3758.89
.5	3727.95	3727.95
	200.1	200.1
	11.60	0
	3432	3432
eView	SampleView	SampleView
.5	3727.95	3727.95
	7820	7820
	202.6	202.6
	283	343
	1436	1708
	840	840
/	/	/
/	/	/
/	/	/
	Filled tank 4 & 5 at 2415.02m.	Filled tank 4 & 5 at 2415.02m.

Source File: /dat1a/peak/bilabari_D3/fta.10272006.181205.BAK.bin.pcf

Pressure Summary Section

REALTIME FTA PRESSURE TEST SUMMARY

Depth Range MD 2395.1 m – 2544.0 m TVD 2395.1 m – 2544.0 m

Company: PEAK PETROLEUM **Field:** BILABRI
Date/Time: 10/29/2006 1:14 AM **Well:** BILABRI D3
Tool Instance: 1
FTA Data File: /dat1a/peak/bilabari_D3/fta.10272006.181205.BAK.bin

Tool Level	Test	File	Depth MD (m)	Depth TVD (m)	Gauge Temp. (degF)	DD Vol. (cm3)	Flow Time (sec)	Minimum Pressure (psia)	Final BU Pressure (psia)	DD Mobility (mD/cP)	Hydro. Before (psia)	Test Comment
2	3	g03	2395.1	2395.1	188.5	N/A	N/A	N/A	N/A	N/A	4238.00	Tight Test
3	9	g04	2401.0	2401.0	189.0	N/A	N/A	N/A	N/A	N/A	4246.84	Tight Test
4	13	g05	2403.9	2403.9	189.2	N/A	N/A	N/A	N/A	N/A	4249.99	Tight Test
5	22	g06	2412.1	2412.1	189.8	5.1	1.2	2761.19	3757.05	22.05	4263.53	Good Test
5	25	g06	2412.1	2412.1	189.8	4.6	1.1	3645.24	3757.03	220.1	4263.53	Repeat Test
6	27	g08	2413.0	2413.0	190.1	N/A	N/A	N/A	N/A	N/A	4257.35	No Seal
7	45	g09	2413.6	2413.6	190.5	9.2	1.5	3718.13	3758.25	763.6	4258.45	Good Test
7	48	g09	2413.6	2413.6	190.6	9.3	1.5	3719.65	3758.44	766.7	4258.45	Repeat Test
8	61	g10	2415.0	2415.0	191.0	14.6	2.1	3741.74	3759.55	1731	4260.44	Good Test
9	66	g11	2416.0	2416.0	191.3	N/A	N/A	N/A	N/A	N/A	4262.03	Tight Test
10	81	g12	2416.5	2416.5	191.7	14.6	2.1	3666.75	3760.02	337.3	4263.09	Good Test
11	94	g14	2417.5	2417.5	192.9	14.5	1.9	3502.20	3760.14	126.4	4265.13	Good Test
12	104	g15	2420.1	2420.1	193.2	13.9	1.9	3752.16	3761.25	3690	4269.58	Good Test
12	107	g15	2420.1	2420.1	193.2	14.3	1.9	3752.27	3761.29	4172	4269.58	Repeat Test

13	109	g16	2424.4	2424.4	193.3	N/A	N/A	N/A	N/A	N/A	4277.86	Lost Seal
14	118	g17	2425.0	2425.0	193.5	14.7	1.9	3723.27	3768.52	872.6	4278.75	Good Test
15	126	g18	2431.0	2431.0	193.5	N/A	N/A	N/A	N/A	N/A	4290.16	No Seal
16	130	g19	2430.5	2430.5	193.5	N/A	N/A	N/A	N/A	N/A	4288.46	No Seal
17	139	g20	2437.5	2437.5	193.6	14.9	1.8	3772.86	3786.27	2954	4302.82	Good Test
17	142	g20	2437.5	2437.5	193.6	14.9	1.9	3776.56	3786.27	4086	4302.82	Repeat Test
18	155	g22	2454.6	2454.6	194.4	14.8	1.6	3776.57	3809.33	1210	4332.45	Good Test
32	261	g39	2418.0	2418.0	198.3	14.1	2.0	3747.87	3759.29	2557	4266.09	Good Test
35	278	g43	2416.3	2416.3	199.2	13.9	1.1	3749.59	3759.55	3292	4257.66	Good Test
52	395	g62	2414.3	2414.3	200.3	14.9	2.9	3295.45	3757.69	47.98	4253.91	Good Test
55	418	g66	2514.1	2514.1	200.5	15.0	2.2	3880.88	3891.81	2346	4443.49	
56	423	g67	2544.0	2544.0	200.3	N/A	N/A	N/A	N/A	N/A	4495.89	Lost Seal
64	509	g77	2415.0	2415.0	200.8	9.1	1.9	3727.95	3758.89	666.7	4244.34	Good Test
65	513	g79	2411.1	2411.1	201.9	N/A	N/A	N/A	N/A	N/A	4240.60	No Seal

Summary Notes:

MD – Measured Depth
TVD – True Vertical Depth
A) Permeability can be calculated by multiplying mobility with fluid viscosity.
B) Drawdown Rate is calculated using maximum piston rate during drawdown.
C) Gauge temperature is the internal temperature of the quartz gauge which is not intended to represent fluid or sample line fluid temperatures.

Tests Section

Pressure Tests – Level 5 Tool Instance 1
MD 2412.1 m TVD 2412.1 m

PRESSURE HISTORY

Depth MD 2412.1 m TVD 2412.1 m

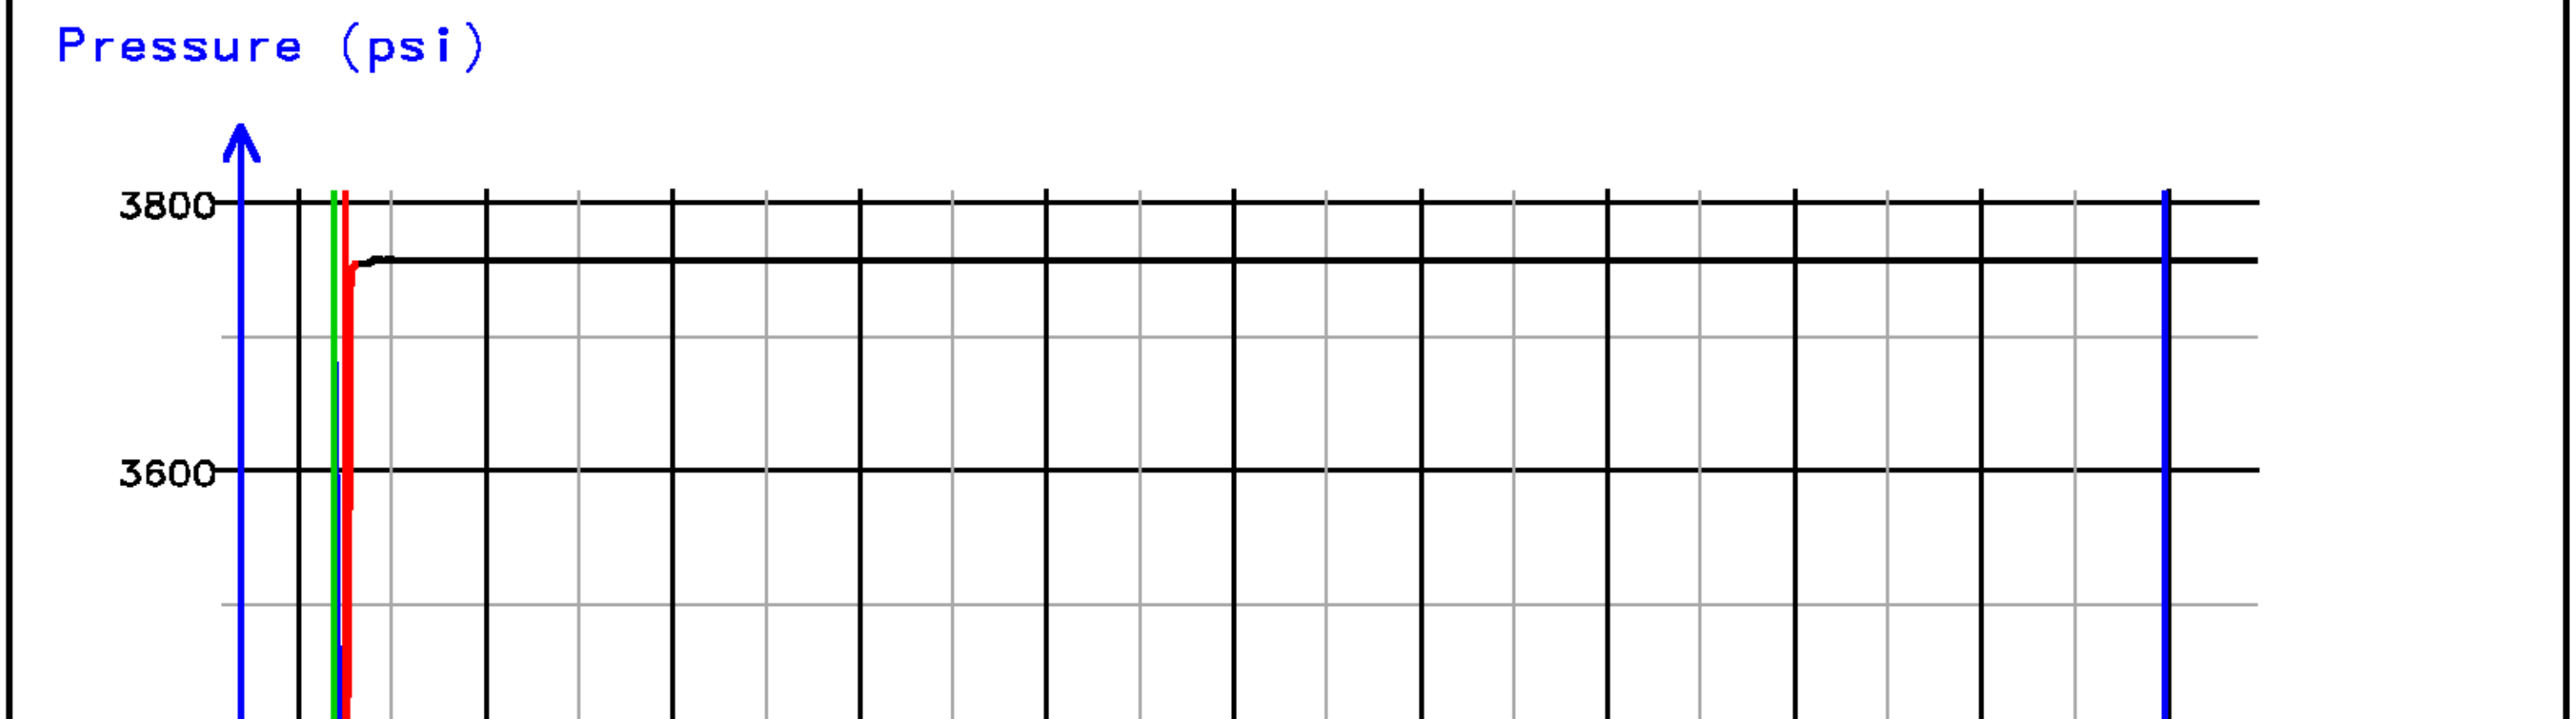

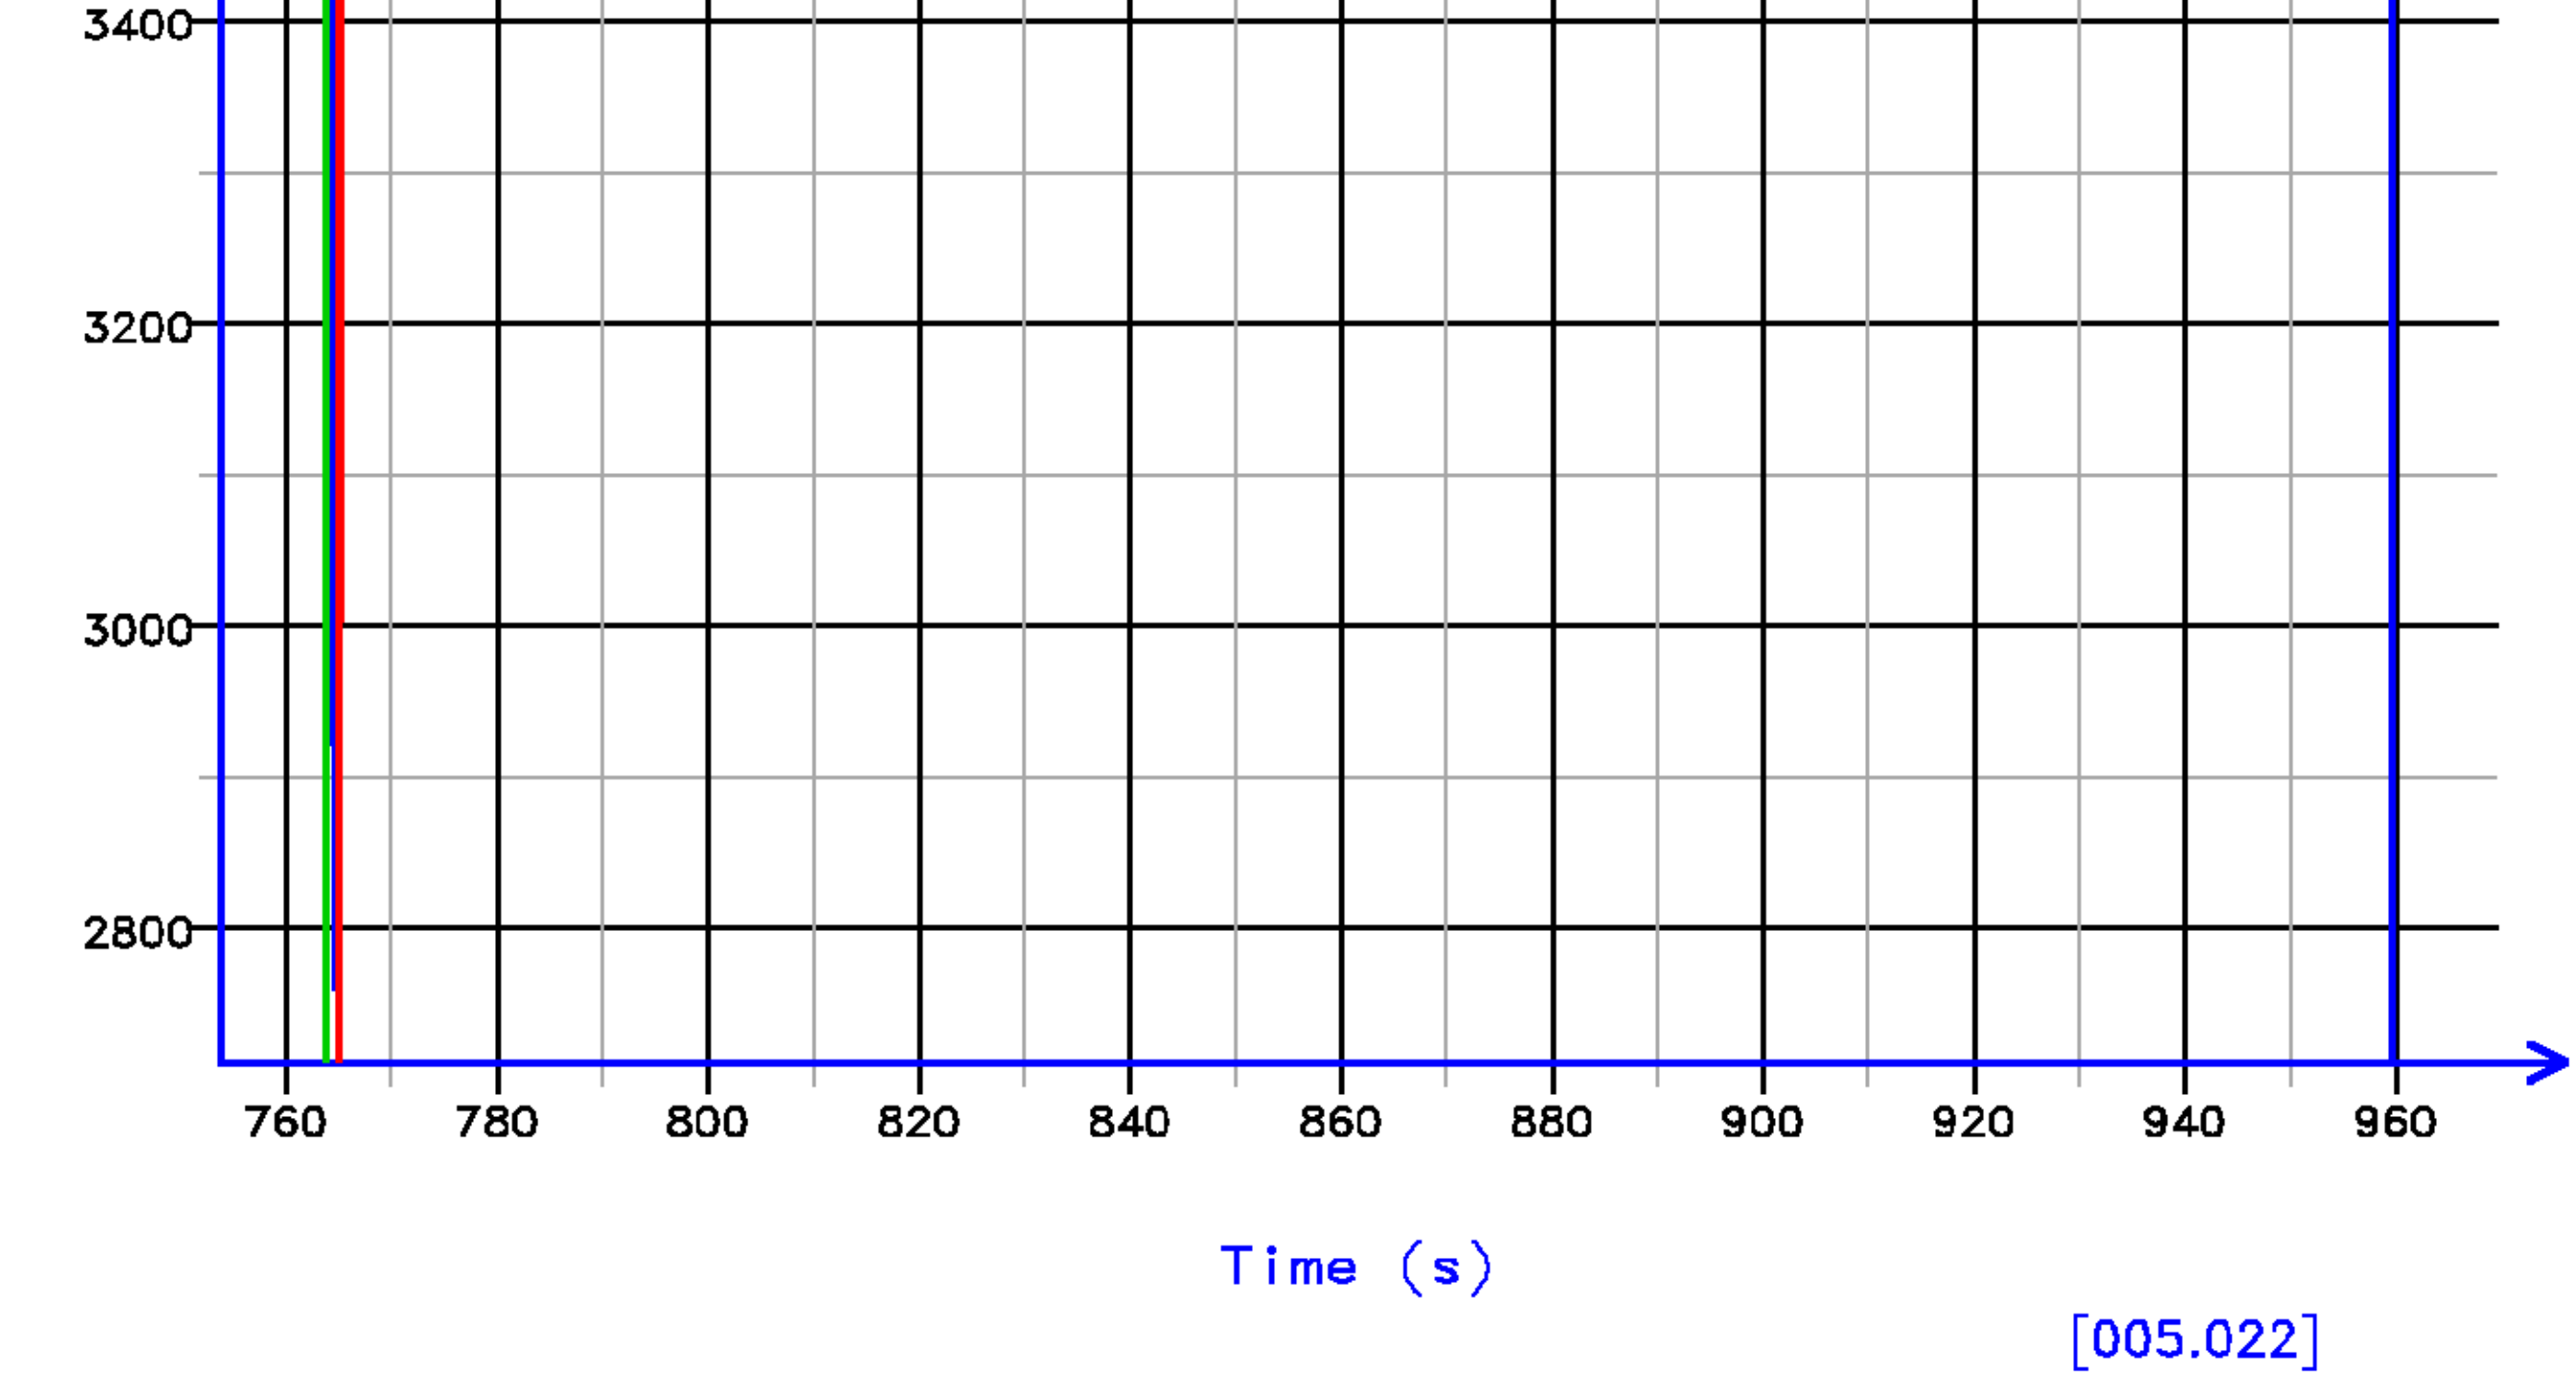

FLOW RATE ANALYSIS

Depth MD 2412.1 m TVD 2412.1 m

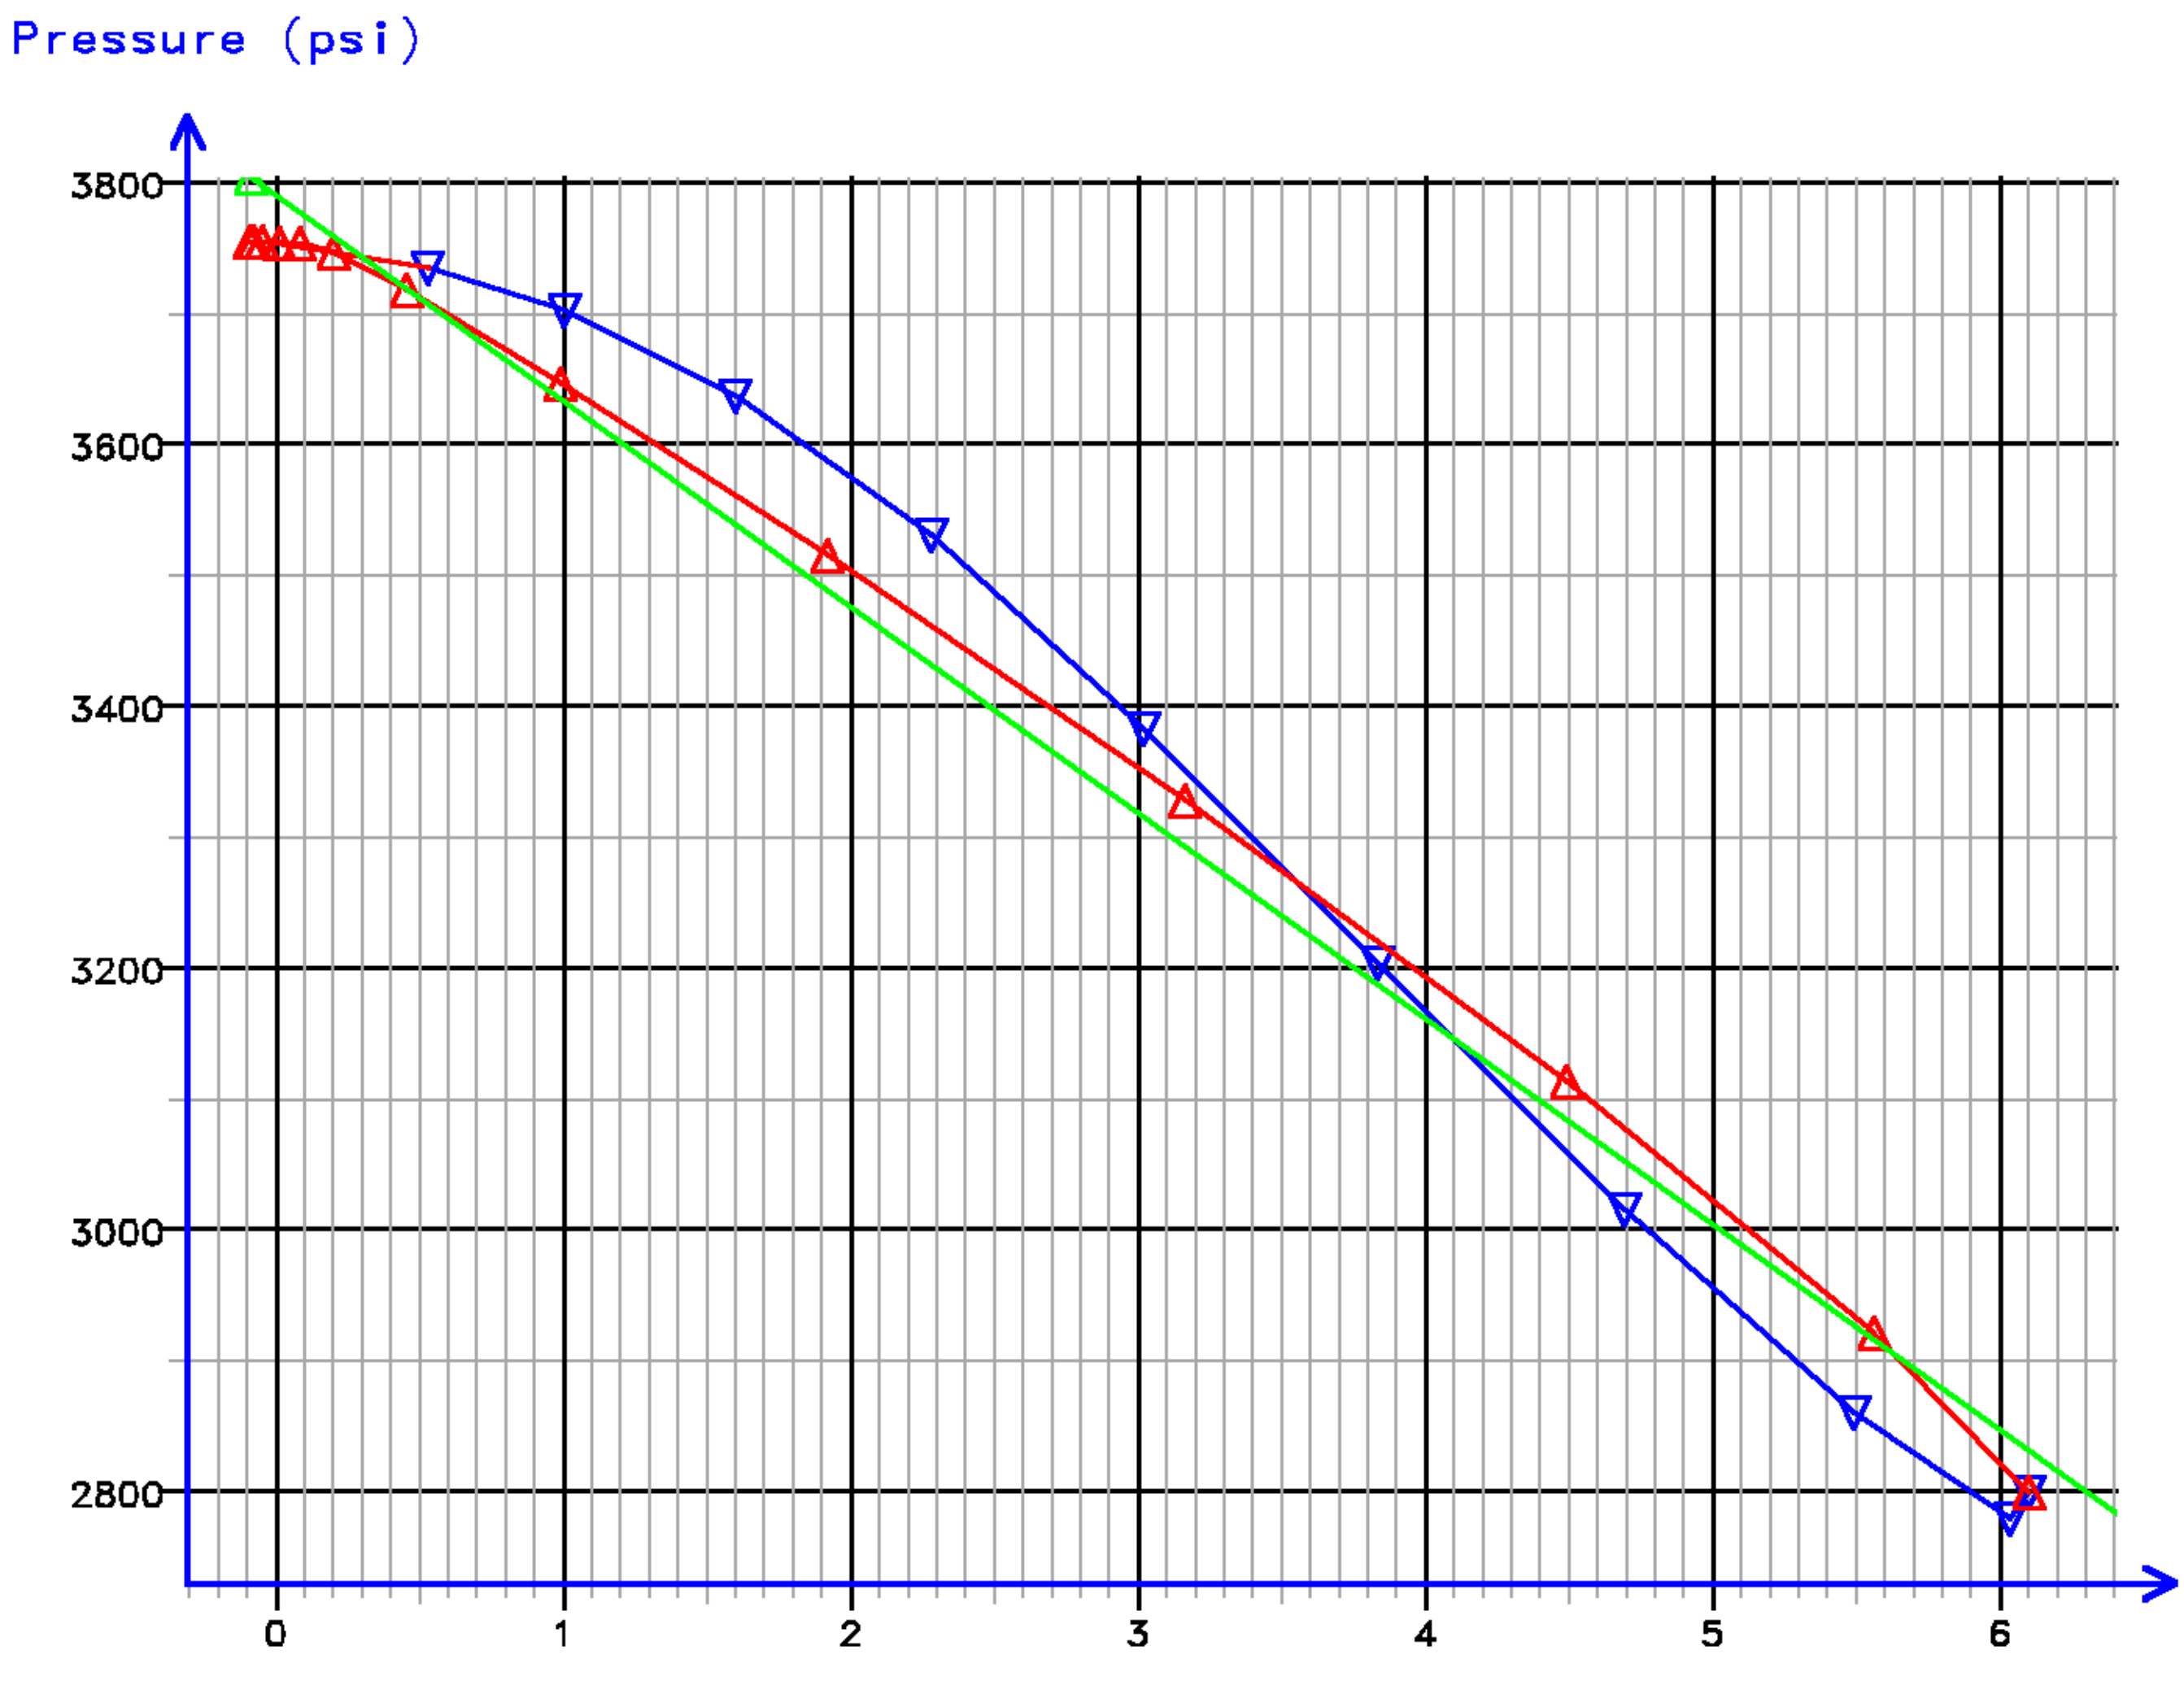

Flow Rate (cm3/s)
Kfra 21.912 (mD/cP), Kddu 22.054 (mD/cP) Confidence 98.07% [005.022]

PRESSURE HISTORY

Depth MD 2412.1 m TVD 2412.1 m

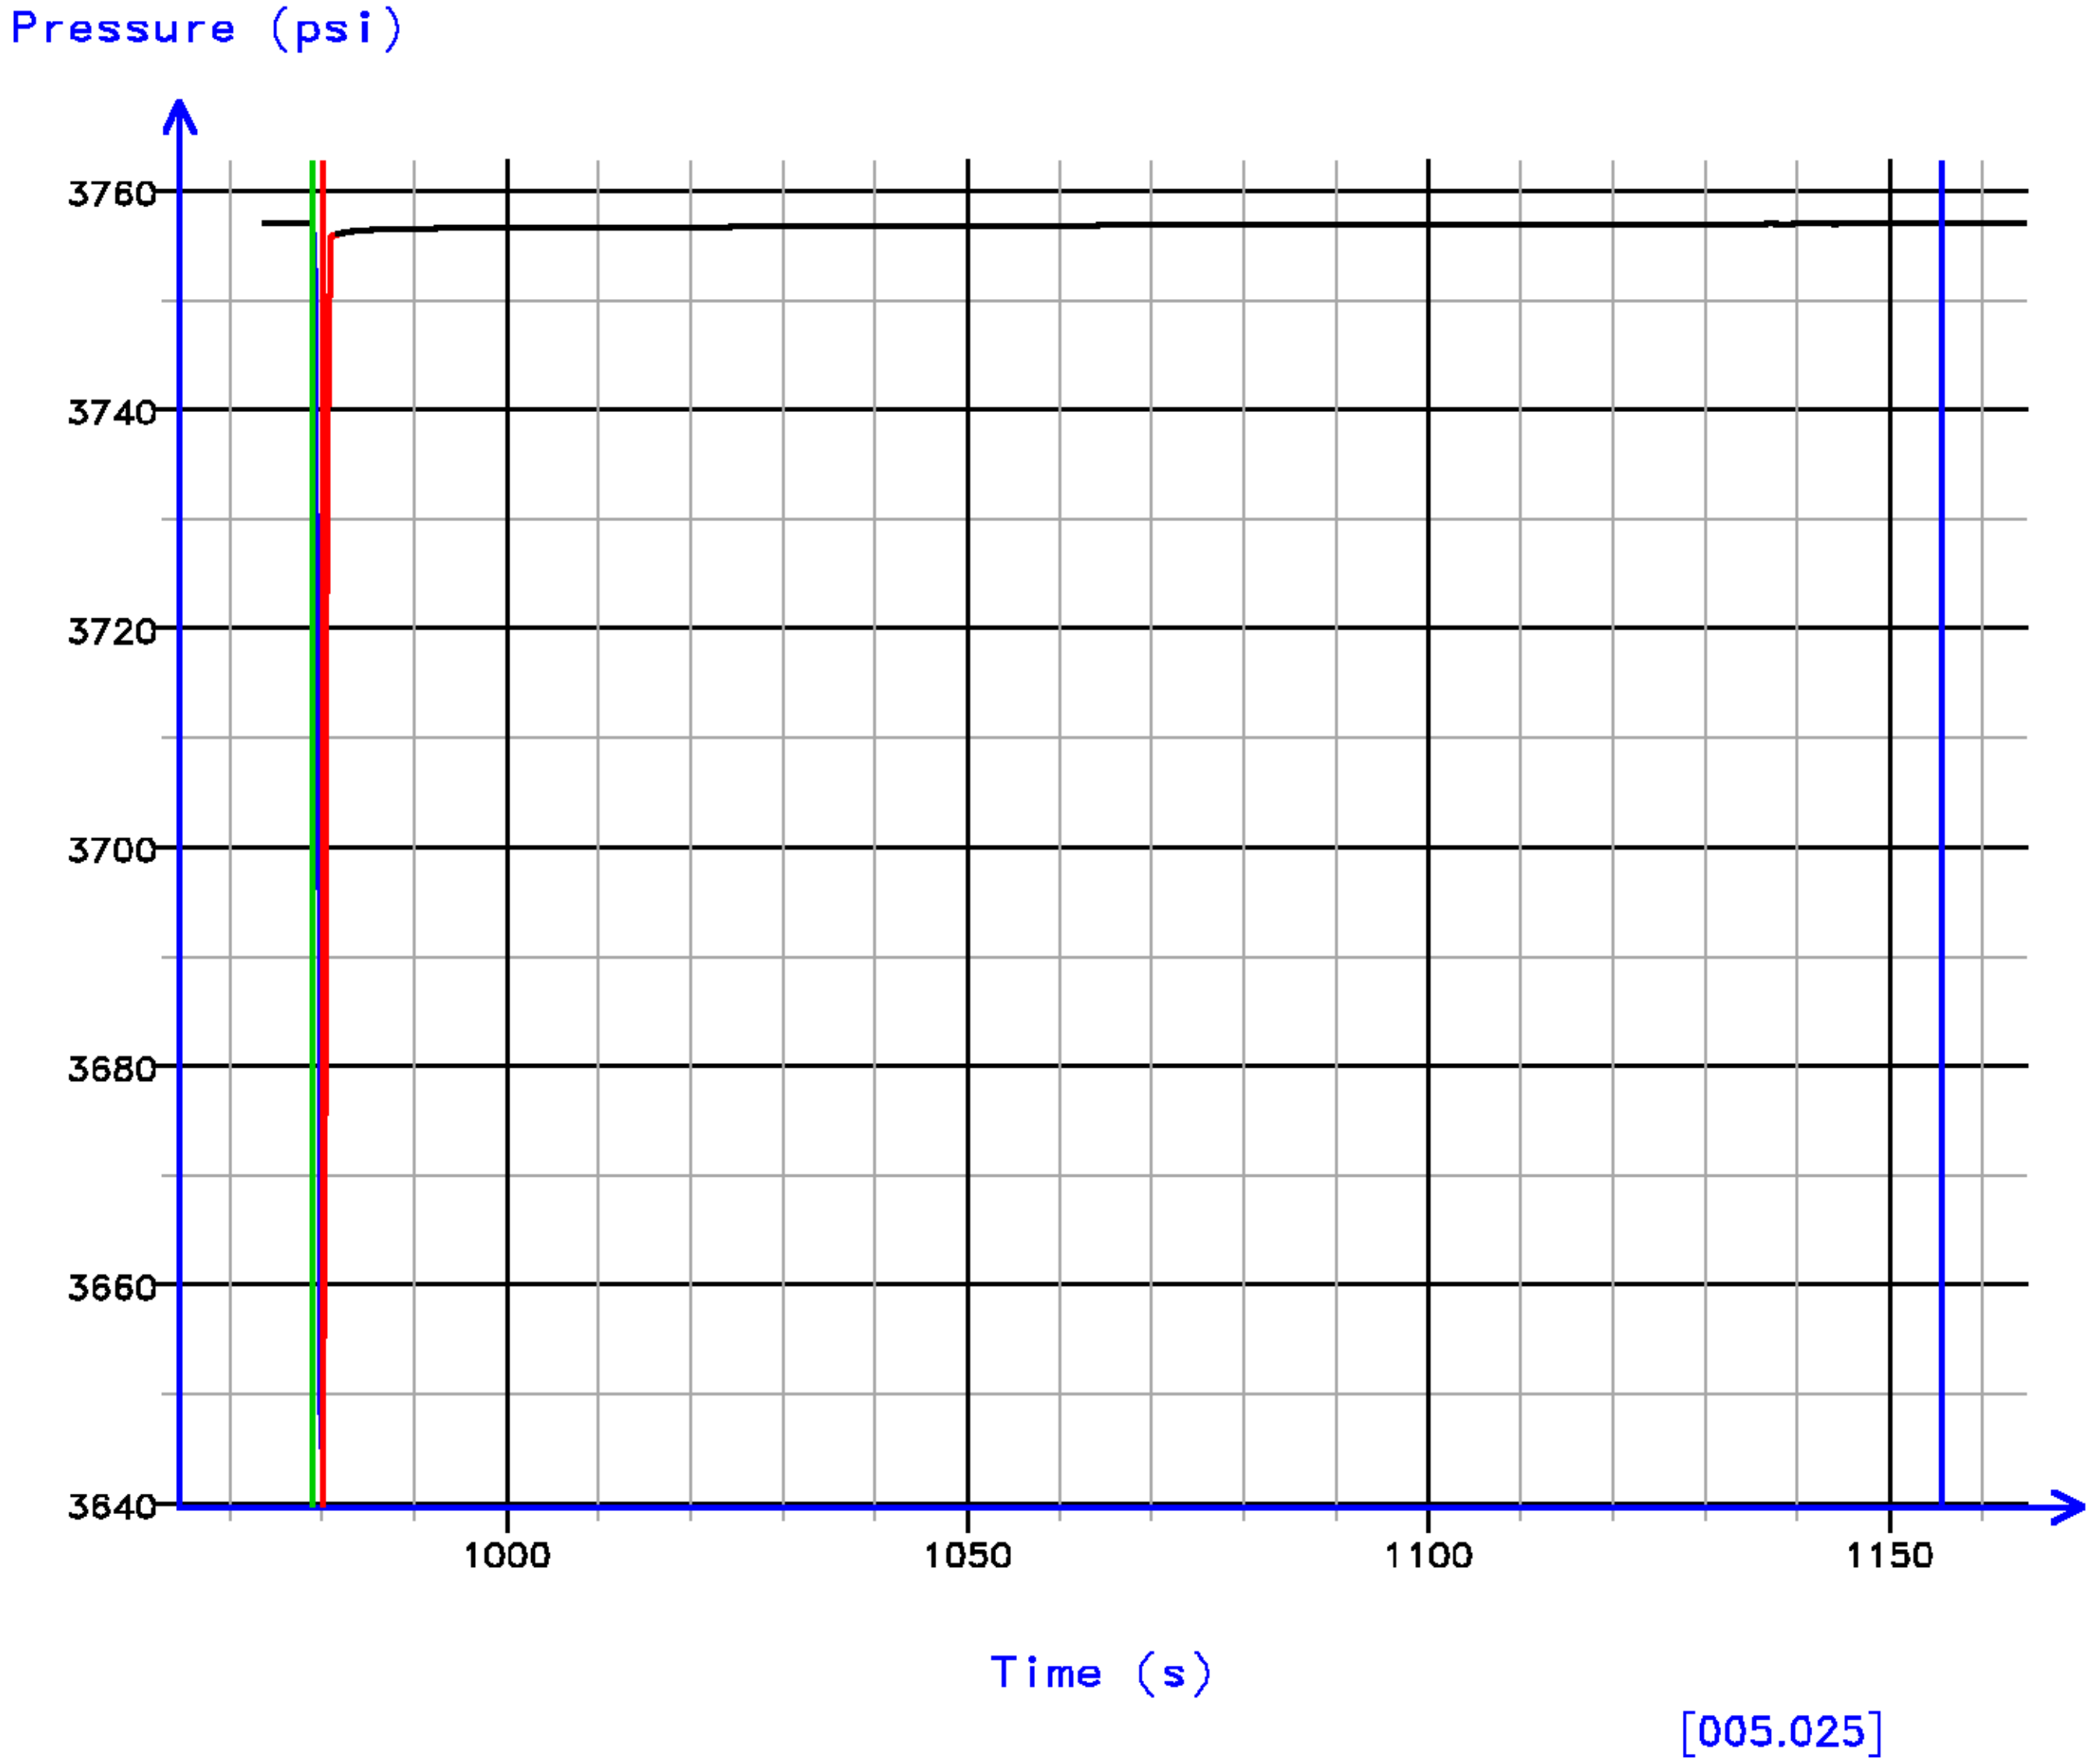

FLOW RATE ANALYSIS

Depth MD 2412.1 m TVD 2412.1 m

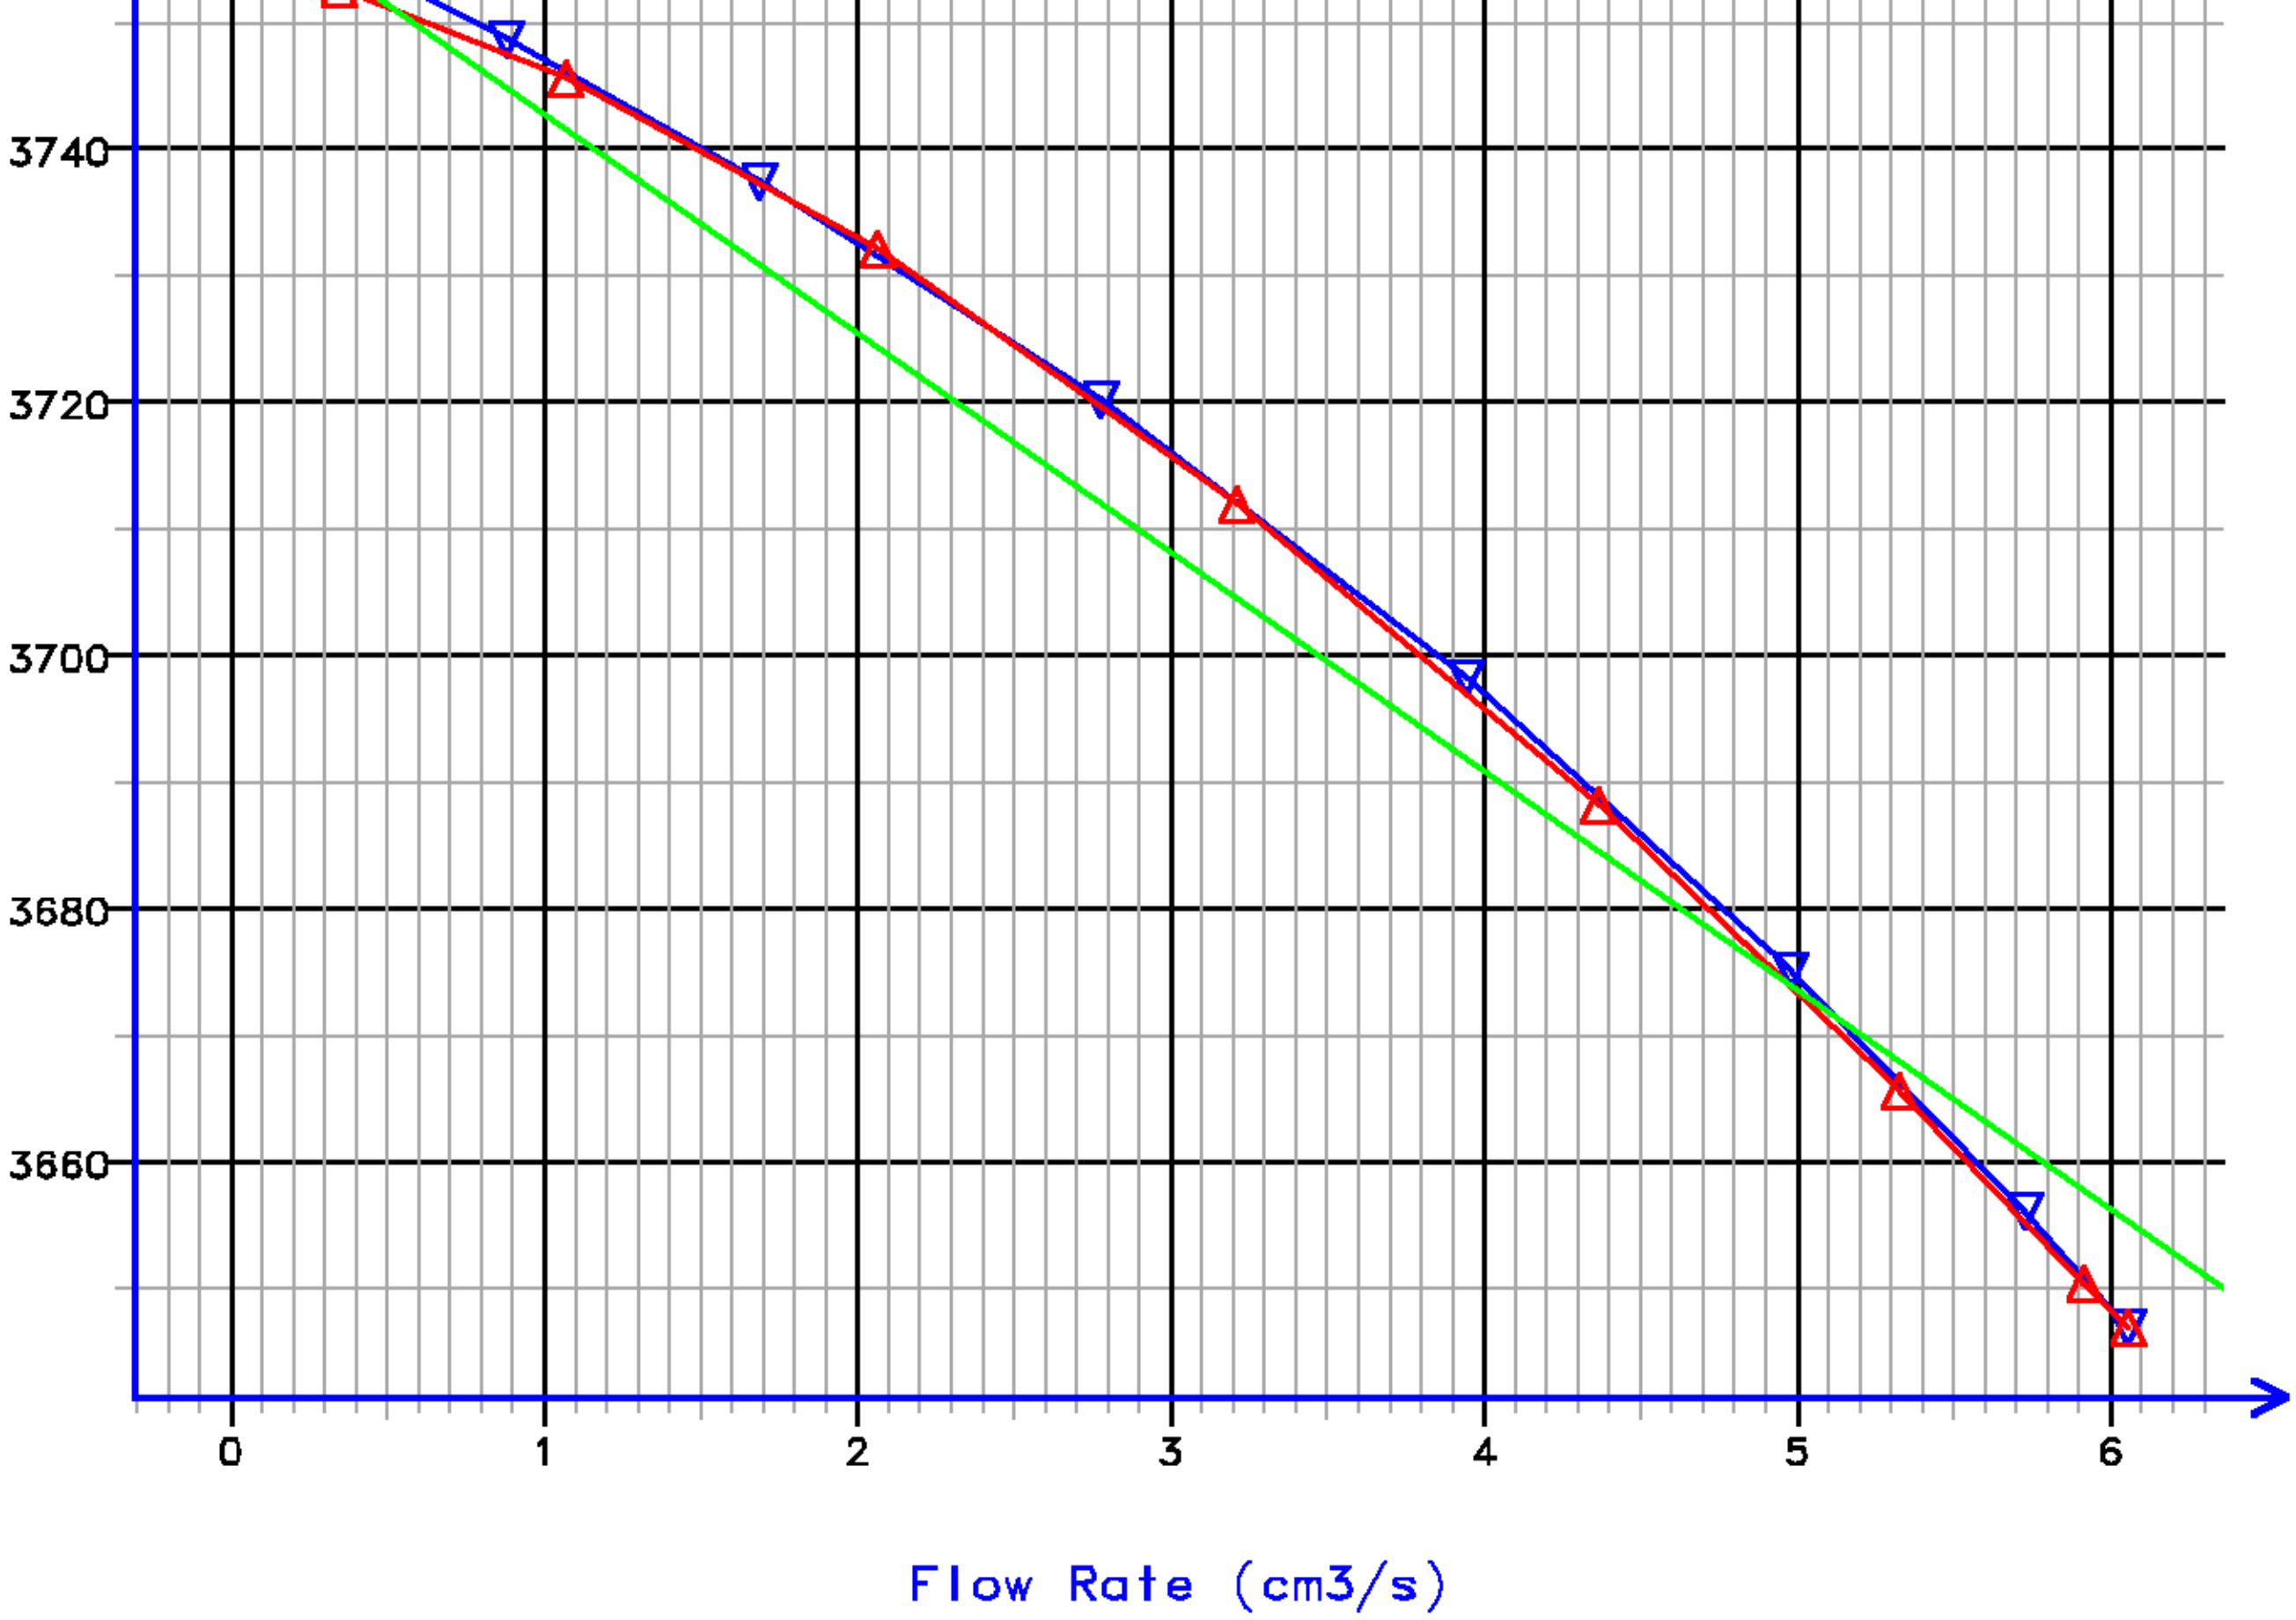

Kfra 199.173 (mD/cP), Kddu 220.090 (mD/cP) Confidence 98.08% [005.025]

Data File : j800g06.aff
Presentation: gpi_rci-b3xx.log

TOOL COMMAND

ANNOTATIONS

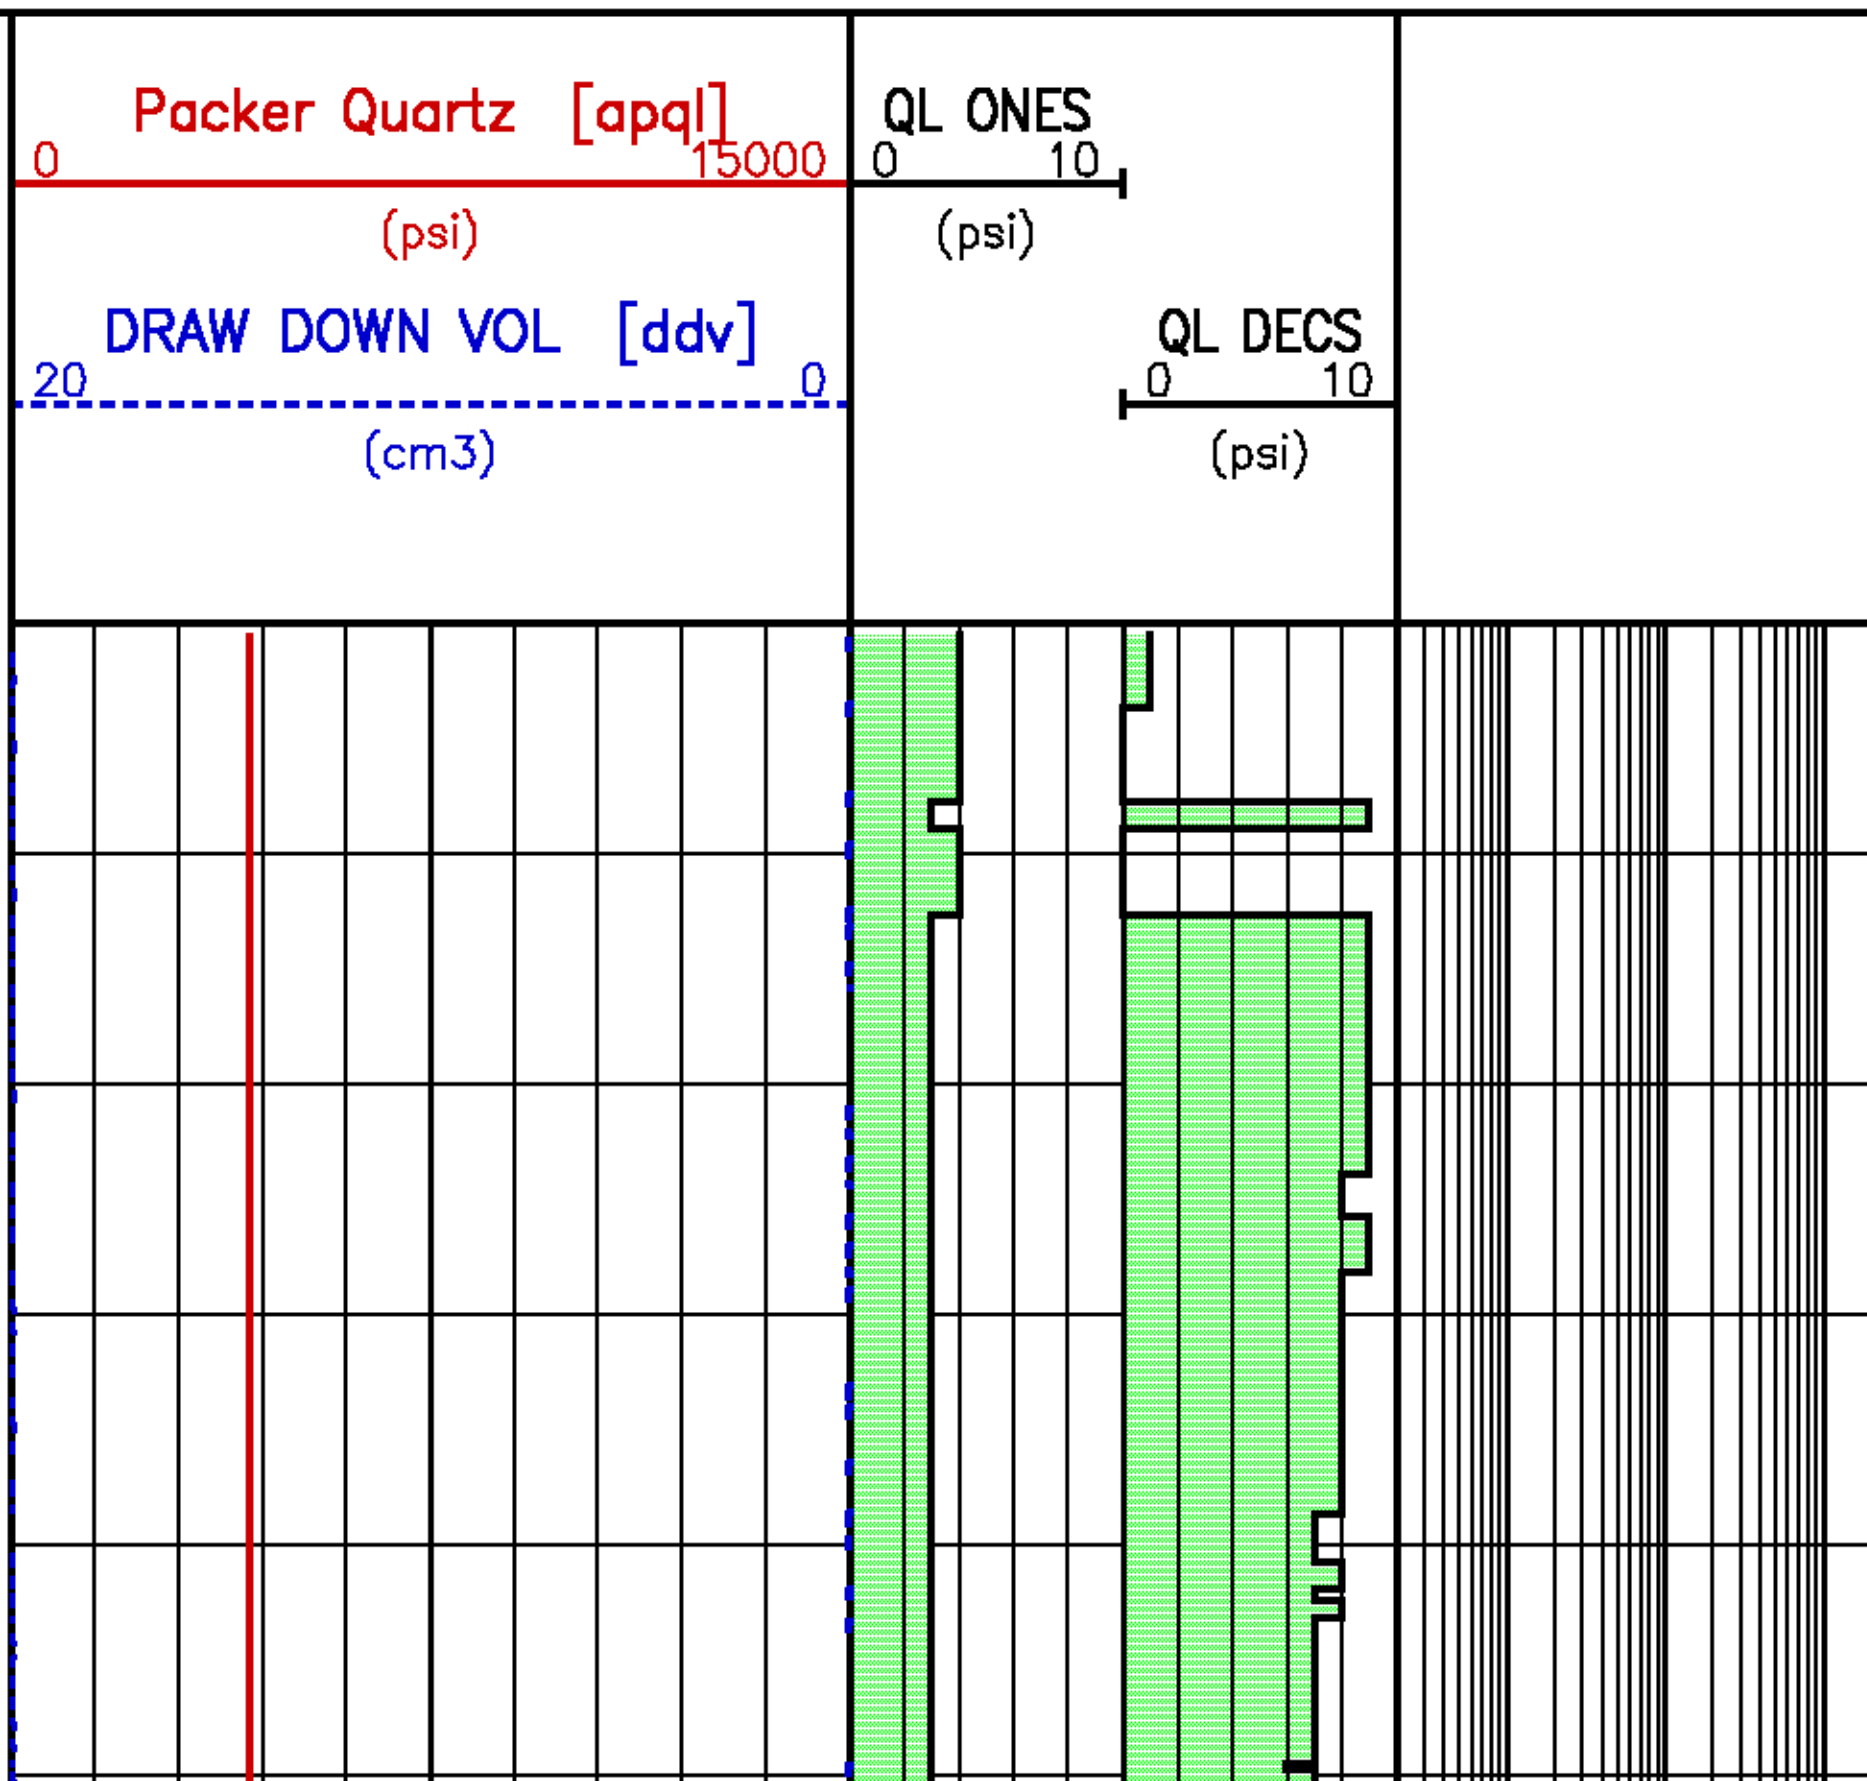

SECONDS	APQL (psi)	RTDQL (degF)
0		
	4264.1	189.4
10	4264.0	189.5
	4264.0	189.5
20	4263.9	189.5
	4263.9	189.5
30	4263.9	189.5
	4263.8	189.5
40	4263.8	189.5
	4263.8	189.5
50	4263.7	189.5

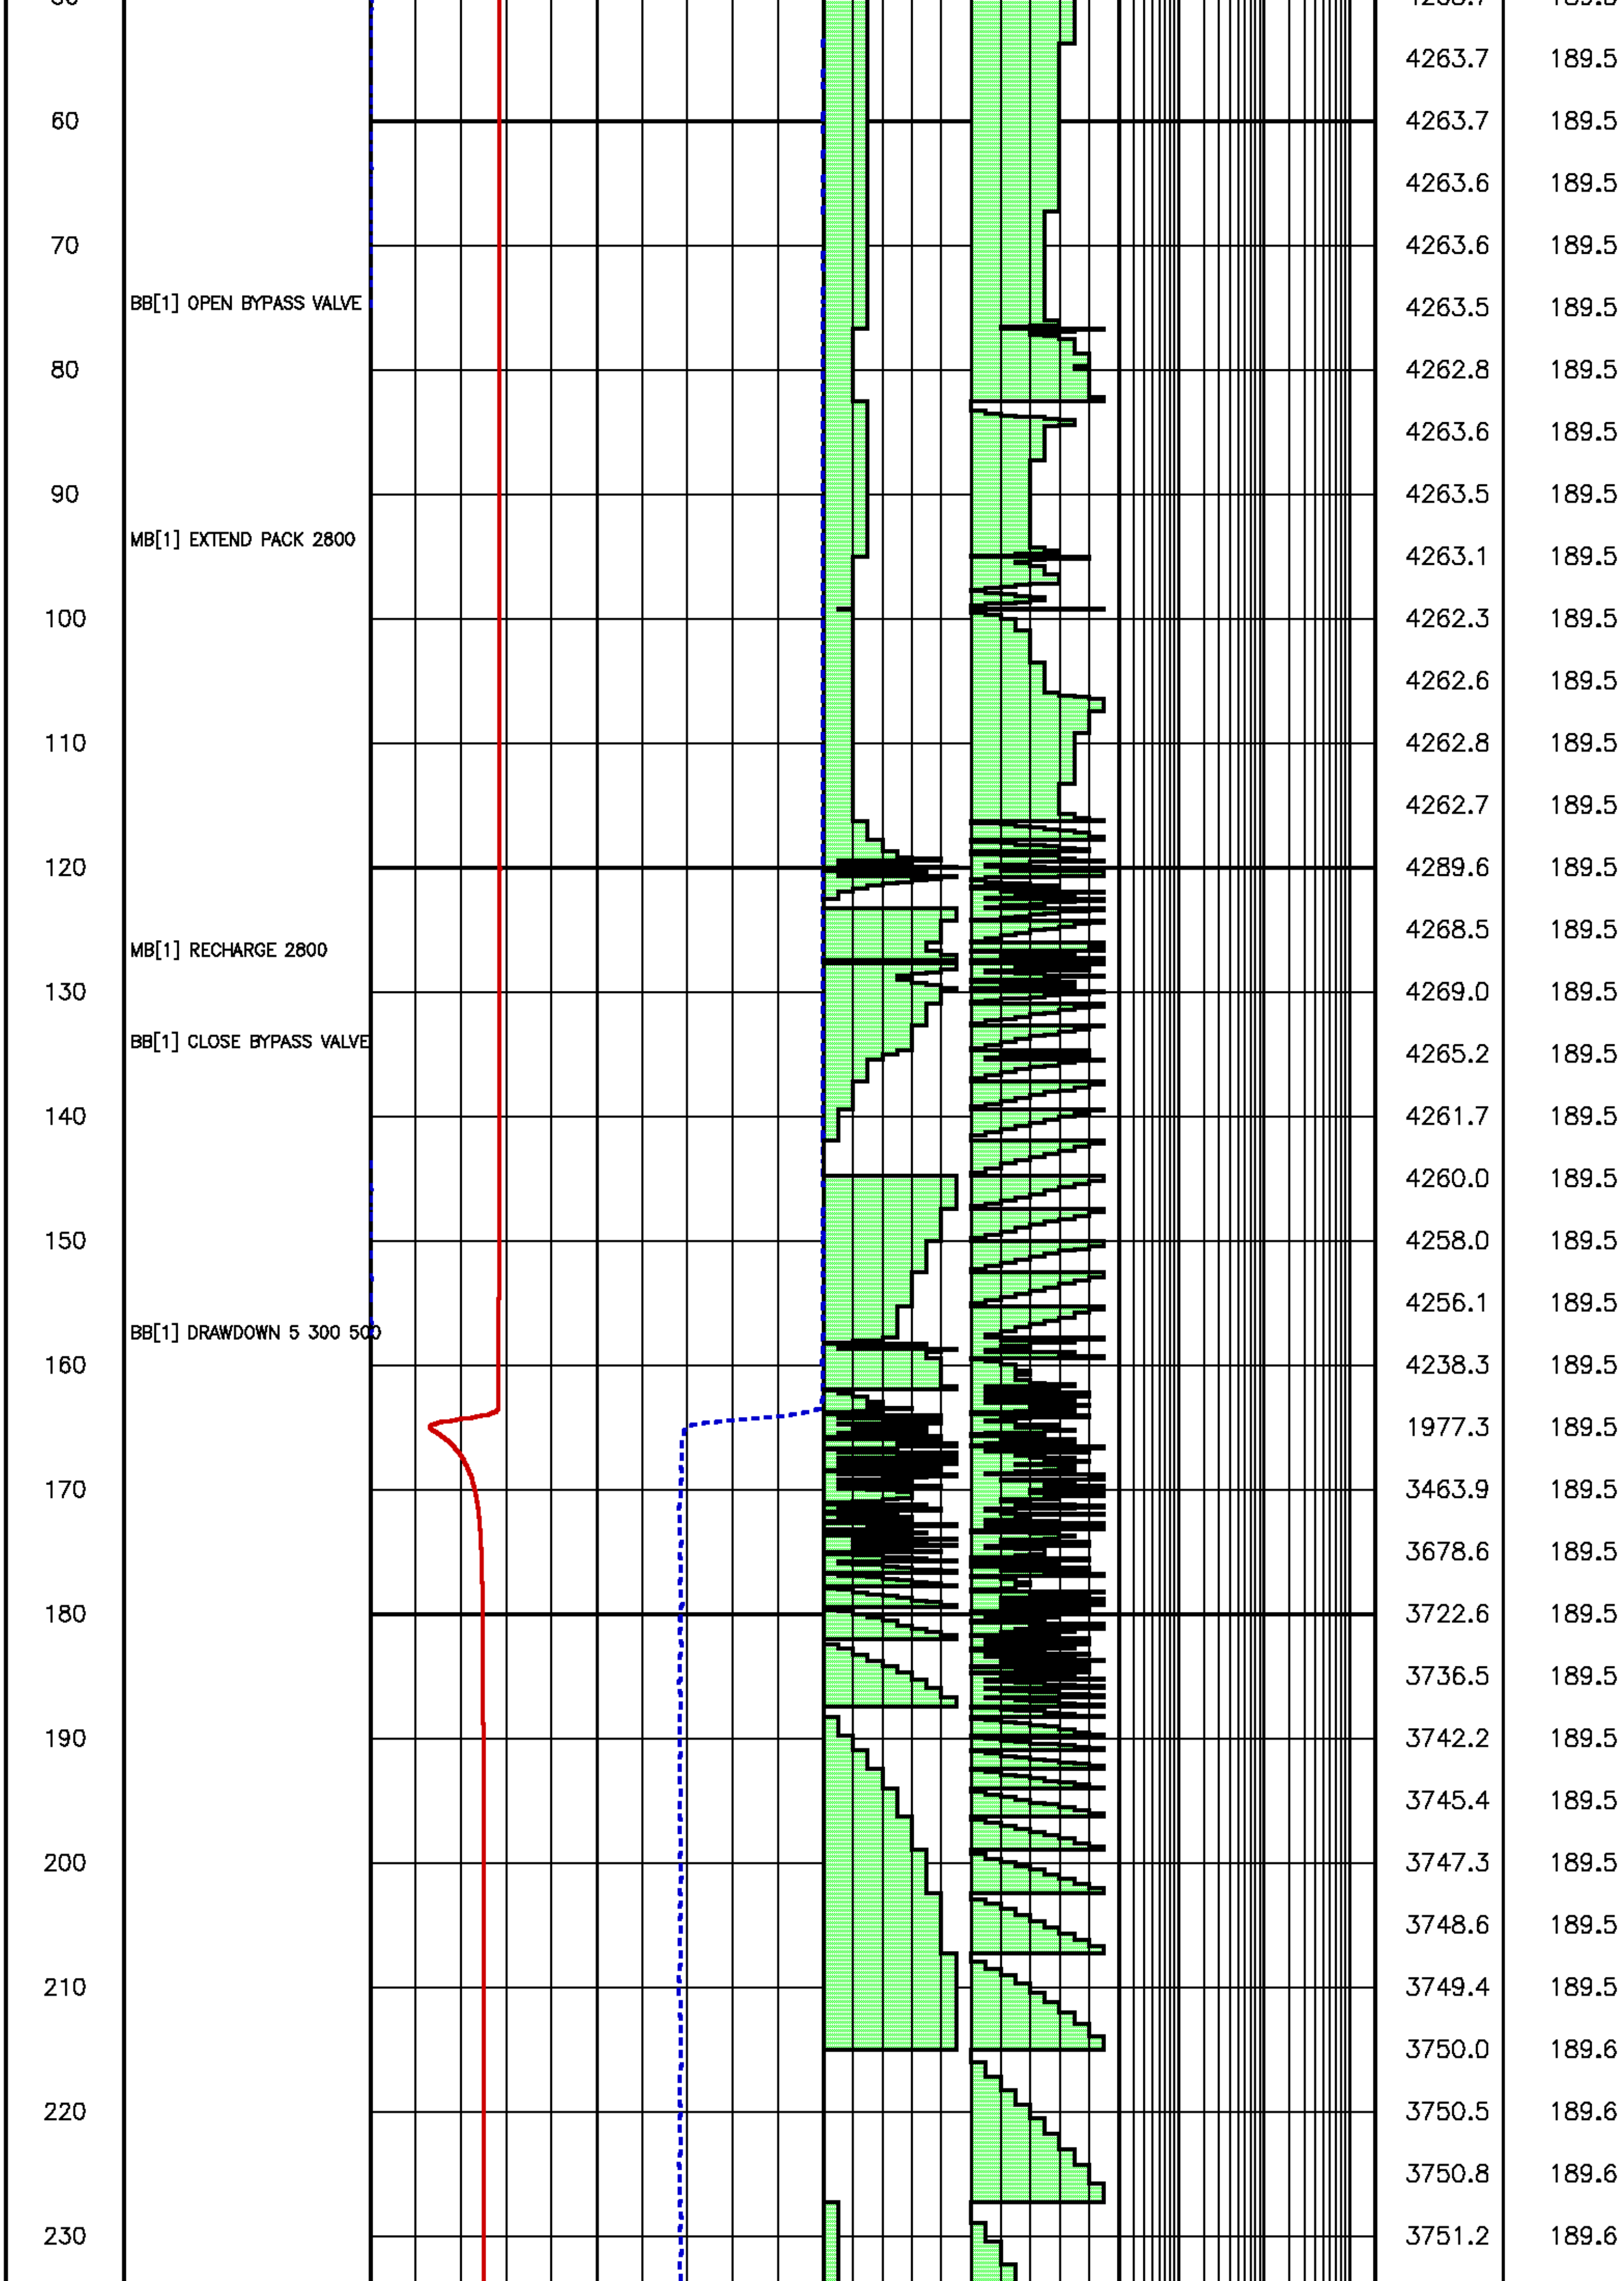

4263.7 189.5
60 4263.7 189.5
4263.6 189.5
70 4263.6 189.5
BB[1] OPEN BYPASS VALVE 4263.5 189.5
80 4262.8 189.5
4263.6 189.5
90 4263.5 189.5
MB[1] EXTEND PACK 2800 4263.1 189.5
100 4262.3 189.5
4262.6 189.5
110 4262.8 189.5
4262.7 189.5
120 4289.6 189.5
MB[1] RECHARGE 2800 4268.5 189.5
130 4269.0 189.5
BB[1] CLOSE BYPASS VALVE 4265.2 189.5
140 4261.7 189.5
4260.0 189.5
150 4258.0 189.5
4256.1 189.5
BB[1] DRAWDOWN 5 300 500
160 4238.3 189.5
1977.3 189.5
170 3463.9 189.5
3678.6 189.5
180 3722.6 189.5
3736.5 189.5
190 3742.2 189.5
3745.4 189.5
200 3747.3 189.5
3748.6 189.5
210 3749.4 189.5
3750.0 189.6
220 3750.5 189.6
3750.8 189.6
230 3751.2 189.6

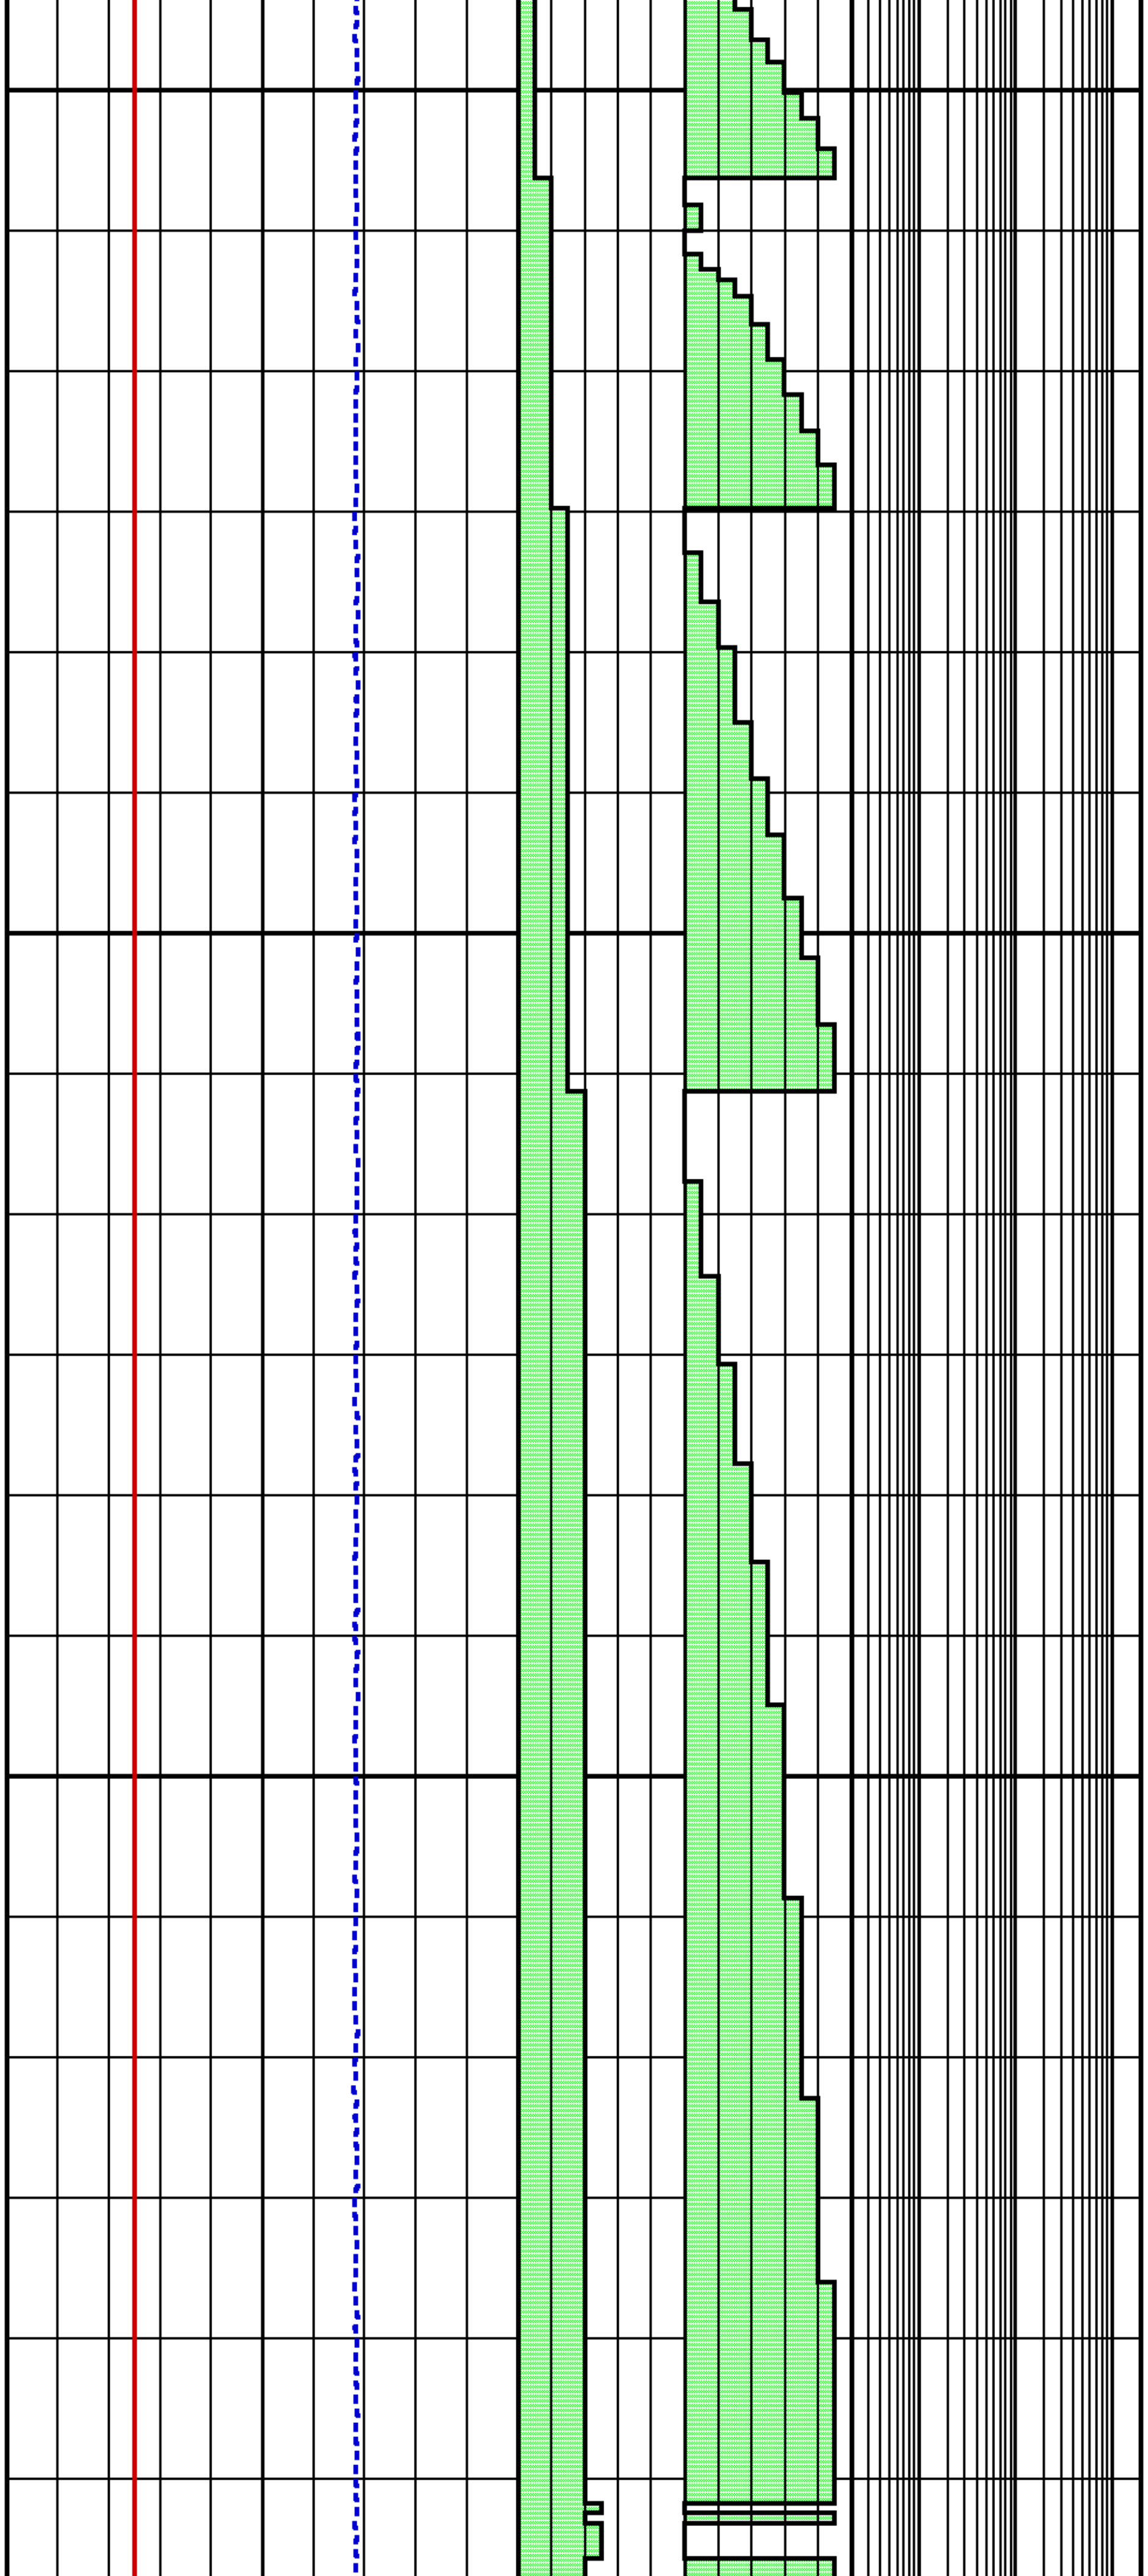

	3751.4	189.6
240	3751.7	189.6
	3751.9	189.6
250	3752.1	189.6
	3752.4	189.6
260	3752.6	189.6
	3752.8	189.6
270	3753.0	189.6
	3753.2	189.6
280	3753.3	189.6
	3753.4	189.6
290	3753.5	189.6
	3753.7	189.6
300	3753.8	189.6
	3753.9	189.6
310	3754.0	189.6
	3754.1	189.6
320	3754.1	189.6
	3754.2	189.6
330	3754.3	189.6
	3754.4	189.6
340	3754.4	189.6
	3754.5	189.6
350	3754.6	189.6
	3754.6	189.6
360	3754.6	189.6
	3754.7	189.6
370	3754.7	189.6
	3754.7	189.6
380	3754.8	189.6
	3754.8	189.6
390	3754.9	189.6
	3754.9	189.6
400	3754.9	189.6
	3755.0	189.6
410	3755.0	189.6
	3755.0	189.6

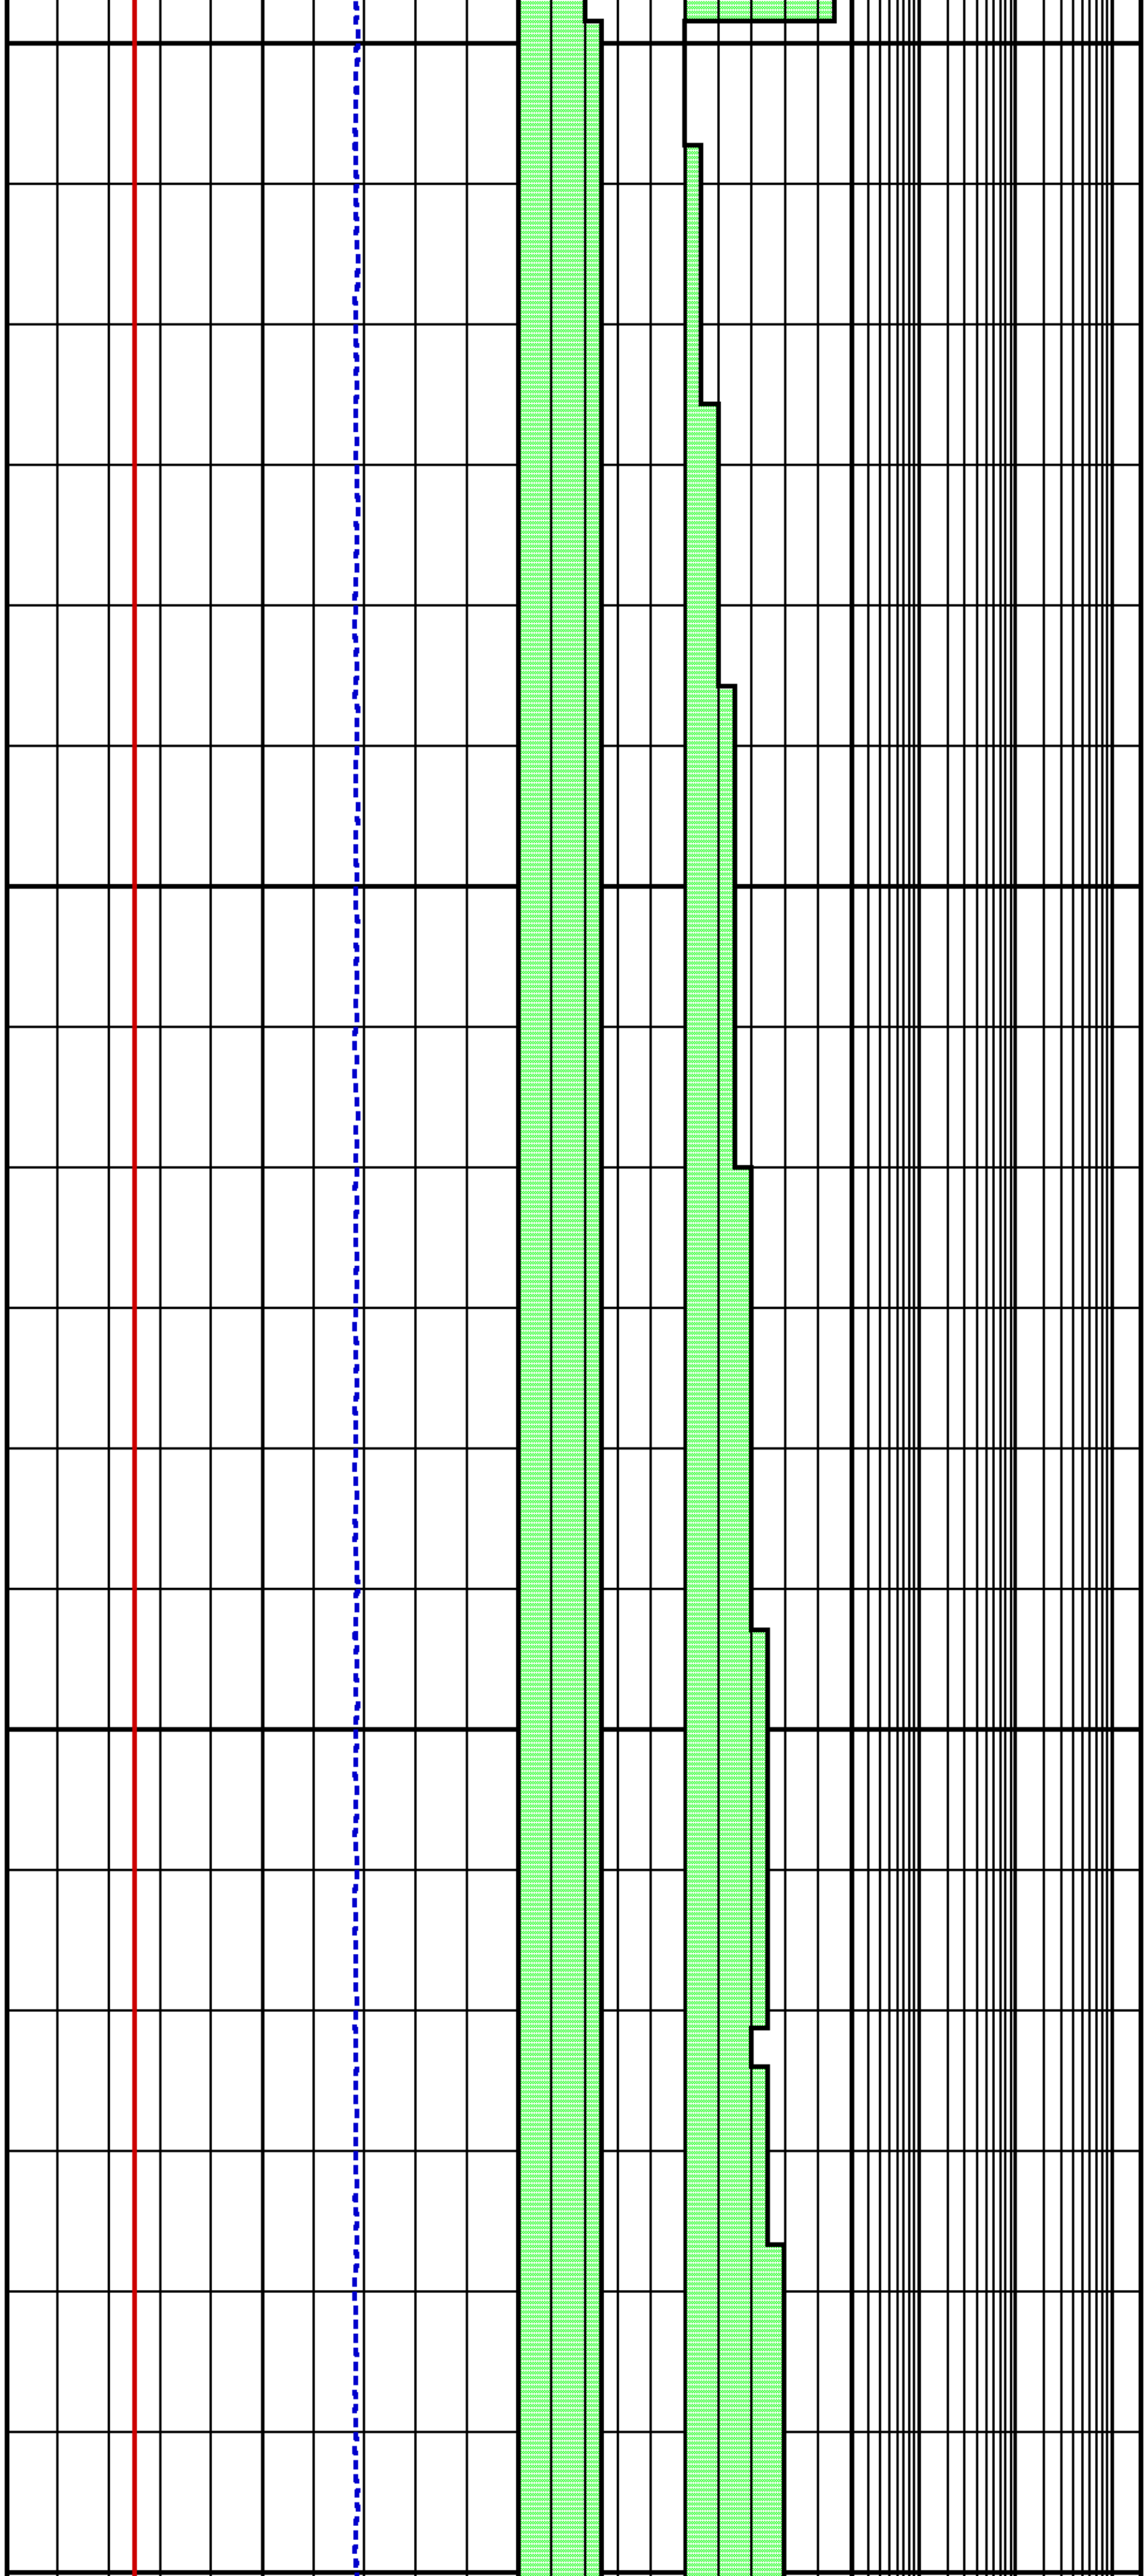

420	3755.0	189.6
	3755.1	189.6
430	3755.1	189.6
	3755.2	189.6
440	3755.2	189.6
	3755.2	189.6
450	3755.2	189.6
	3755.3	189.6
460	3755.3	189.6
	3755.3	189.6
470	3755.3	189.6
	3755.3	189.6
480	3755.3	189.6
	3755.4	189.6
490	3755.4	189.6
	3755.4	189.7
500	3755.4	189.7
	3755.4	189.7
510	3755.4	189.7
	3755.4	189.7
520	3755.5	189.7
	3755.5	189.7
530	3755.5	189.7
	3755.5	189.7
540	3755.5	189.7
	3755.5	189.7
550	3755.5	189.7
	3755.6	189.7
560	3755.6	189.7
	3755.5	189.7
570	3755.6	189.7
	3755.6	189.7
580	3755.6	189.7
	3755.6	189.7
590	3755.7	189.7
	3755.7	189.7
600	3755.7	189.7

	3755.7	189.7
610	3755.7	189.7
	3755.7	189.7
620	3755.7	189.7
	3755.7	189.7
630	3755.7	189.7
	3755.8	189.7
640	3755.8	189.7
	3755.8	189.7
650	3755.8	189.7
	3755.8	189.7
660	3755.8	189.7
	3755.8	189.7
670	3755.8	189.7
	3755.9	189.7
680	3755.9	189.7
	3755.9	189.7
690	3755.9	189.7
	3755.9	189.7
700	3755.9	189.7
	3755.9	189.7
710	3755.9	189.7
	3755.9	189.7
720	3755.9	189.7
	3755.9	189.7
730	3756.0	189.7
	3756.0	189.7
740	3756.0	189.7
	3756.0	189.7
750	3756.0	189.7
	3756.0	189.7
760	3756.0	189.7
BB[1] DRAWDOWN 5 300 500	2836.9	189.7
770	3757.5	189.7
	3756.4	189.7
780	3756.5	189.7

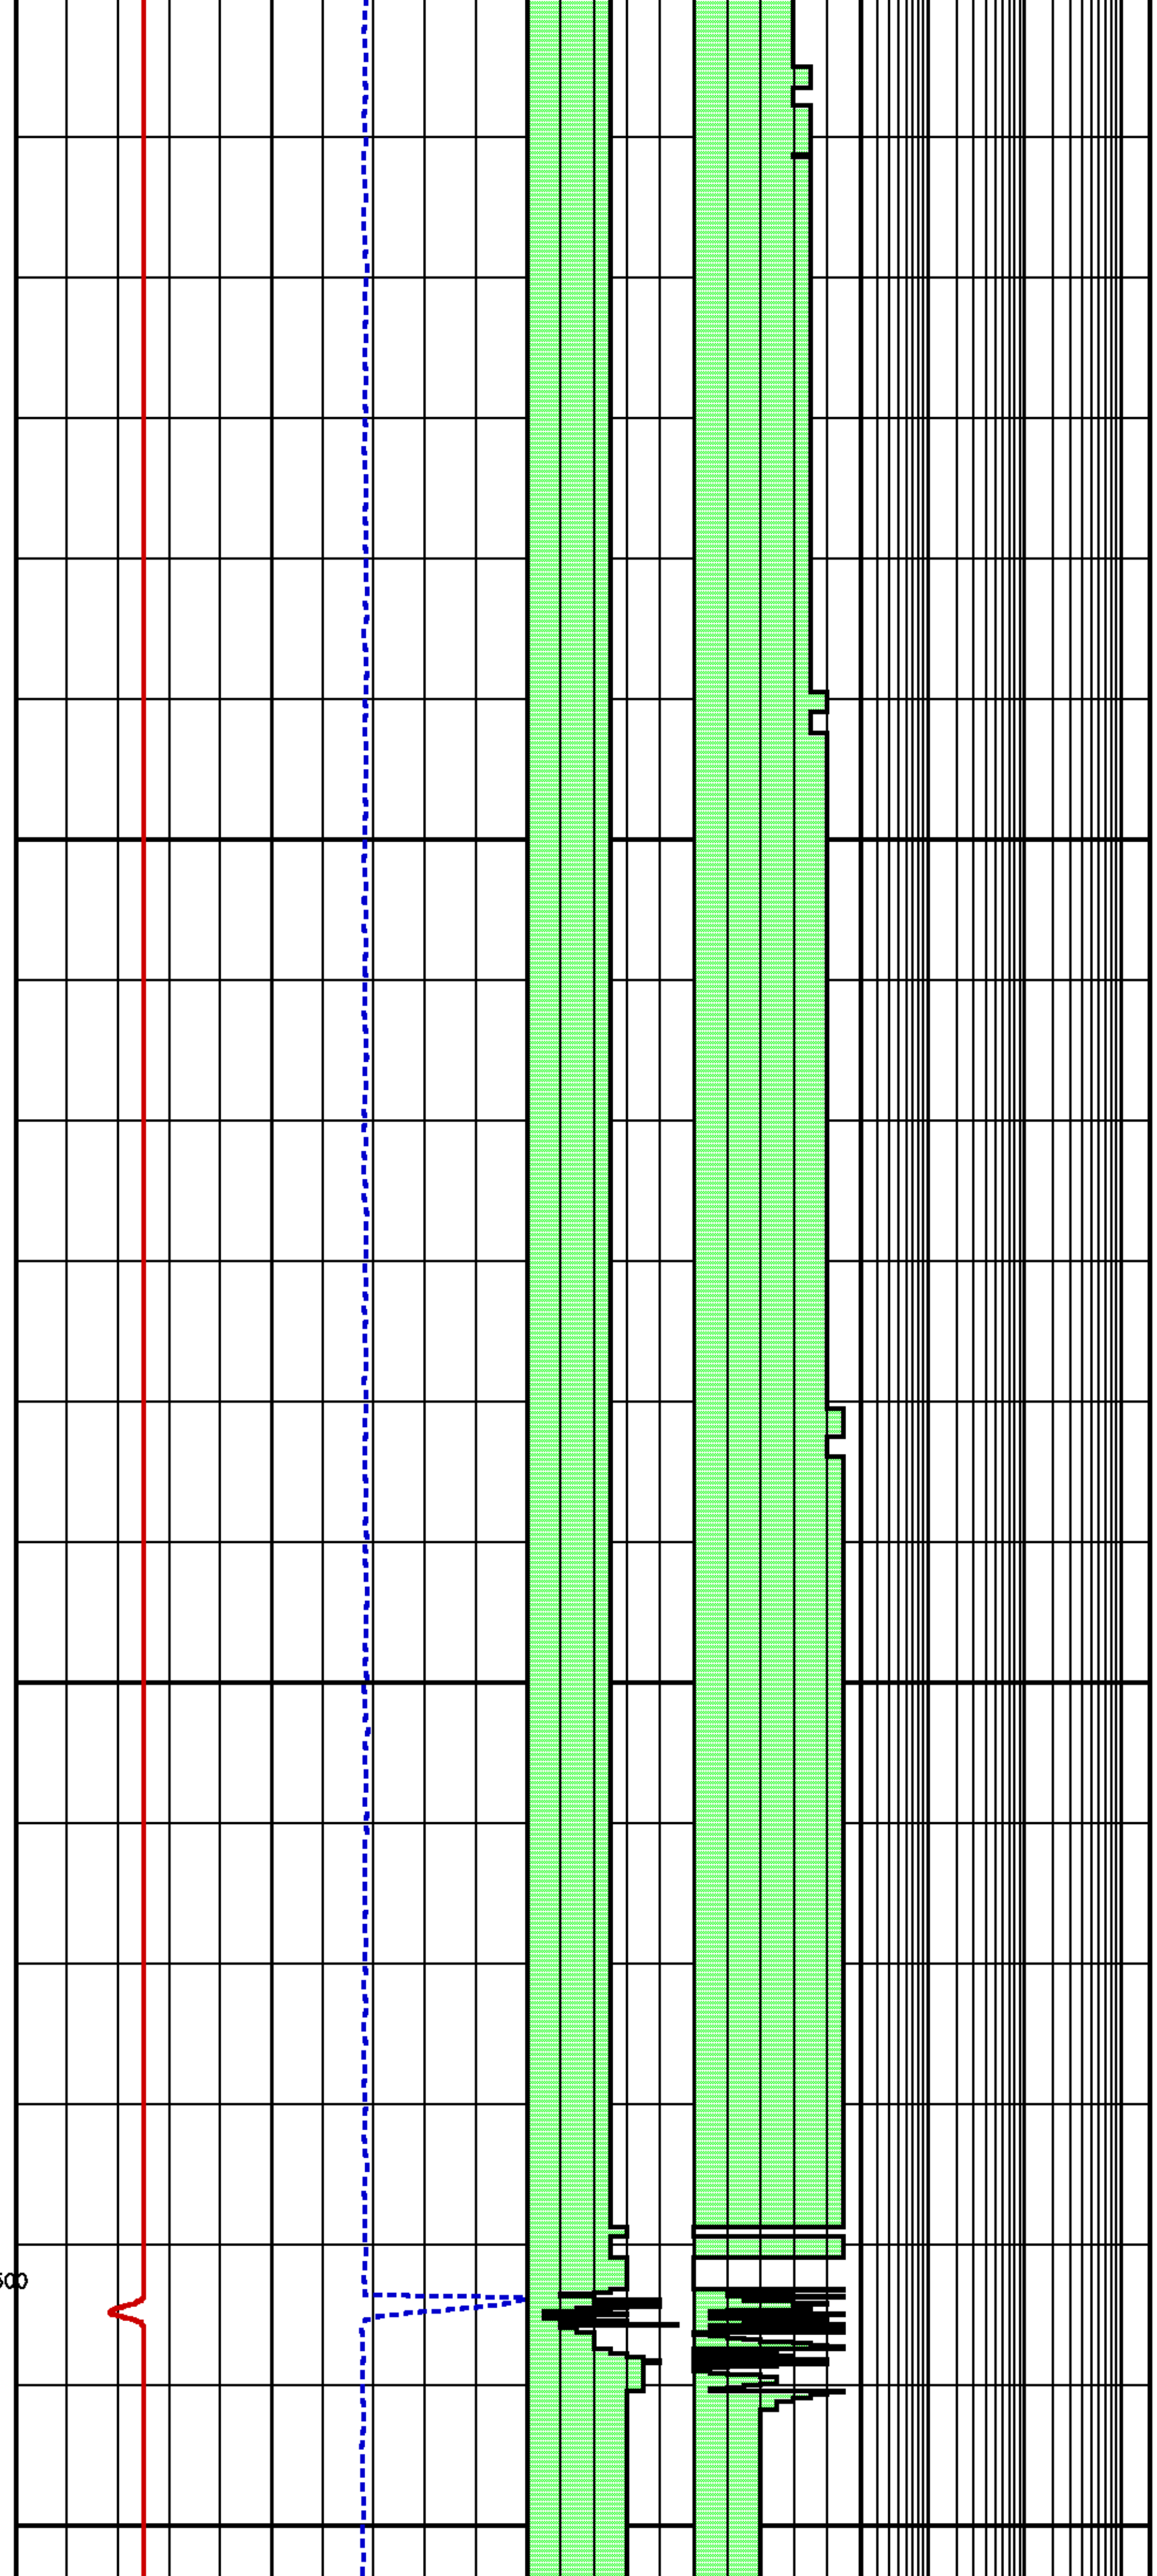

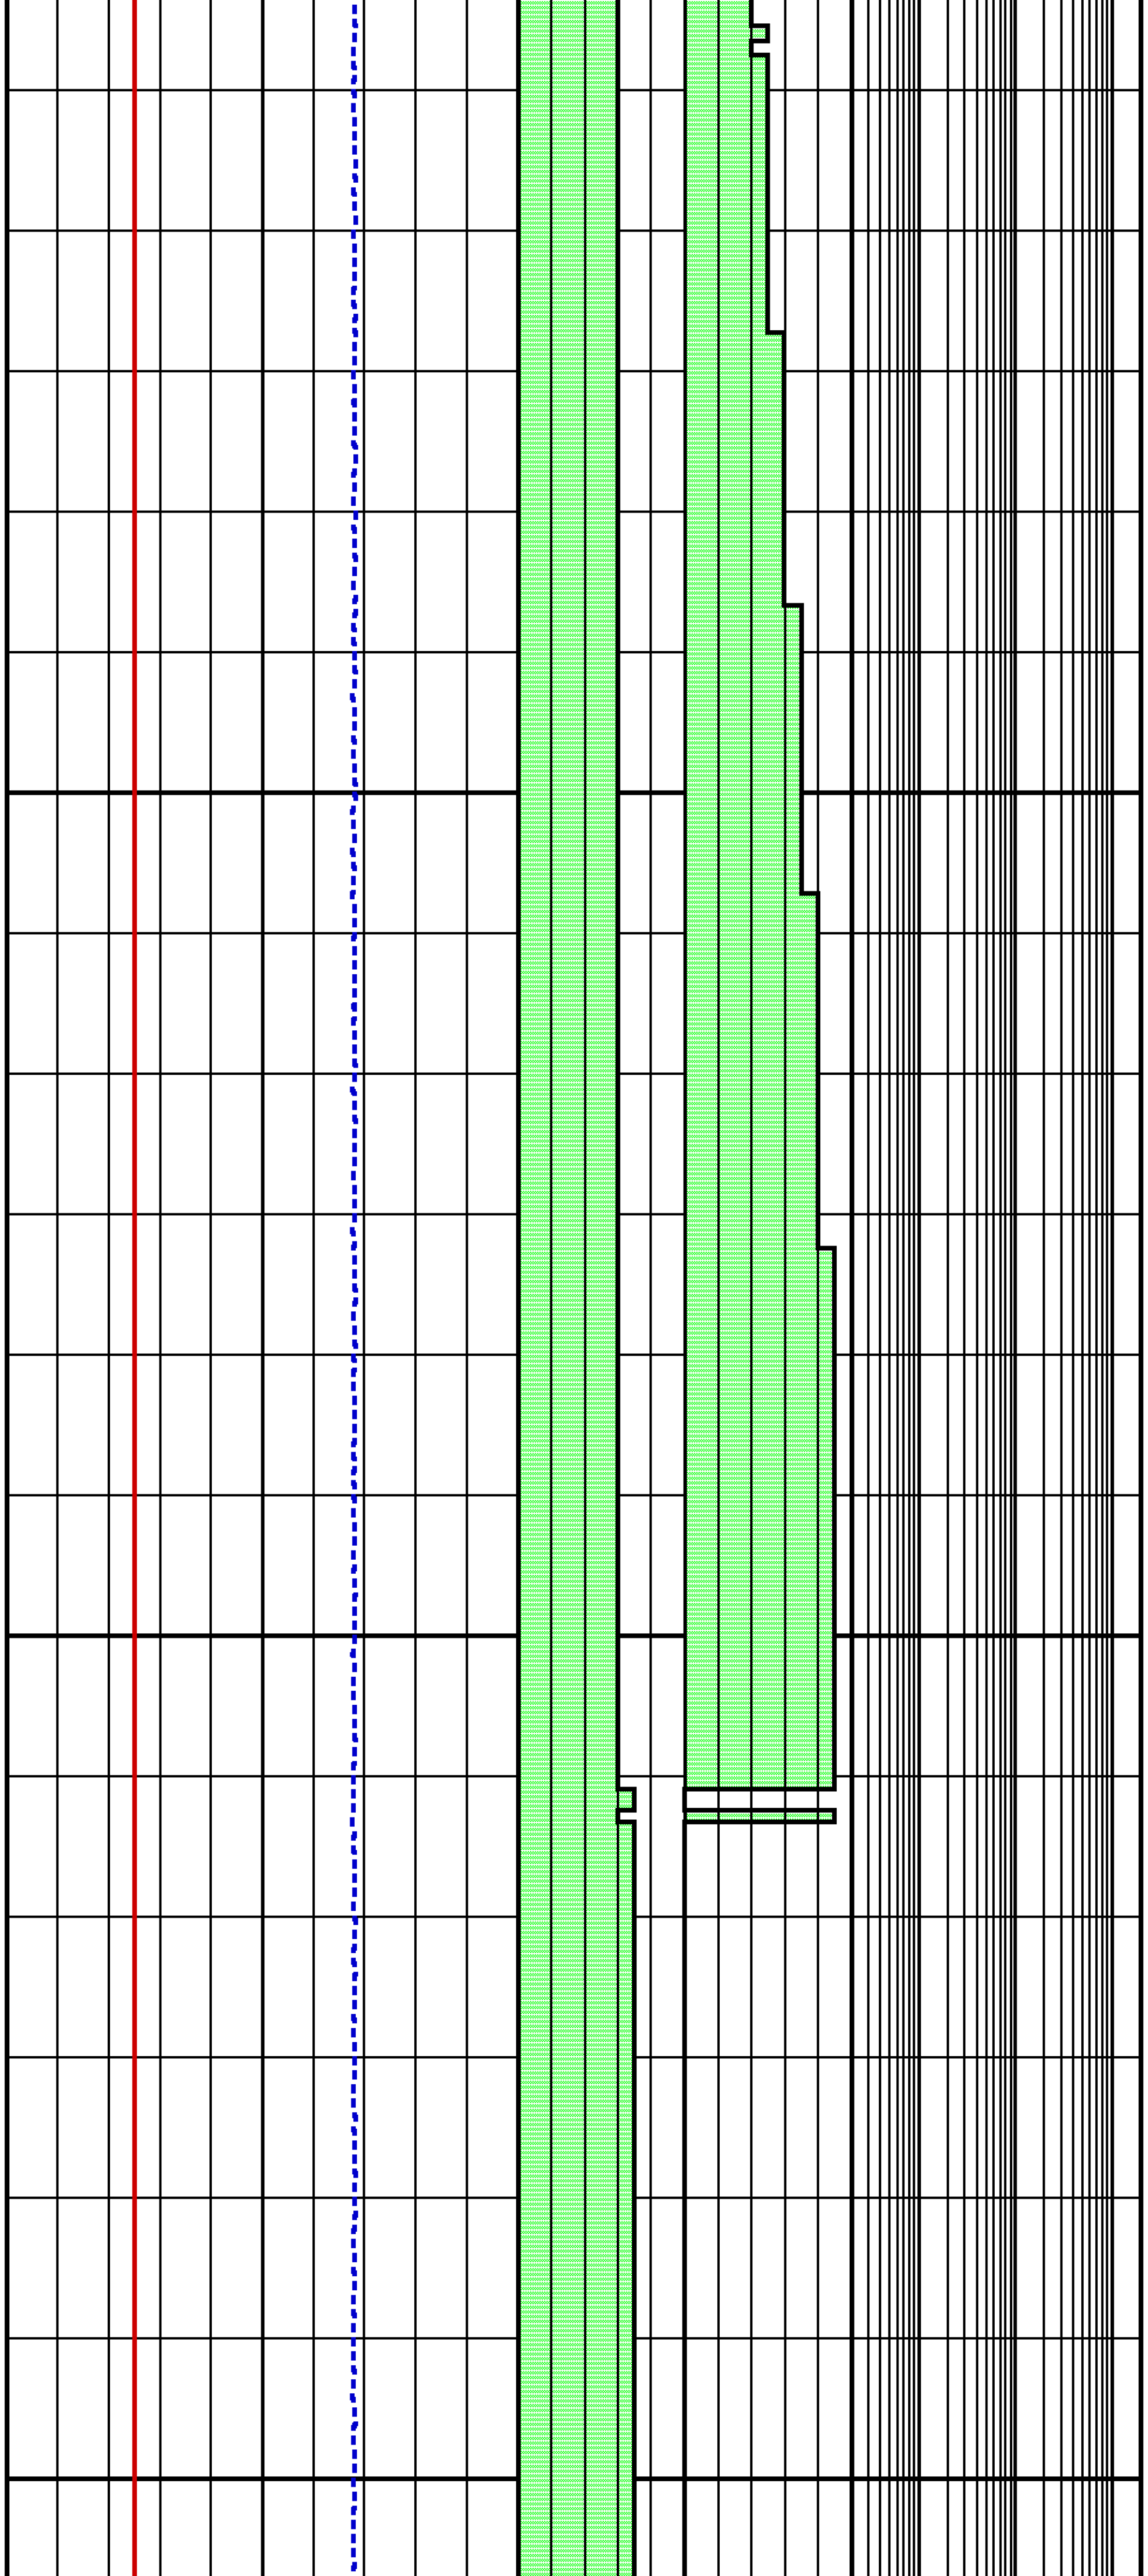

	3756.5	189.7
790	3756.5	189.7
	3756.5	189.7
800	3756.5	189.7
	3756.6	189.7
810	3756.6	189.7
	3756.6	189.7
820	3756.7	189.7
	3756.7	189.7
830	3756.7	189.7
	3756.7	189.7
840	3756.8	189.7
	3756.8	189.7
850	3756.8	189.8
	3756.8	189.8
860	3756.9	189.8
	3756.9	189.8
870	3756.9	189.8
	3756.9	189.8
880	3756.9	189.8
	3756.9	189.8
890	3757.0	189.8
	3757.0	189.8
900	3757.0	189.8
	3757.0	189.8
910	3757.0	189.8
	3757.0	189.8
920	3757.0	189.8
	3757.0	189.8
930	3757.0	189.8
	3757.0	189.8
940	3757.0	189.8
	3757.0	189.8
950	3757.0	189.8
	3757.0	189.8
960	3757.0	189.8
	3757.1	189.8

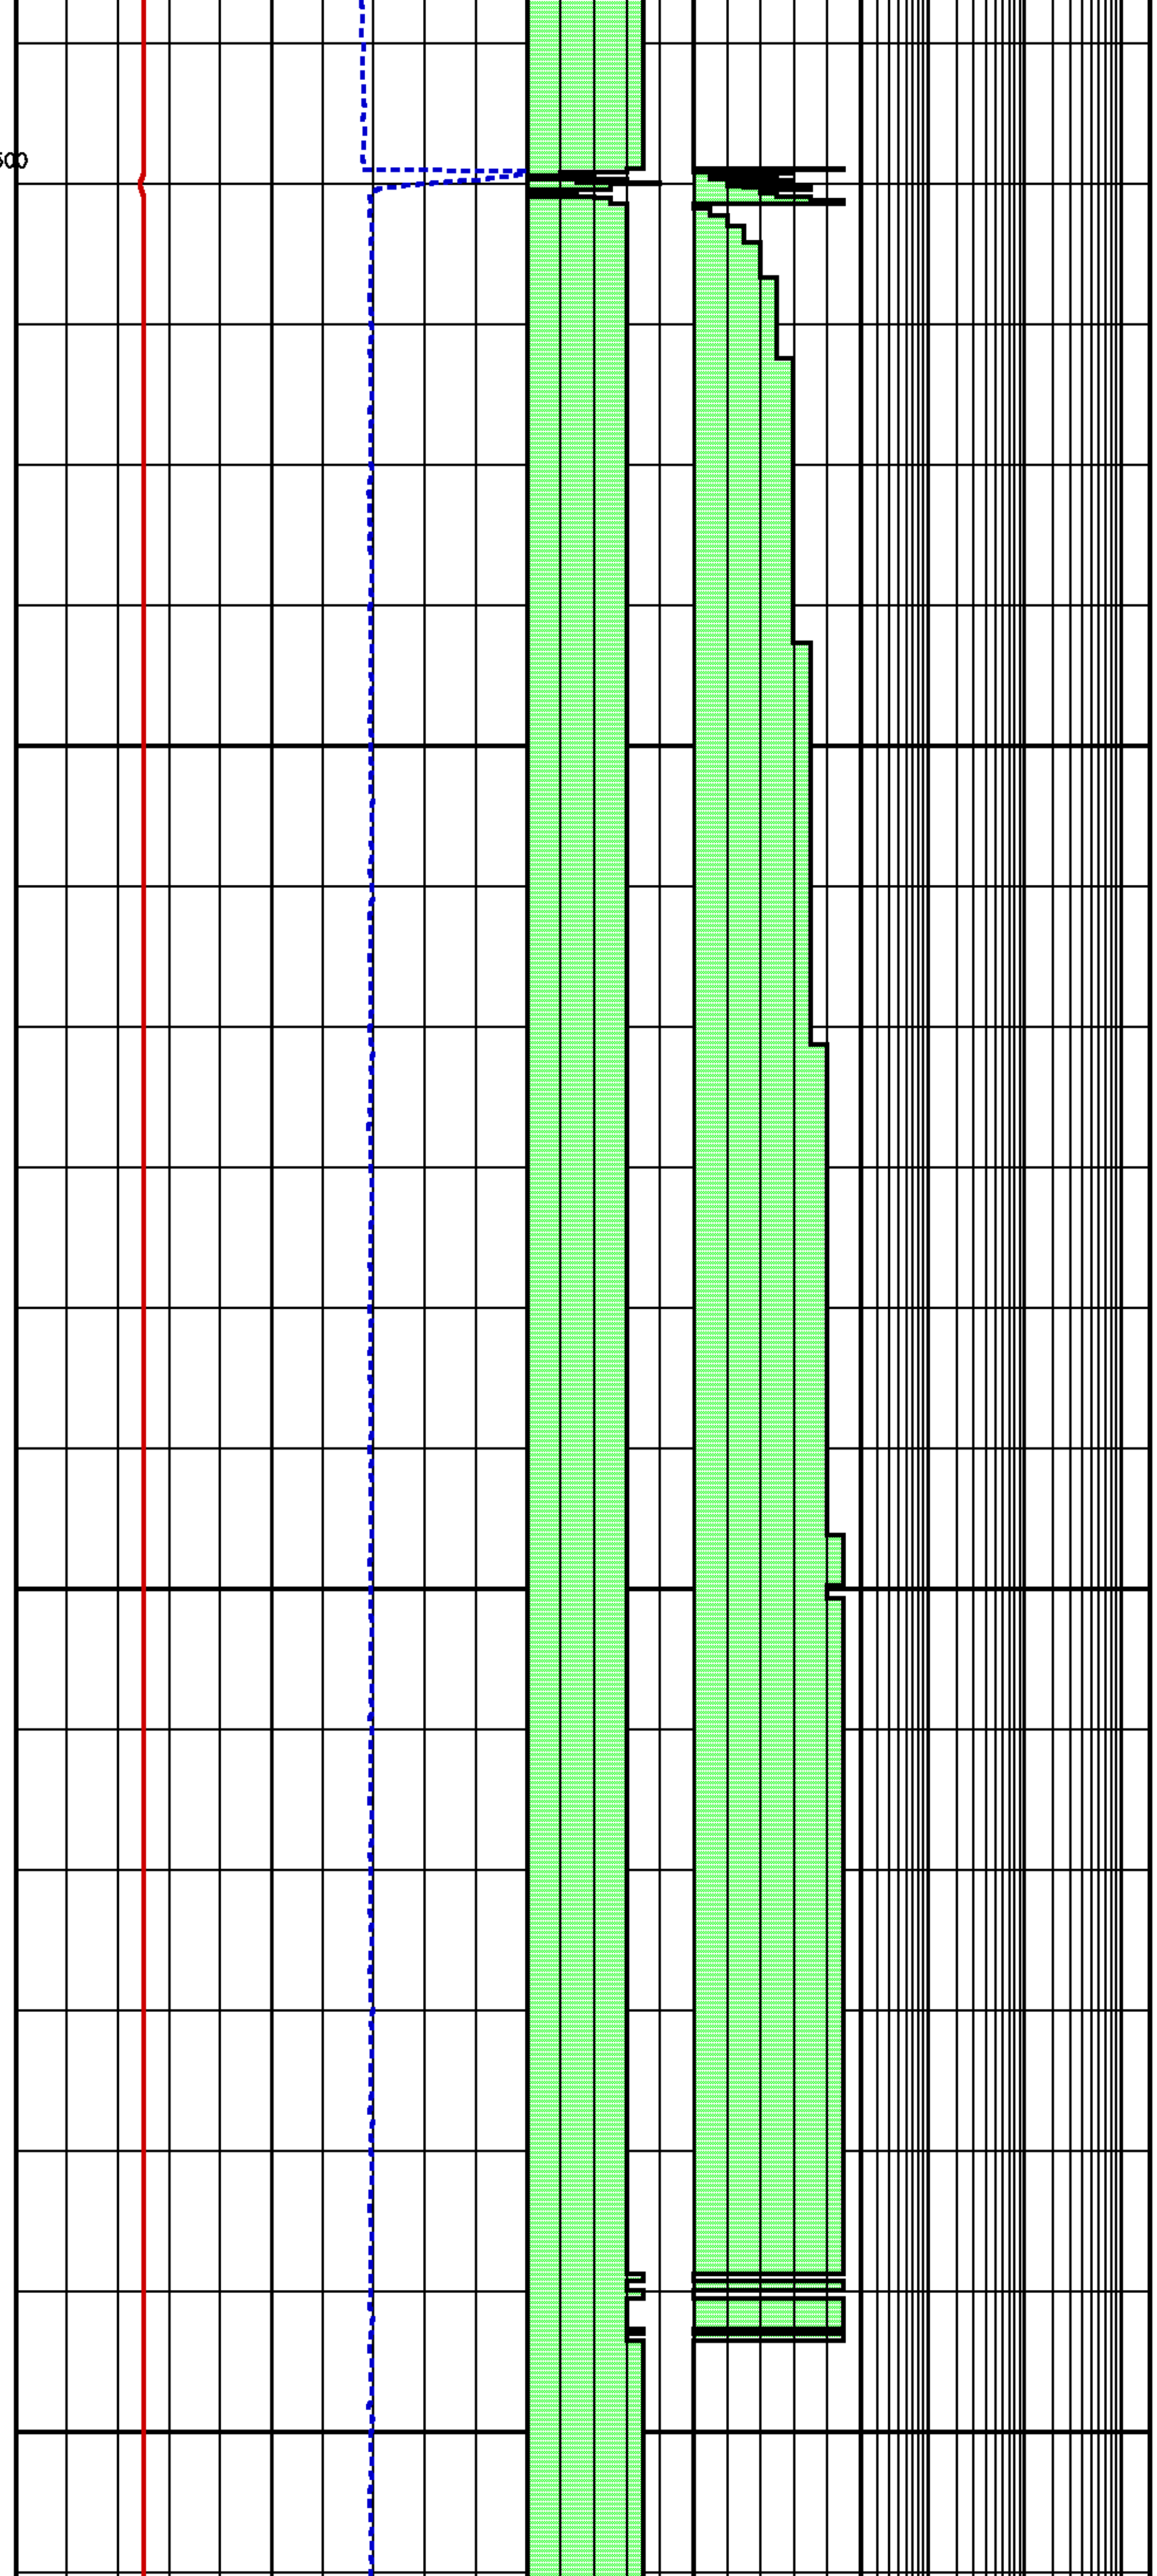

970	3757.1	189.8
	3757.1	189.8
980	3648.4	189.8
	3756.4	189.8
990	3756.6	189.8
	3756.6	189.8
1000	3756.6	189.8
	3756.7	189.8
1010	3756.7	189.8
	3756.7	189.8
1020	3756.7	189.8
	3756.7	189.8
1030	3756.8	189.8
	3756.8	189.8
1040	3756.8	189.8
	3756.8	189.8
1050	3756.8	189.8
	3756.8	189.8
1060	3756.9	189.8
	3756.9	189.8
1070	3756.9	189.8
	3756.9	189.8
1080	3756.9	189.8
	3756.9	189.8
1090	3756.9	189.8
	3756.9	189.8
1100	3757.0	189.8
	3757.0	189.8
1110	3757.0	189.8
	3757.0	189.8
1120	3757.0	189.8
	3757.0	189.8
1130	3757.0	189.8
	3757.0	189.8
1140	3757.0	189.8
	3757.0	189.8
1150	3757.0	189.8

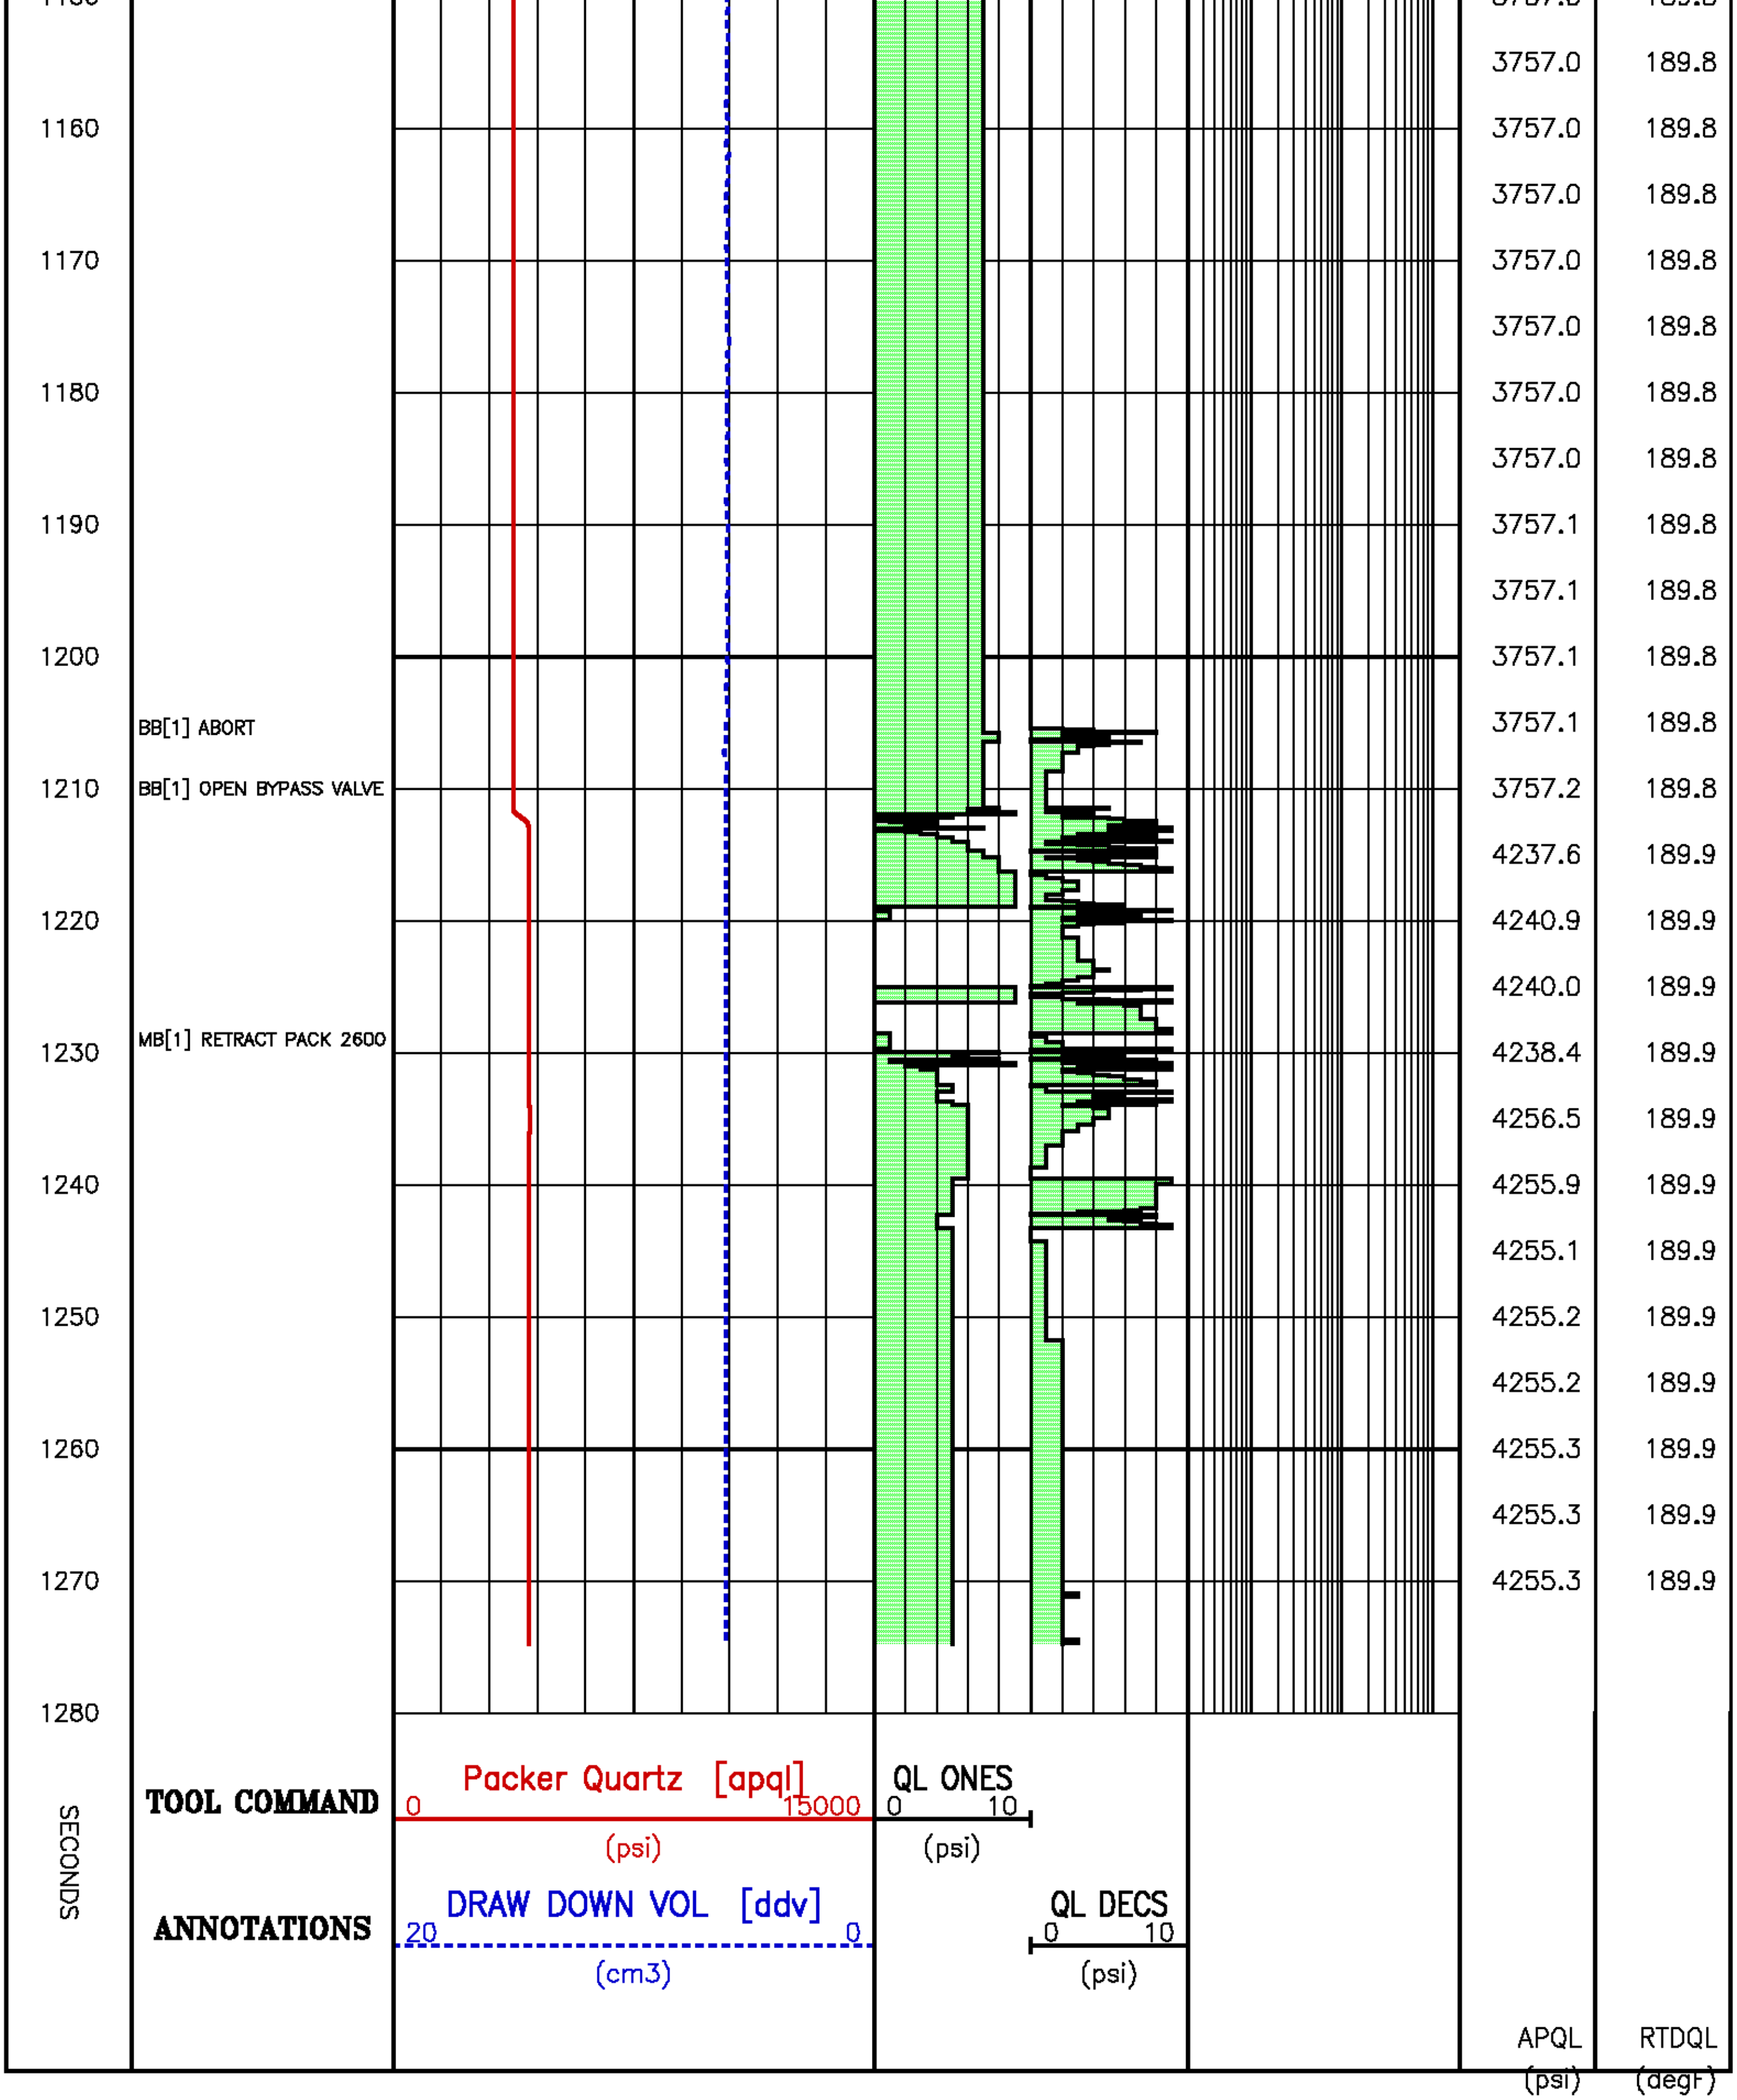

Pressure Tests – Level 7 Tool Instance 1
MD 2413.6 m TVD 2413.6 m

PRESSURE HISTORY

Depth MD 2413.6 m TVD 2413.6 m

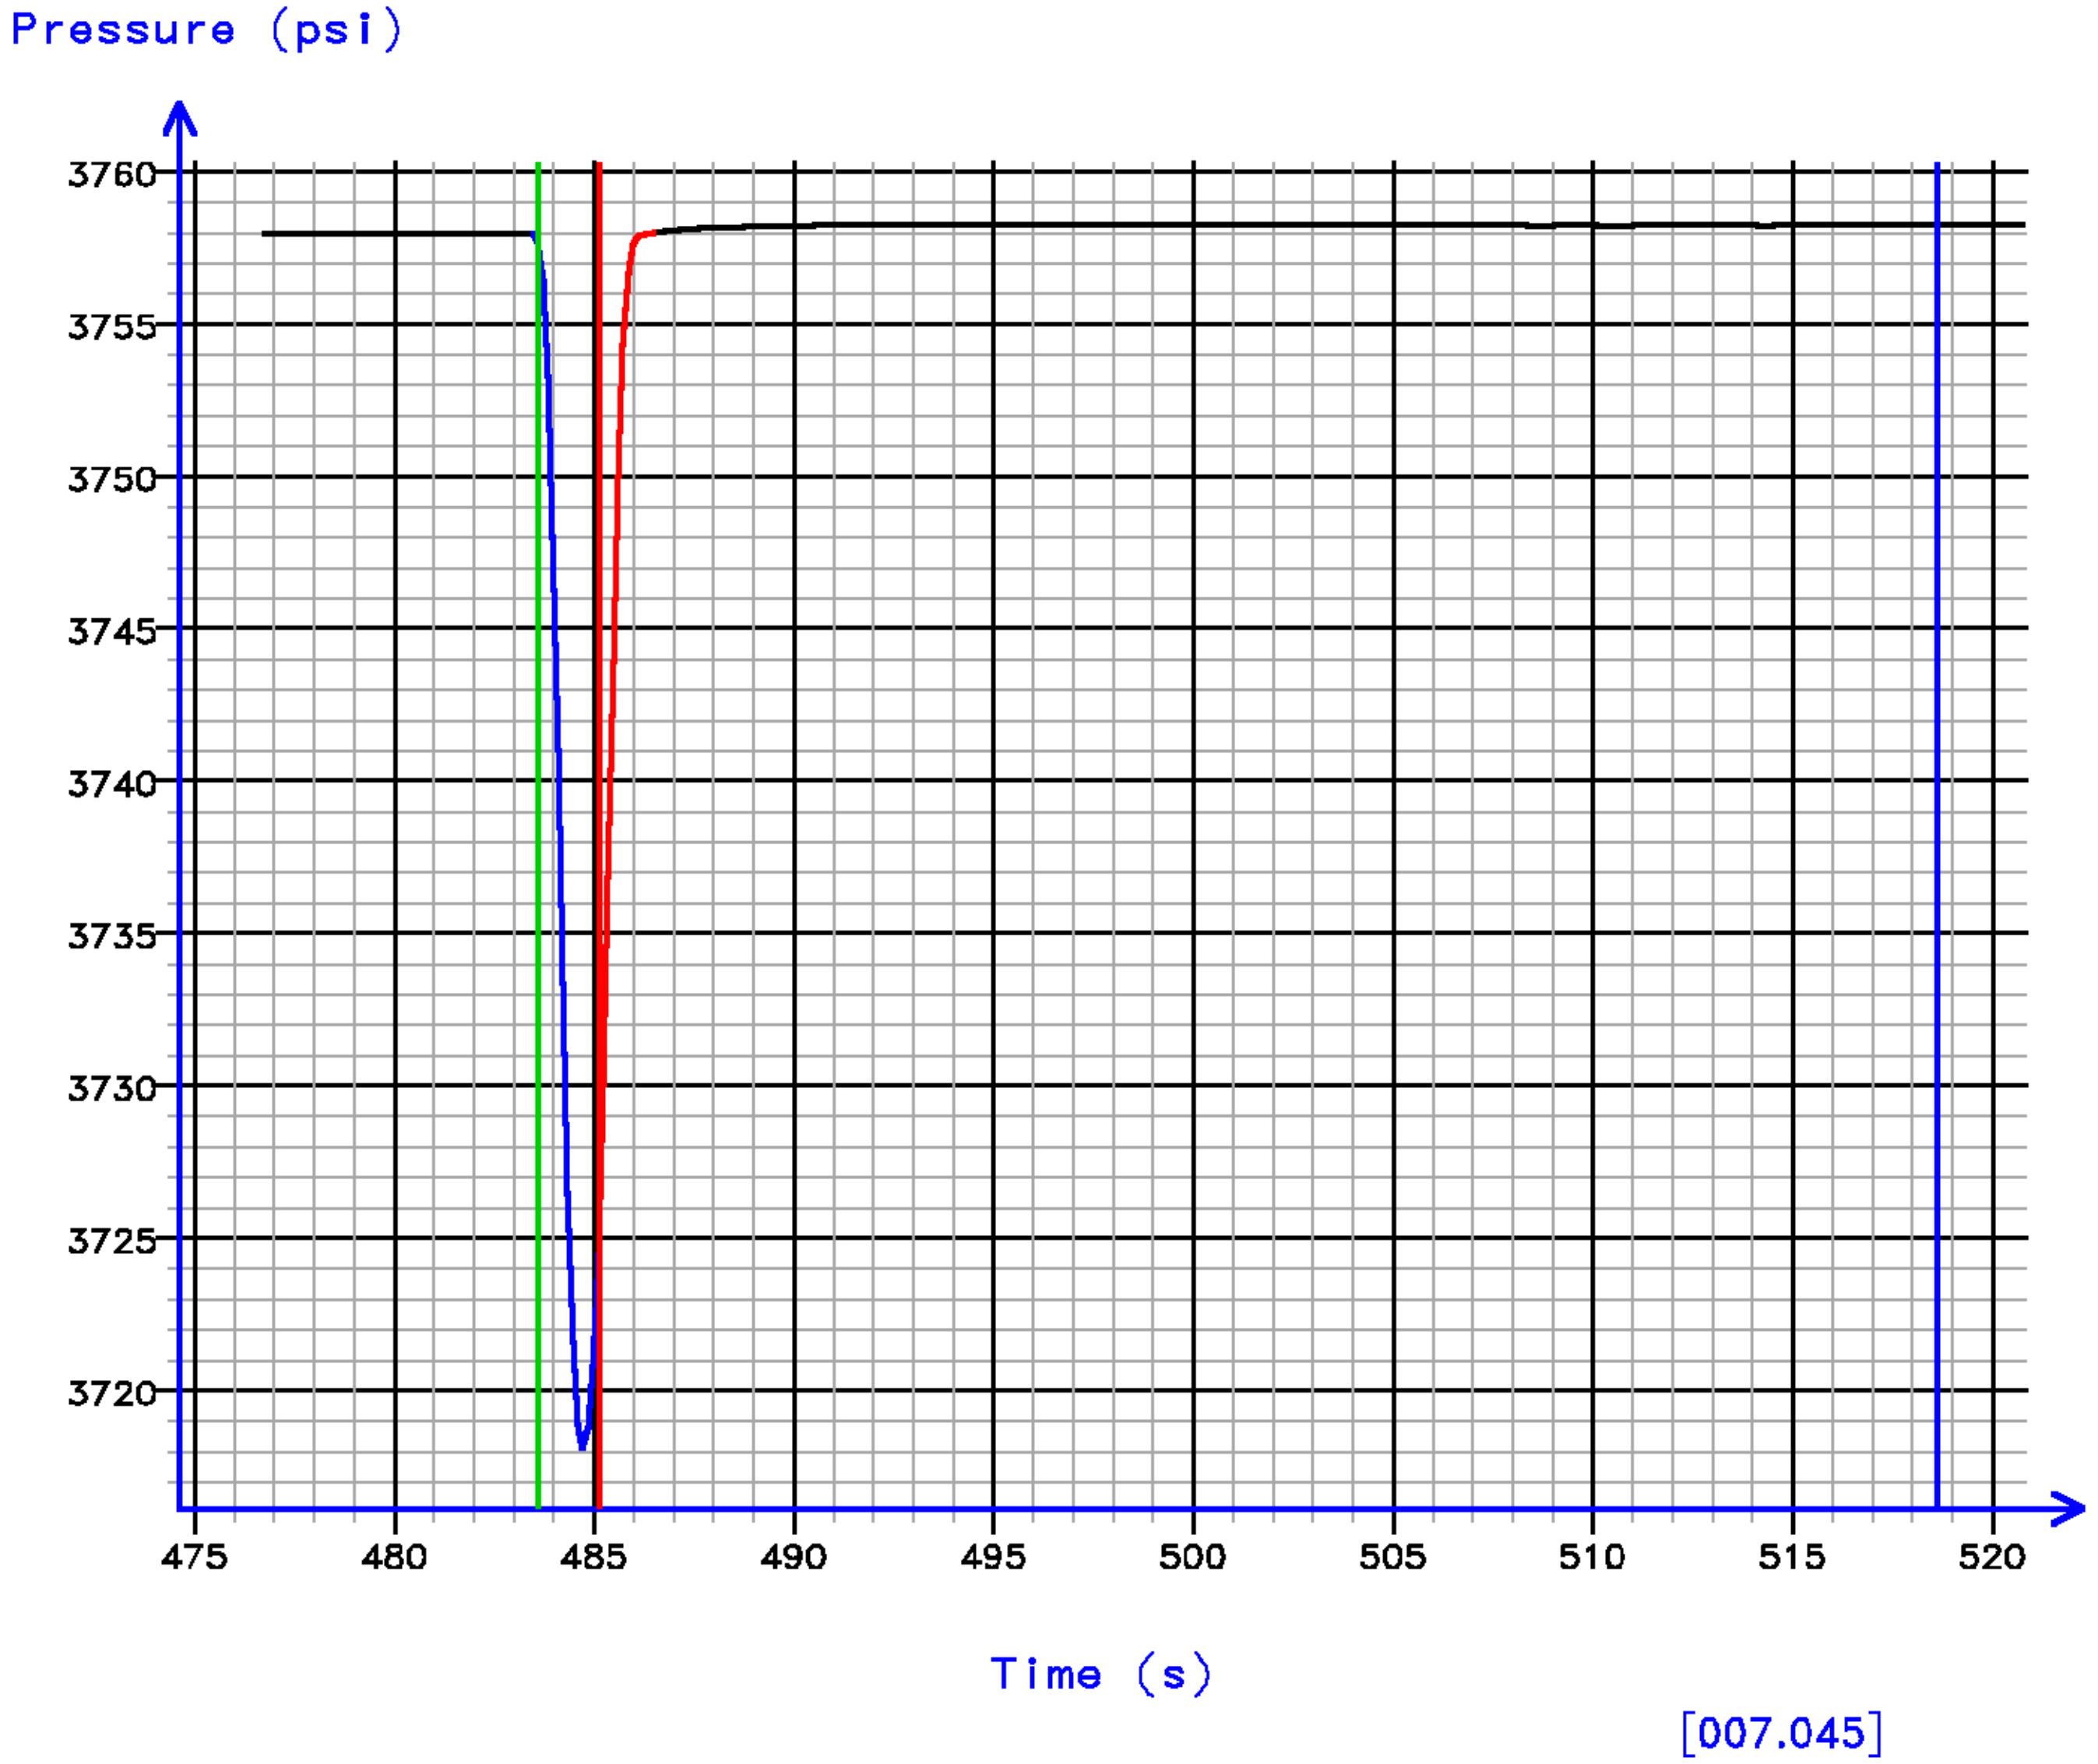

FLOW RATE ANALYSIS

Depth MD 2413.6 m TVD 2413.6 m

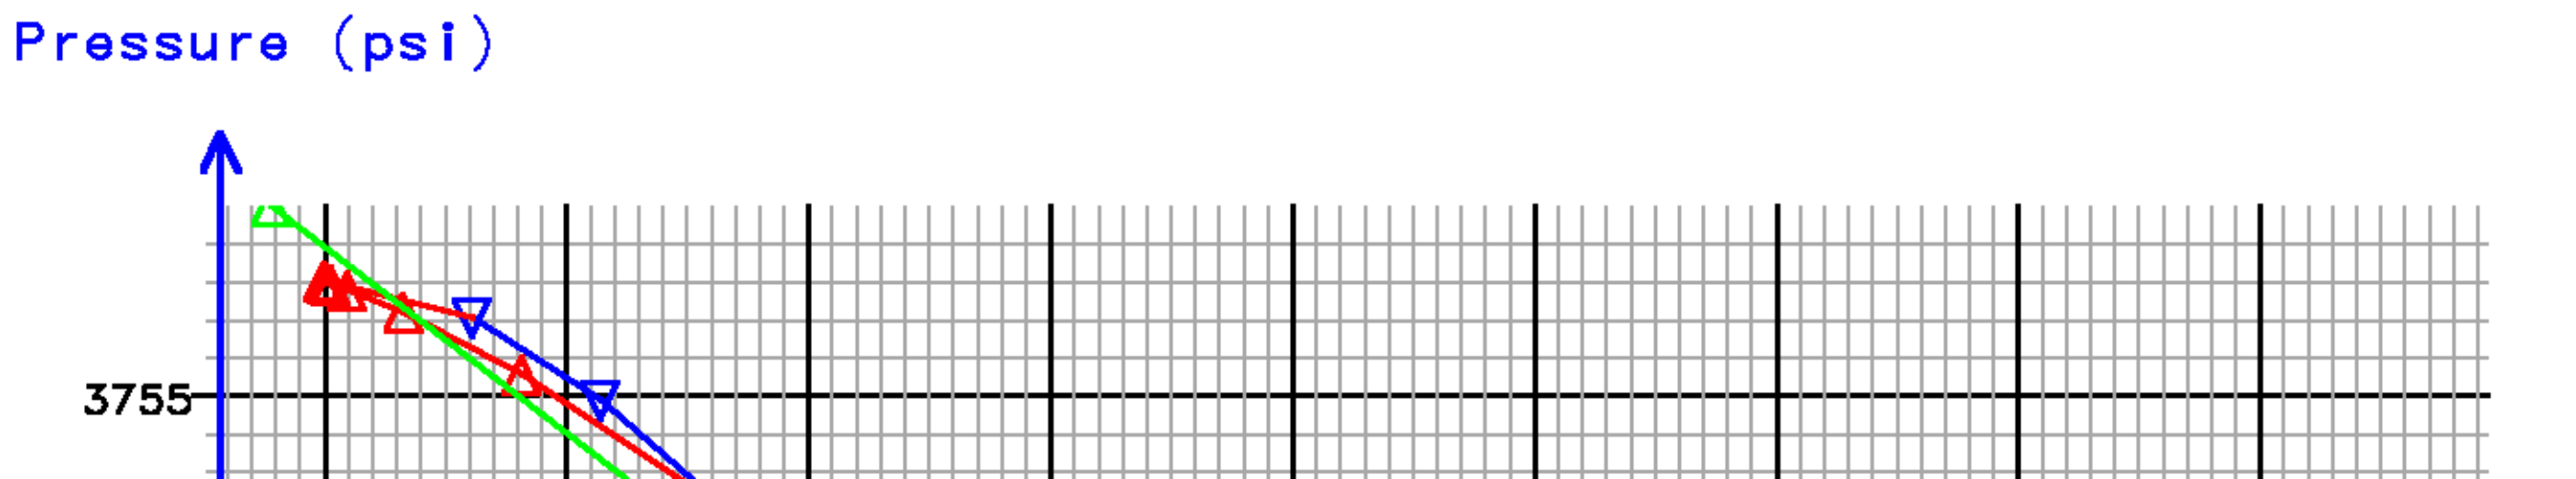

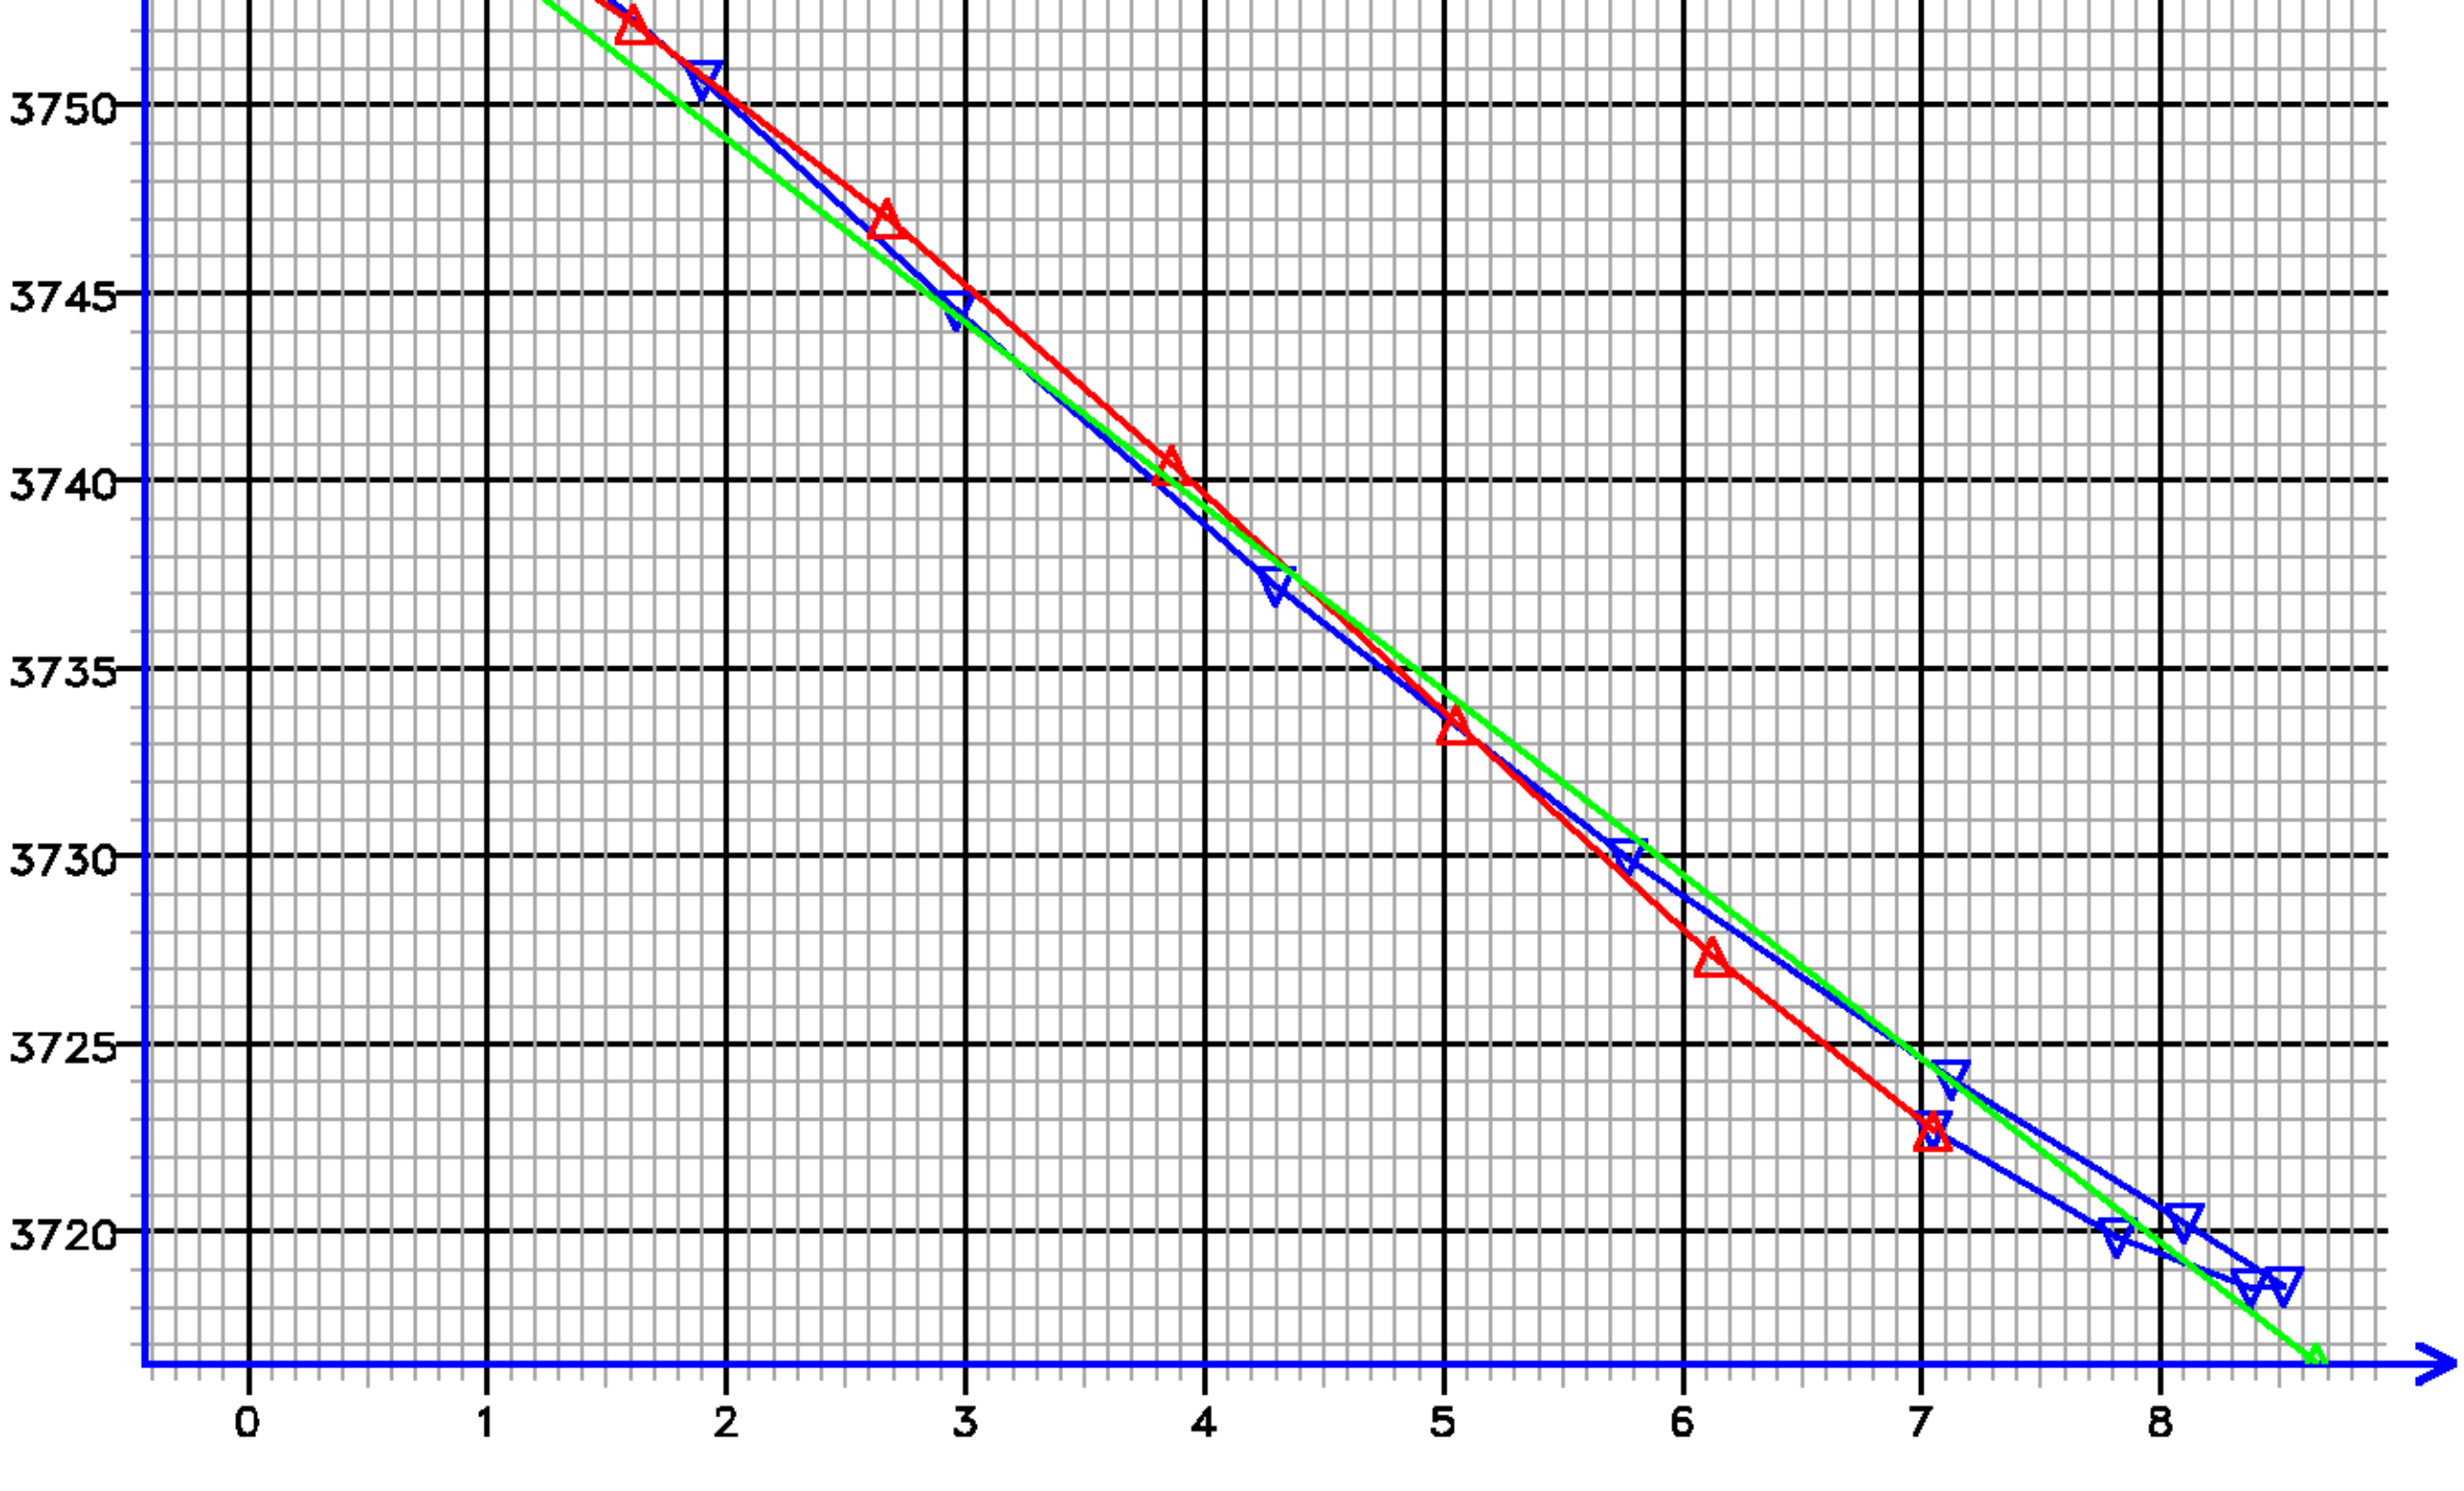

Kfra 702.544 (mD/cP), Kddu 763.613 (mD/cP) Confidence 99.59% [007.045]

PRESSURE HISTORY

Depth MD 2413.6 m TVD 2413.6 m

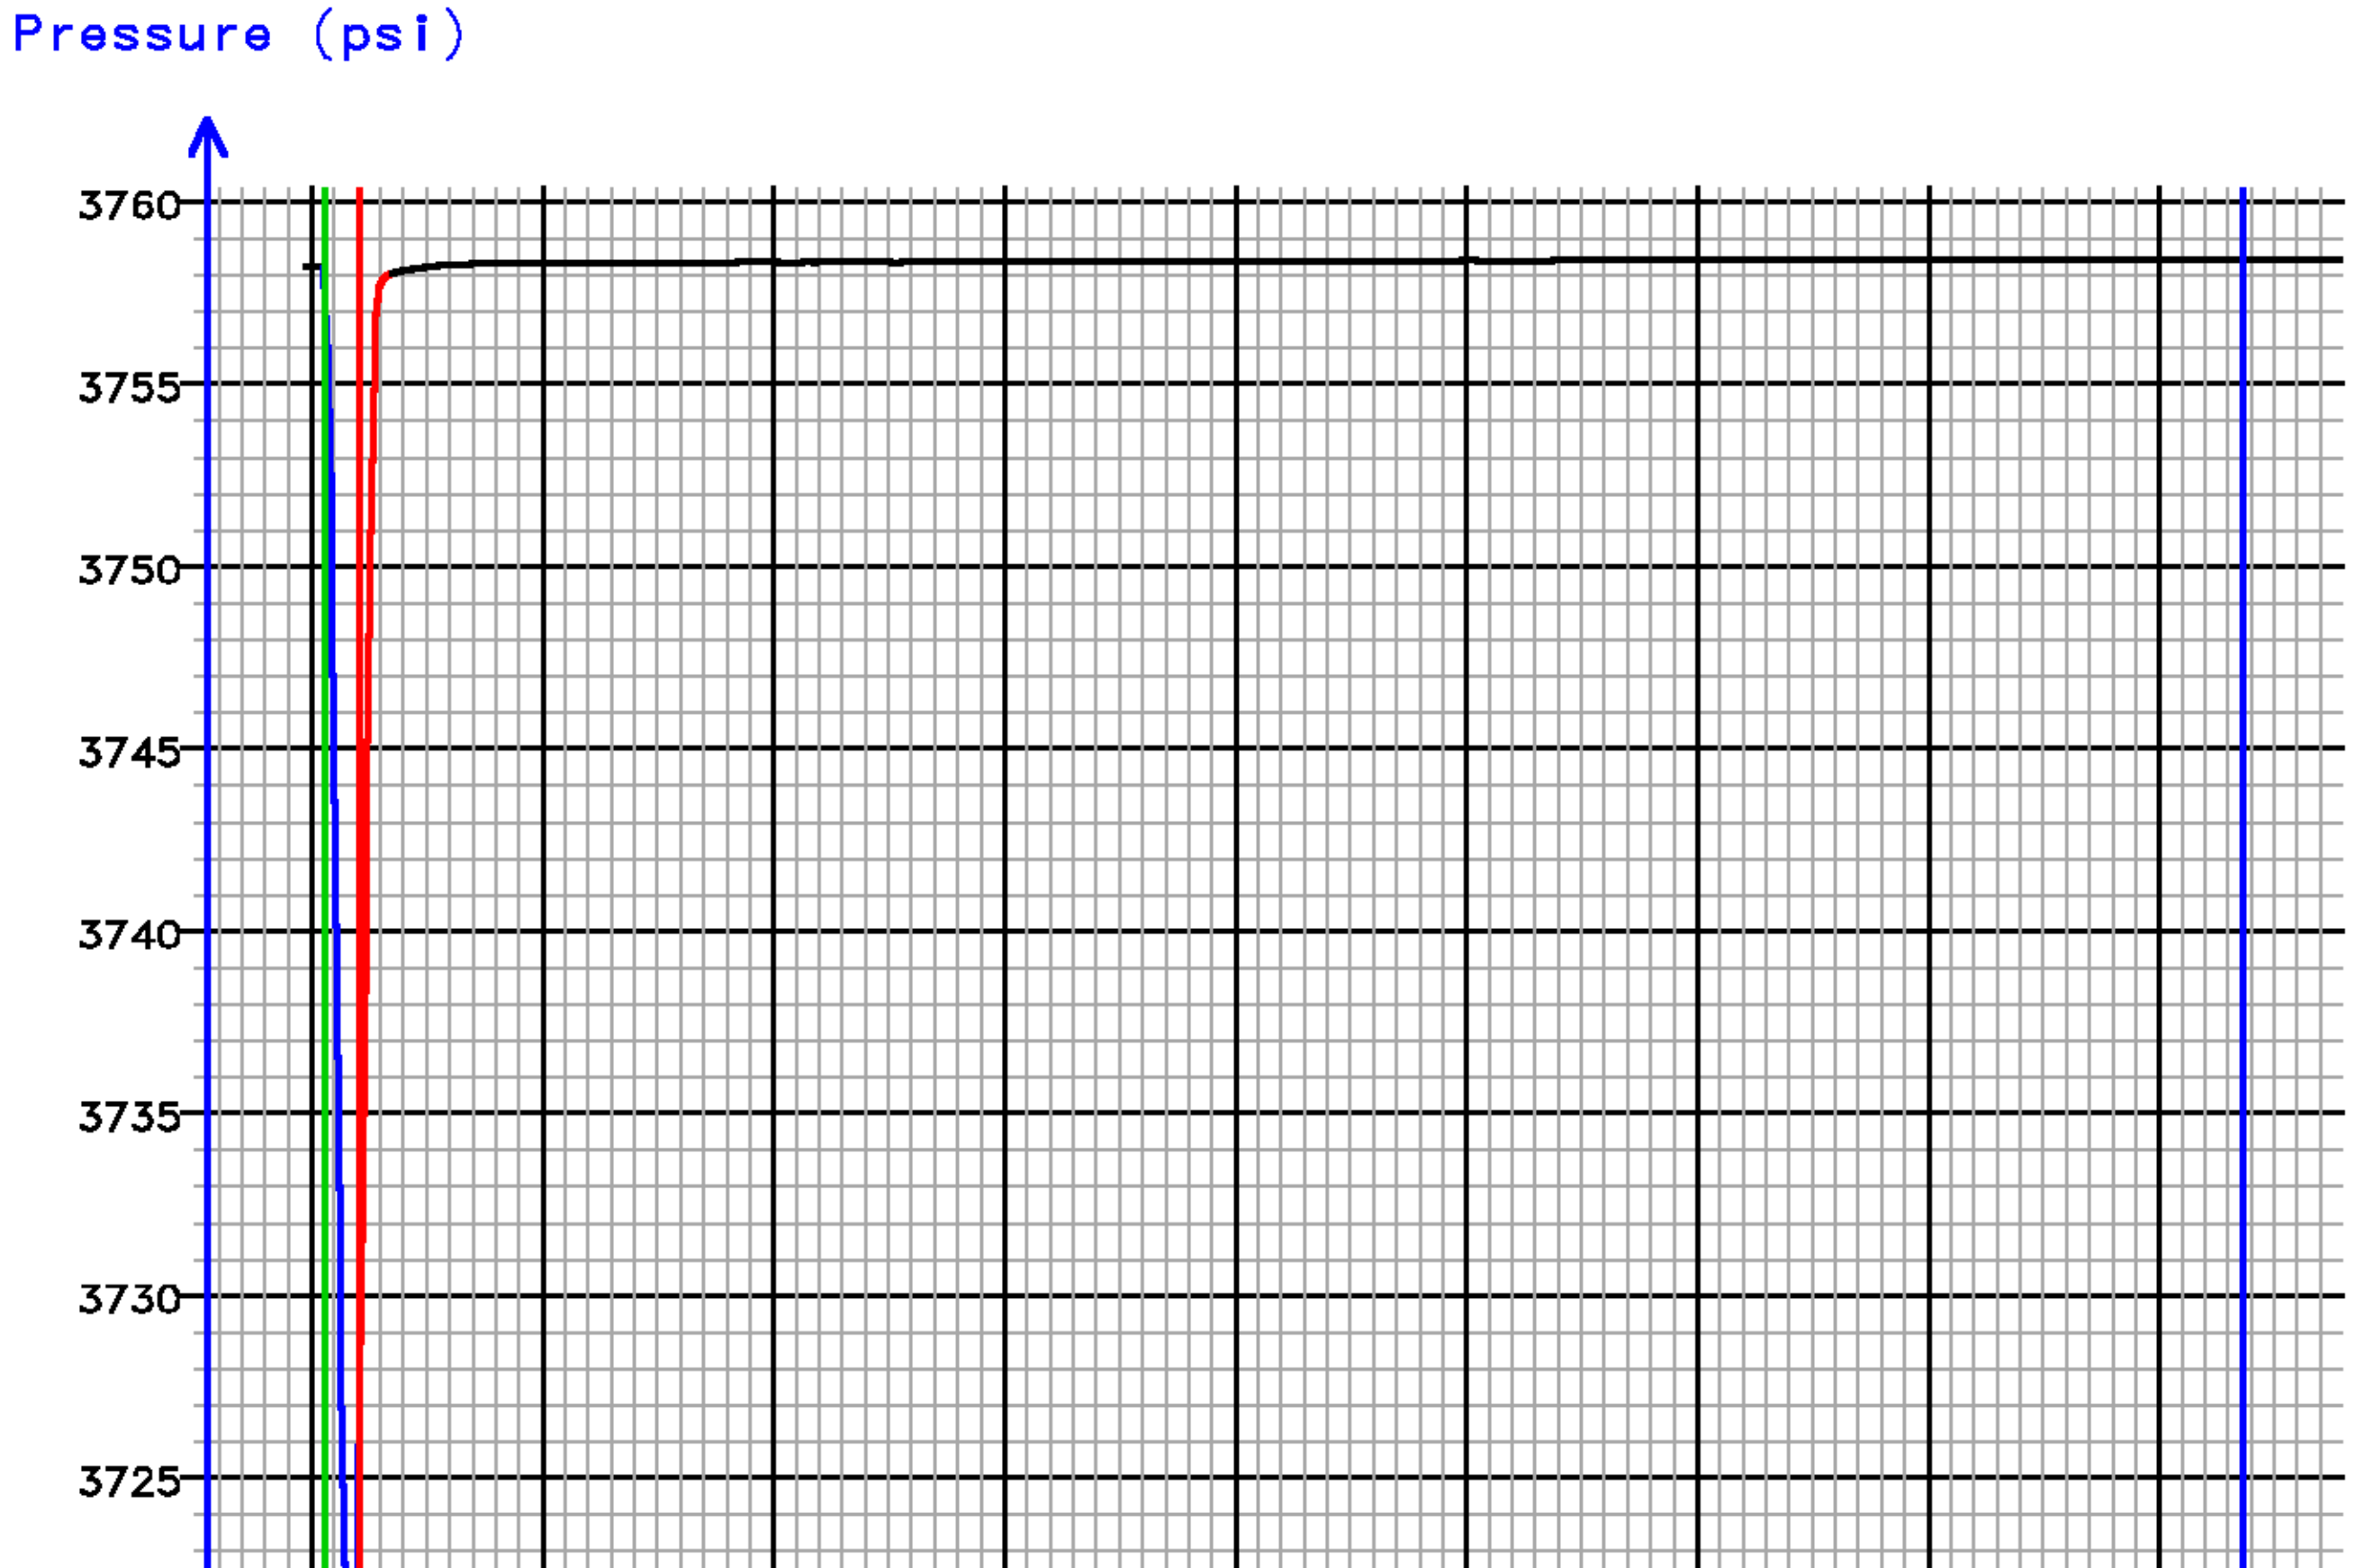

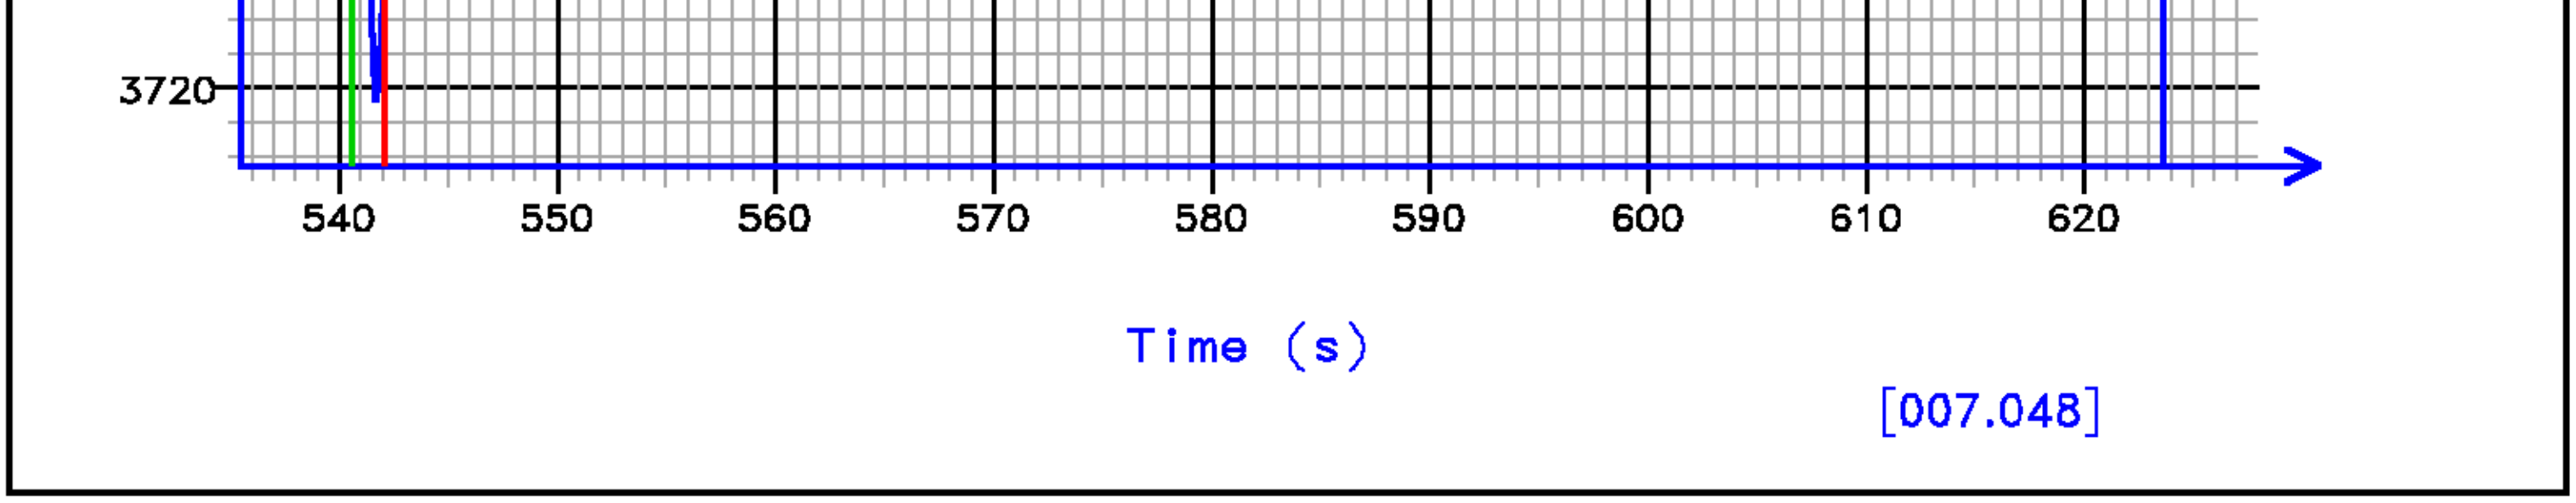

FLOW RATE ANALYSIS

Depth MD 2413.6 m TVD 2413.6 m

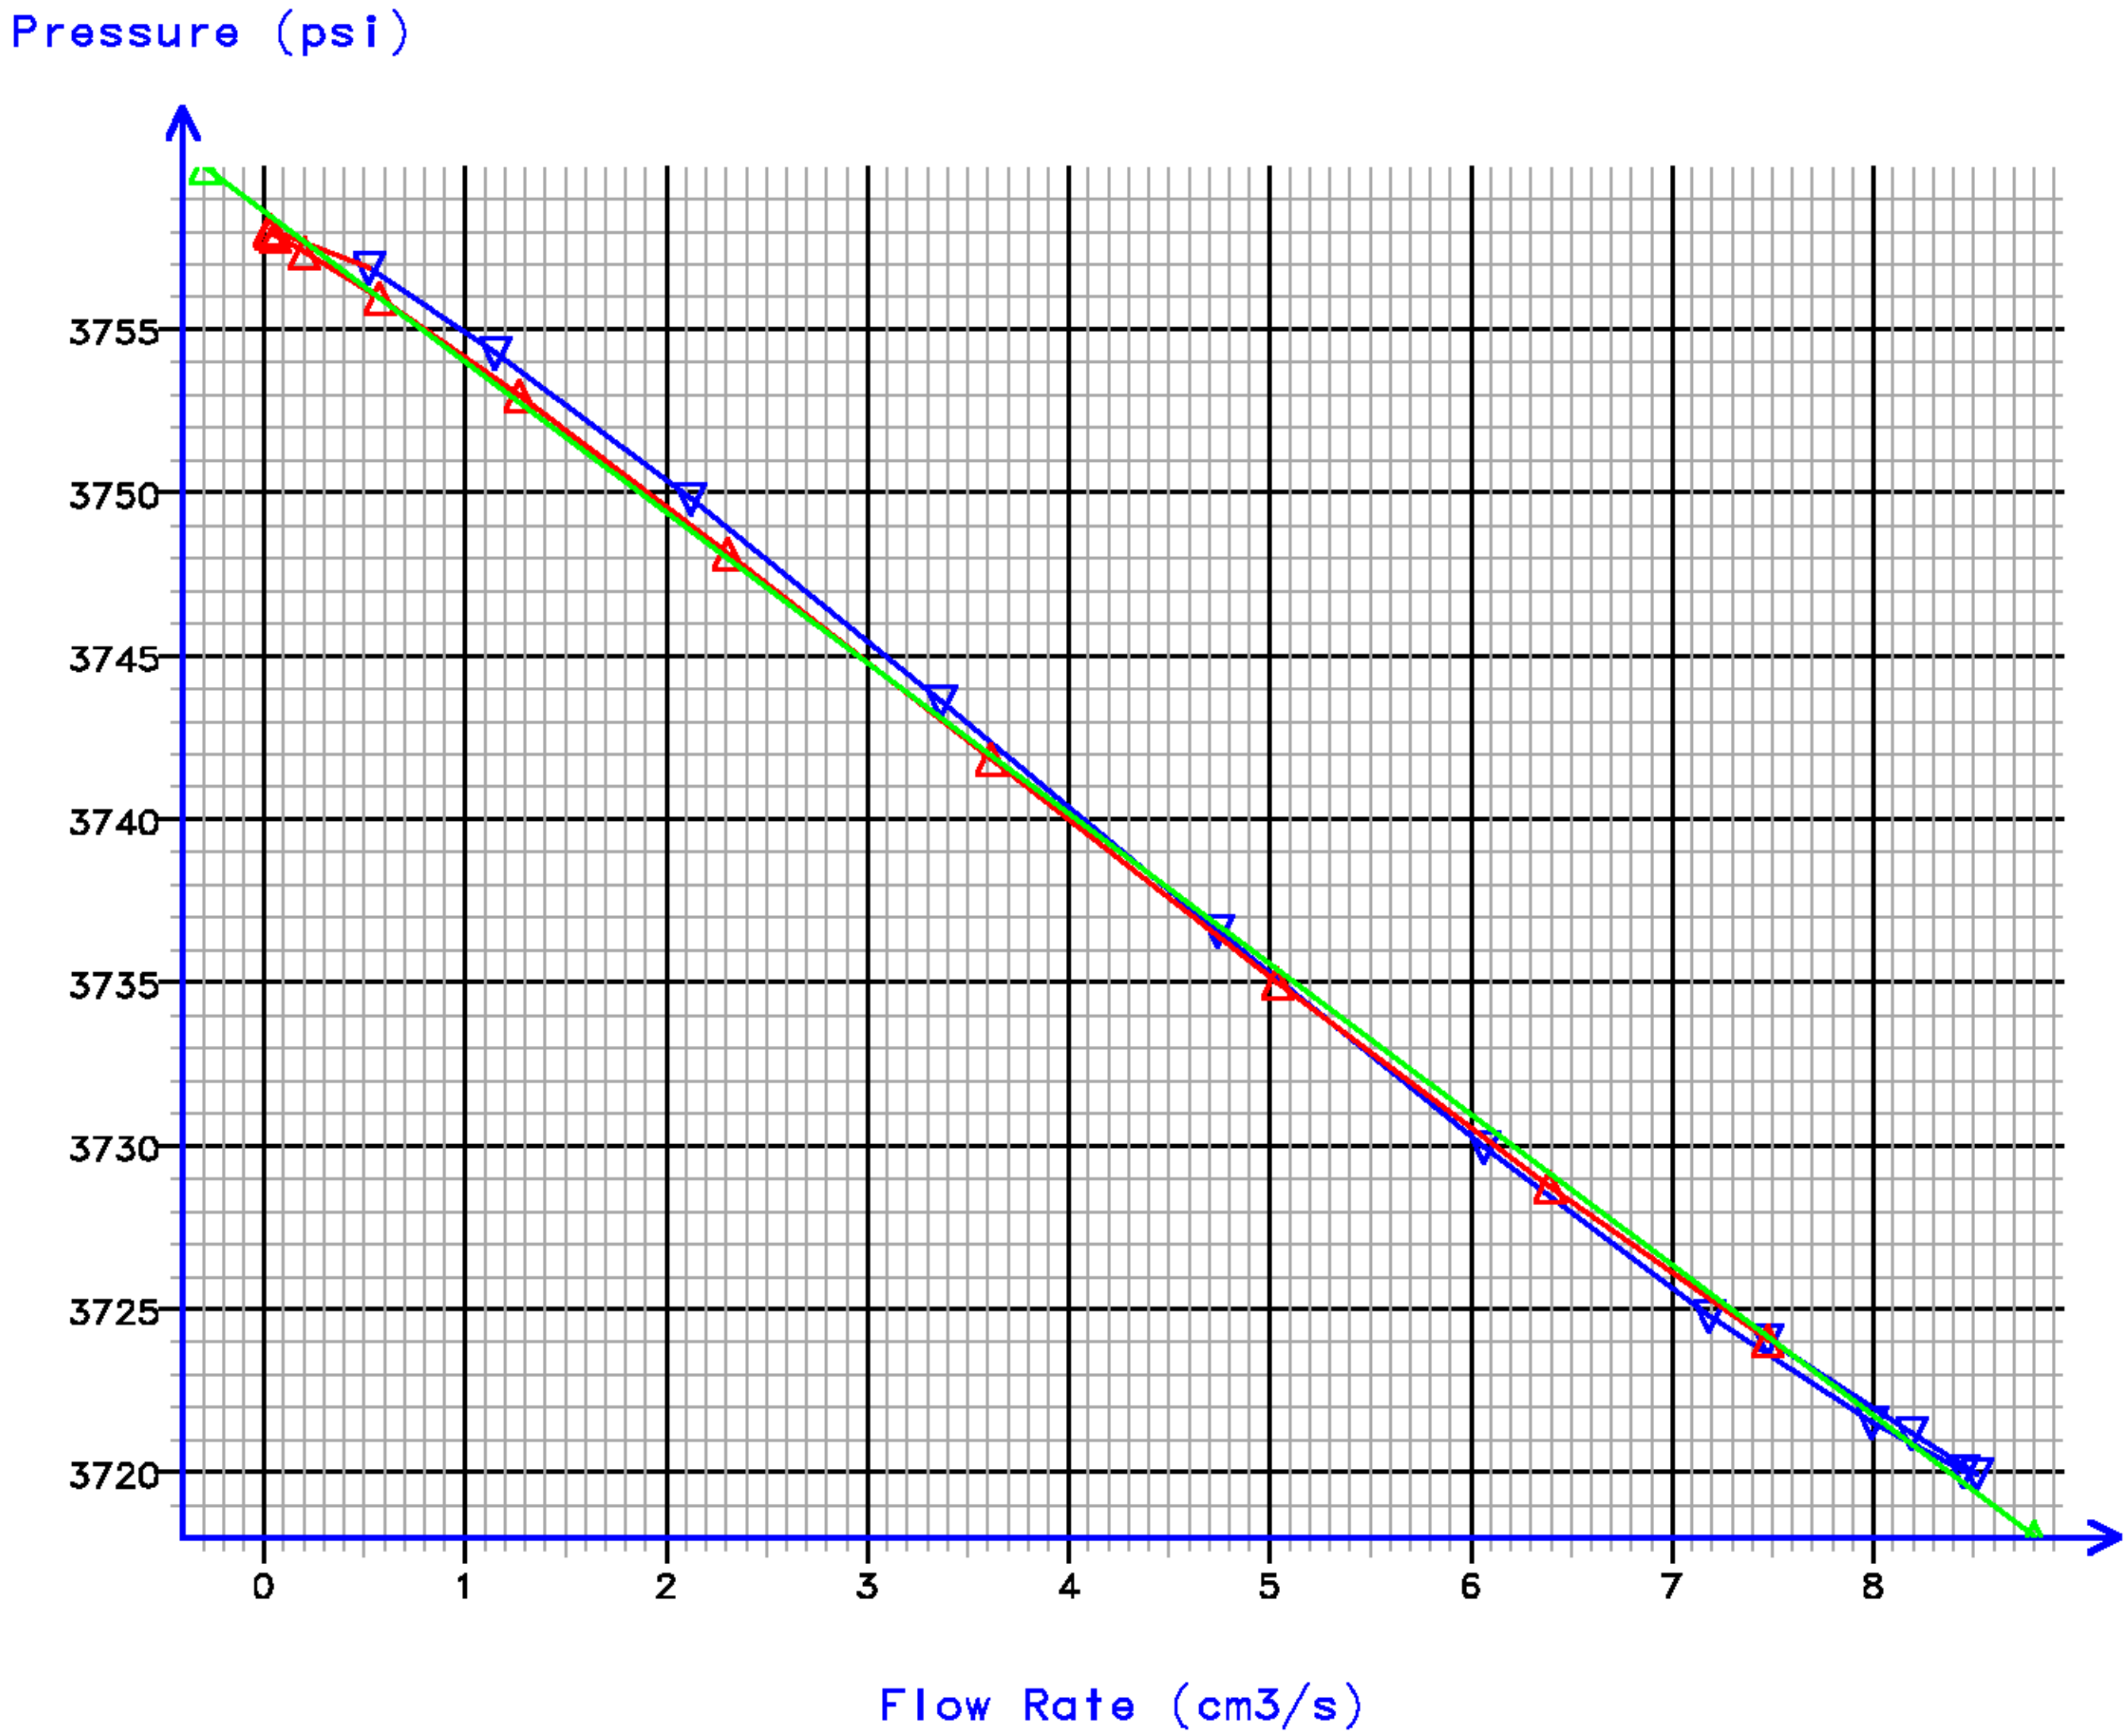

Kfra 746.669 (mD/cP), Kddu 766.746 (mD/cP) Confidence 99.88% [007.048]

Data File : j800g09.aff
Presentation: gpi_rci-b3xx.log

SECO	TOOL COMMAND	Packer Quartz [apql] 0 15000	QL ONES 0 10			

SDN

ANNOTATIONS

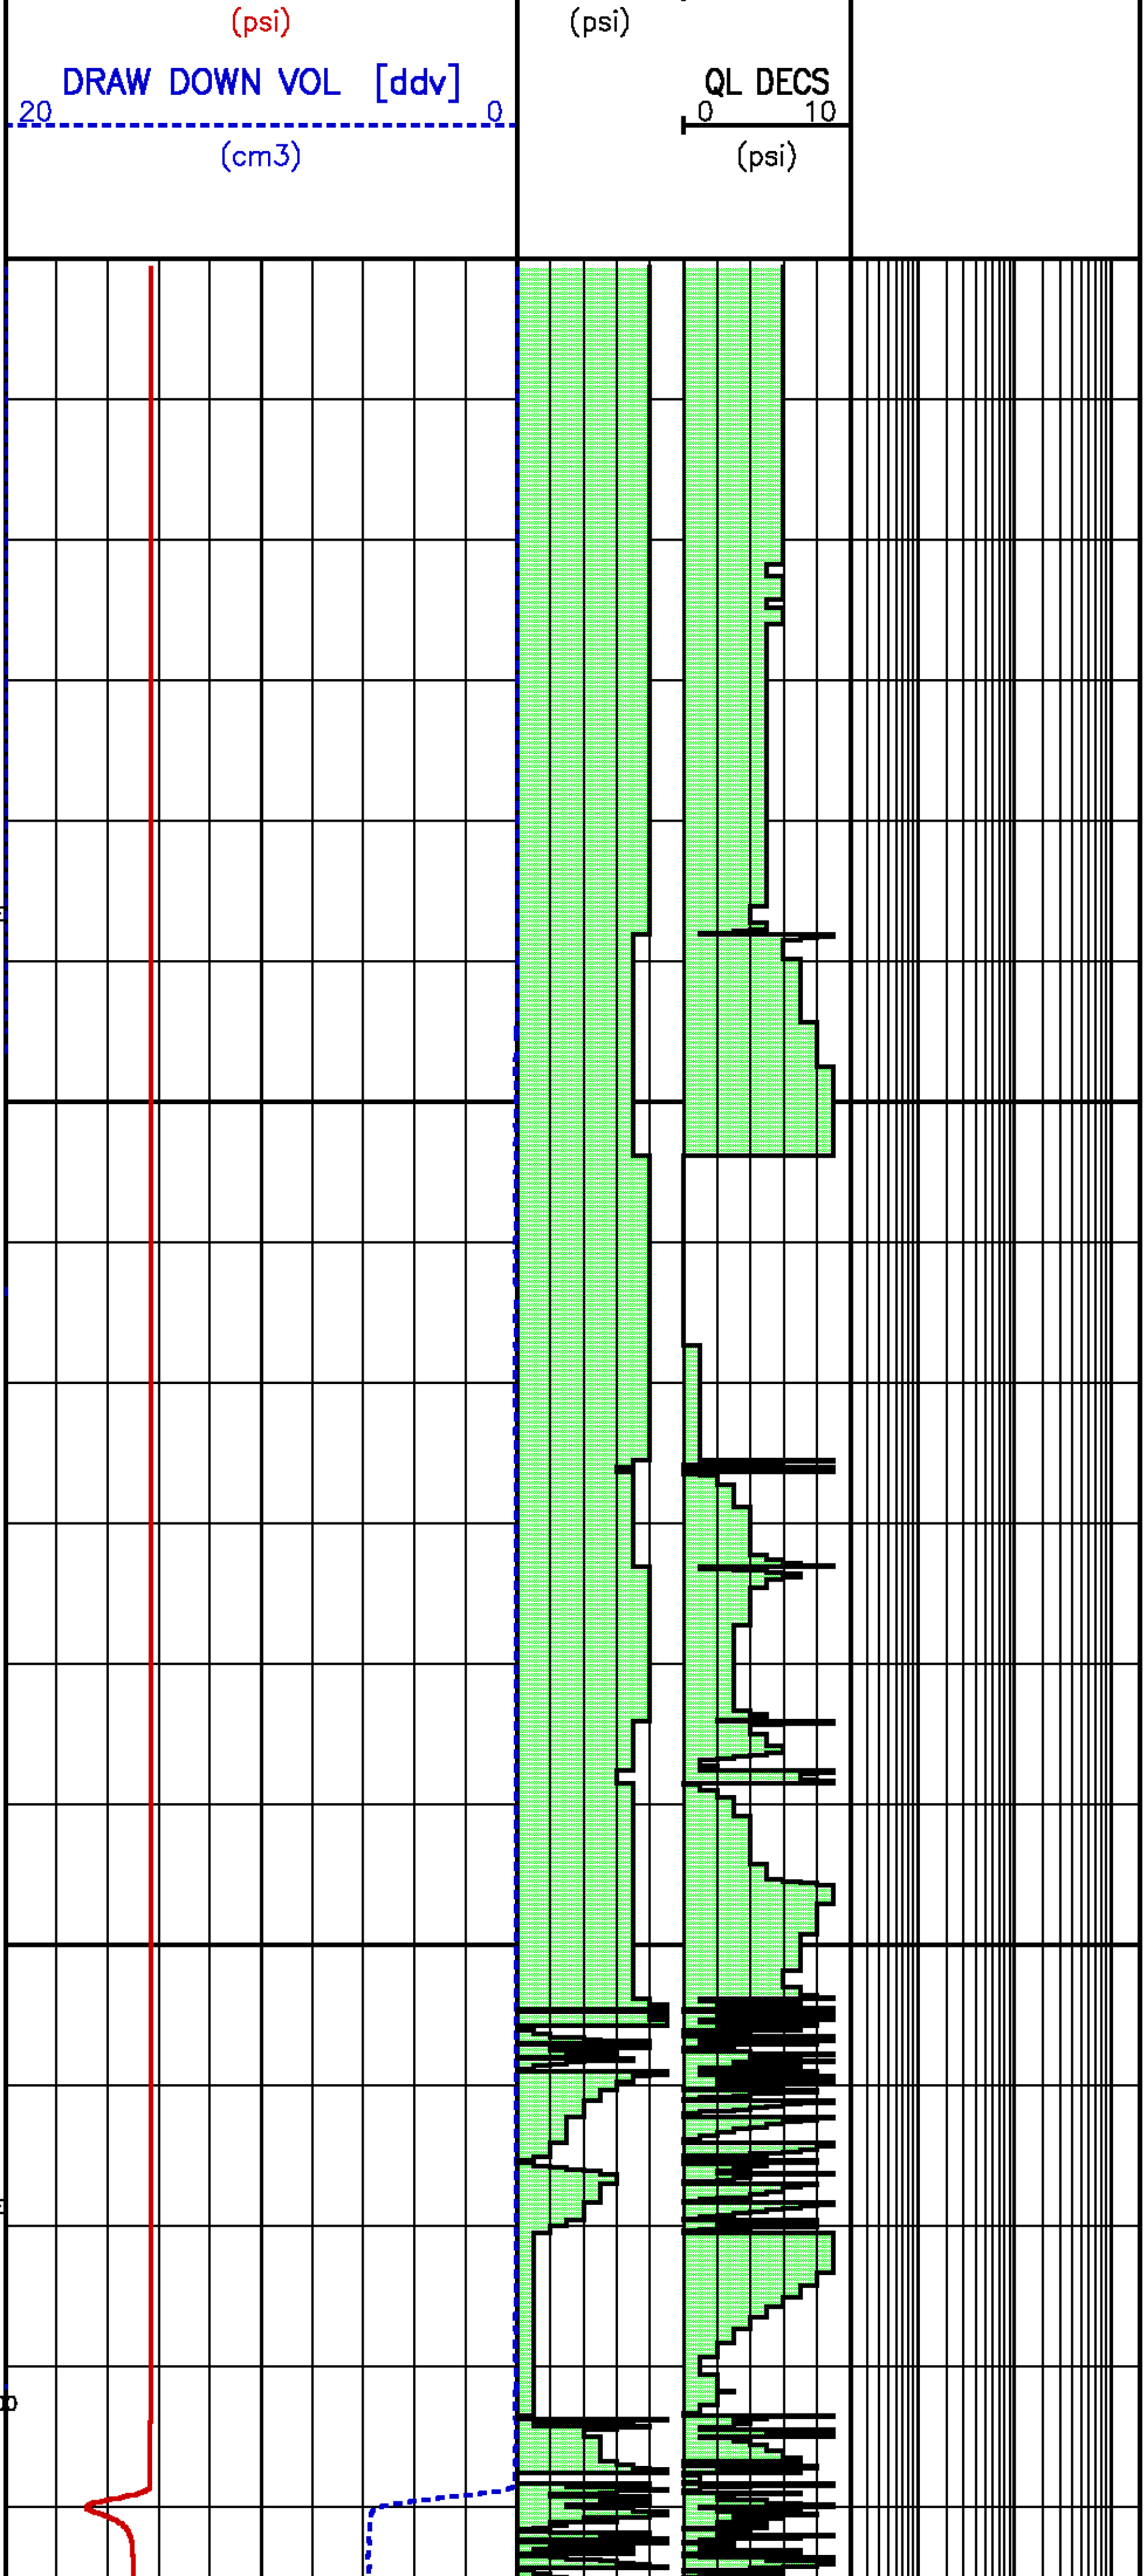

BB[1] CLOSE BYPASS VALVE

BB[1] OPEN BYPASS VALVE

MB[1] EXTEND PACK 2850

MB[1] RECHARGE 2850

BB[1] CLOSE BYPASS VALVE

BB[1] DRAWDOWN 5 300 500

	APQL (psi)	RTDQL (degF)
0		
	4258.6	190.3
10	4258.6	190.3
	4258.6	190.3
20	4258.6	190.3
	4258.6	190.3
30	4258.6	190.3
	4258.6	190.3
40	4258.5	190.3
	4258.5	190.3
50	4257.7	190.3
	4257.8	190.3
60	4257.9	190.3
	4258.0	190.3
70	4258.0	190.3
	4258.1	190.3
80	4258.1	190.3
	4258.2	190.3
90	4257.5	190.3
	4258.5	190.3
100	4258.4	190.3
	4257.5	190.3
110	4257.4	190.3
	4257.5	190.3
120	4257.8	190.4
	4259.3	190.4
130	4266.4	190.4
	4262.0	190.4
140	4262.8	190.4
	4261.7	190.4
150	4261.2	190.4
	4245.2	190.4
160	2374.1	190.4
	3753.0	190.3

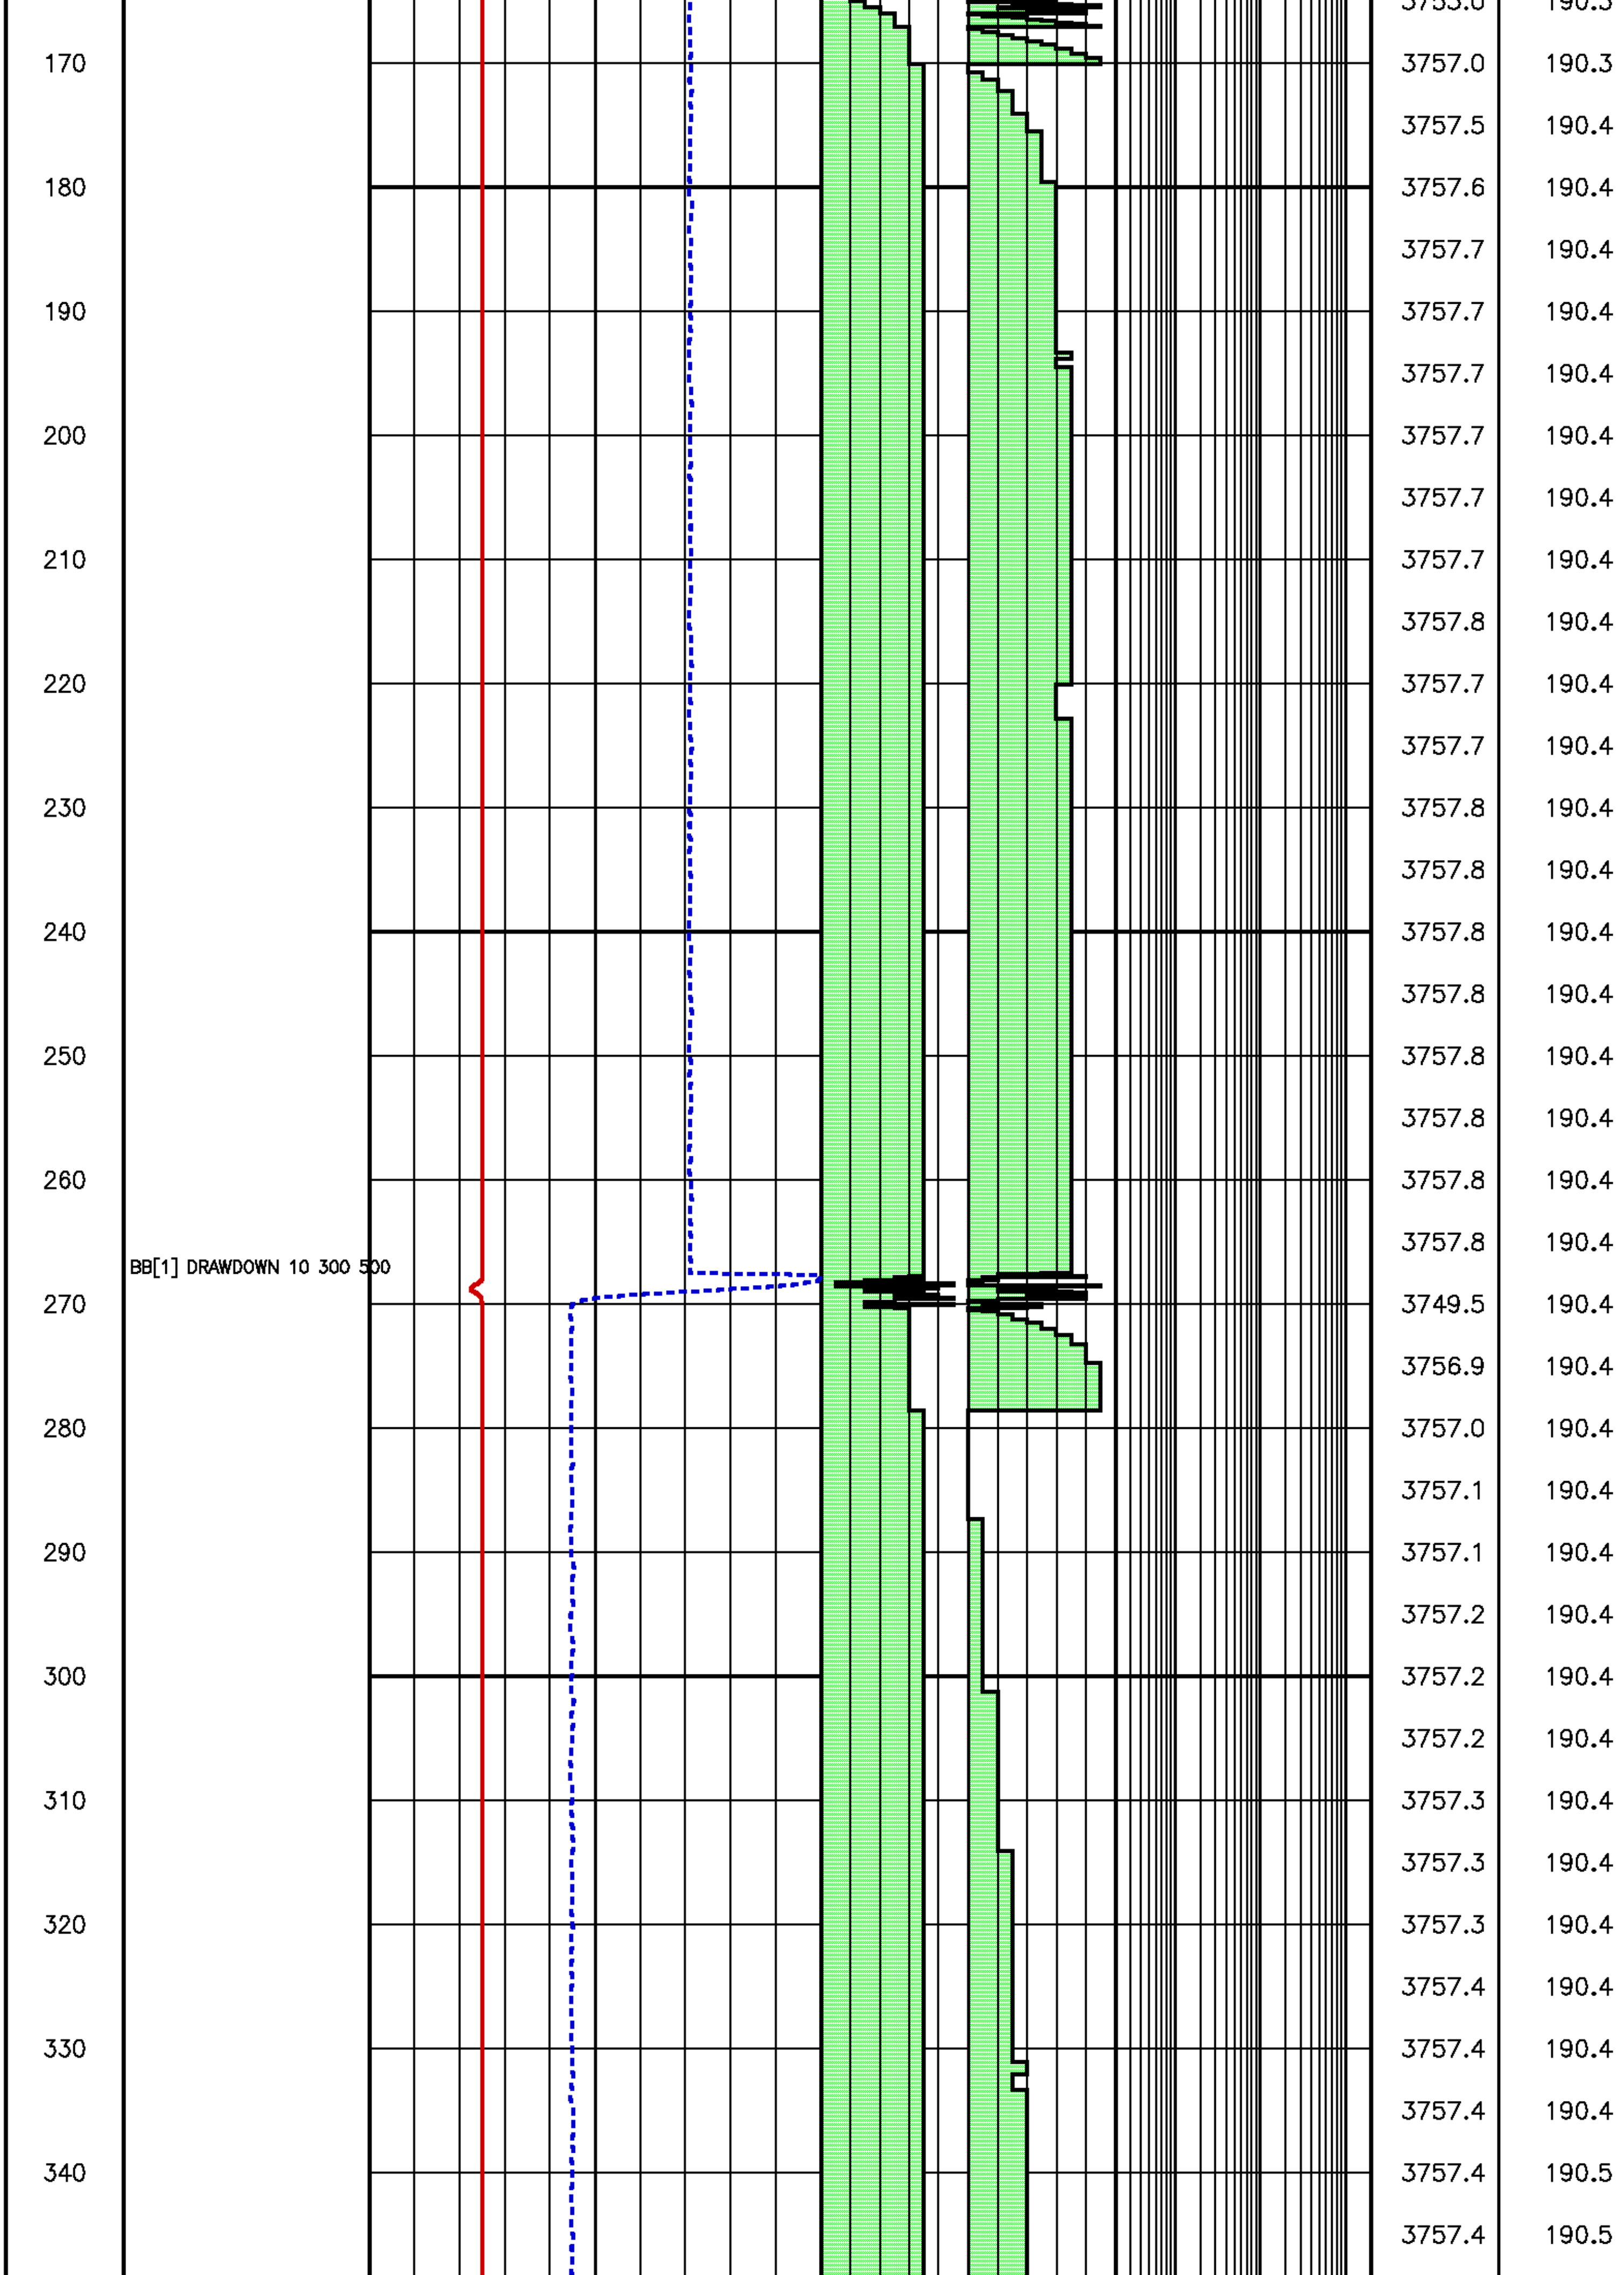

170 3757.0 190.3
3757.5 190.4
180 3757.6 190.4
3757.7 190.4
190 3757.7 190.4
3757.7 190.4
200 3757.7 190.4
3757.7 190.4
210 3757.7 190.4
3757.8 190.4
220 3757.7 190.4
3757.7 190.4
230 3757.8 190.4
3757.8 190.4
240 3757.8 190.4
3757.8 190.4
250 3757.8 190.4
3757.8 190.4
260 3757.8 190.4
3757.8 190.4
BB[1] DRAWDOWN 10 300 500
270 3749.5 190.4
3756.9 190.4
280 3757.0 190.4
3757.1 190.4
290 3757.1 190.4
3757.2 190.4
300 3757.2 190.4
3757.2 190.4
310 3757.3 190.4
3757.3 190.4
320 3757.3 190.4
3757.4 190.4
330 3757.4 190.4
3757.4 190.4
340 3757.4 190.5
3757.4 190.5

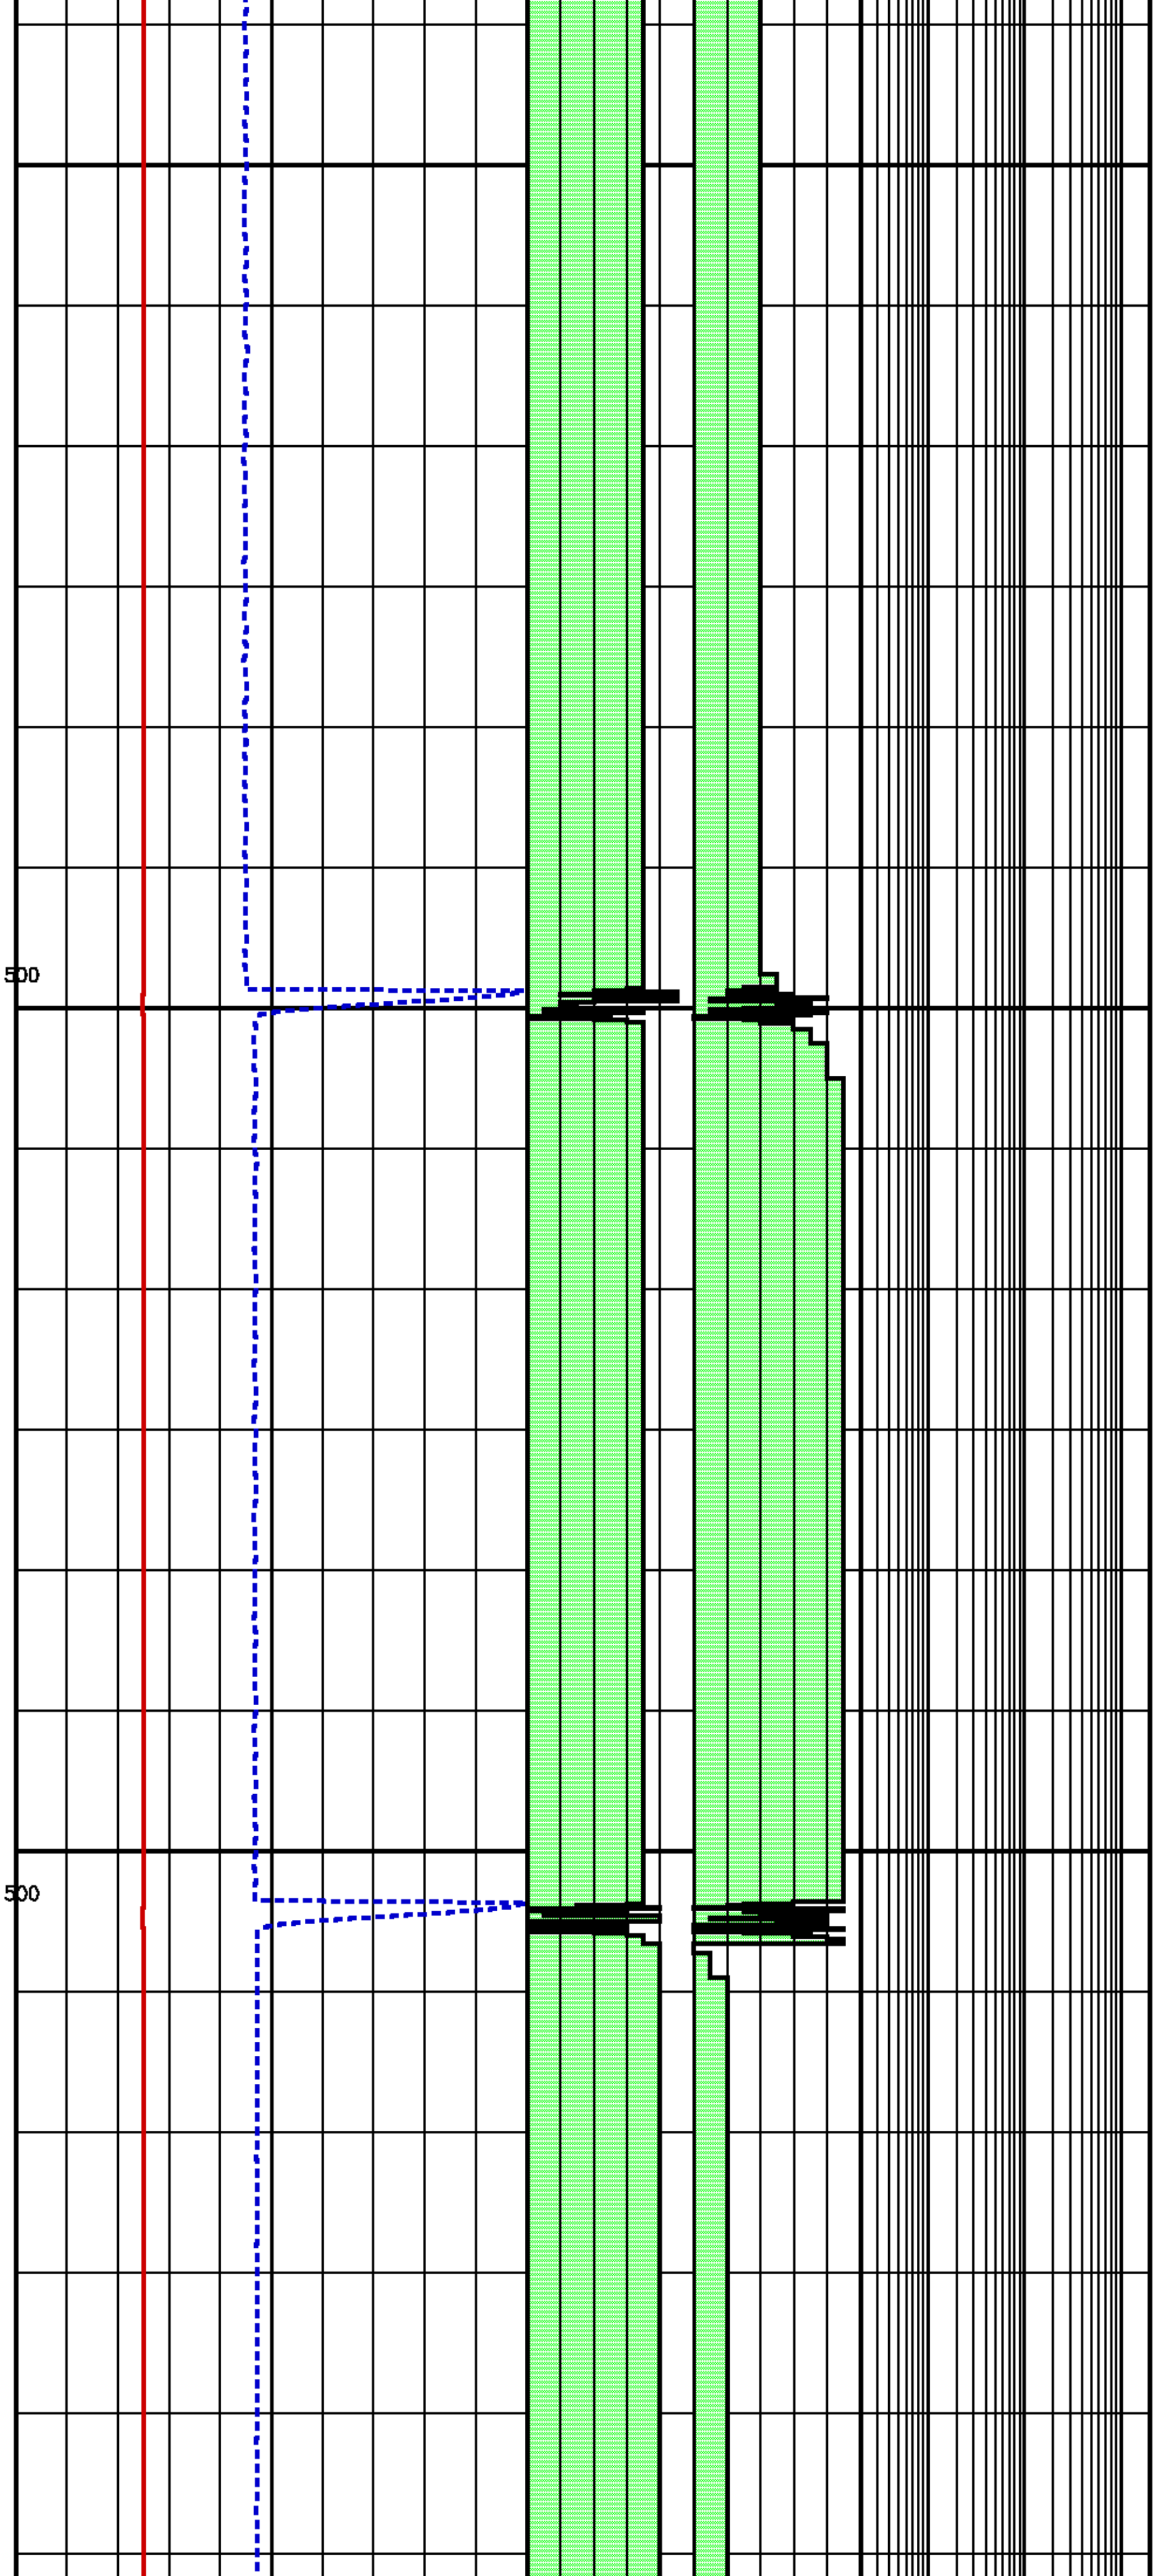

350		3757.5	190.5
		3757.5	190.5
360		3757.5	190.5
		3757.5	190.5
370		3757.5	190.5
		3757.5	190.5
380		3757.5	190.5
		3757.5	190.5
390		3757.5	190.5
		3757.5	190.5
400		3757.5	190.5
		3757.5	190.5
410		3757.5	190.5
		3757.5	190.5
	BB[1] DRAWDOWN 10 300 500		
420		3716.4	190.5
		3757.9	190.5
430		3757.9	190.5
		3758.0	190.5
440		3758.0	190.5
		3758.0	190.5
450		3758.0	190.5
		3758.0	190.5
460		3758.0	190.5
		3758.0	190.5
470		3758.0	190.5
		3758.0	190.5
480		3758.0	190.5
	BB[1] DRAWDOWN 10 300 500		
		3720.8	190.5
490		3758.2	190.5
		3758.3	190.5
500		3758.3	190.5
		3758.3	190.5
510		3758.2	190.5
		3758.3	190.5
520		3758.3	190.5
		3758.2	190.5
530		3758.2	190.5

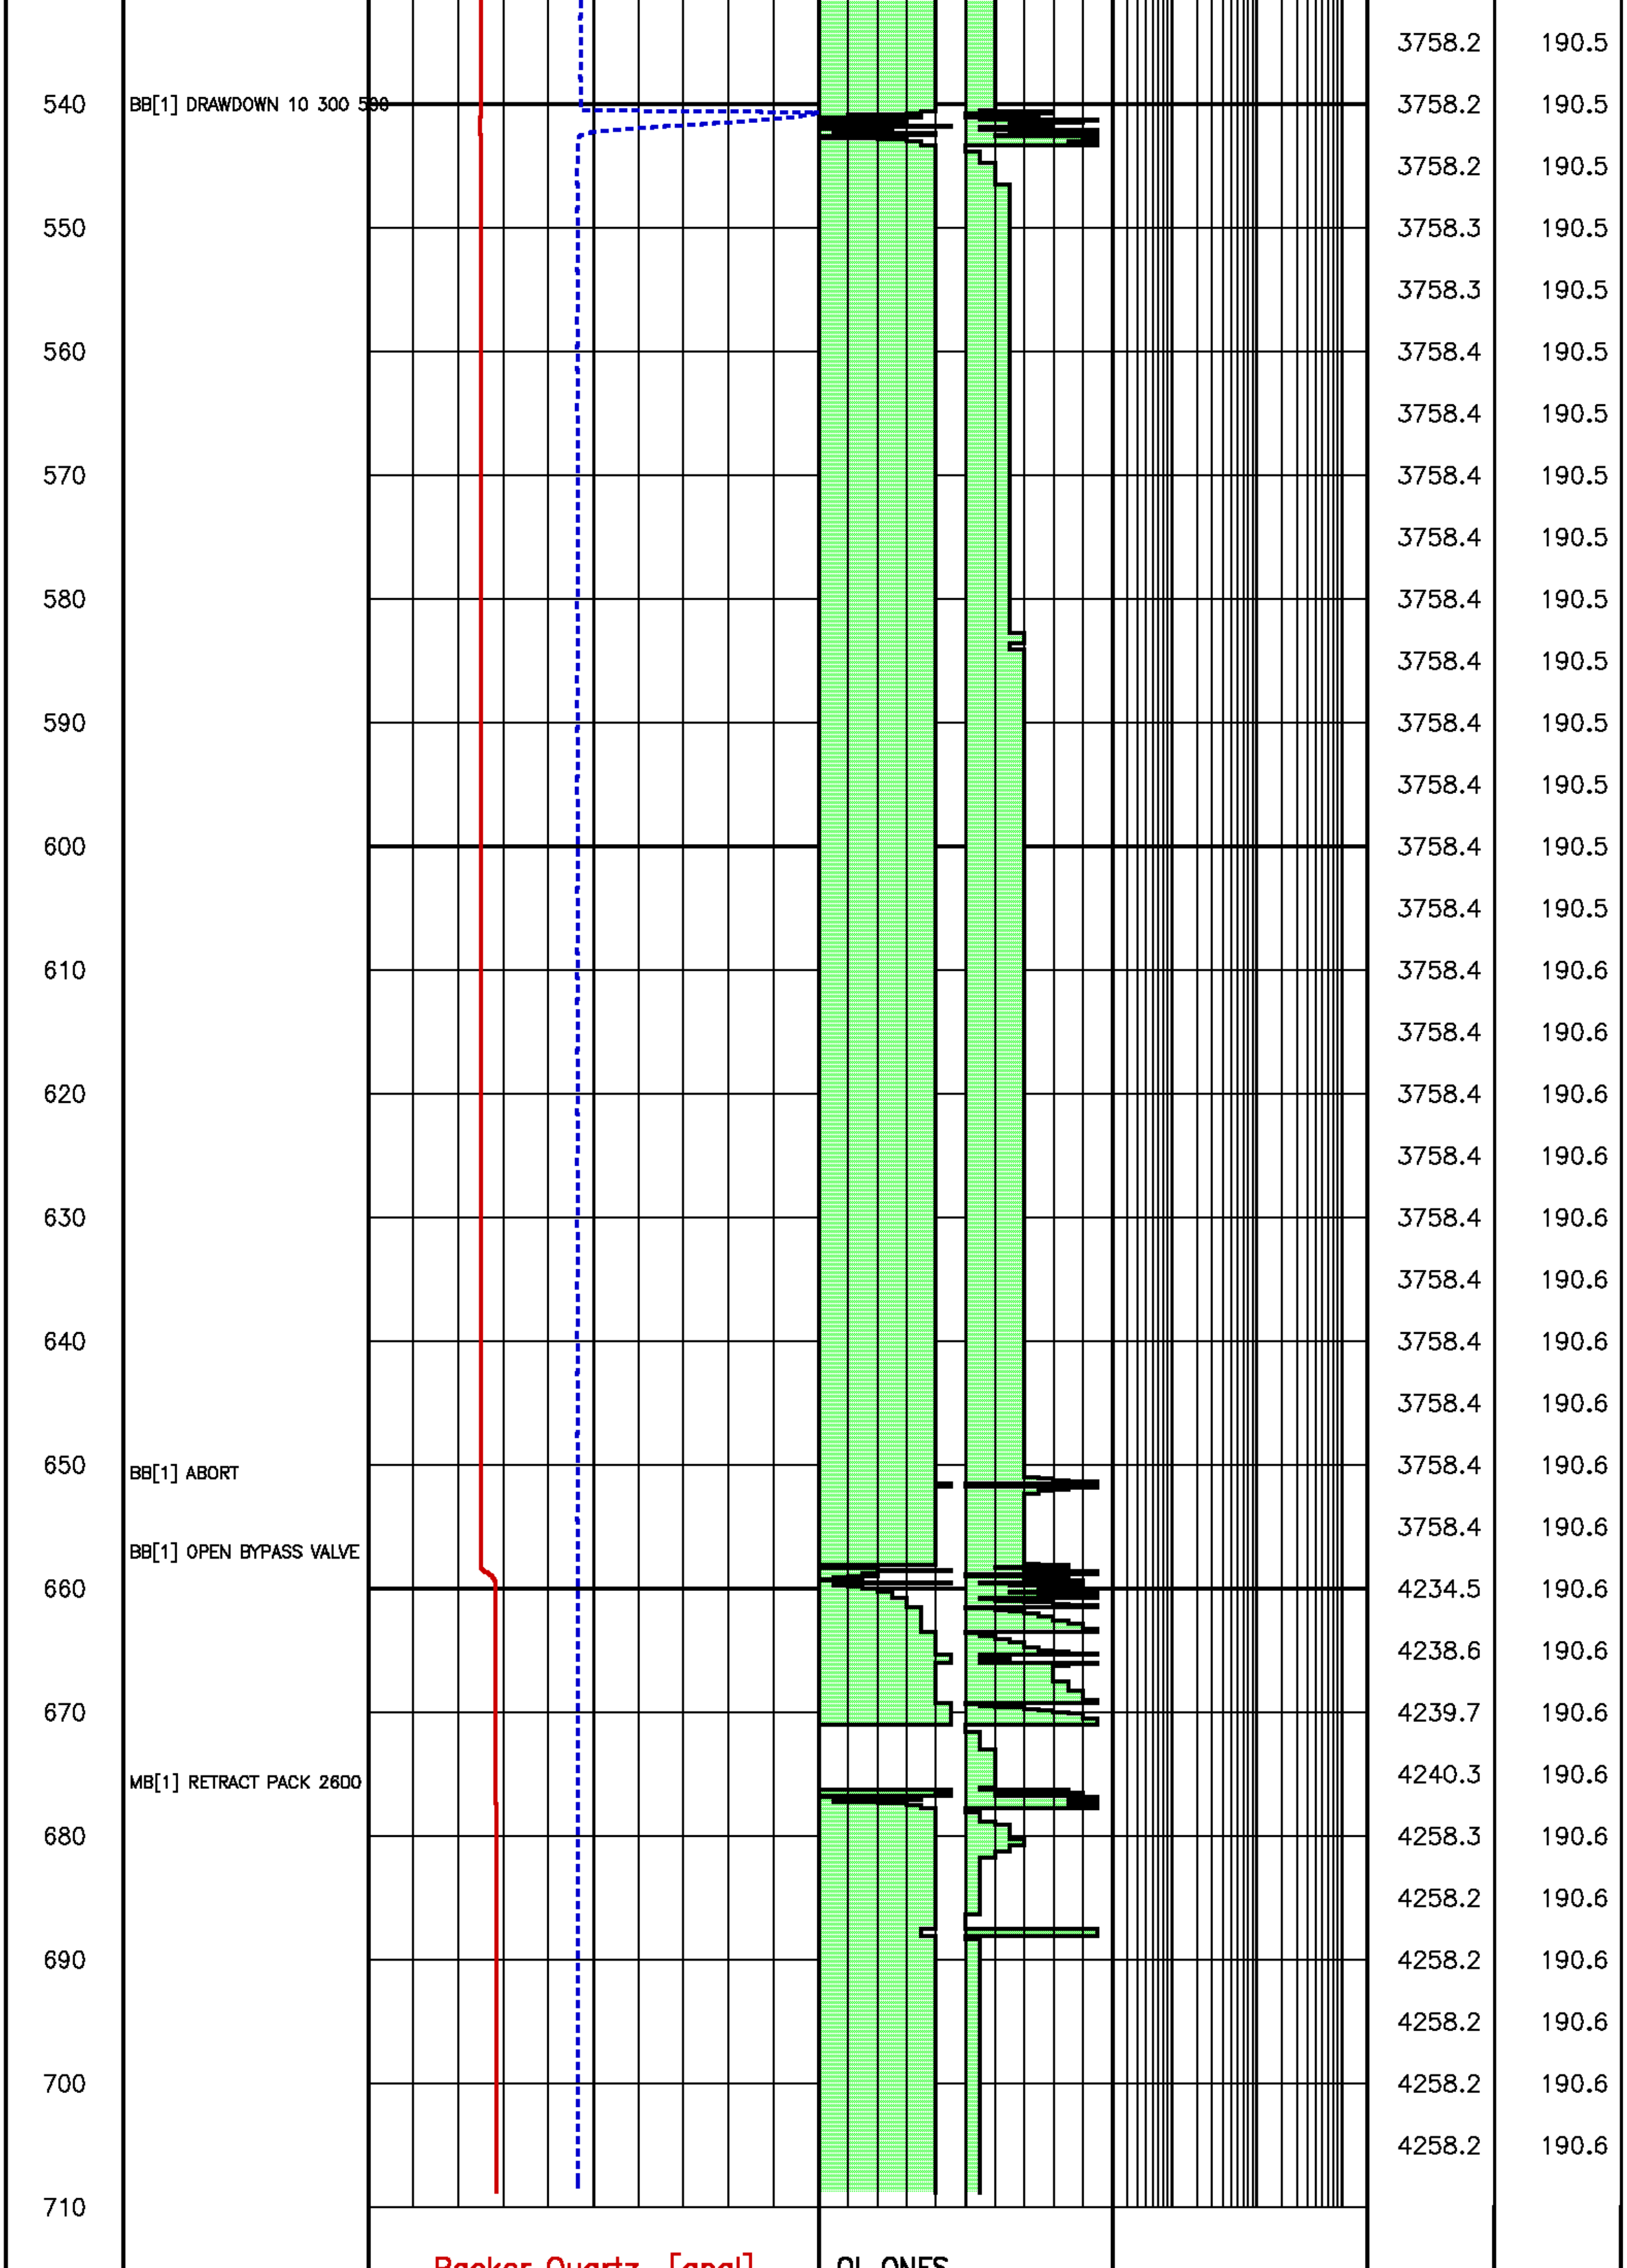

540
BB[1] DRAWDOWN 10 300 590
550
560
570
580
590
600
610
620
630
640
650
BB[1] ABORT
BB[1] OPEN BYPASS VALVE
660
670
MB[1] RETRACT PACK 2600
680
690
700
710
3758.2 190.5
3758.2 190.5
3758.2 190.5
3758.3 190.5
3758.3 190.5
3758.4 190.5
3758.4 190.5
3758.4 190.5
3758.4 190.5
3758.4 190.5
3758.4 190.5
3758.4 190.5
3758.4 190.5
3758.4 190.5
3758.4 190.5
3758.4 190.6
3758.4 190.6
3758.4 190.6
3758.4 190.6
3758.4 190.6
3758.4 190.6
3758.4 190.6
3758.4 190.6
3758.4 190.6
3758.4 190.6
4234.5 190.6
4238.6 190.6
4239.7 190.6
4240.3 190.6
4258.3 190.6
4258.2 190.6
4258.2 190.6
4258.2 190.6
4258.2 190.6
4258.2 190.6

SECONDS

TOOL COMMAND

ANNOTATIONS

Packer Quartz [apql]
0 15000
(psi)

DRAW DOWN VOL [ddv]
20 0
(cm3)

QL ONES
0 10
(psi)

QL DECS
0 10
(psi)

APQL
(psi)

RTDQL
(degF)

Pressure Tests – Level 8 Tool Instance 1
MD 2415.0 m TVD 2415.0 m

PRESSURE HISTORY

Depth MD 2415.0 m TVD 2415.0 m

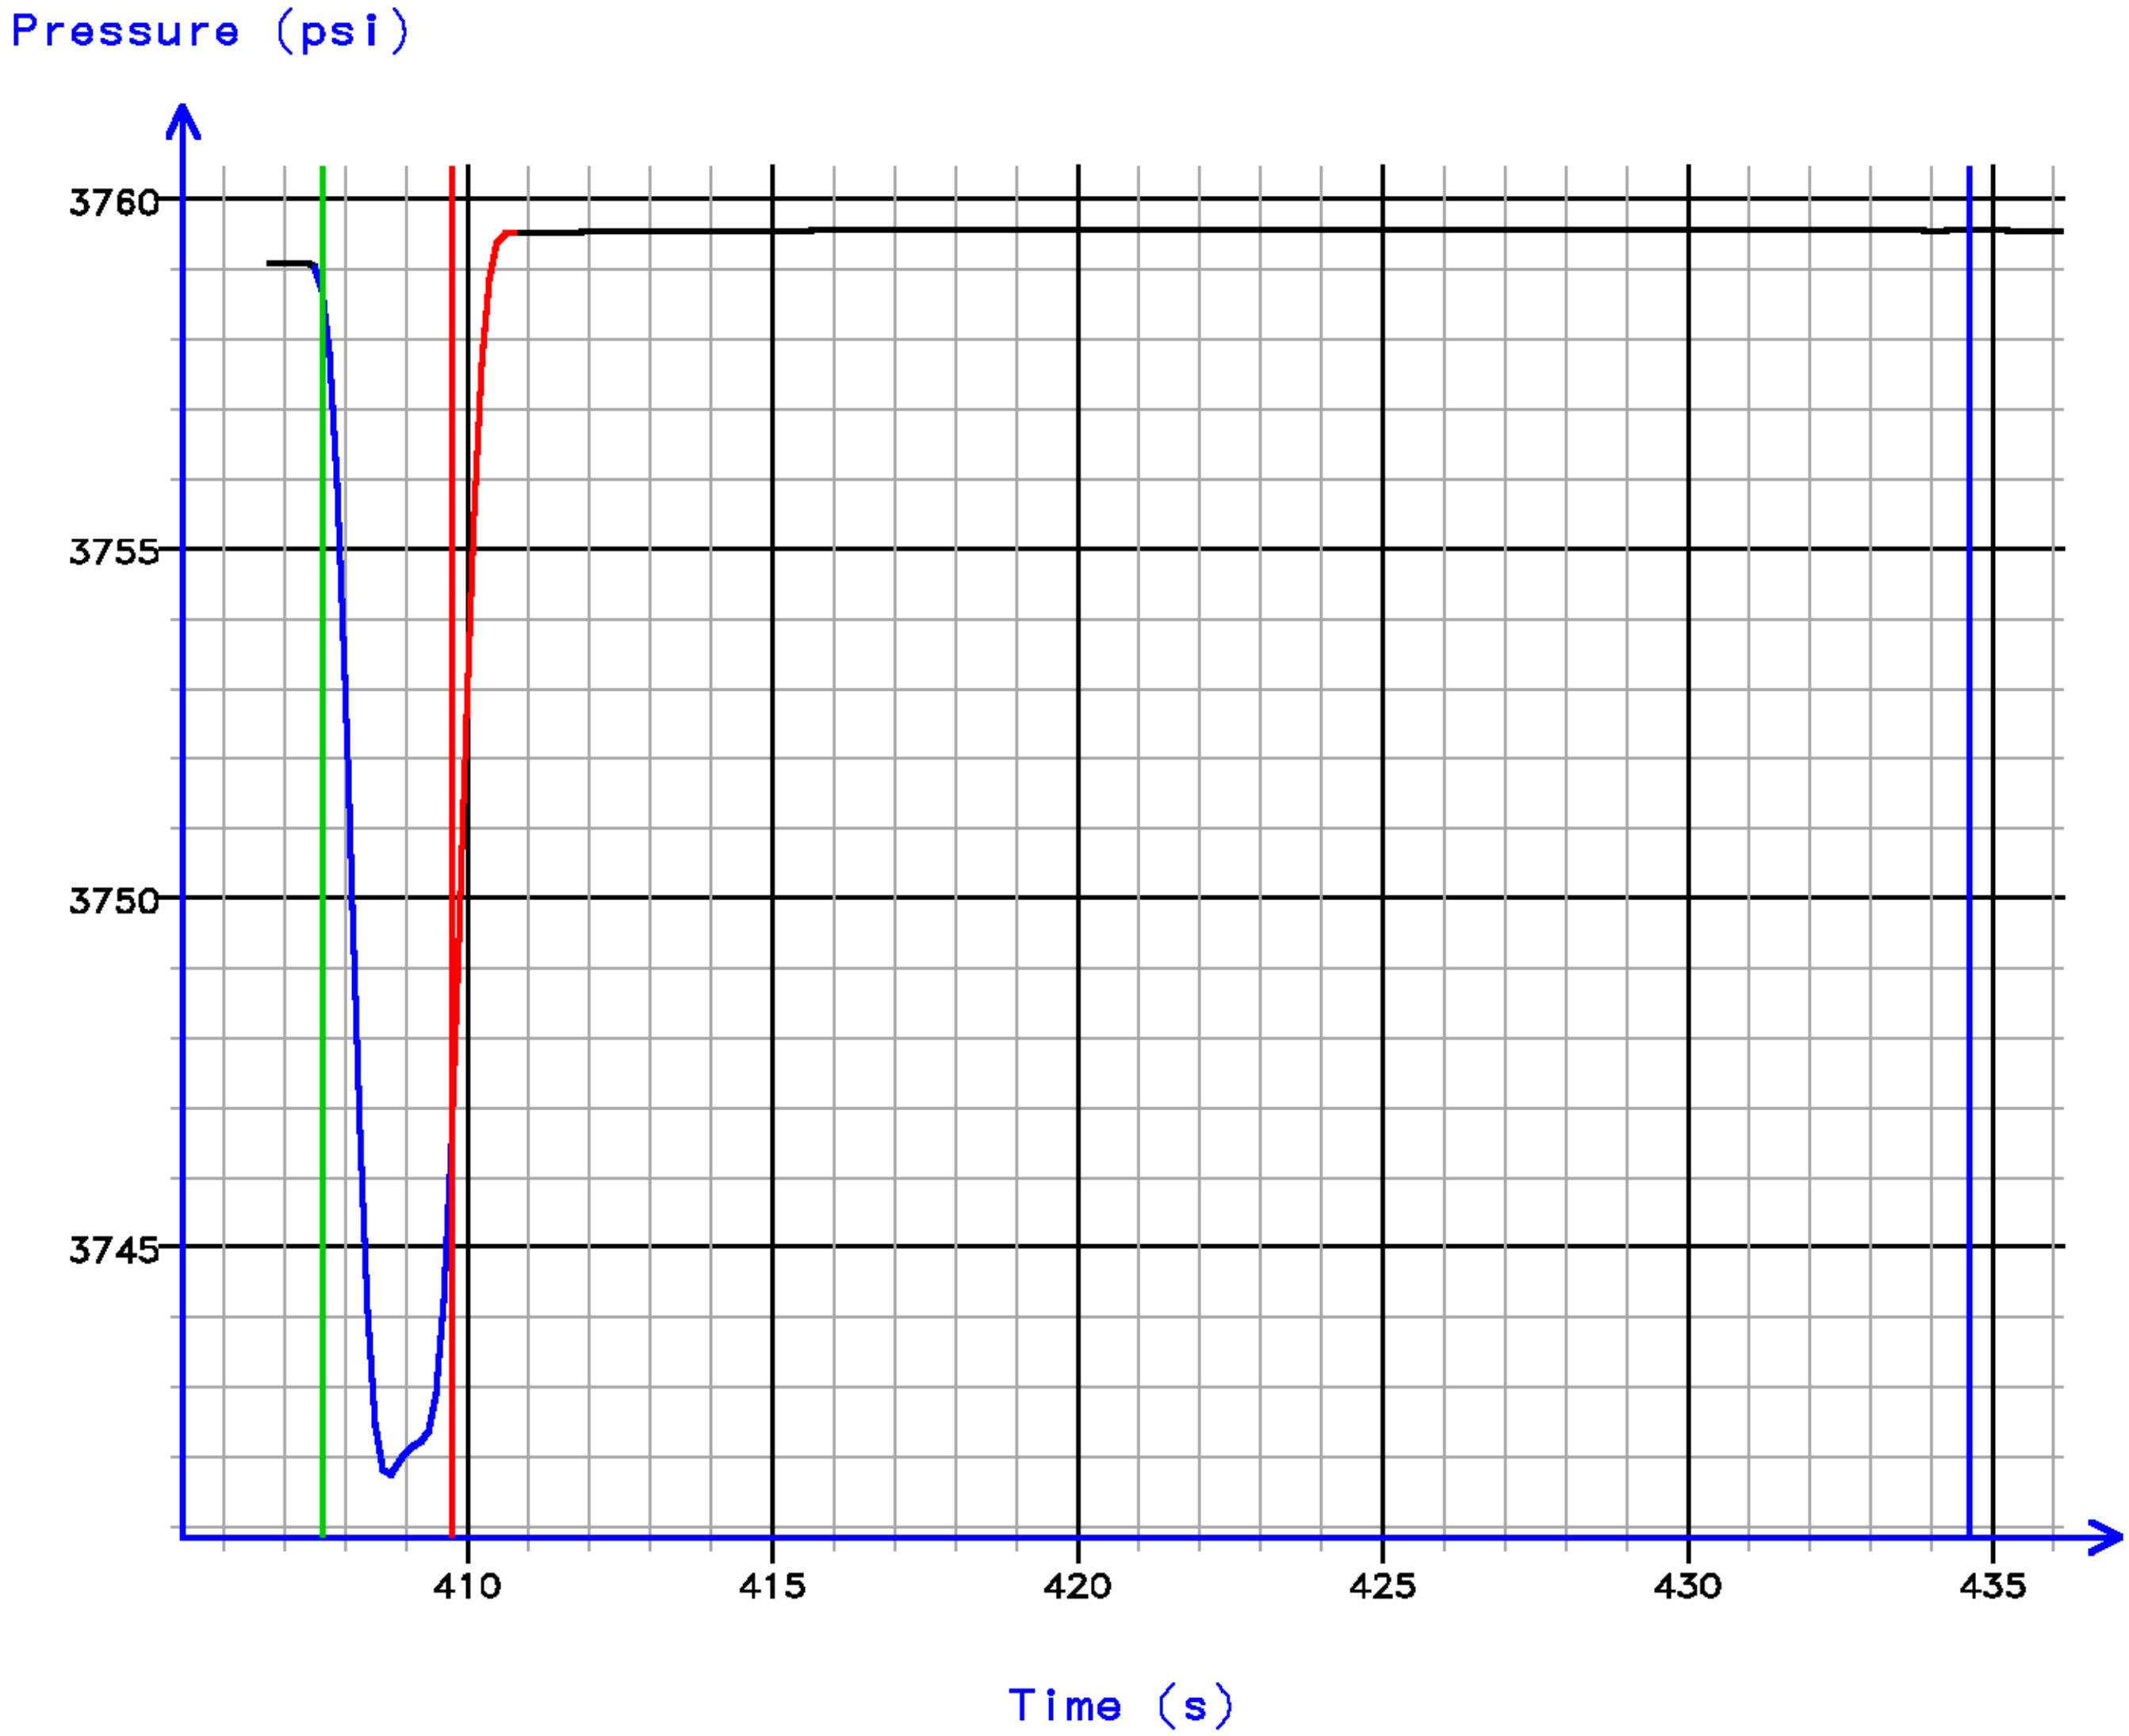

[008.061]

FLOW RATE ANALYSIS

Depth MD 2415.0 m TVD 2415.0 m

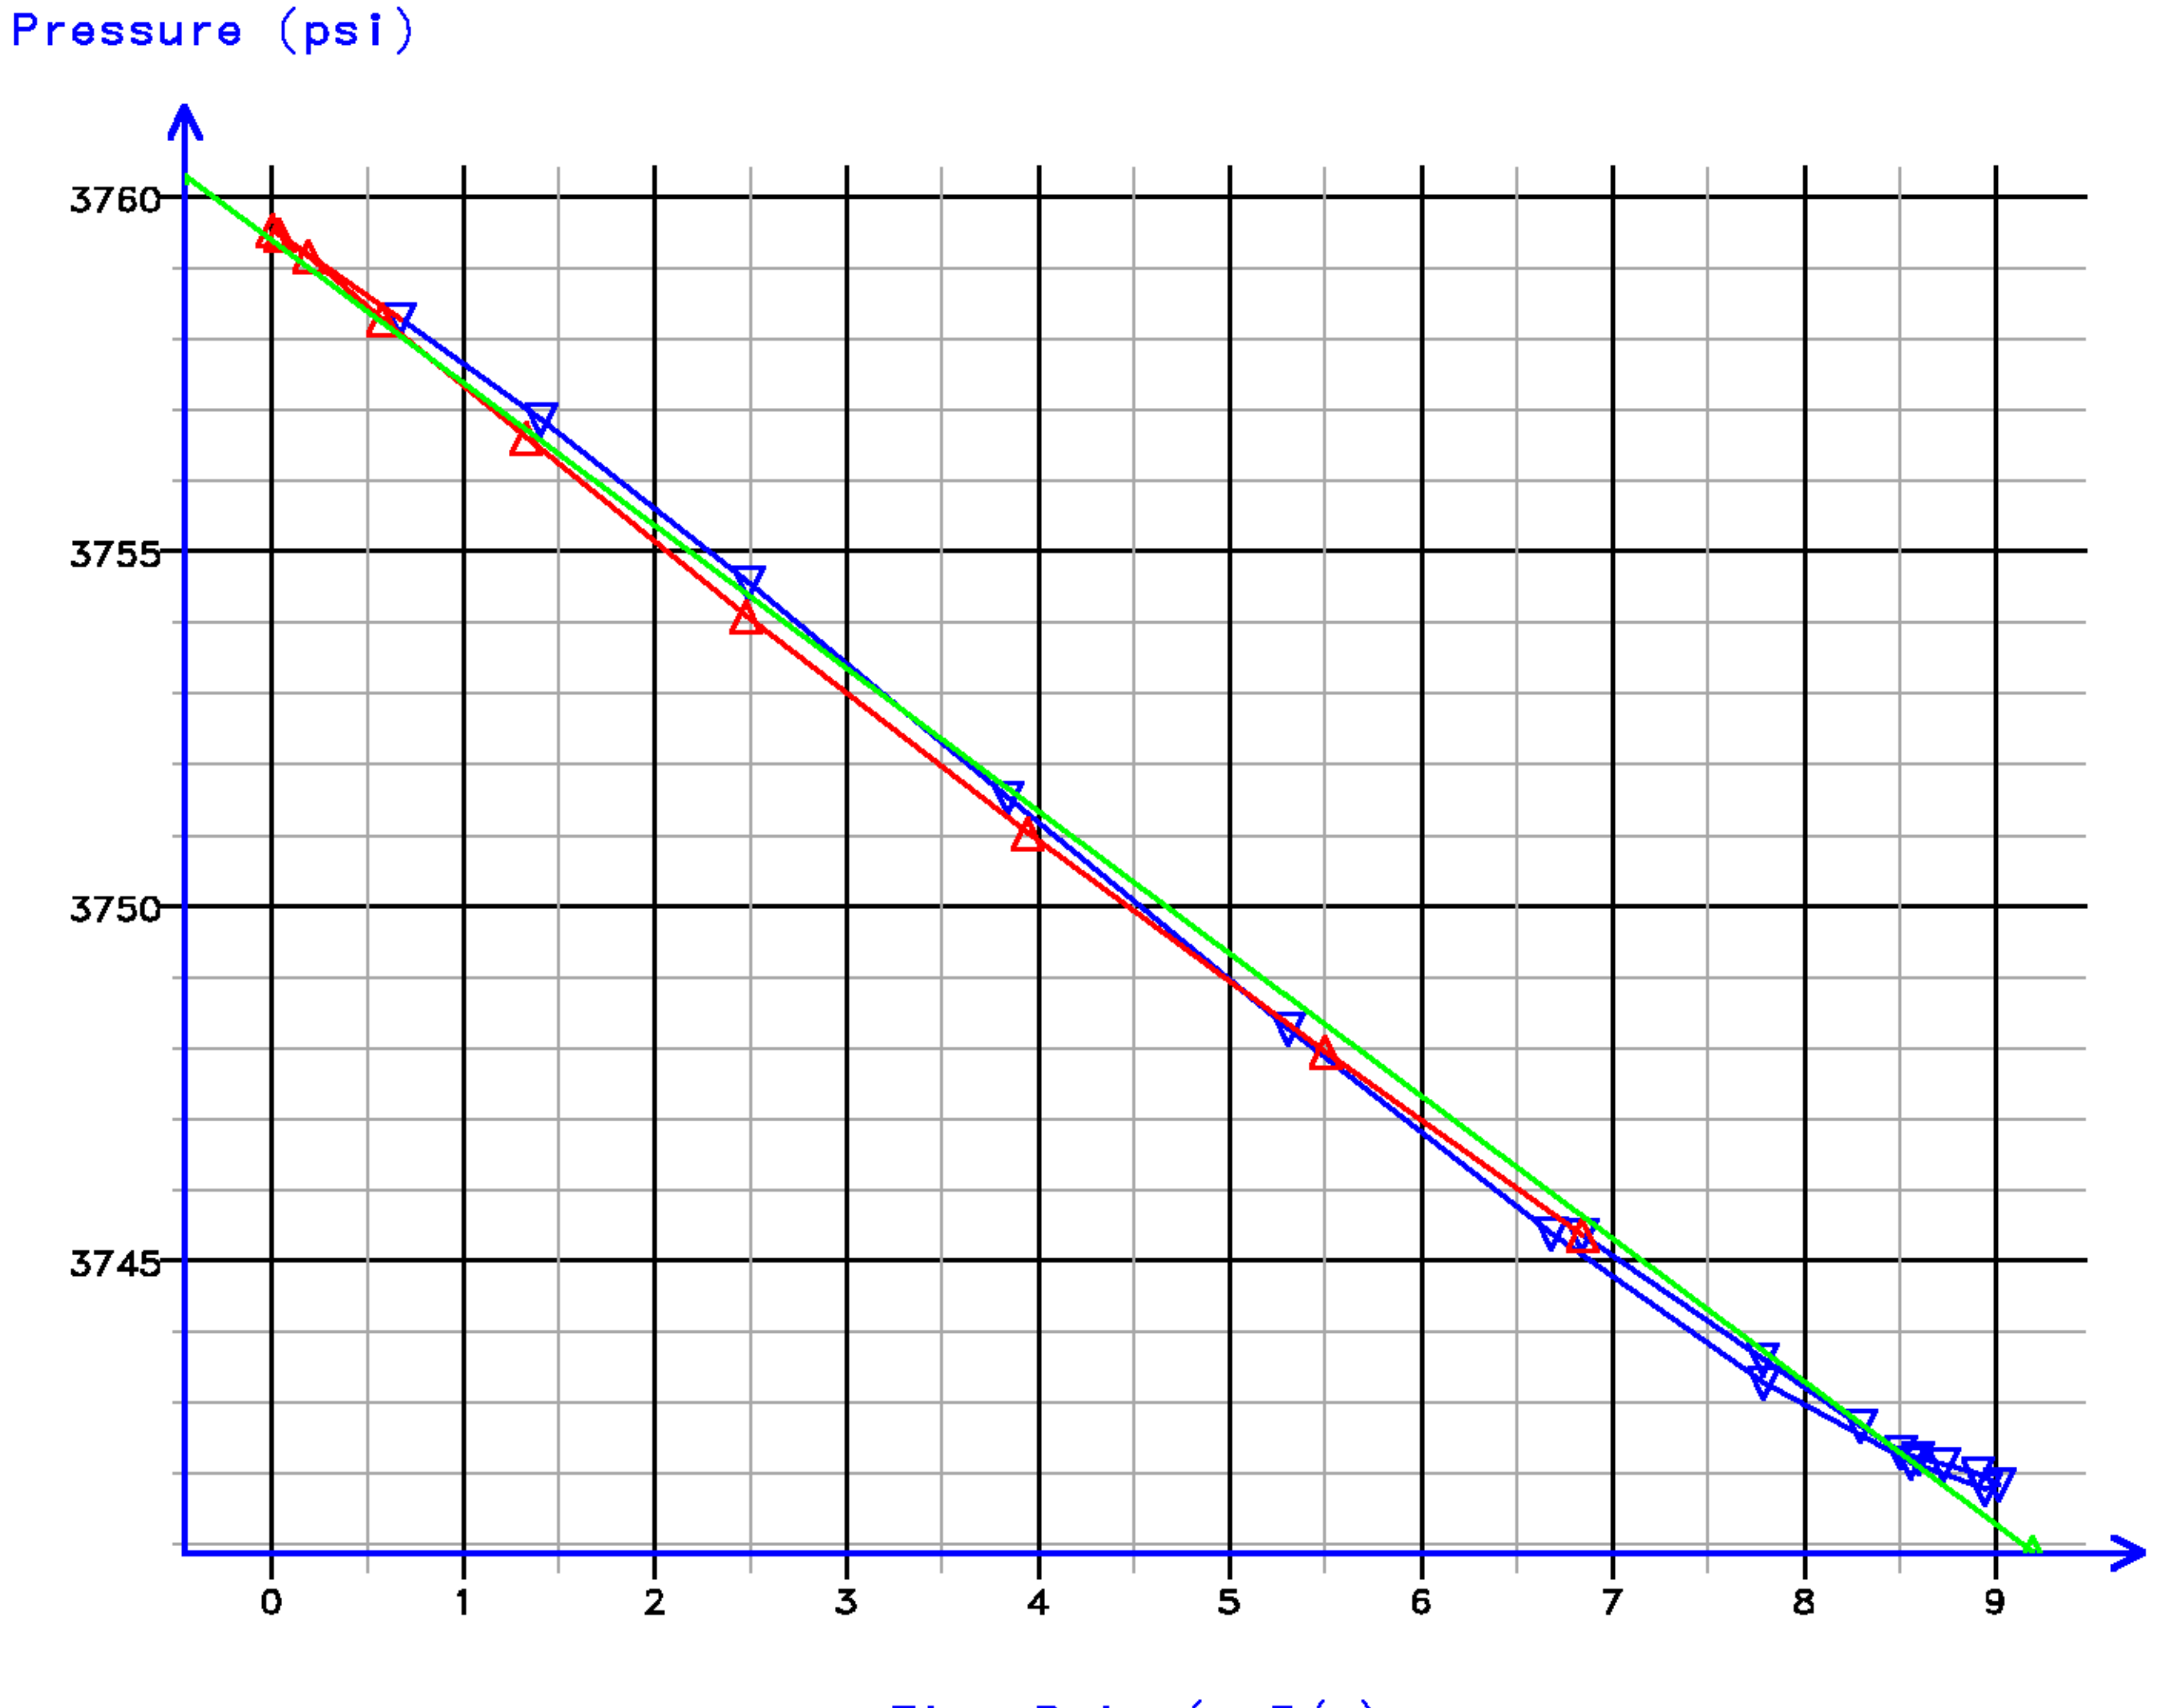

Kfra 1710.060 (mD/cP), Kddu 1730.849 (mD/cP) Confidence 99.81% [008.061]

Data File : j800g10.aff
Presentation: gpi_rci-b3xx.log

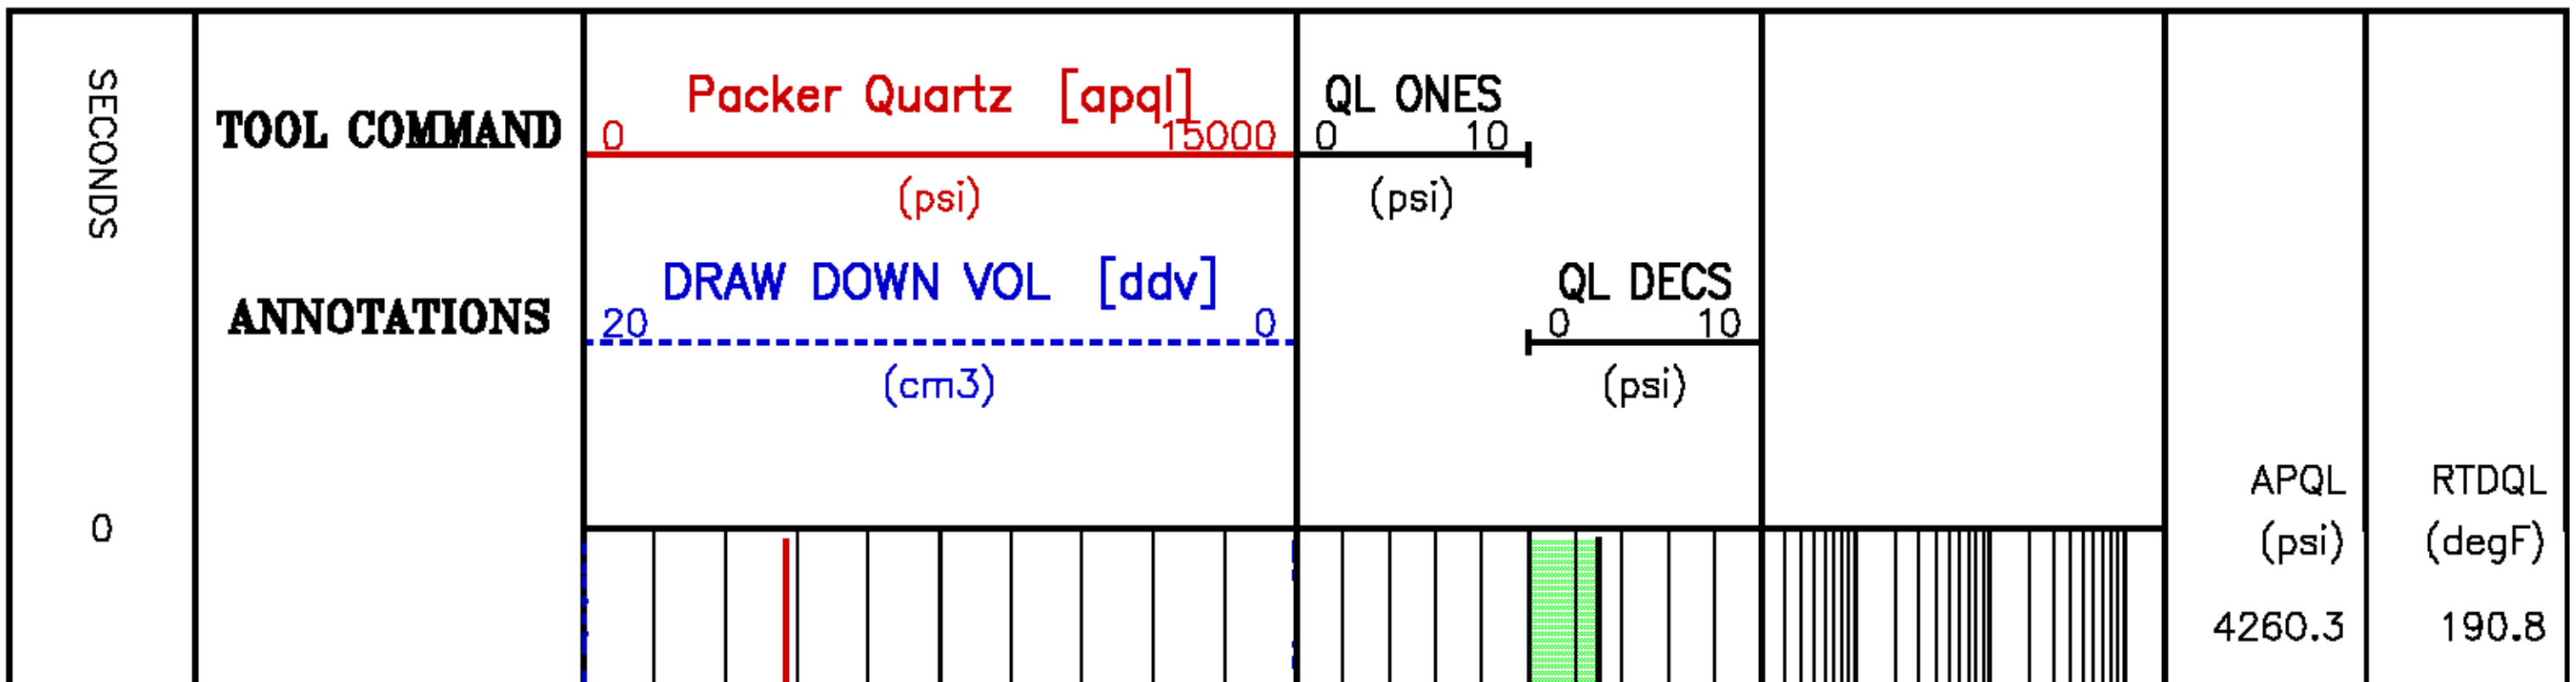

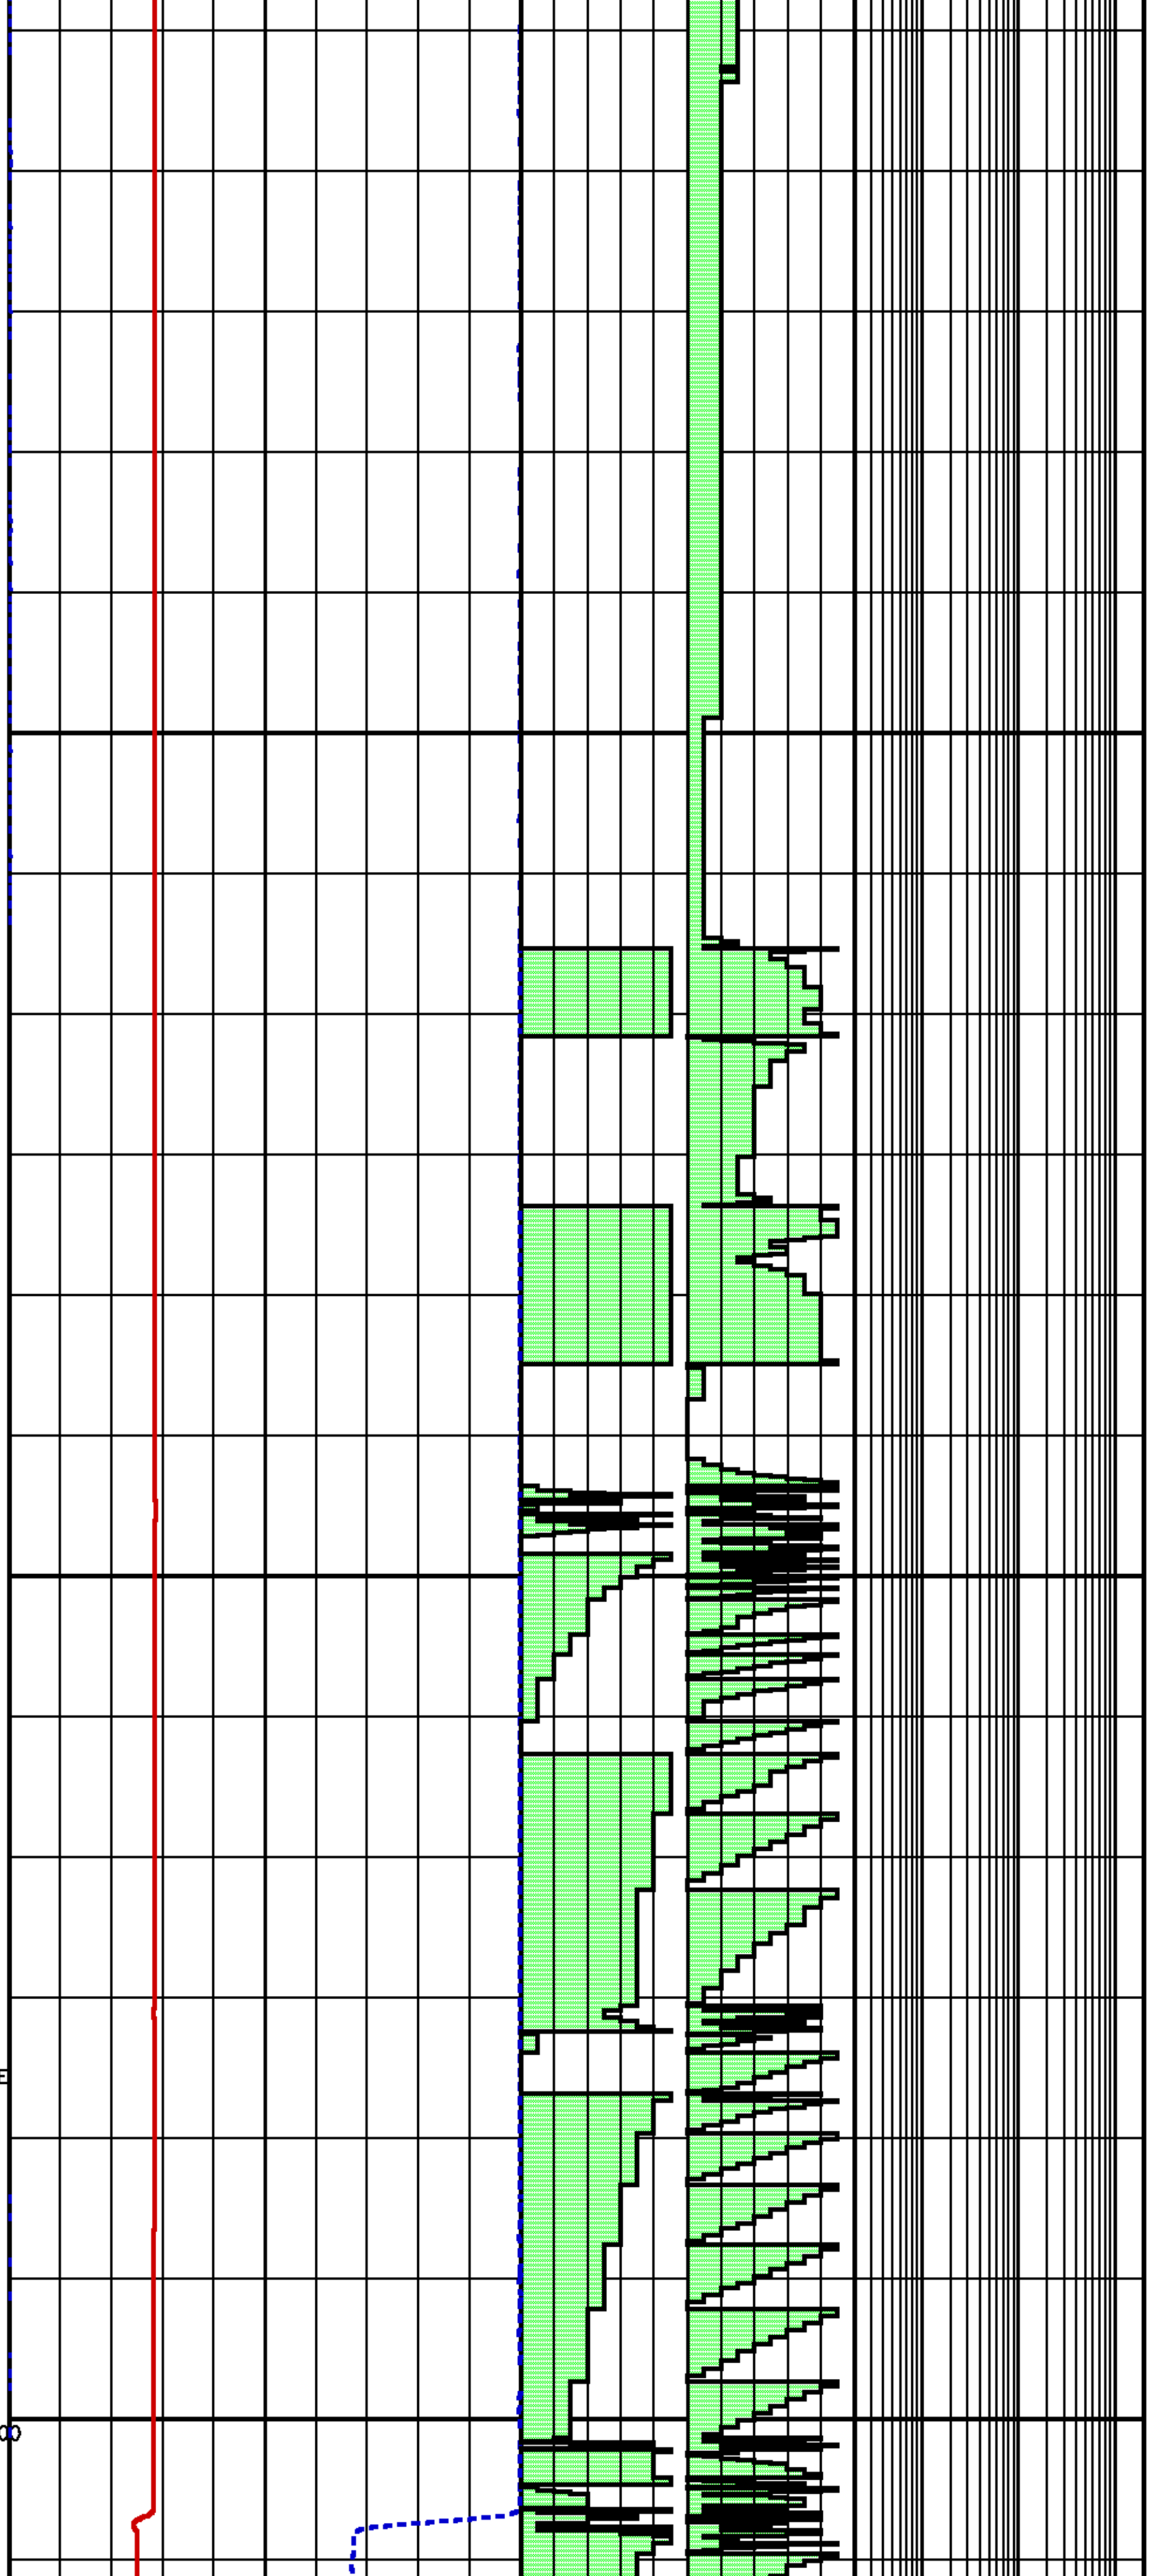

10		4260.3	190.8
		4260.3	190.8
20		4260.3	190.8
		4260.3	190.8
30		4260.3	190.8
		4260.2	190.8
40		4260.2	190.8
		4260.2	190.8
50		4260.2	190.8
		4260.2	190.8
60		4260.2	190.8
		4260.2	190.8
70		4260.2	190.8
	BB[1] OPEN BYPASS VALVE	4260.3	190.8
80		4259.8	190.8
		4260.5	190.8
90		4260.4	190.8
	MB[1] EXTEND PACK 2850	4259.9	190.8
100		4259.8	190.8
		4260.0	190.8
110		4260.1	190.8
		4301.9	190.8
120		4267.1	190.9
		4263.4	190.9
130		4261.1	190.9
		4259.5	190.9
140		4258.4	190.9
		4257.7	190.9
150	MB[1] RECHARGE 2850	4257.1	190.9
	BB[1] CLOSE BYPASS VALVE	4260.7	190.9
160		4257.9	190.9
		4256.6	190.9
170		4255.5	190.9
		4254.4	190.9
180	BB[1] DRAWDOWN 5 300 500	4253.4	190.9
		4241.9	190.9
190		3757.8	190.9

		3757.5	190.9
200		3757.6	190.9
		3757.6	190.9
210		3757.7	190.9
		3757.7	190.9
220	BB[1] DRAWDOWN 15 300 500	3757.7	190.9
		3749.8	190.9
230		3758.1	190.9
		3758.1	190.9
240		3758.1	190.9
		3758.1	190.9
250		3758.2	190.9
		3758.2	190.9
260		3758.2	190.9
		3758.2	190.9
270		3758.2	190.9
		3758.2	190.9
280		3758.2	191.0
		3758.2	191.0
290		3758.2	191.0
		3758.2	191.0
300		3758.2	191.0
		3758.3	191.0
310		3758.2	191.0
		3758.3	191.0
320		3758.3	191.0
		3758.3	191.0
330	BB[1] DRAWDOWN 15 300 500	3758.3	191.0
		3759.1	191.0
340		3759.1	191.0
		3759.1	191.0
350		3759.1	191.0
		3759.1	191.0
360		3759.1	191.0
		3759.1	191.0
370		3759.1	191.0

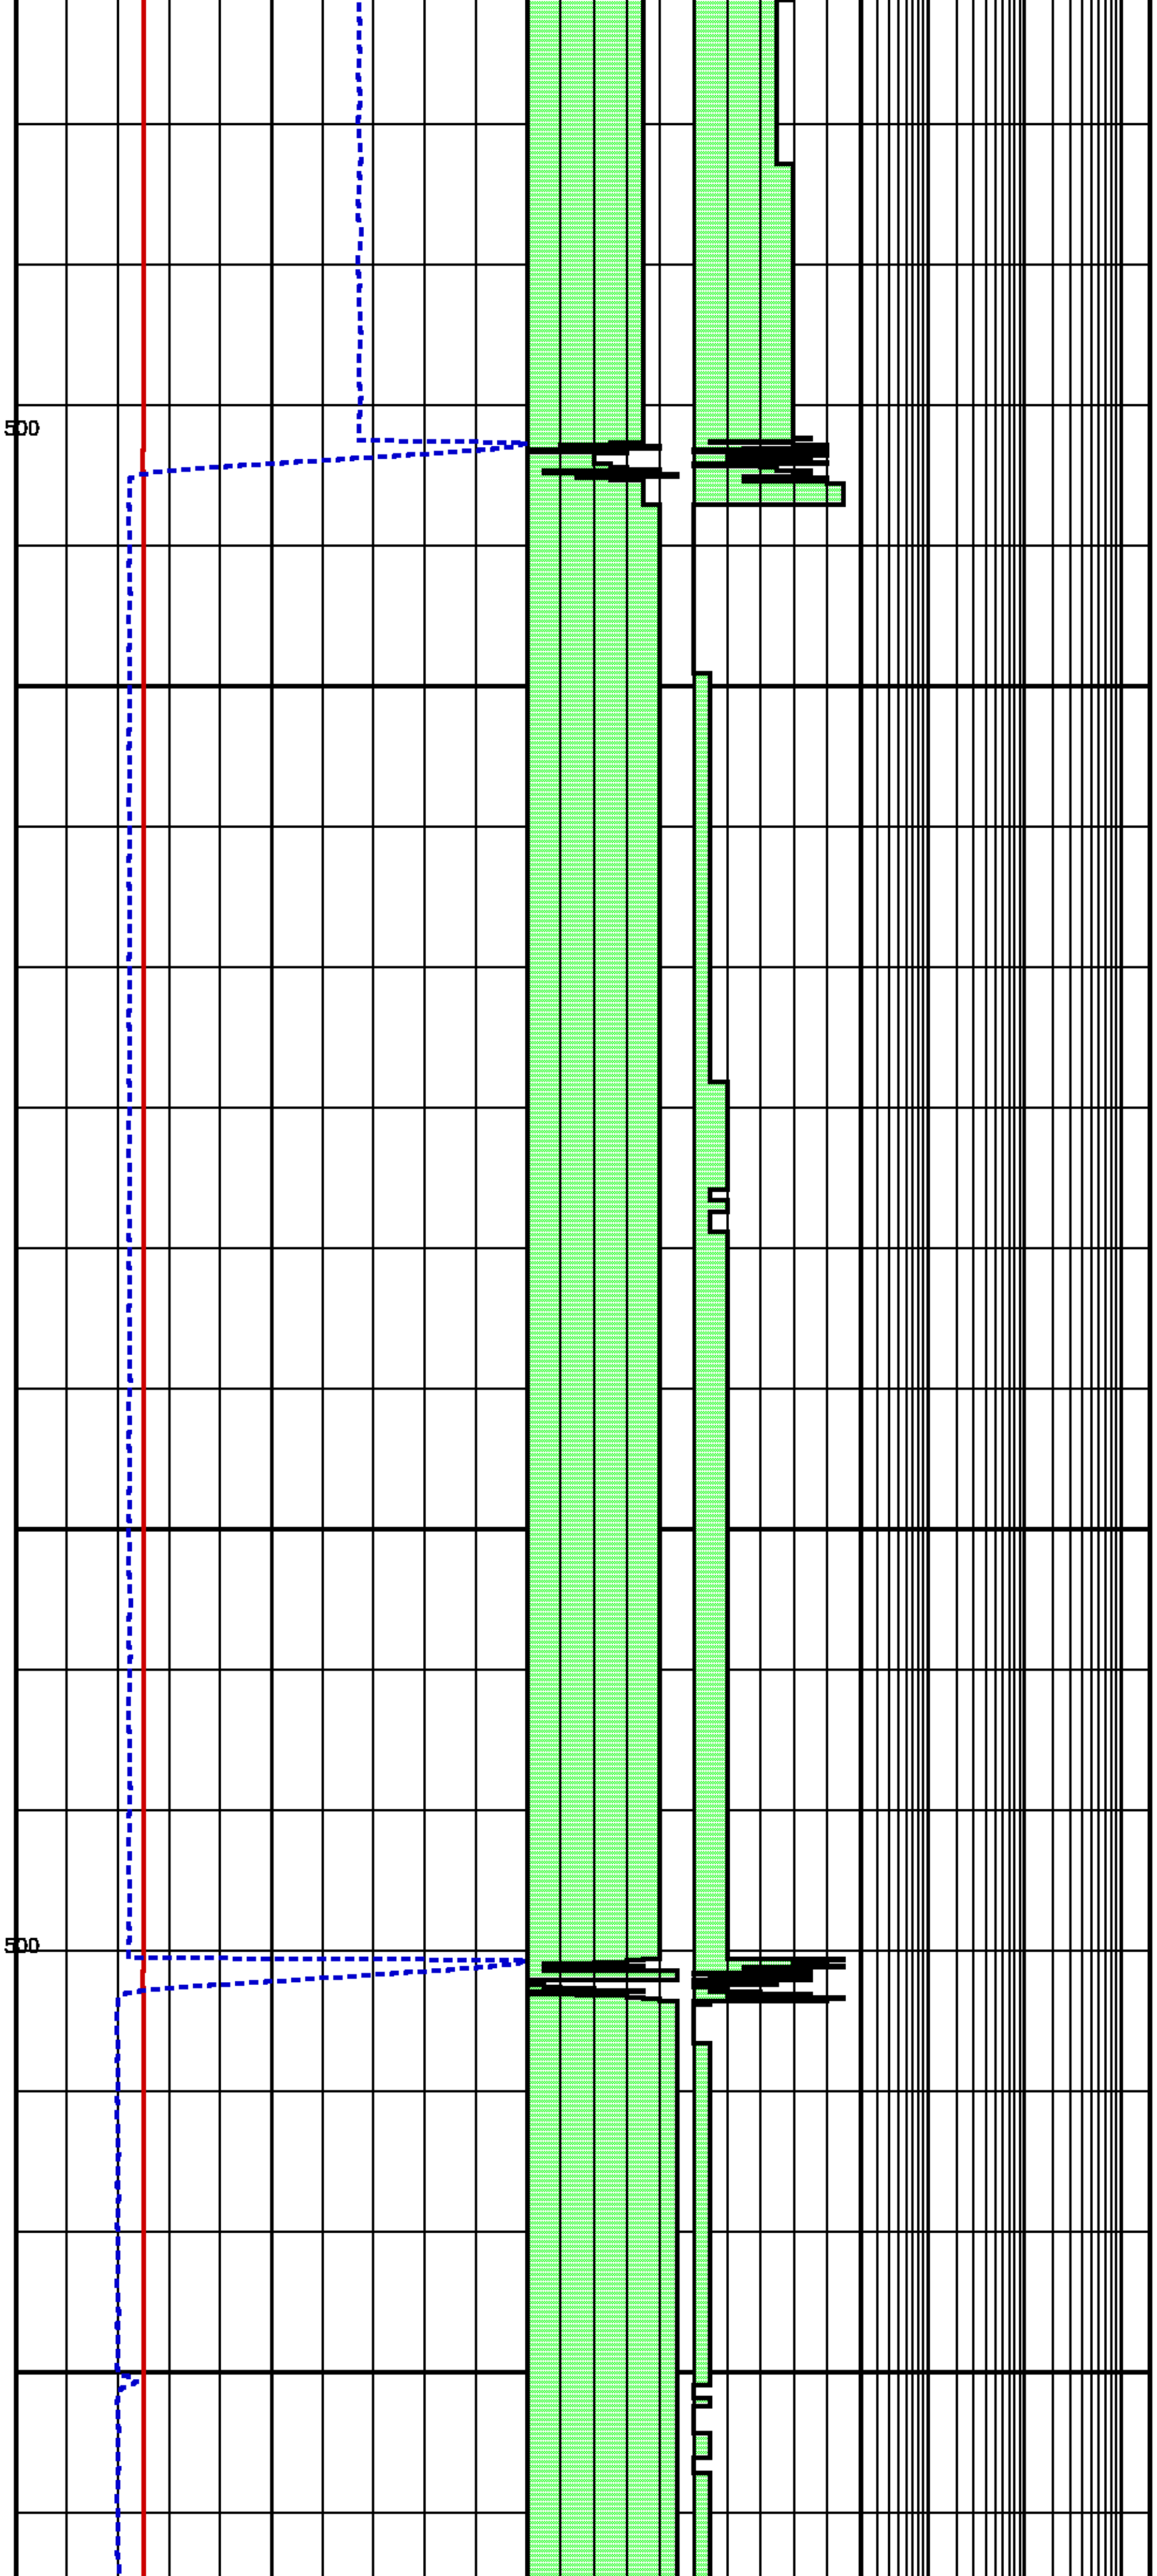

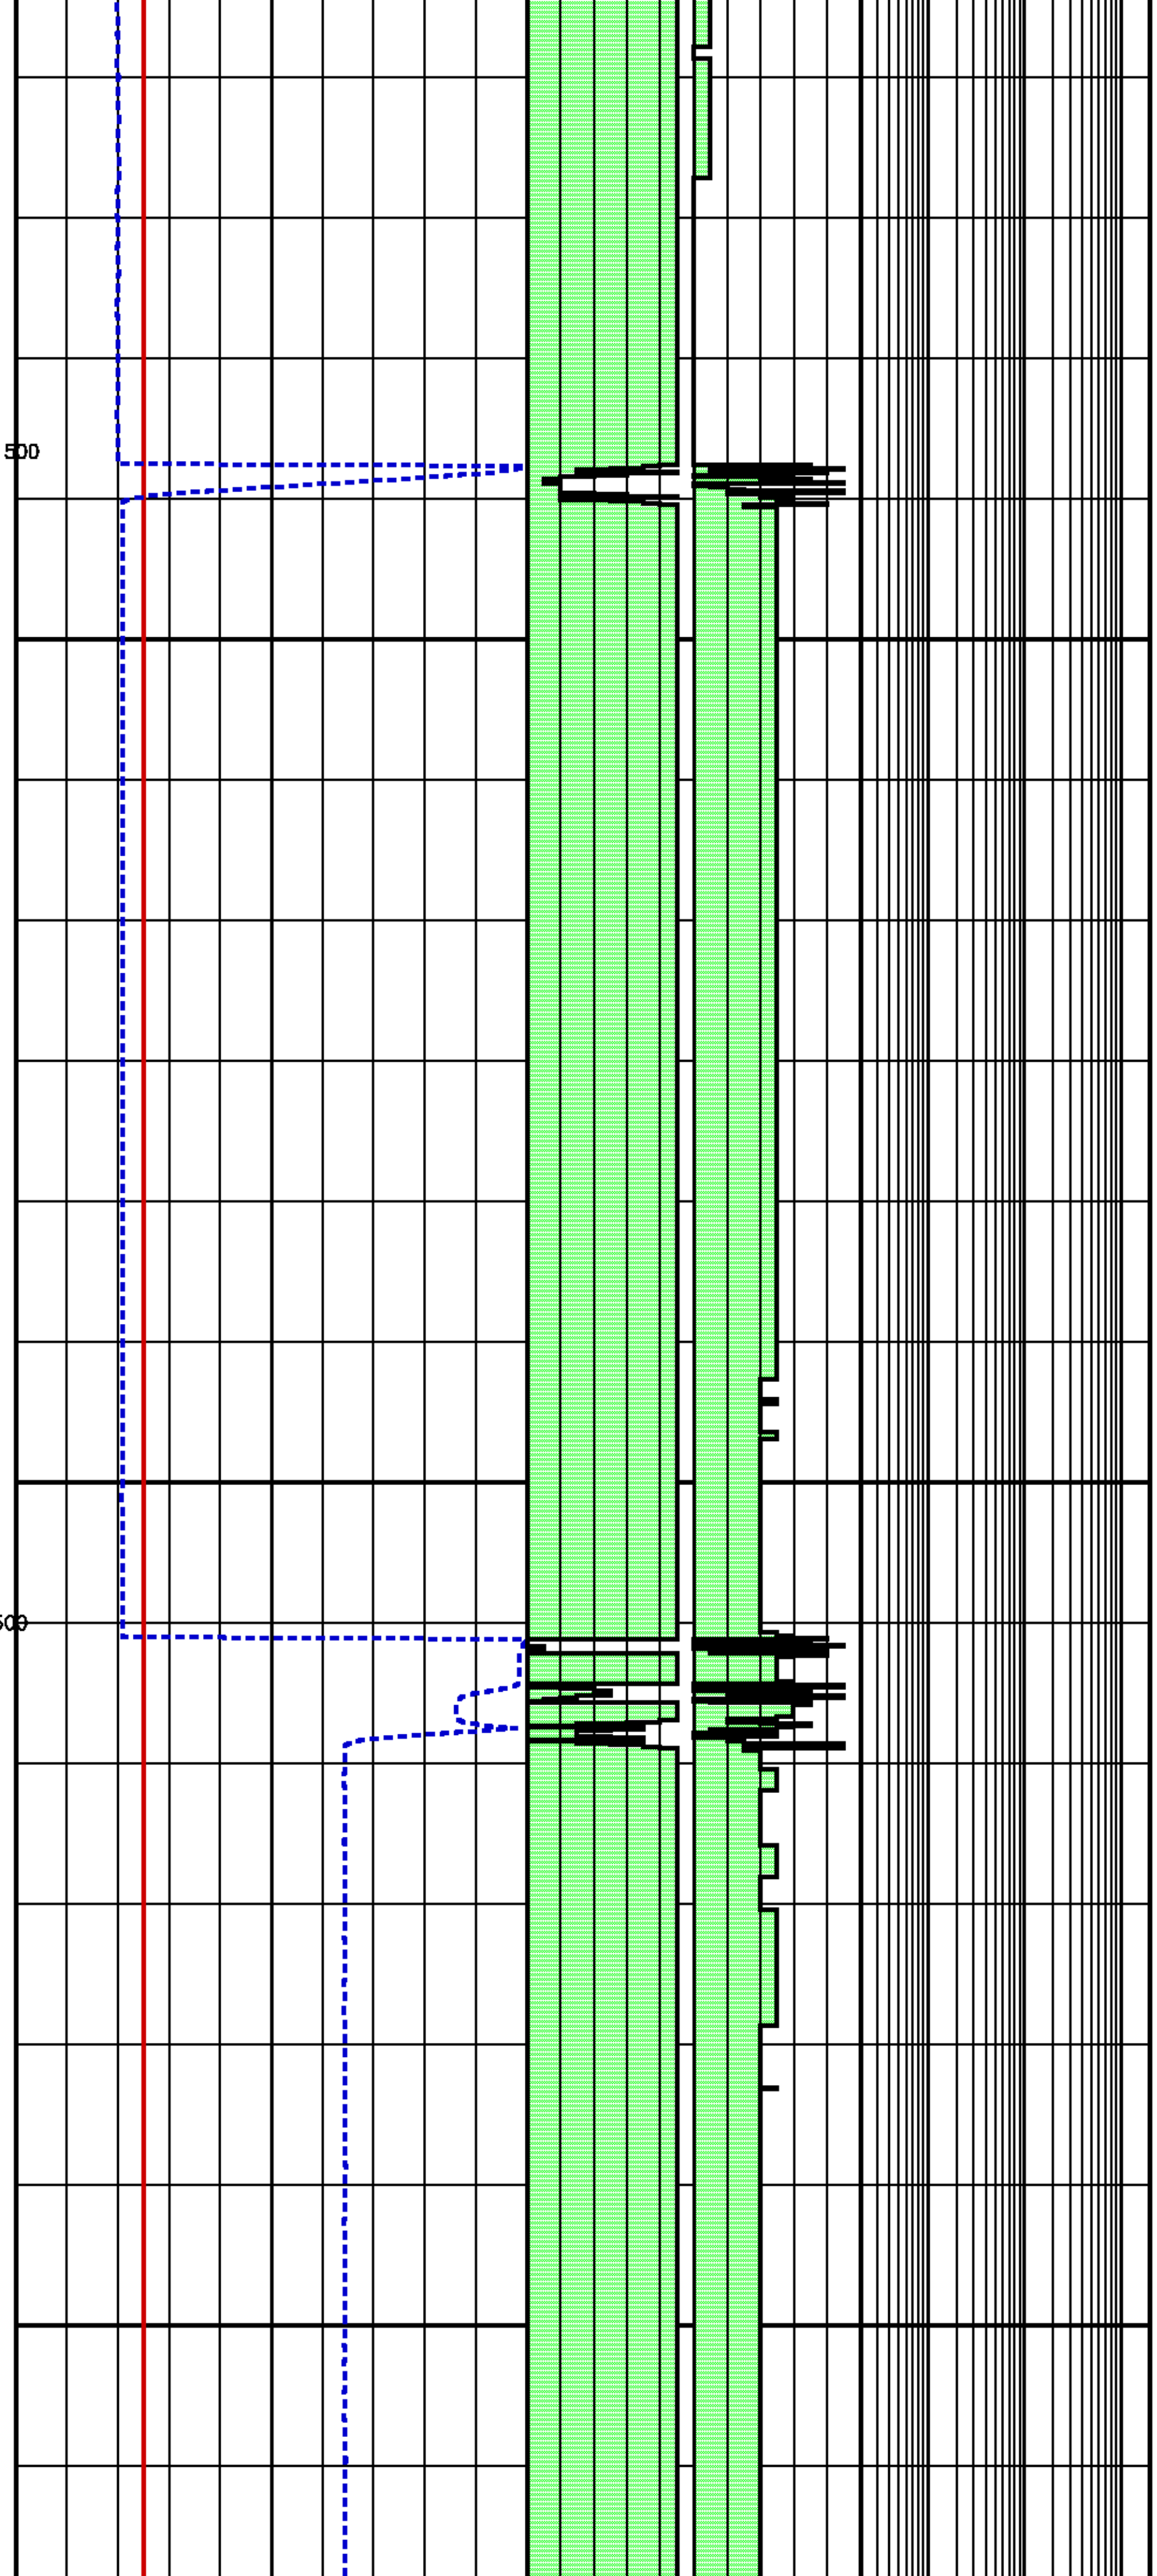

		3759.1	191.0
380		3759.1	191.0
		3759.1	191.0
390		3759.1	191.0
		3759.1	191.0
400		3759.1	191.0
		3759.1	191.0
	BB[1] DRAWDOWN 15 300 500		
410		3752.6	191.0
		3759.6	191.0
420		3759.6	191.0
		3759.6	191.0
430		3759.6	191.0
		3759.6	191.0
440		3759.5	191.0
		3759.5	191.0
450		3759.5	191.0
		3759.5	191.0
460		3759.5	191.0
		3759.5	191.0
470		3759.5	191.0
		3759.5	191.1
480		3759.5	191.1
		3759.5	191.1
490	BB[1] DRAWDOWN 5 300 500	3759.5	191.1
		3765.8	191.1
500		3759.5	191.1
		3759.5	191.1
510		3759.5	191.1
		3759.5	191.1
520		3759.5	191.1
		3759.5	191.1
530		3759.5	191.1
		3759.5	191.1
540		3759.5	191.1
		3759.5	191.1
550		3759.5	191.1
		3759.5	191.1

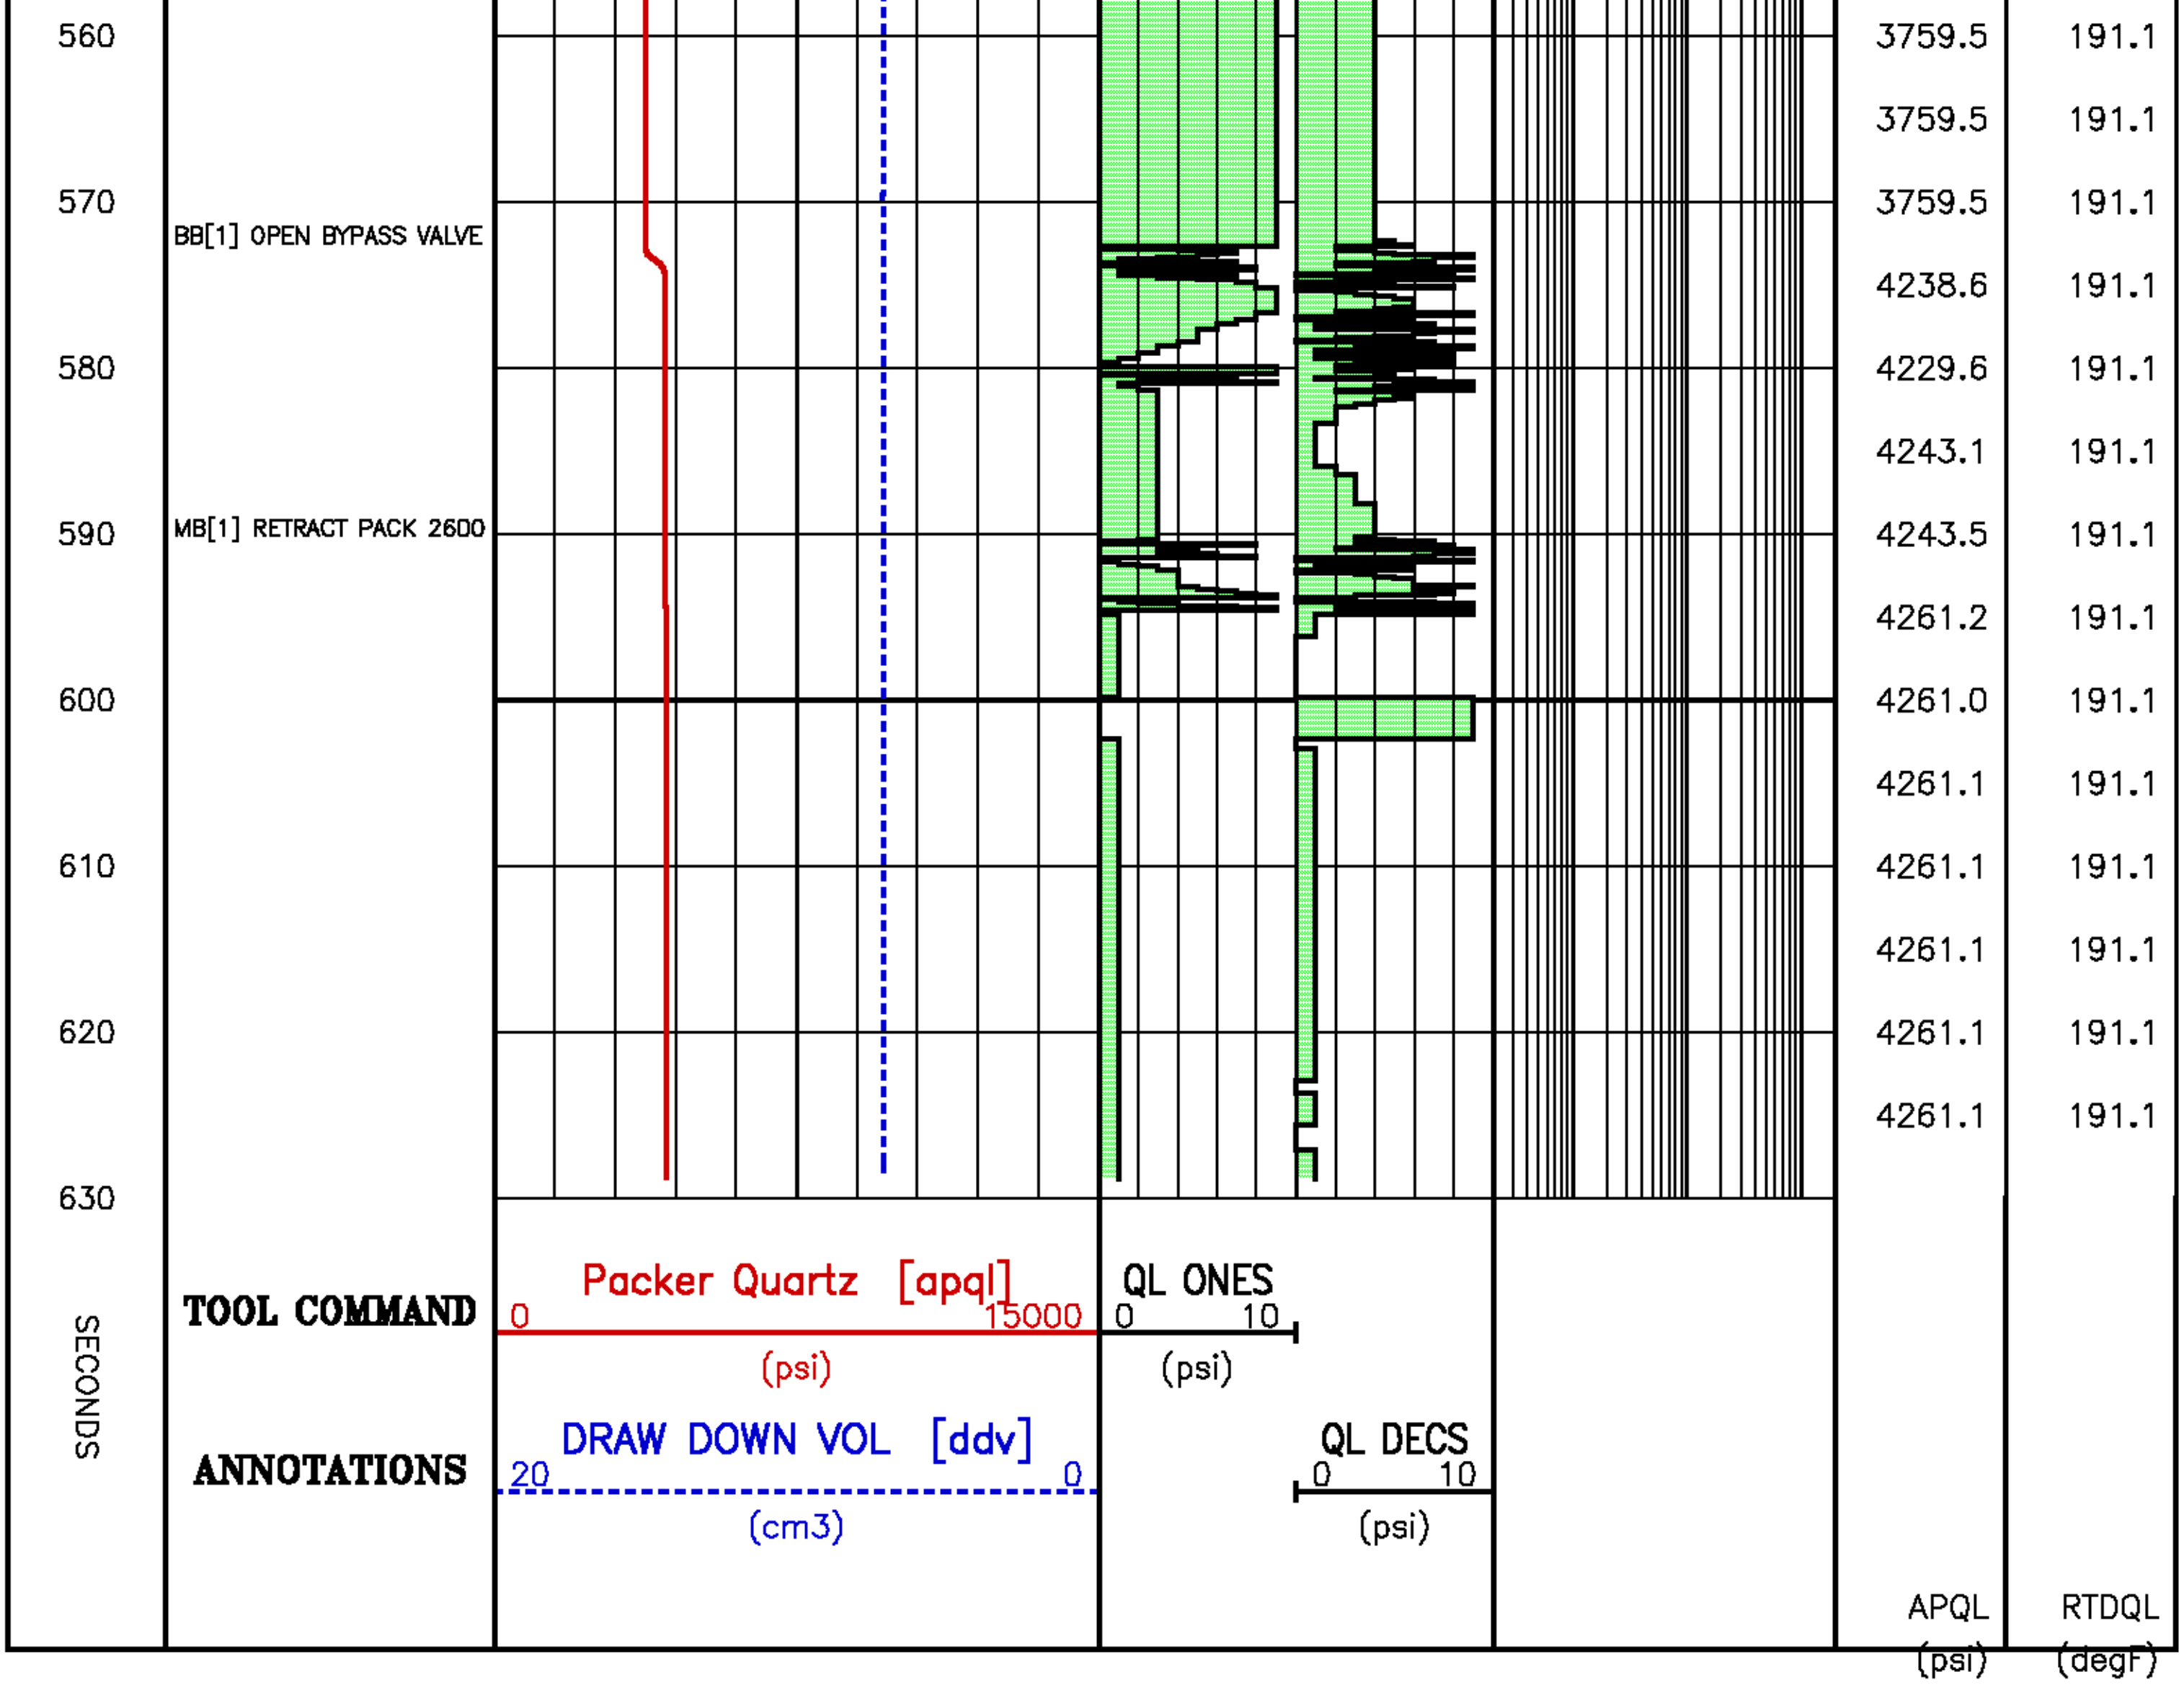

Pressure Tests – Level 10 Tool Instance 1
MD 2416.5 m TVD 2416.5 m

PRESSURE HISTORY

Depth MD 2416.5 m TVD 2416.5 m

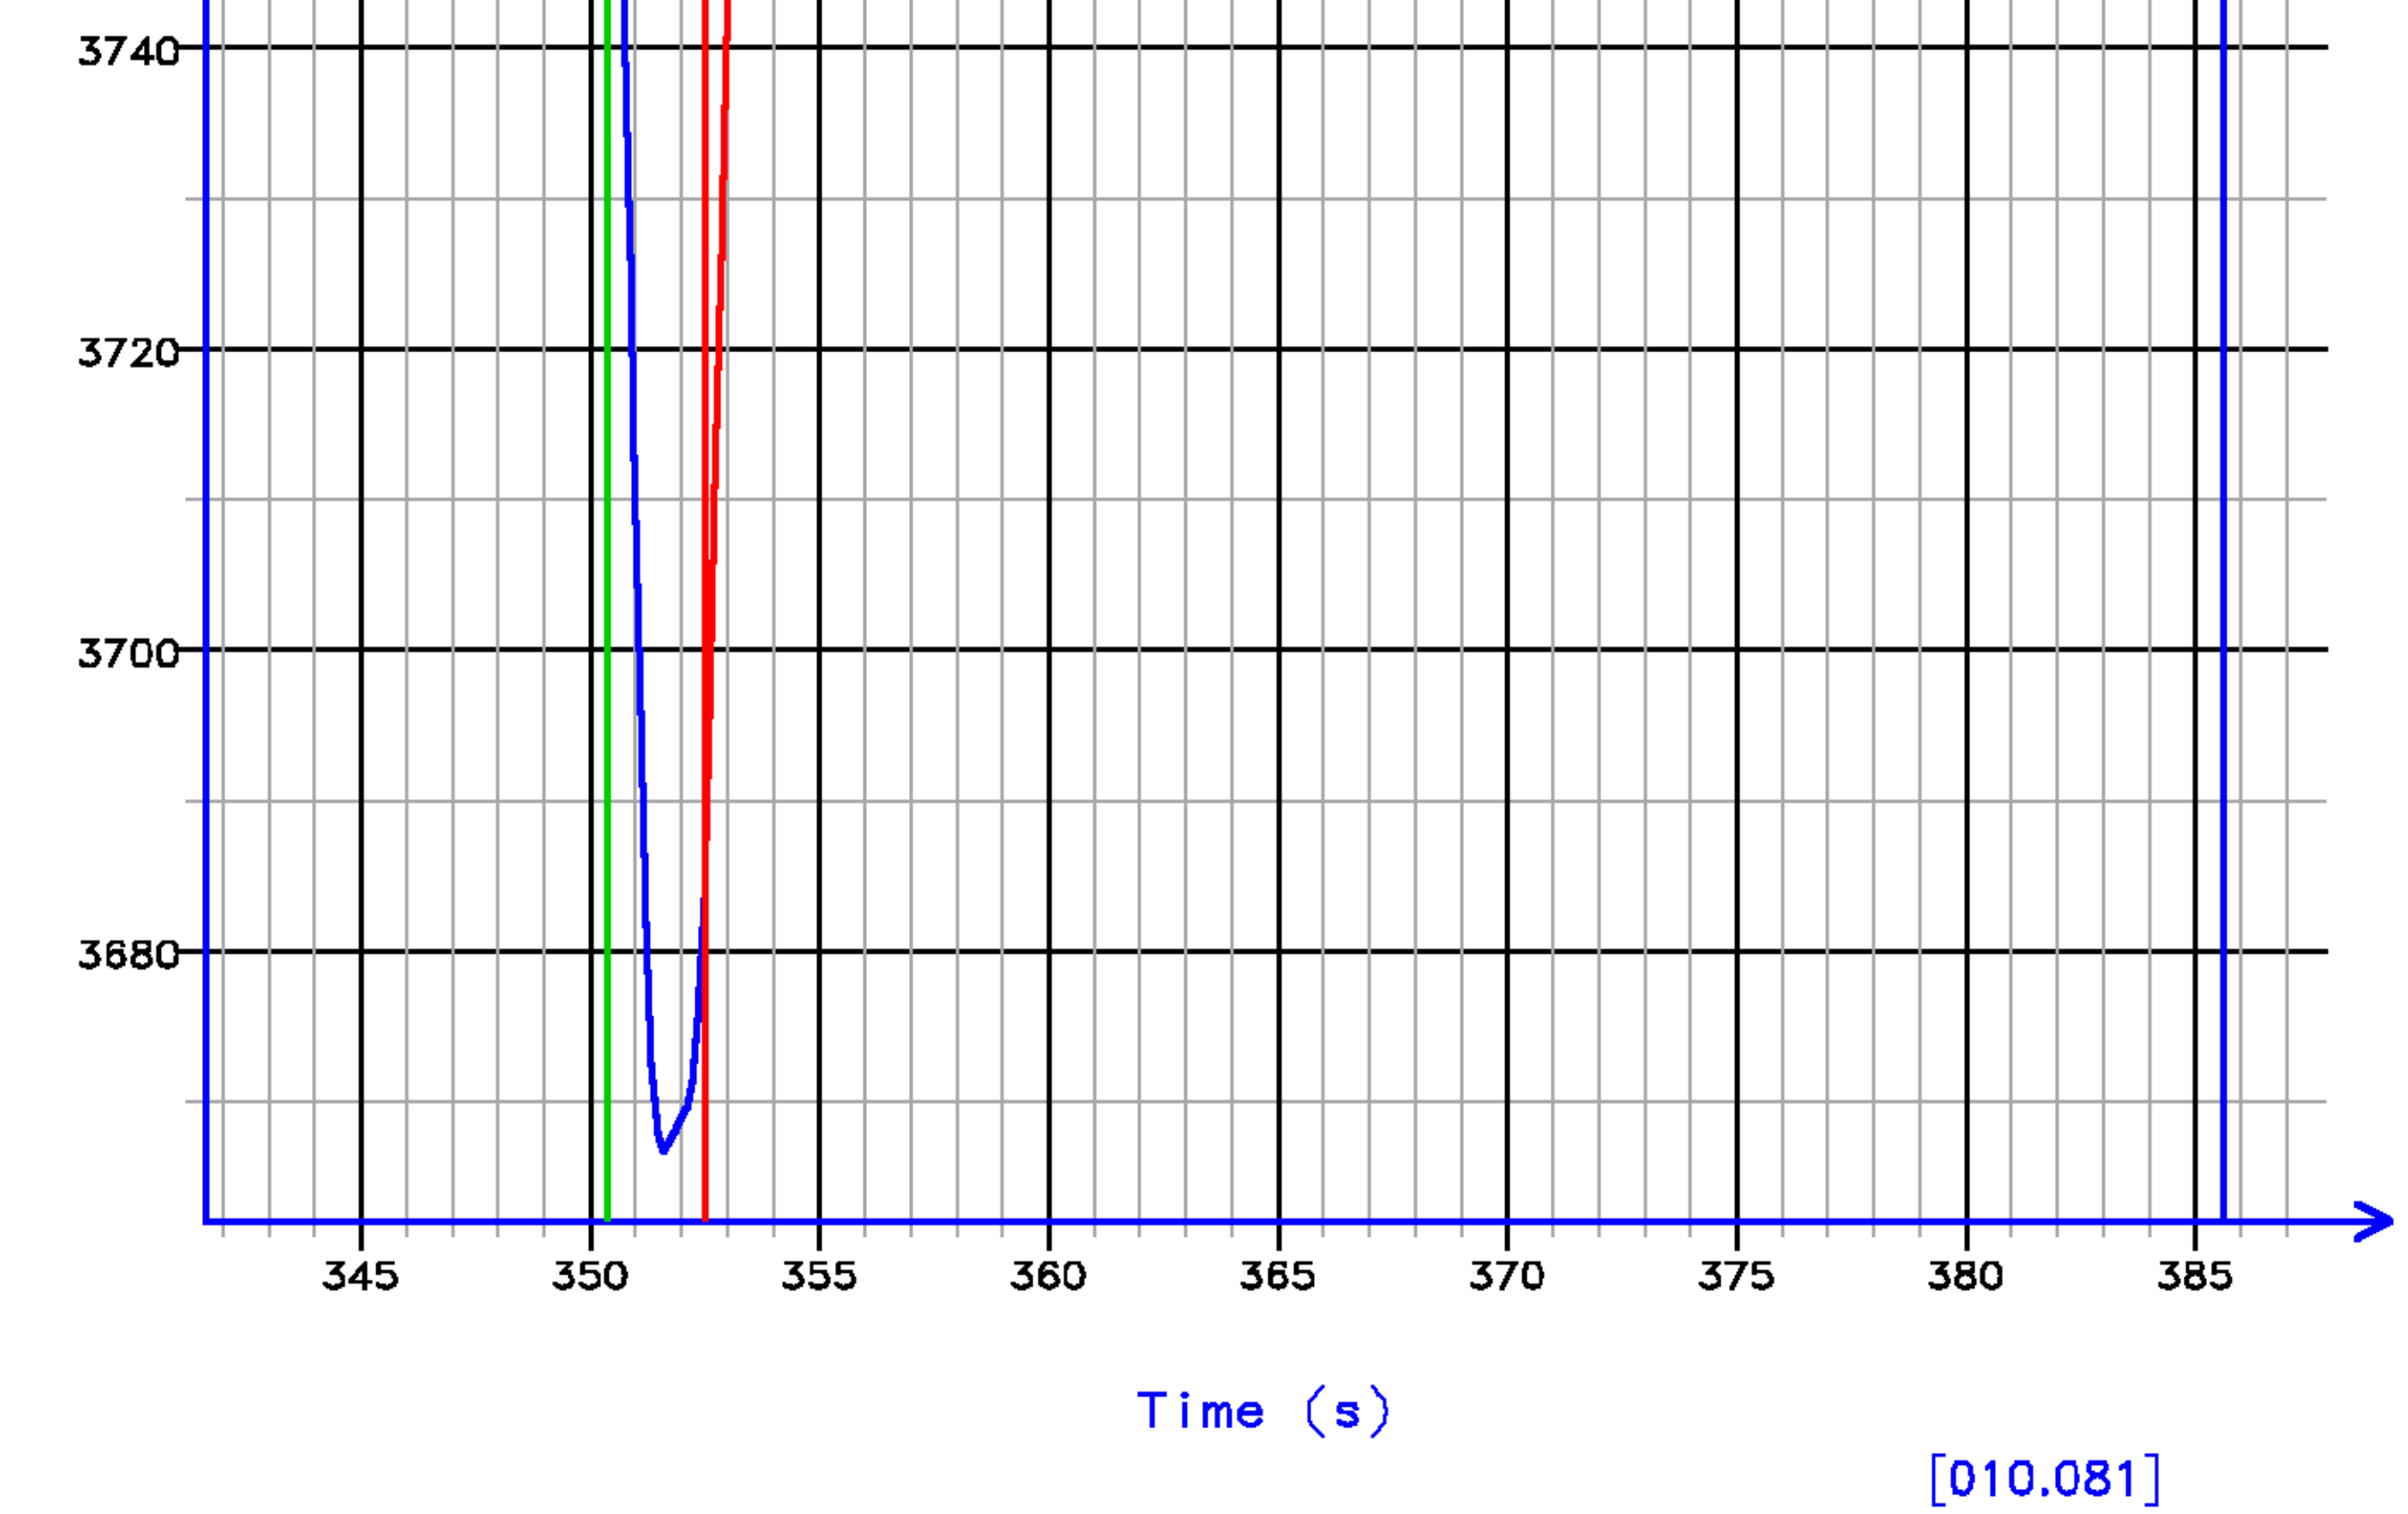

FLOW RATE ANALYSIS

Depth MD 2416.5 m TVD 2416.5 m

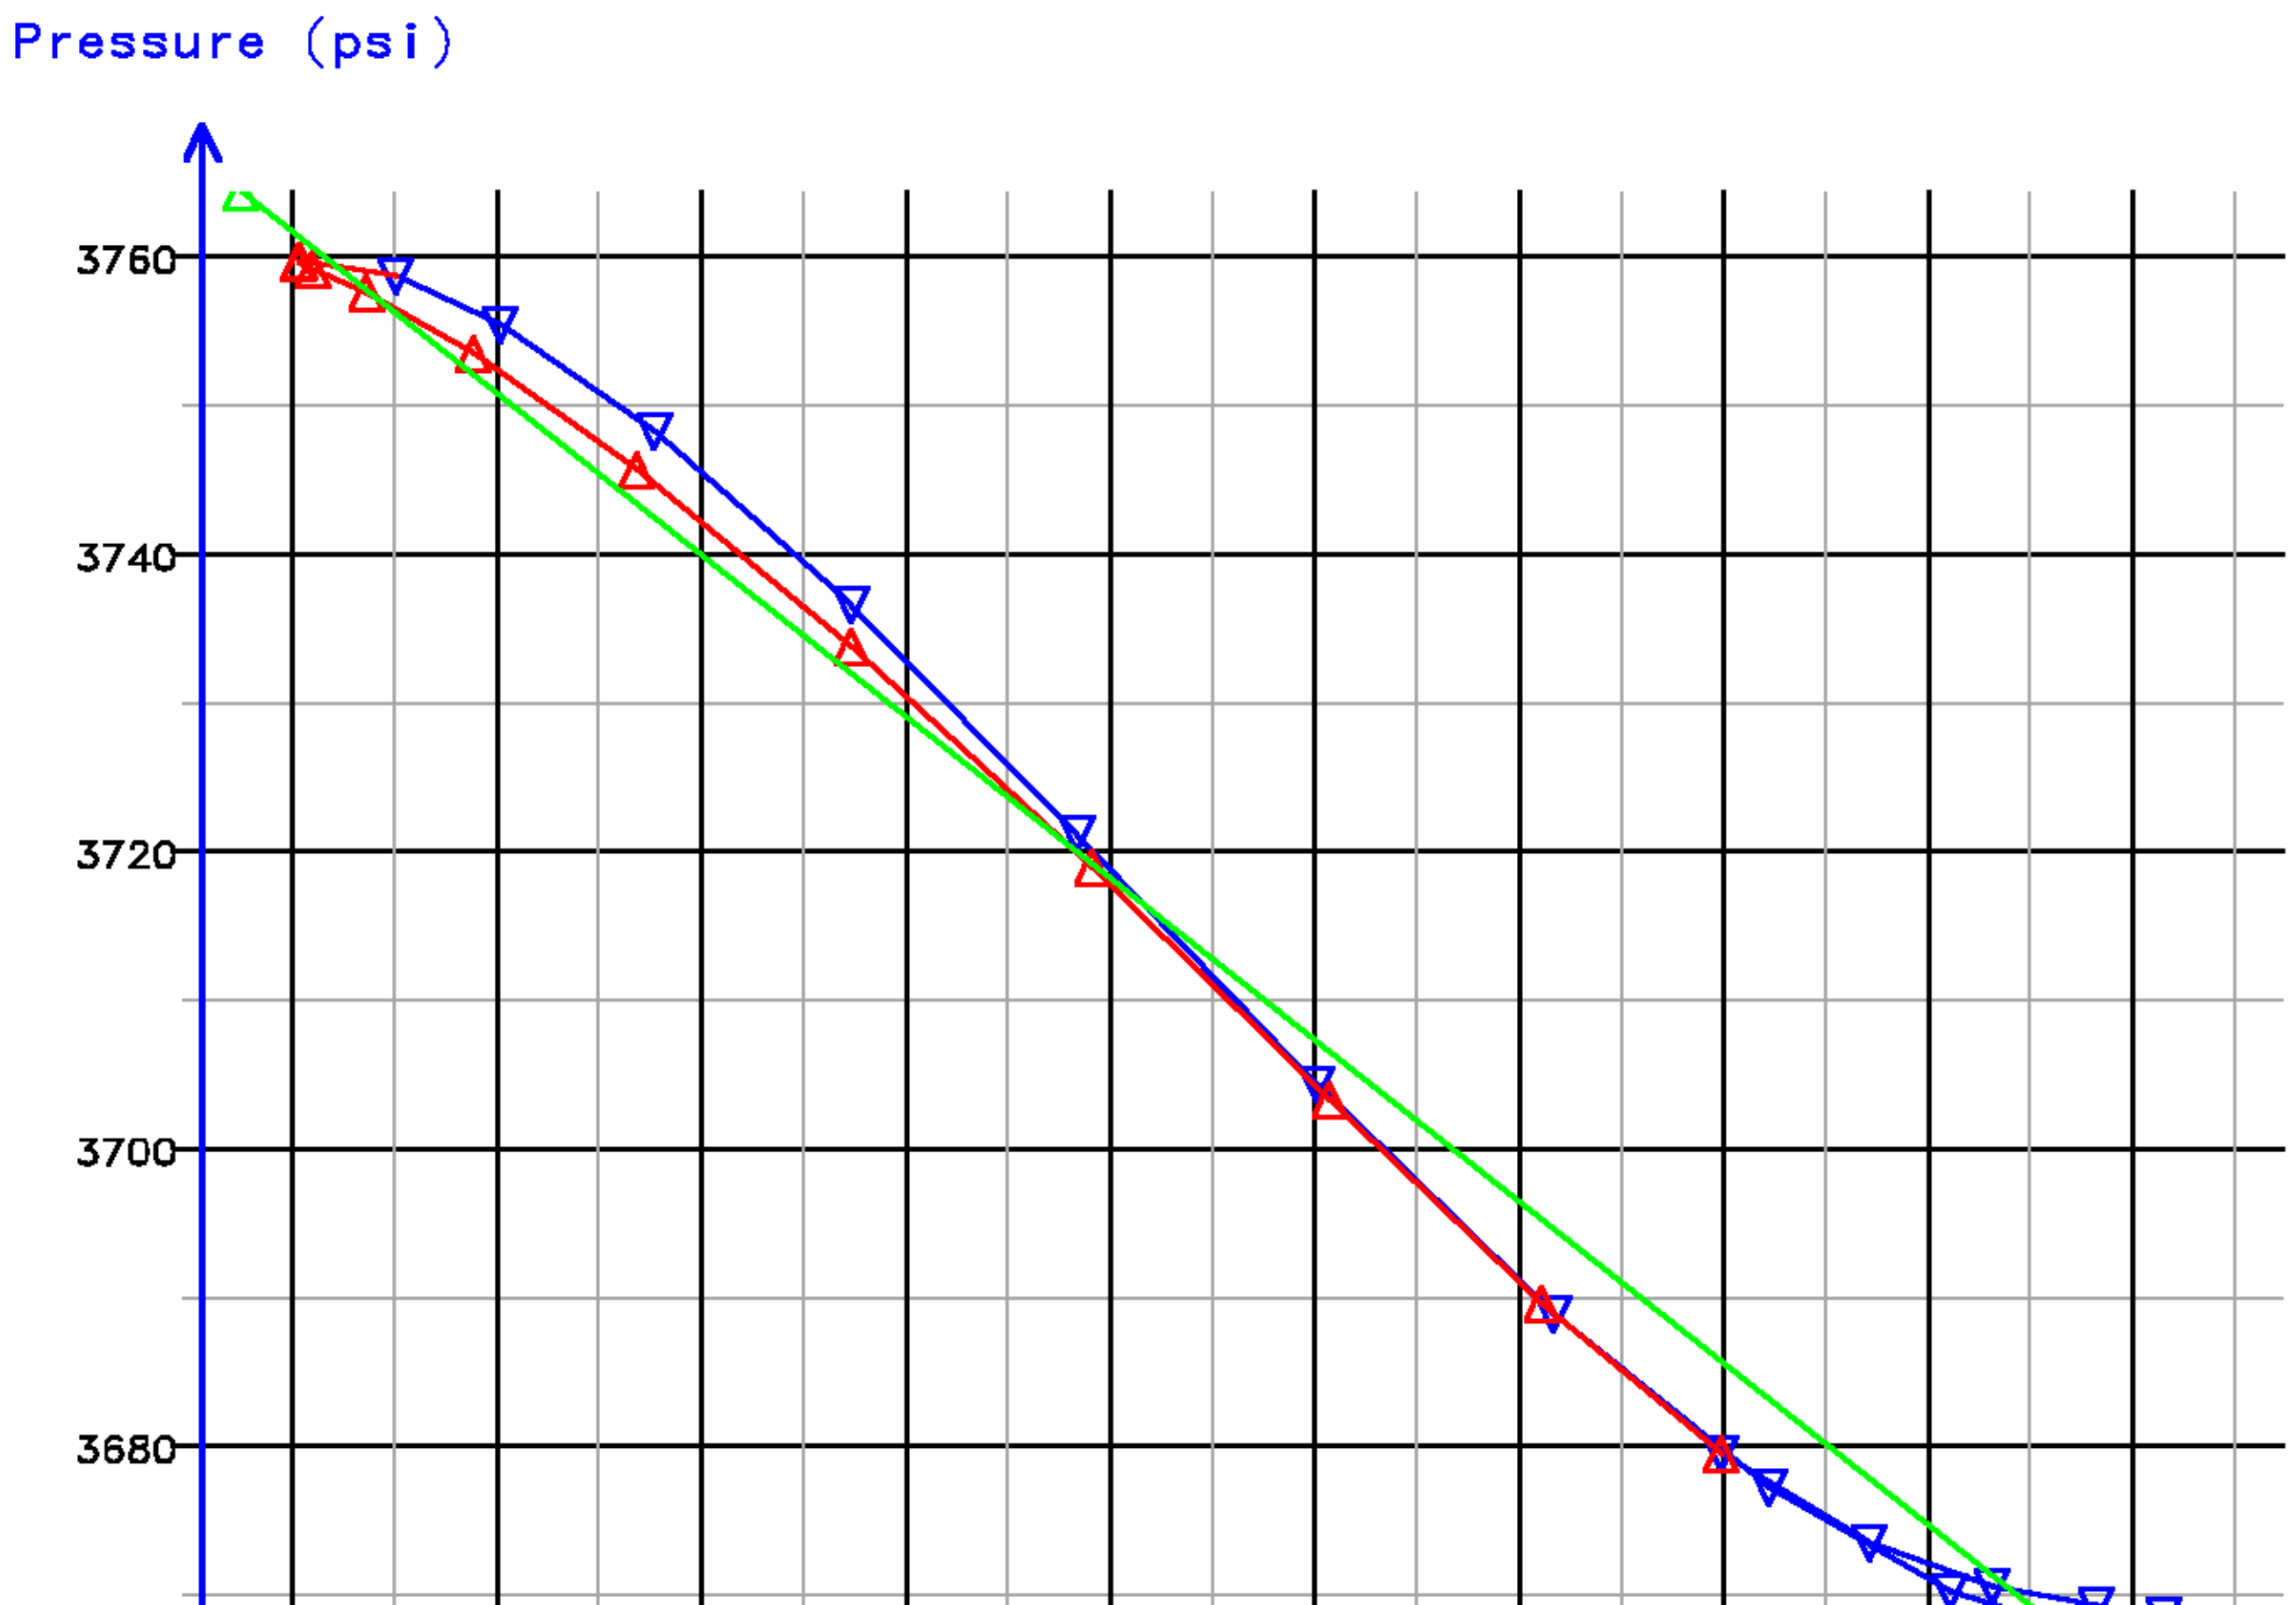

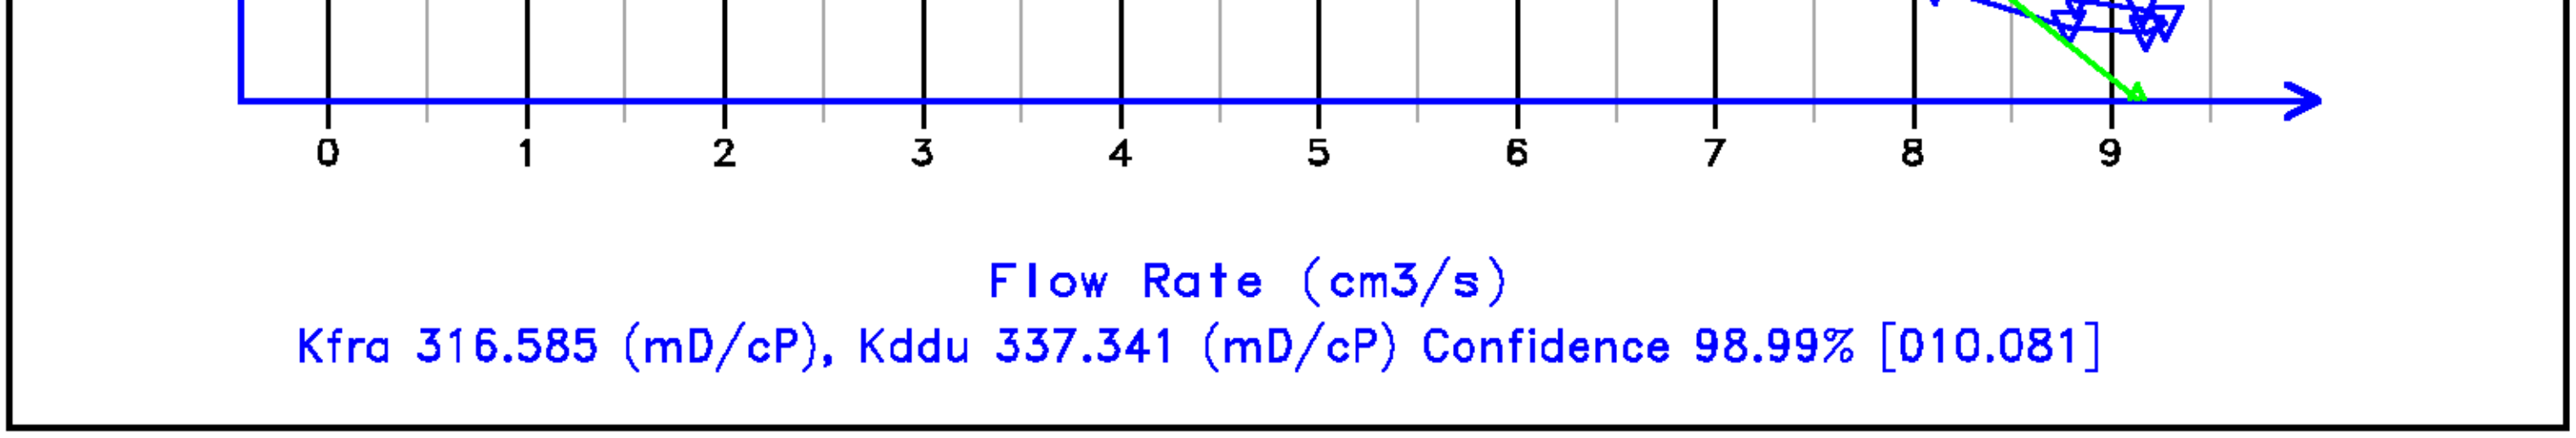

Data File : j800g12.aff
Presentation: gpi_rci-b3xx.log

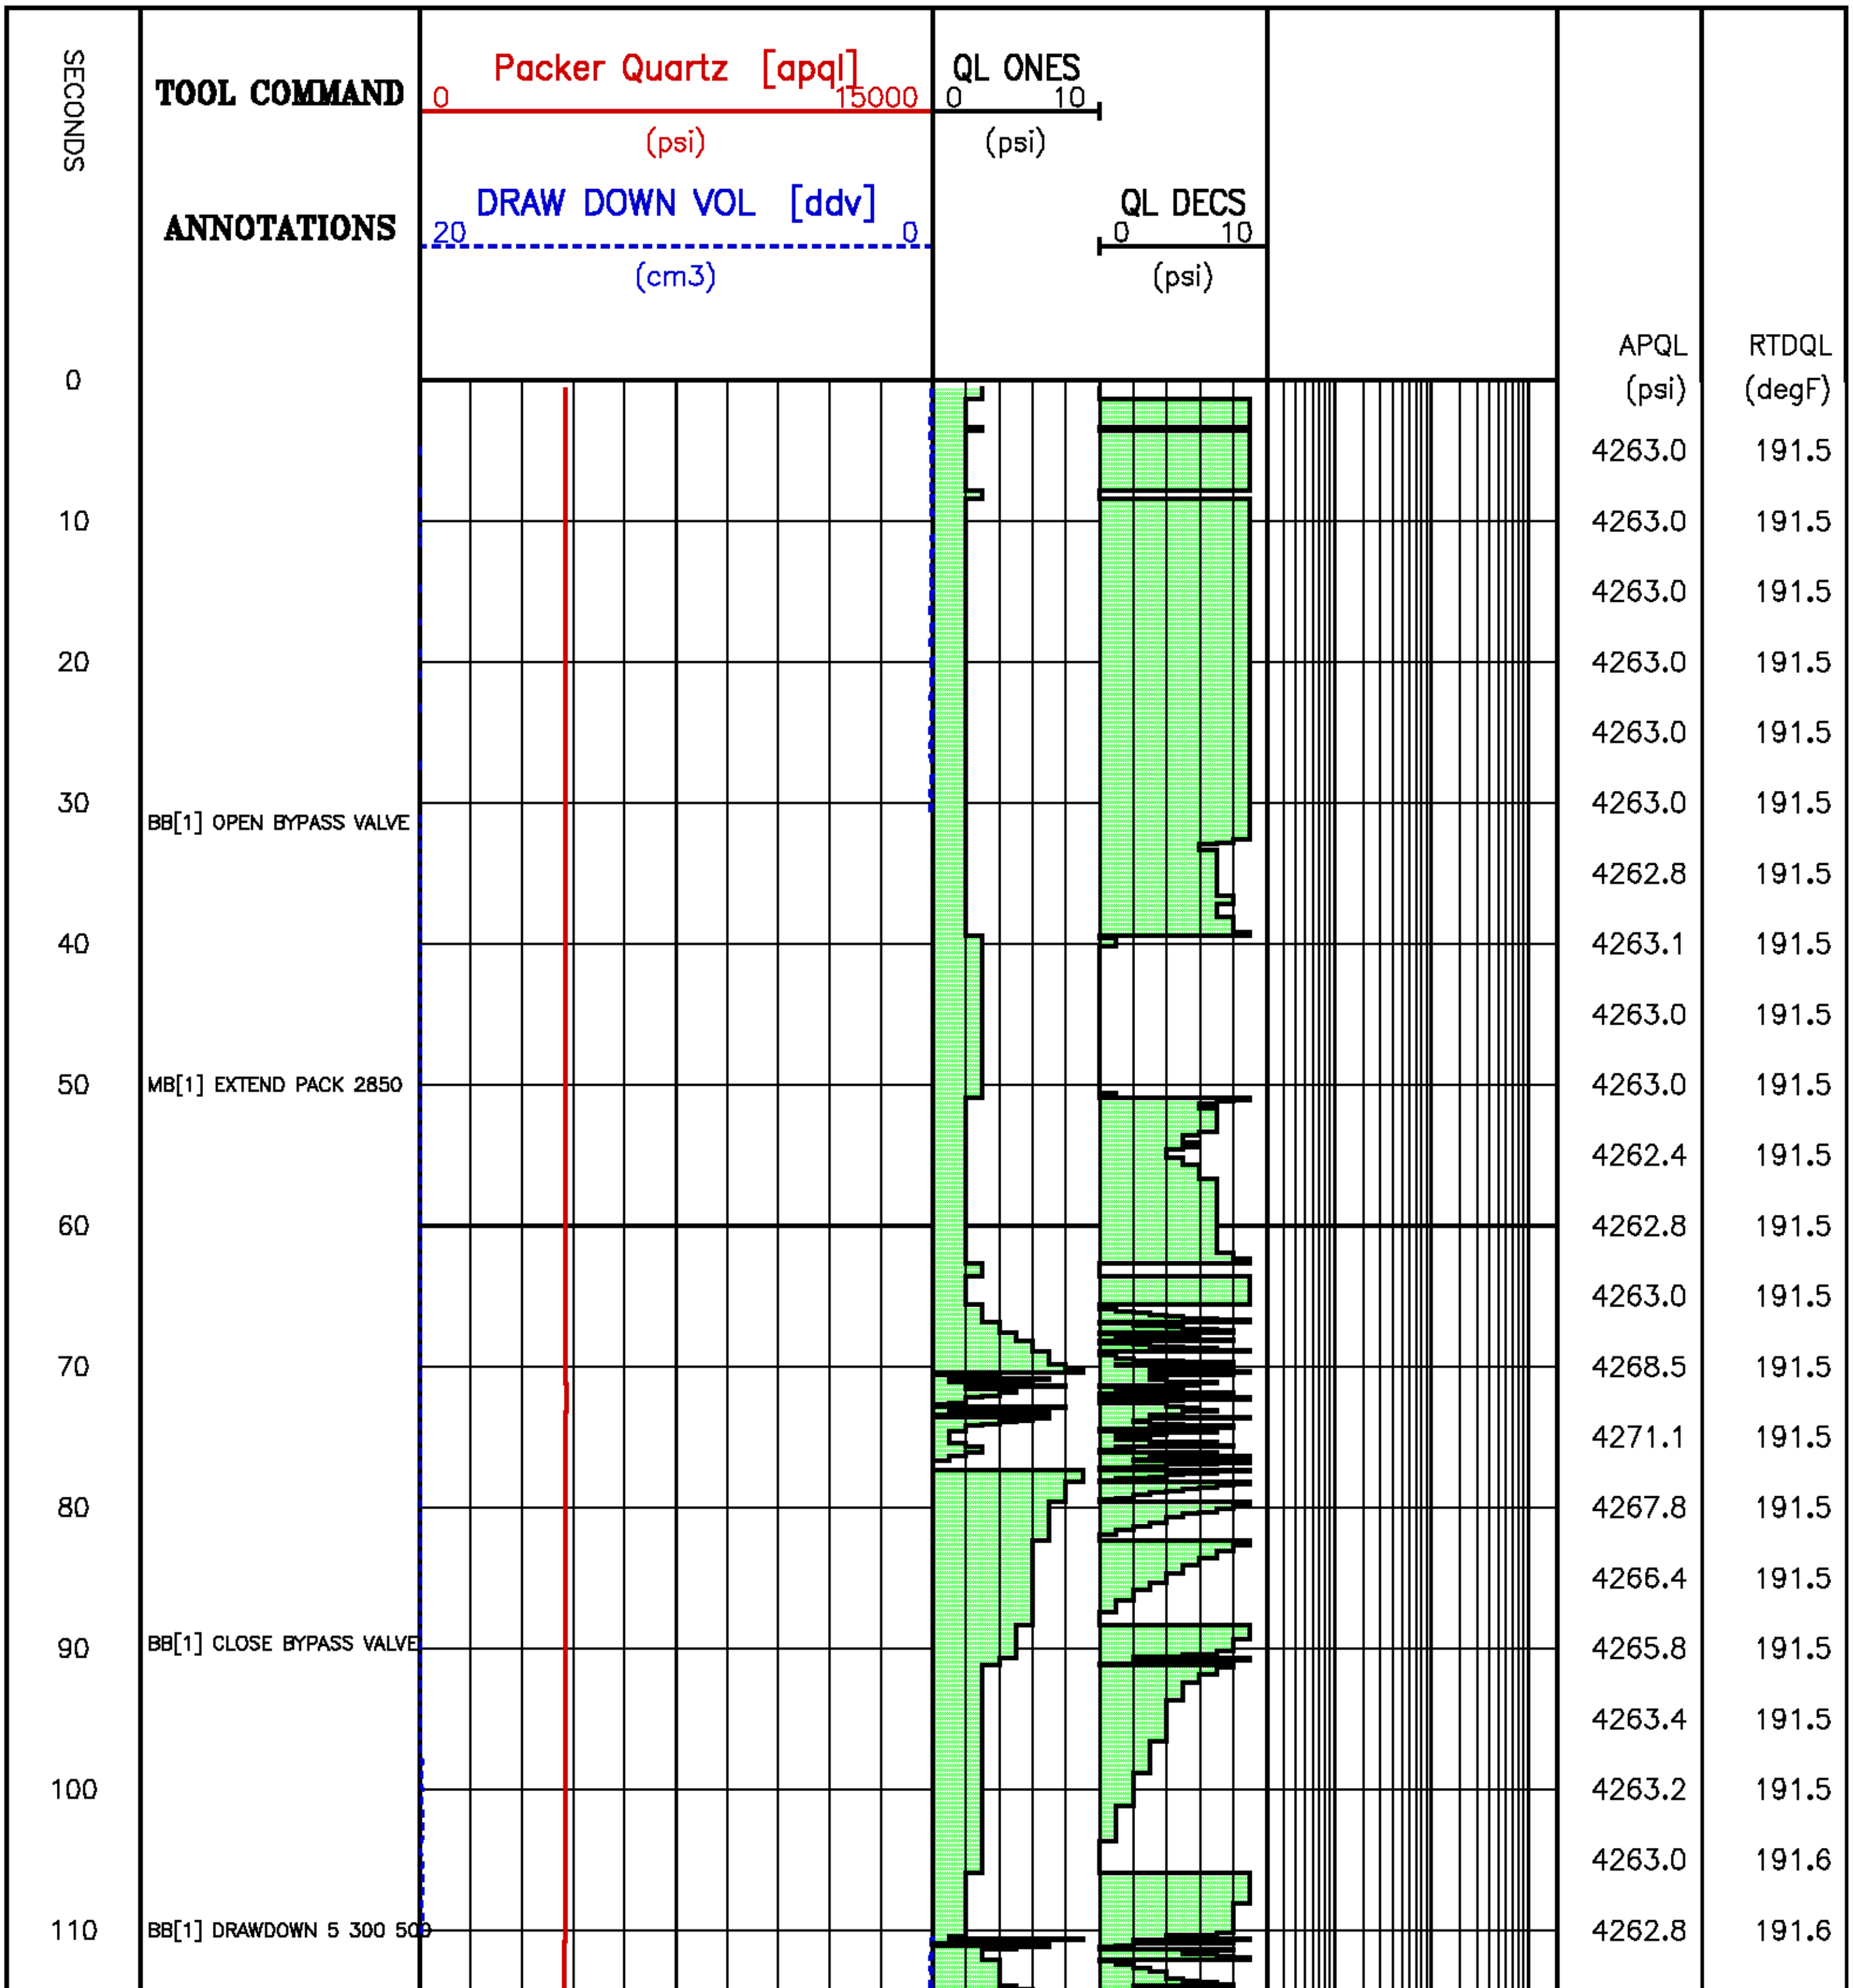

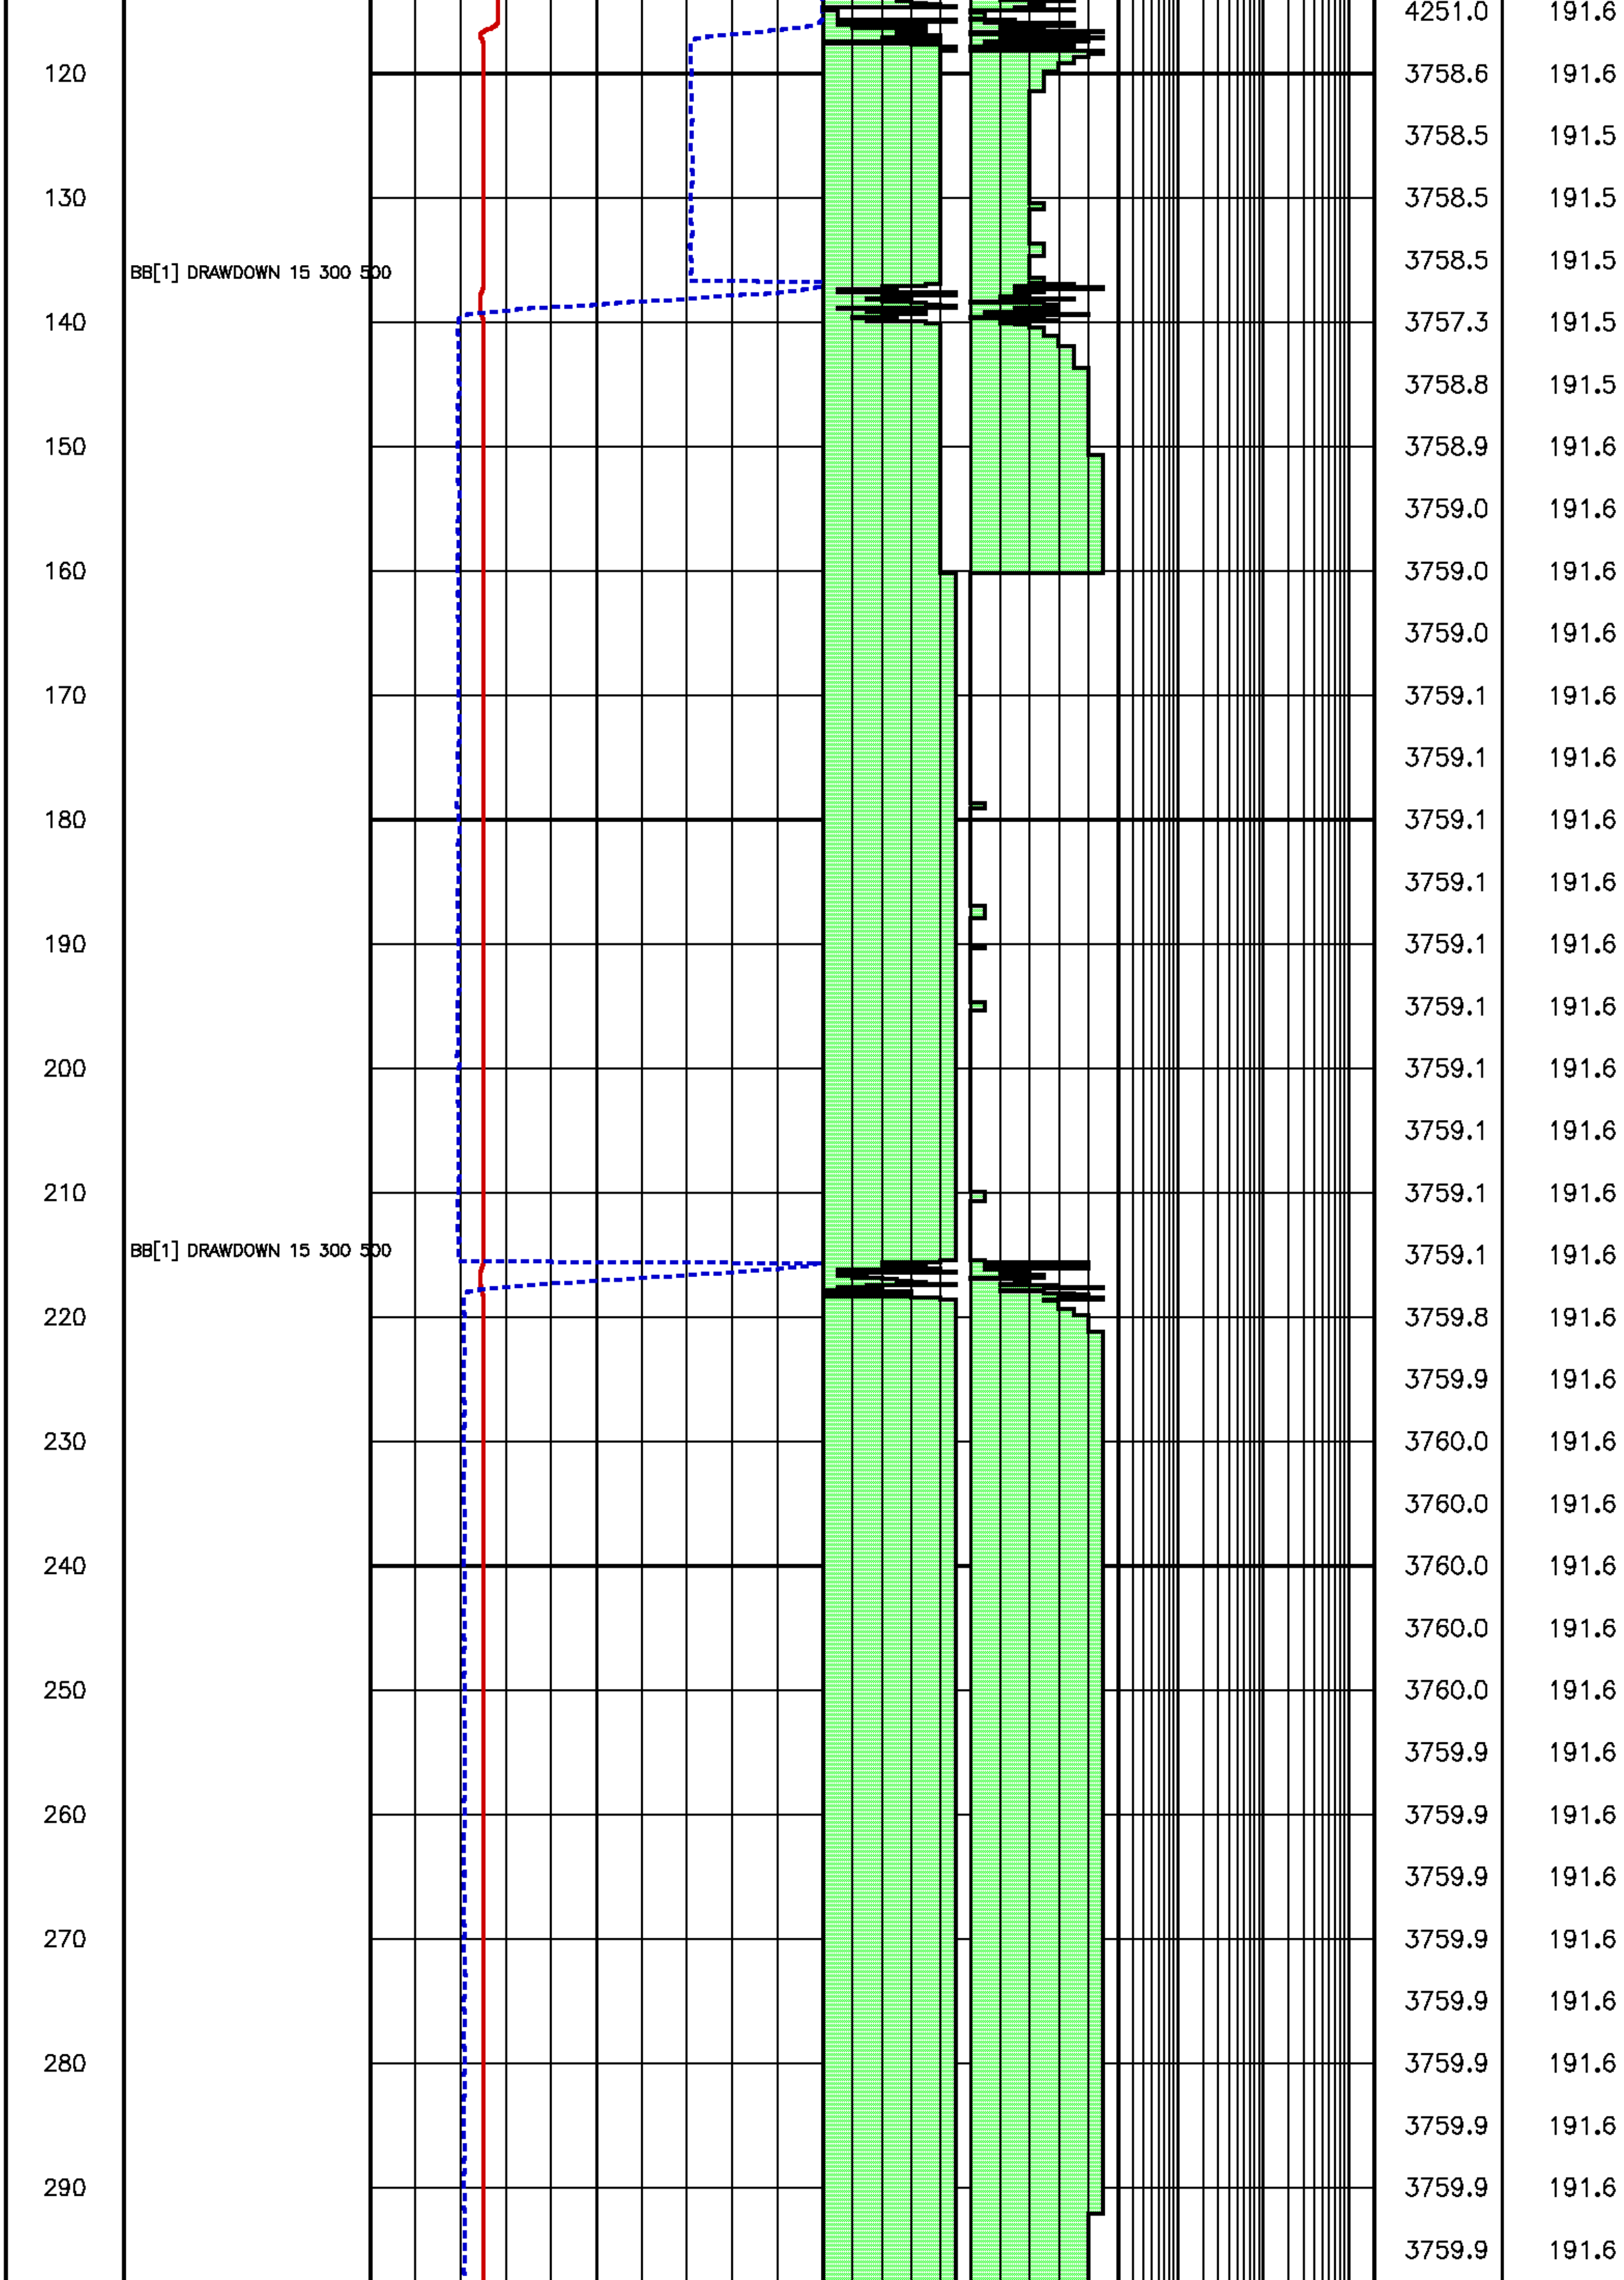

4251.0 191.6
120 3758.6 191.6
3758.5 191.5
130 3758.5 191.5
BB[1] DRAWDOWN 15 300 500
3758.5 191.5
140 3757.3 191.5
3758.8 191.5
150 3758.9 191.6
3759.0 191.6
160 3759.0 191.6
3759.0 191.6
170 3759.1 191.6
3759.1 191.6
180 3759.1 191.6
3759.1 191.6
190 3759.1 191.6
3759.1 191.6
200 3759.1 191.6
3759.1 191.6
210 3759.1 191.6
BB[1] DRAWDOWN 15 300 500
3759.1 191.6
220 3759.8 191.6
3759.9 191.6
230 3760.0 191.6
3760.0 191.6
240 3760.0 191.6
3760.0 191.6
250 3760.0 191.6
3759.9 191.6
260 3759.9 191.6
3759.9 191.6
270 3759.9 191.6
3759.9 191.6
280 3759.9 191.6
3759.9 191.6
290 3759.9 191.6
3759.9 191.6

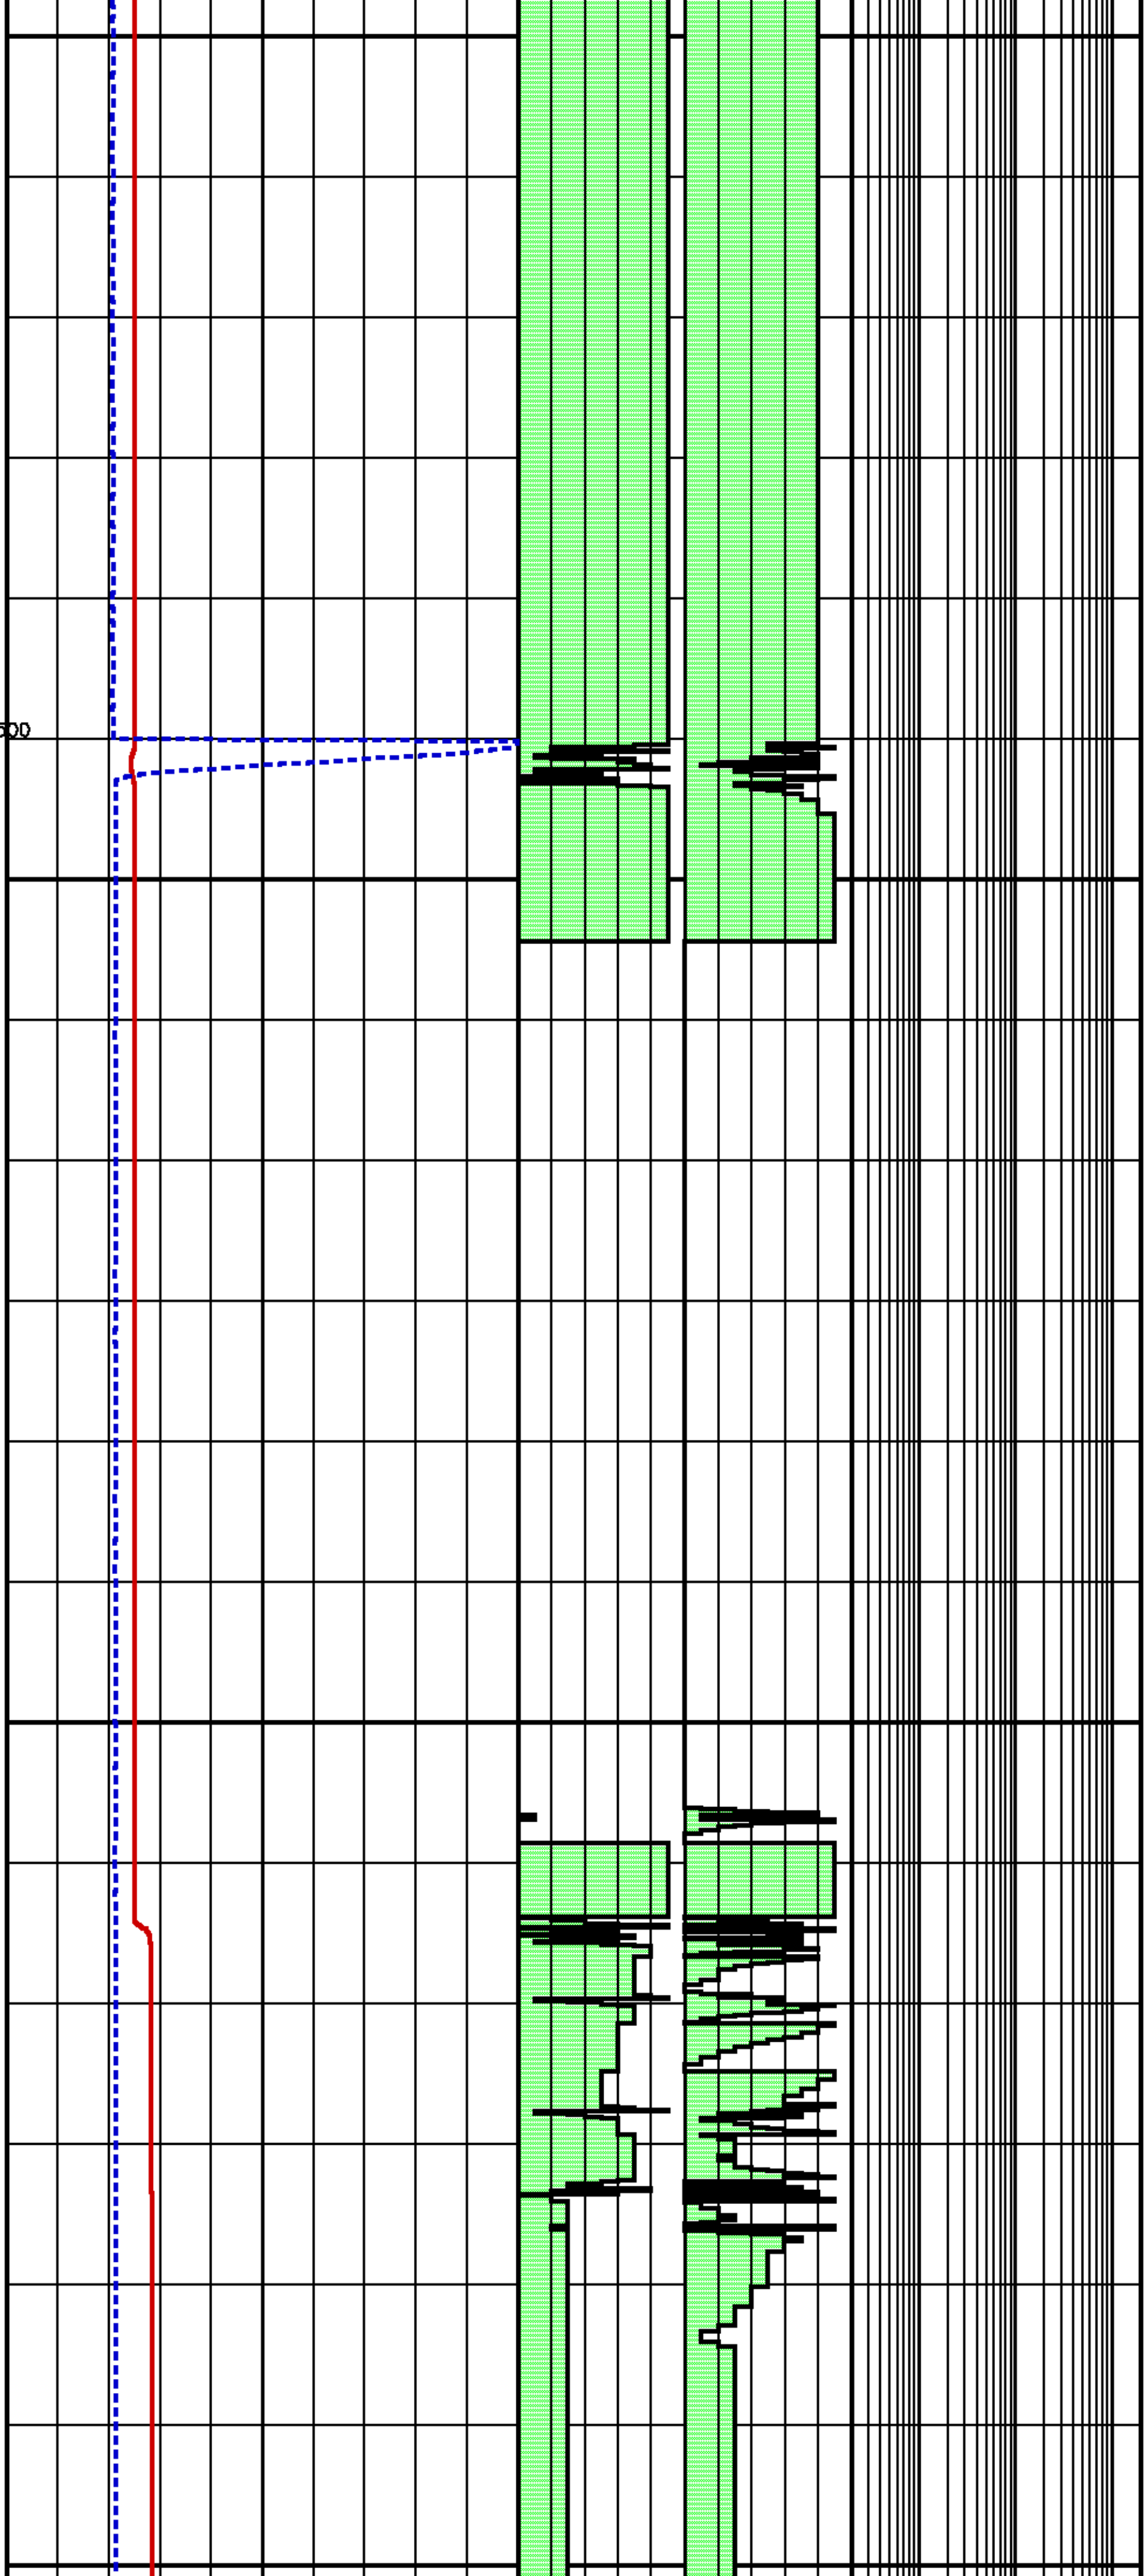

300		3759.9	191.6
		3759.9	191.6
310		3759.9	191.6
		3759.9	191.6
320		3759.9	191.6
		3759.9	191.6
330		3759.9	191.6
		3759.9	191.6
340		3759.9	191.6
		3759.8	191.6
350	BB[1] DRAWDOWN 15 300 500	3759.8	191.7
		3759.9	191.7
360		3760.0	191.7
		3760.0	191.7
370		3760.0	191.7
		3760.0	191.7
380		3760.0	191.7
		3760.0	191.7
390		3760.0	191.7
		3760.0	191.7
400		3760.0	191.7
		3760.0	191.7
410		3760.0	191.7
		3760.0	191.7
420		3760.0	191.7
	BB[1] ABORT	3760.0	191.7
430		3759.9	191.7
	BB[1] OPEN BYPASS VALVE	4182.8	191.7
440		4235.6	191.7
		4236.0	191.7
450		4247.4	191.7
	MB[1] RETRACT PACK 2600	4263.3	191.7
460		4263.5	191.7
		4263.3	191.7
470		4263.4	191.7
		4263.4	191.7
480		4263.4	191.7

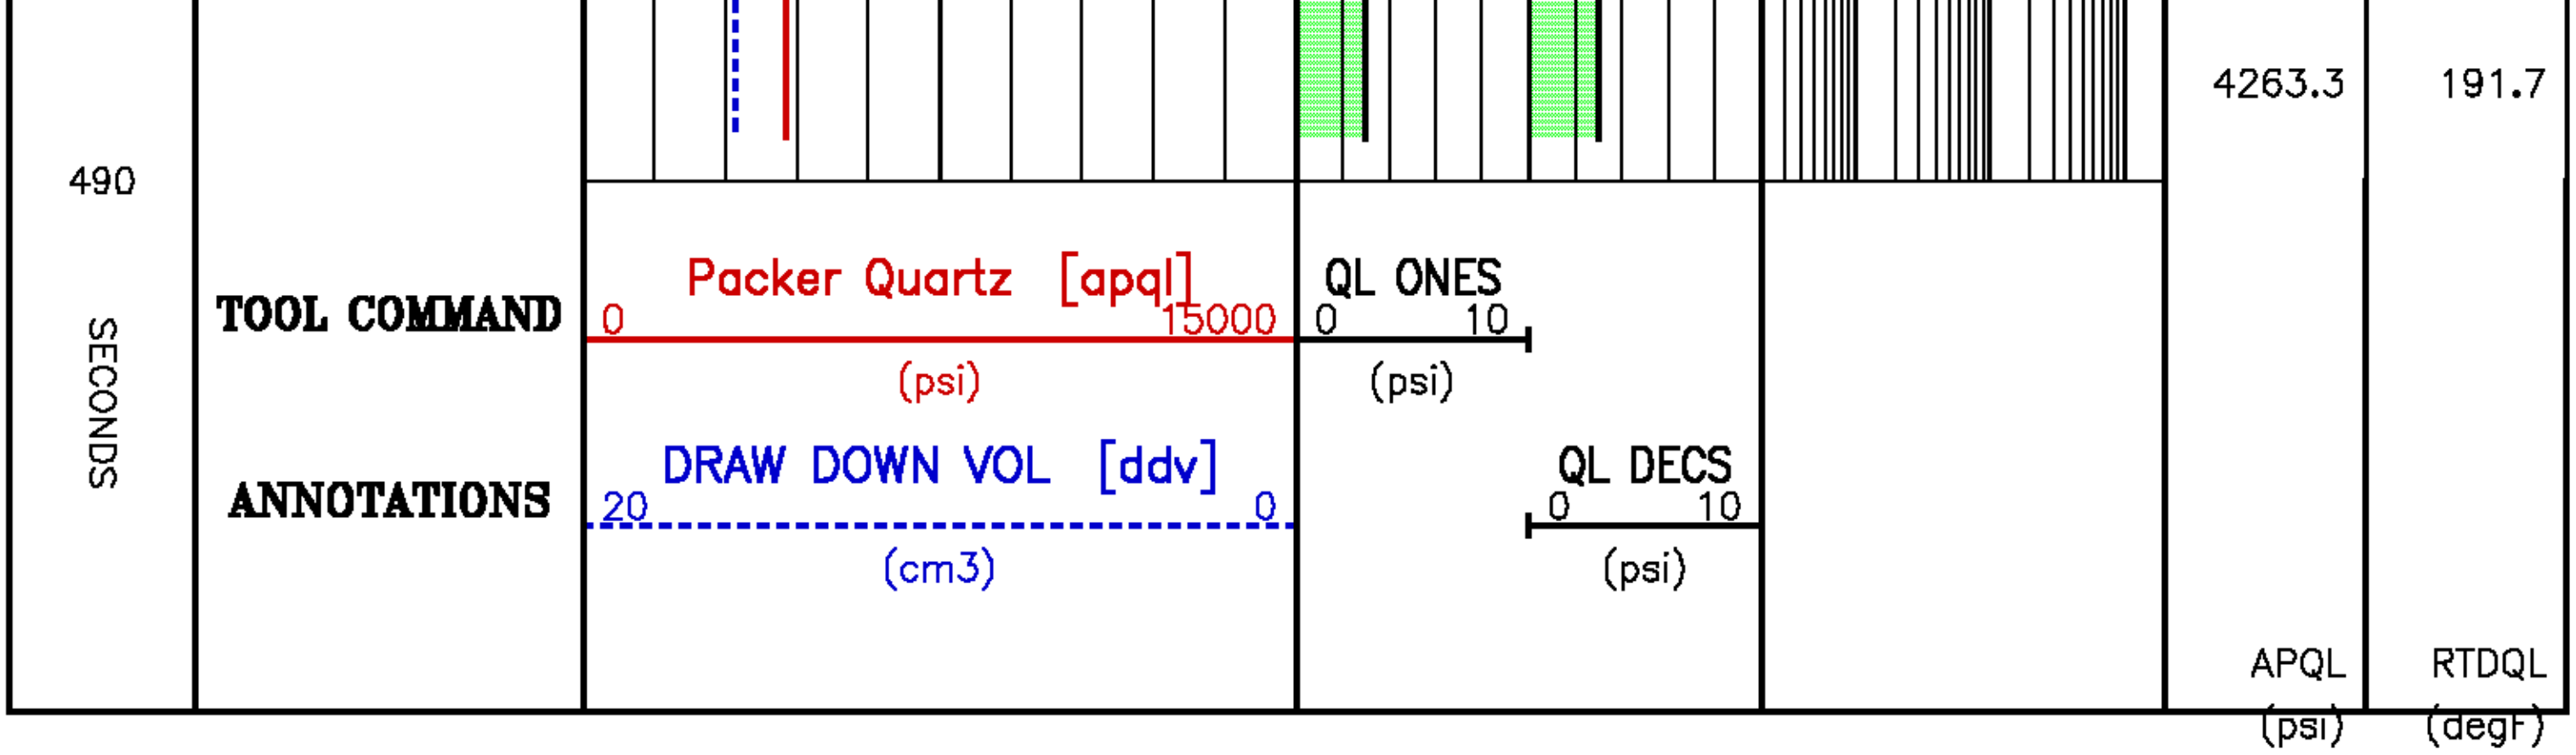

Pressure Tests – Level 11 Tool Instance 1
MD 2417.5 m TVD 2417.5 m

PRESSURE HISTORY

Depth MD 2417.5 m TVD 2417.5 m

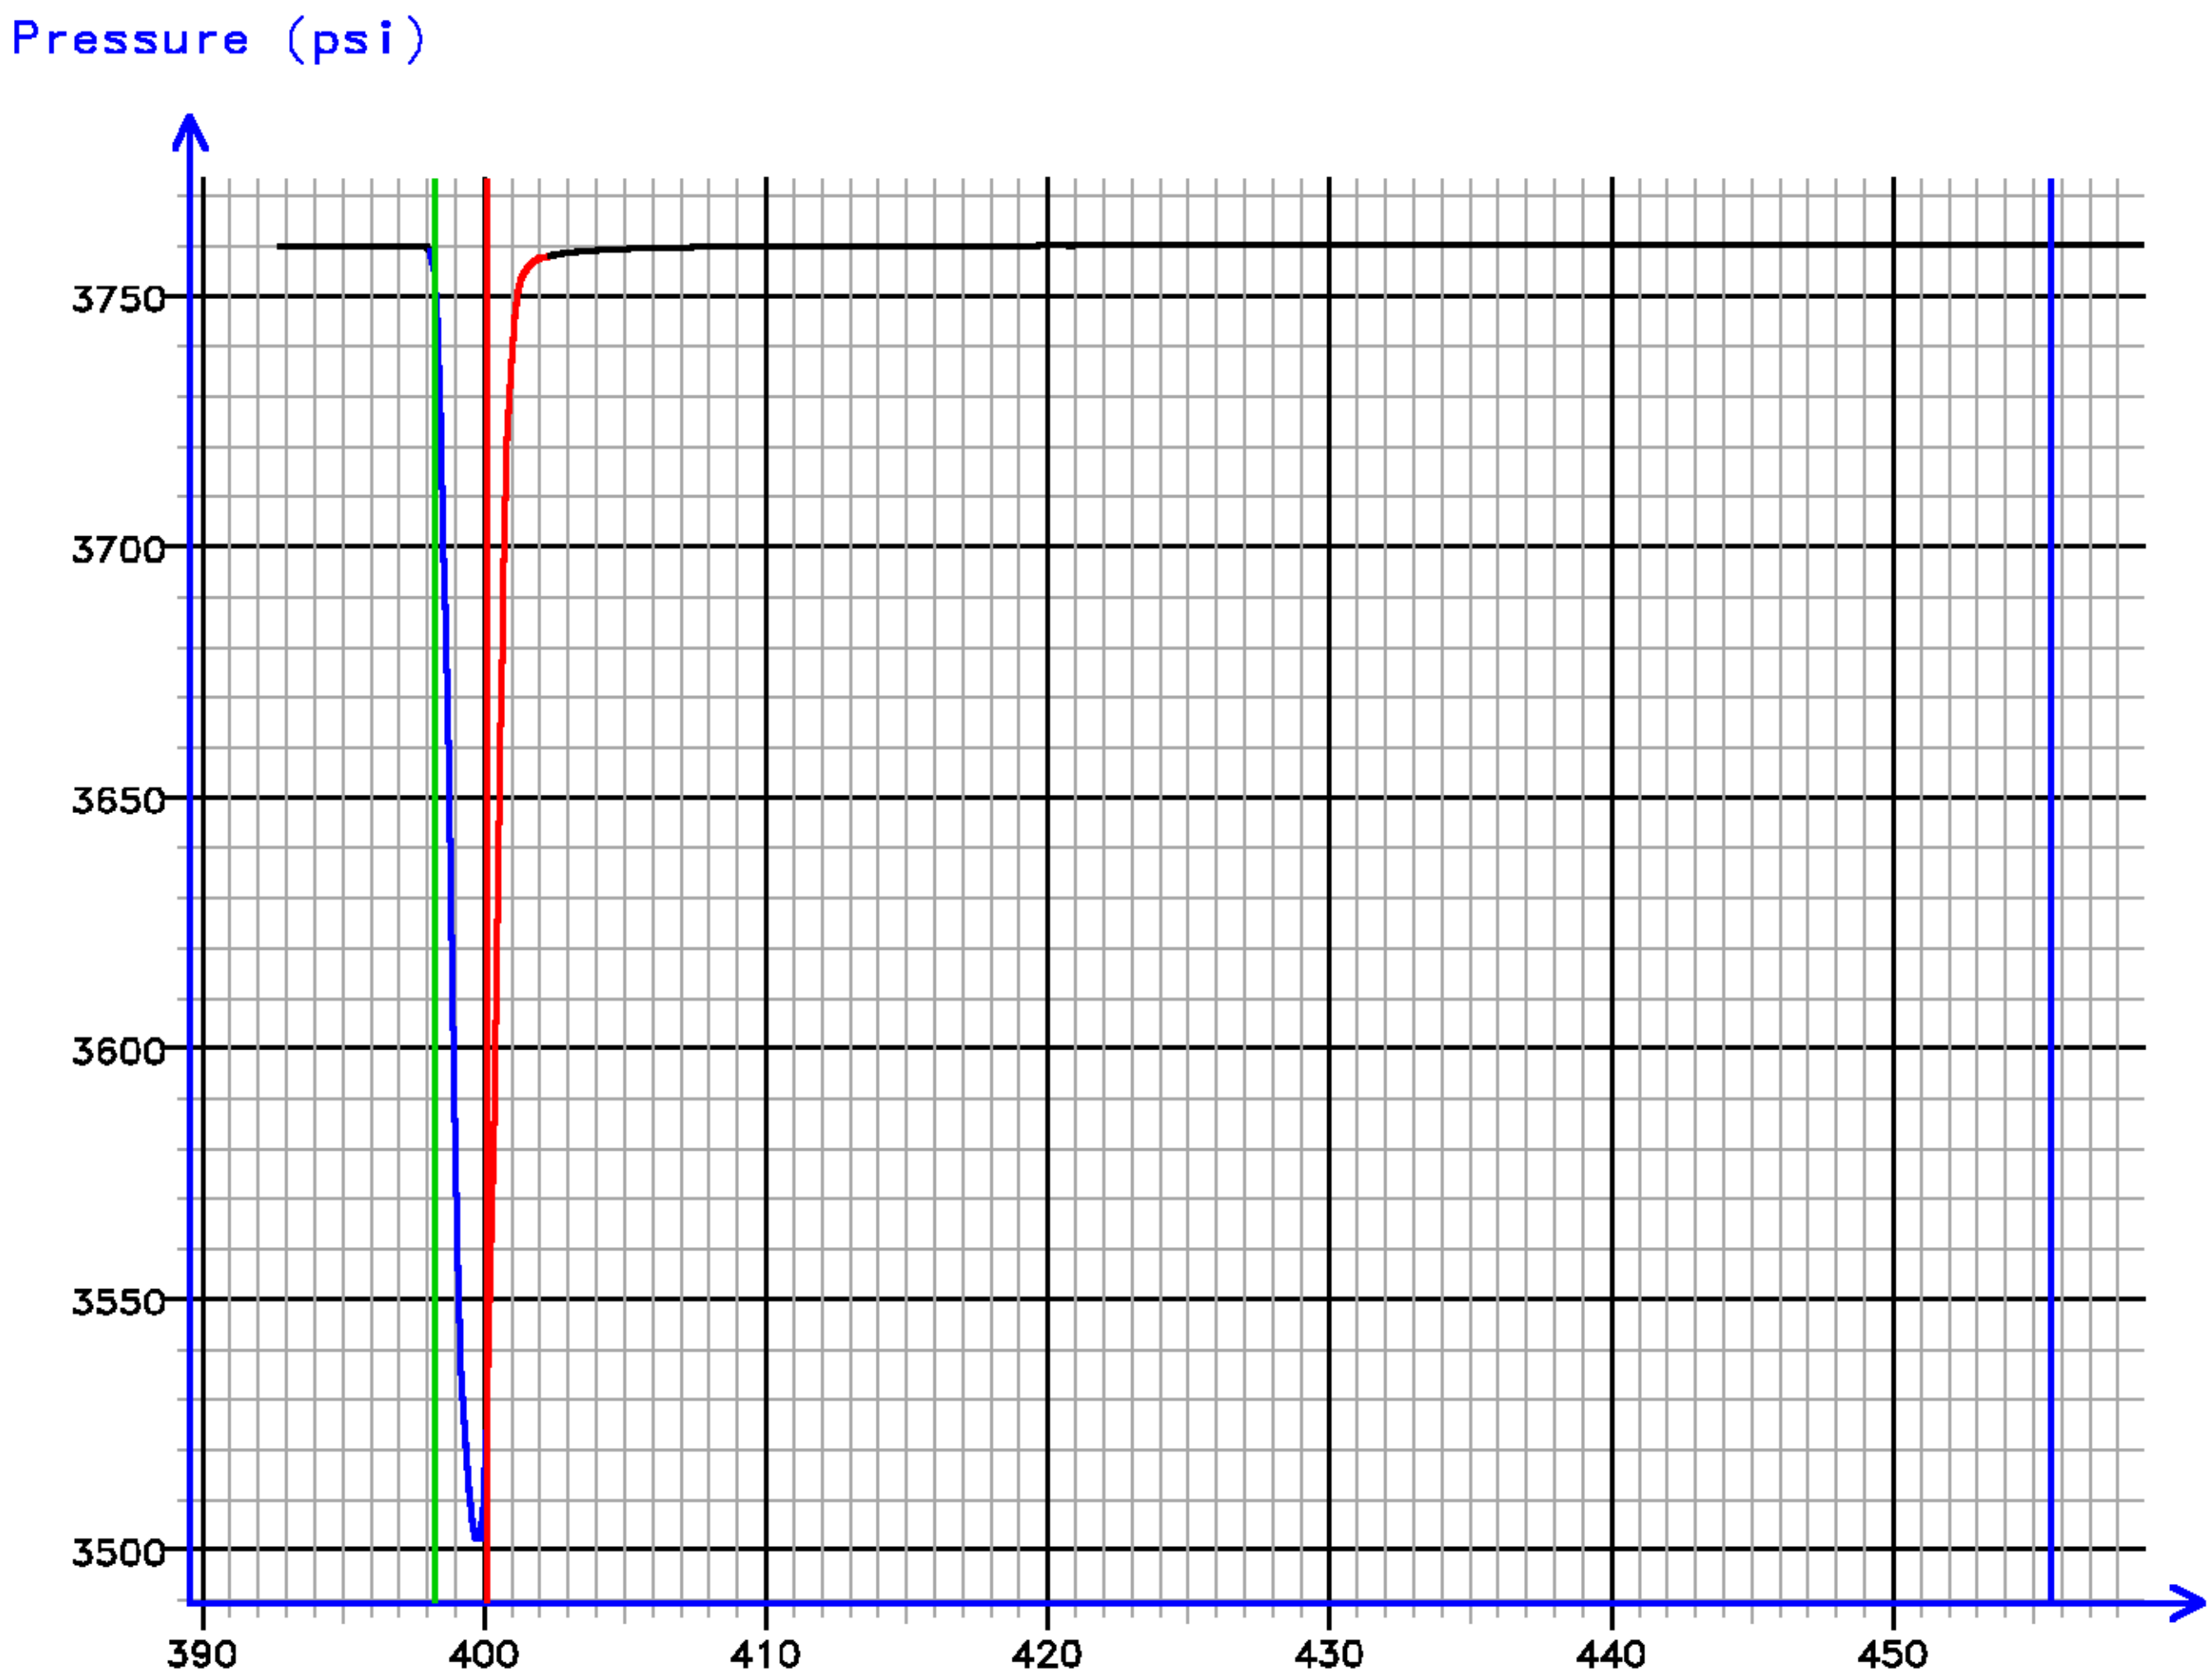

Time (s)

[011.094]

FLOW RATE ANALYSIS

Depth MD 2417.5 m TVD 2417.5 m

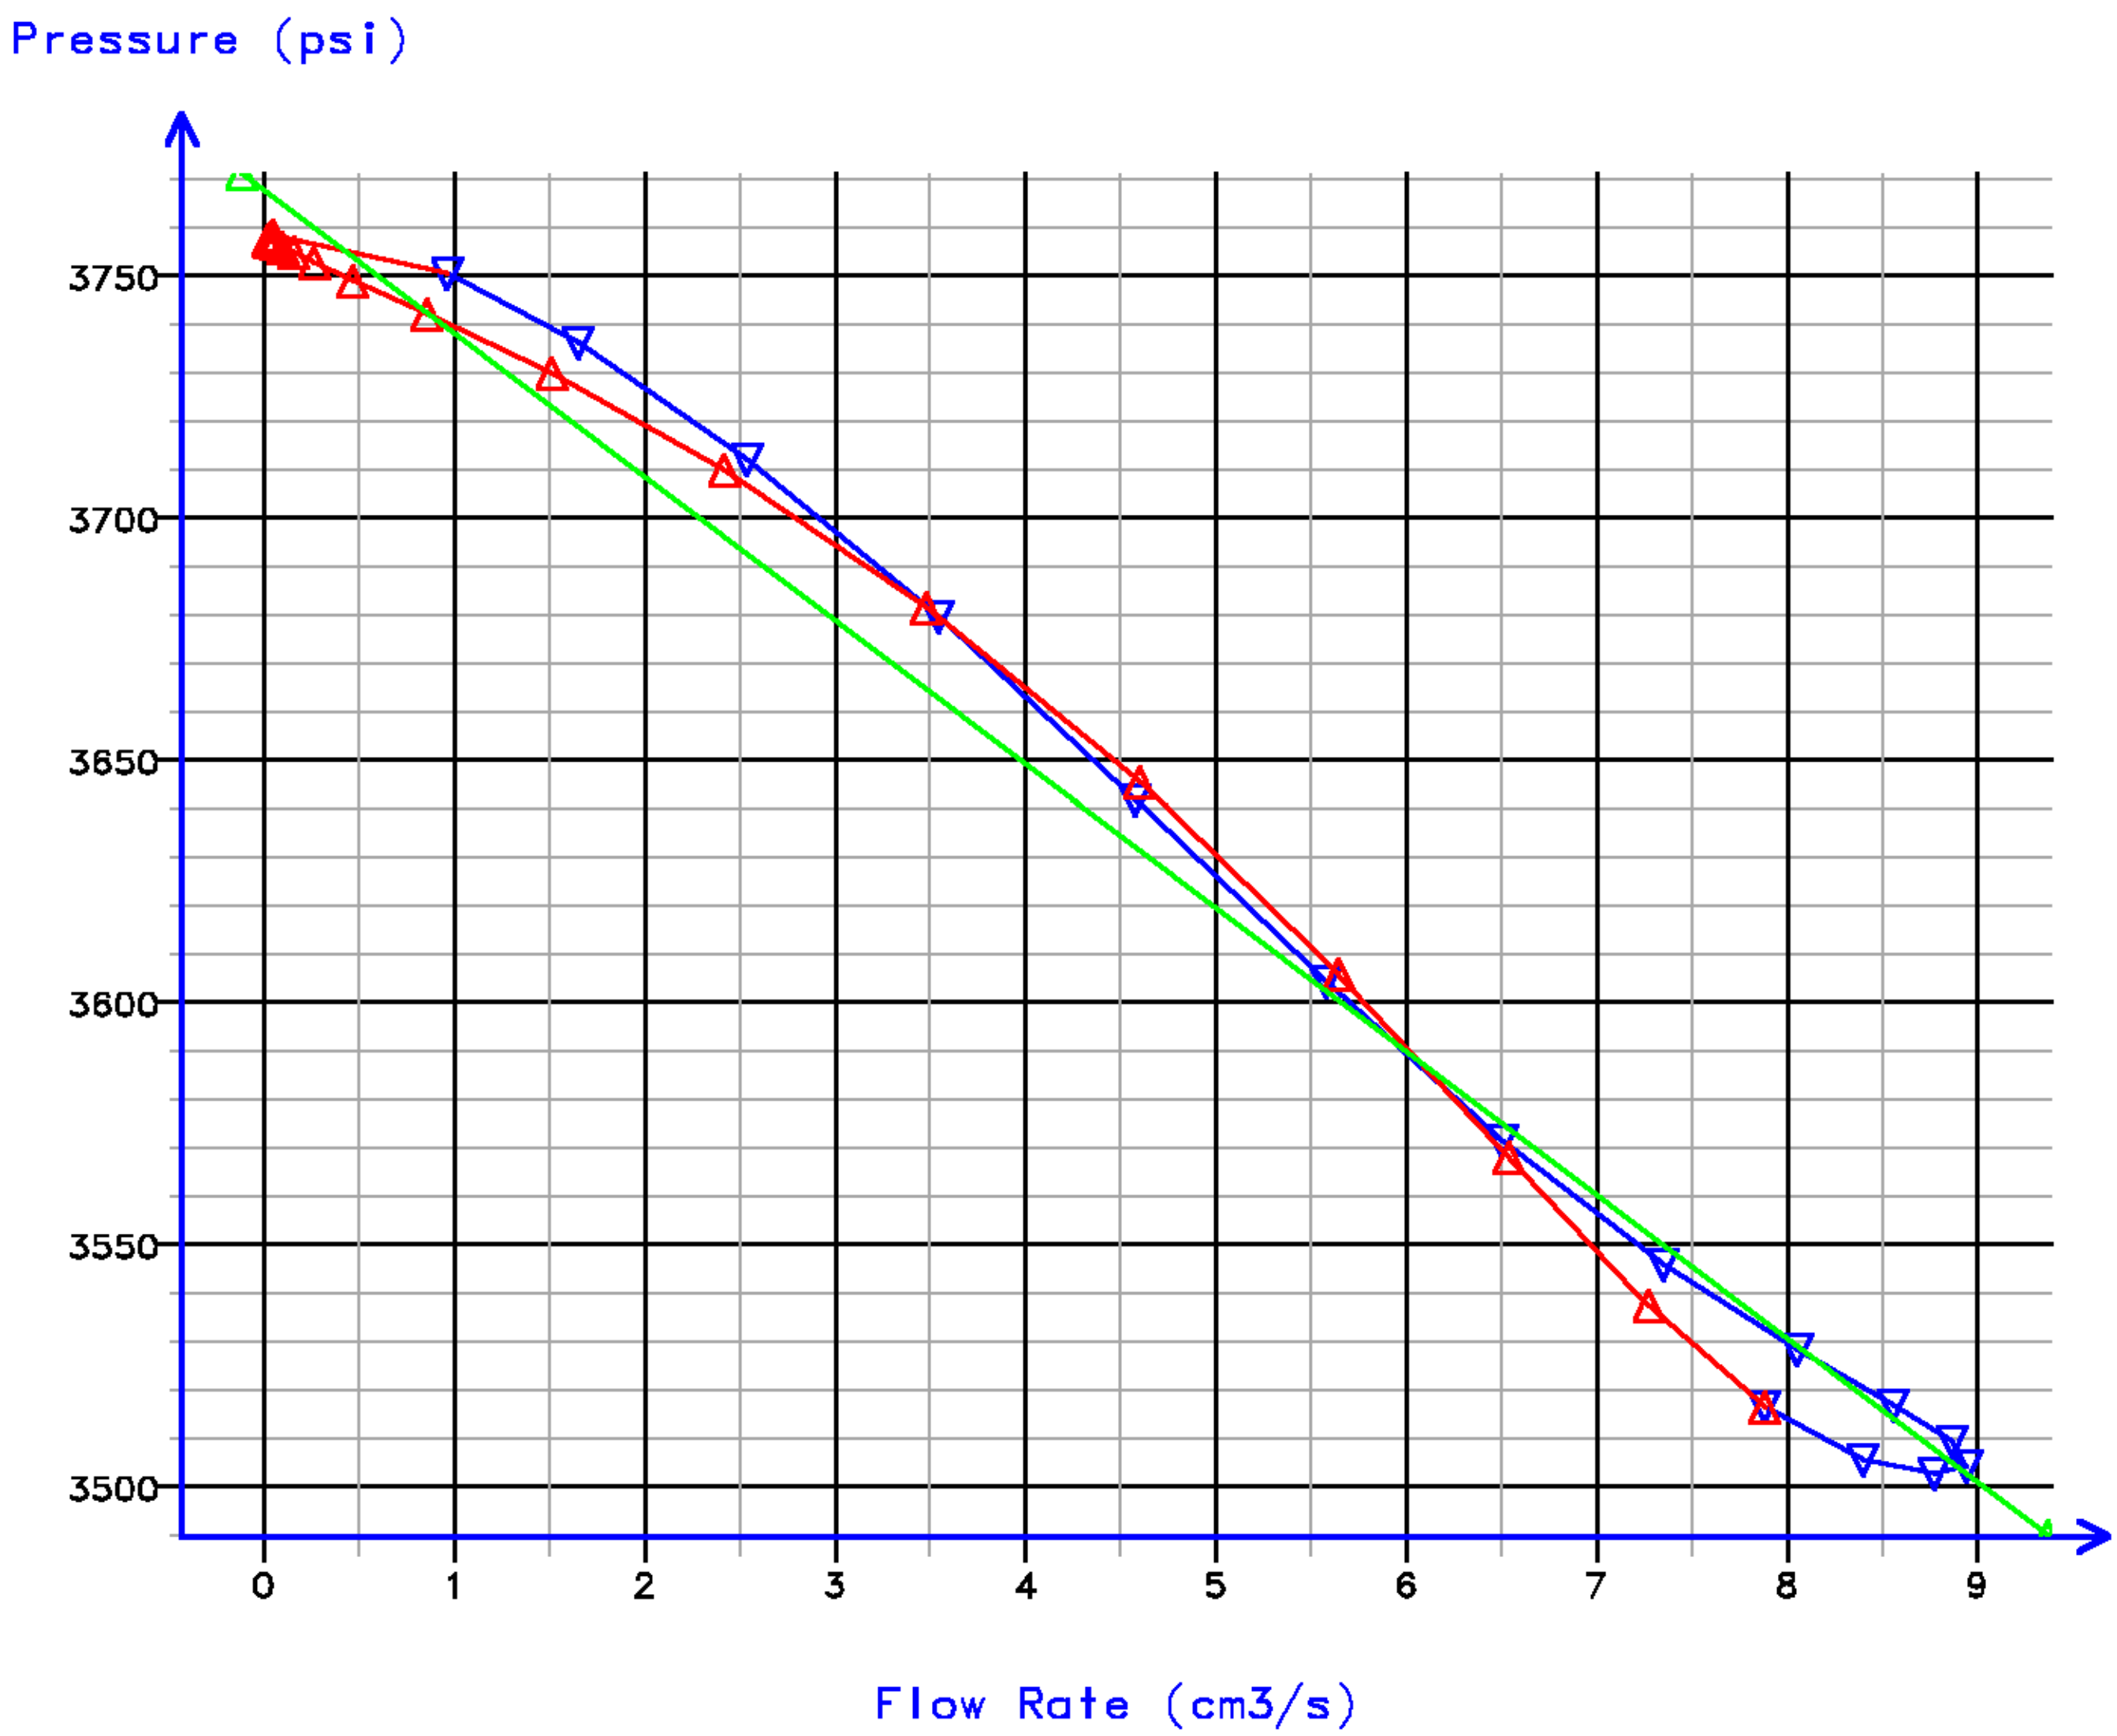

Kfra 116.226 (mD/cP), Kddu 126.361 (mD/cP) Confidence 98.94% [011.094]

Data File : j800g14.aff
Presentation: gpi_rci-b3xx.log

SECONDS	TOOL COMMAND	Packer Quartz [apql] 0 15000 (psi)	QL ONES 0 10 (psi)			
	ANNOTATIONS	DRAW DOWN VOL [ddv] 20 0 (cm3)	QL DECS 0 10 (psi)			

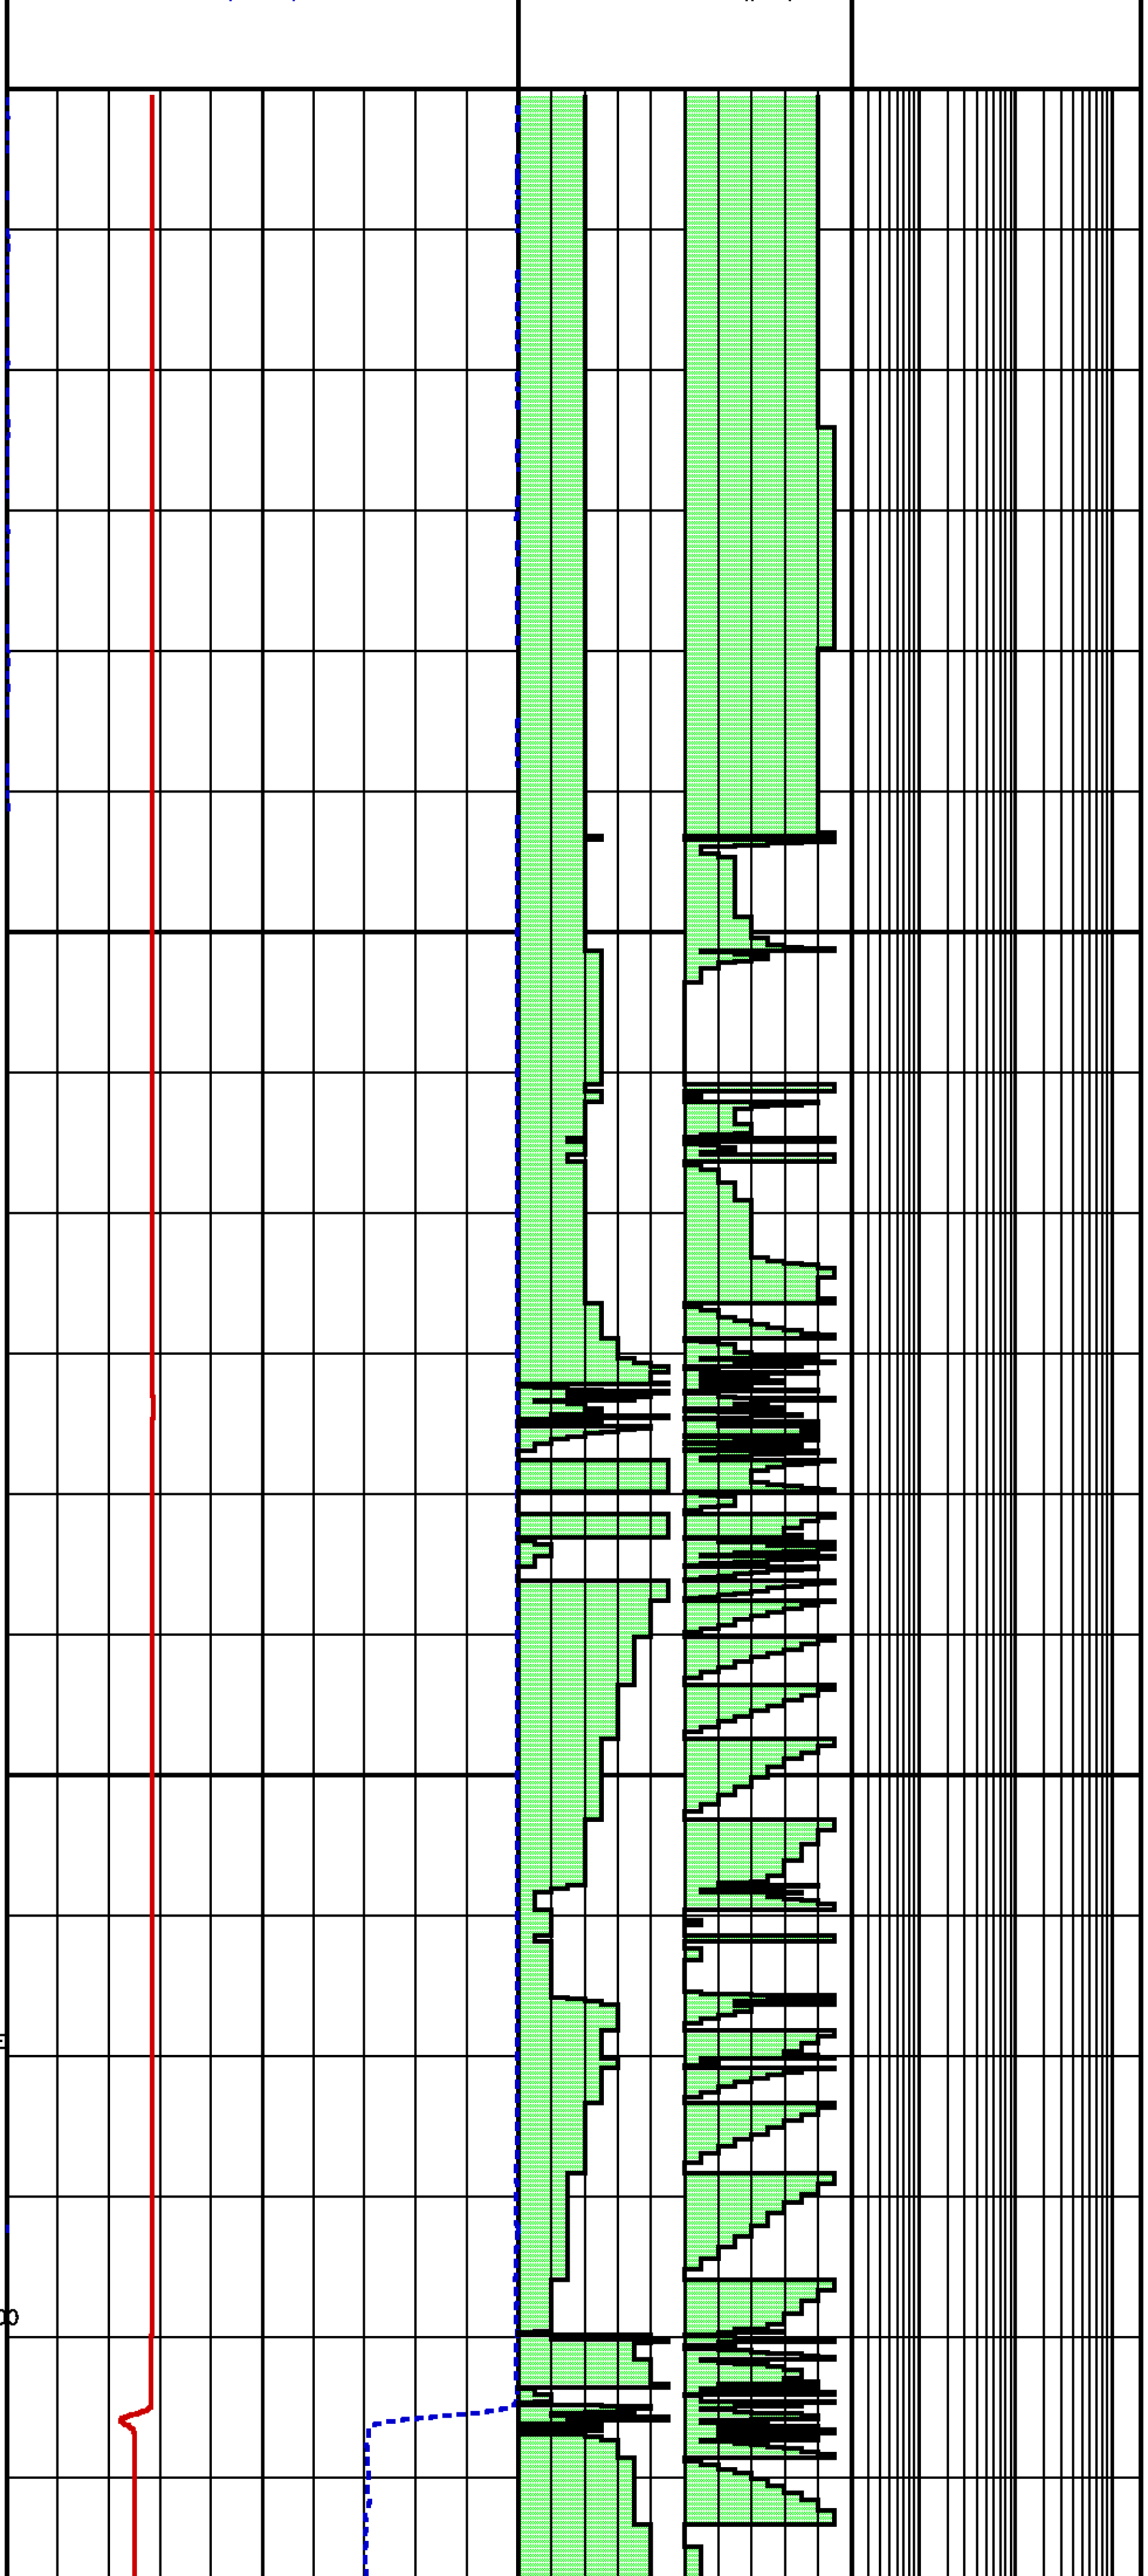

Time	Remarks	APQL (psi)	RTDQL (degF)
0			
		4264.9	192.6
10		4264.9	192.6
		4264.9	192.6
20		4264.9	192.6
		4264.9	192.6
30		4264.9	192.6
		4264.9	192.6
40		4264.9	192.6
		4264.9	192.6
50		4264.9	192.6
	BB[1] OPEN BYPASS VALVE		
		4264.3	192.6
60		4264.4	192.6
		4265.1	192.6
70	MB[1] EXTEND PACK 2850	4265.0	192.6
		4264.0	192.7
80		4264.4	192.7
		4264.8	192.7
90		4266.5	192.7
		4282.5	192.7
100		4270.2	192.7
		4271.2	192.7
110		4268.1	192.7
		4266.6	192.7
120		4265.5	192.7
	MB[1] RECHARGE 2850	4264.8	192.7
130		4262.1	192.7
		4262.0	192.7
140	BB[1] CLOSE BYPASS VALVE	4265.8	192.7
		4264.6	192.7
150		4263.8	192.7
		4263.1	192.7
160	BB[1] DRAWDOWN 5 300 500	4255.3	192.7
		4228.3	192.7
170		3757.5	192.7
		3758.1	192.7

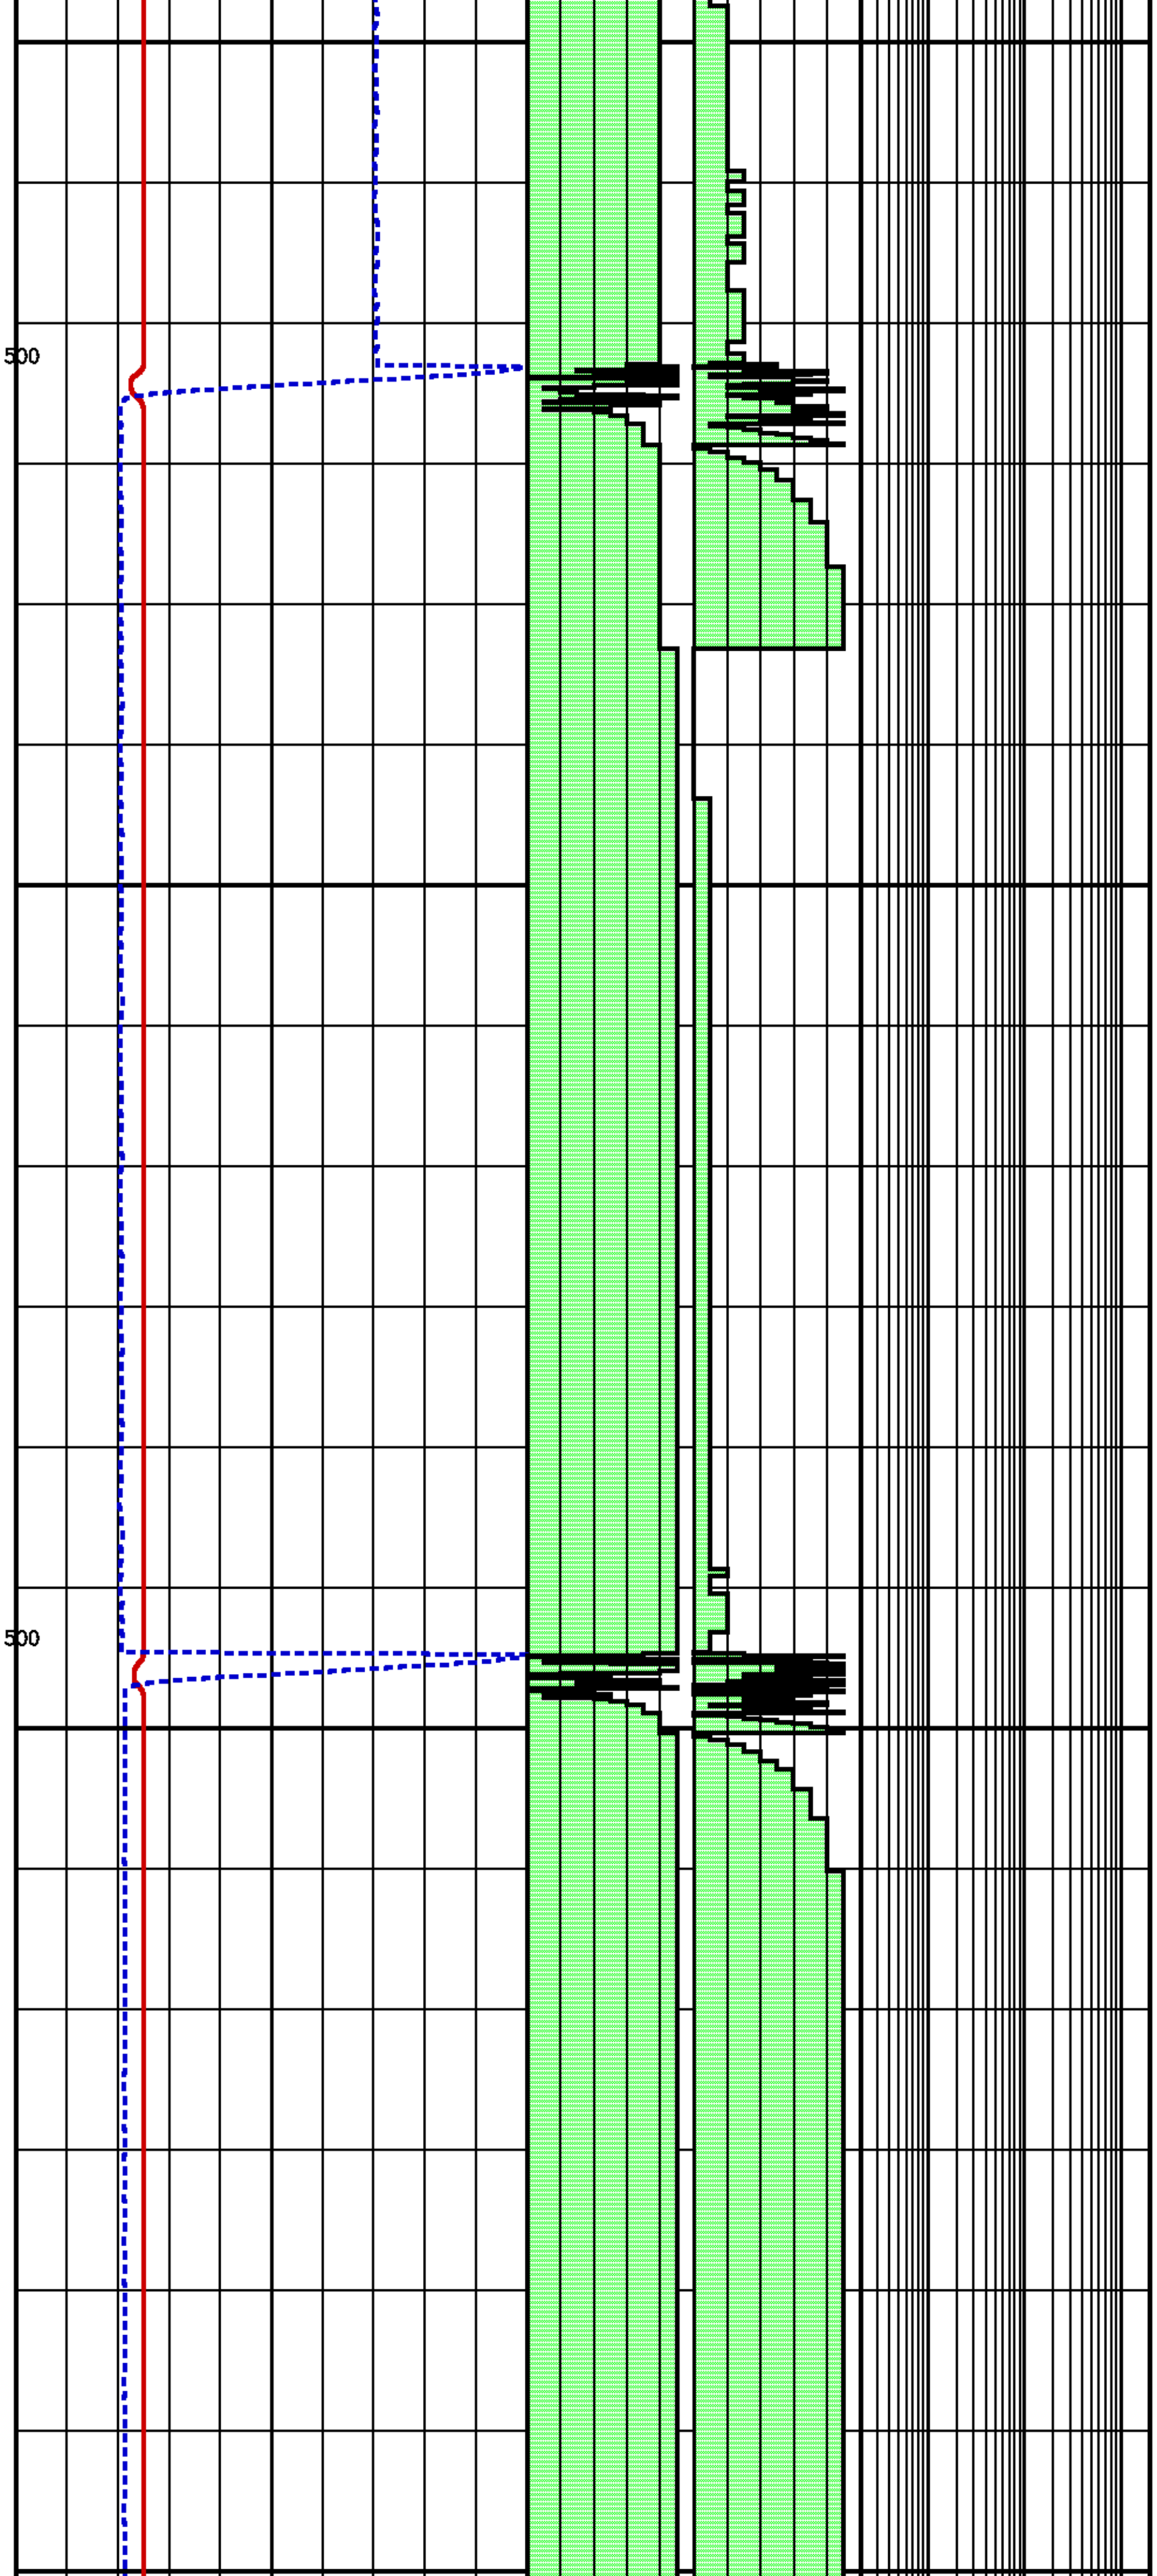

180		3758.3	192.7
		3758.3	192.7
190		3758.3	192.7
		3758.3	192.7
200		3758.3	192.8
	BB[1] DRAWDOWN 15 300 500	3453.8	192.8
210		3758.4	192.8
		3758.8	192.8
220		3759.0	192.8
		3759.0	192.8
230		3759.1	192.8
		3759.1	192.8
240		3759.1	192.8
		3759.1	192.8
250		3759.2	192.8
		3759.2	192.8
260		3759.2	192.8
		3759.2	192.8
270		3759.2	192.8
		3759.2	192.8
280		3759.2	192.8
		3759.2	192.8
290		3759.2	192.8
	BB[1] DRAWDOWN 15 300 500	3735.8	192.8
300		3758.9	192.8
		3759.7	192.8
310		3759.9	192.8
		3759.9	192.9
320		3760.0	192.9
		3760.0	192.9
330		3760.0	192.9
		3760.0	192.9
340		3759.9	192.9
		3759.9	192.9
350		3759.9	192.9
		3759.9	192.9
360		3759.9	192.9

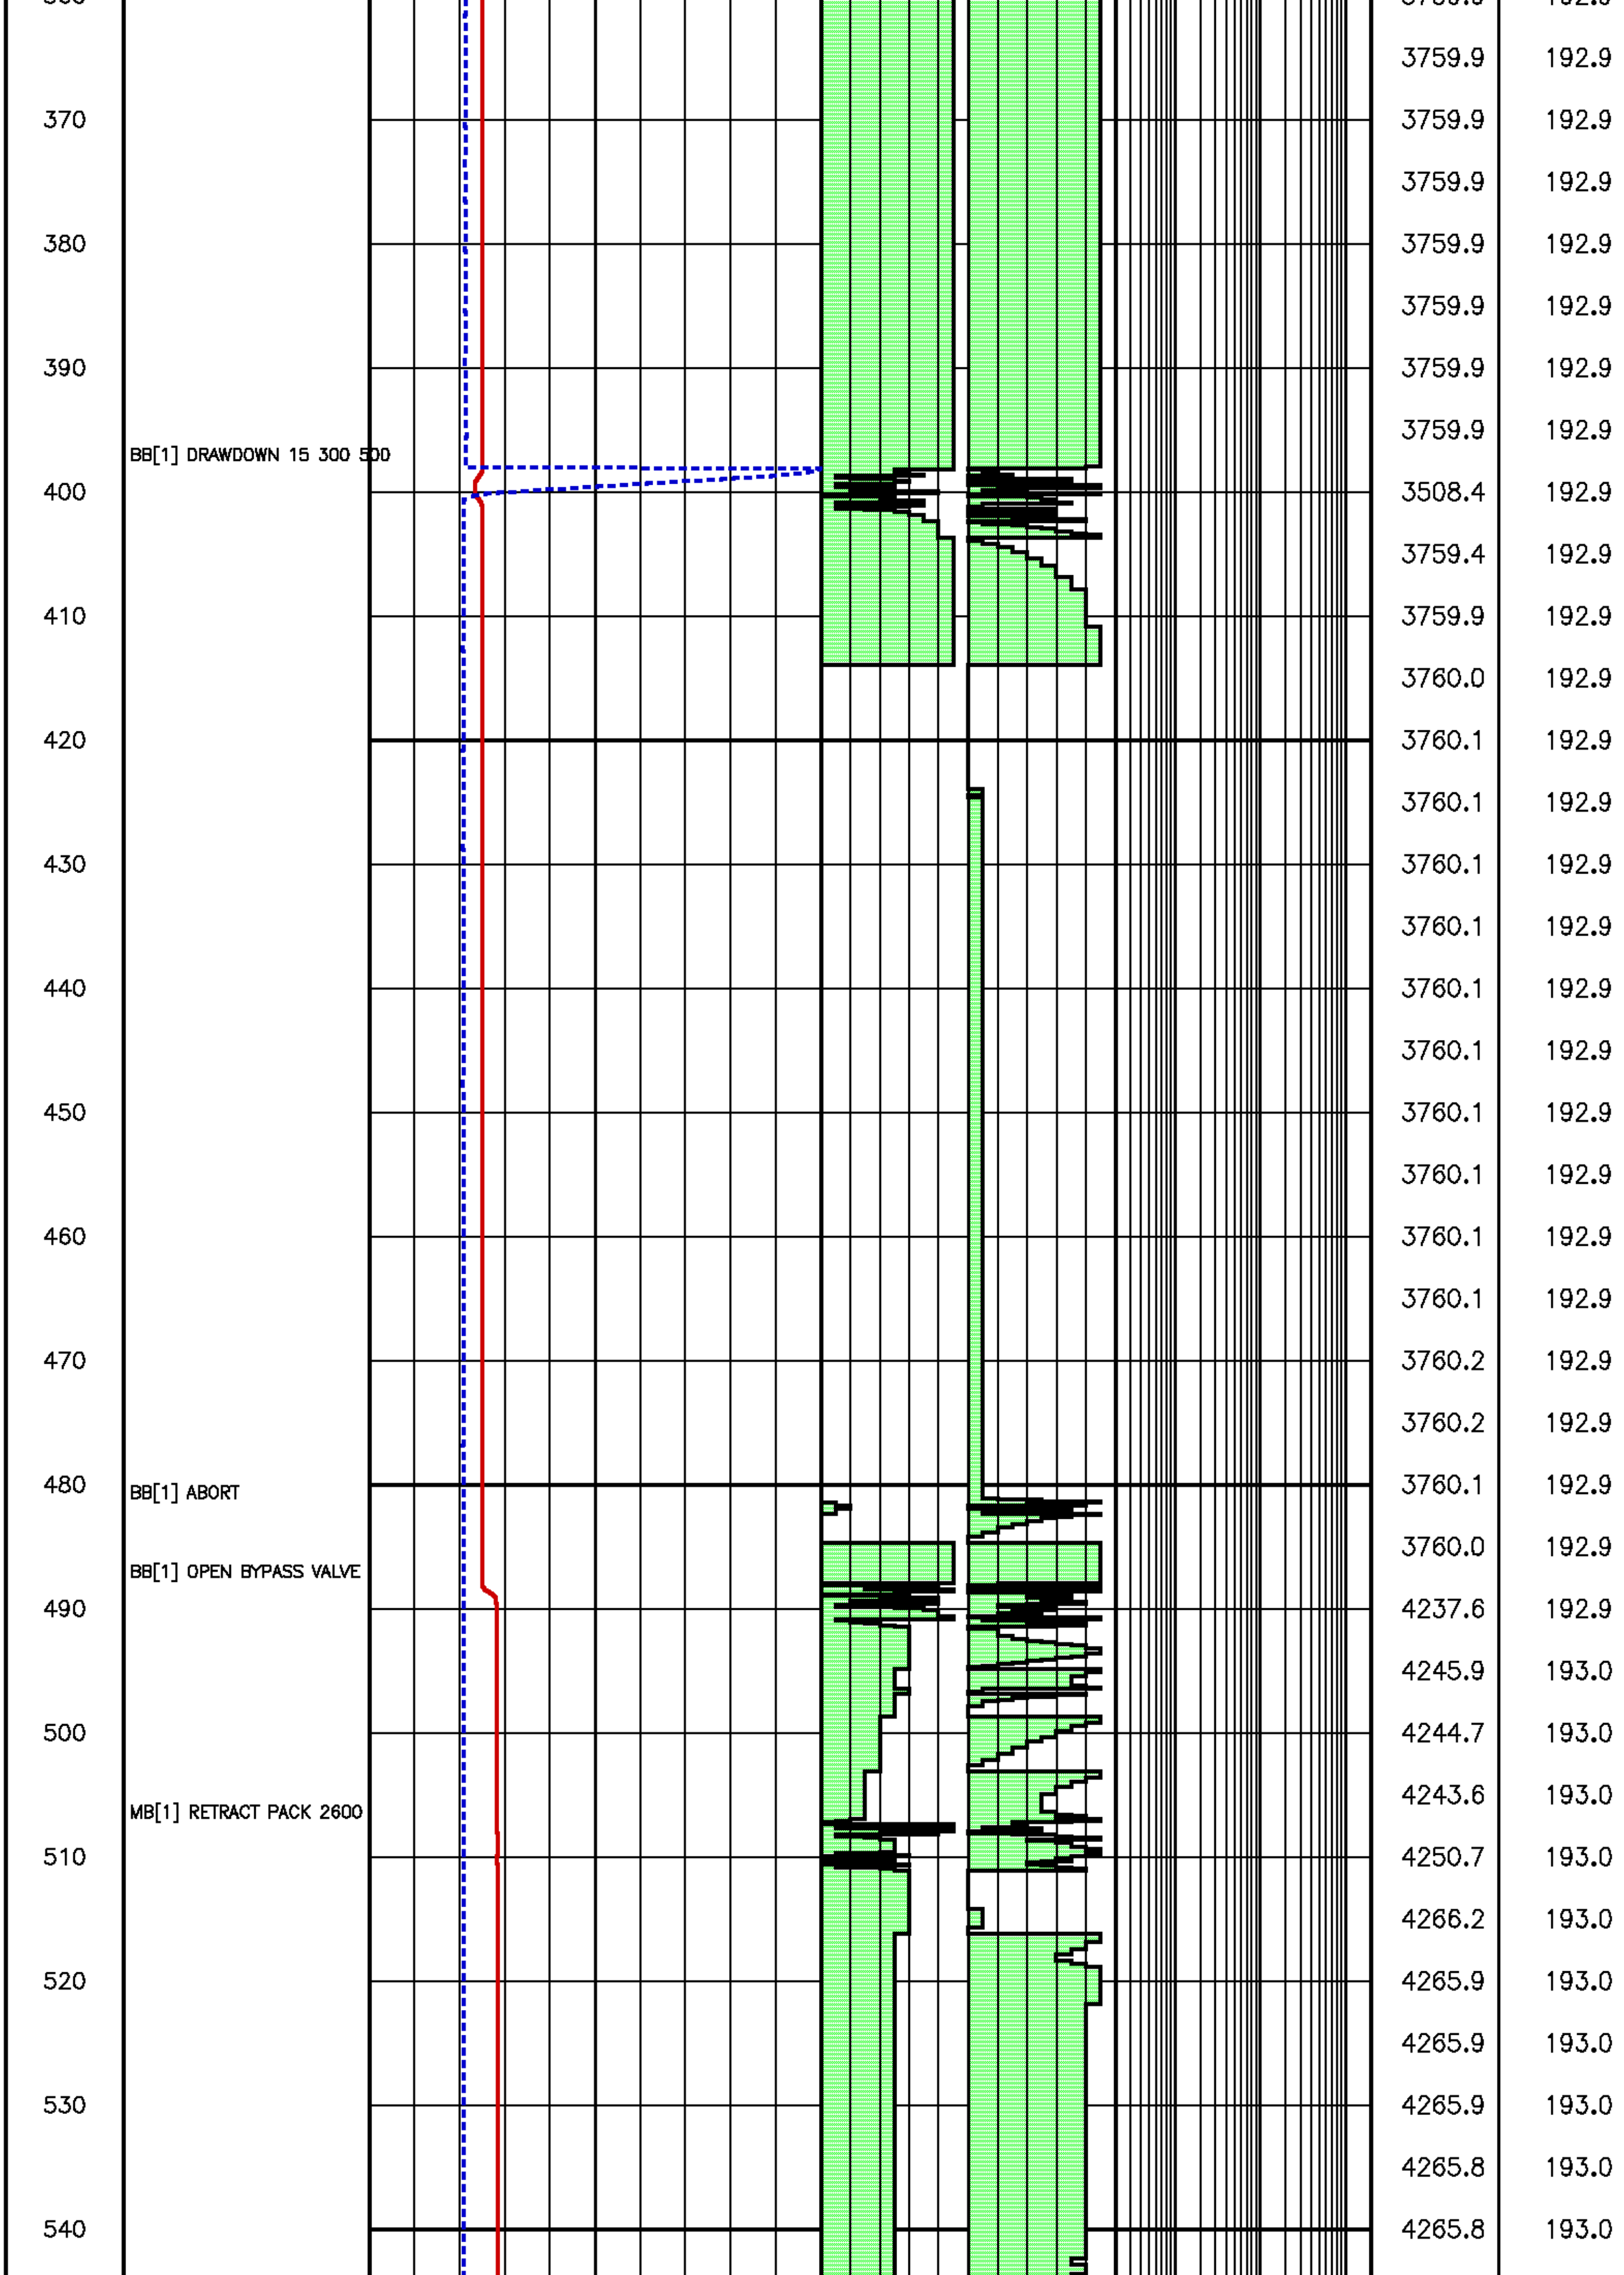

3759.9 192.9
370
3759.9 192.9
3759.9 192.9
380
3759.9 192.9
3759.9 192.9
390
3759.9 192.9
3759.9 192.9
BB[1] DRAWDOWN 15 300 500
400
3508.4 192.9
3759.4 192.9
410
3759.9 192.9
3760.0 192.9
420
3760.1 192.9
3760.1 192.9
430
3760.1 192.9
3760.1 192.9
440
3760.1 192.9
3760.1 192.9
450
3760.1 192.9
3760.1 192.9
460
3760.1 192.9
3760.1 192.9
470
3760.2 192.9
3760.2 192.9
480
BB[1] ABORT
3760.1 192.9
BB[1] OPEN BYPASS VALVE
3760.0 192.9
490
4237.6 192.9
4245.9 193.0
500
4244.7 193.0
MB[1] RETRACT PACK 2600
4243.6 193.0
510
4250.7 193.0
4266.2 193.0
520
4265.9 193.0
4265.9 193.0
530
4265.9 193.0
4265.8 193.0
540
4265.8 193.0

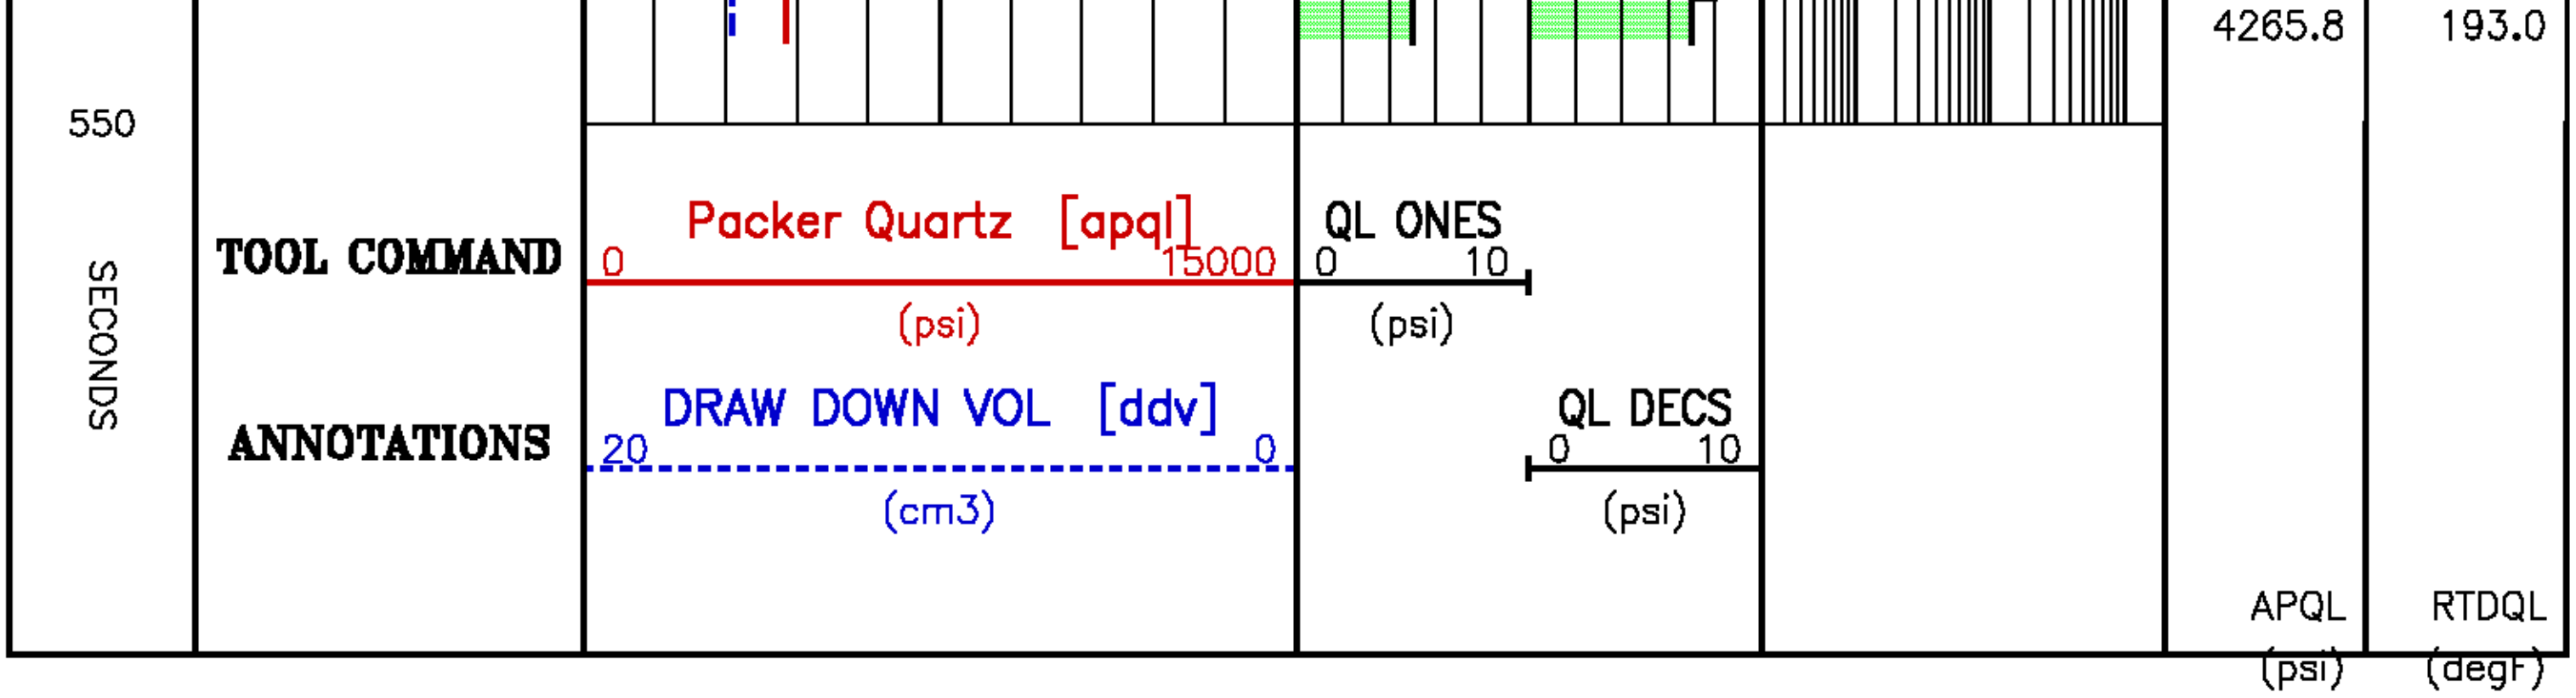

Pressure Tests – Level 12 Tool Instance 1
MD 2420.1 m TVD 2420.1 m

PRESSURE HISTORY

Depth MD 2420.1 m TVD 2420.1 m

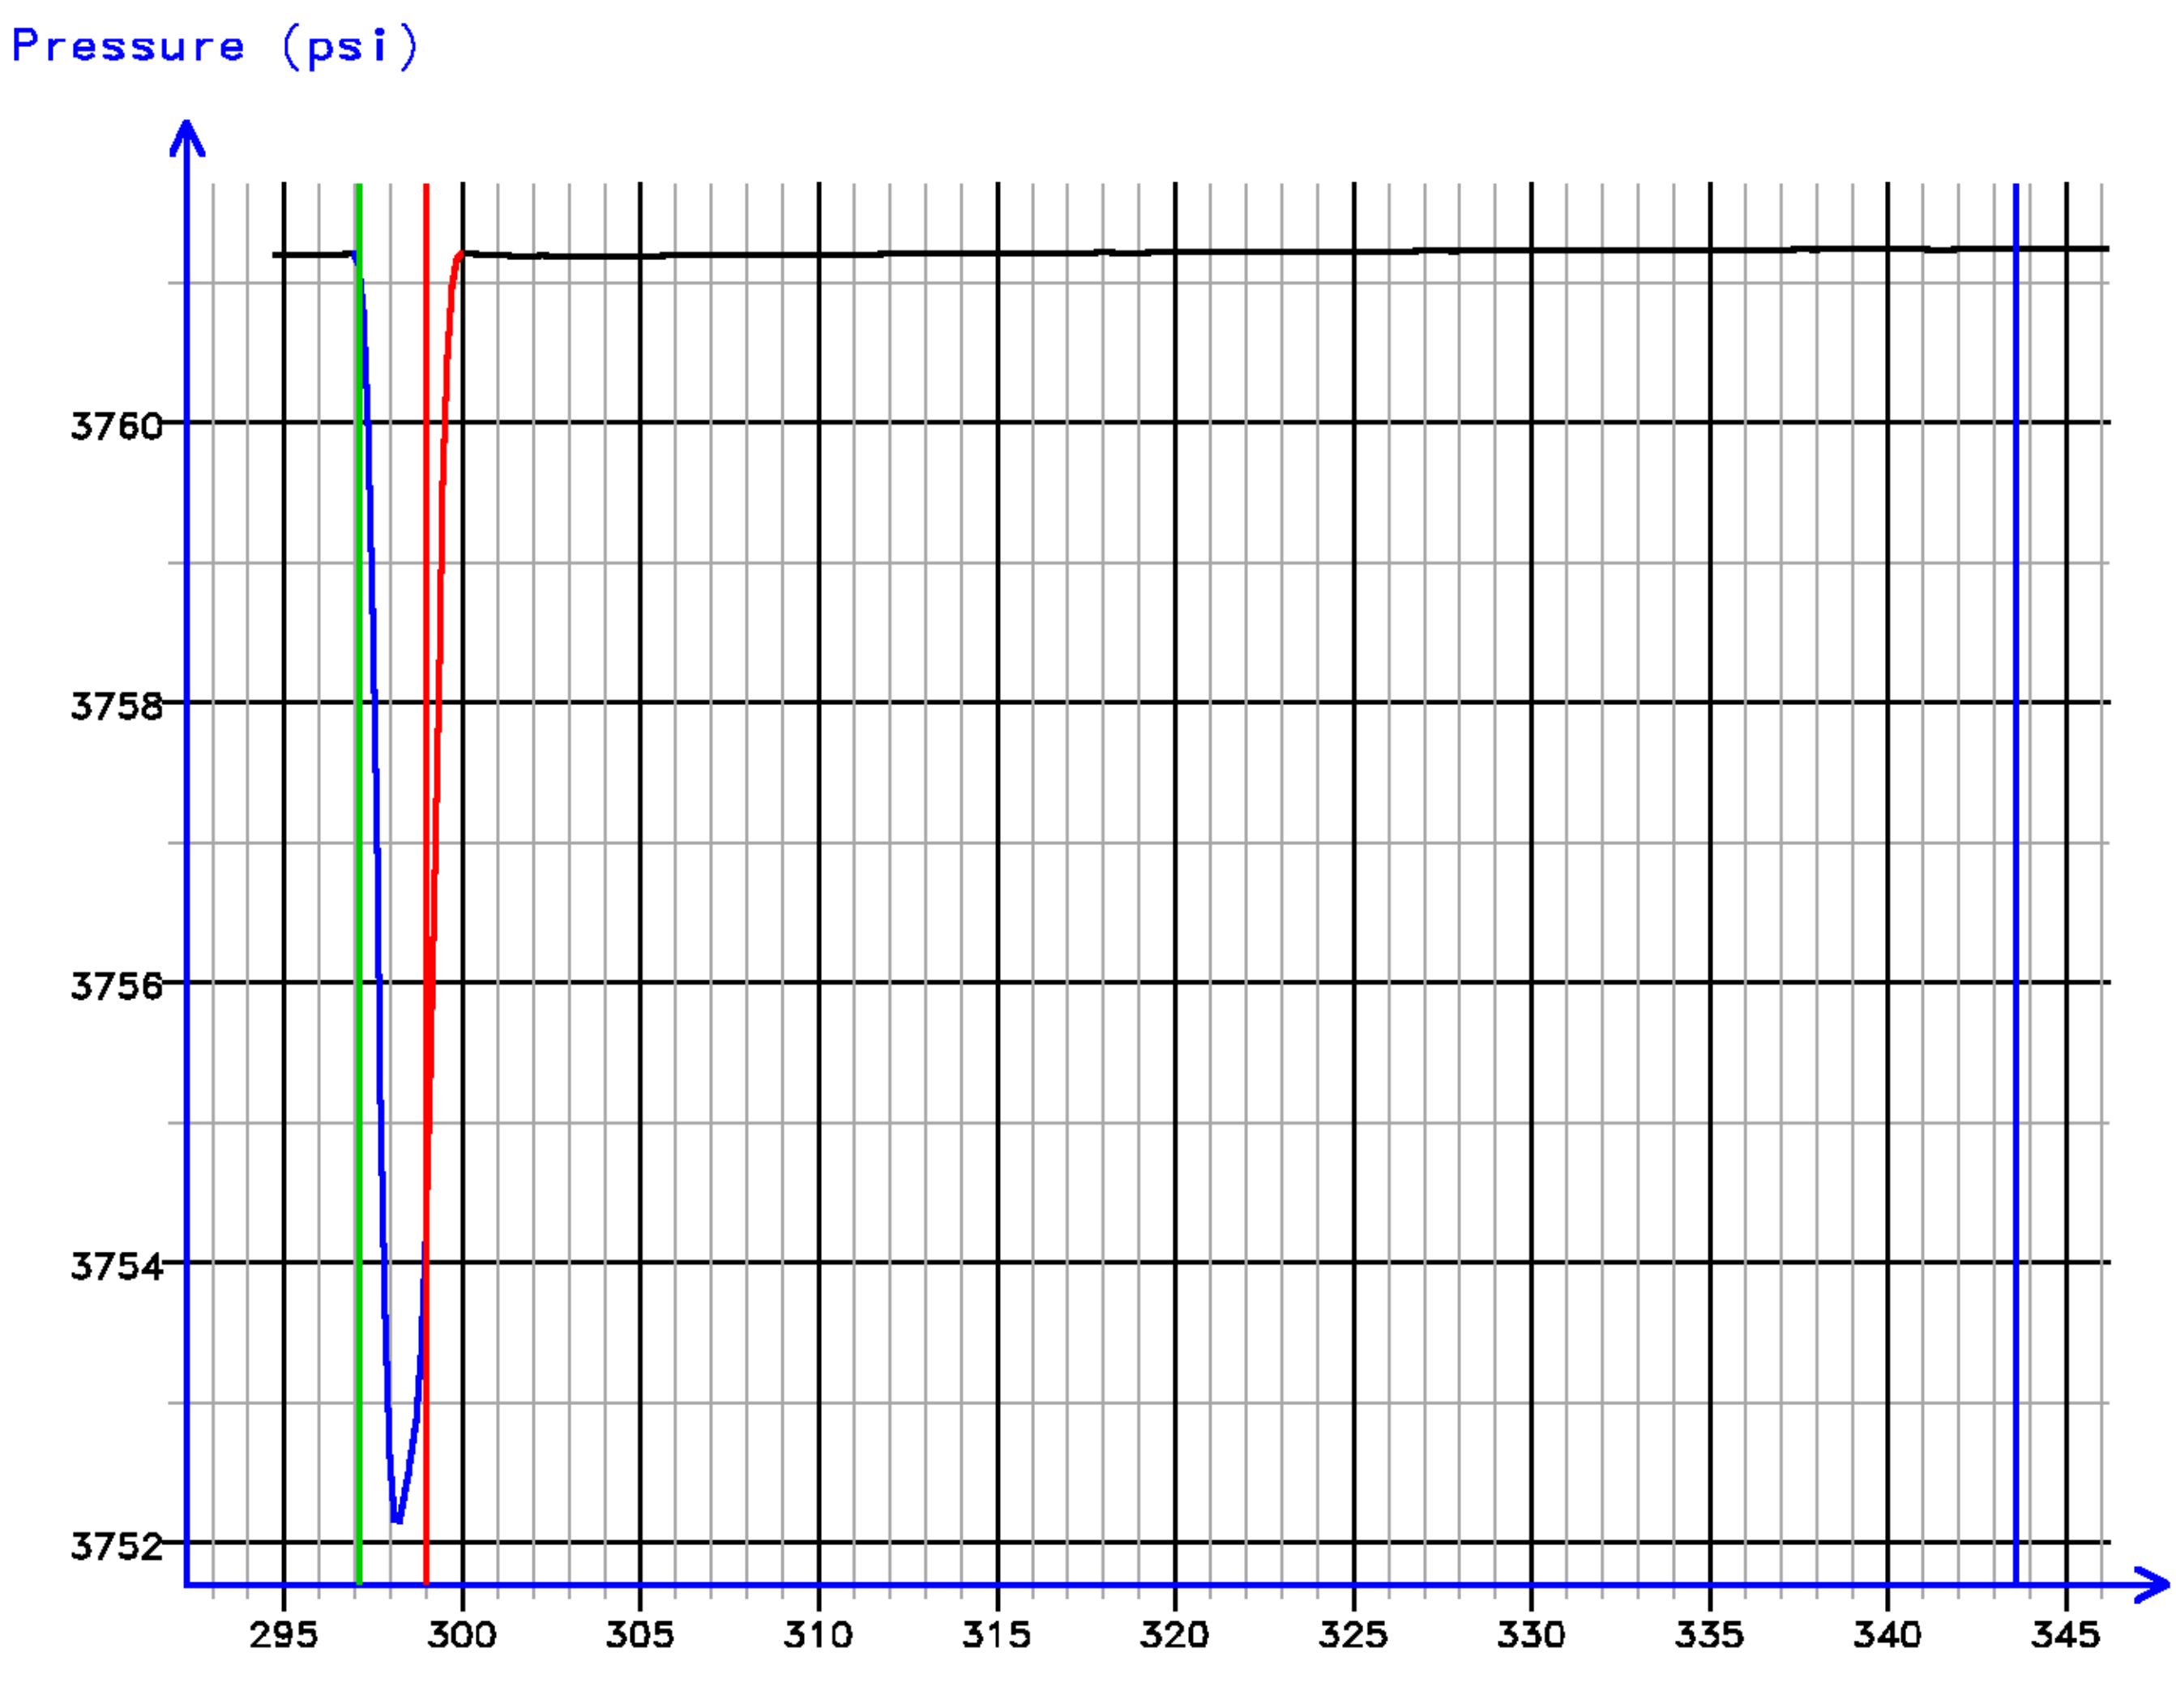

Time (s)

[012.104]

FLOW RATE ANALYSIS

Depth MD 2420.1 m TVD 2420.1 m

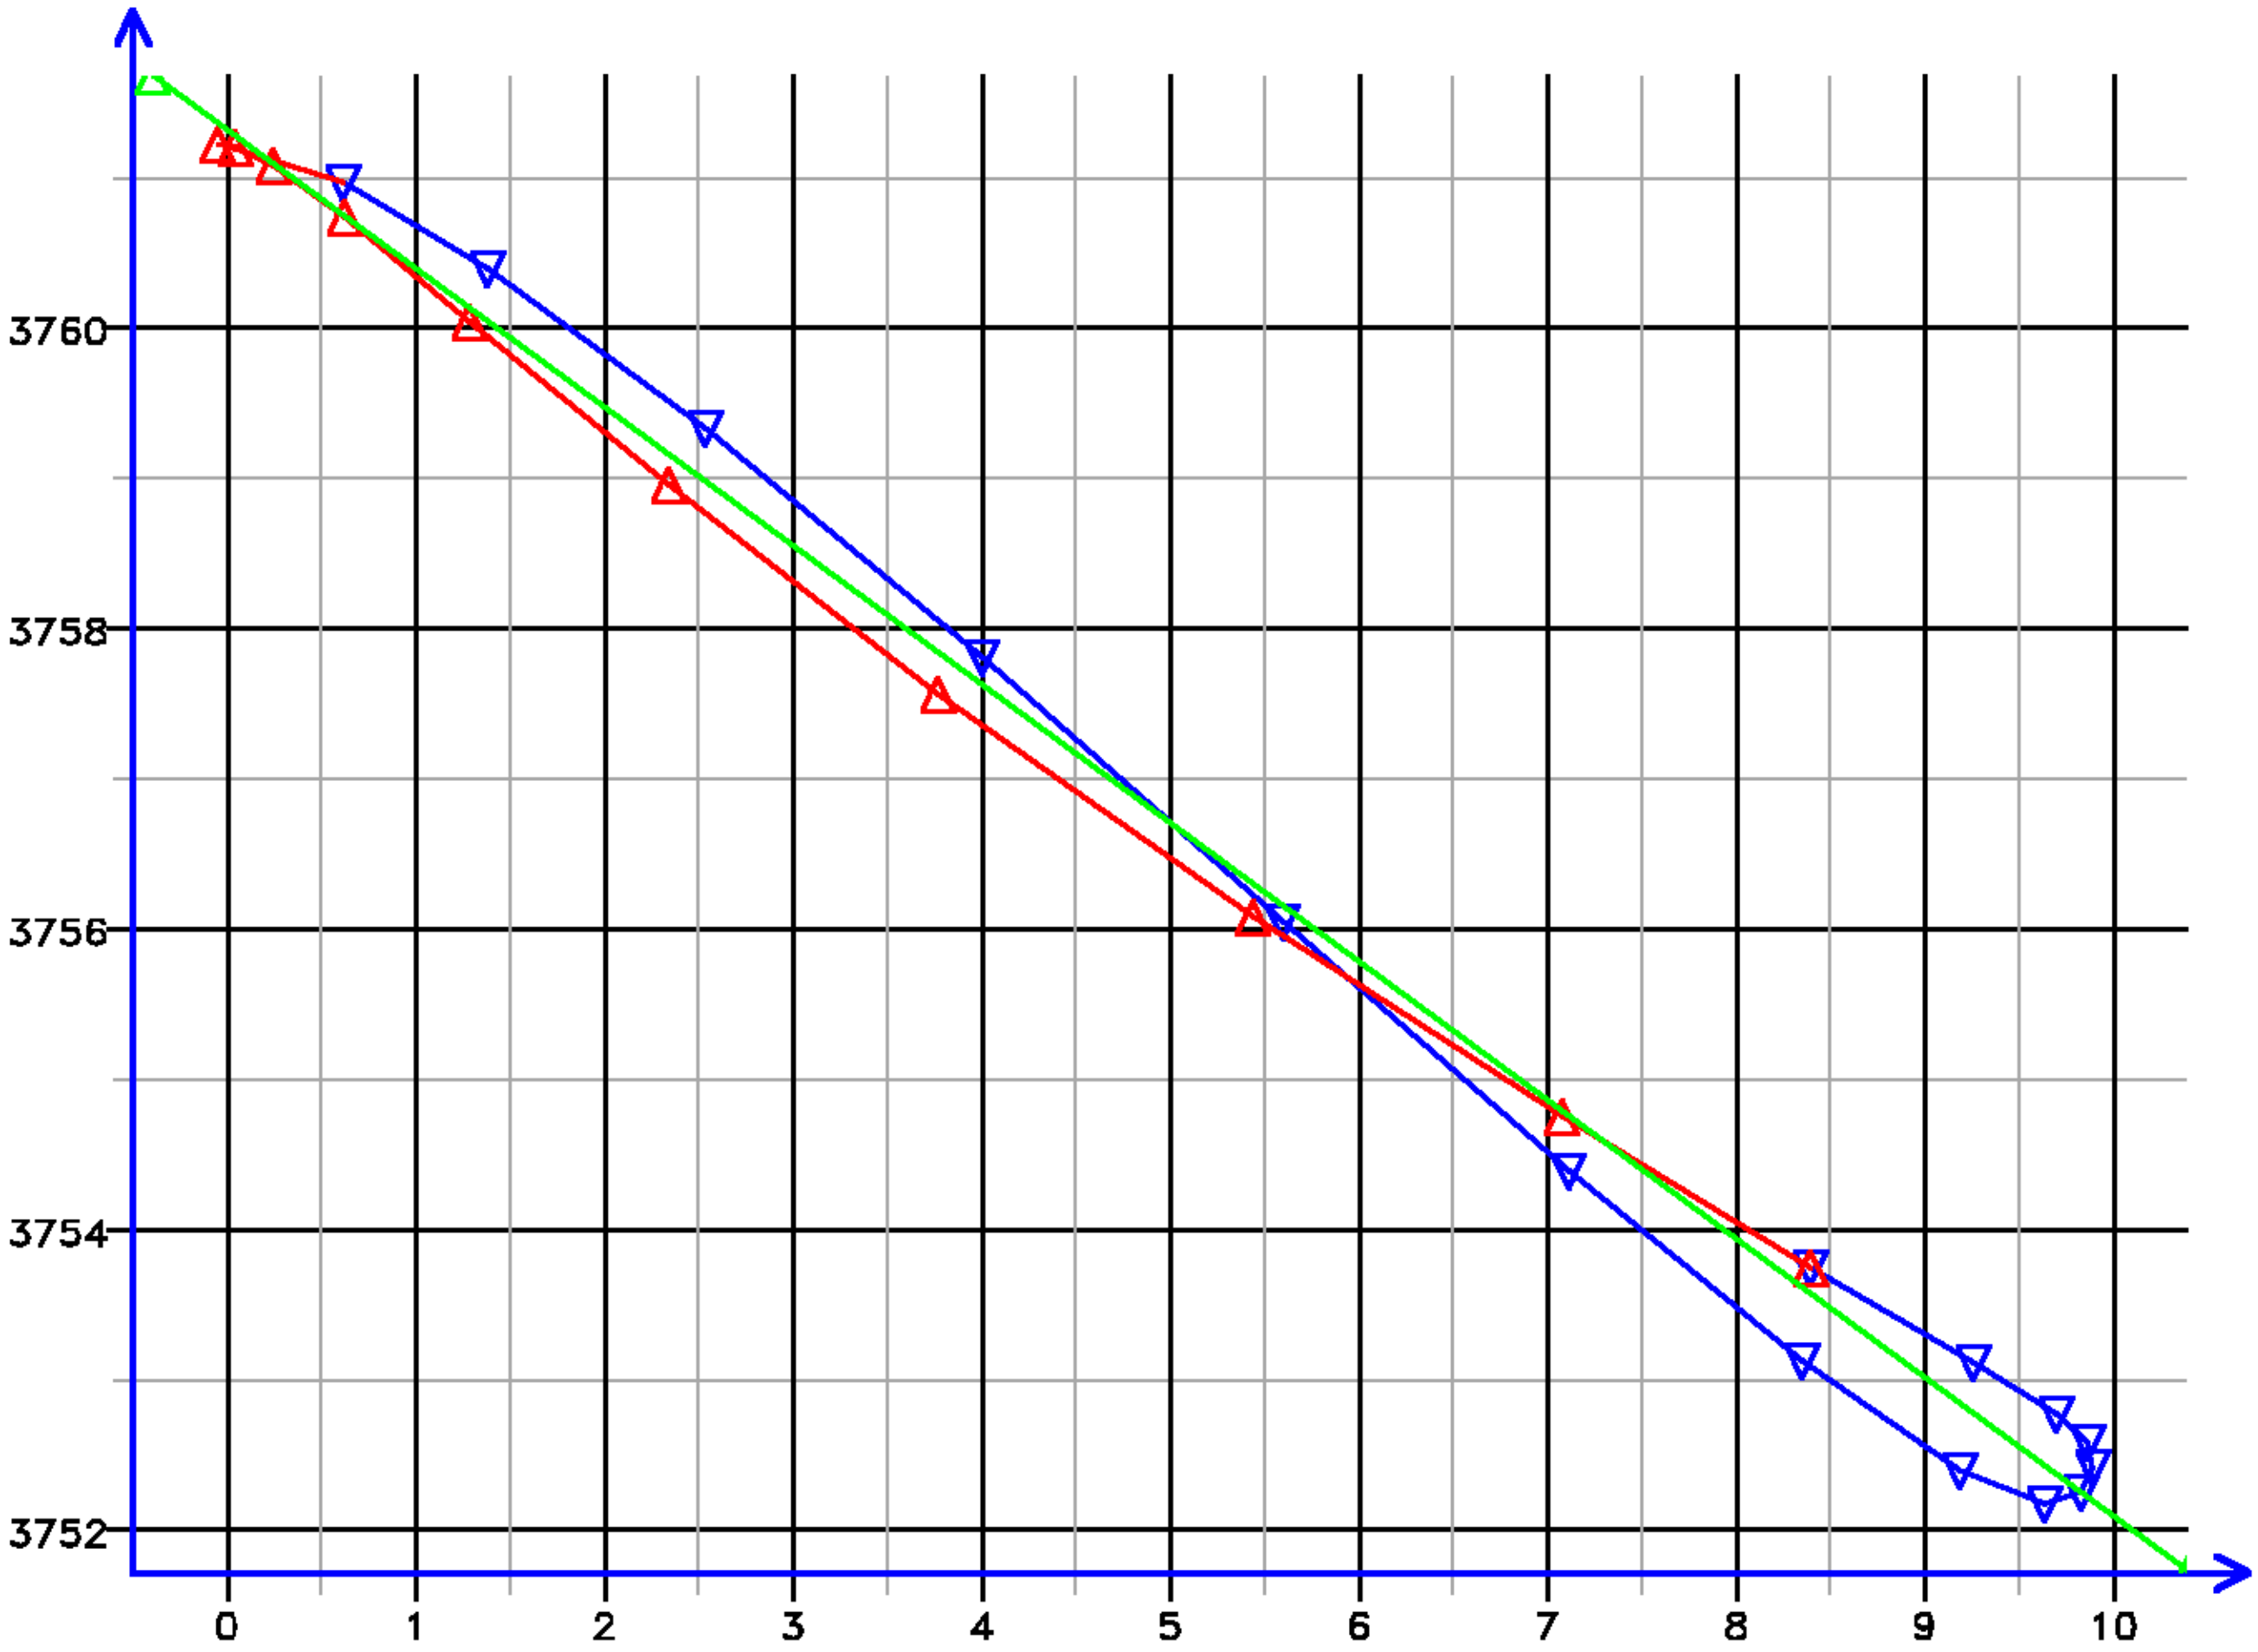

Flow Rate (cm3/s)

Kfra 3732.175 (mD/cP), Kddu 3690.293 (mD/cP) Confidence 99.41% [012.104]

PRESSURE HISTORY

Depth MD 2420.1 m TVD 2420.1 m

Pressure (psi)

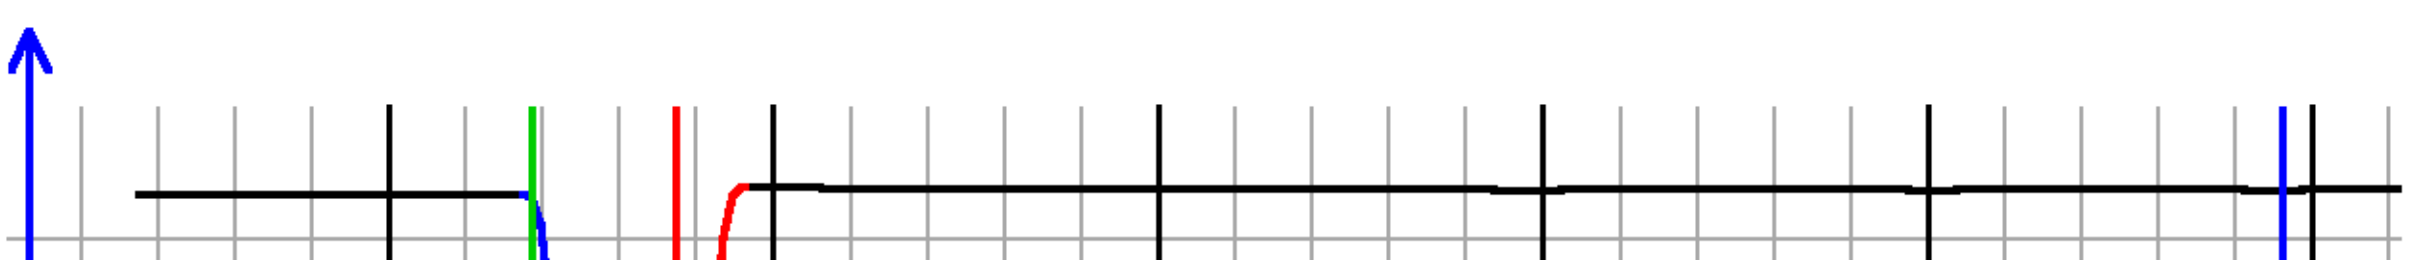

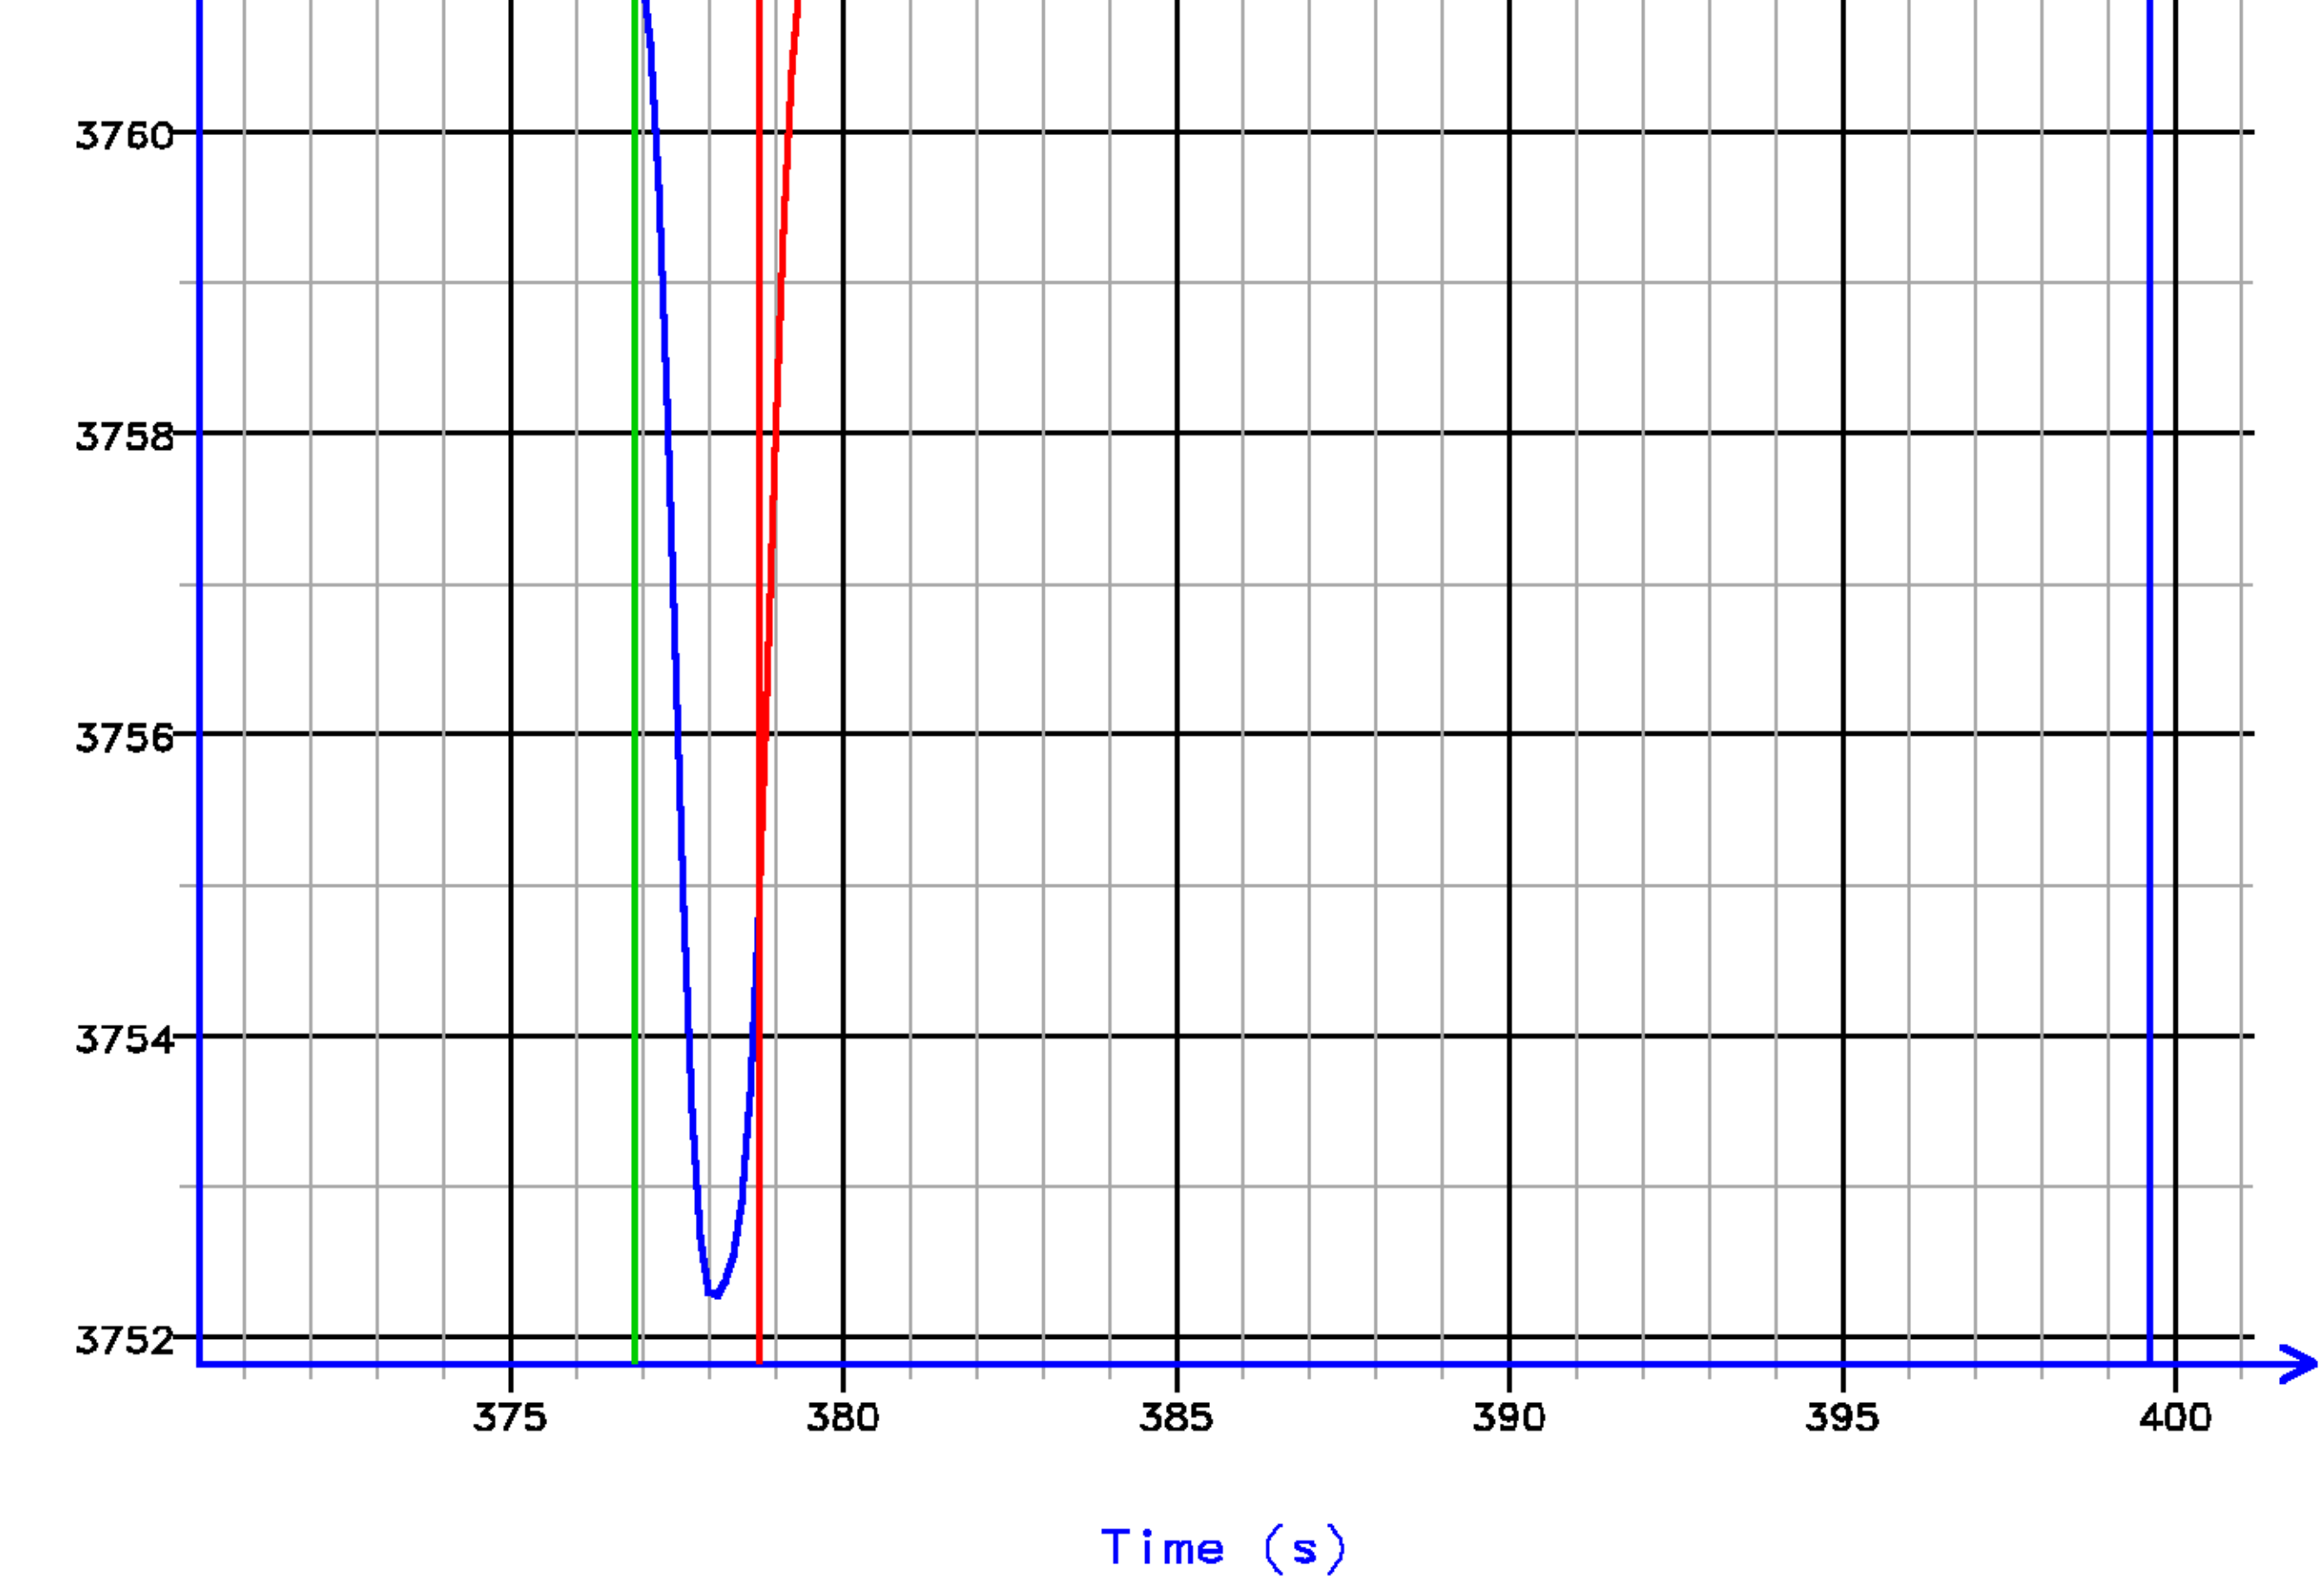

[012.107]

FLOW RATE ANALYSIS

Depth MD 2420.1 m TVD 2420.1 m

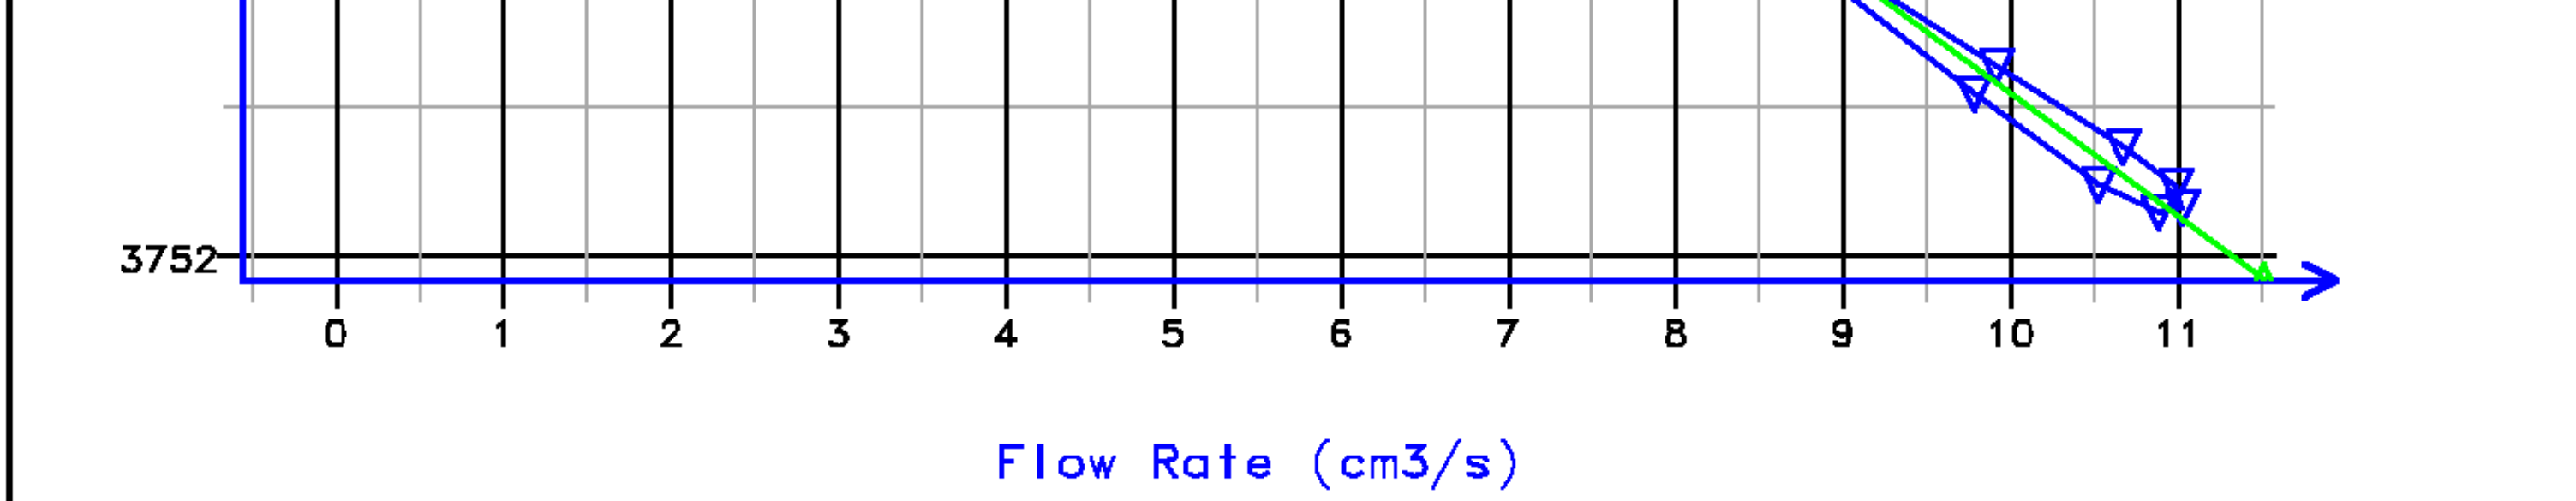

Kfra 4177.316 (mD/cP), Kddu 4171.930 (mD/cP) Confidence 99.91% [012.107]

Data File : j800g15.aff
Presentation: gpi_rci-b3xx.log

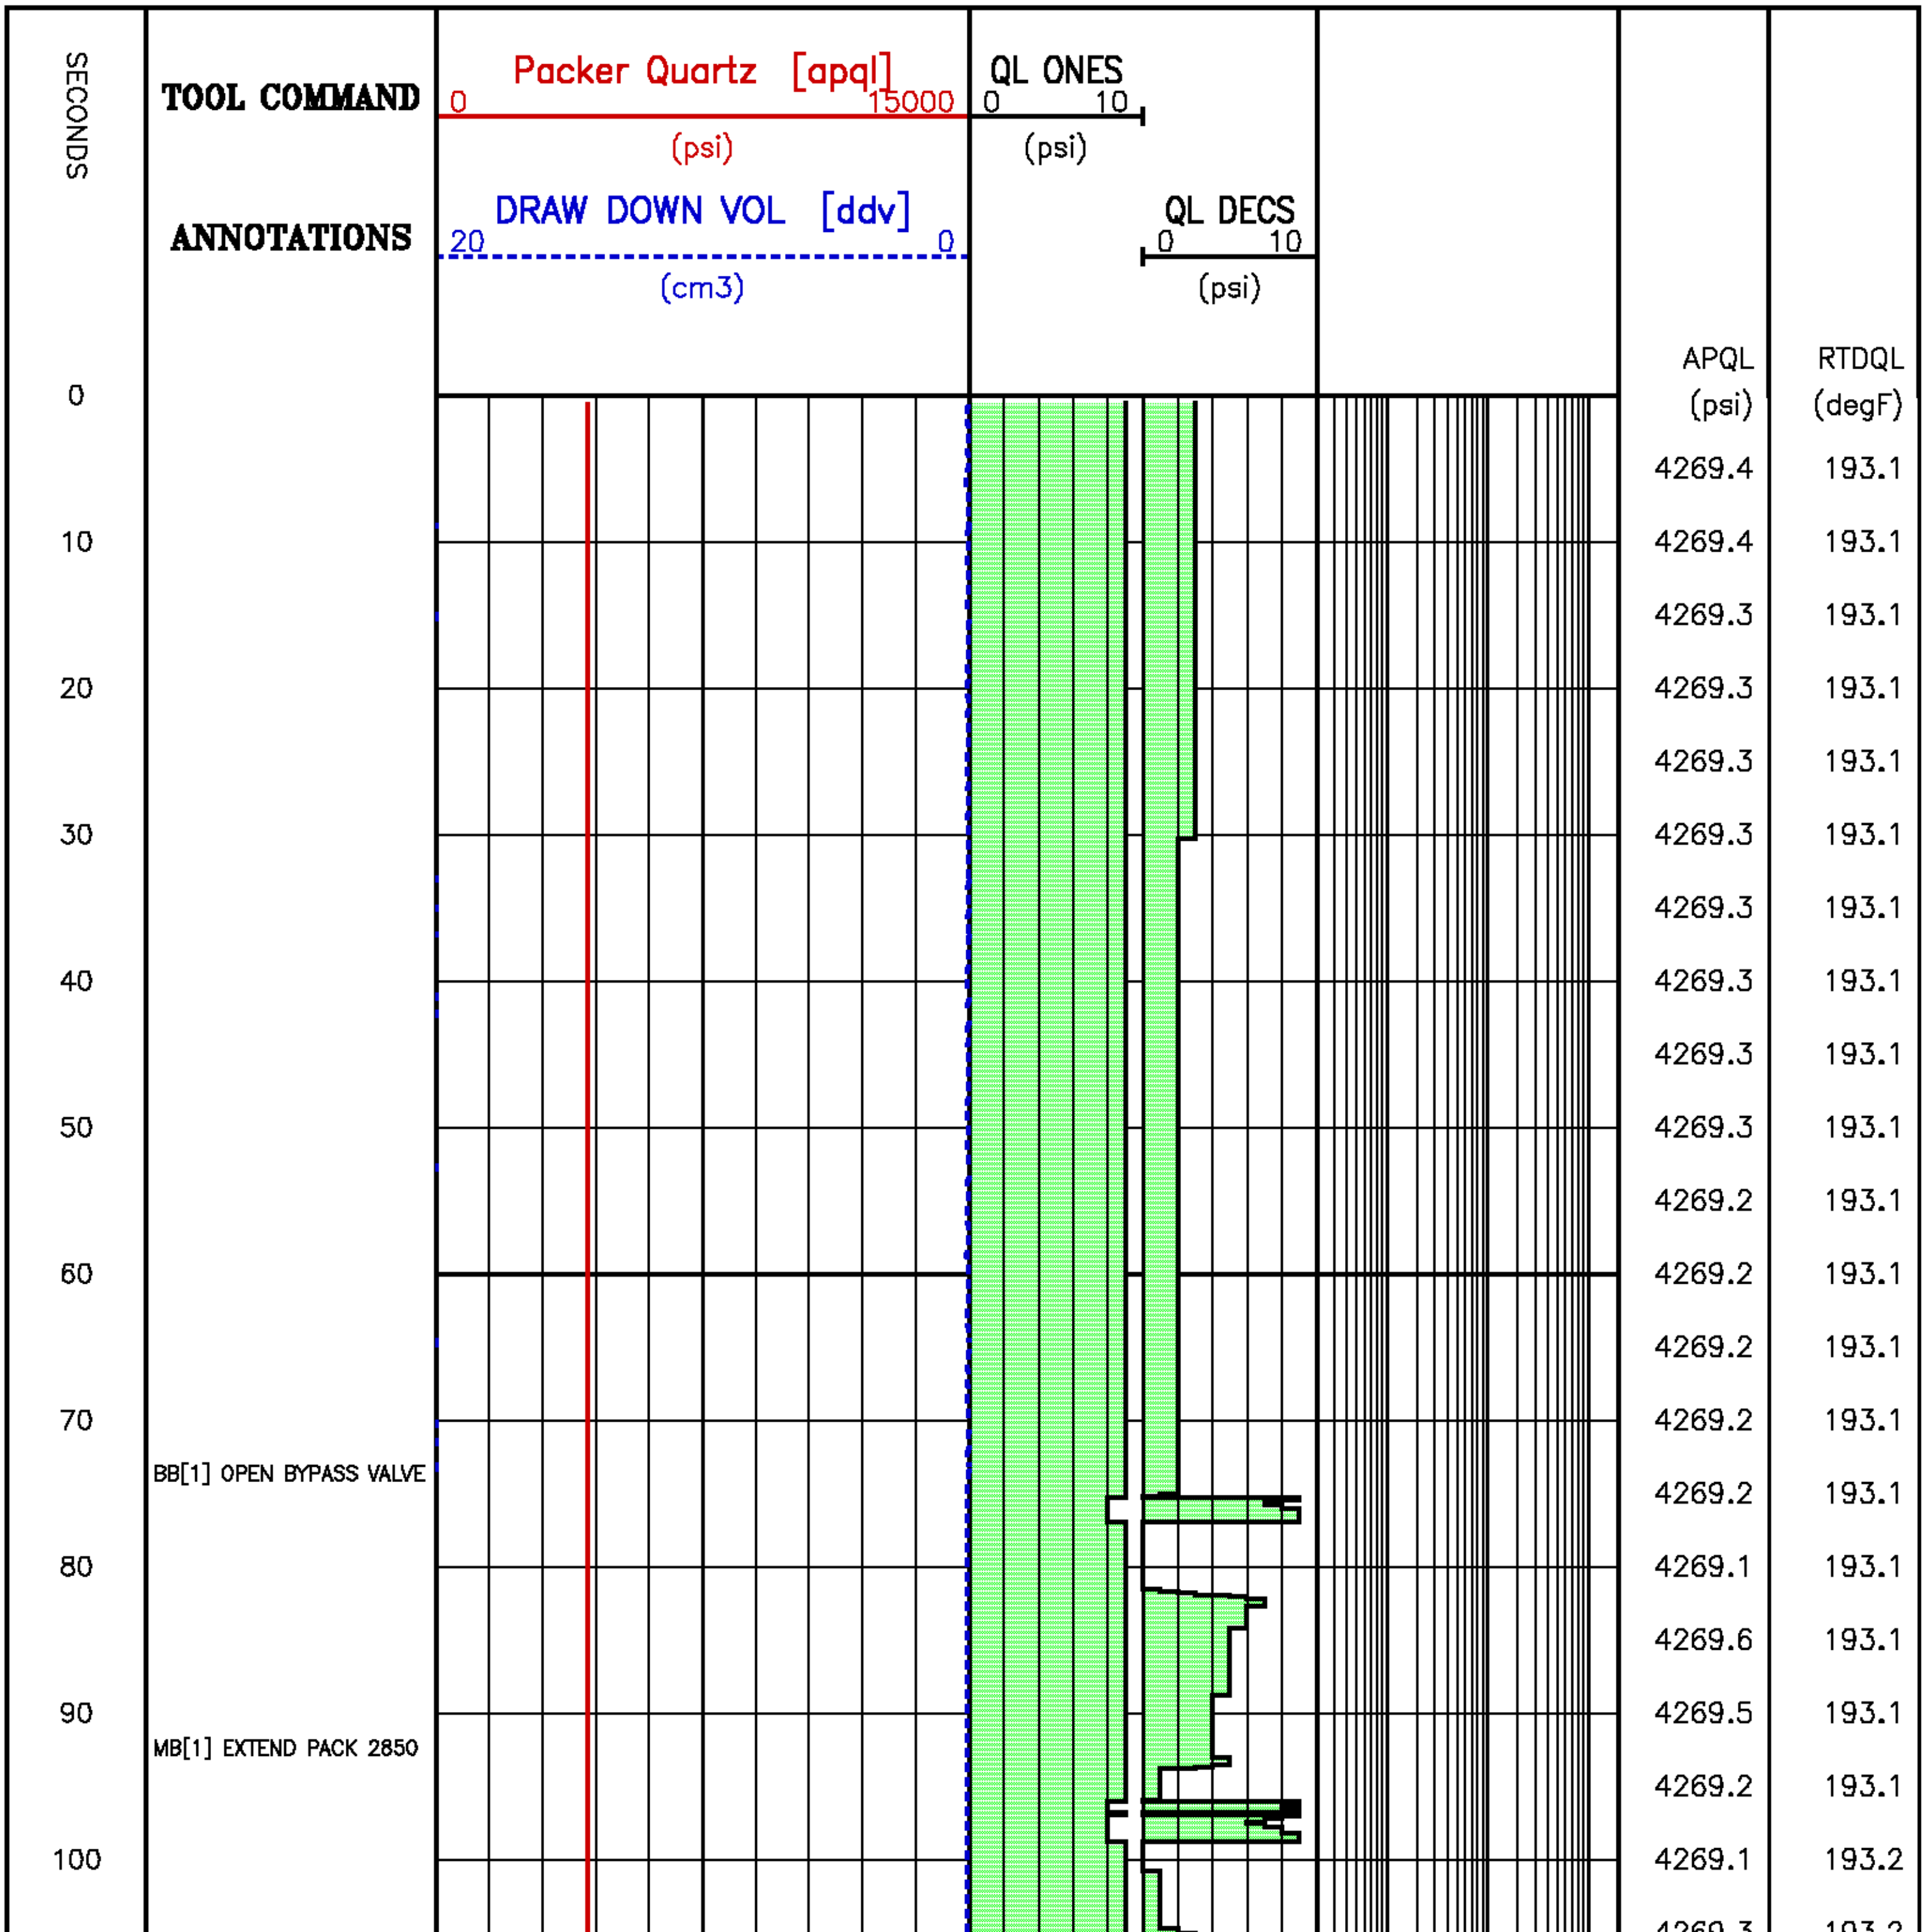

Seconds	APQL (psi)	RTDQL (degF)
	4269.4	193.1
10	4269.4	193.1
	4269.3	193.1
20	4269.3	193.1
	4269.3	193.1
30	4269.3	193.1
	4269.3	193.1
40	4269.3	193.1
	4269.3	193.1
50	4269.3	193.1
	4269.2	193.1
60	4269.2	193.1
	4269.2	193.1
70	4269.2	193.1
	4269.2	193.1
80	4269.1	193.1
	4269.6	193.1
90	4269.5	193.1
	4269.2	193.1
100	4269.1	193.2
	4269.3	193.2

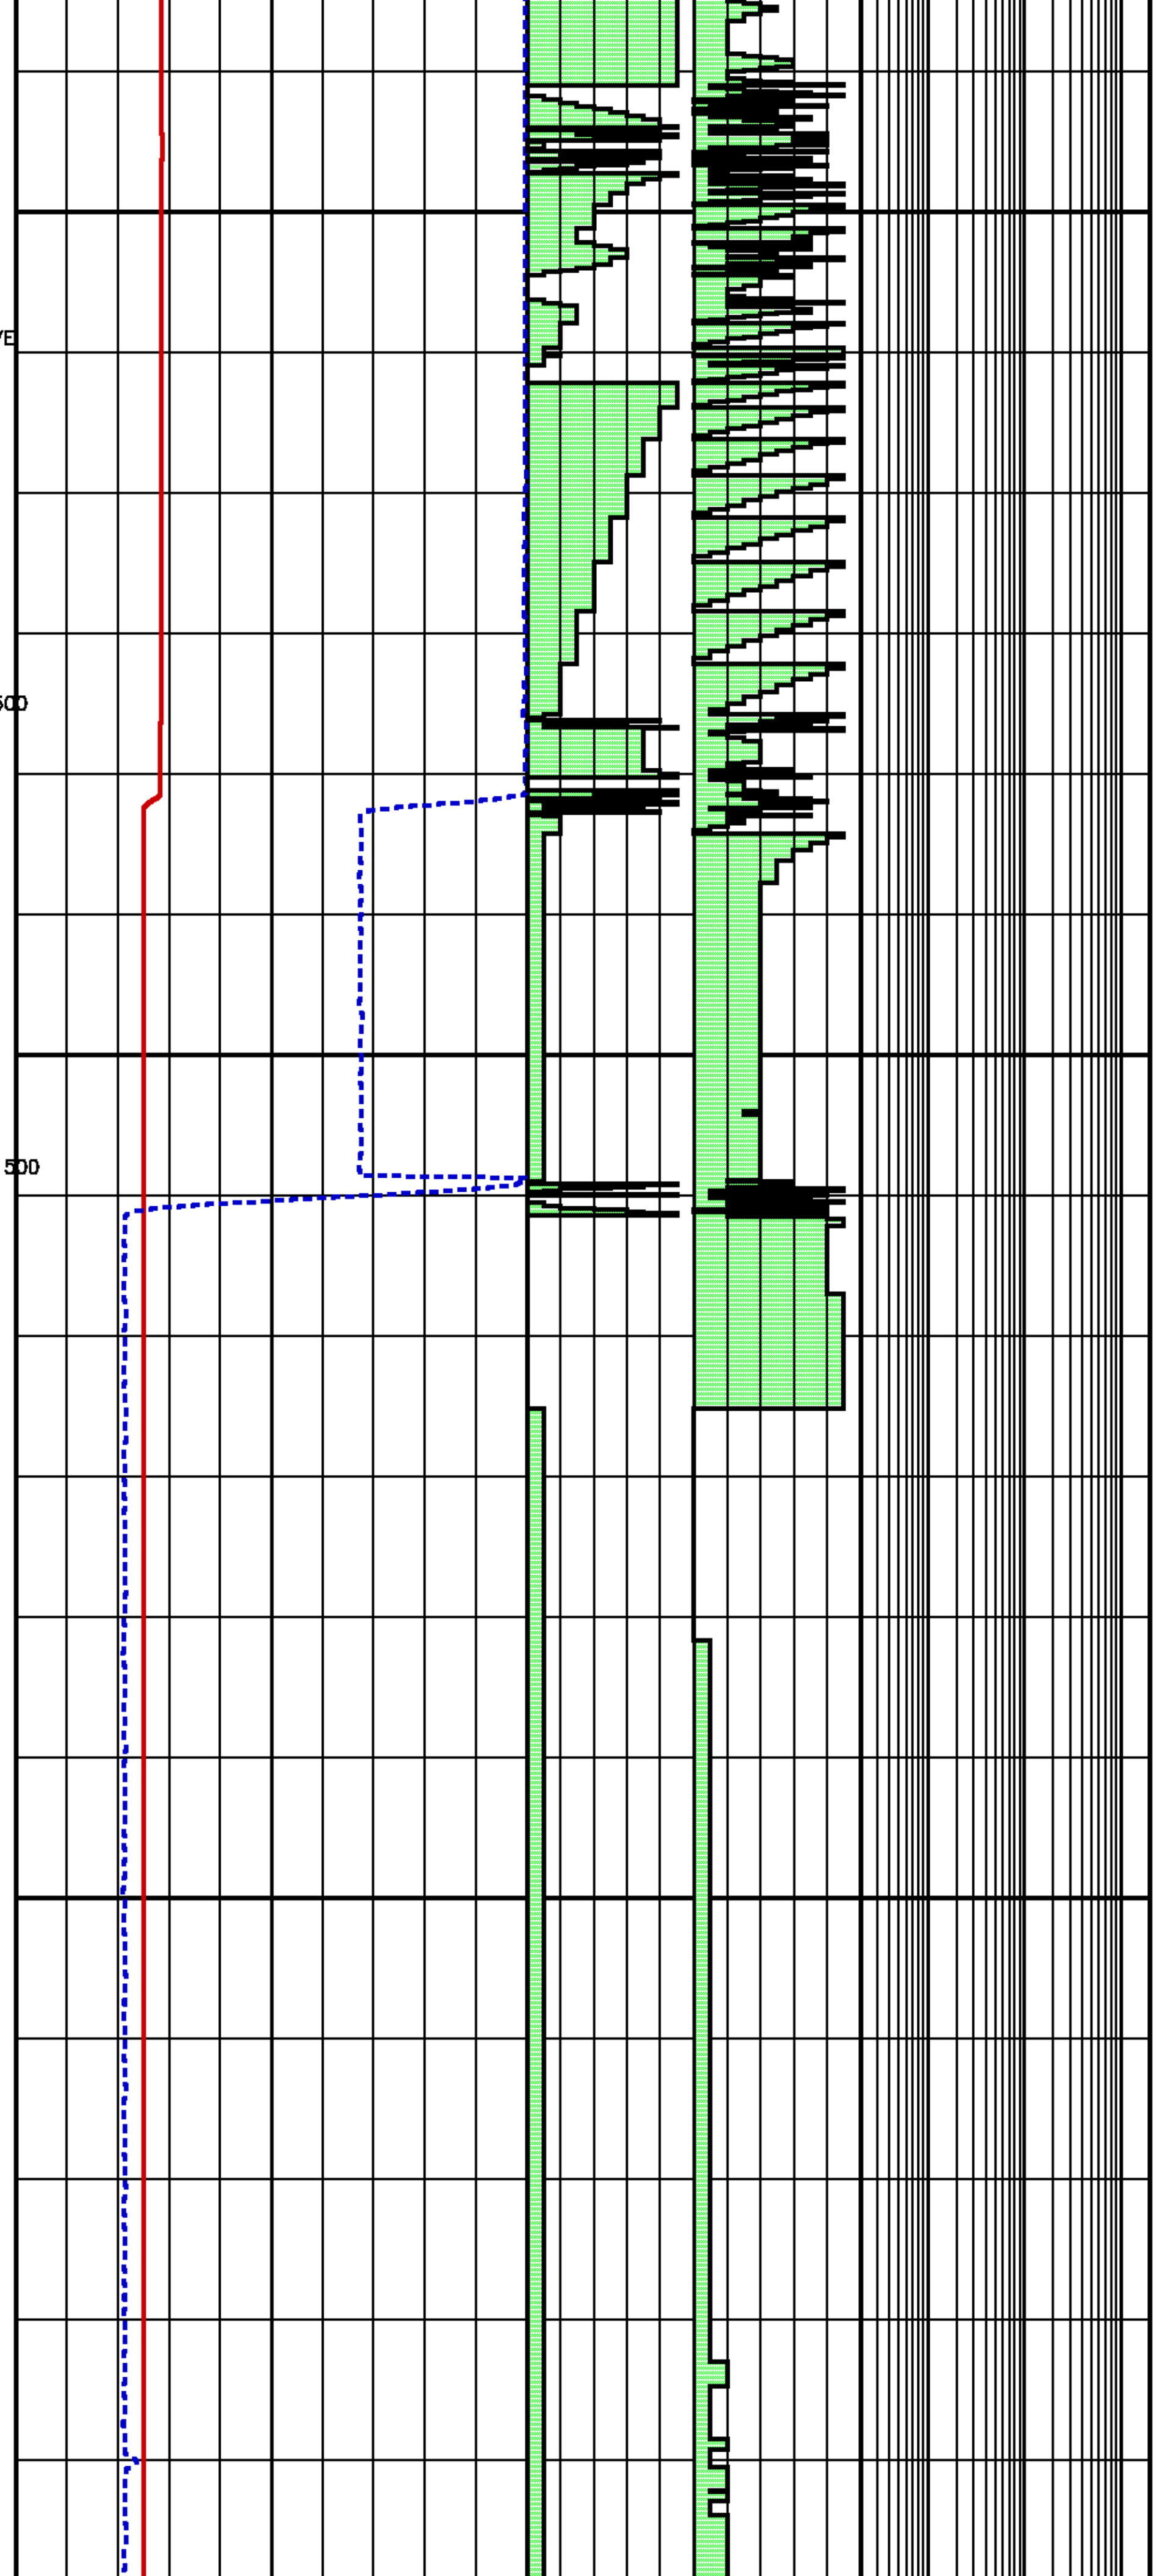

		4269.5	193.2
110		4269.3	193.2
		4310.8	193.2
120		4274.7	193.2
	MB[1] RECHARGE 2850	4270.4	193.2
130	BB[1] CLOSE BYPASS VALVE	4272.0	193.2
		4268.5	193.2
140		4266.6	193.2
		4265.0	193.2
150		4263.6	193.2
	BB[1] DRAWDOWN 5 300 500	4262.3	193.2
160		4248.7	193.2
		3761.8	193.2
170		3761.4	193.1
		3761.4	193.1
180		3761.4	193.1
		3761.4	193.2
190	BB[1] DRAWDOWN 15 300 500	3749.9	193.2
		3760.9	193.2
200		3760.9	193.2
		3761.0	193.2
210		3761.0	193.2
		3761.1	193.2
220		3761.1	193.2
		3761.1	193.2
230		3761.1	193.2
		3761.1	193.2
240		3761.2	193.2
		3761.2	193.2
250		3761.2	193.2
		3761.2	193.2
260		3761.2	193.2
		3761.2	193.2
270		3761.2	193.2
		3761.2	193.2
280		3761.2	193.2
		3761.2	193.2

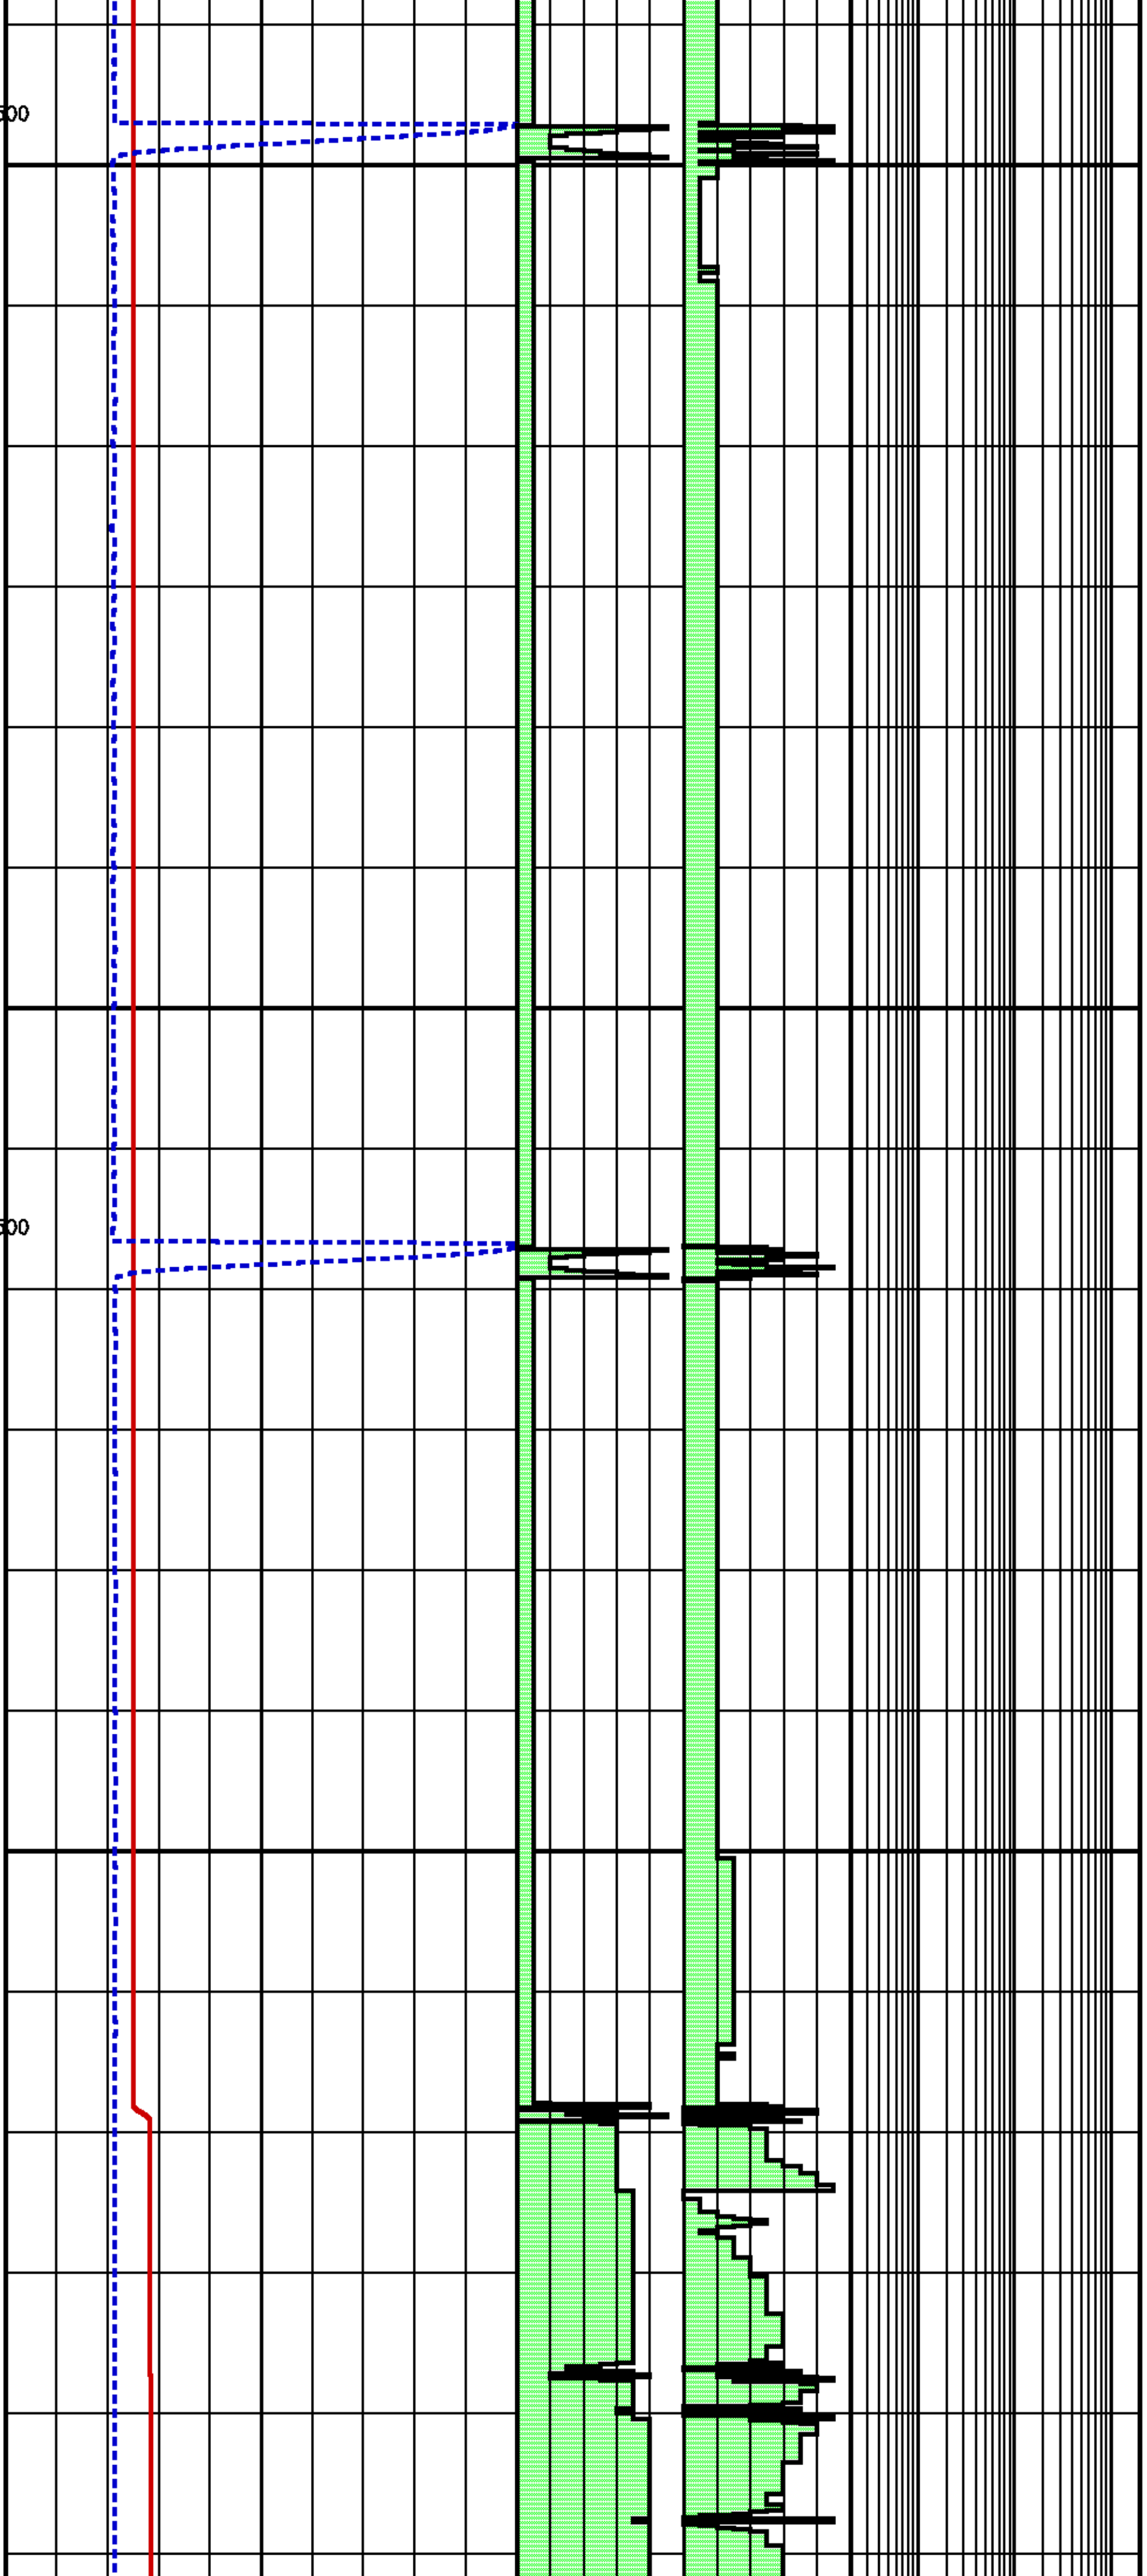

290		3761.2	193.2
	BB[1] DRAWDOWN 15 300 500	3761.2	193.2
300		3761.2	193.2
		3761.2	193.2
310		3761.2	193.2
		3761.2	193.2
320		3761.2	193.2
		3761.2	193.2
330		3761.2	193.2
		3761.2	193.2
340		3761.2	193.2
		3761.2	193.2
350		3761.3	193.2
		3761.2	193.2
360		3761.3	193.2
		3761.3	193.2
370		3761.3	193.2
	BB[1] DRAWDOWN 15 300 500	3761.3	193.2
380		3761.3	193.2
		3761.3	193.2
390		3761.3	193.2
		3761.3	193.2
400		3761.3	193.2
		3761.3	193.2
410		3761.3	193.2
		3761.3	193.2
420	BB[1] ABORT	3761.3	193.2
		3761.3	193.2
430		3761.3	193.2
		3761.3	193.2
	BB[1] OPEN BYPASS VALVE		
440		4246.5	193.2
		4247.1	193.2
450		4247.5	193.3
	MB[1] RETRACT PACK 2600	4247.7	193.3
460		4266.7	193.3
		4268.6	193.3
470		4268.6	193.3

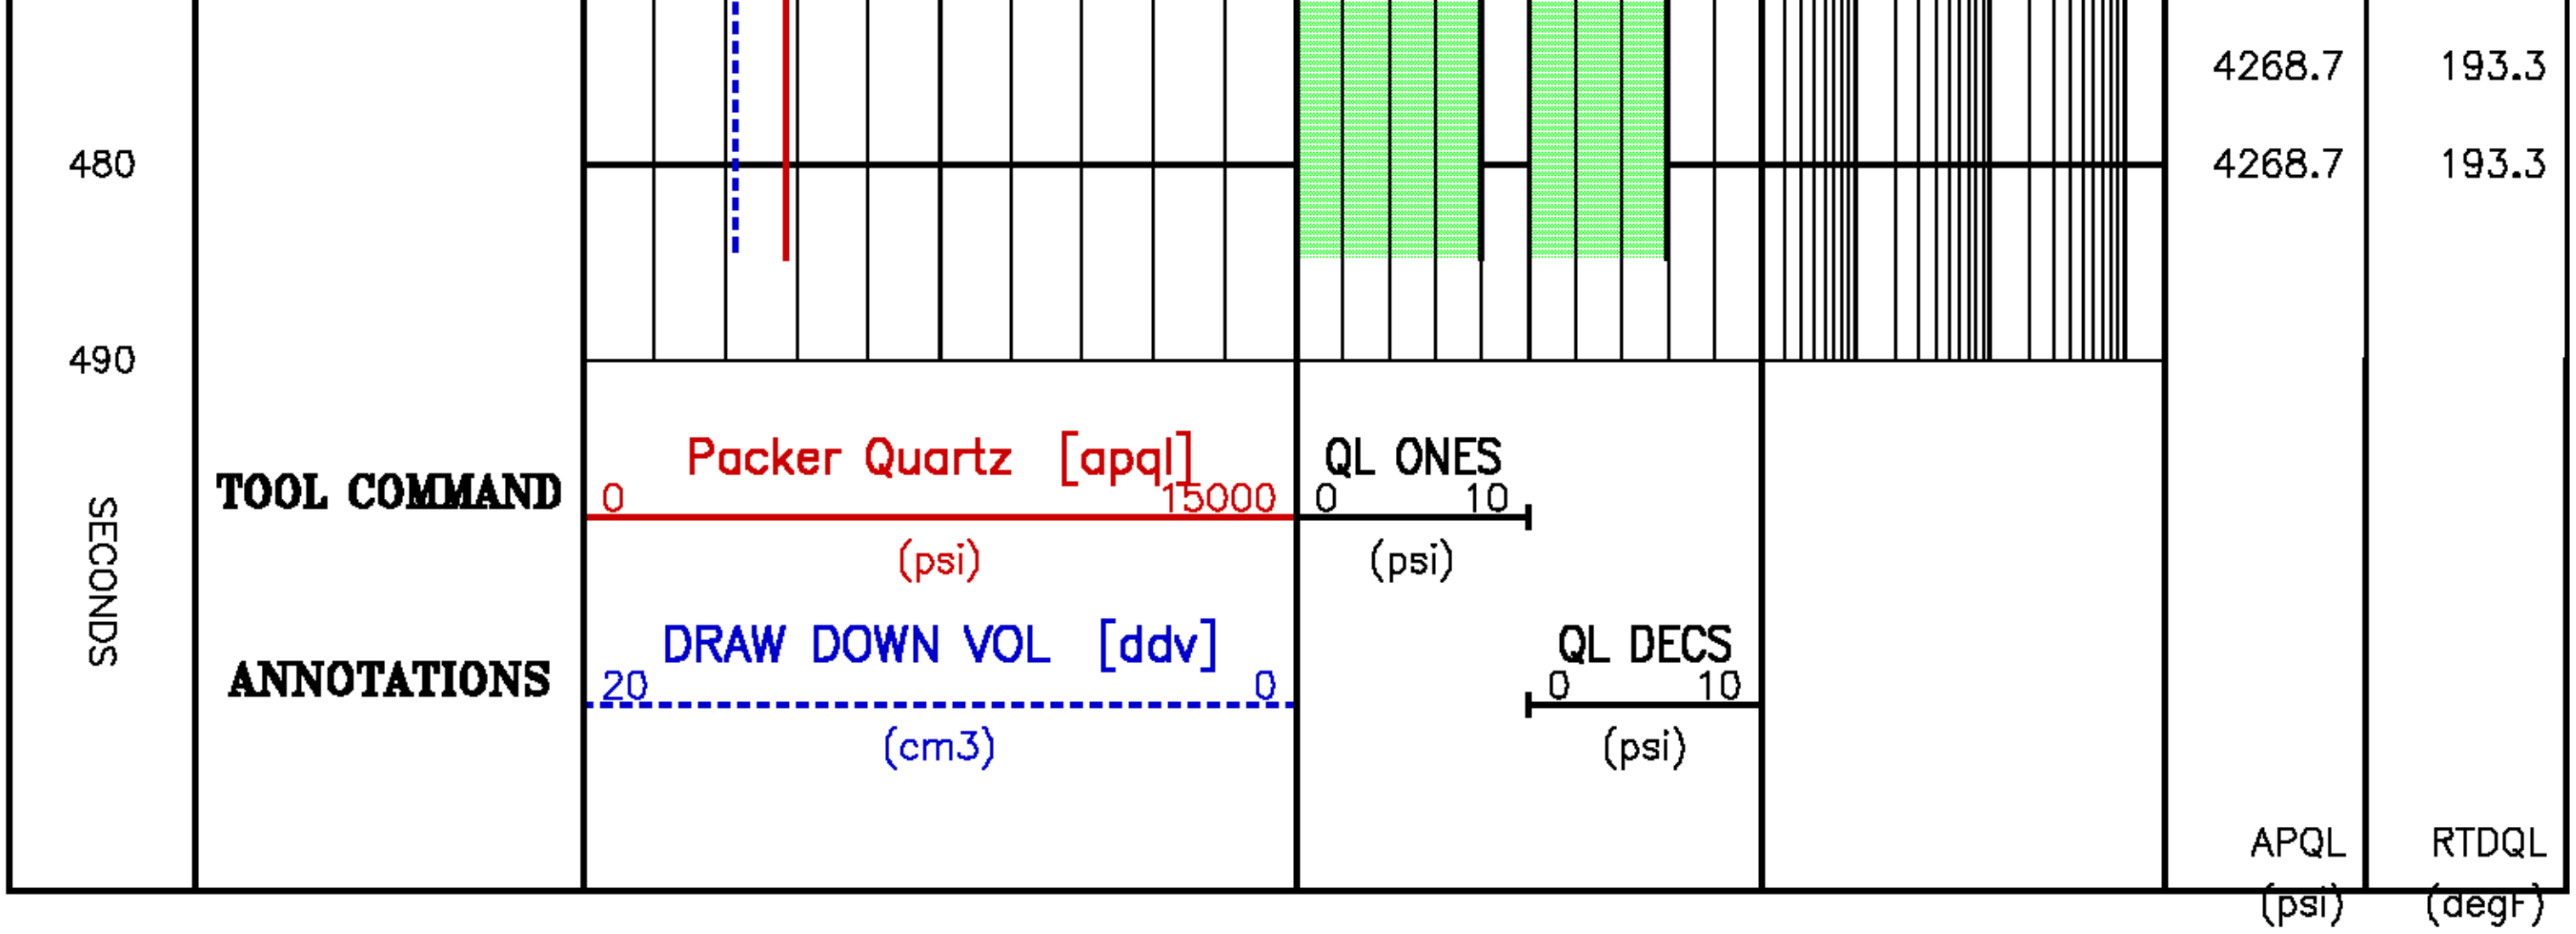

Pressure Tests – Level 14 Tool Instance 1
MD 2425.0 m TVD 2425.0 m

PRESSURE HISTORY

Depth MD 2425.0 m TVD 2425.0 m

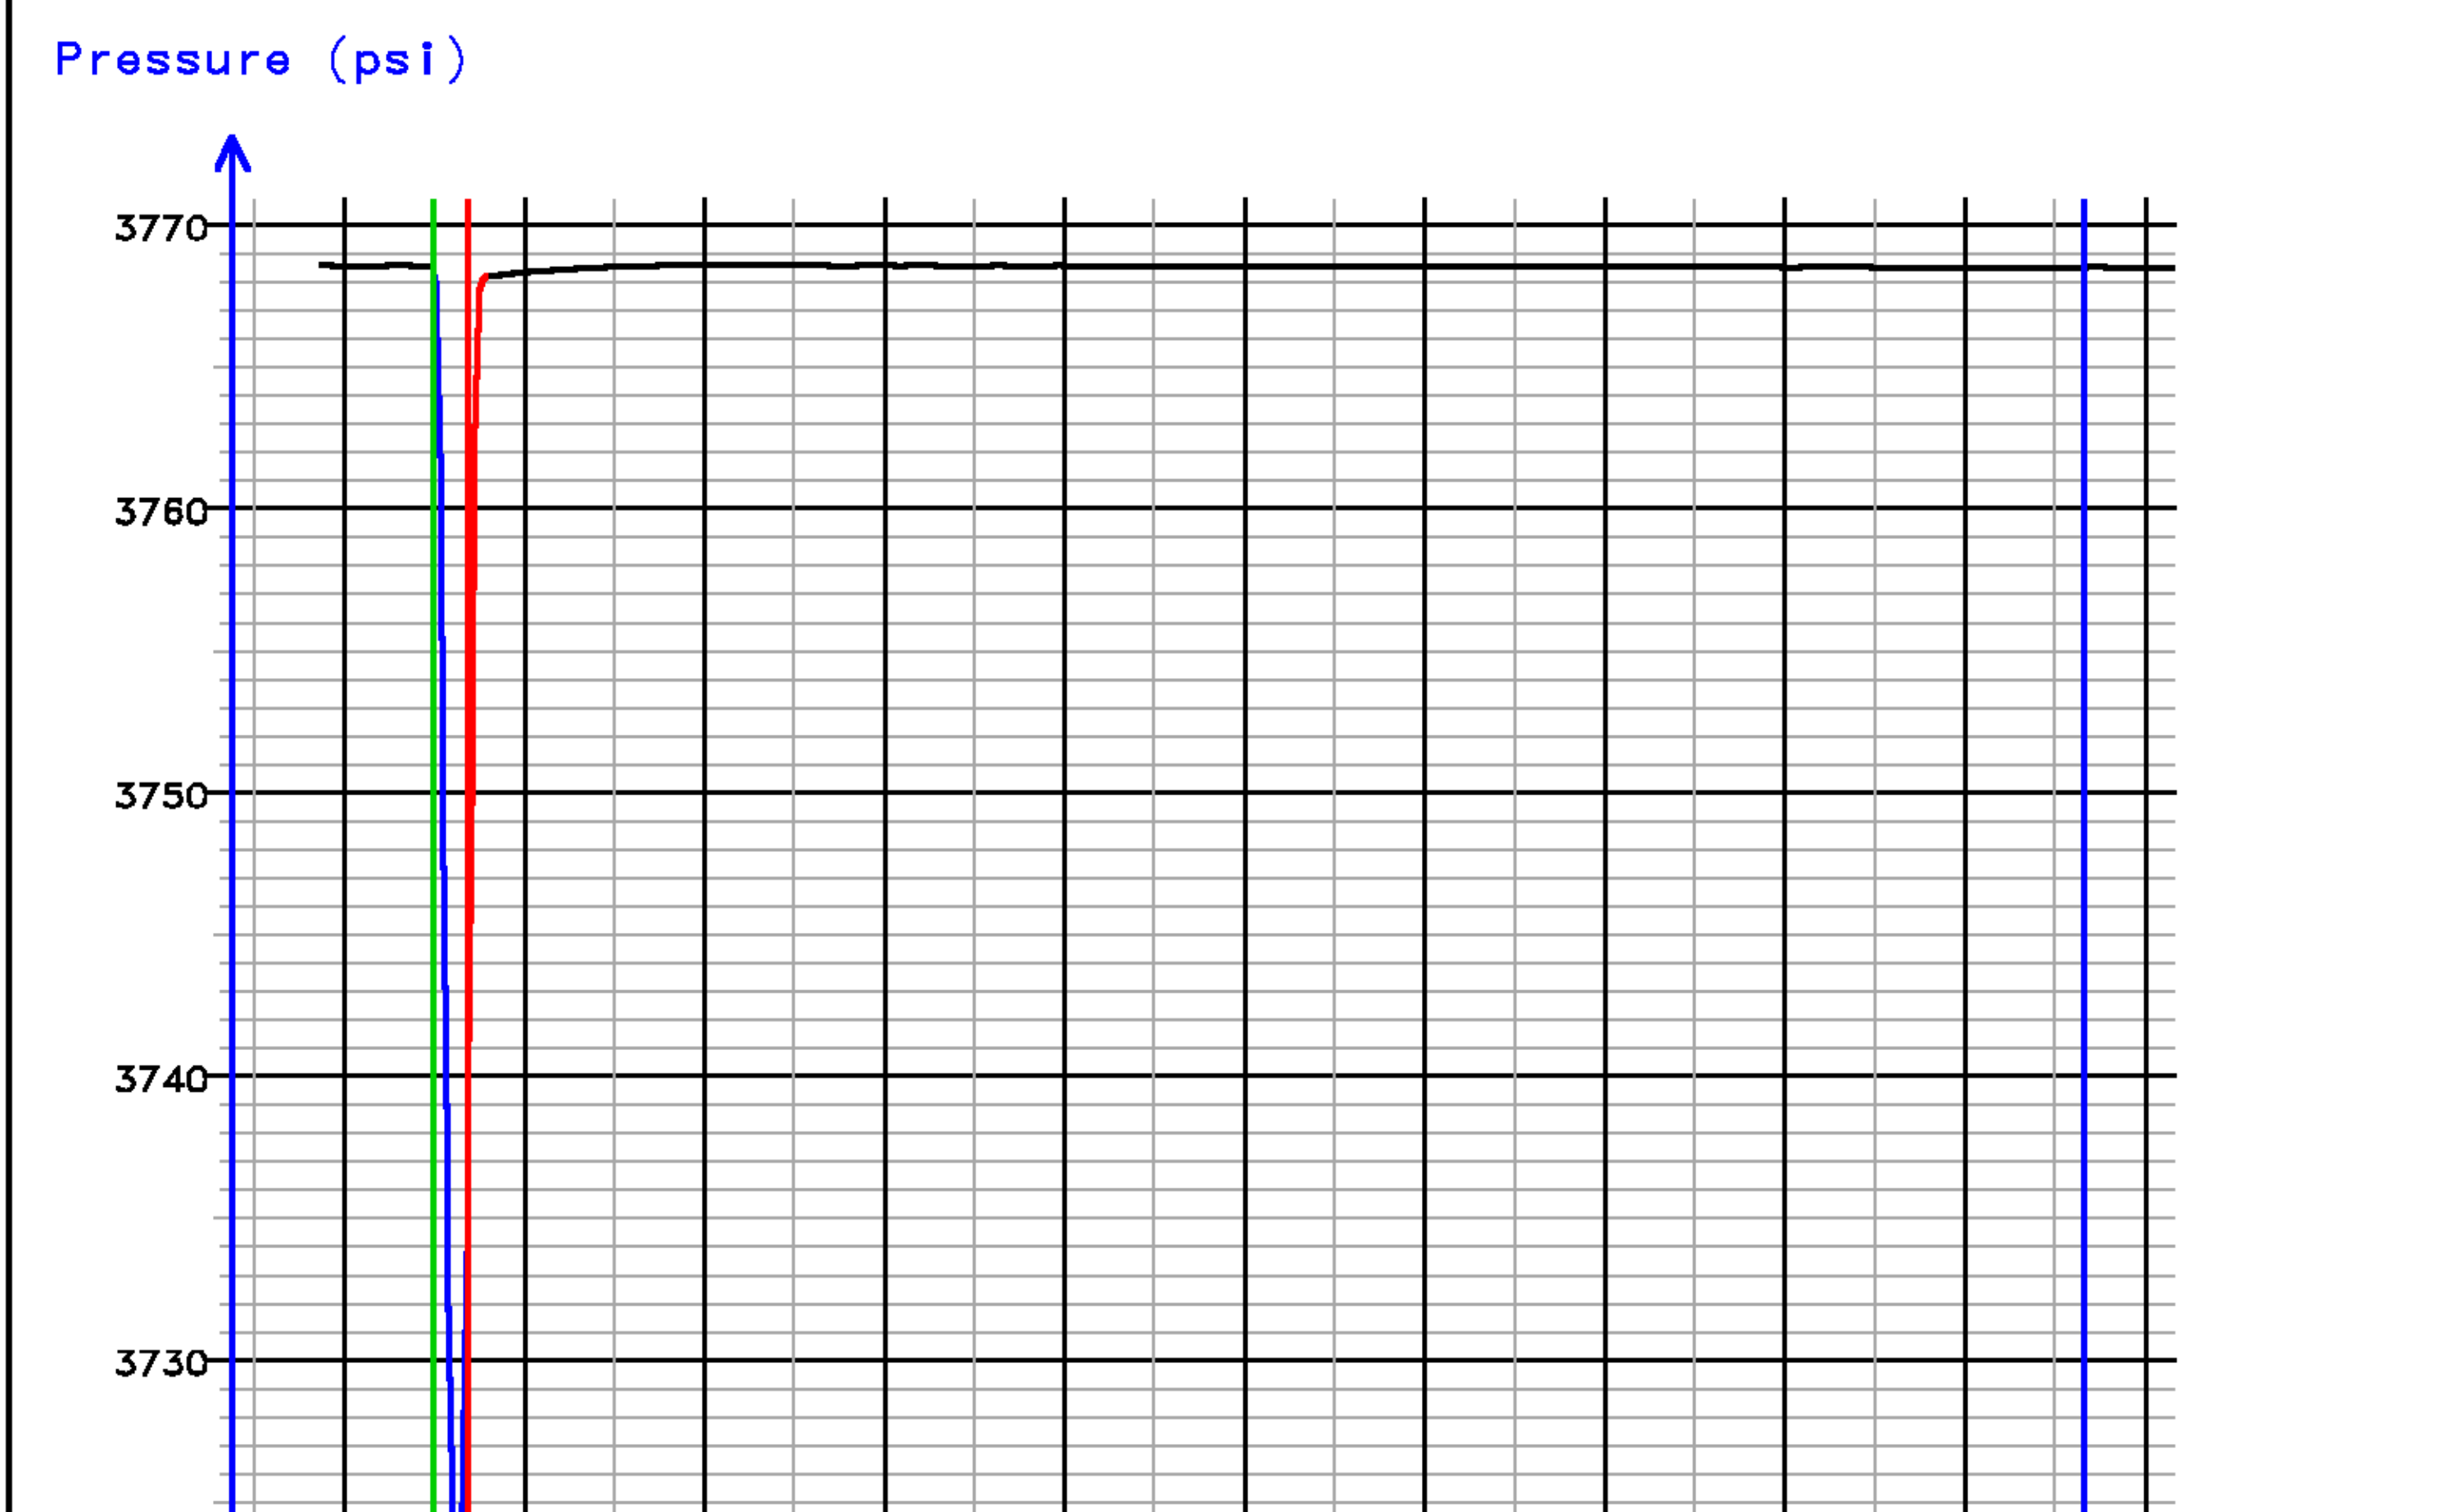



FLOW RATE ANALYSIS

Depth MD 2425.0 m TVD 2425.0 m

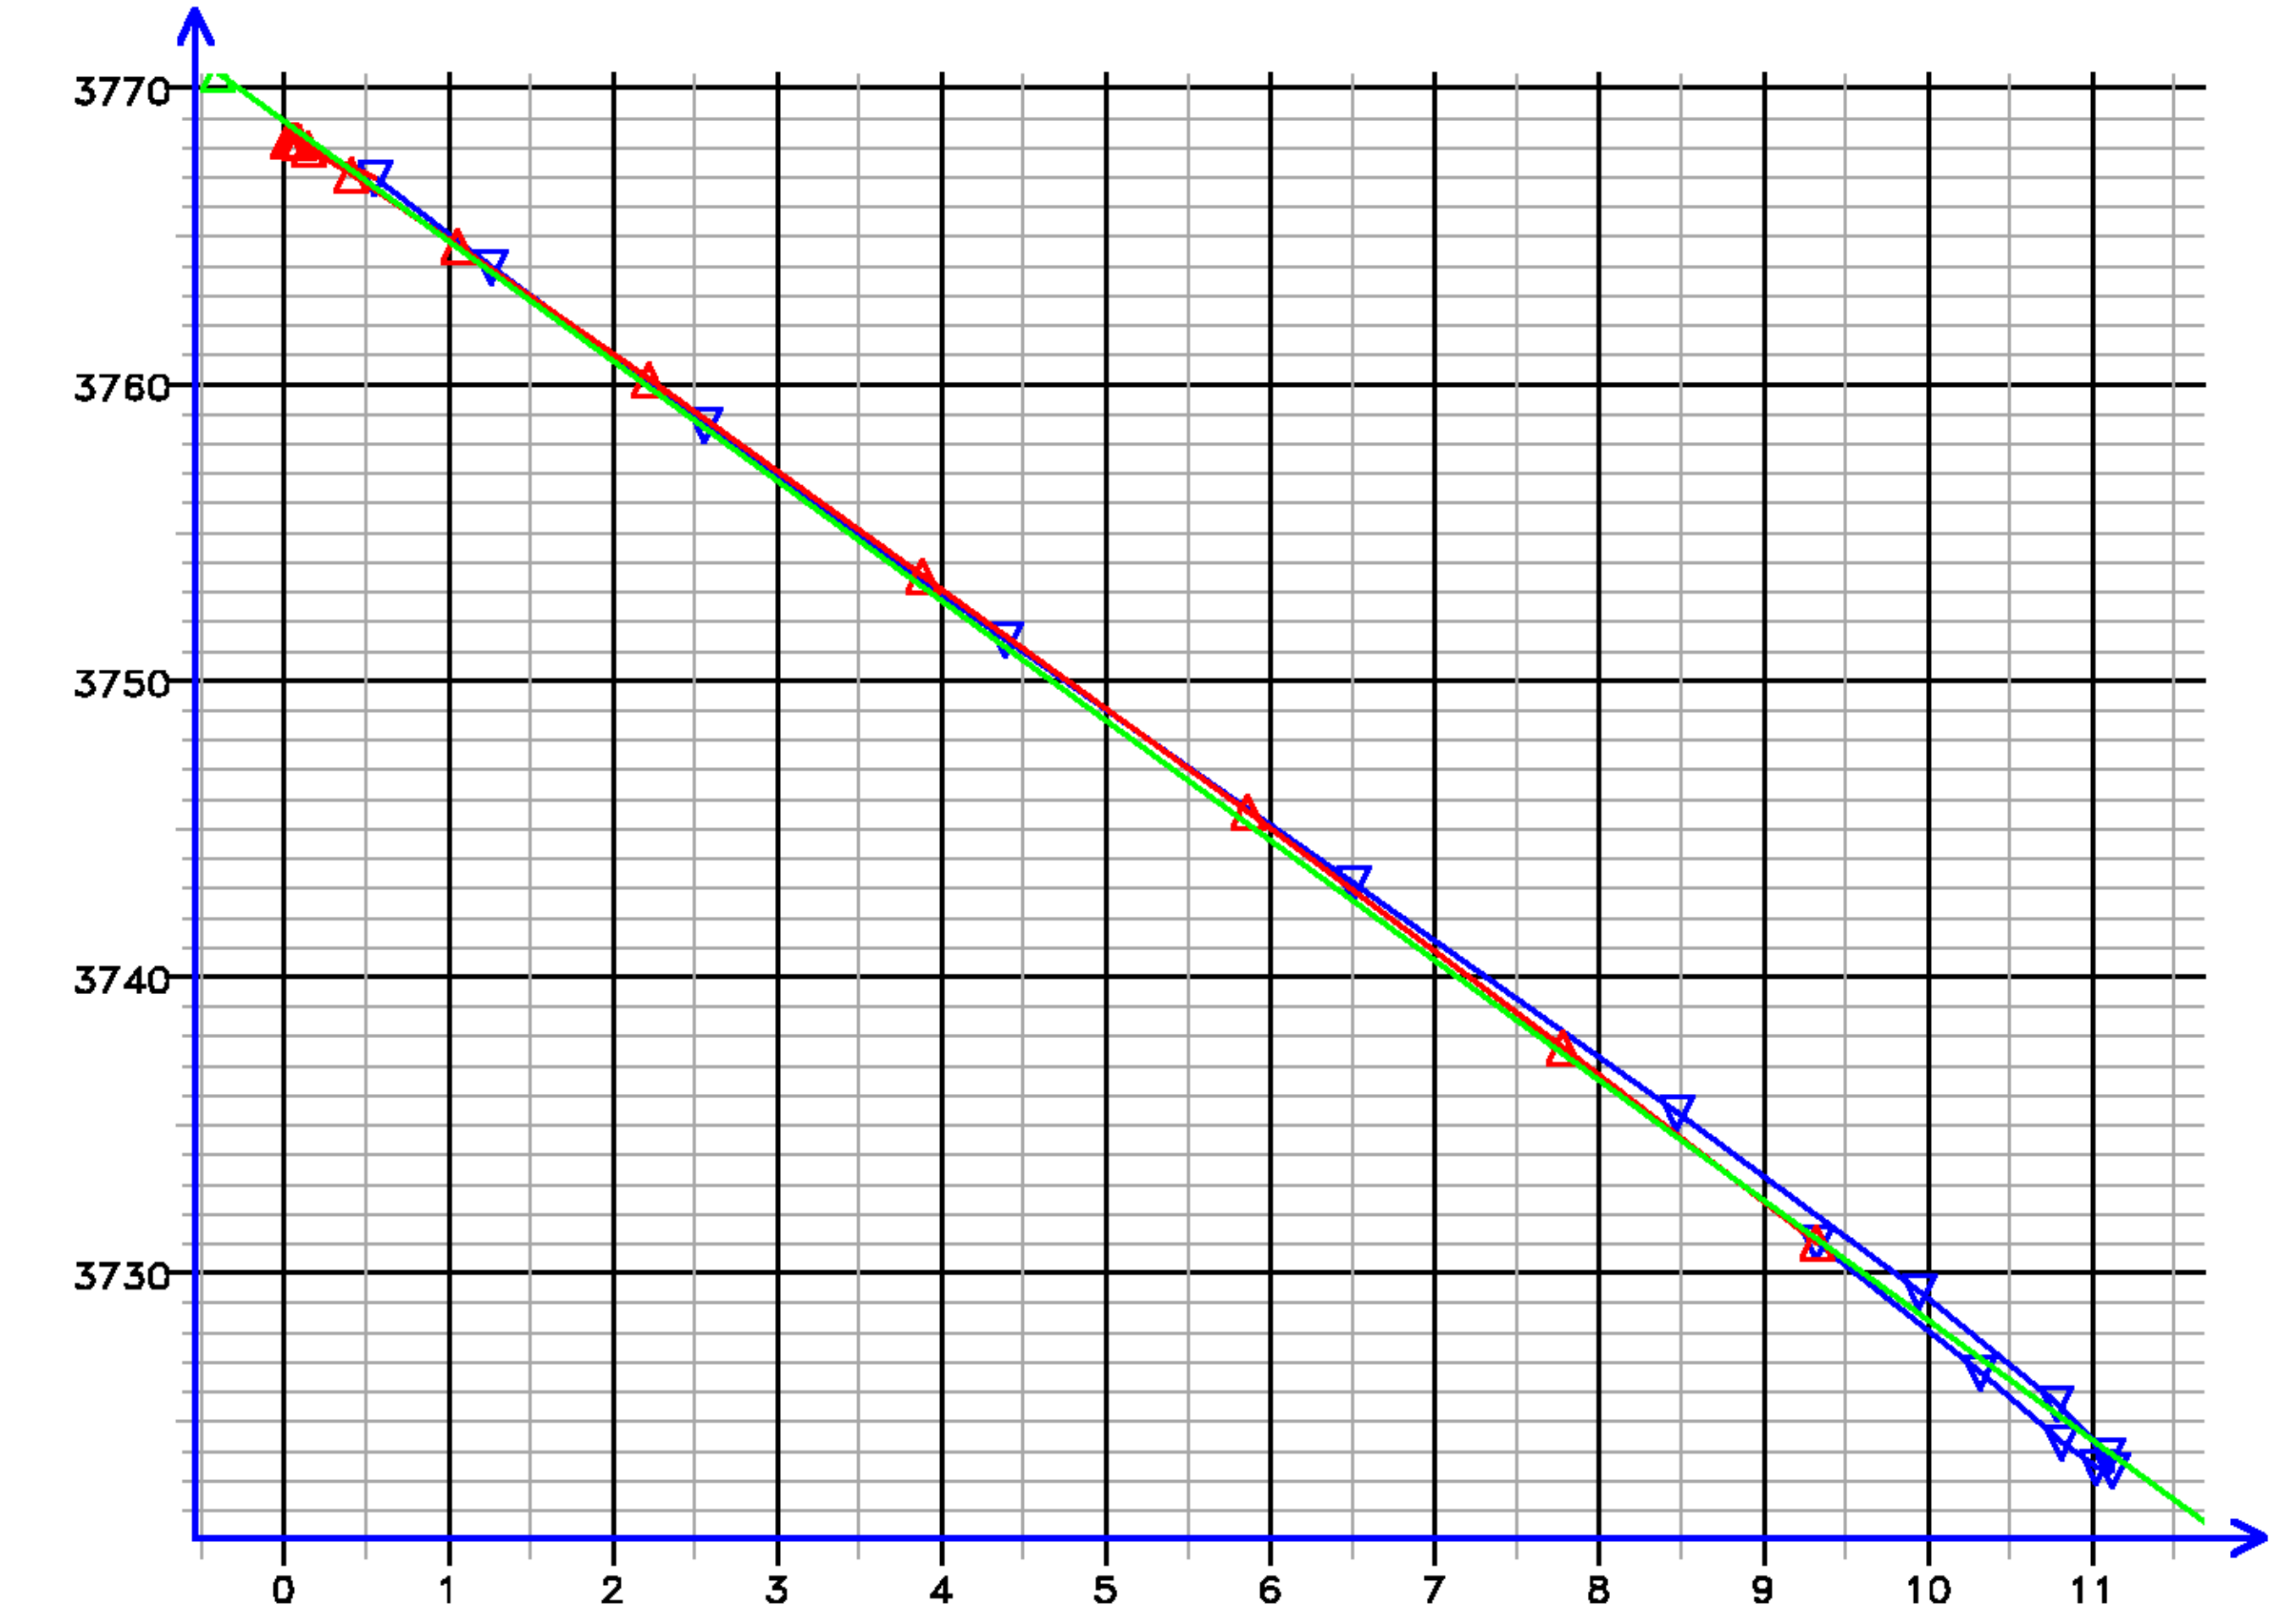

Kfra 850.645 (mD/cP), Kddu 872.628 (mD/cP) Confidence 99.93% [014.118]

Data File : j800g17.aff
Presentation: gpi_rci-b3xx.log

SECONDS	TOOL COMMAND	Packer Quartz [apql] 0 15000 (psi)	QL ONES 0 10 (psi)			

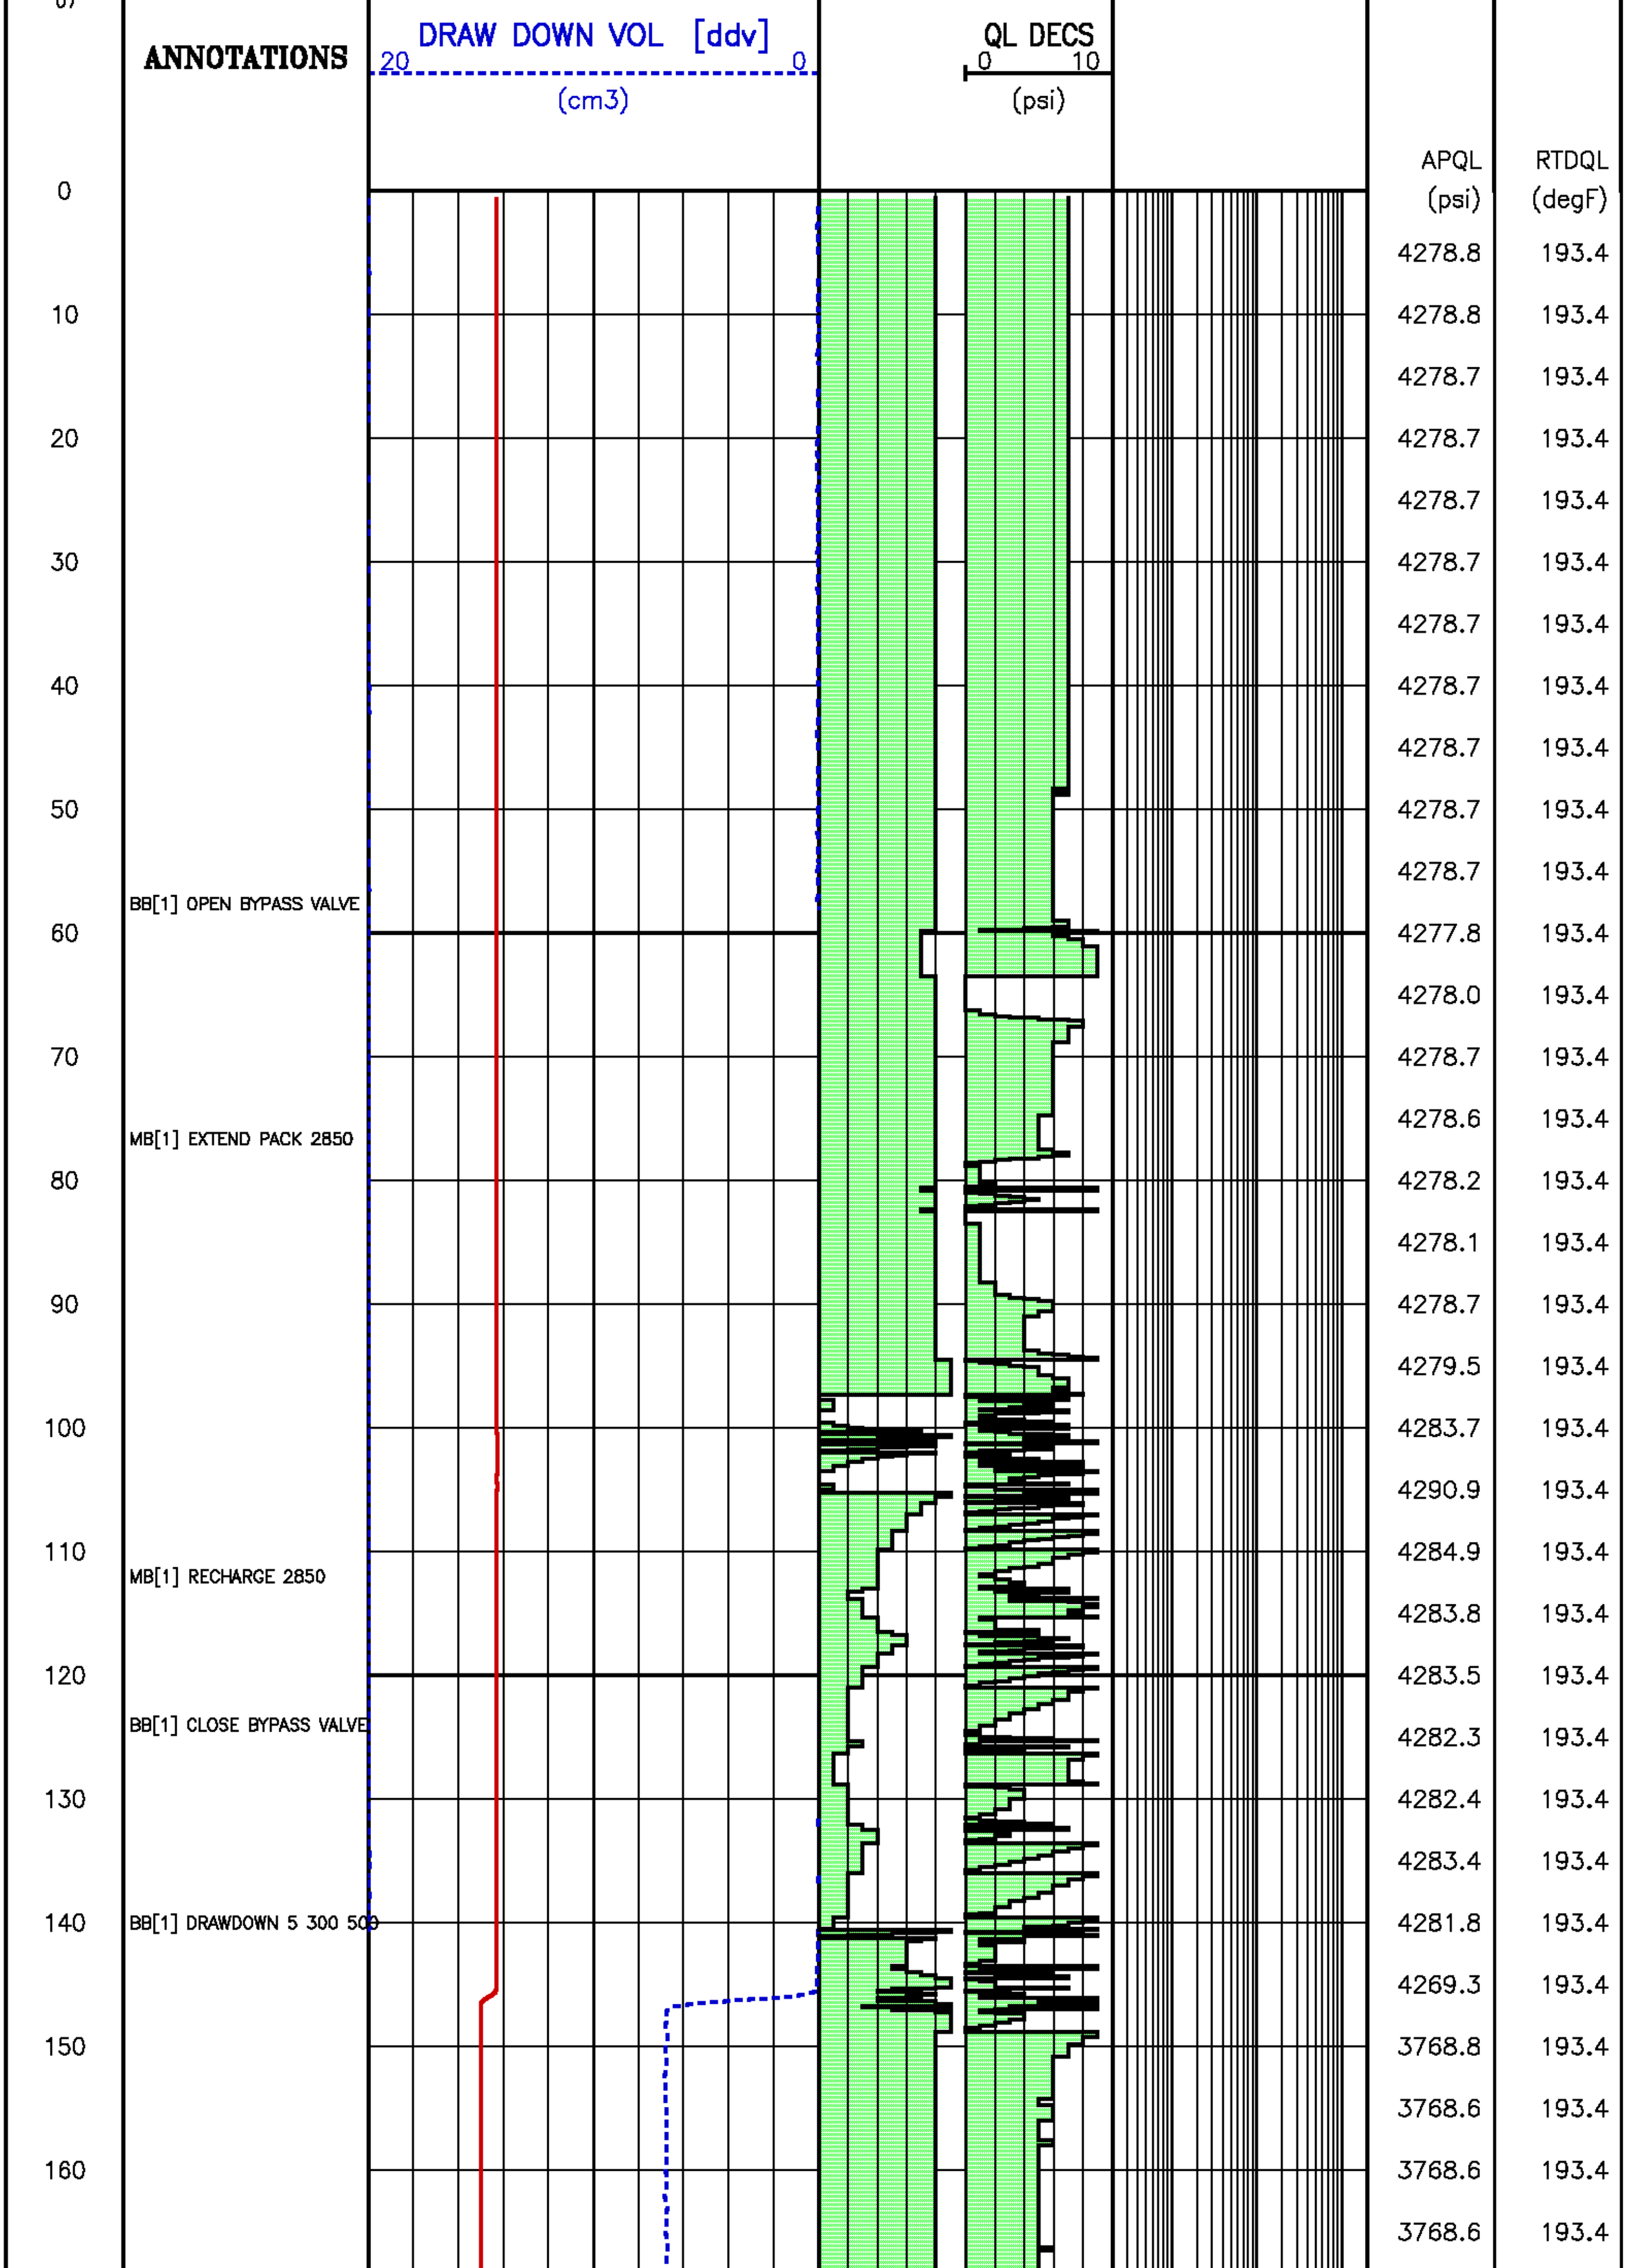
ANNOTATIONS
DRAW DOWN VOL [ddv]
20
0
(cm3)
QL DECS
0
10
(psi)
APQL
(psi)
RTDQL
(degF)
0
10
20
30
40
50
60
70
80
90
100
110
120
130
140
150
160
BB[1] OPEN BYPASS VALVE
MB[1] EXTEND PACK 2850
MB[1] RECHARGE 2850
BB[1] CLOSE BYPASS VALVE
BB[1] DRAWDOWN 5 300 500
4278.8 193.4
4278.8 193.4
4278.7 193.4
4278.7 193.4
4278.7 193.4
4278.7 193.4
4278.7 193.4
4278.7 193.4
4278.7 193.4
4278.7 193.4
4278.7 193.4
4277.8 193.4
4278.0 193.4
4278.7 193.4
4278.6 193.4
4278.2 193.4
4278.1 193.4
4278.7 193.4
4279.5 193.4
4283.7 193.4
4290.9 193.4
4284.9 193.4
4283.8 193.4
4283.5 193.4
4282.3 193.4
4282.4 193.4
4283.4 193.4
4281.8 193.4
4269.3 193.4
3768.8 193.4
3768.6 193.4
3768.6 193.4
3768.6 193.4

		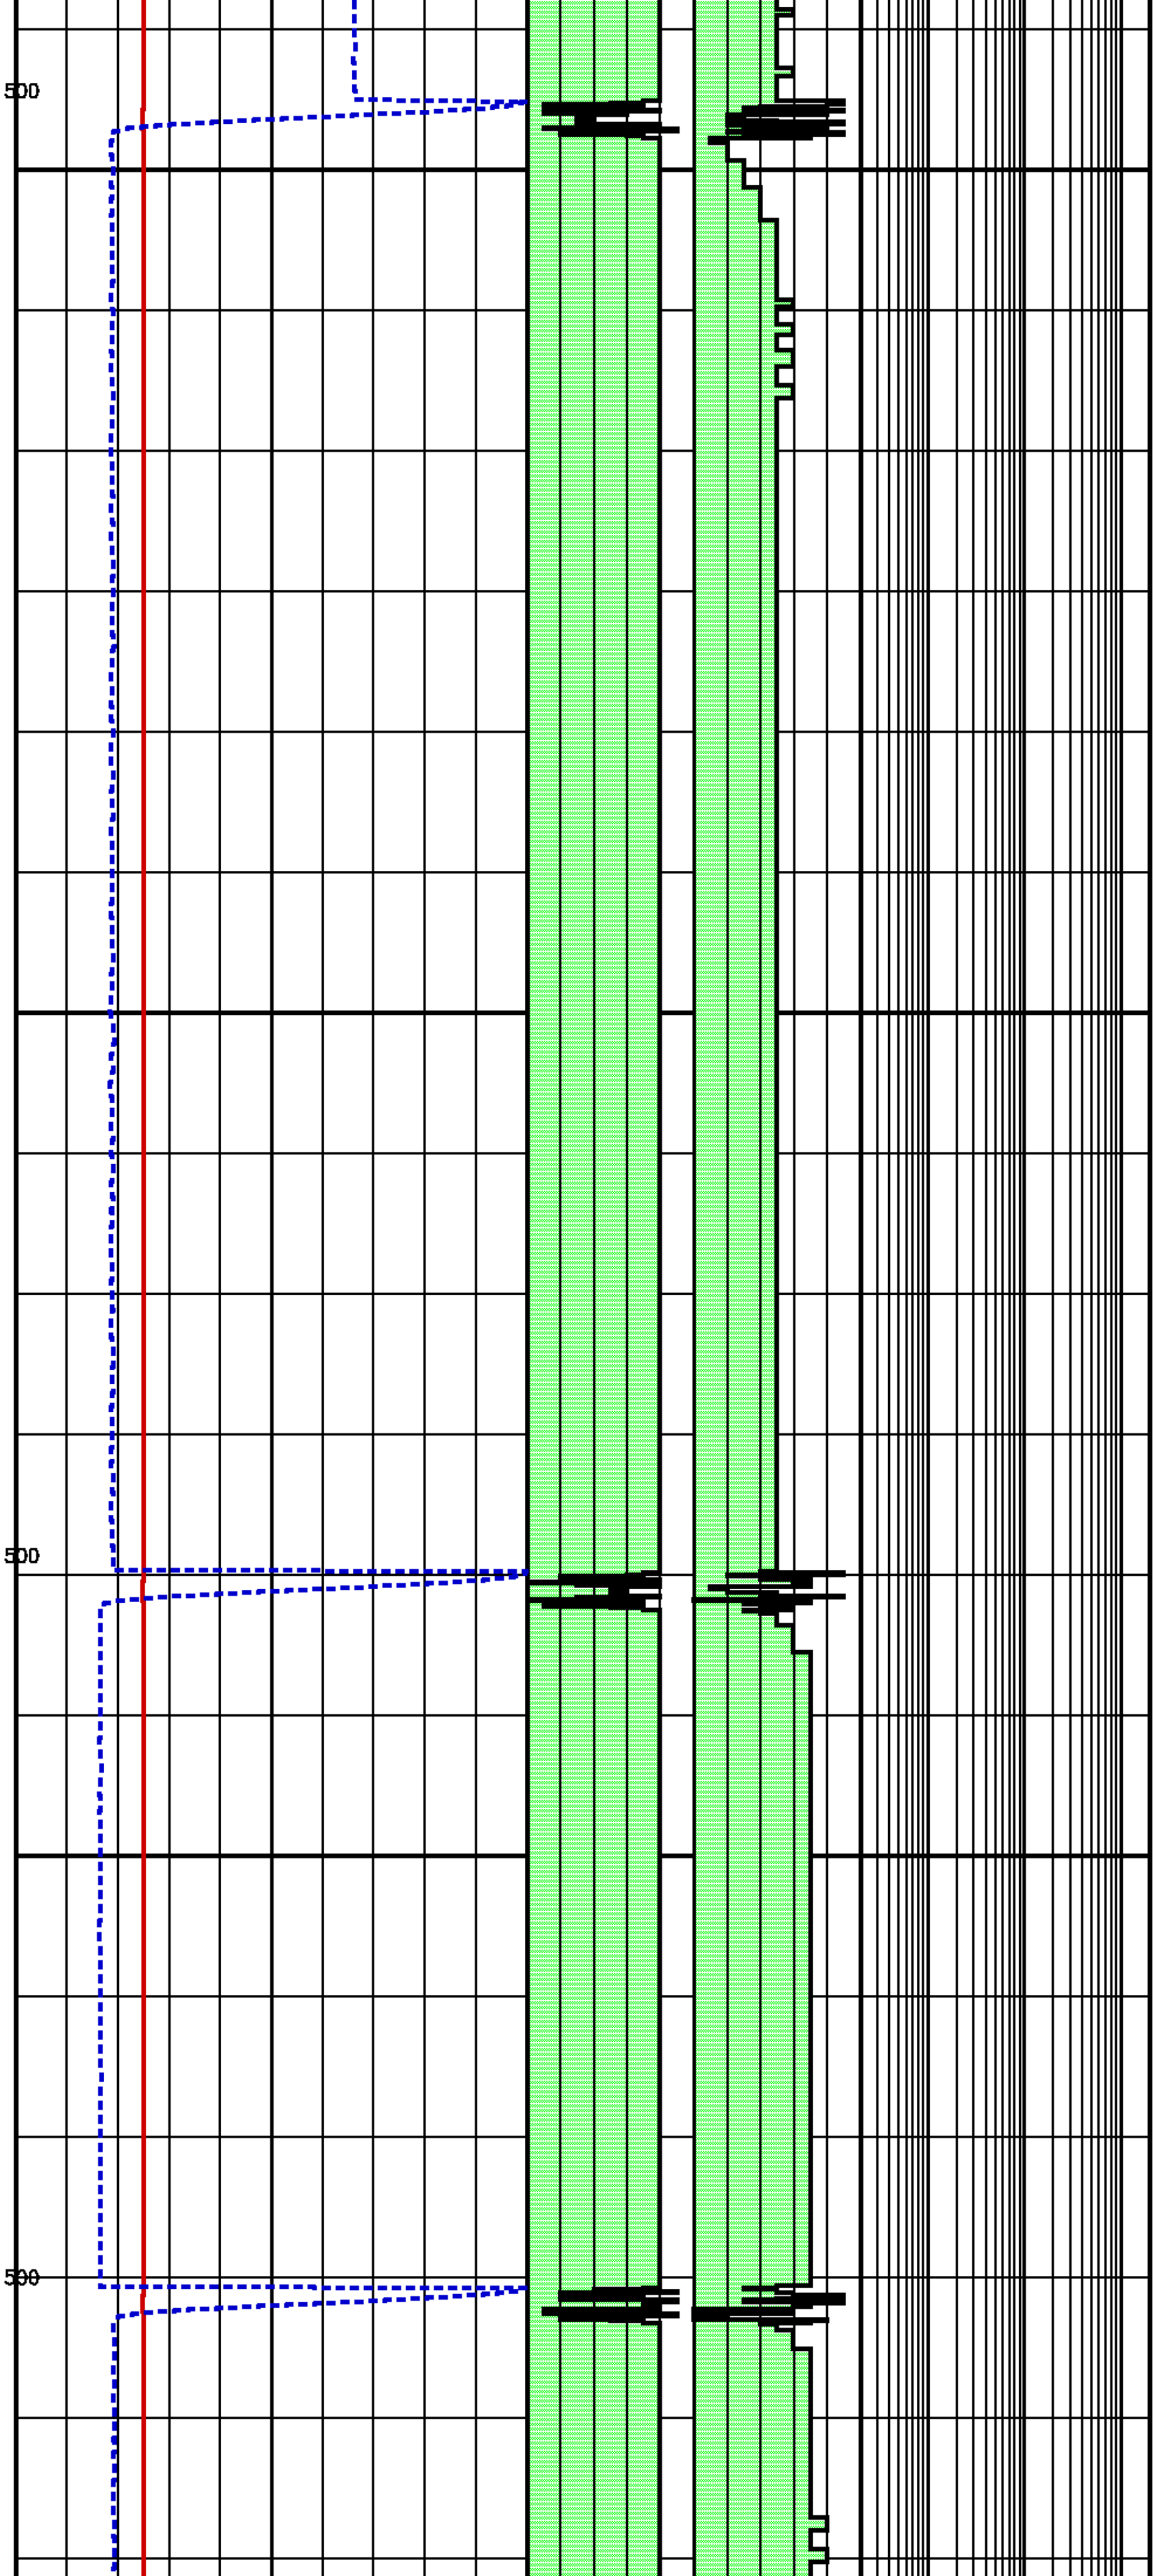		
170			3768.6	193.4
	BB[1] DRAWDOWN 15 300 500		3768.5	193.4
180			3768.3	193.4
			3768.5	193.4
190			3768.6	193.4
			3768.6	193.4
200			3768.6	193.4
			3768.6	193.4
210			3768.6	193.4
			3768.6	193.4
220			3768.6	193.4
			3768.6	193.4
230			3768.5	193.4
			3768.5	193.5
240			3768.5	193.5
			3768.5	193.5
250			3768.5	193.5
			3768.5	193.5
260			3768.5	193.5
			3768.5	193.5
270			3768.5	193.5
			3768.5	193.5
280	BB[1] DRAWDOWN 15 300 500		3766.2	193.5
			3768.7	193.5
290			3768.7	193.5
			3768.8	193.5
300			3768.8	193.5
			3768.8	193.5
310			3768.8	193.5
			3768.8	193.5
320			3768.8	193.5
			3768.8	193.5
330	BB[1] DRAWDOWN 15 300 500		3768.8	193.5
			3768.7	193.5
340			3768.8	193.5
			3768.8	193.5
350			3768.8	193.5

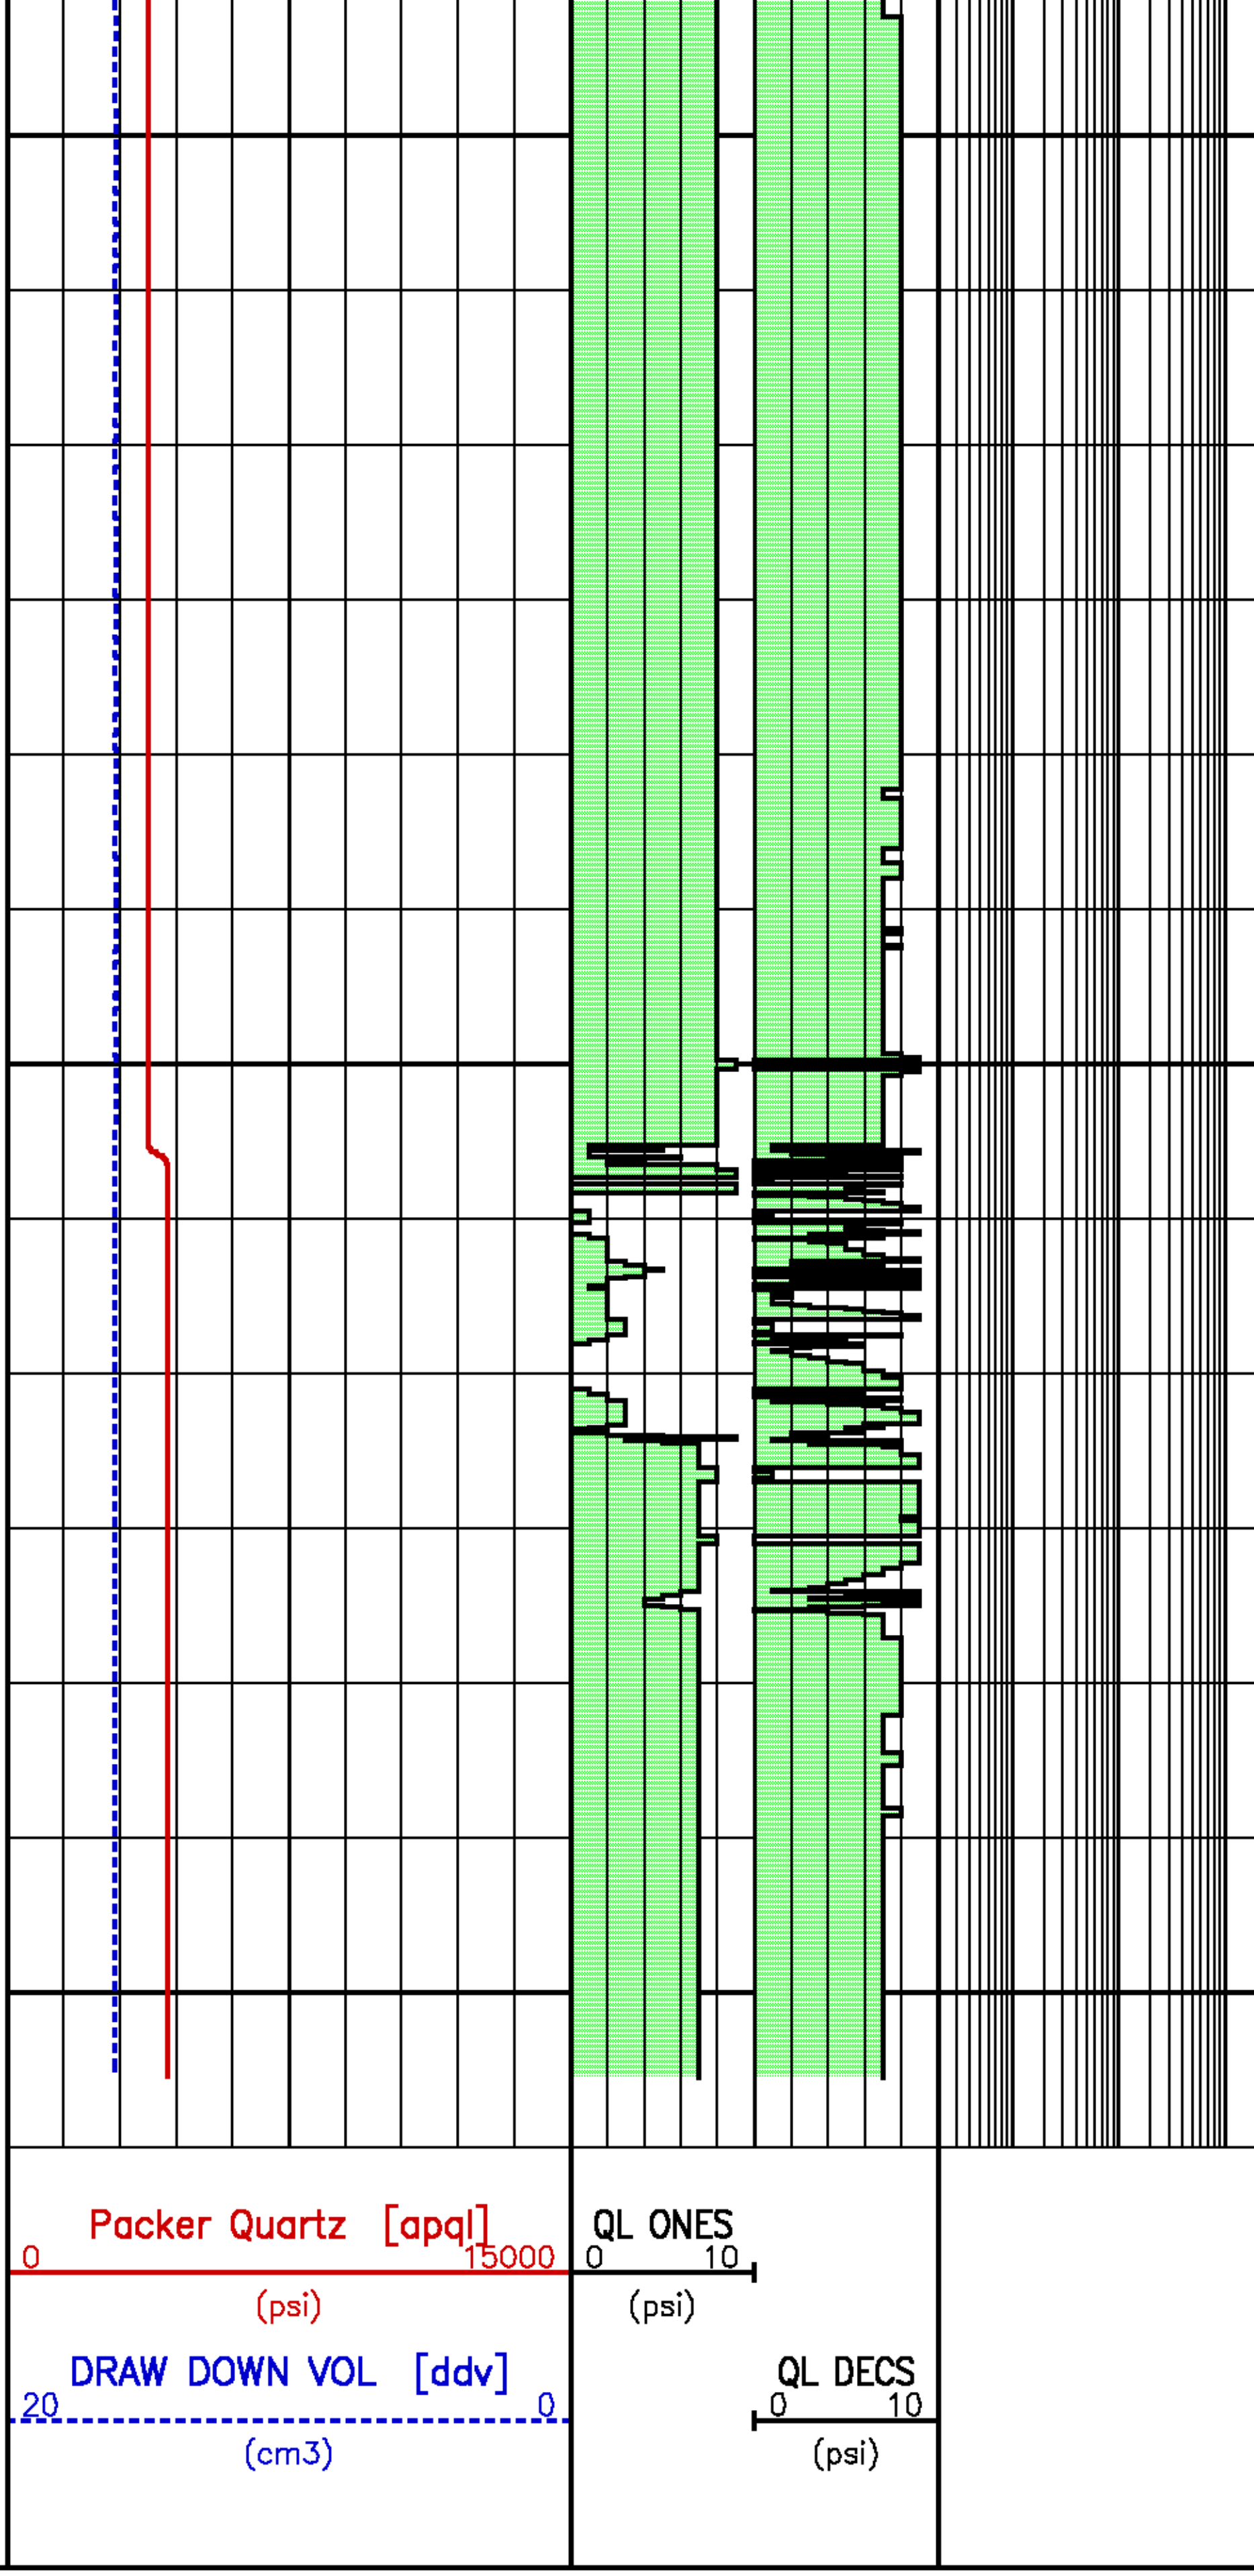

SECONDS	TOOL COMMAND / ANNOTATIONS	APQL (psi)	RTDQL (degF)
		3768.8	193.5
360		3768.8	193.5
		3768.8	193.5
370		3768.8	193.5
		3768.8	193.5
380		3768.8	193.5
		3768.8	193.5
390		3768.8	193.5
		3768.8	193.5
400		3768.8	193.5
		3768.8	193.5
410		3768.8	193.5
		3768.8	193.5
420	BB[1] ABORT	3769.1	193.5
	BB[1] OPEN BYPASS VALVE	3768.8	193.5
430		4261.1	193.5
		4262.2	193.5
440		4260.8	193.5
	MB[1] RETRACT PACK 2600	4277.9	193.5
450		4278.0	193.5
		4275.6	193.5
460		4277.8	193.5
		4277.8	193.5
470		4277.8	193.5
		4277.8	193.5
480		4277.7	193.5
		4277.7	193.5
490			

Pressure Tests – Level 17 Tool Instance 1

Pressure Tests – Level 17 Tool Instance 1

MD 2437.5 m TVD 2437.5 m

PRESSURE HISTORY

Depth MD 2437.5 m TVD 2437.5 m

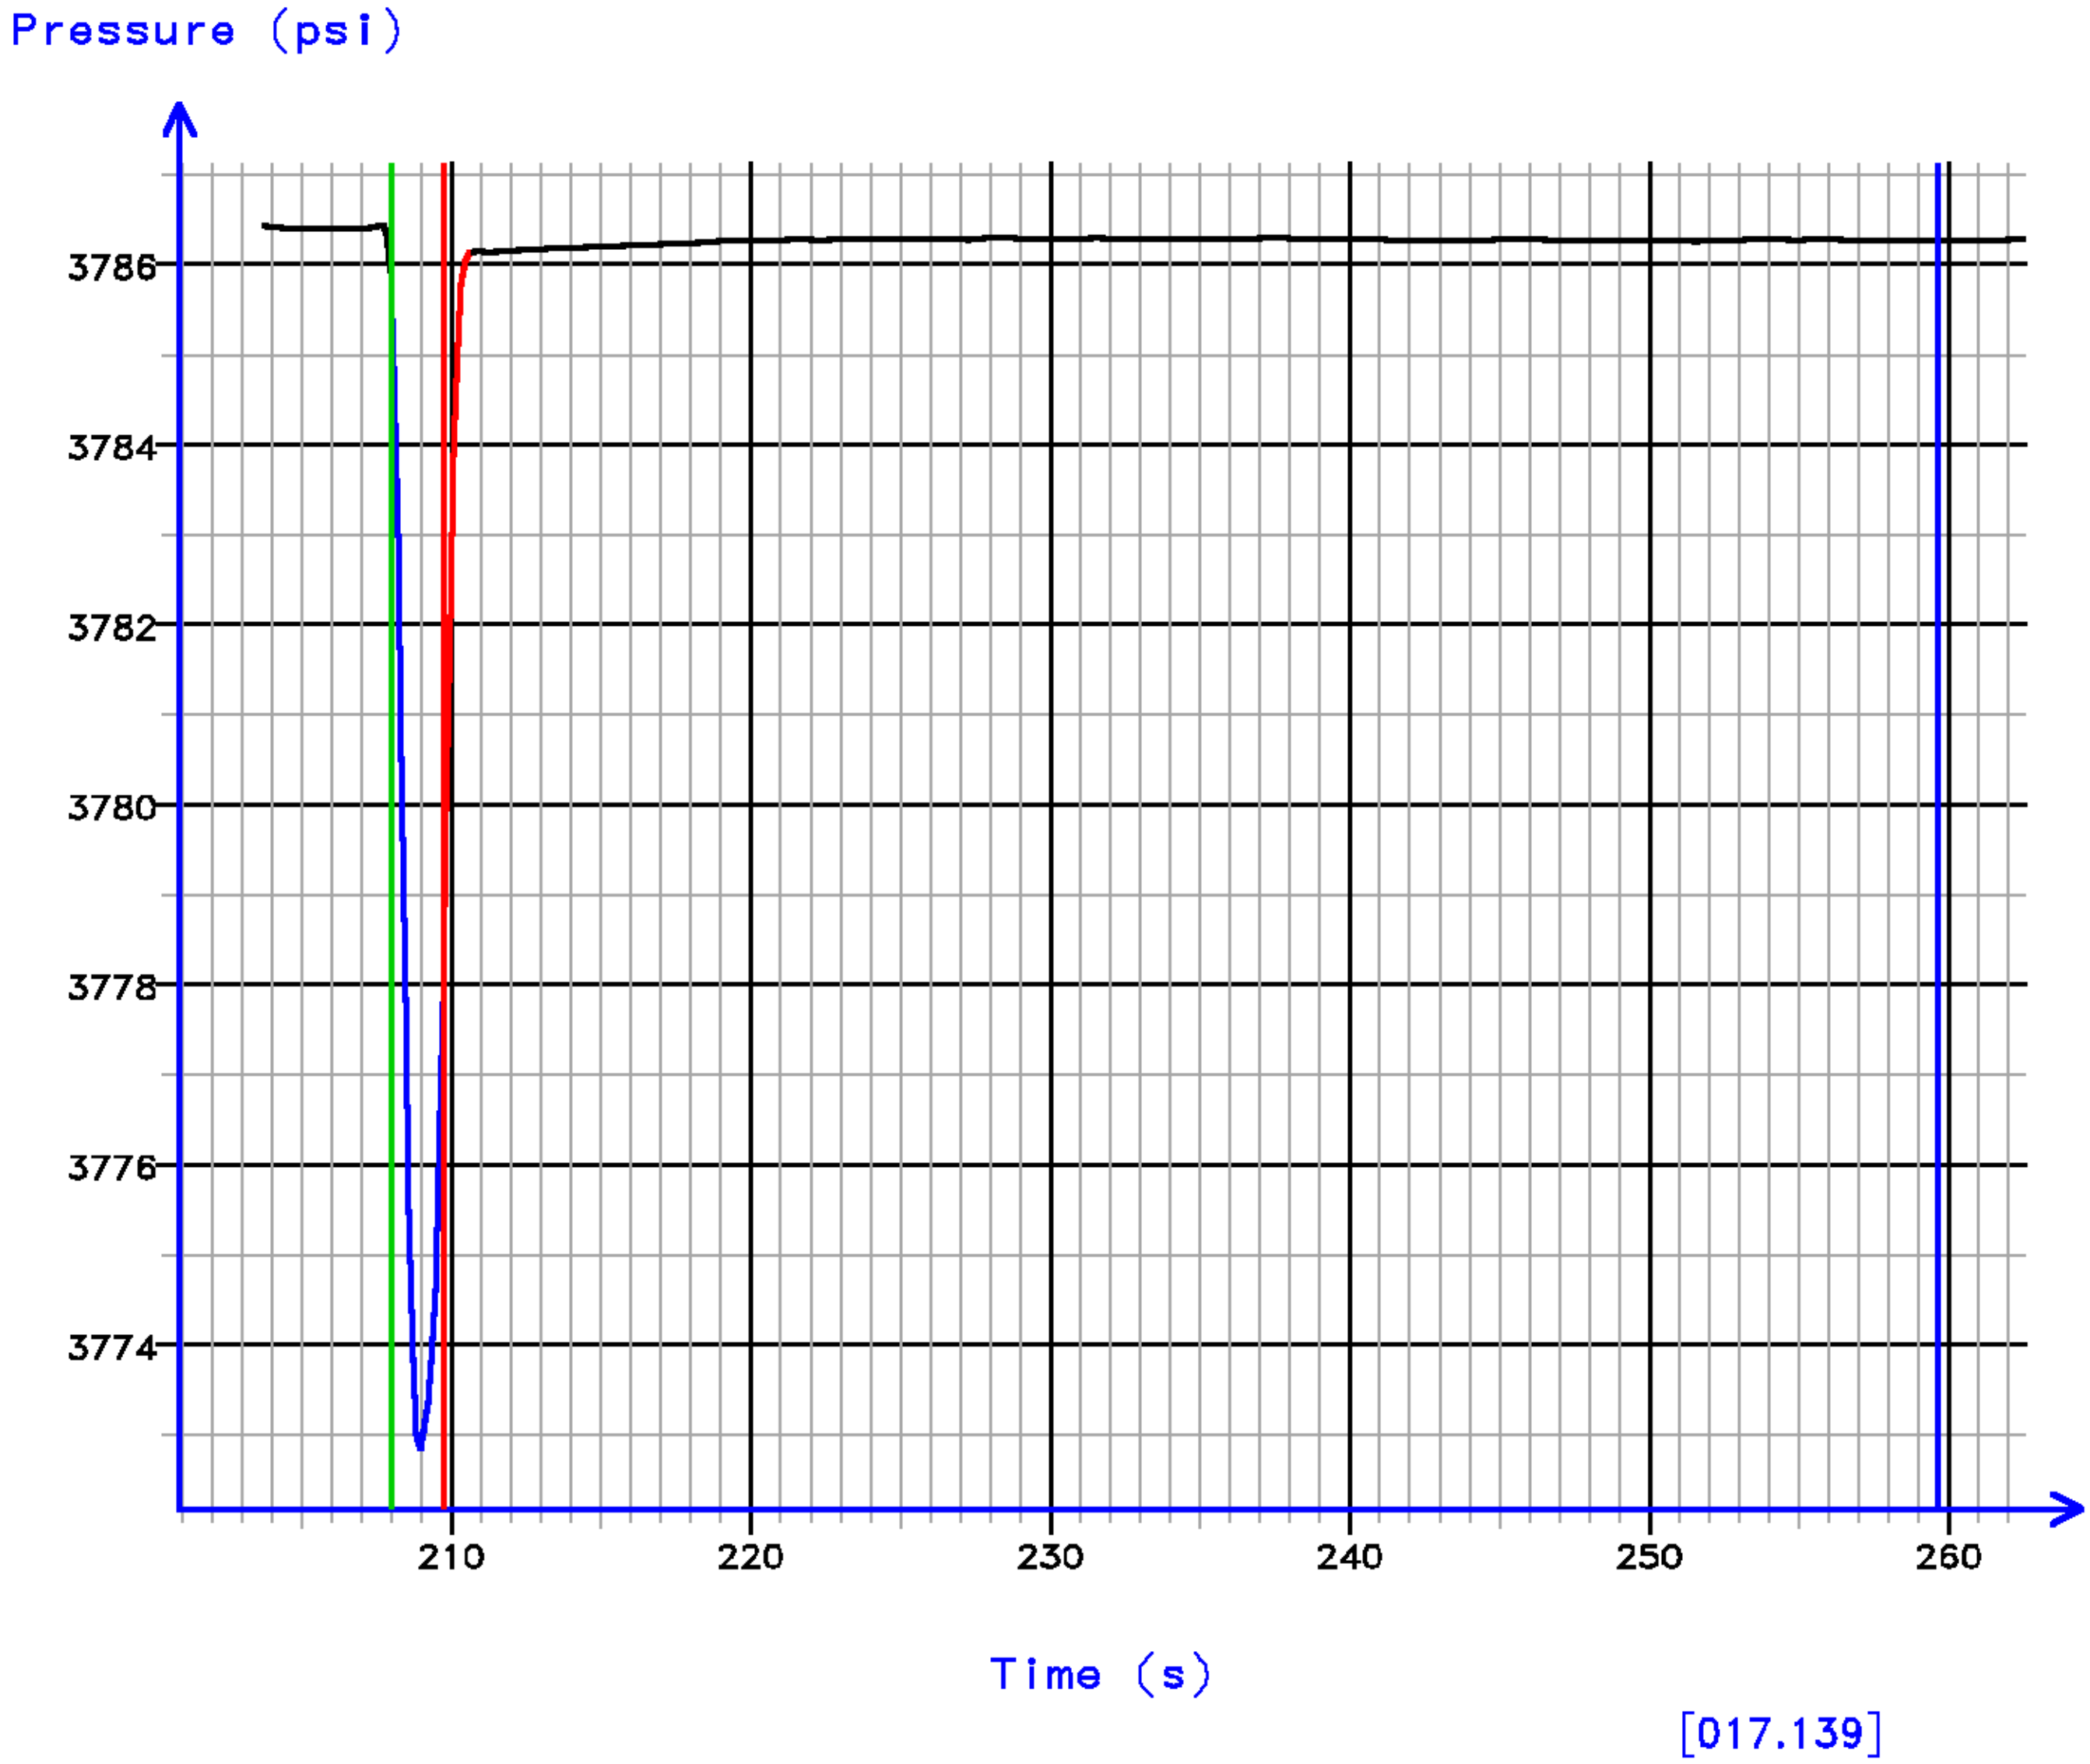

FLOW RATE ANALYSIS

Depth MD 2437.5 m TVD 2437.5 m

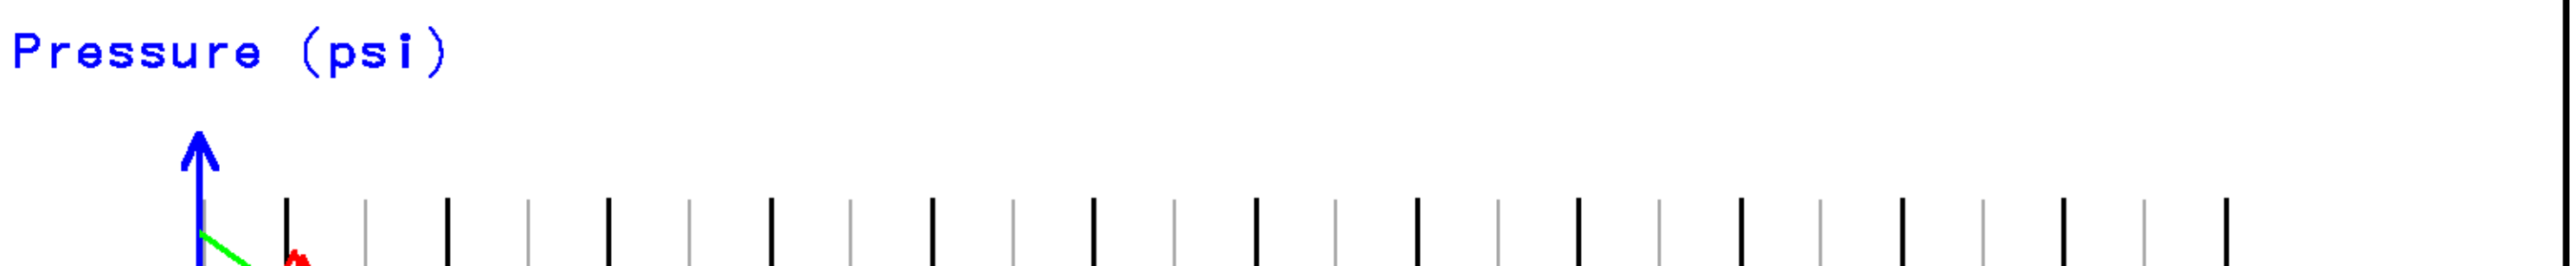

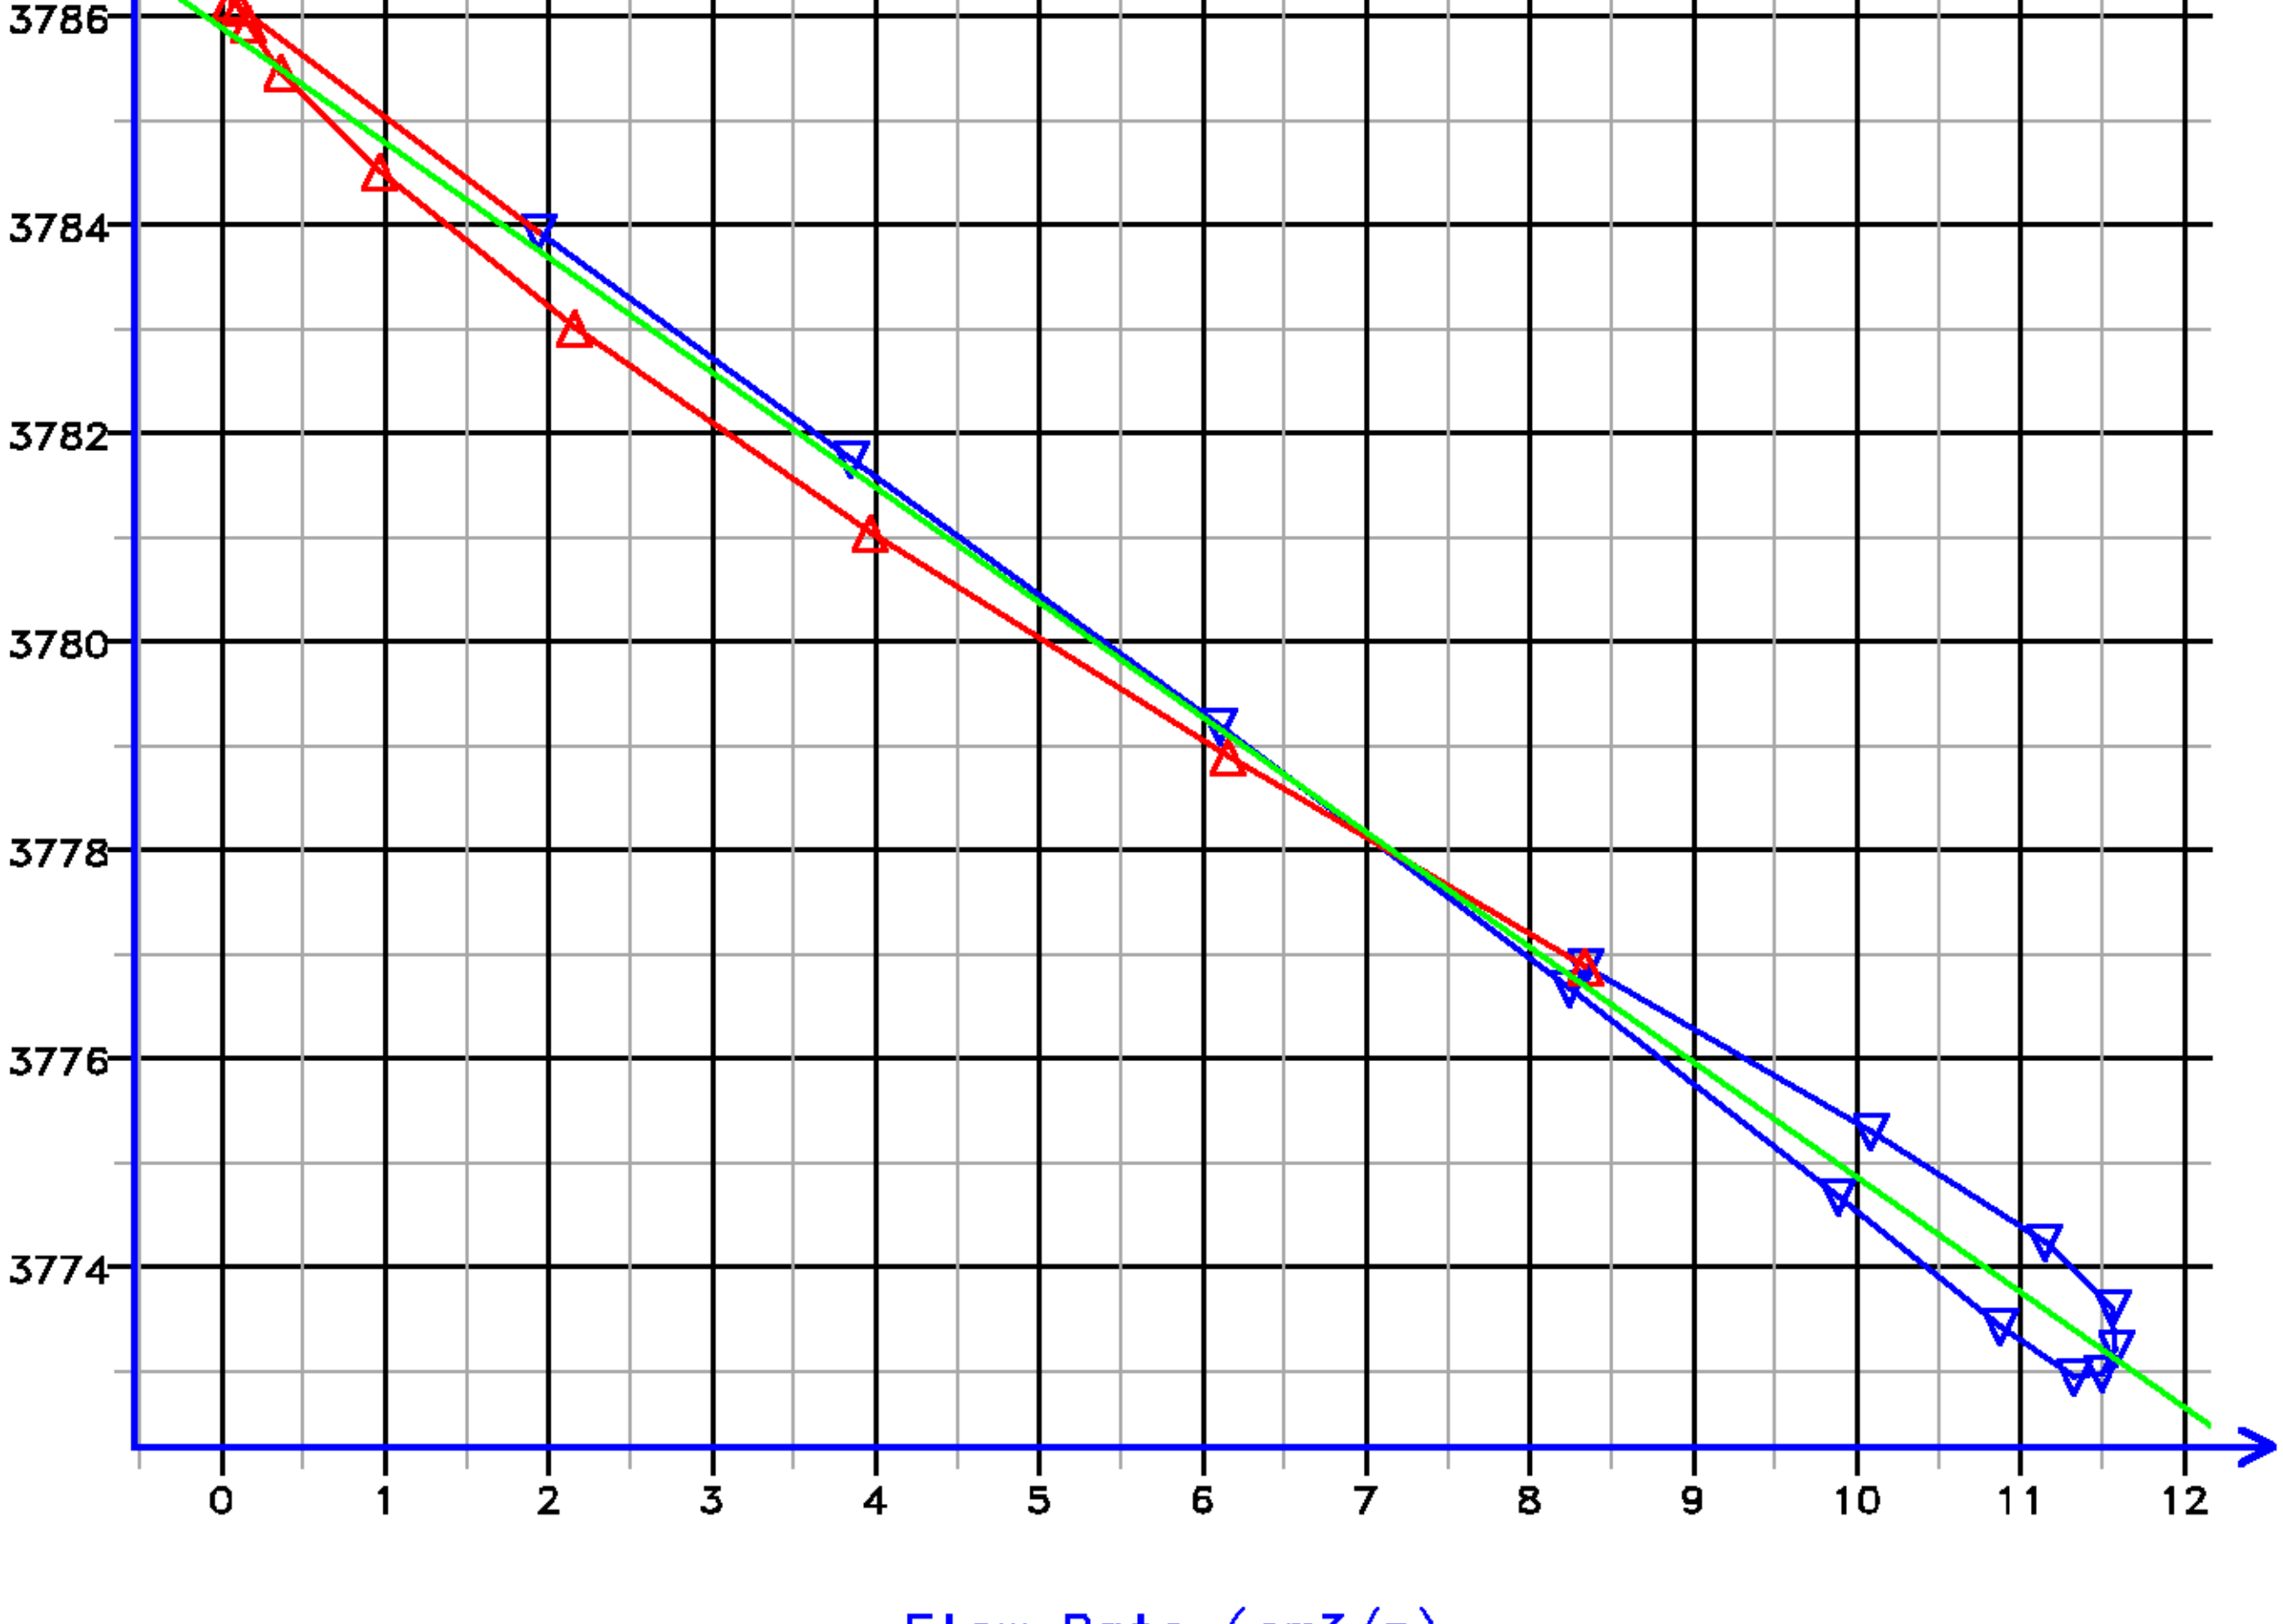

Kfra 3120.365 (mD/cP), Kddu 2953.871 (mD/cP) Confidence 99.51% [017.139]

PRESSURE HISTORY

Depth MD 2437.5 m TVD 2437.5 m

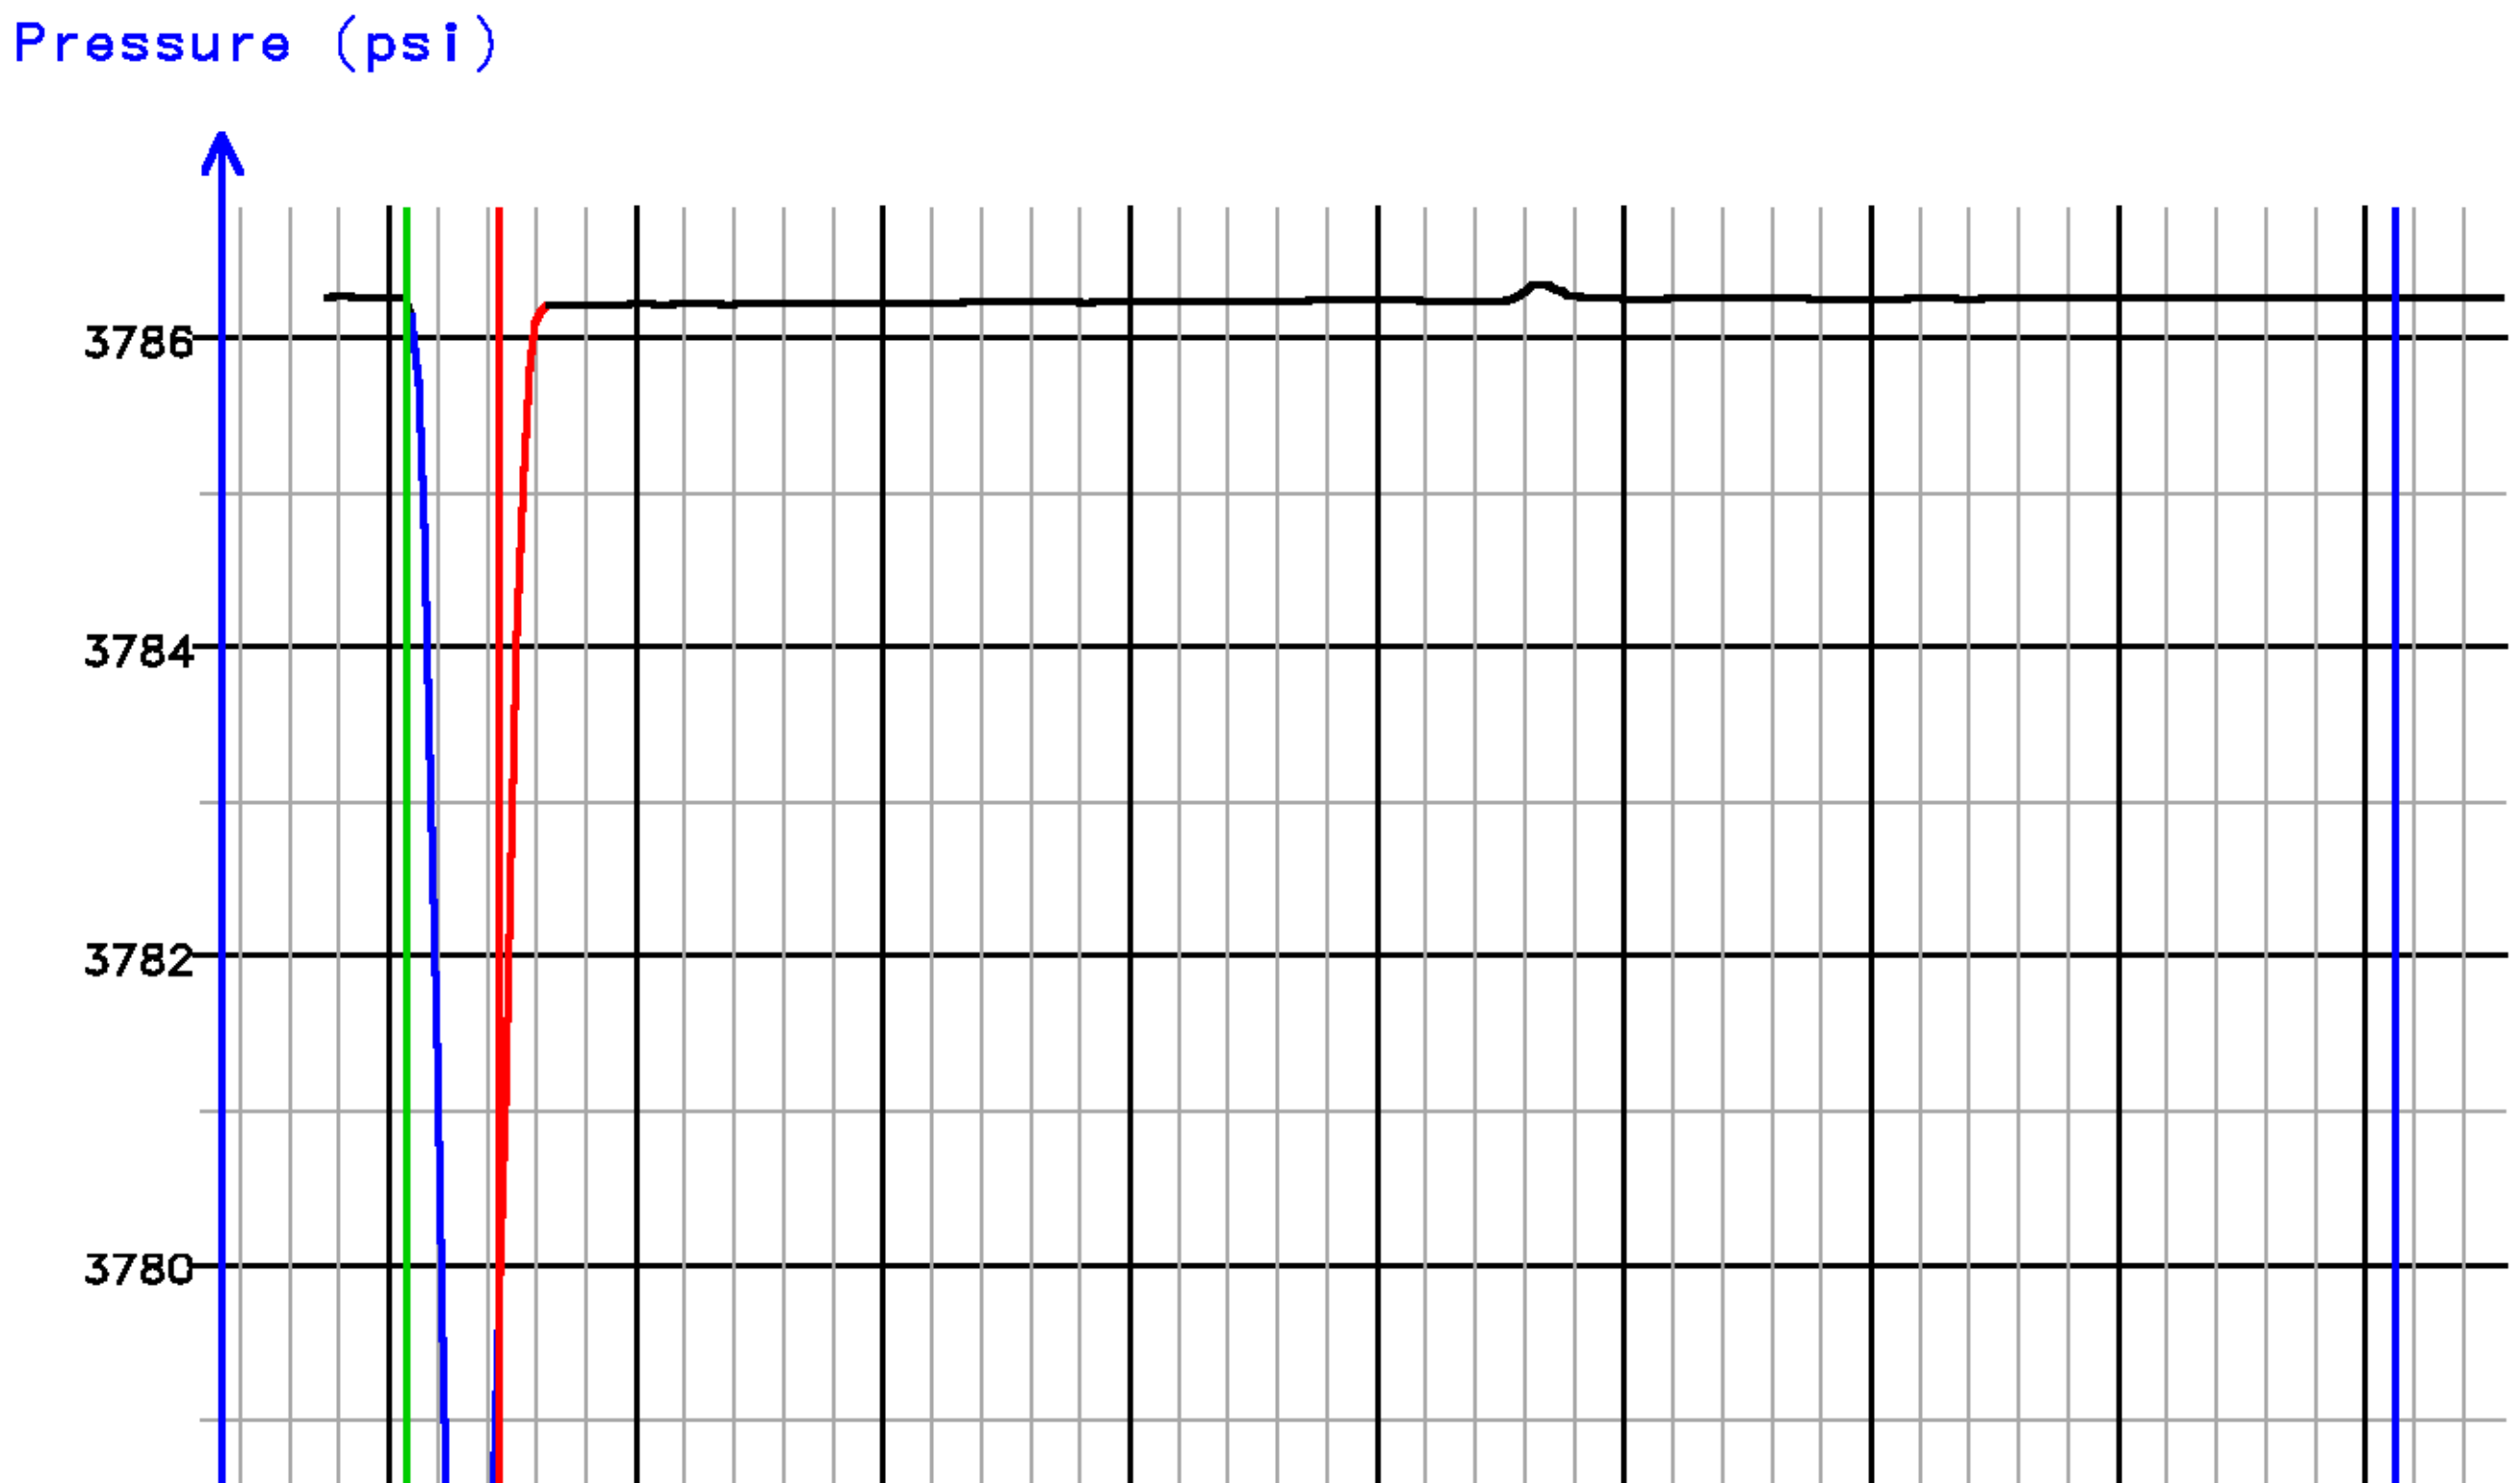

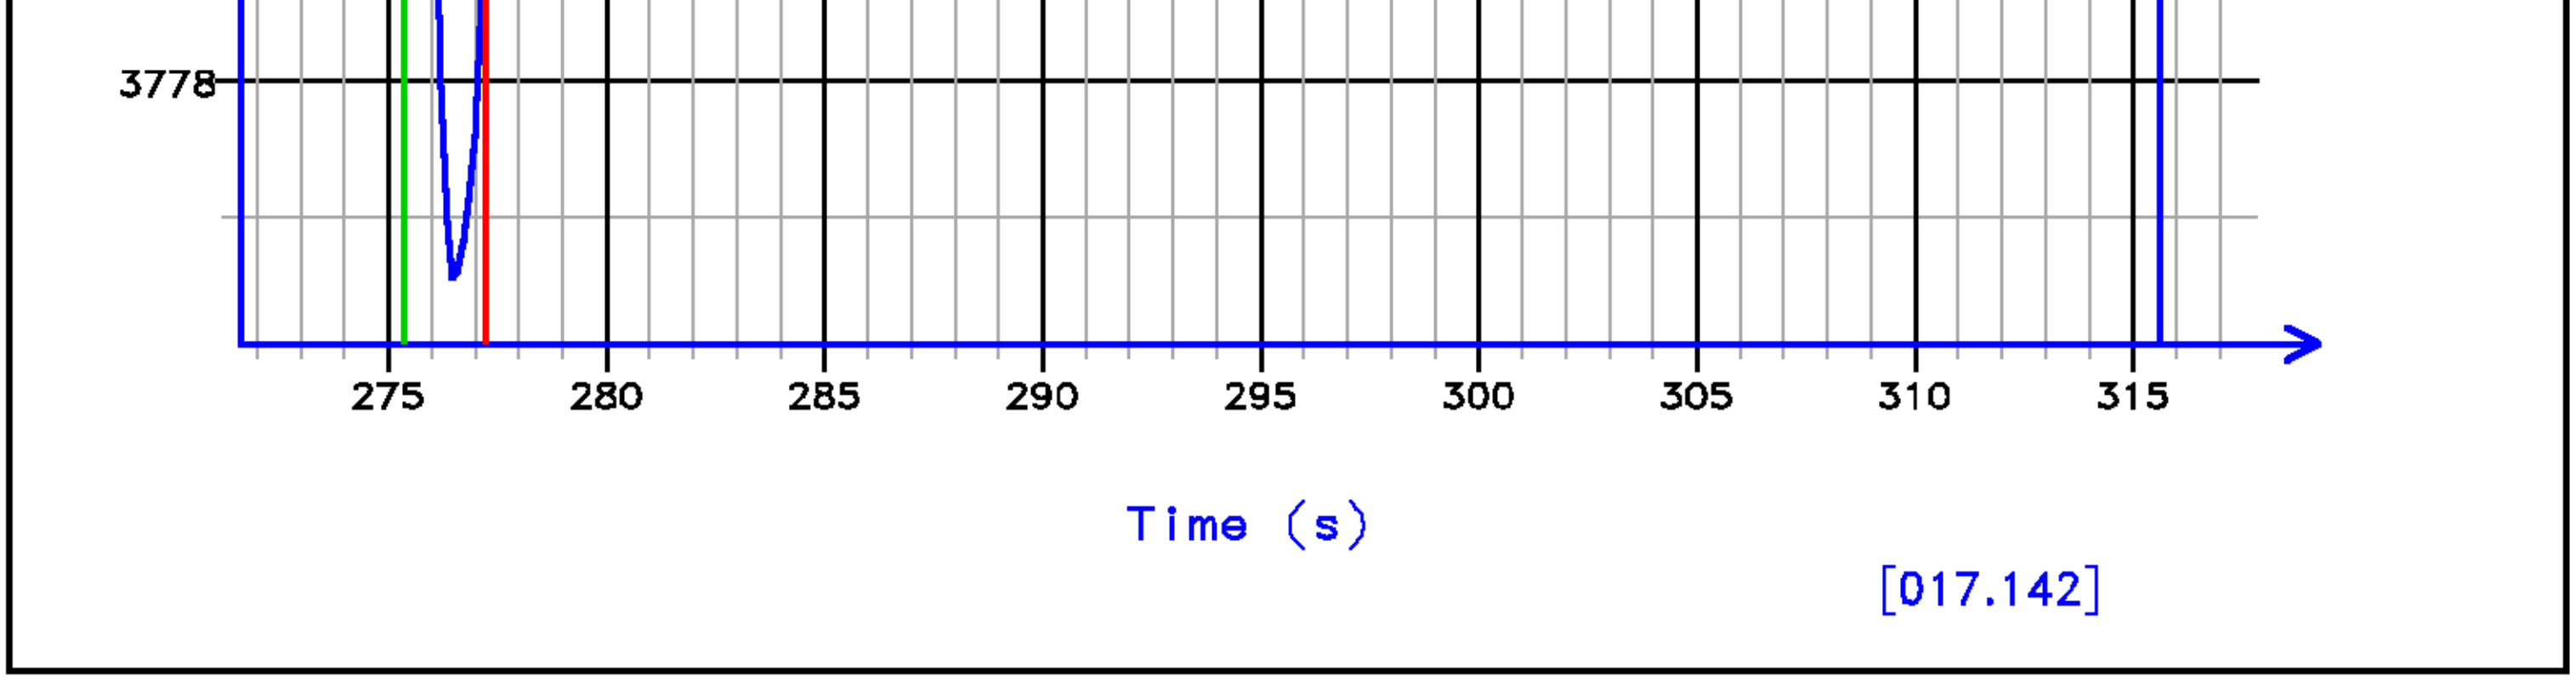

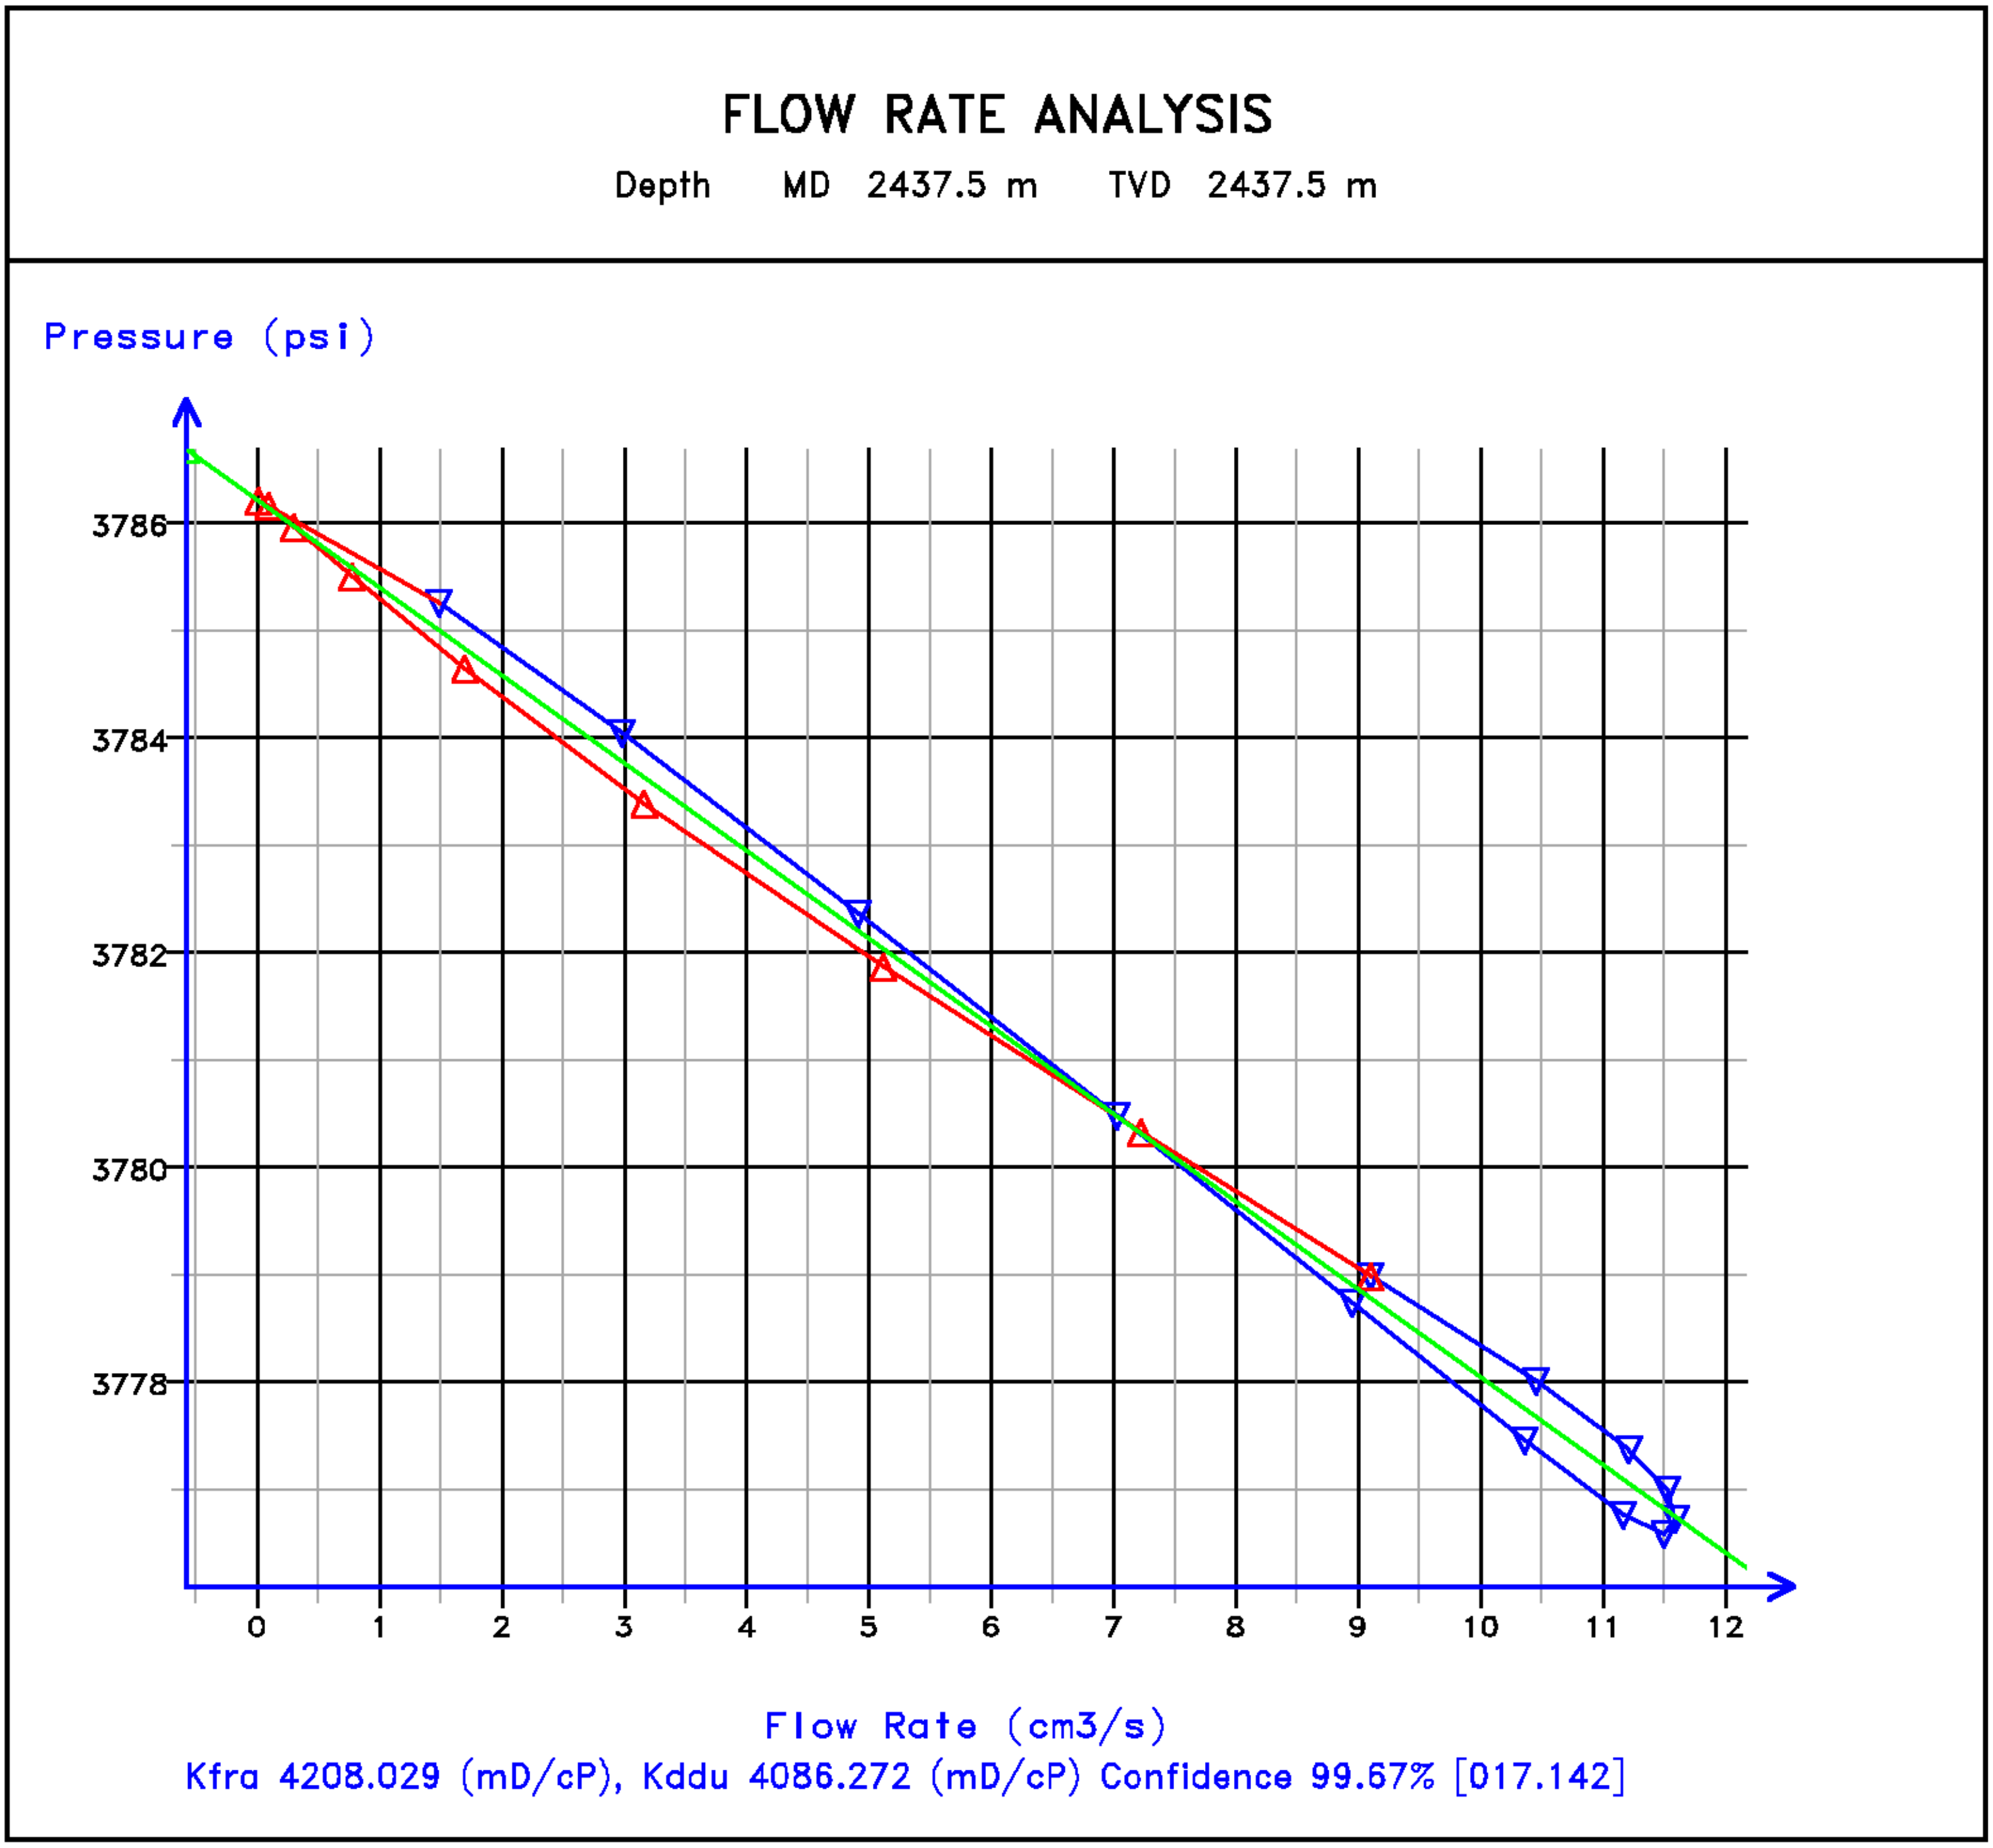

Data File : j800g20.aff
Presentation: gpi_rci-b3xx.log

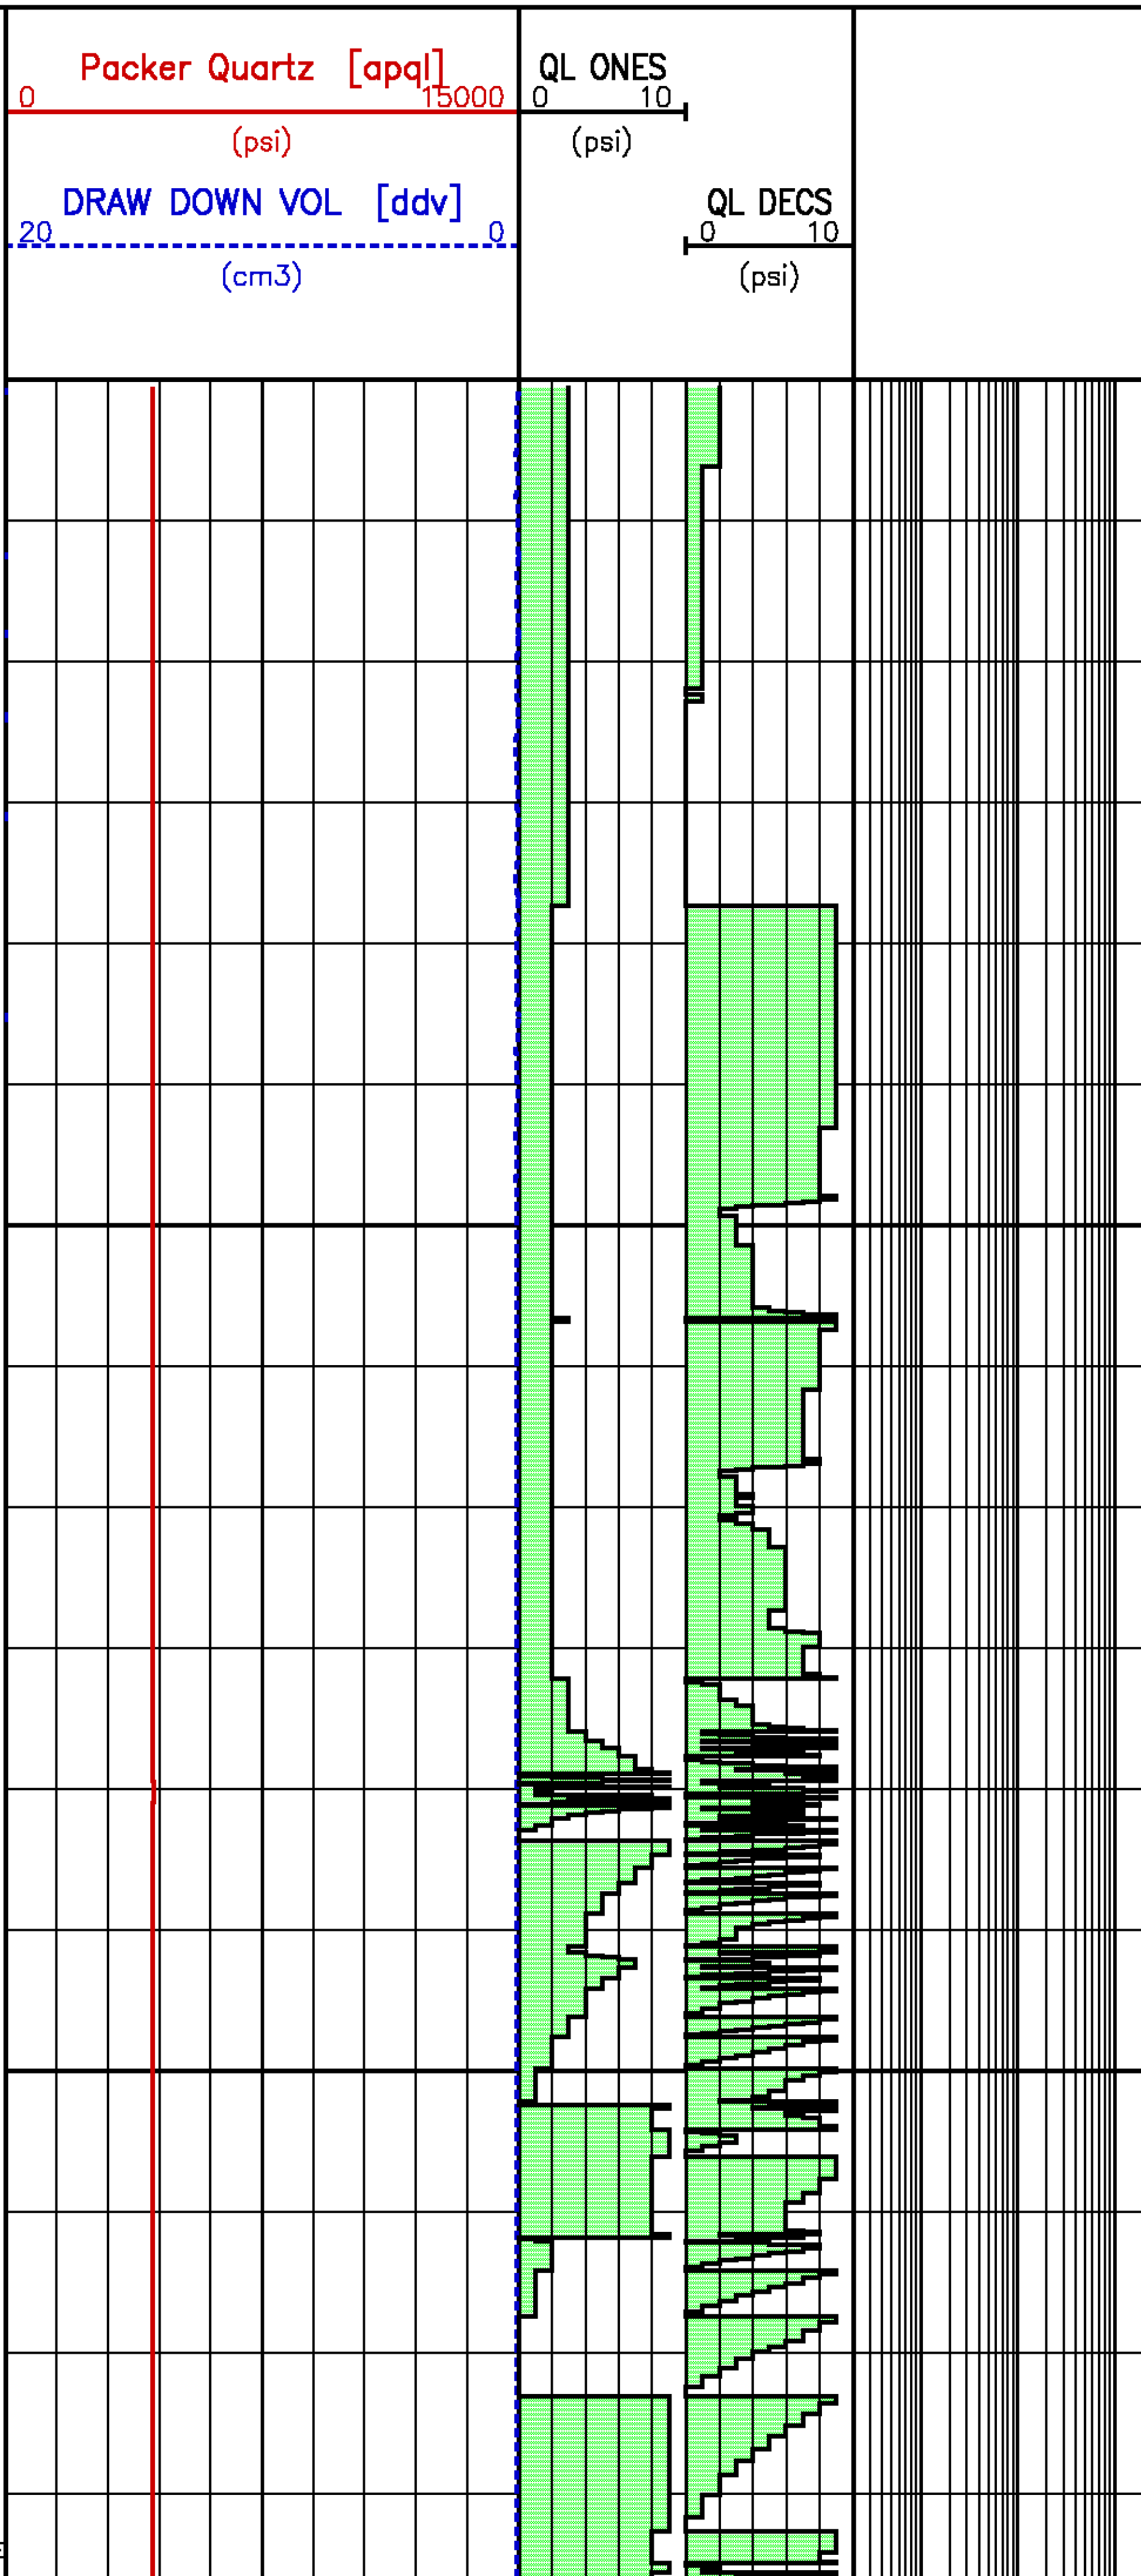

SECONDS	TOOL COMMAND / ANNOTATIONS	APQL (psi)	RTDQL (degF)
0			
		4303.2	193.6
10		4303.2	193.6
		4303.1	193.6
20		4303.1	193.6
		4303.1	193.6
30		4303.0	193.6
		4303.0	193.6
40		4303.0	193.6
		4303.0	193.6
50		4302.9	193.6
	BB[1] OPEN BYPASS VALVE	4302.9	193.6
60		4302.4	193.6
		4302.5	193.6
70		4302.8	193.6
	MB[1] EXTEND PACK 2850	4302.8	193.6
80		4302.4	193.6
		4302.6	193.6
90		4302.8	193.6
		4303.5	193.6
100		4341.7	193.6
		4308.5	193.6
110		4304.3	193.6
		4304.4	193.6
120	MB[1] RECHARGE 2850	4301.9	193.6
		4299.3	193.6
130		4298.6	193.6
		4301.7	193.6
140		4300.5	193.6
		4299.7	193.6
150		4299.2	193.6
	BB[1] CLOSE BYPASS VALVE	4299.1	193.6

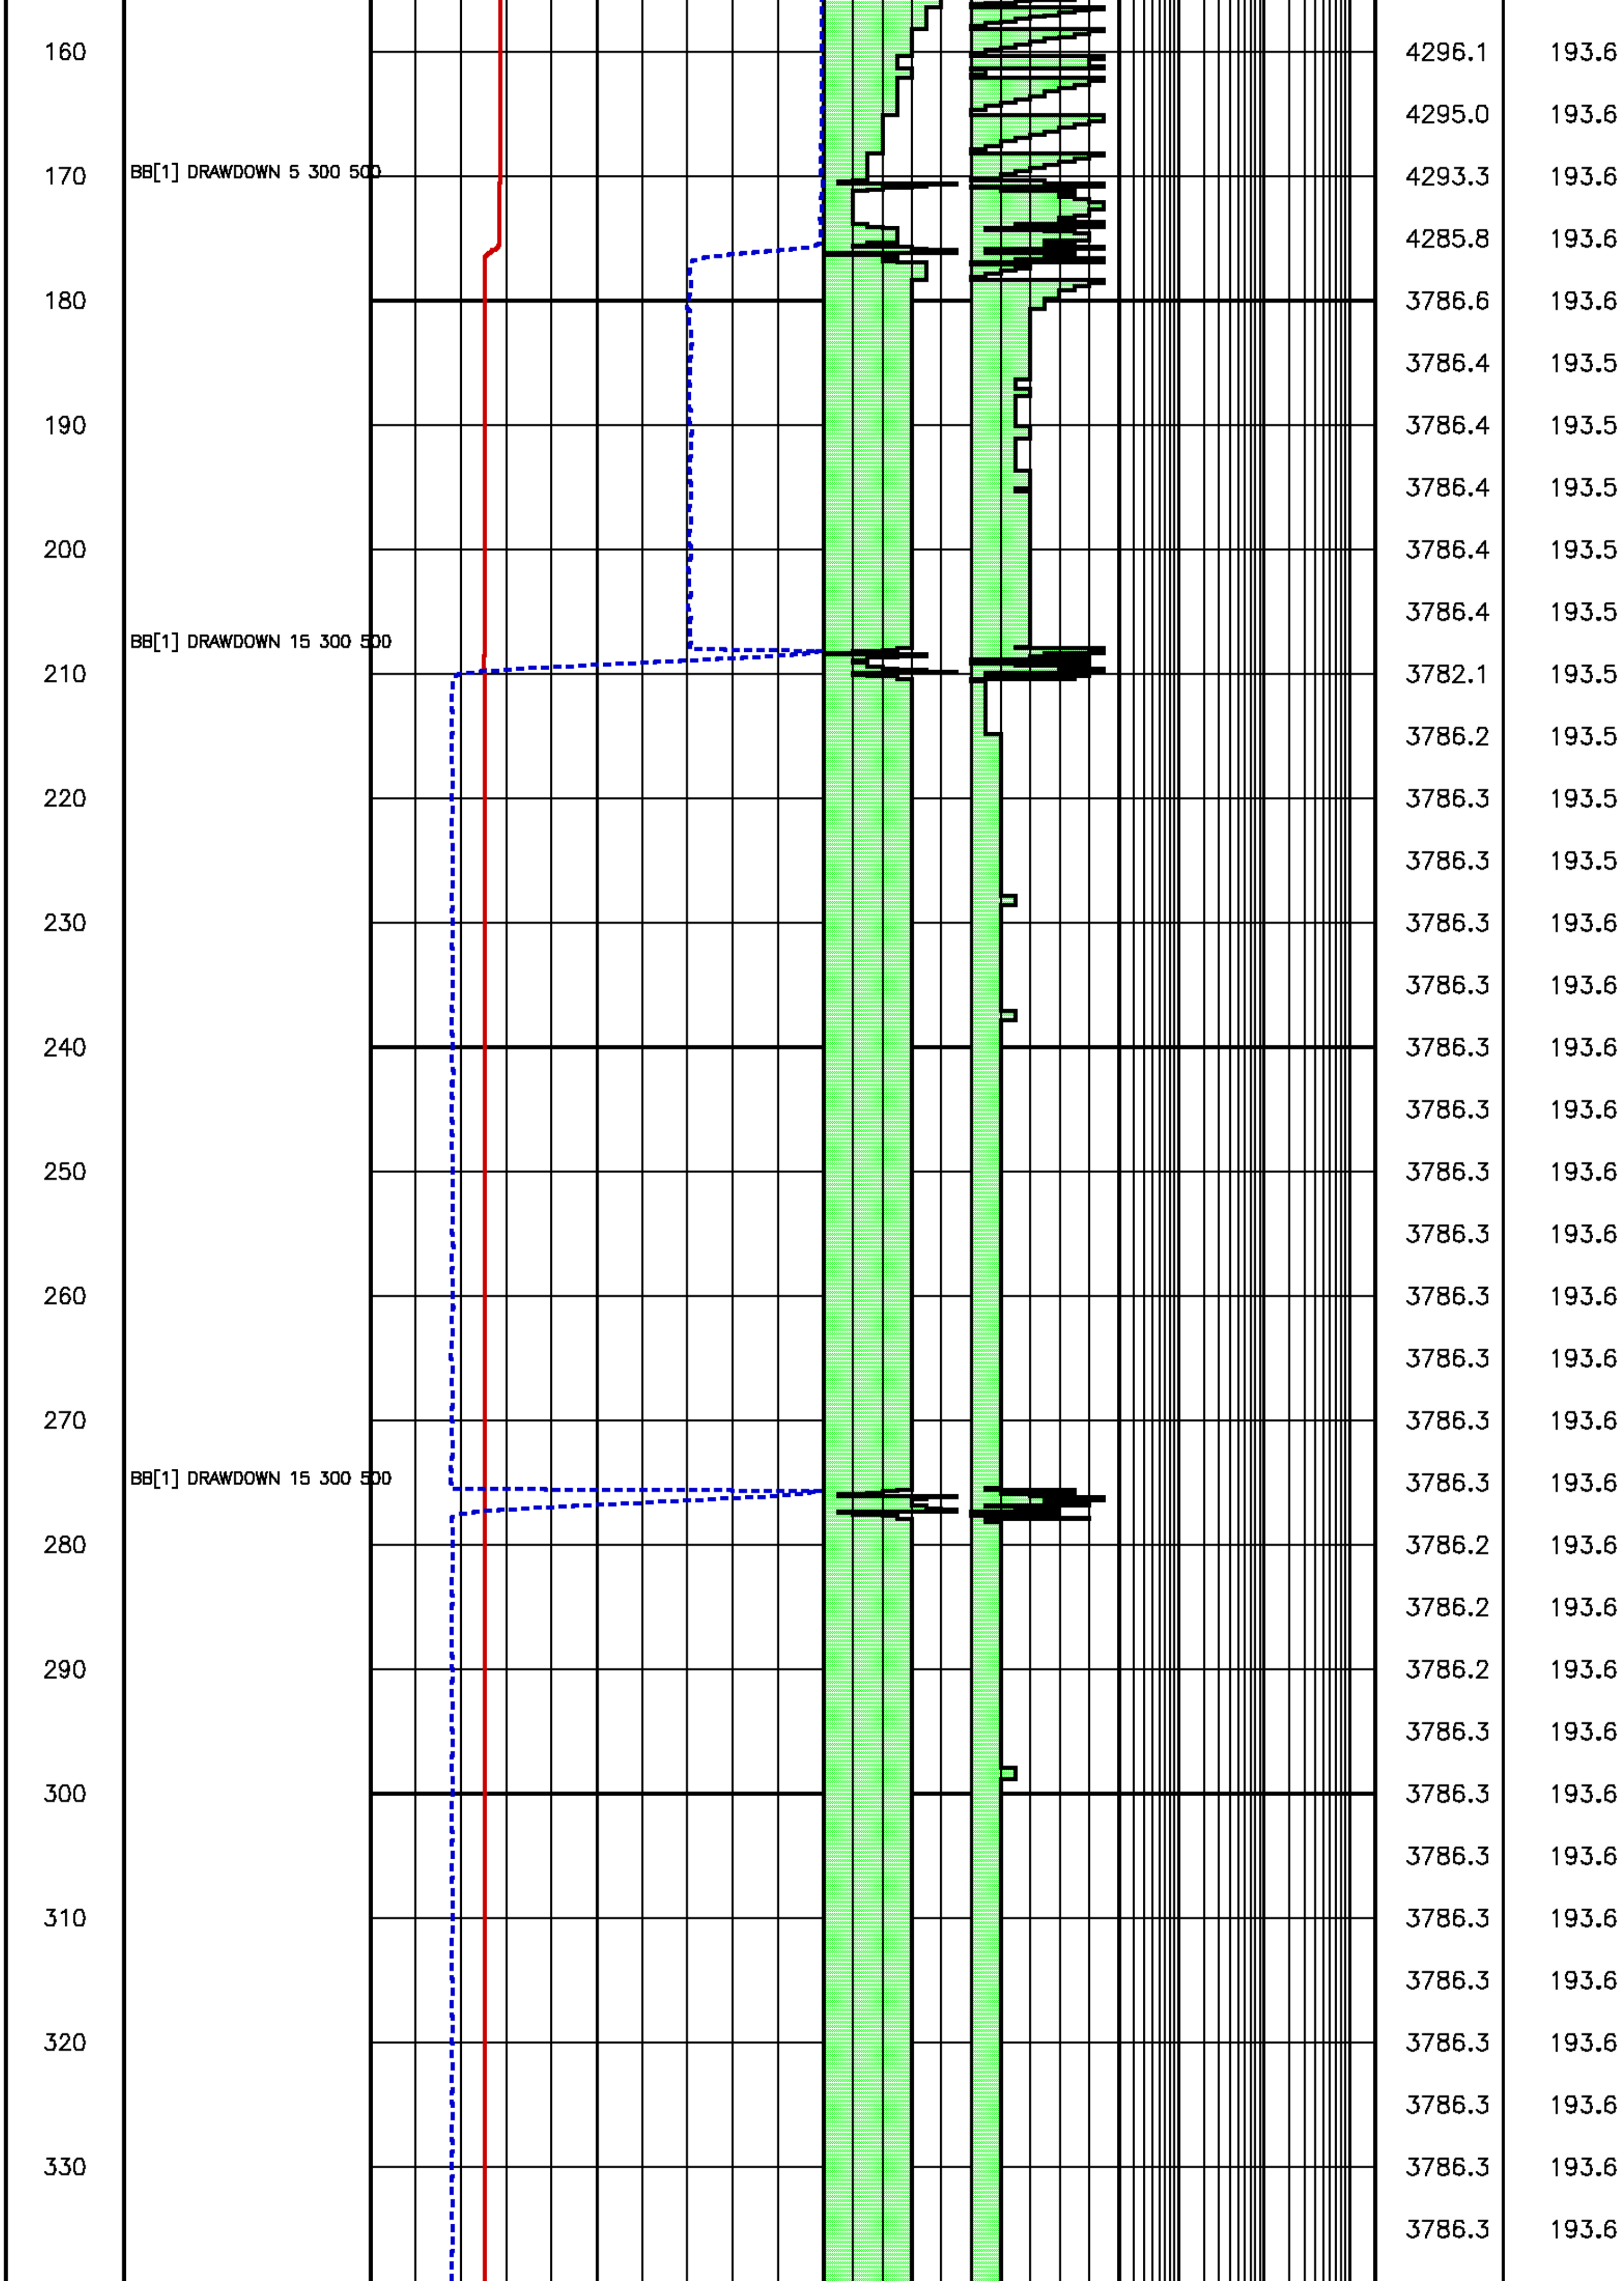
160 4296.1 193.6
4295.0 193.6
BB[1] DRAWDOWN 5 300 500
170 4293.3 193.6
4285.8 193.6
180 3786.6 193.6
3786.4 193.5
190 3786.4 193.5
3786.4 193.5
200 3786.4 193.5
3786.4 193.5
BB[1] DRAWDOWN 15 300 500
210 3782.1 193.5
3786.2 193.5
220 3786.3 193.5
3786.3 193.5
230 3786.3 193.6
3786.3 193.6
240 3786.3 193.6
3786.3 193.6
250 3786.3 193.6
3786.3 193.6
260 3786.3 193.6
3786.3 193.6
270 3786.3 193.6
BB[1] DRAWDOWN 15 300 500
3786.3 193.6
280 3786.2 193.6
3786.2 193.6
290 3786.2 193.6
3786.3 193.6
300 3786.3 193.6
3786.3 193.6
310 3786.3 193.6
3786.3 193.6
320 3786.3 193.6
3786.3 193.6
330 3786.3 193.6
3786.3 193.6

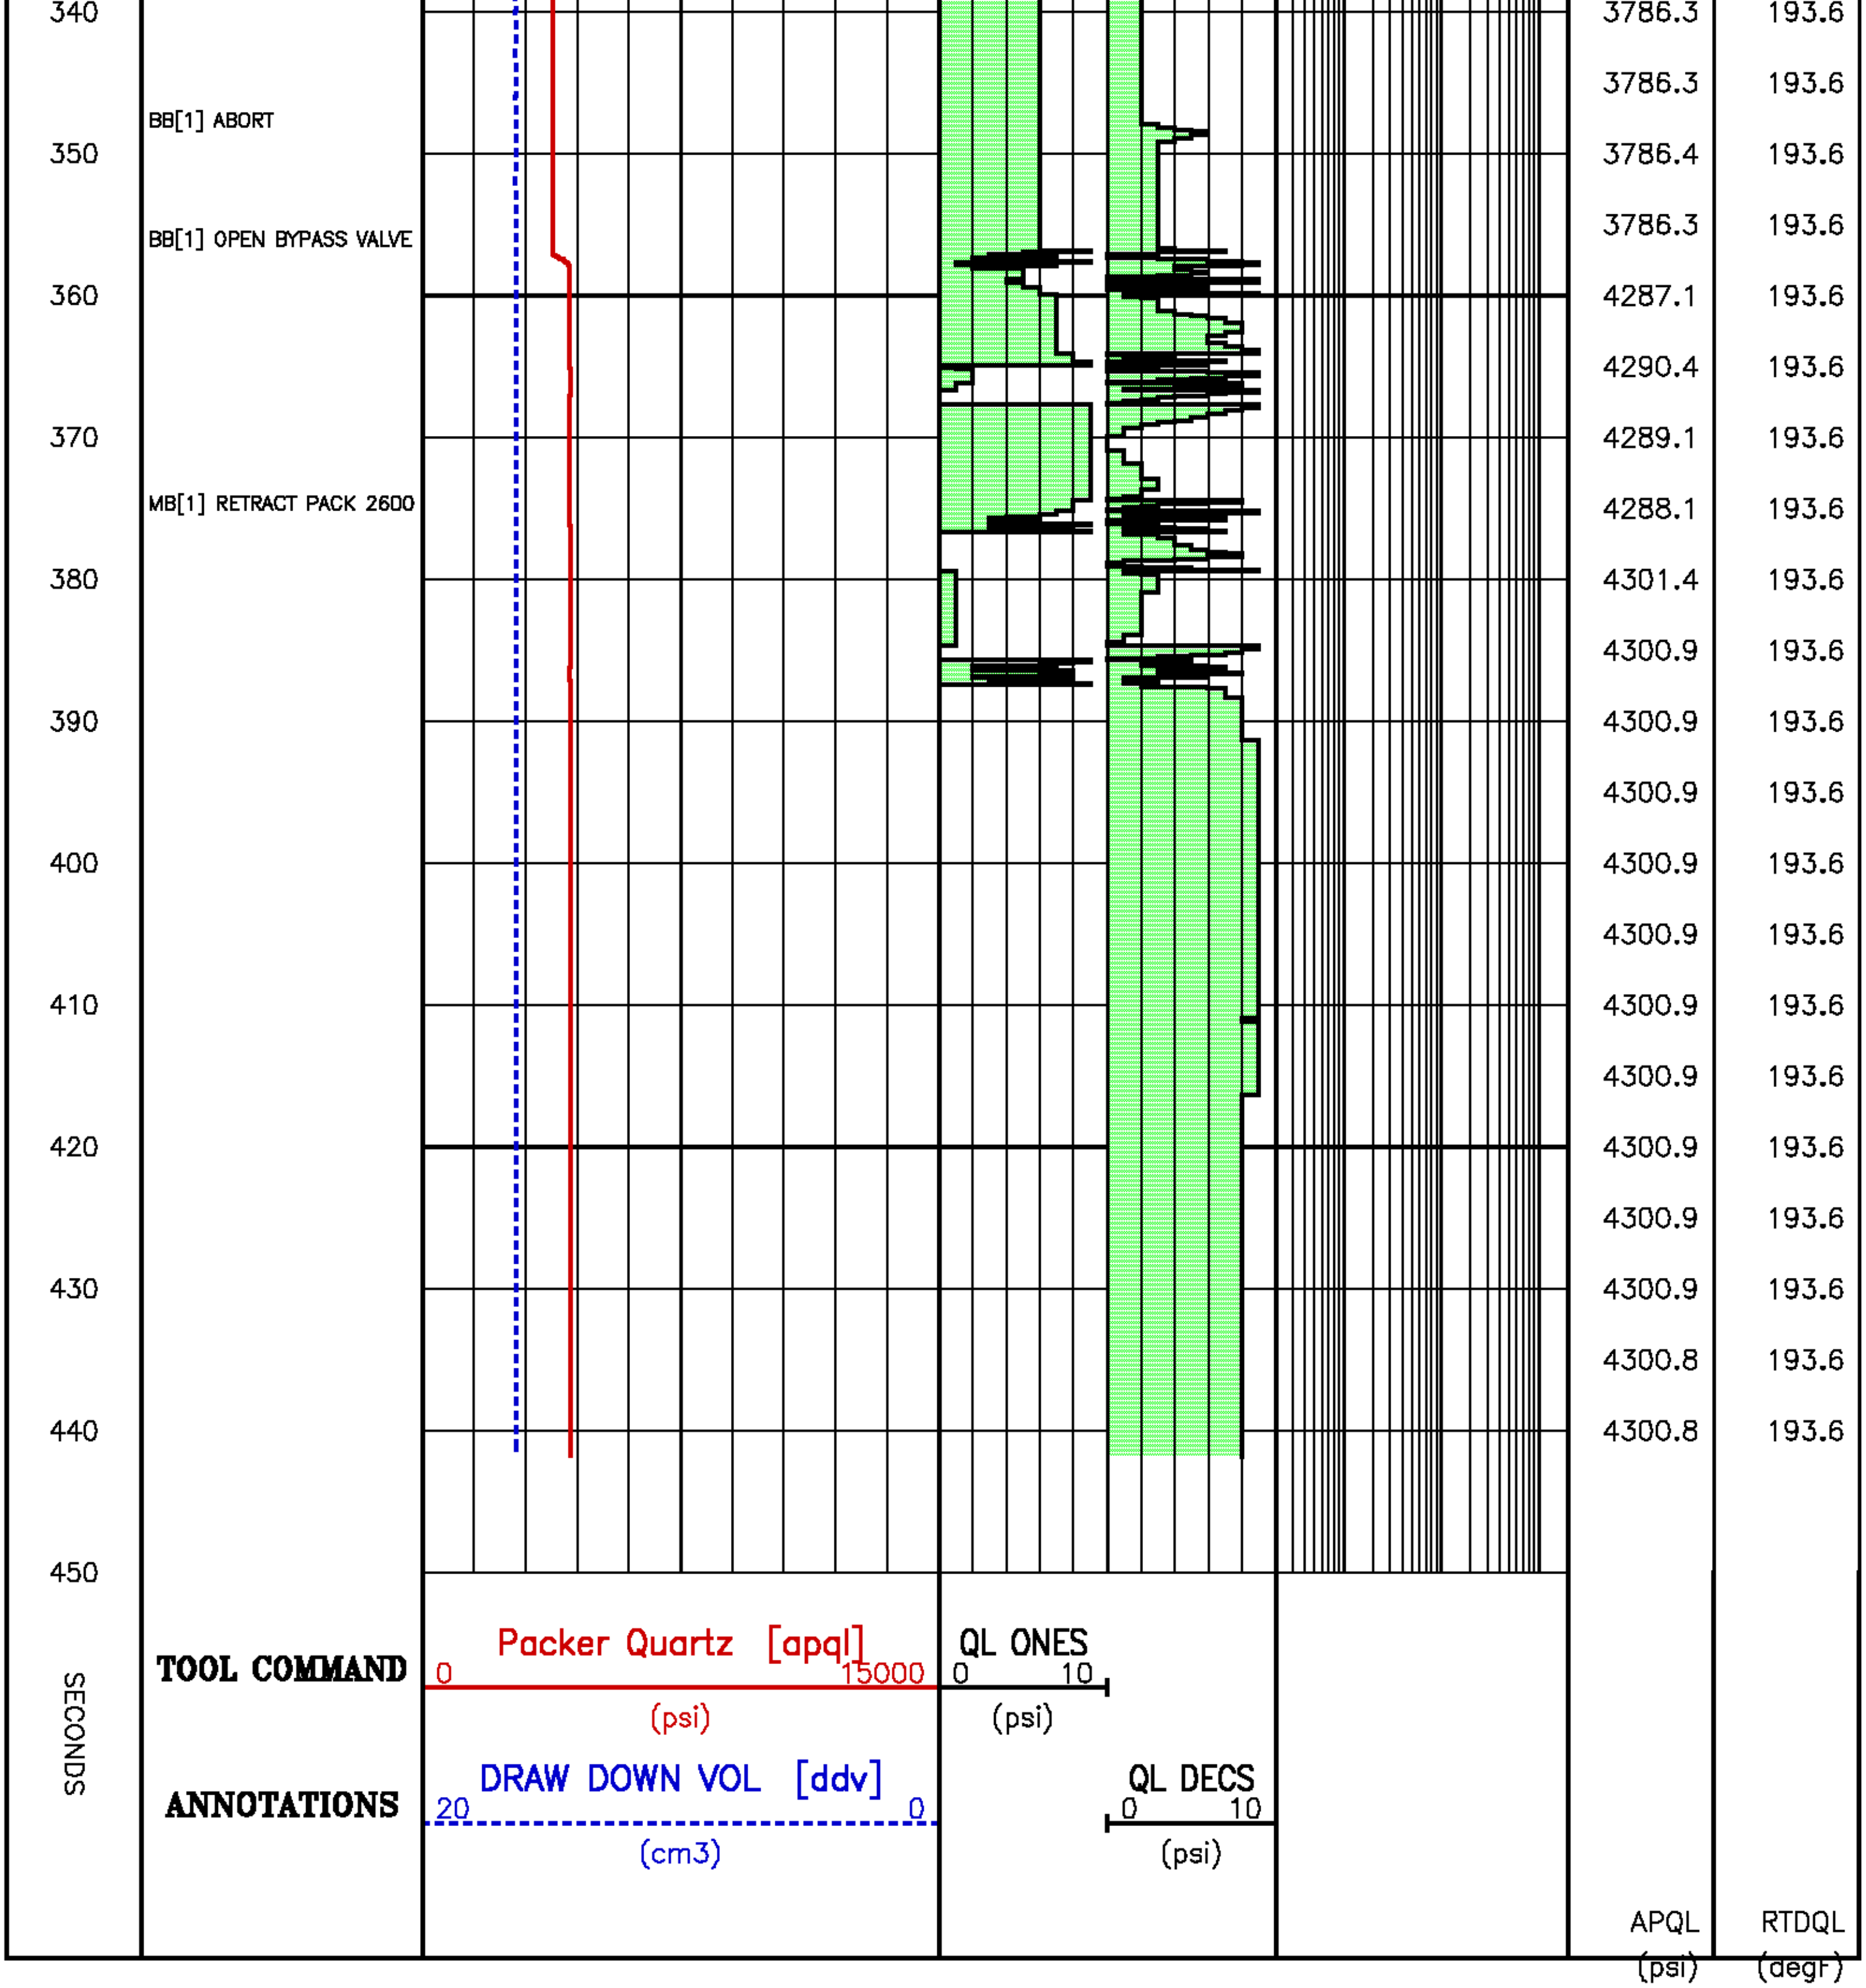

Pressure Tests – Level 18 Tool Instance 1

MD 2454.6 m TVD 2454.6 m

PRESSURE HISTORY

PRESSURE HISTORY

Depth MD 2454.6 m TVD 2454.6 m

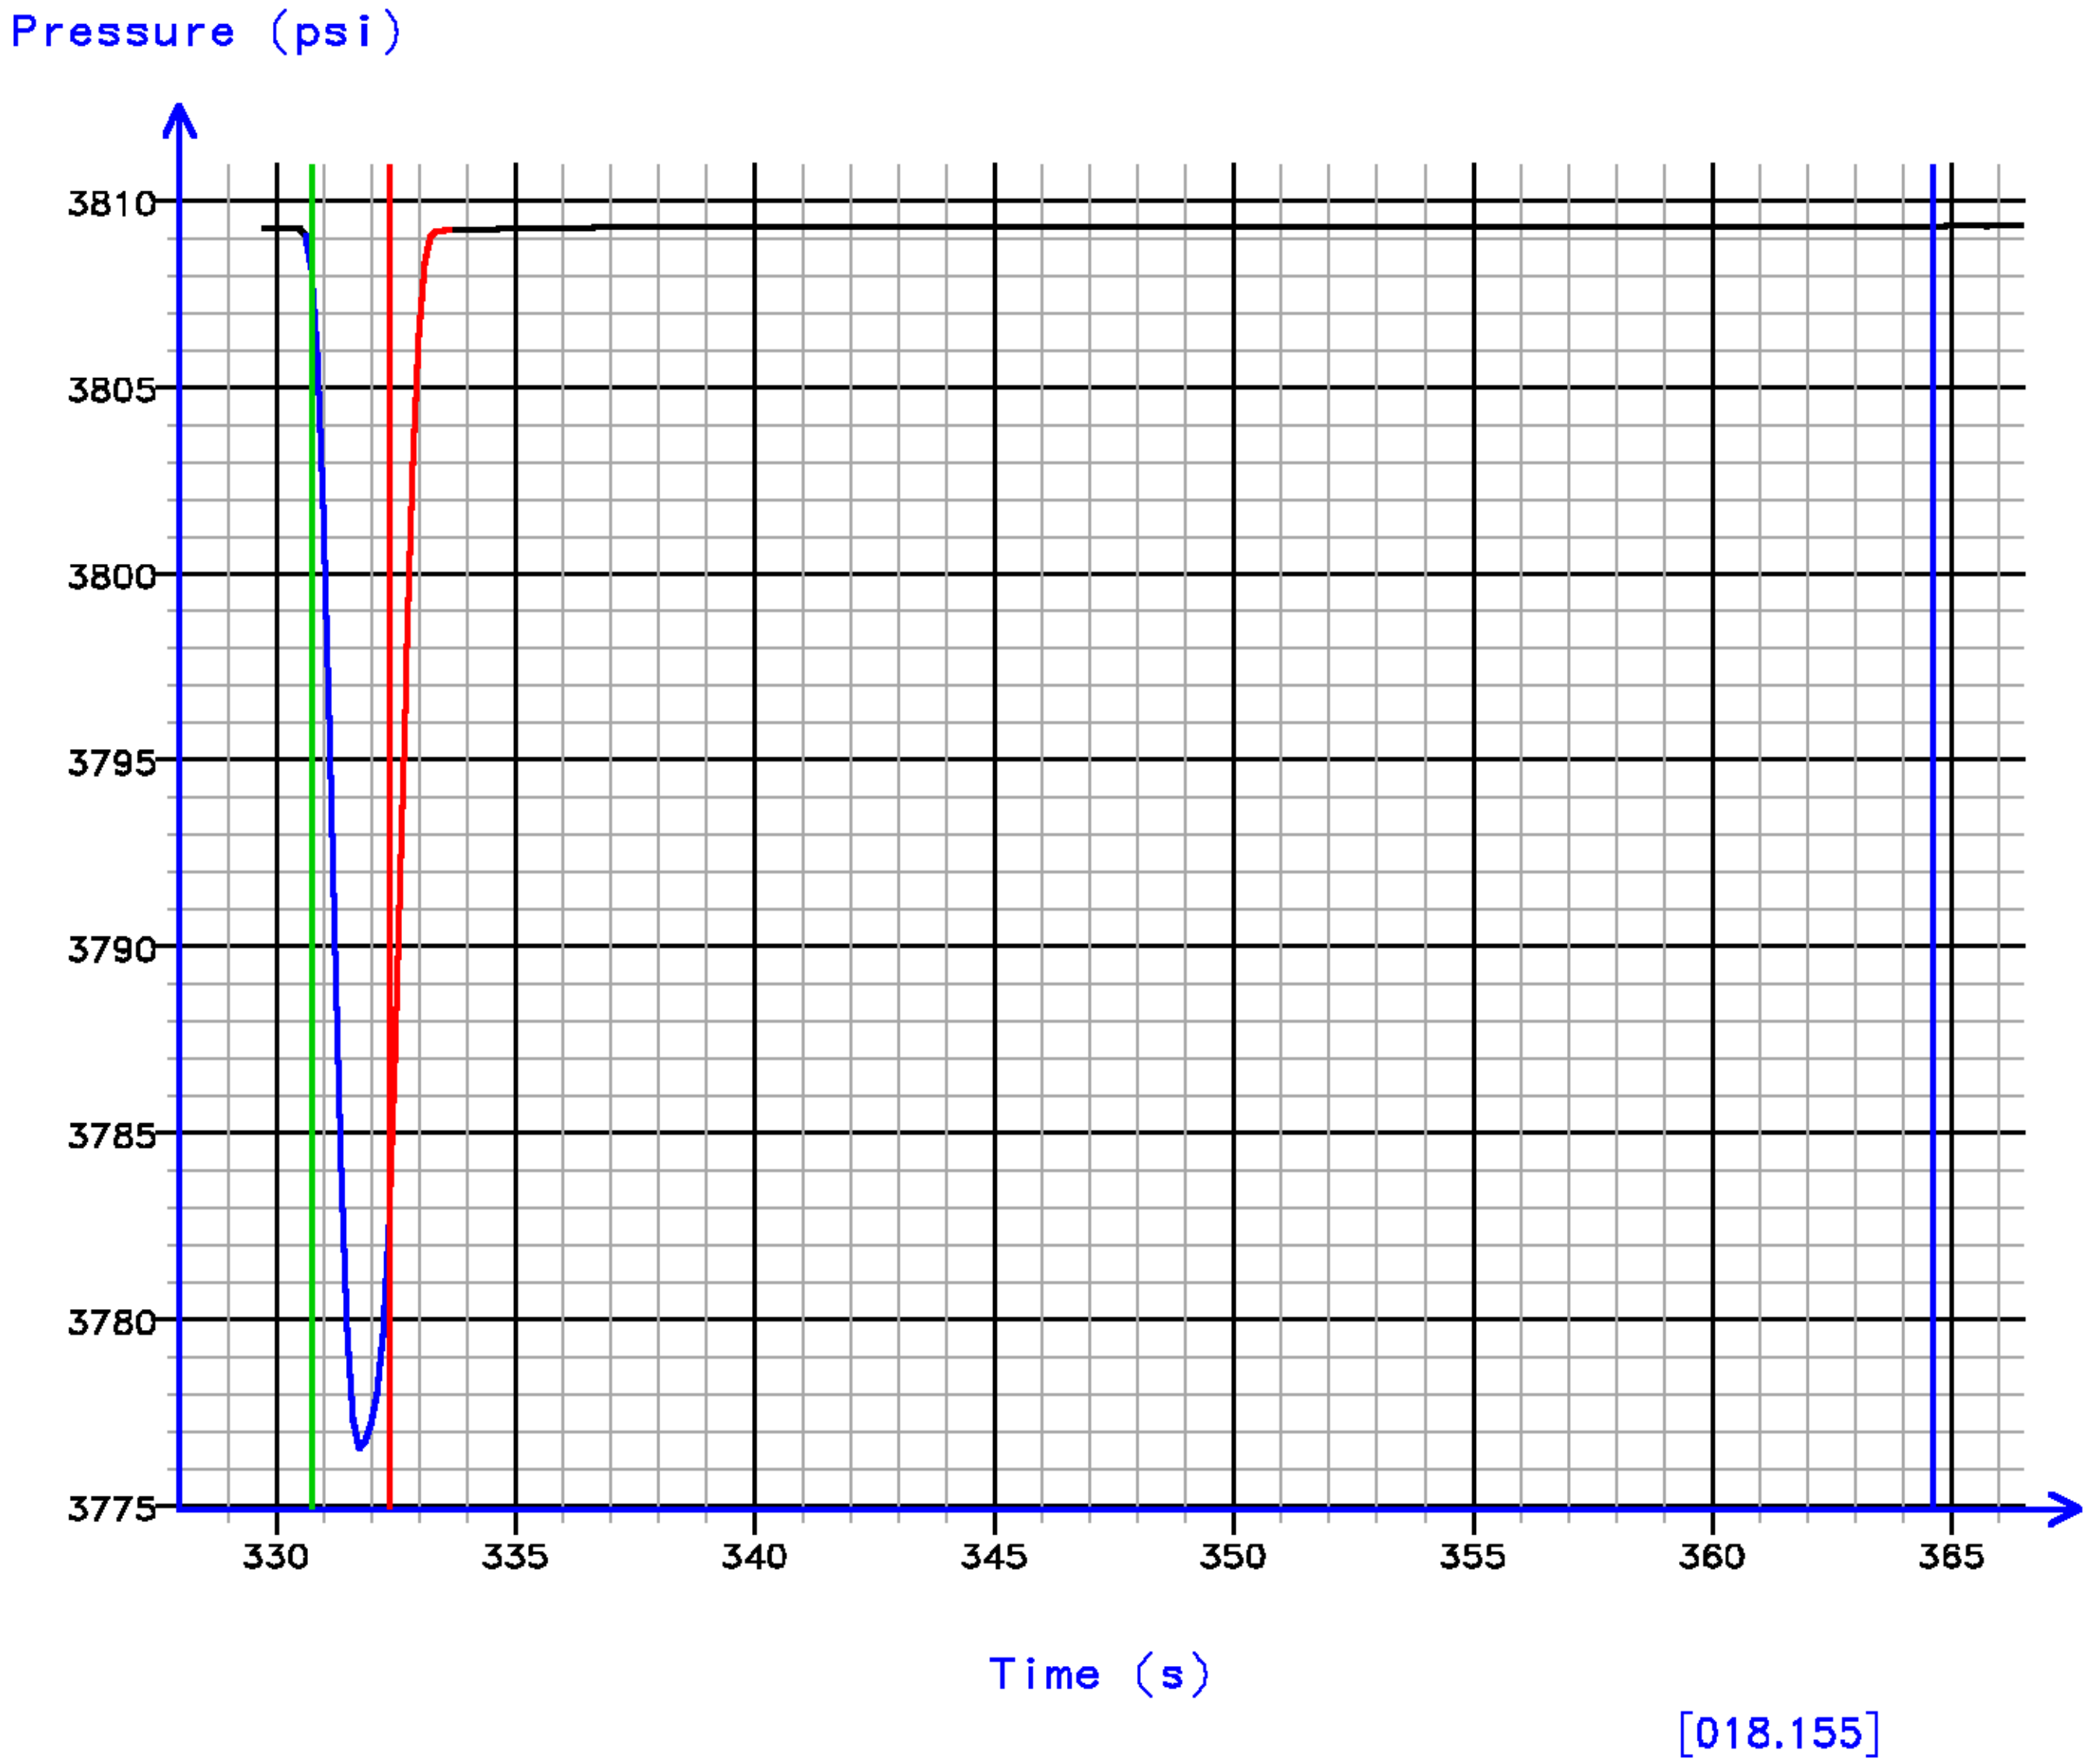

FLOW RATE ANALYSIS

Depth MD 2454.6 m TVD 2454.6 m

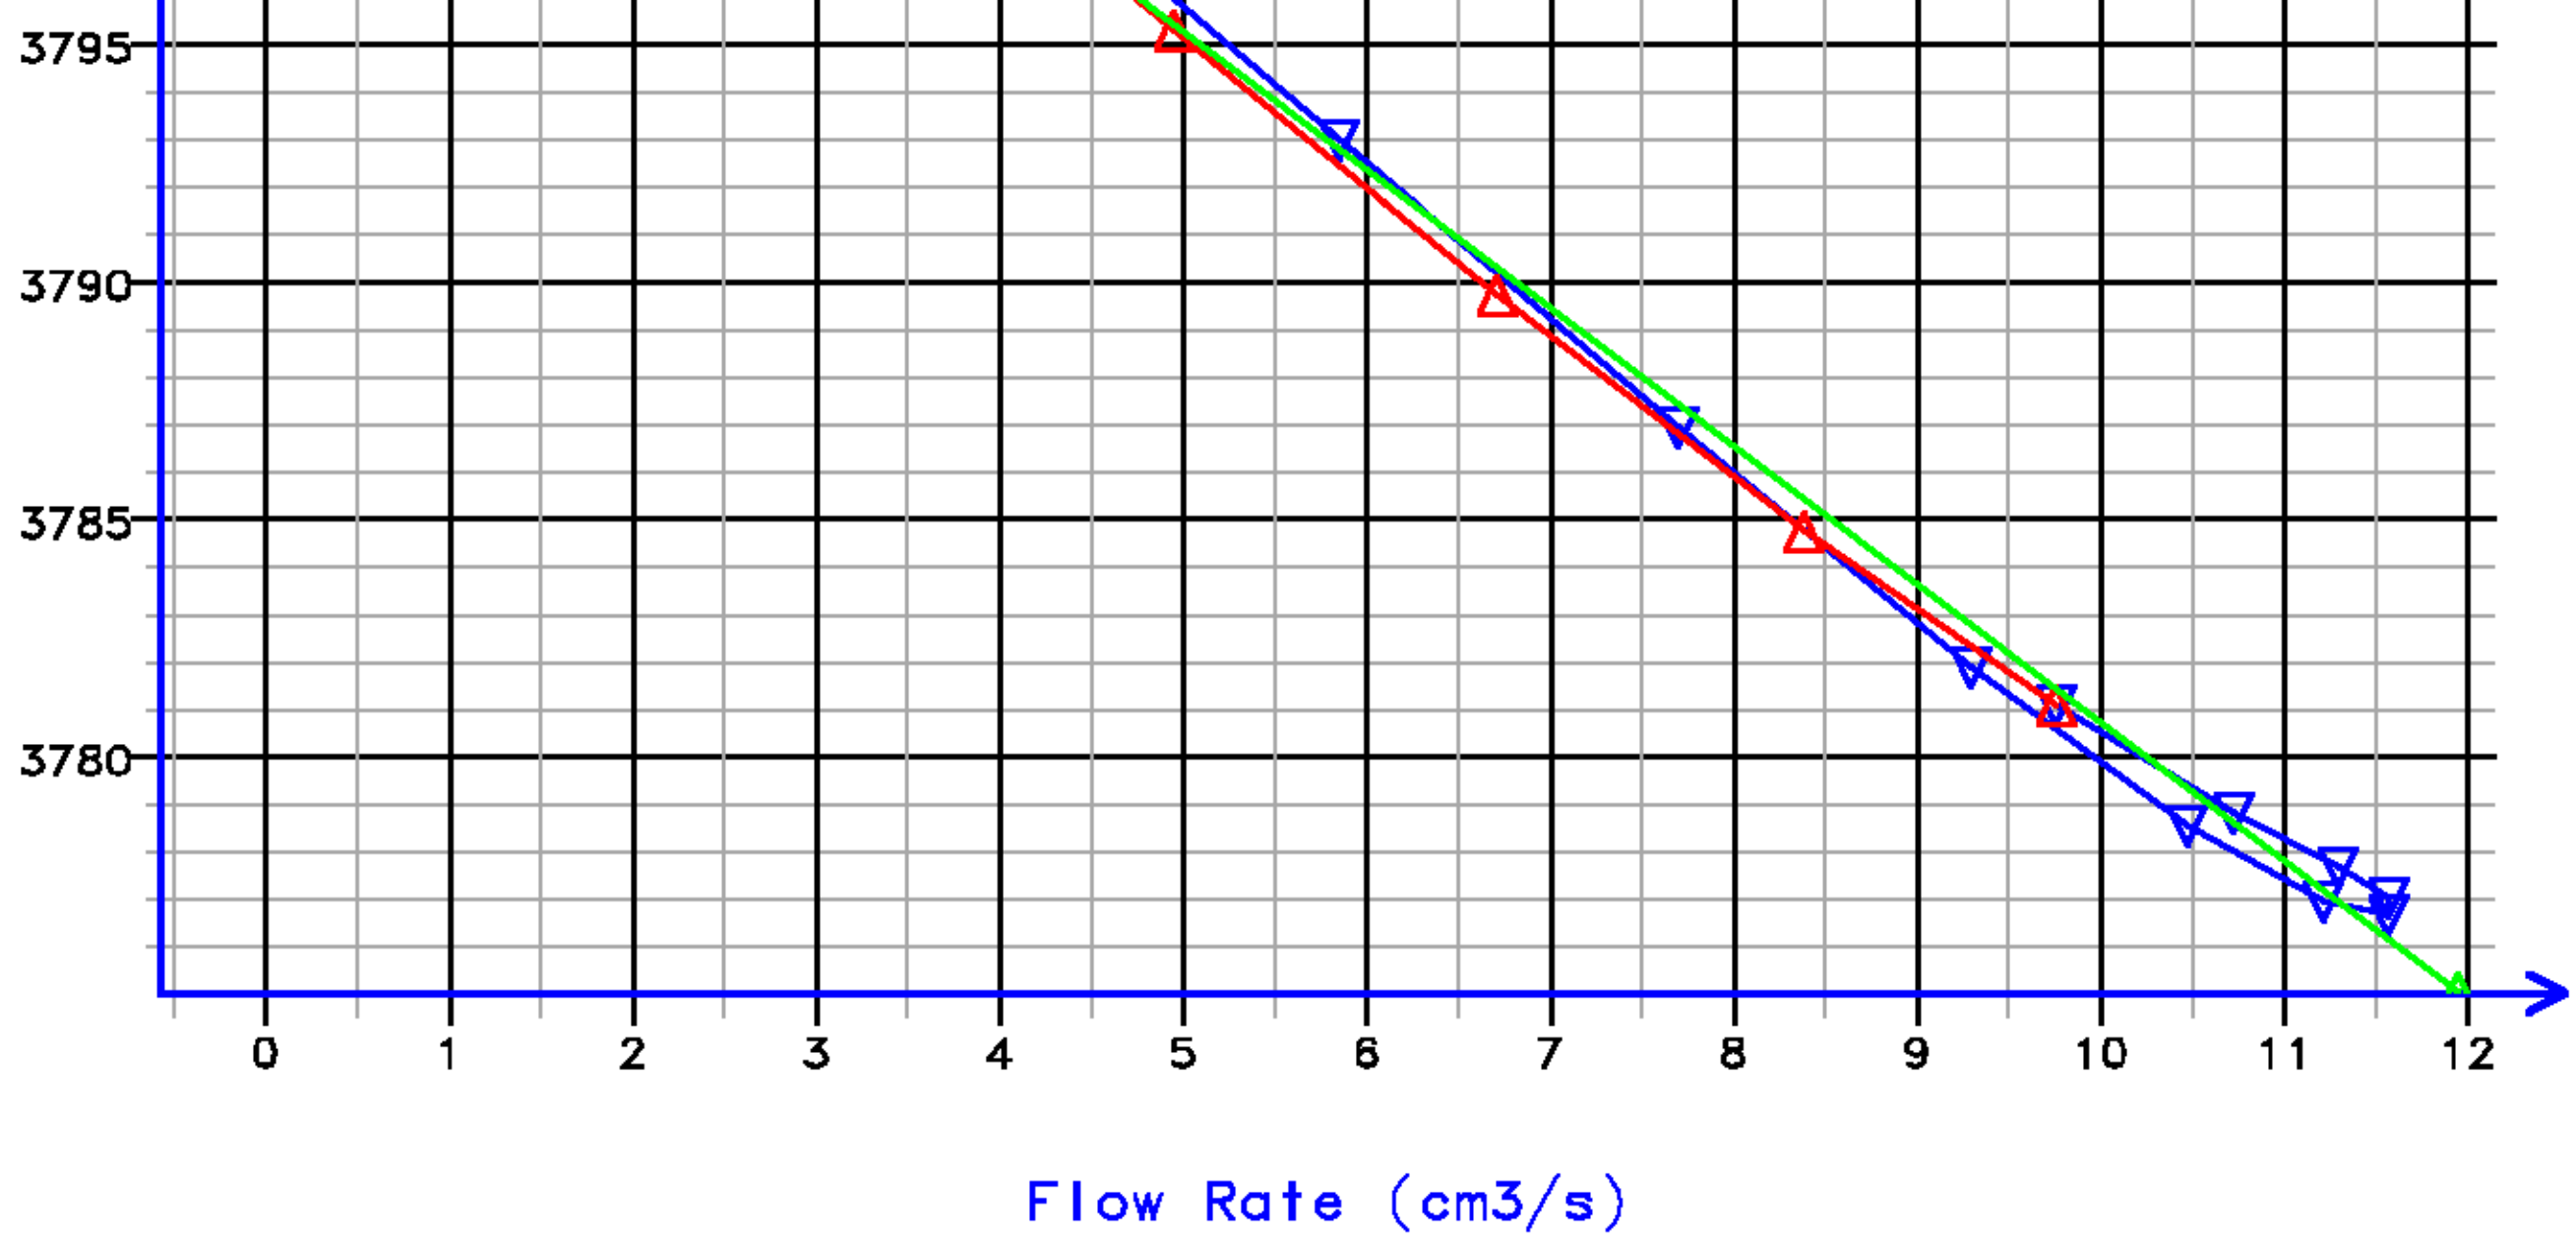

Kfra 1181.827 (mD/cP), Kddu 1209.961 (mD/cP) Confidence 99.76% [018.155]

Data File : j800g22.aff
Presentation: gpi_rci-b3xx.log

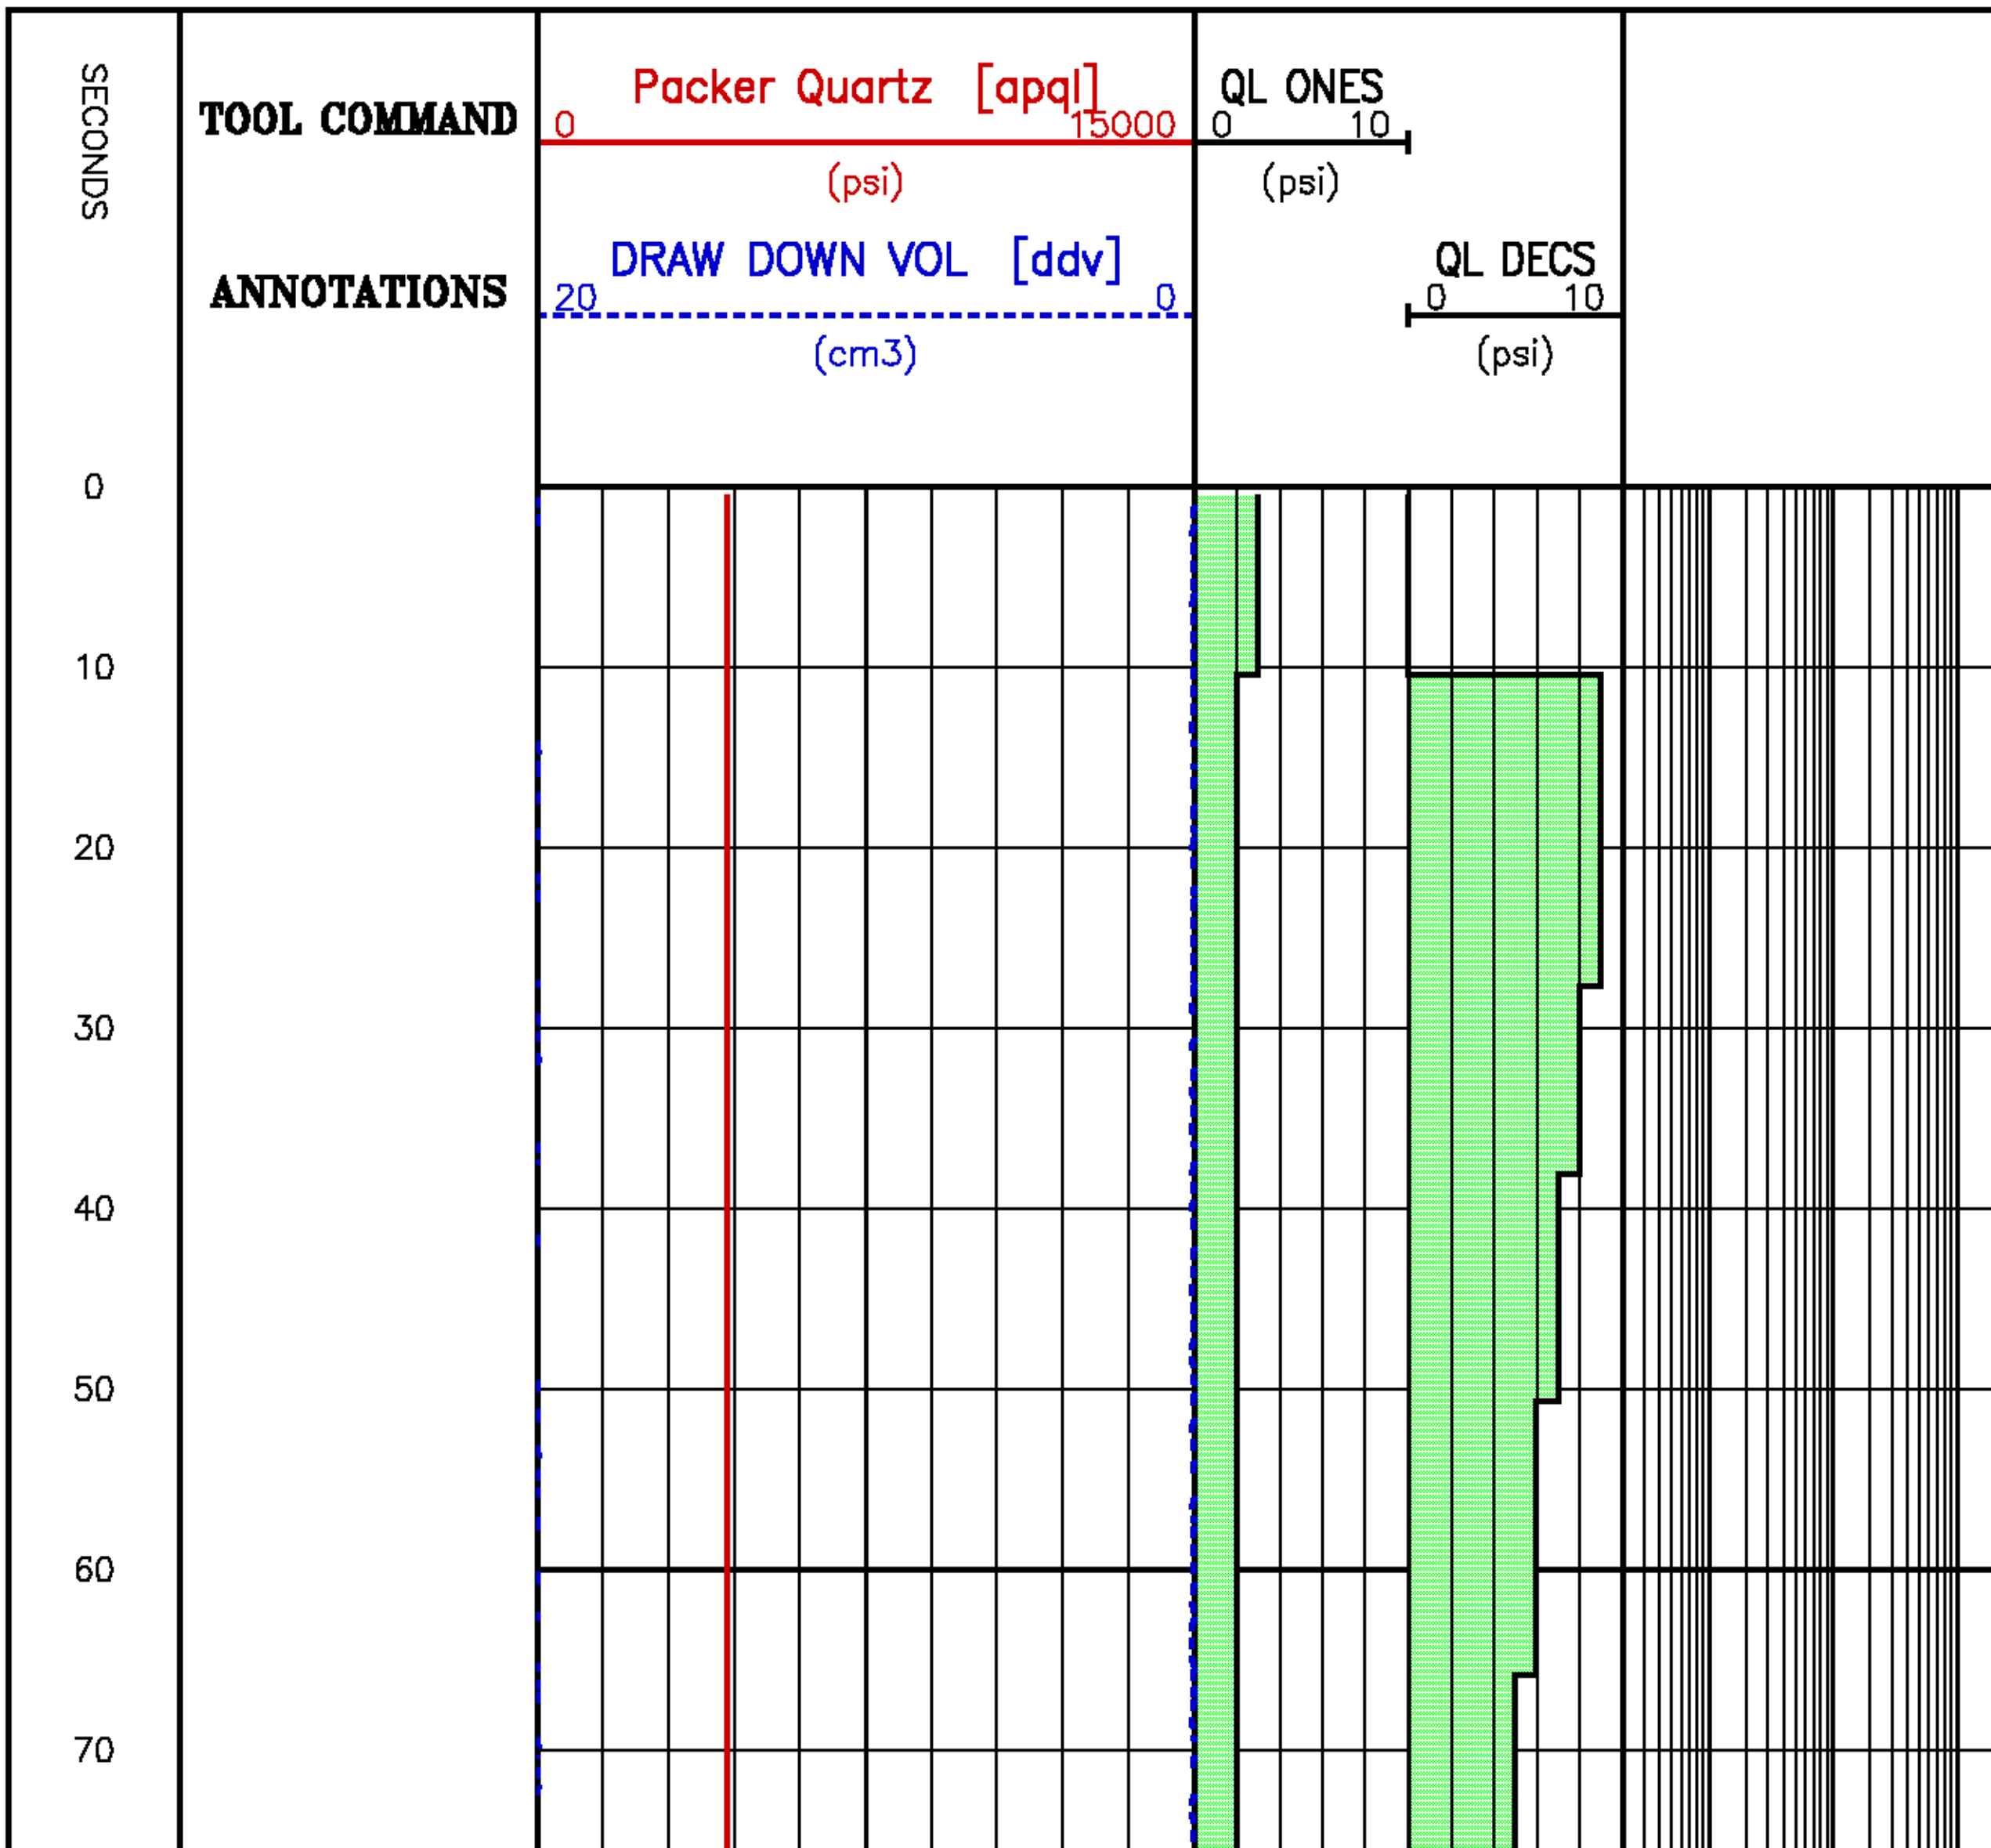

APQL (psi)	RTDQL (degF)
4333.0	194.1
4333.0	194.1
4333.0	194.1
4333.0	194.1
4332.9	194.1
4332.9	194.1
4332.8	194.2
4332.8	194.2
4332.7	194.2
4332.7	194.2
4332.7	194.2
4332.6	194.2
4332.6	194.2
4332.6	194.2
4332.6	194.2

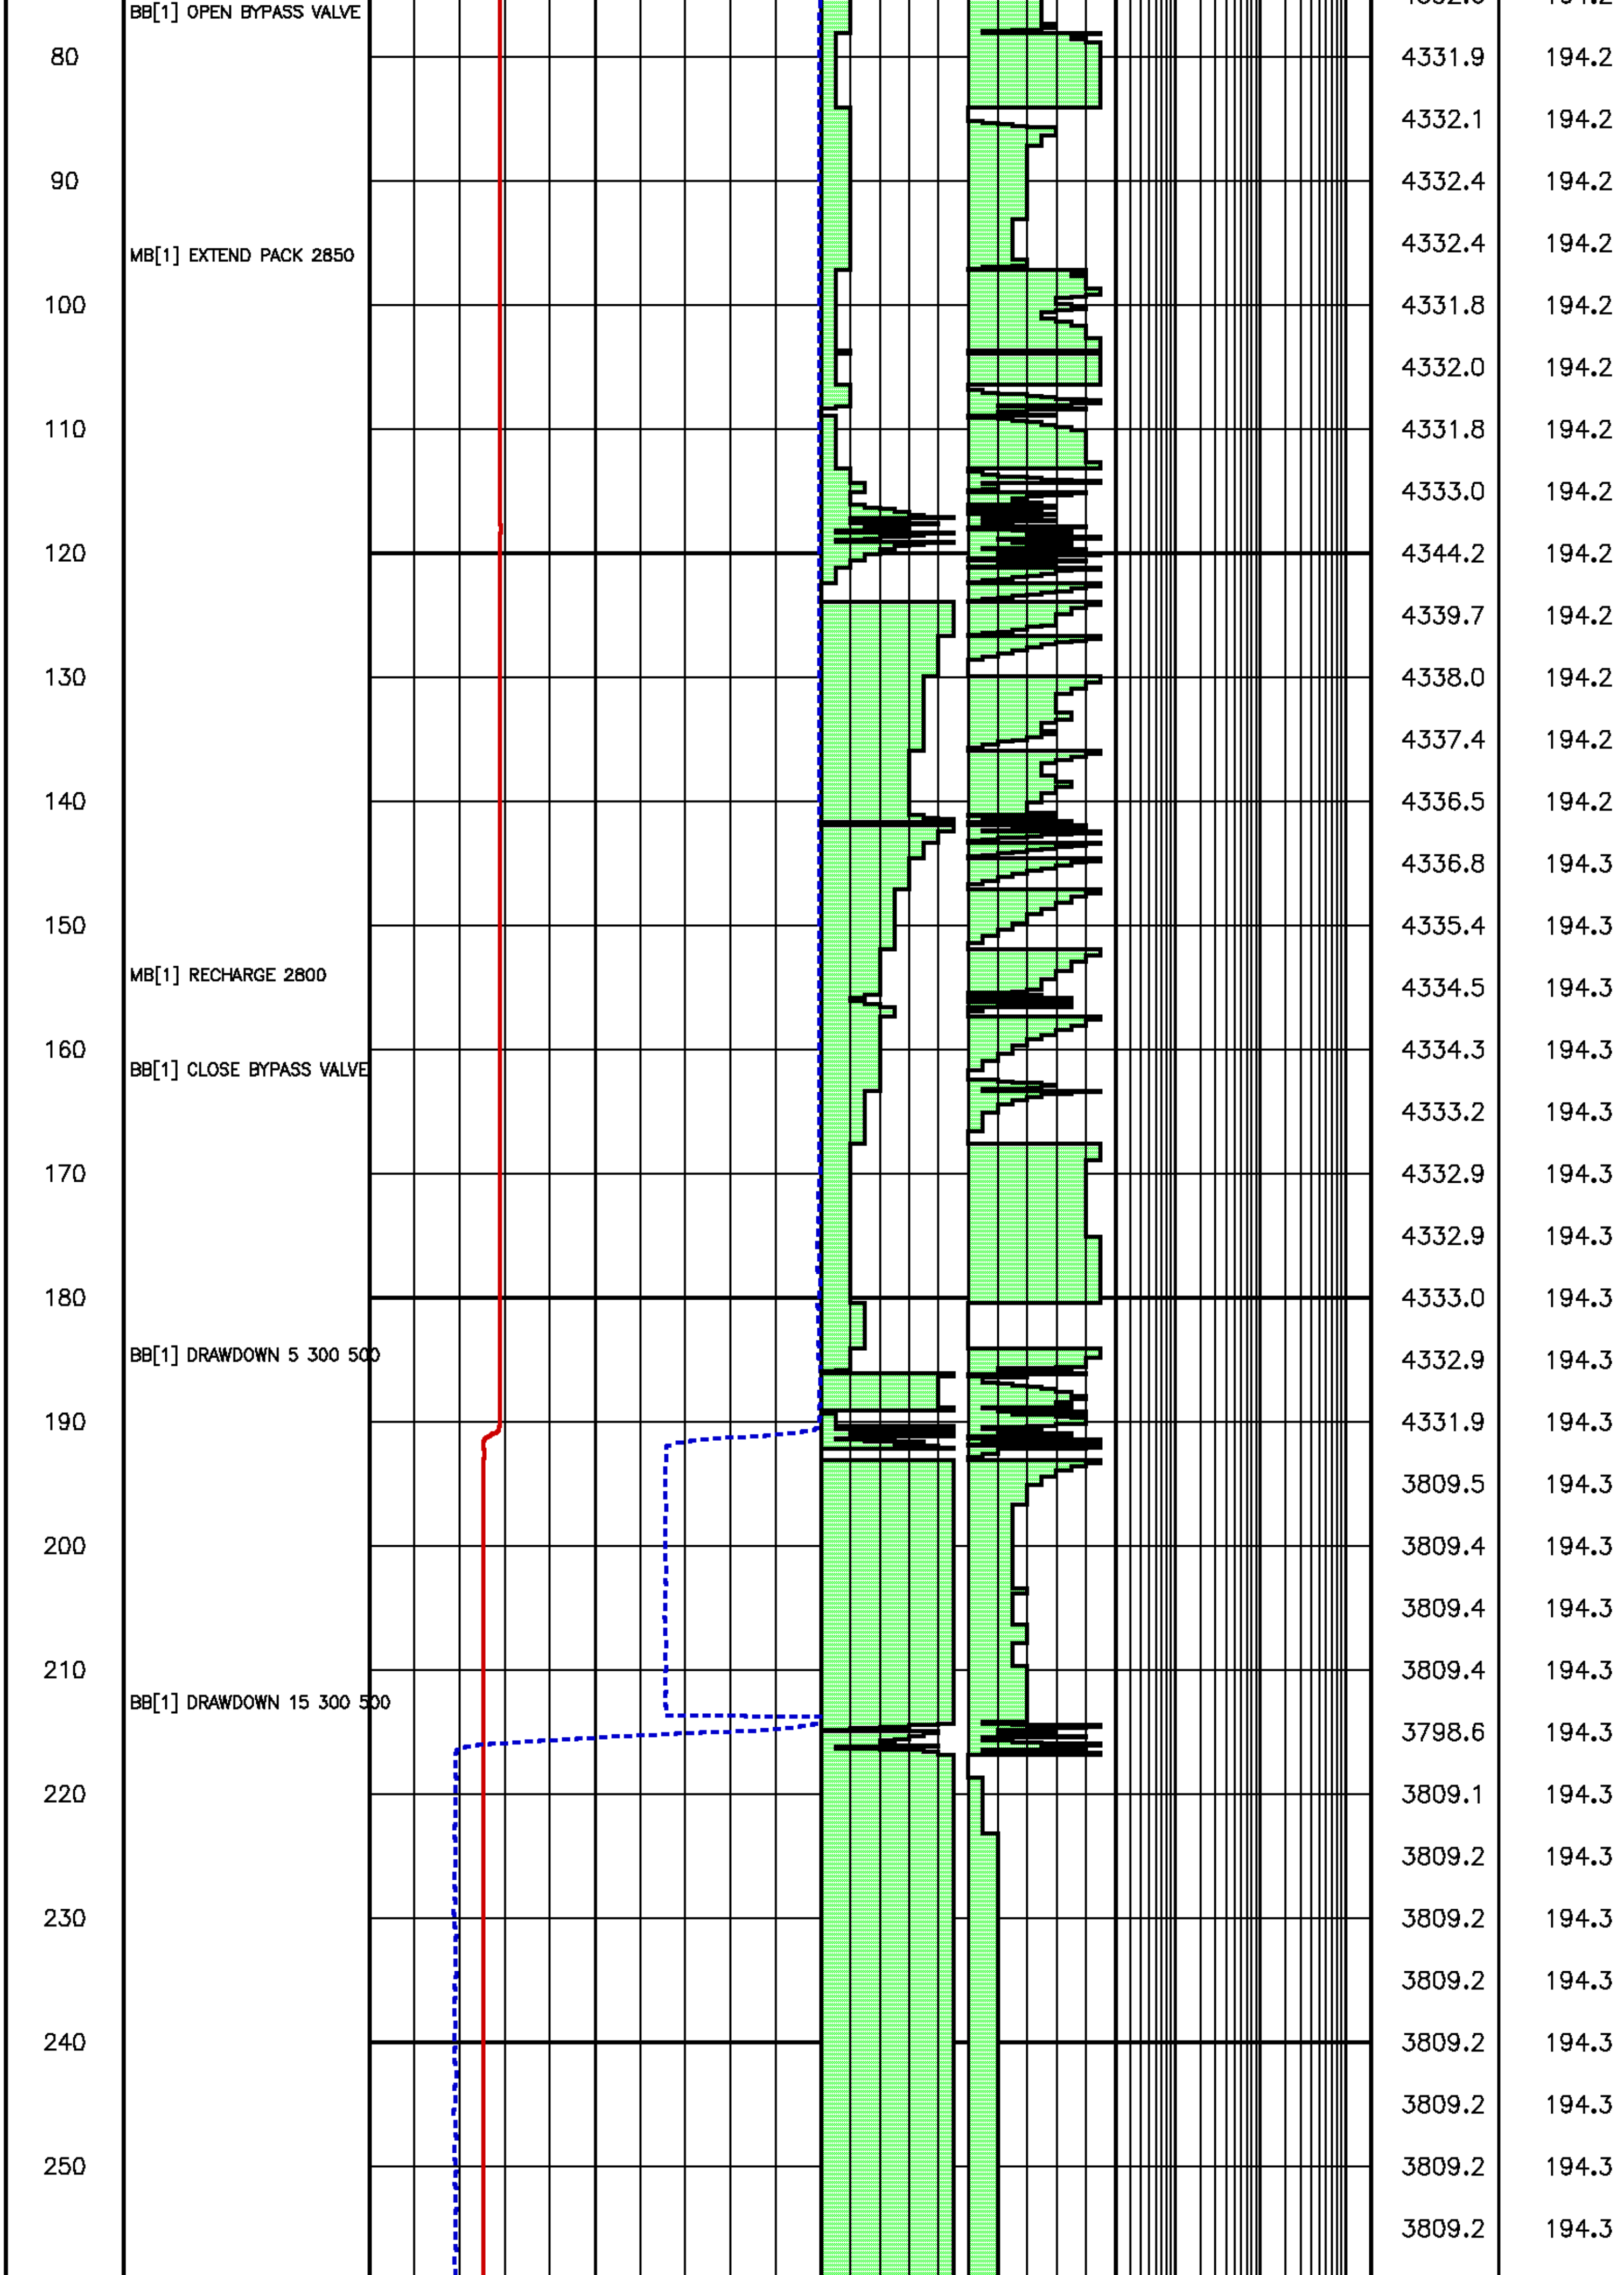

BB[1] OPEN BYPASS VALVE
80
4331.9
194.2
4332.1
194.2
90
4332.4
194.2
MB[1] EXTEND PACK 2850
4332.4
194.2
100
4331.8
194.2
4332.0
194.2
110
4331.8
194.2
4333.0
194.2
120
4344.2
194.2
4339.7
194.2
130
4338.0
194.2
4337.4
194.2
140
4336.5
194.2
4336.8
194.3
150
4335.4
194.3
MB[1] RECHARGE 2800
4334.5
194.3
160
BB[1] CLOSE BYPASS VALVE
4334.3
194.3
4333.2
194.3
170
4332.9
194.3
4332.9
194.3
180
4333.0
194.3
BB[1] DRAWDOWN 5 300 500
4332.9
194.3
190
4331.9
194.3
3809.5
194.3
200
3809.4
194.3
3809.4
194.3
210
3809.4
194.3
BB[1] DRAWDOWN 15 300 500
3798.6
194.3
220
3809.1
194.3
3809.2
194.3
230
3809.2
194.3
3809.2
194.3
240
3809.2
194.3
3809.2
194.3
250
3809.2
194.3
3809.2
194.3

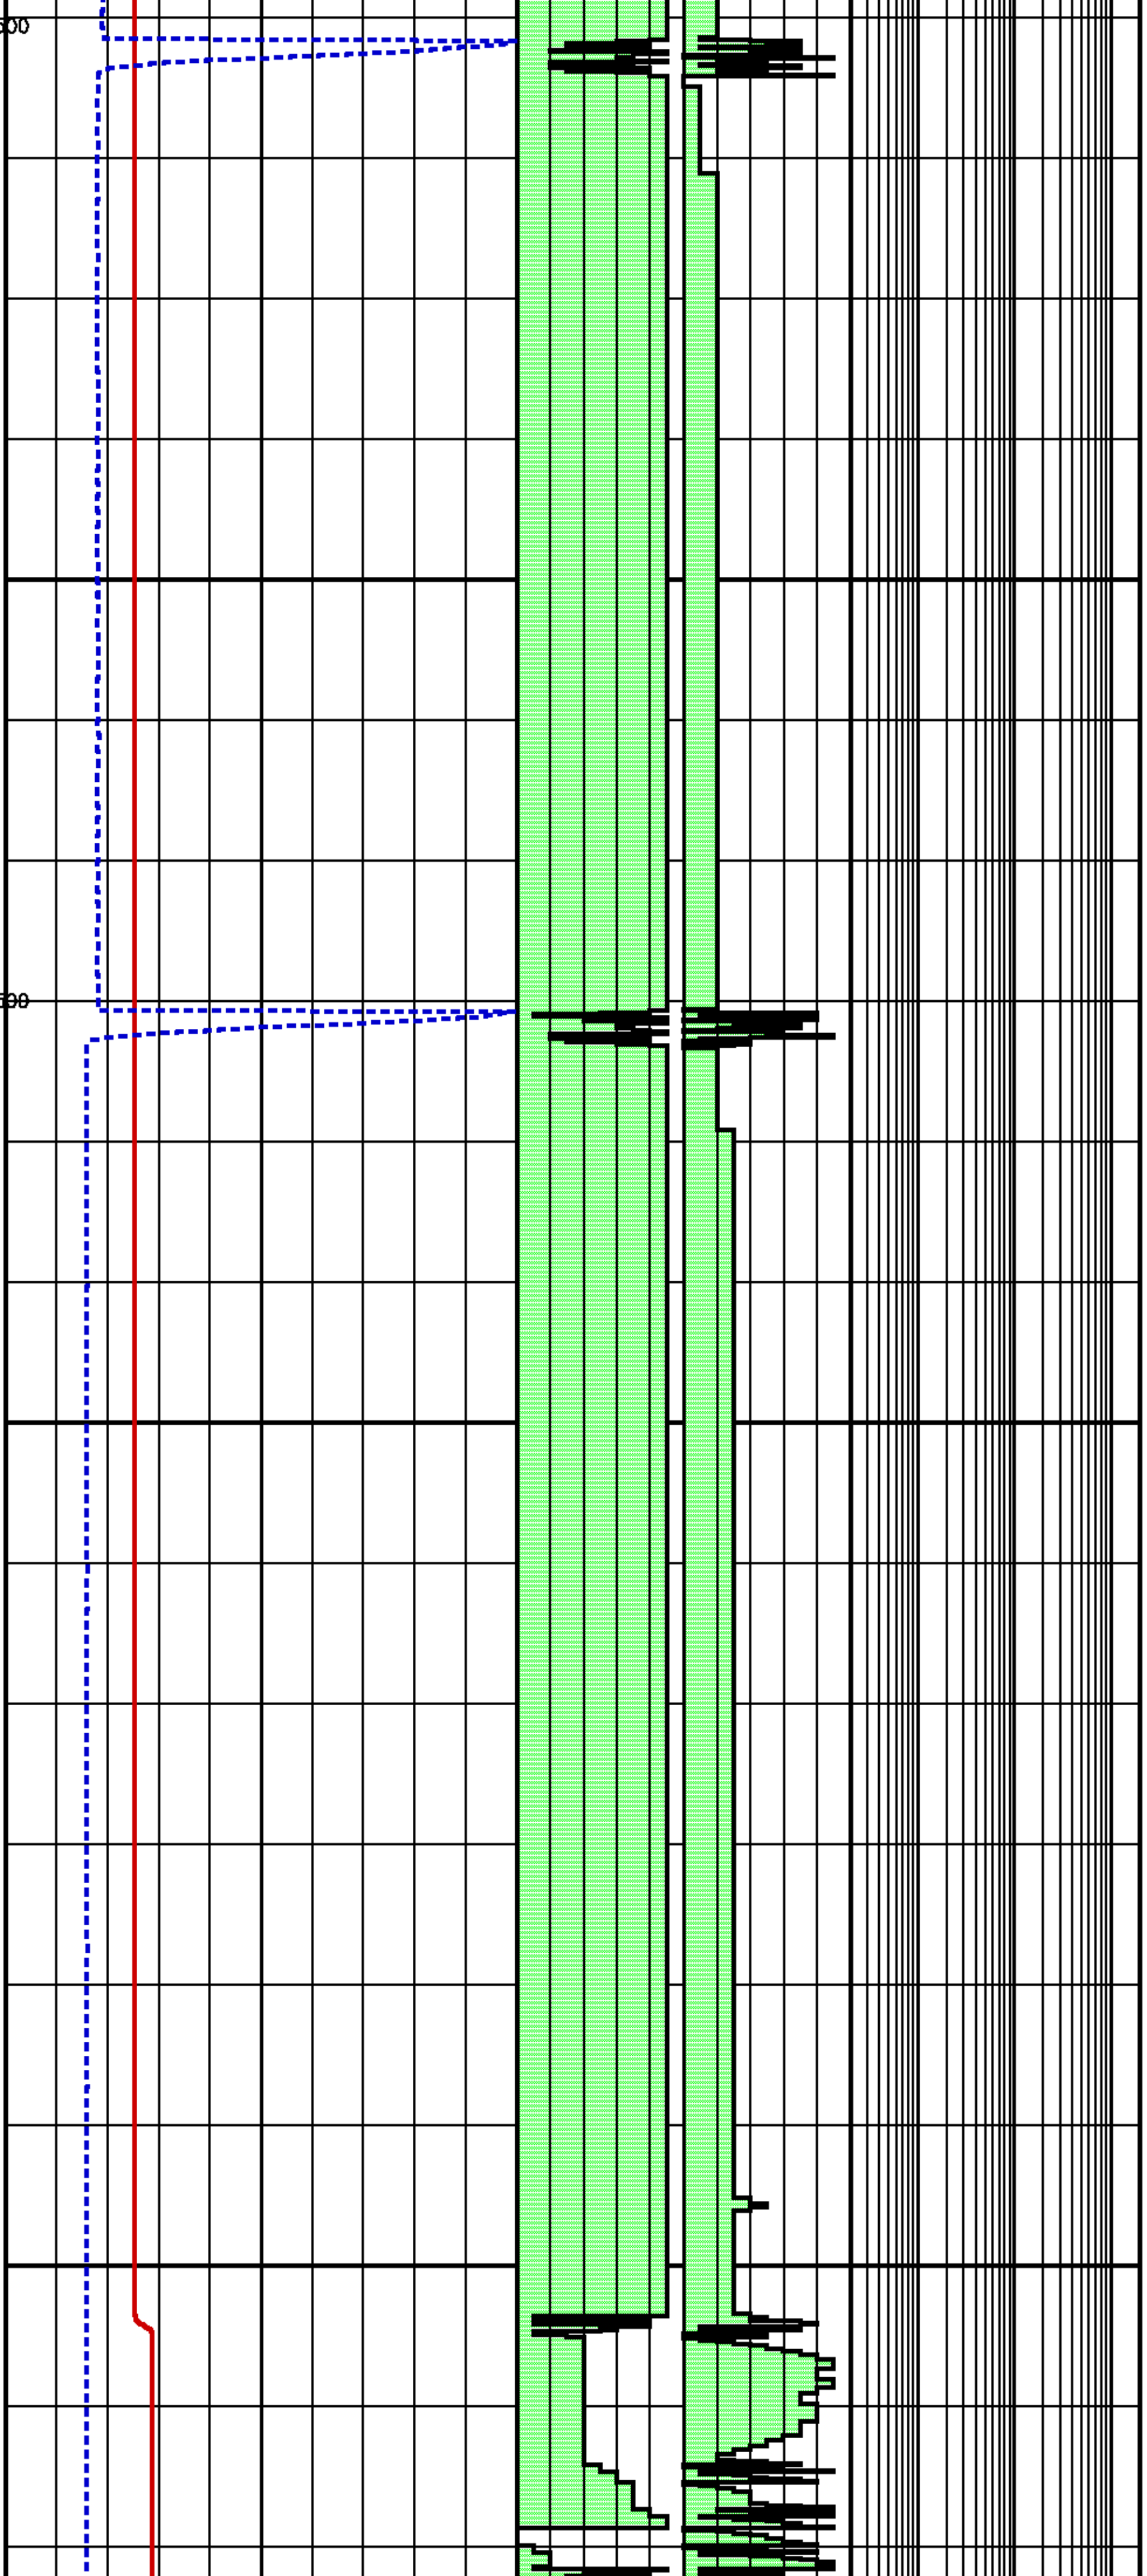

260	BB[1] DRAWDOWN 15 300 500	3809.2	194.3
		3809.1	194.3
270		3809.2	194.3
		3809.2	194.3
280		3809.2	194.3
		3809.2	194.4
290		3809.3	194.4
		3809.3	194.4
300		3809.3	194.4
		3809.3	194.4
310		3809.3	194.4
		3809.3	194.4
320		3809.3	194.4
		3809.3	194.4
330	BB[1] DRAWDOWN 15 300 500	3809.3	194.4
		3809.3	194.4
340		3809.3	194.4
		3809.3	194.4
350		3809.3	194.4
		3809.3	194.4
360		3809.3	194.4
		3809.3	194.4
370		3809.3	194.4
		3809.3	194.4
380		3809.3	194.4
		3809.3	194.4
390		3809.3	194.4
		3809.3	194.4
400		3809.3	194.4
		3809.3	194.4
410		3809.3	194.4
	BB[1] ABORT	3809.4	194.5
420		3809.4	194.5
	BB[1] OPEN BYPASS VALVE	4303.6	194.5
430		4304.9	194.5
		4306.5	194.5
440	MB[1] RETRACT PACK 2600	4311.0	194.5

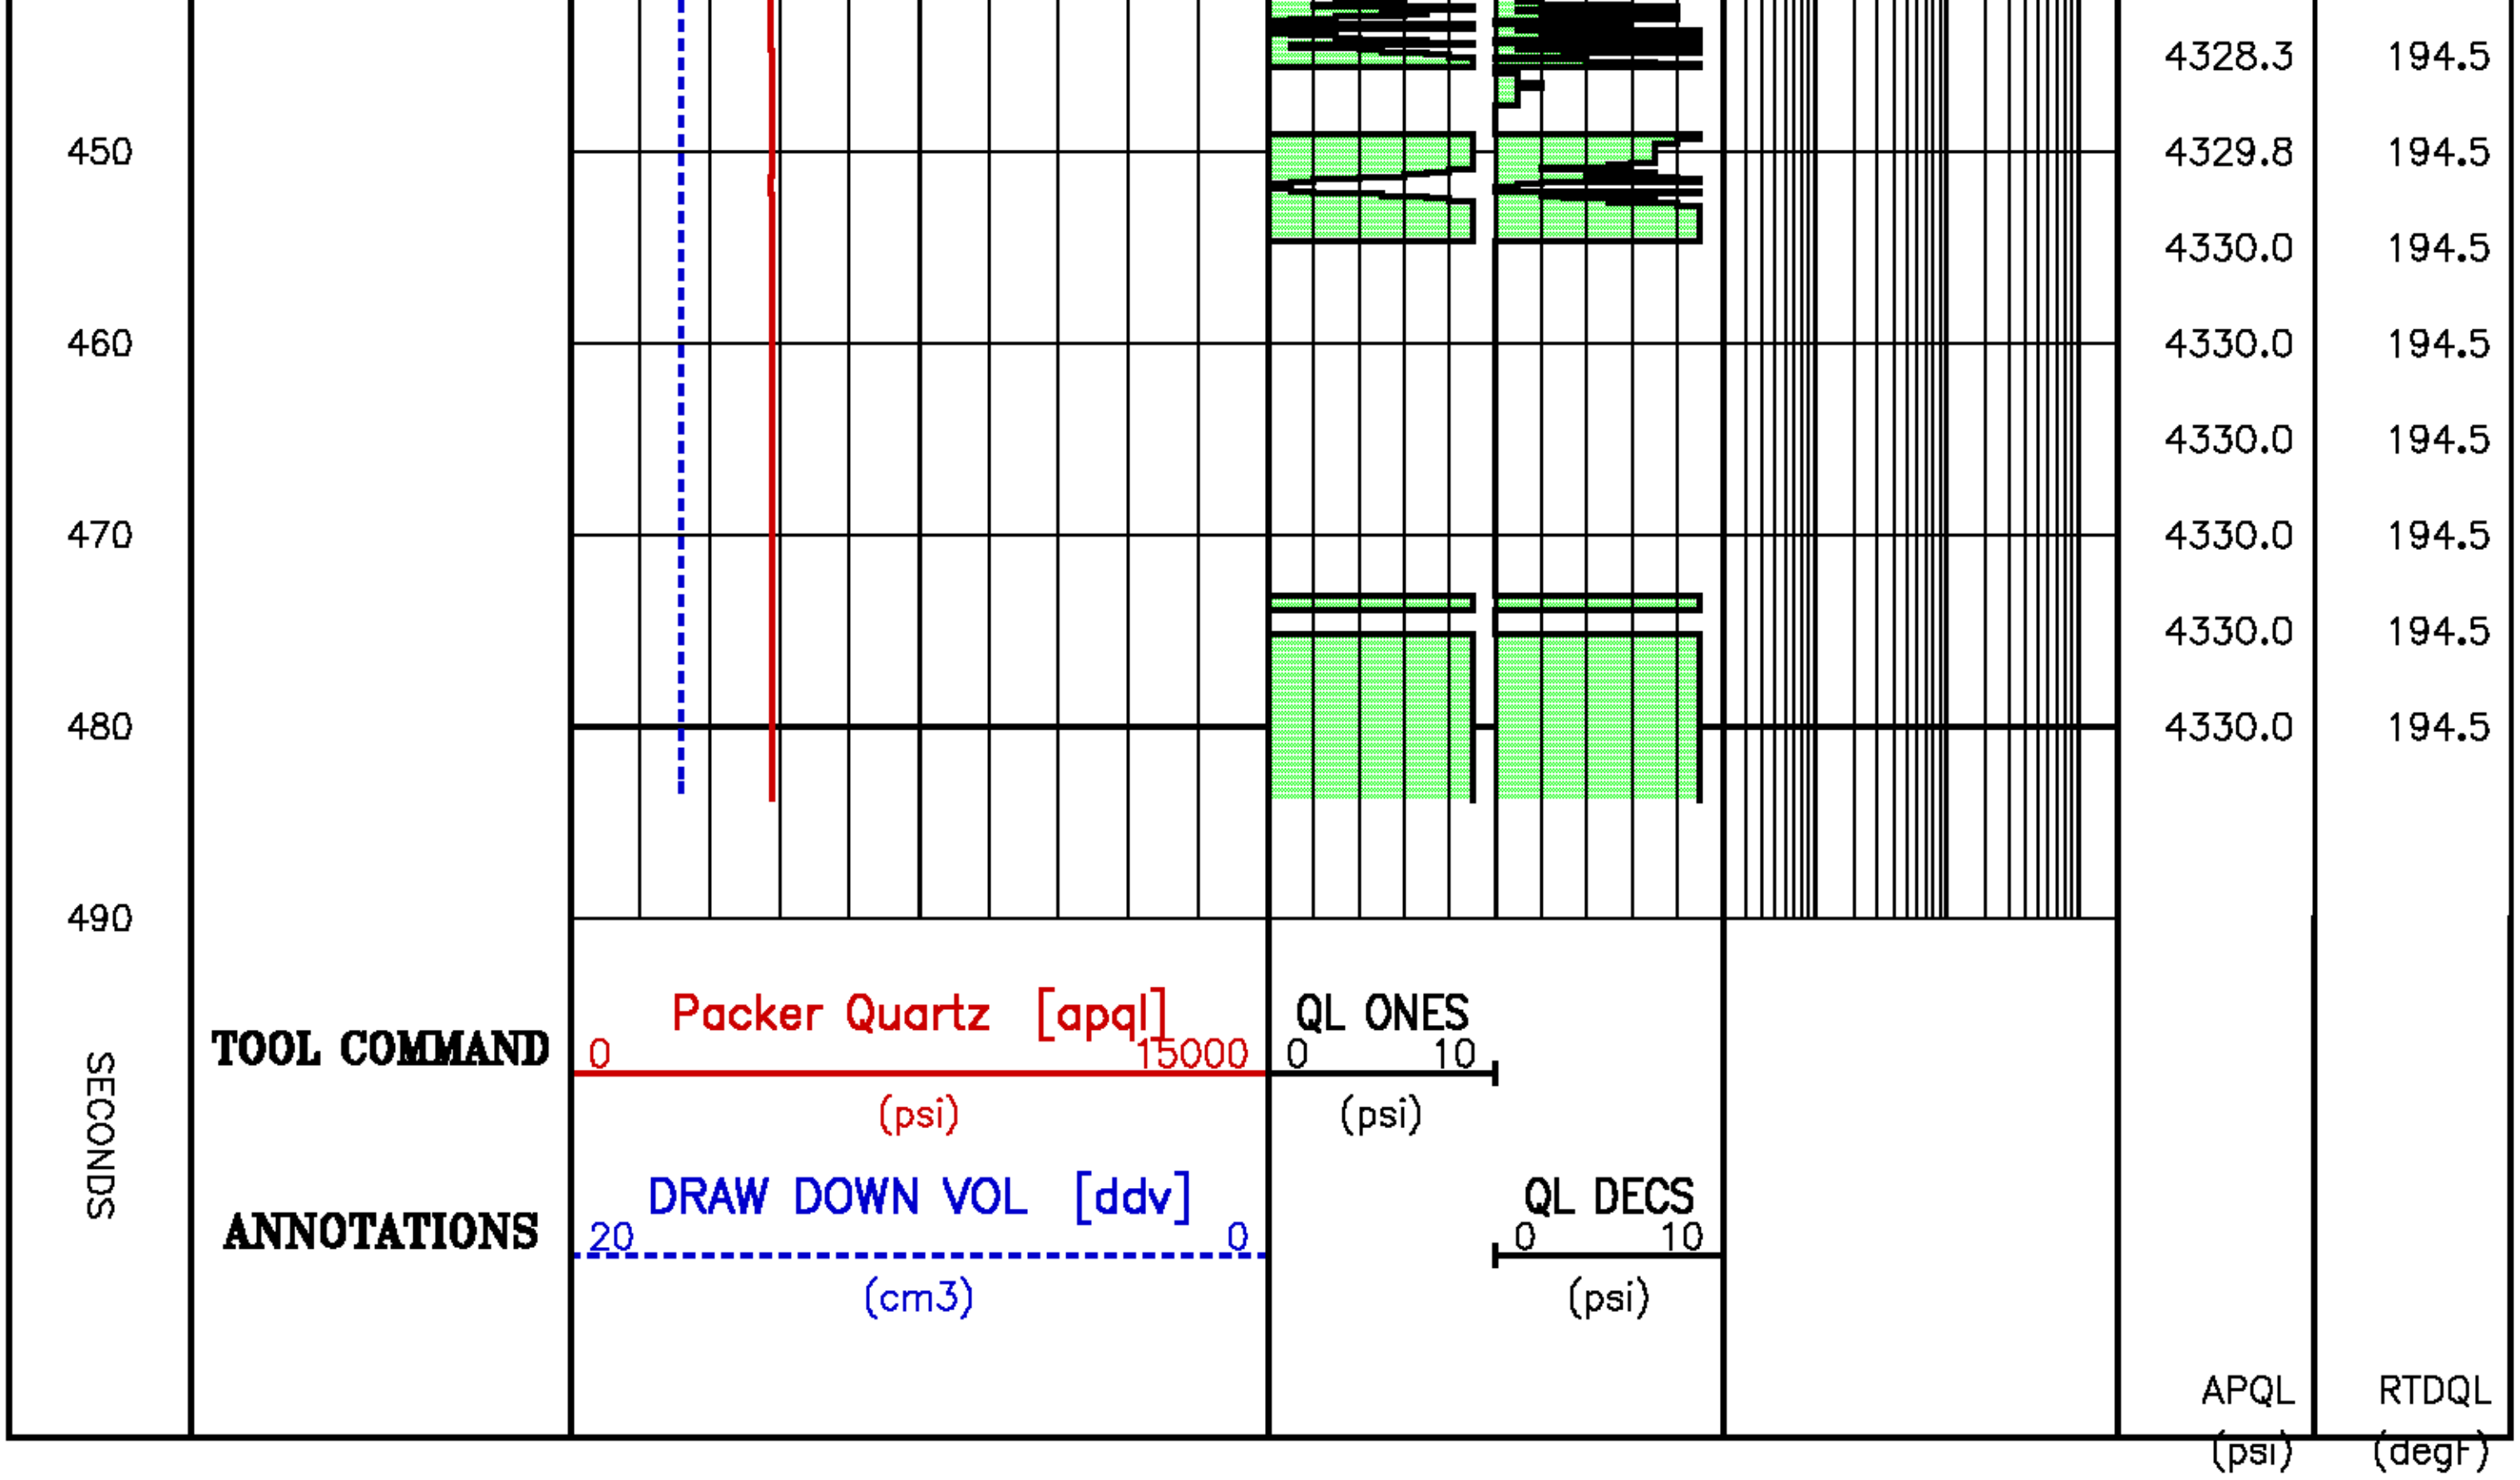

Sample Tests – Level 32 Tool Instance 1
MD 2418.0 m TVD 2418.0 m

PRESSURE HISTORY

Depth MD 2418.0 m TVD 2418.0 m

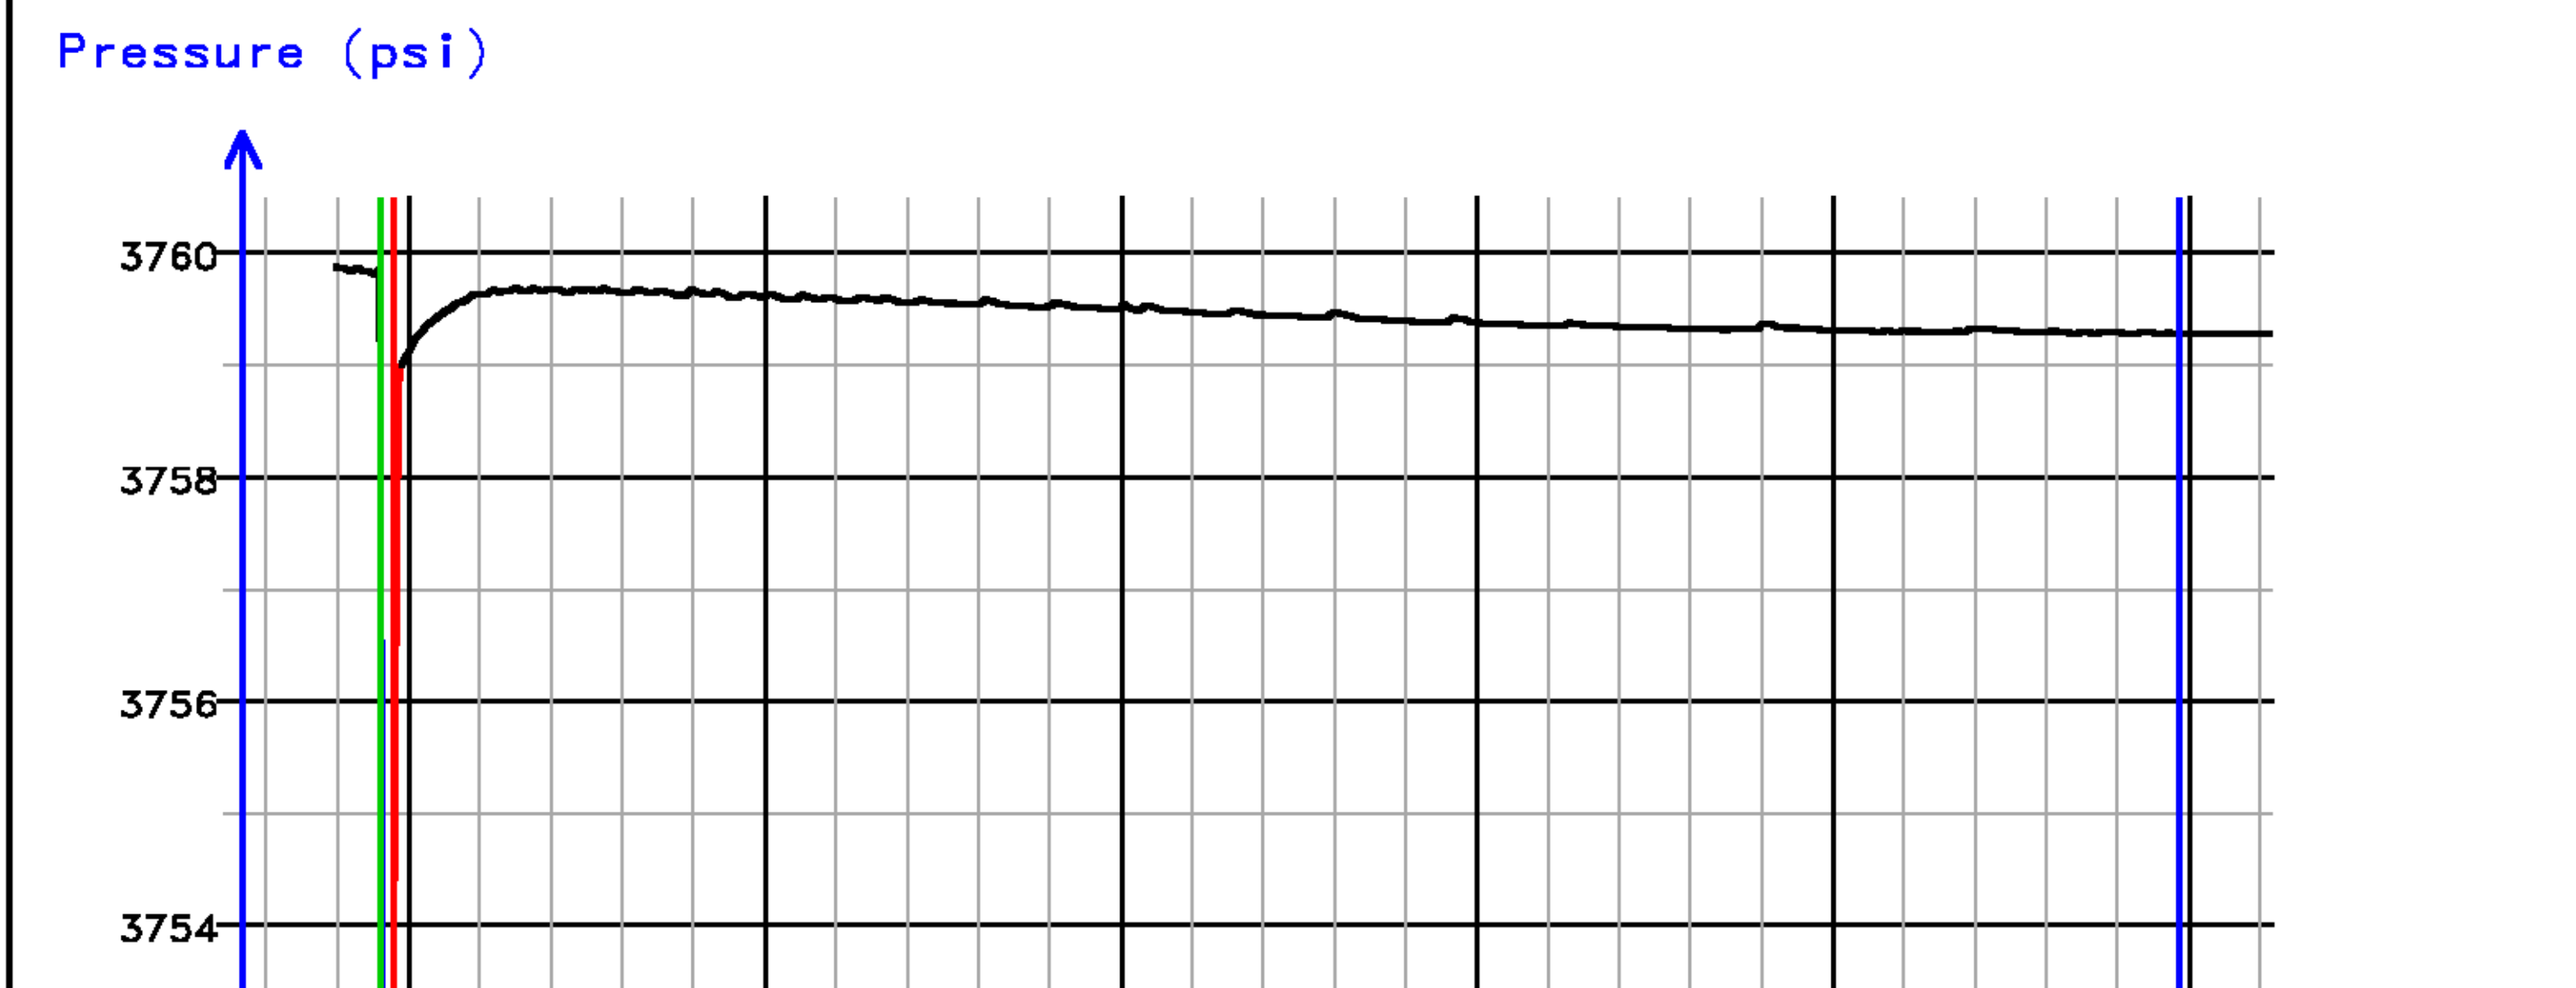

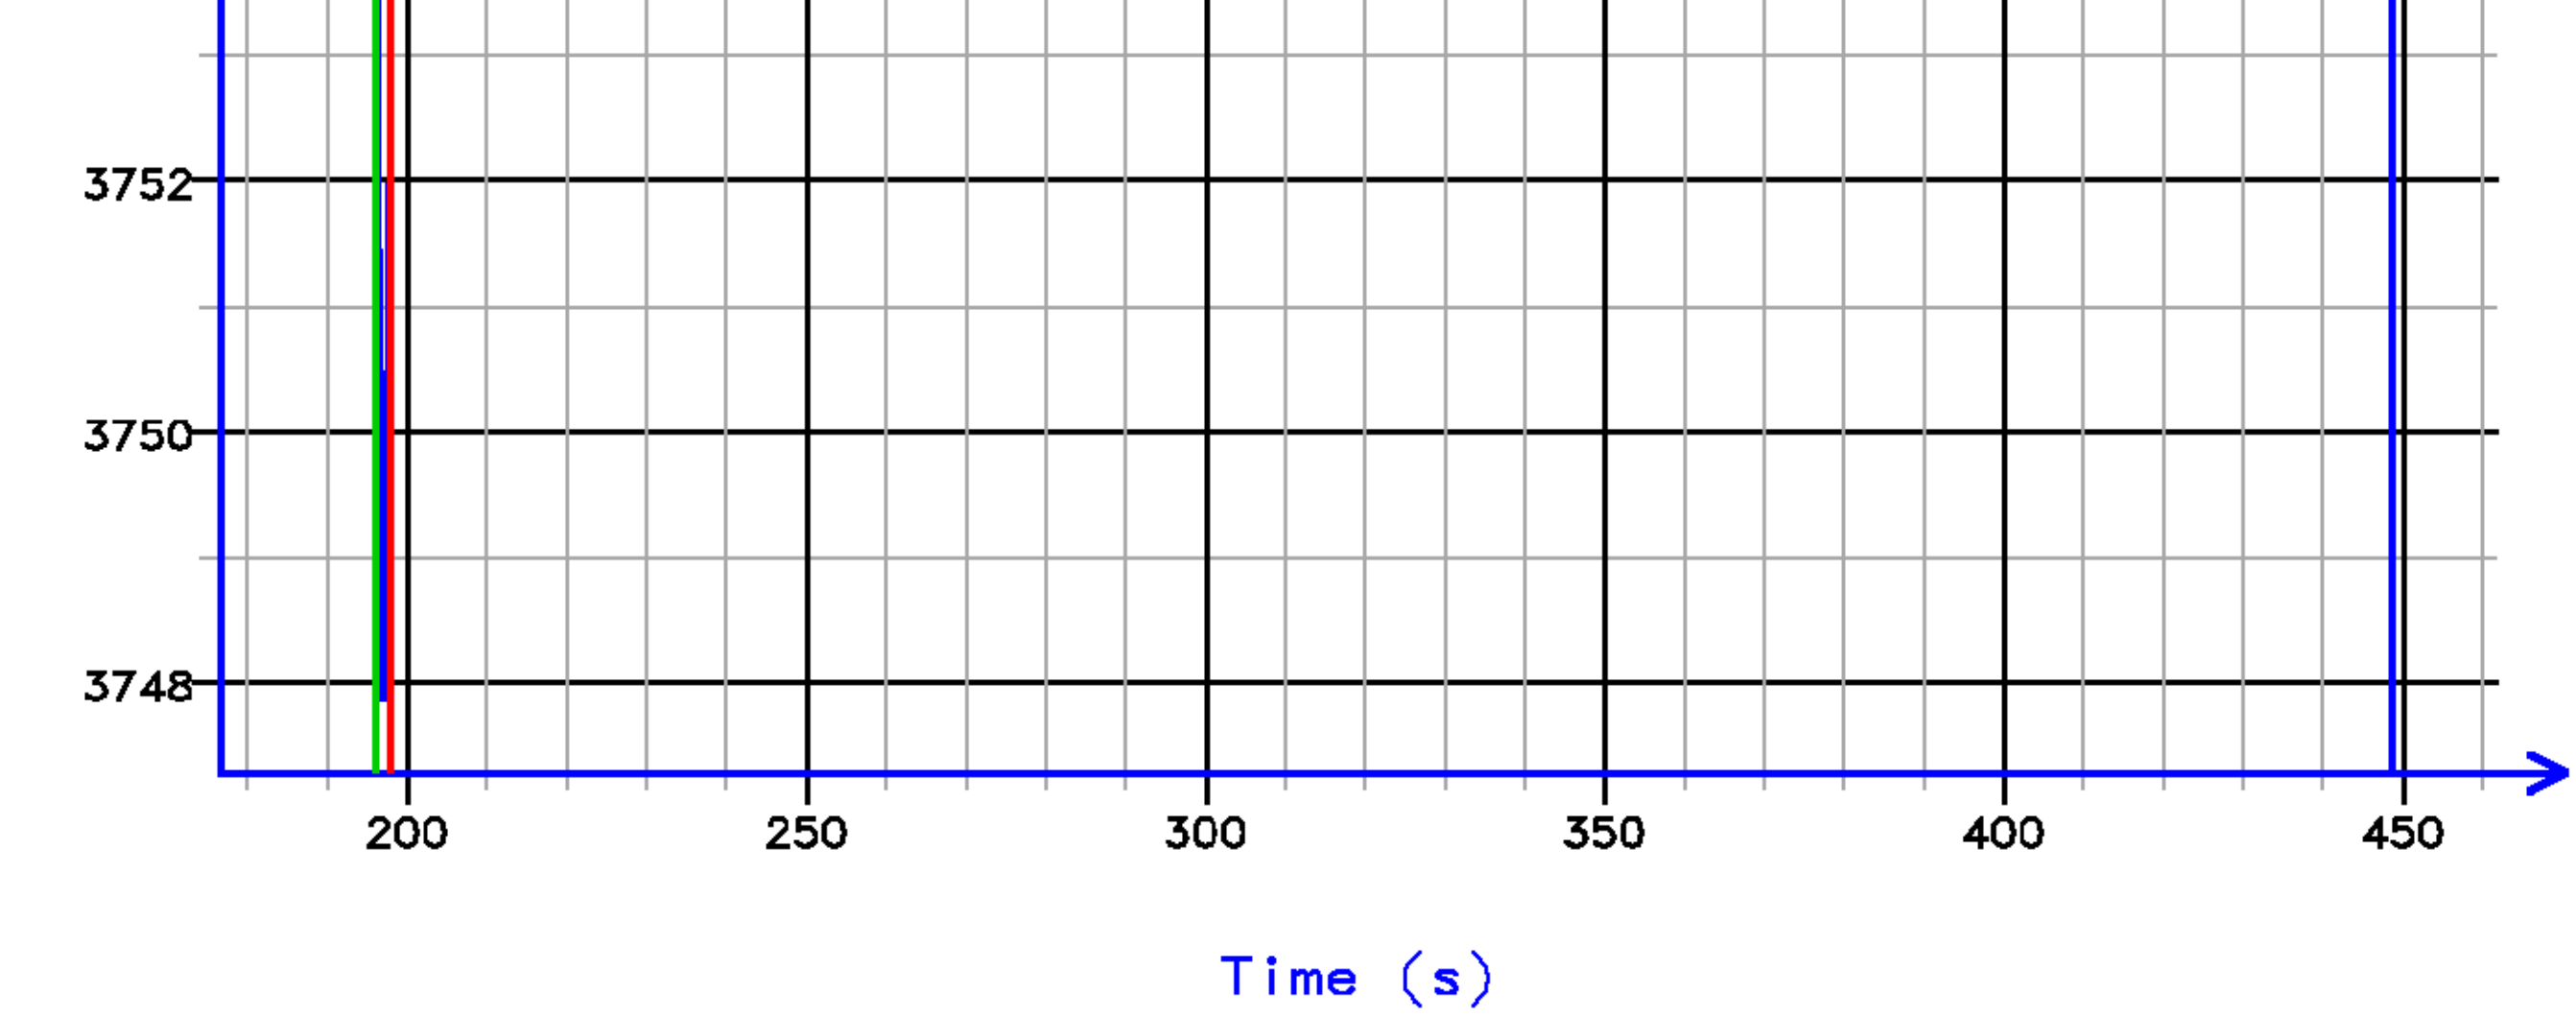

[032.261]

FLOW RATE ANALYSIS

Depth MD 2418.0 m TVD 2418.0 m

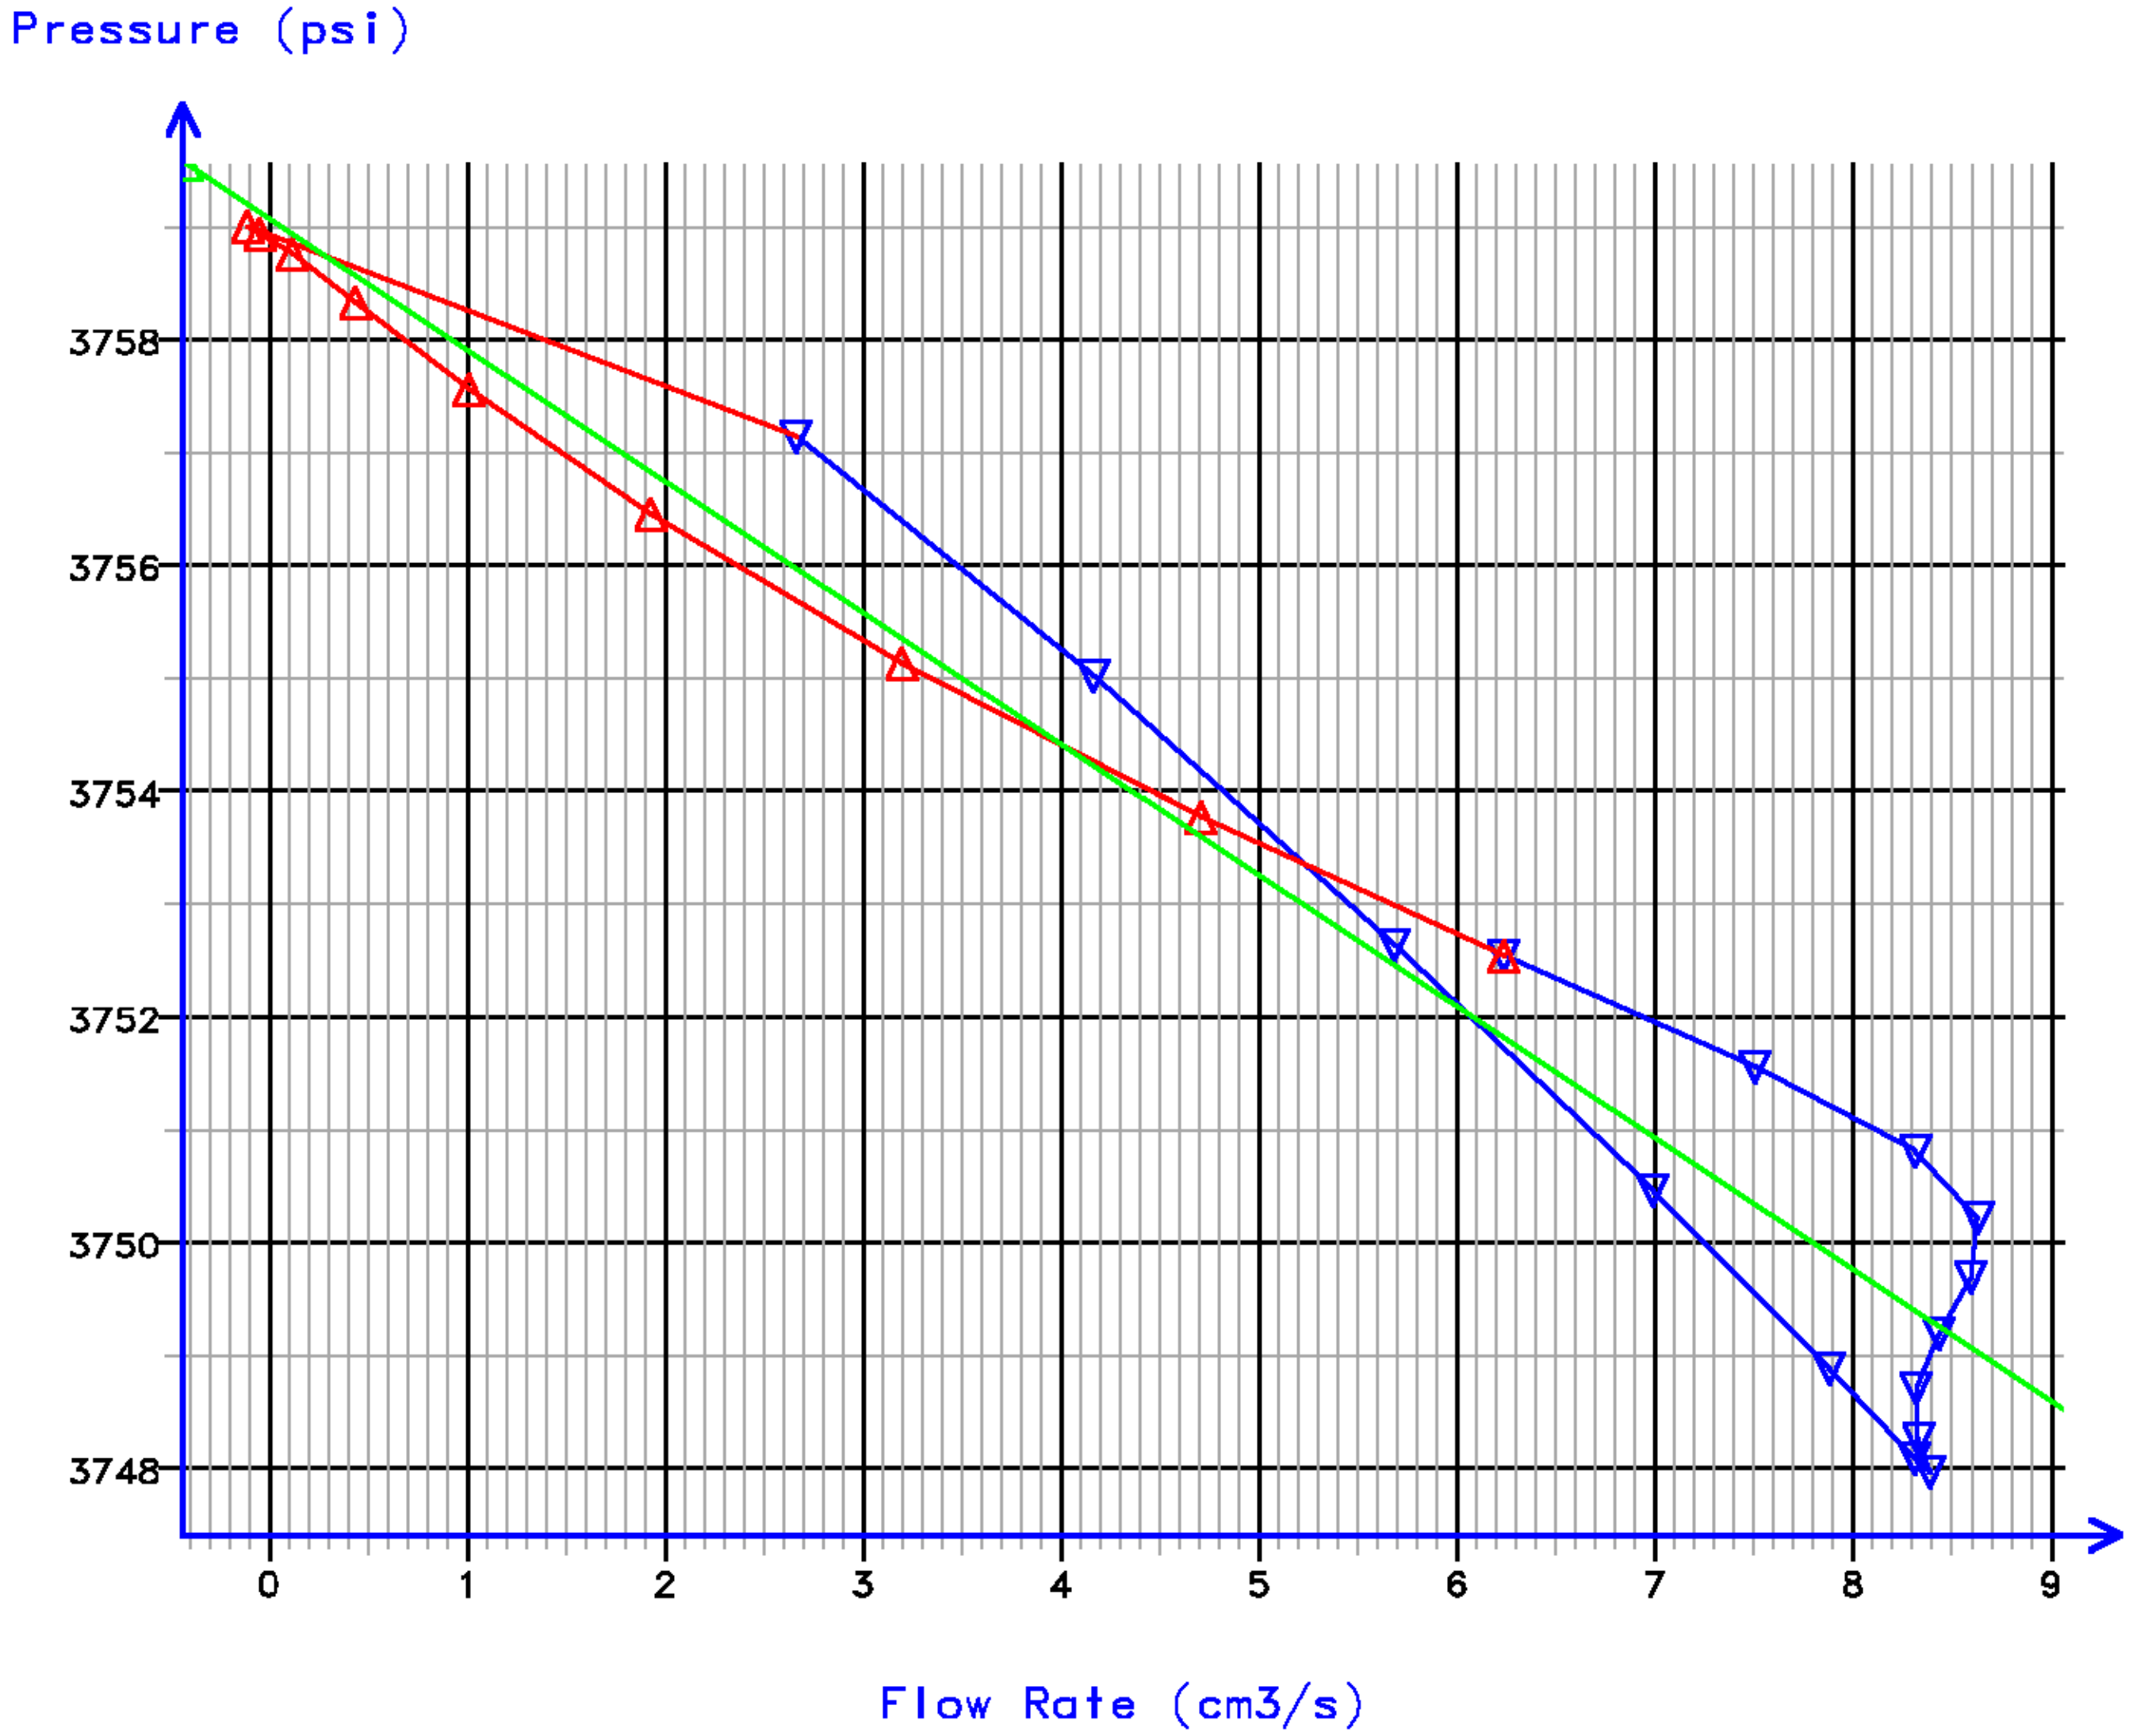

Kfra 2956.437 (mD/cP), Kddu 2557.052 (mD/cP) Confidence 95.70% [032.261]

Data File : j800g39.aff
Presentation: gpi_rci-b6xx.log

SECONDS

TOOL COMMAND

ANNOTATIONS

Packer Quartz [apql] 0 15000 (psi)

Pump Quartz [apqk] 0 15000 (psi)

DRAW DOWN VOL [ddv] 20 0 (cm3)

PTV VOL [ptv] 10000 0 (cm3)

PVT VOL [pvtv] 100 0 (cm3)

PTVR VOL [ptvr] 10 0 (cm3)

CPTV VOL [cptv] 10000 0 (cm3)

QL ONES 0 10 (psi)

QL DECS 0 10 (psi)

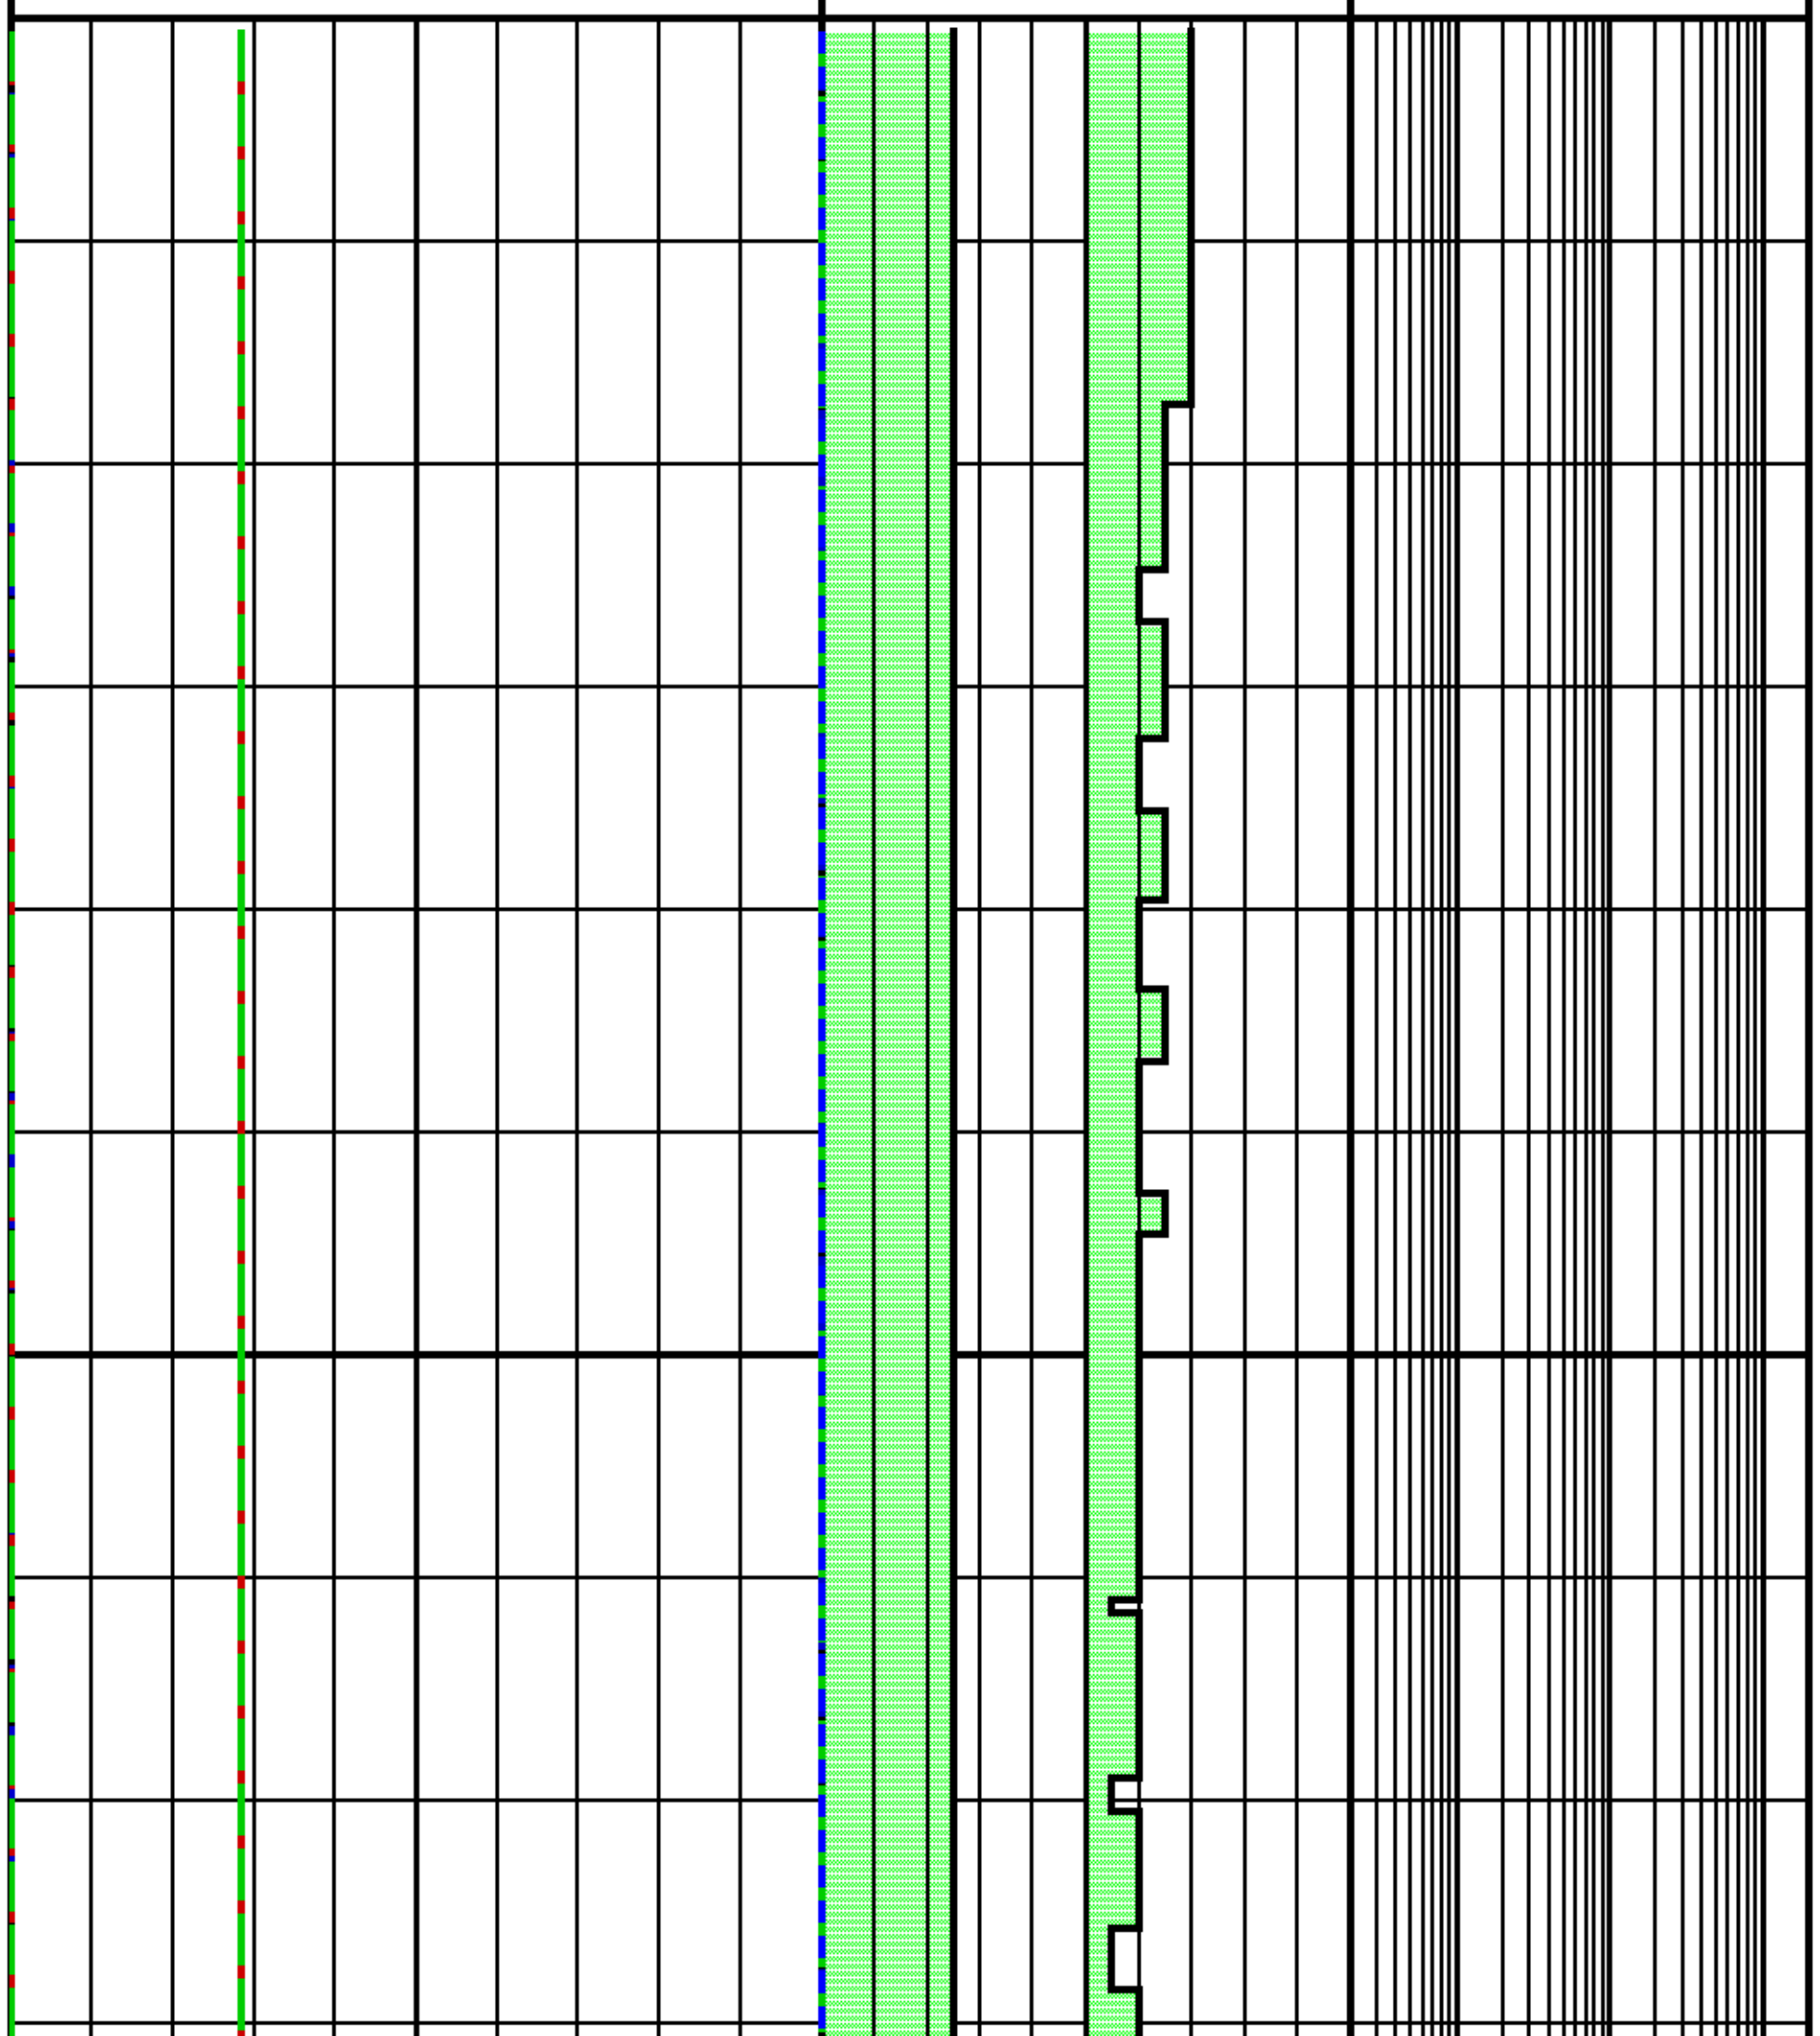

SECONDS	ANNOTATIONS	APQL (psi)	RTDQL (degF)
0			
		4265.5	197.9
10		4265.5	197.9
		4265.4	197.9
20		4265.4	198.0
		4265.3	198.0
30		4265.3	198.0
		4265.3	198.0
40		4265.2	198.0
		4265.3	198.0
50	BB[1] PUMP DIR UP	4265.3	198.0
		4265.3	198.0
60		4265.3	198.0
		4265.2	198.0
70		4265.3	198.0
		4265.2	198.0
80		4265.2	198.0
	BB[1] OPEN BYPASS VALVE	4265.2	198.0
90		4265.2	198.0

		4265.2	198.0
100		4265.2	198.0
	MB[1] EXTEND PACK 2800	4265.6	198.0
110		4262.7	198.0
		4263.7	198.0
120		4264.9	198.0
		4270.3	198.0
130		4426.5	198.1
		4425.2	198.1
140		4420.2	198.1
		4415.6	198.1
150		4411.6	198.1
		4407.9	198.1
160	BB[1] DRAWDOWN 5 300 500	4369.2	198.1
		4303.7	198.1
170		3760.3	198.1
		3760.0	198.1
180		3760.0	198.1
		3759.9	198.1
190		3759.9	198.1
	BB[1] DRAWDOWN 15 300 500	3759.8	198.1
200		3759.1	198.1
		3759.5	198.1
210		3759.6	198.1
		3759.7	198.1
220		3759.7	198.1
		3759.7	198.1
230		3759.6	198.1
		3759.7	198.1
240		3759.7	198.1
		3759.6	198.1
250		3759.6	198.1
		3759.6	198.1
260		3759.6	198.1
		3759.6	198.1
270		3759.6	198.2

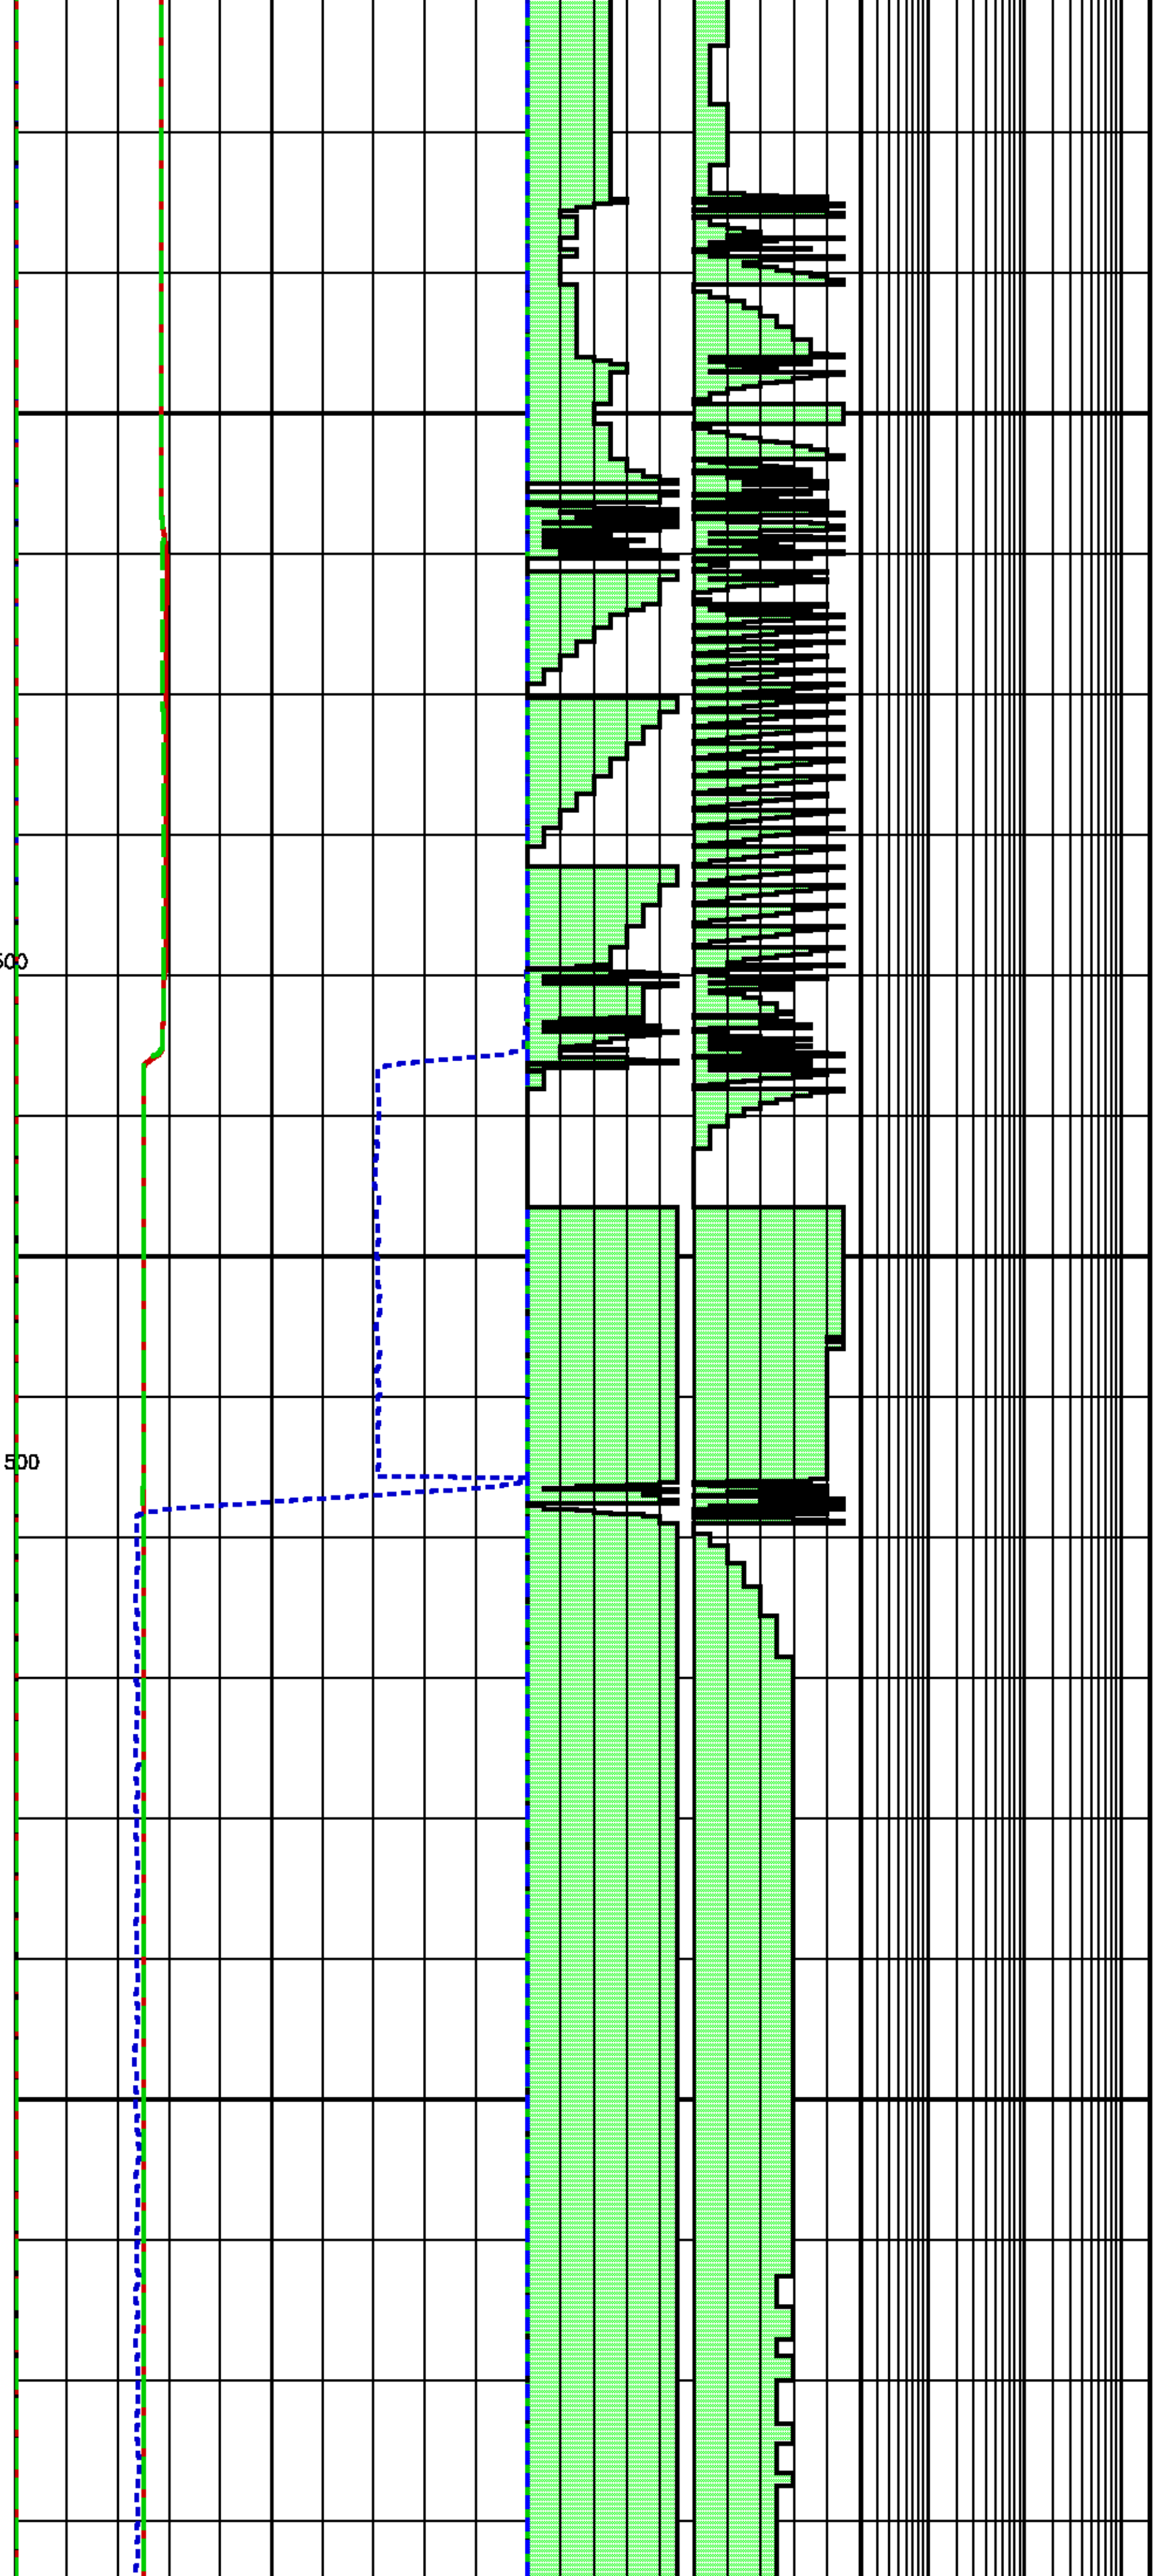

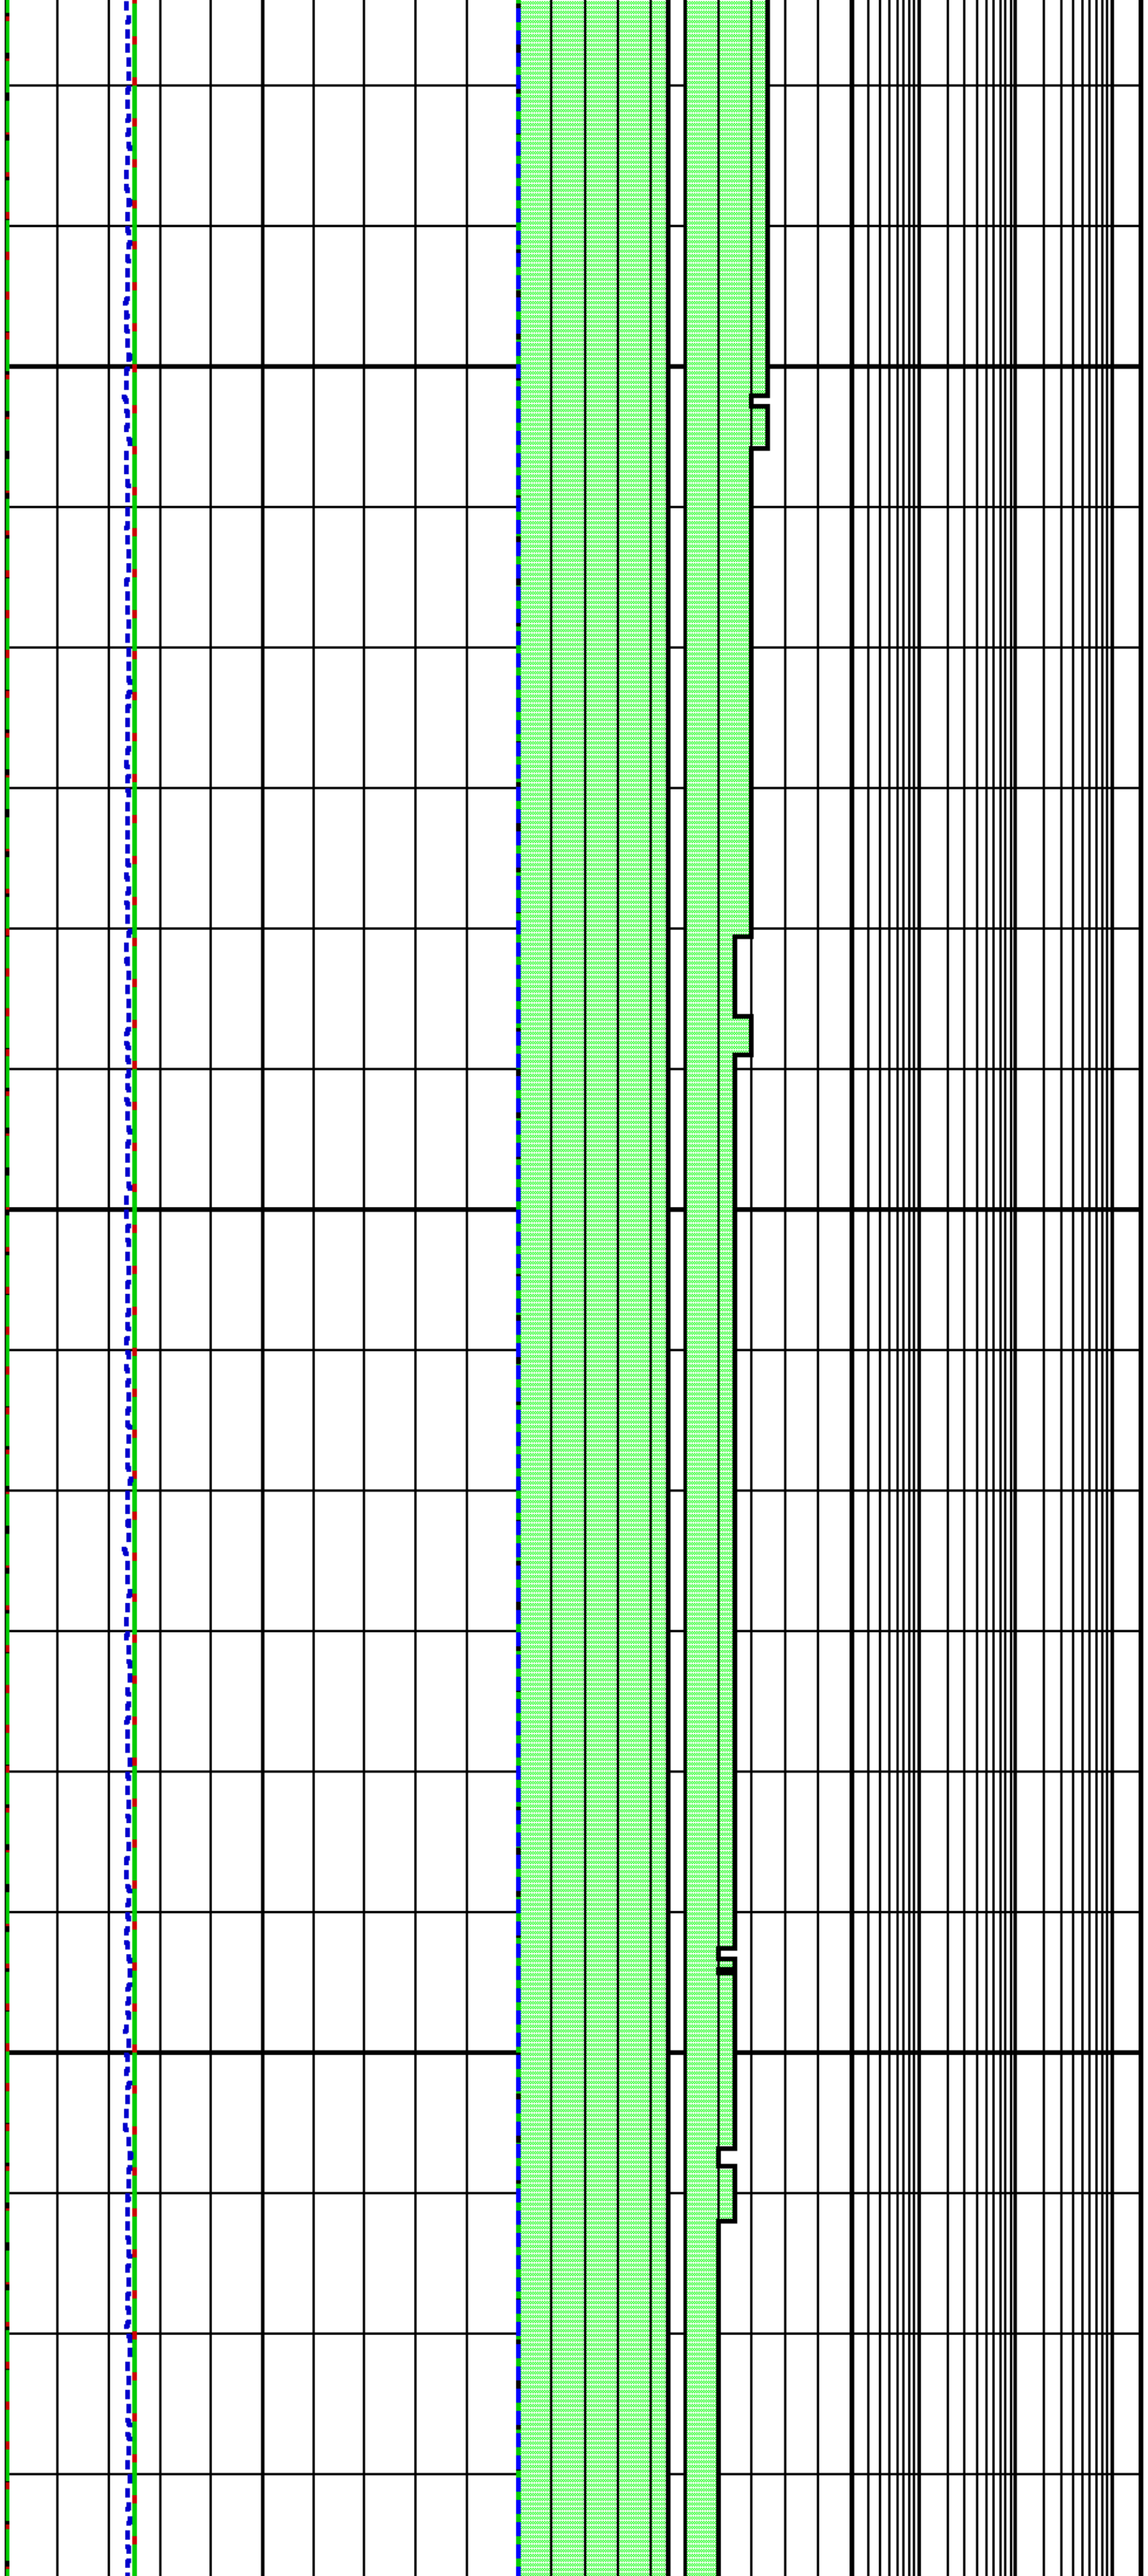

	3759.6	198.2
280	3759.5	198.2
	3759.5	198.2
290	3759.5	198.2
	3759.5	198.2
300	3759.5	198.2
	3759.5	198.2
310	3759.5	198.2
	3759.5	198.2
320	3759.5	198.2
	3759.4	198.2
330	3759.5	198.2
	3759.4	198.2
340	3759.4	198.2
	3759.4	198.2
350	3759.4	198.2
	3759.4	198.2
360	3759.4	198.2
	3759.4	198.2
370	3759.3	198.2
	3759.3	198.2
380	3759.3	198.2
	3759.3	198.2
390	3759.4	198.3
	3759.3	198.3
400	3759.3	198.3
	3759.3	198.3
410	3759.3	198.3
	3759.3	198.3
420	3759.3	198.3
	3759.3	198.3
430	3759.3	198.3
	3759.3	198.3
440	3759.3	198.3
	3759.3	198.3
450	3759.3	198.3
	3759.3	198.3

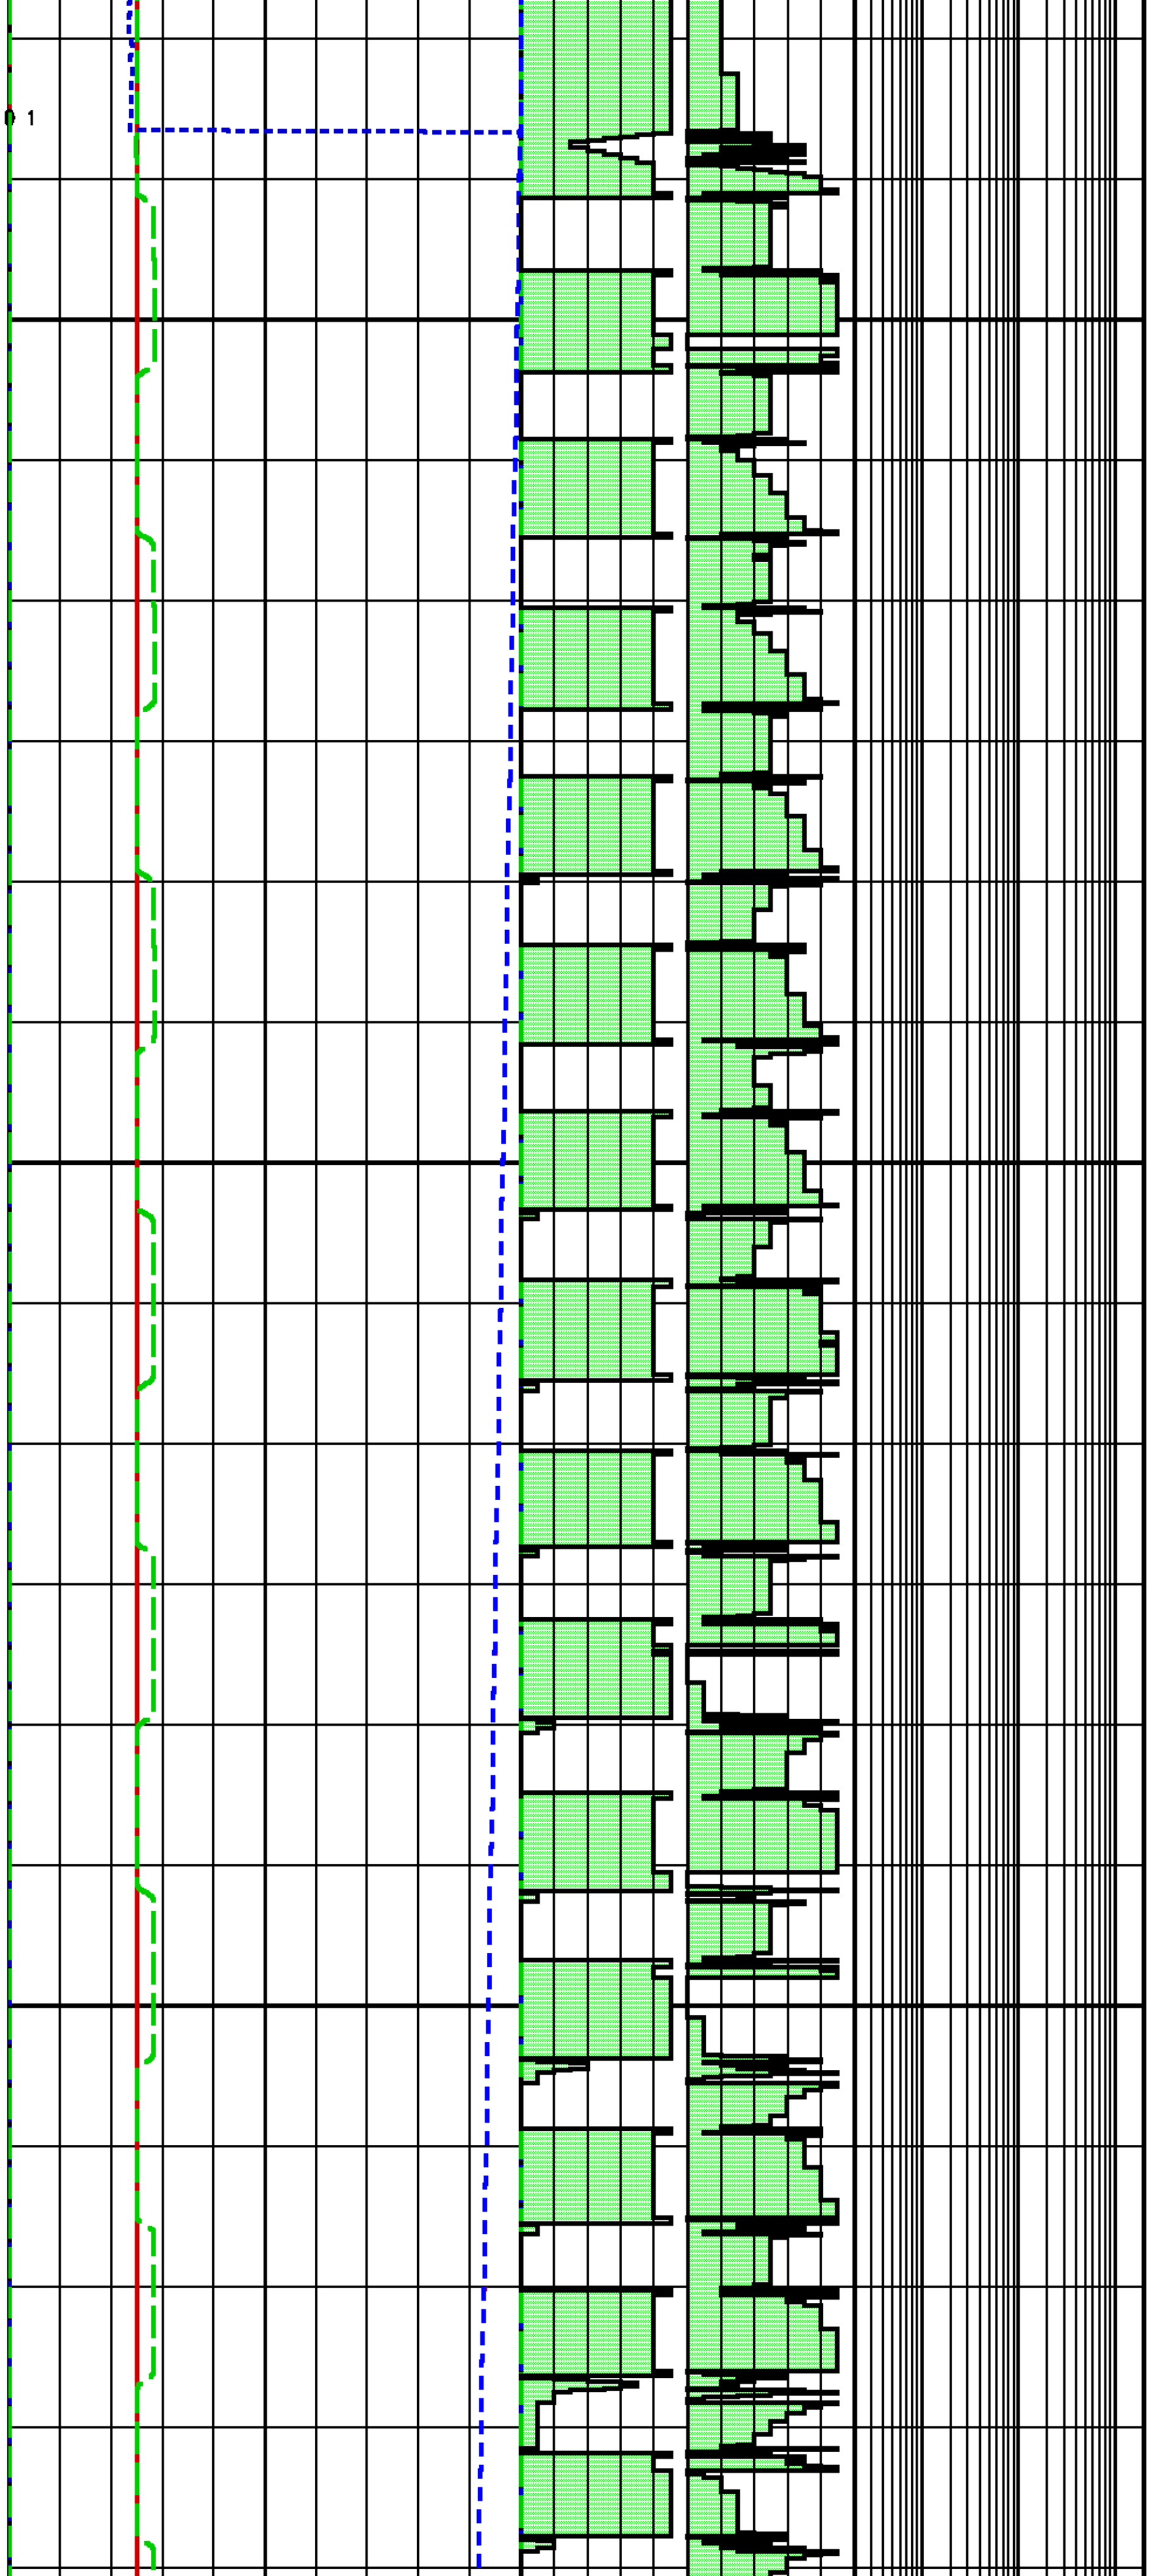

460		3759.3	198.3
	BB[1] PUMP 100000 0 63 0 1	3759.3	198.3
470		3758.8	198.3
		3760.6	198.3
480		3759.0	198.3
		3760.5	198.3
490		3758.4	198.3
		3758.8	198.3
500		3760.5	198.3
		3758.7	198.3
510		3760.5	198.3
		3758.7	198.3
520		3761.0	198.3
		3758.6	198.3
530		3758.8	198.3
		3760.5	198.3
540		3758.7	198.4
		3760.5	198.4
550		3758.9	198.4
		3759.0	198.4
560		3760.5	198.4
		3758.9	198.4
570		3760.5	198.4
		3759.0	198.4
580		3762.6	198.4
		3759.5	198.4
590		3759.0	198.4
		3760.5	198.4
600		3759.1	198.4
		3761.3	198.4
610		3758.8	198.4
		3759.0	198.4
620		3760.4	198.4
		3759.0	198.4
630		3761.5	198.4
		3759.3	198.4
640		3760.6	198.4

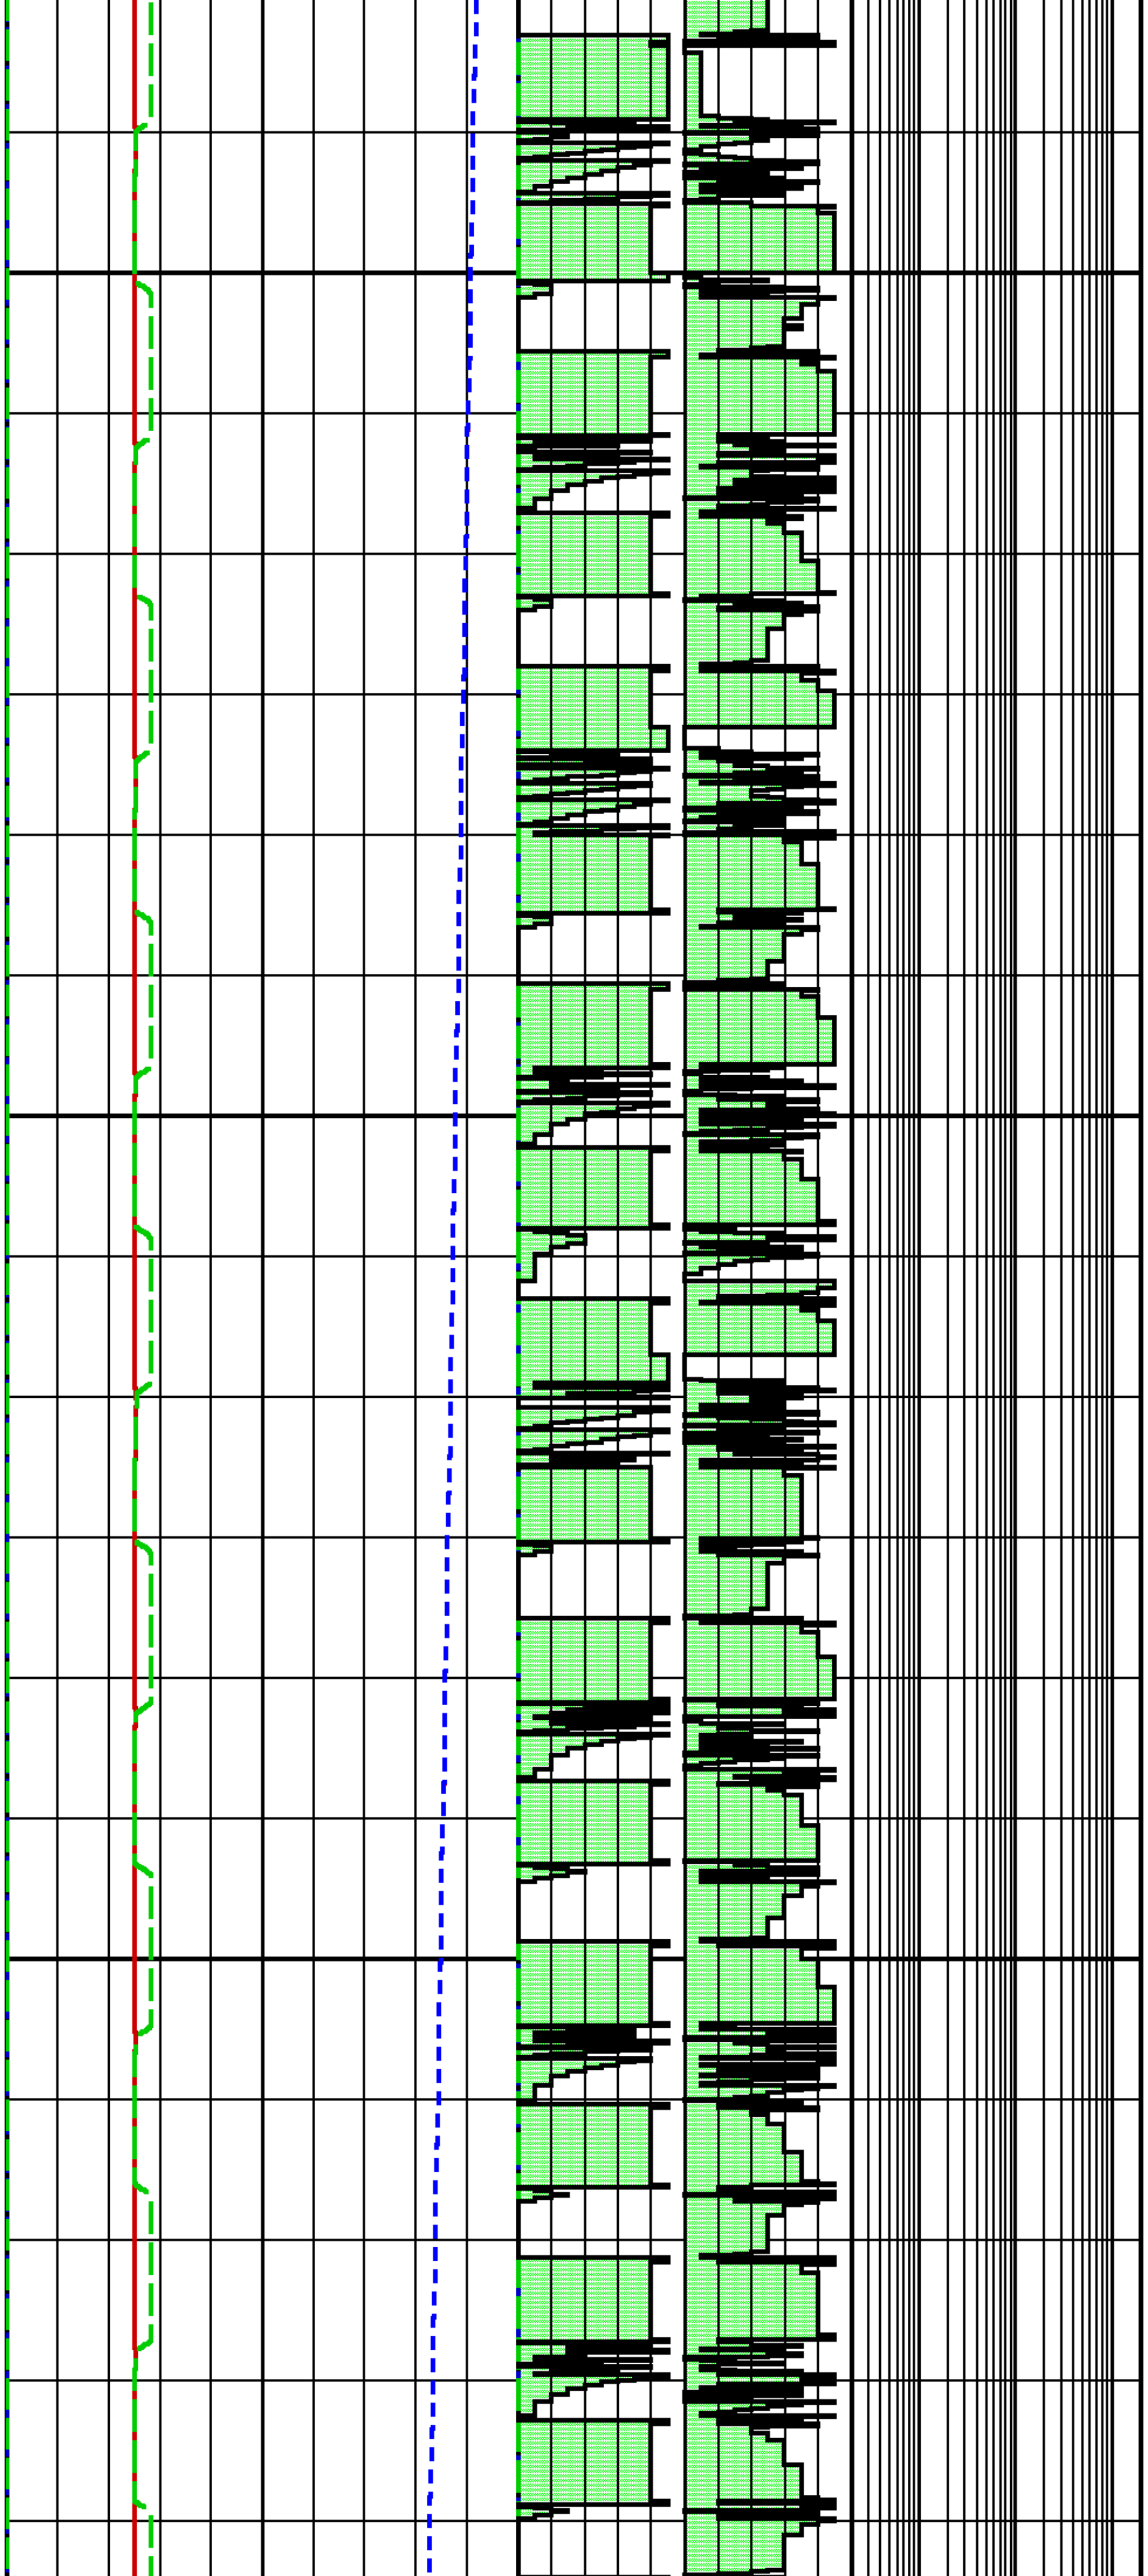

	3759.2	198.4
650	3793.0	198.4
	3760.4	198.4
660	3759.0	198.4
	3760.7	198.4
670	3758.9	198.4
	3764.3	198.4
680	3758.8	198.4
	3760.6	198.4
690	3758.9	198.4
	3800.3	198.4
700	3759.6	198.4
	3758.9	198.4
710	3760.6	198.4
	3759.0	198.4
720	3764.5	198.4
	3758.8	198.4
730	3761.7	198.4
	3758.9	198.4
740	3809.7	198.4
	3759.0	198.5
750	3758.9	198.5
	3760.5	198.5
760	3759.0	198.5
	3763.8	198.5
770	3758.8	198.5
	3760.8	198.5
780	3758.8	198.5
	3768.0	198.5
790	3761.1	198.5
	3758.8	198.5
800	3760.5	198.5
	3758.9	198.5
810	3766.8	198.5
	3758.7	198.5
820	3760.9	198.5

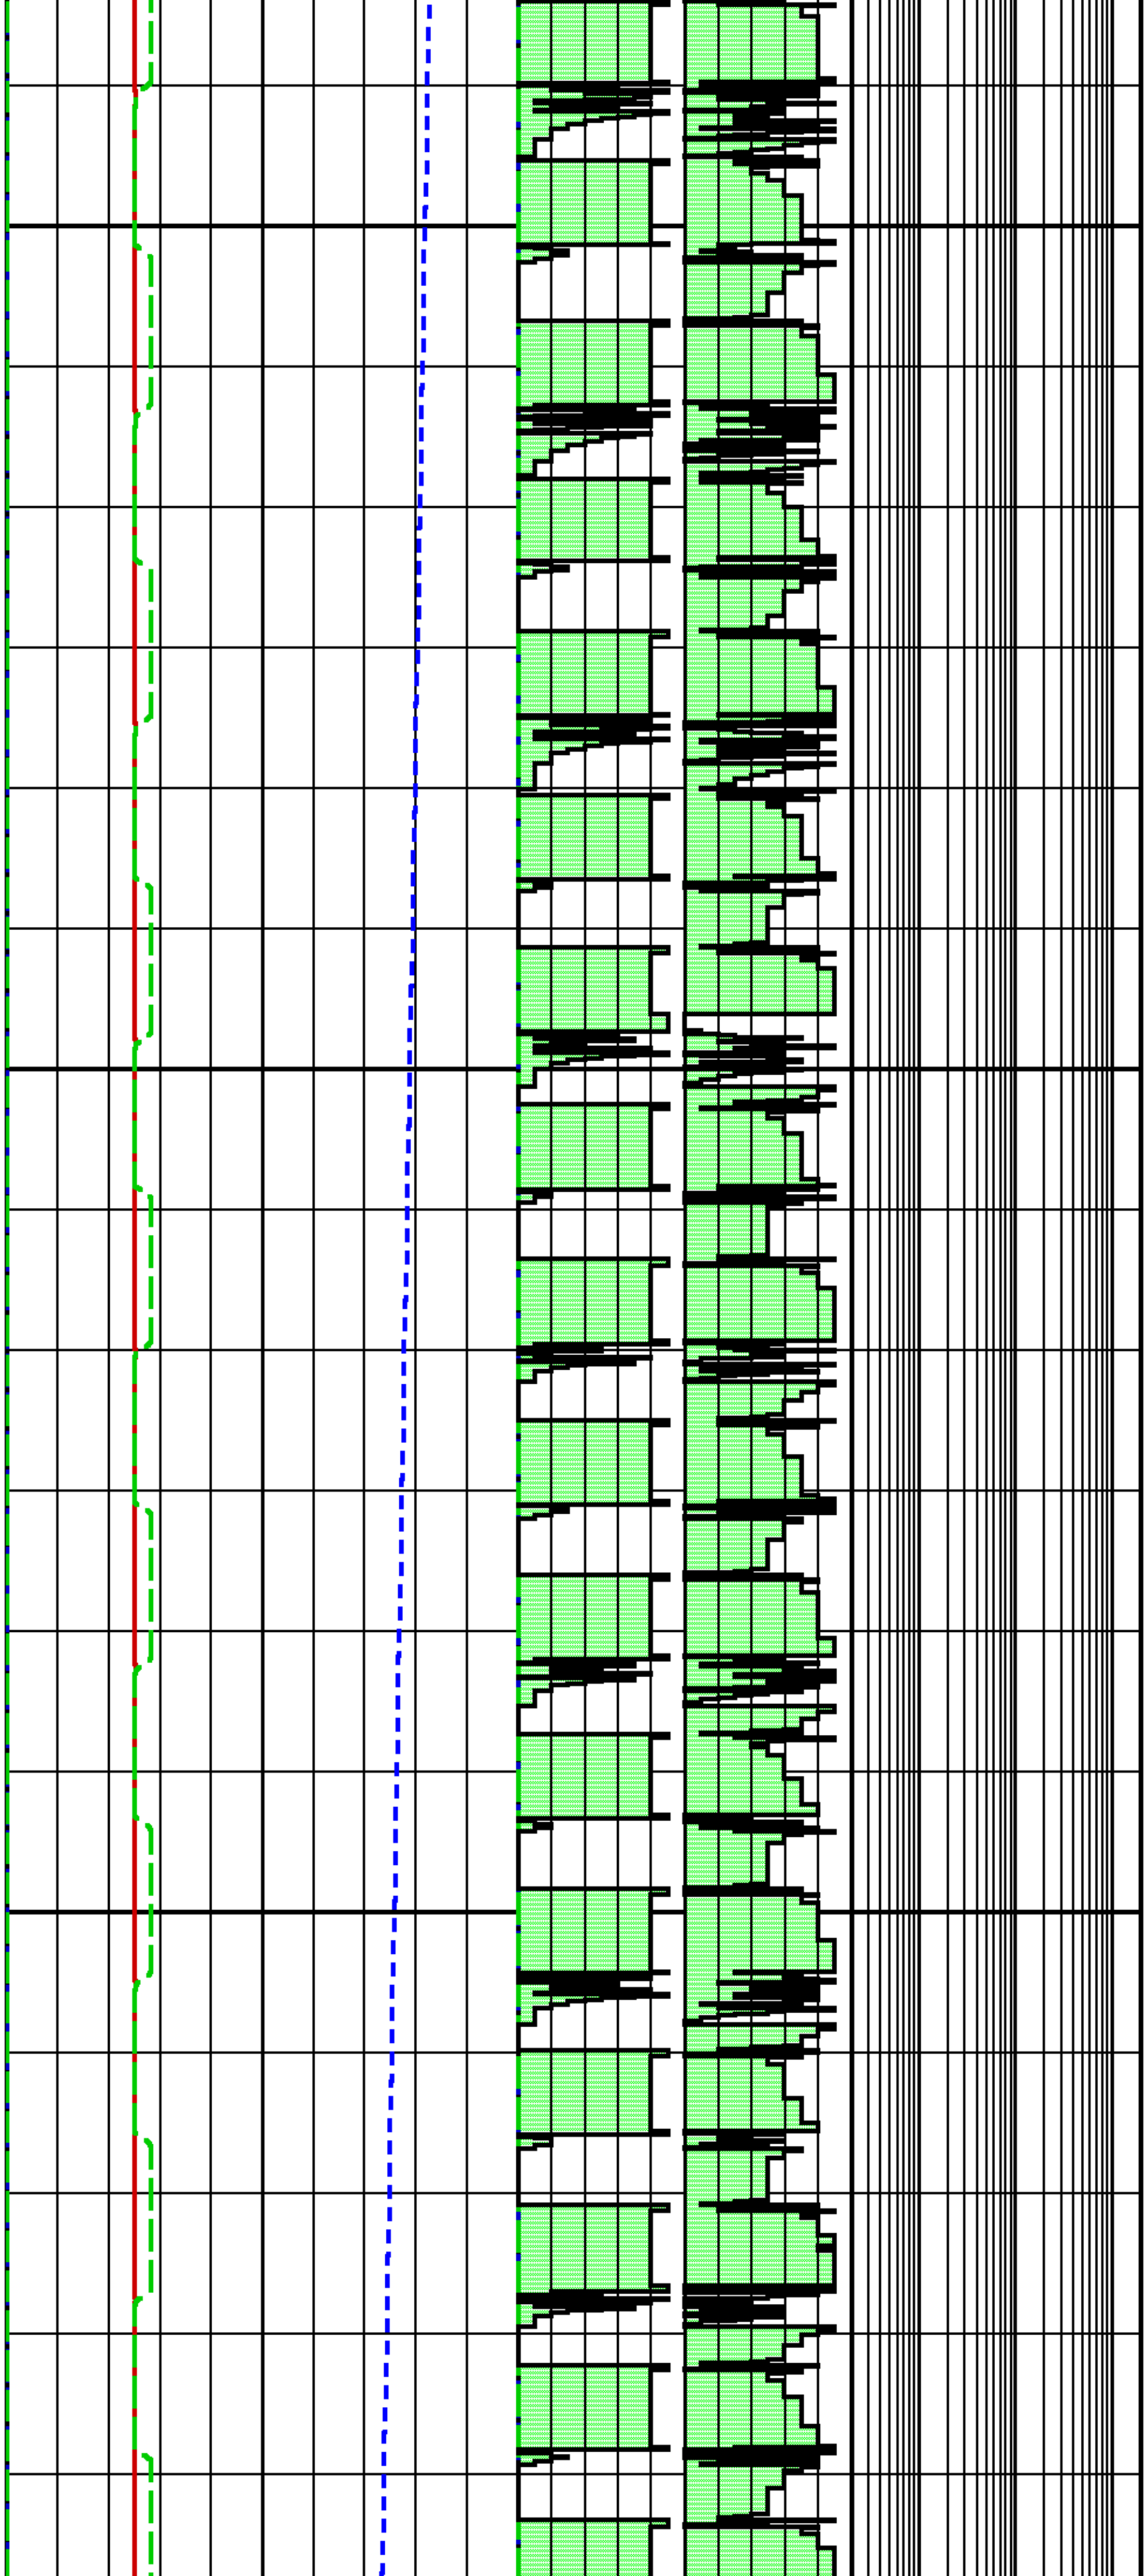

	3758.8	198.5
830	3762.5	198.5
	3761.1	198.5
840	3758.8	198.5
	3760.6	198.5
850	3758.9	198.5
	3766.7	198.5
860	3758.7	198.5
	3761.0	198.5
870	3758.8	198.5
	3763.8	198.5
880	3761.2	198.5
	3758.8	198.5
890	3760.6	198.5
	3759.0	198.5
900	3761.8	198.5
	3758.7	198.5
910	3760.6	198.5
	3758.9	198.5
920	3776.0	198.5
	3760.0	198.5
930	3758.8	198.5
	3760.6	198.5
940	3758.9	198.5
	3761.1	198.5
950	3758.7	198.5
	3760.6	198.5
960	3758.9	198.5
	3785.2	198.5
970	3759.4	198.5
	3758.8	198.5
980	3760.5	198.5
	3759.0	198.5
990	3760.8	198.5
	3758.7	198.5
1000	3760.7	198.5
	3758.9	198.5

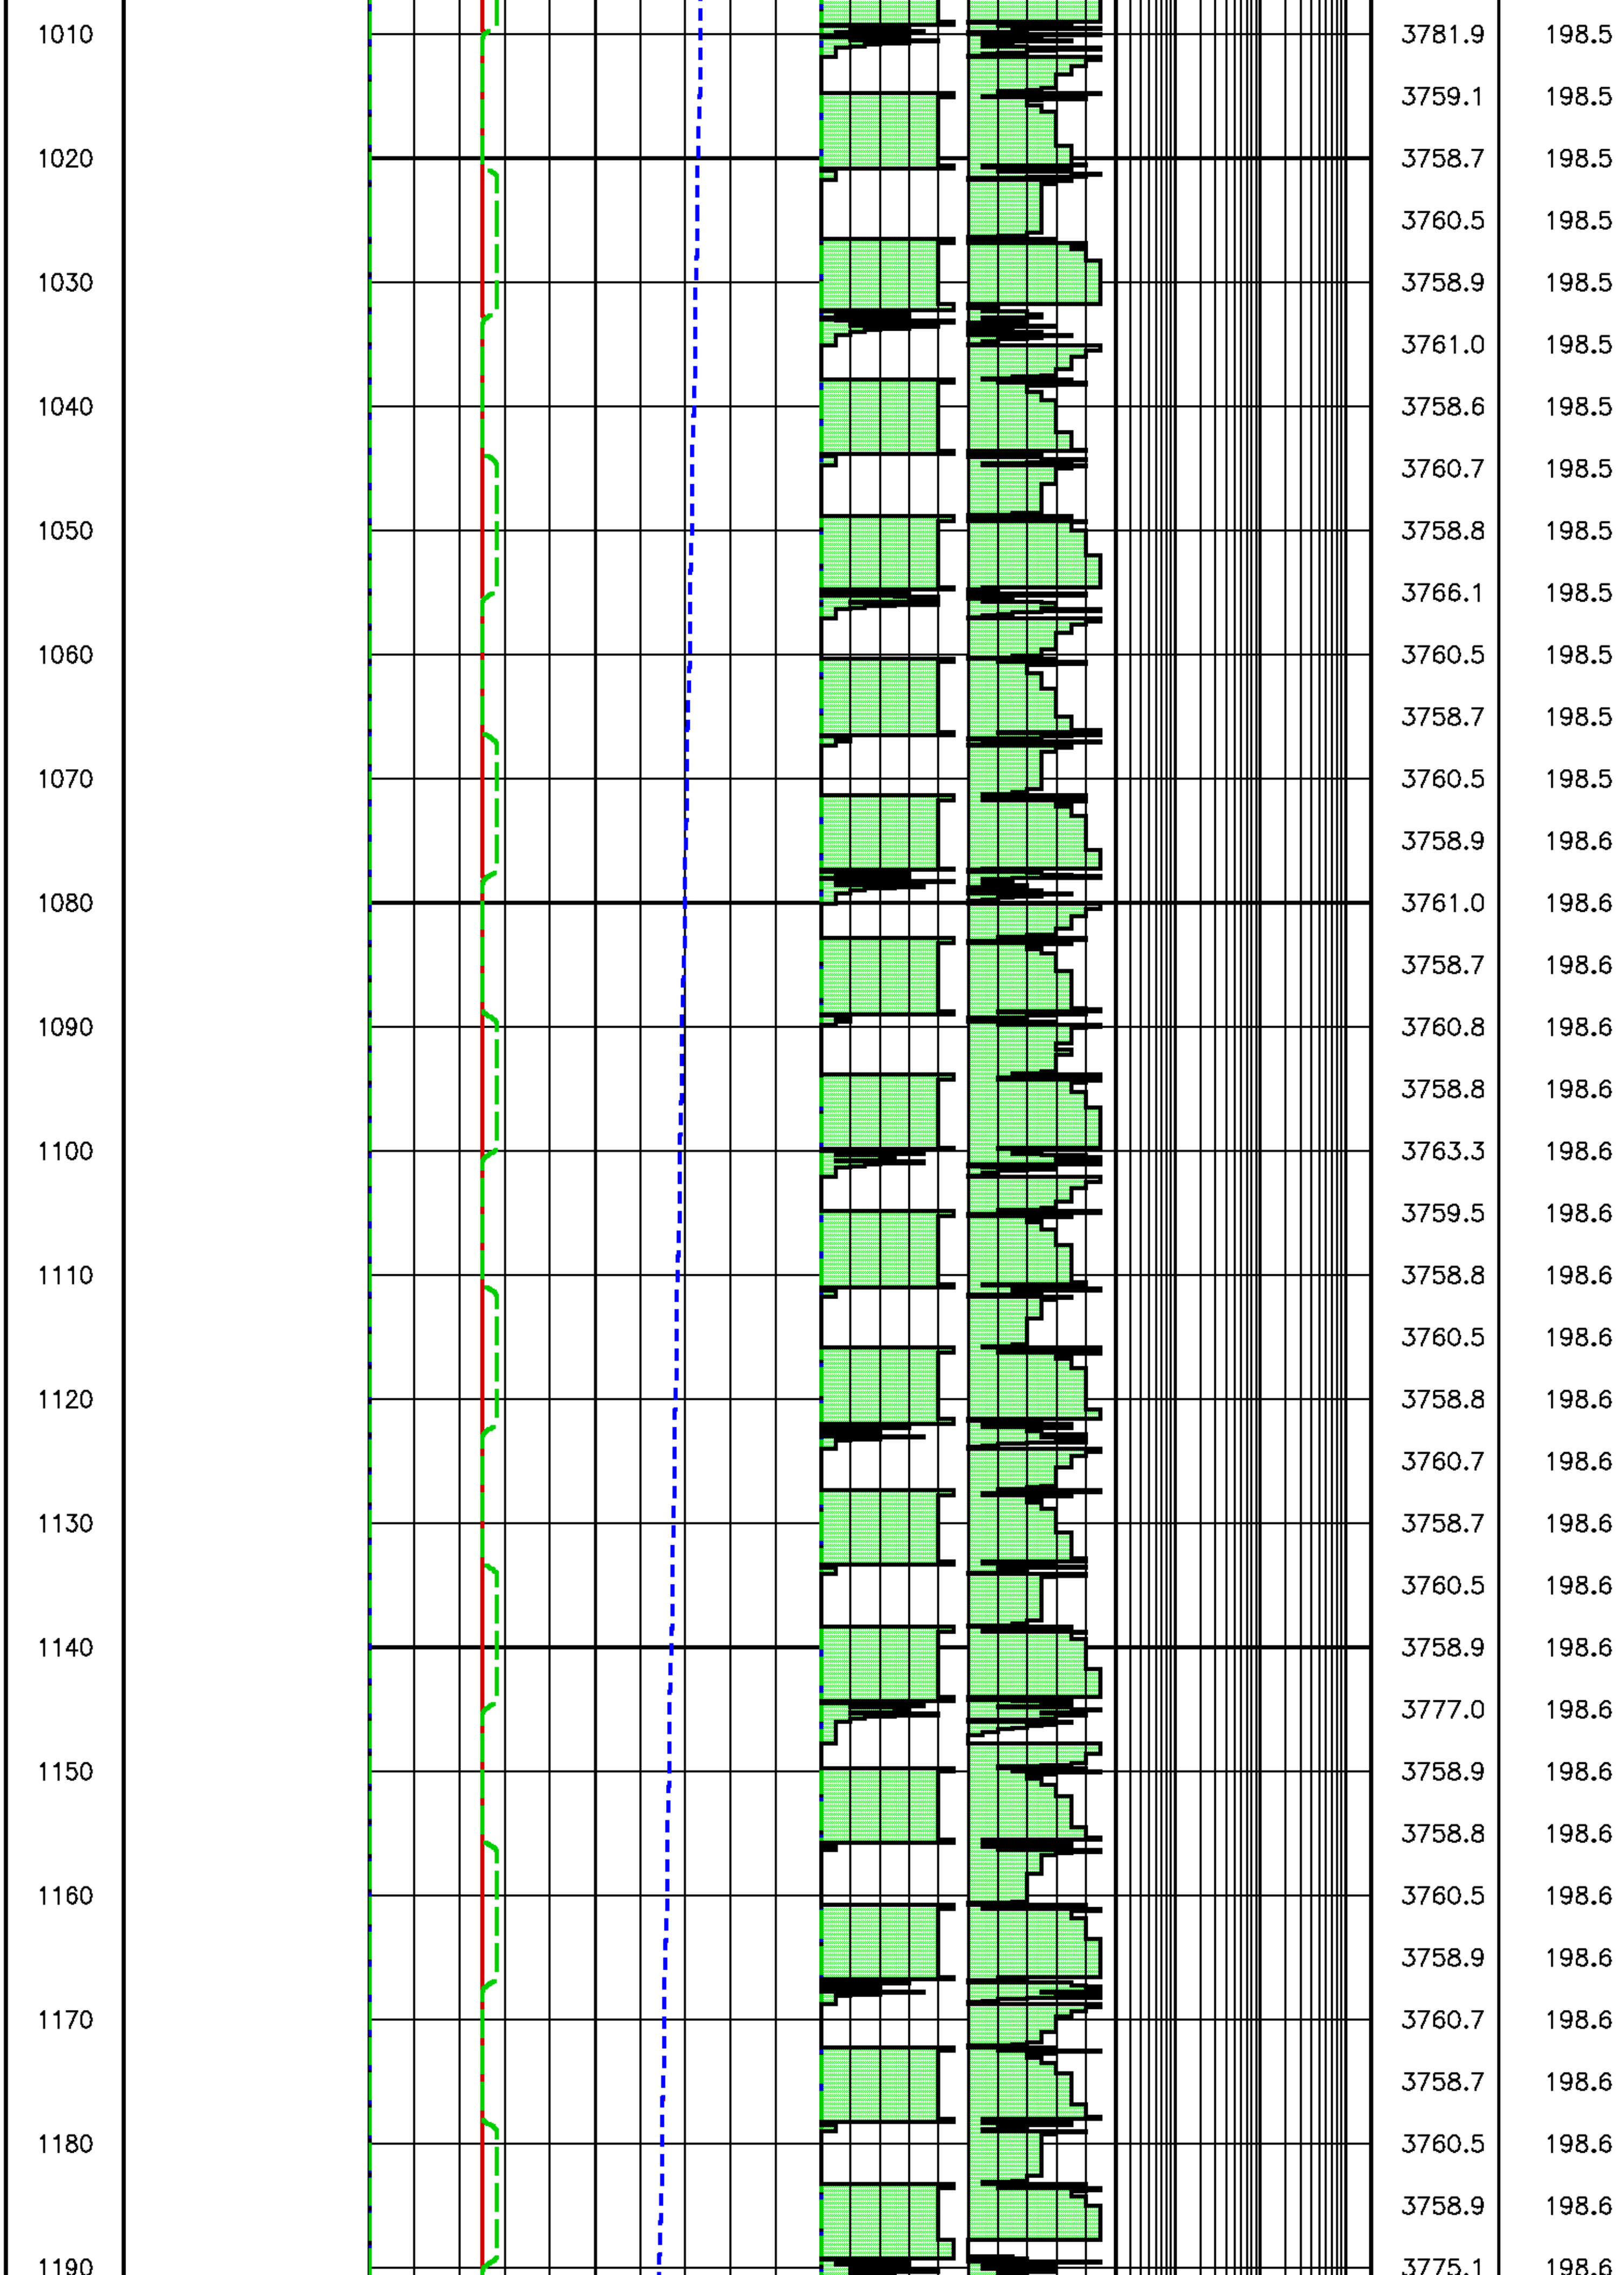

1010 3781.9 198.5
3759.1 198.5
1020 3758.7 198.5
3760.5 198.5
1030 3758.9 198.5
3761.0 198.5
1040 3758.6 198.5
3760.7 198.5
1050 3758.8 198.5
3766.1 198.5
1060 3760.5 198.5
3758.7 198.5
1070 3760.5 198.5
3758.9 198.6
1080 3761.0 198.6
3758.7 198.6
1090 3760.8 198.6
3758.8 198.6
1100 3763.3 198.6
3759.5 198.6
1110 3758.8 198.6
3760.5 198.6
1120 3758.8 198.6
3760.7 198.6
1130 3758.7 198.6
3760.5 198.6
1140 3758.9 198.6
3777.0 198.6
1150 3758.9 198.6
3758.8 198.6
1160 3760.5 198.6
3758.9 198.6
1170 3760.7 198.6
3758.7 198.6
1180 3760.5 198.6
3758.9 198.6
1190 3775.1 198.6

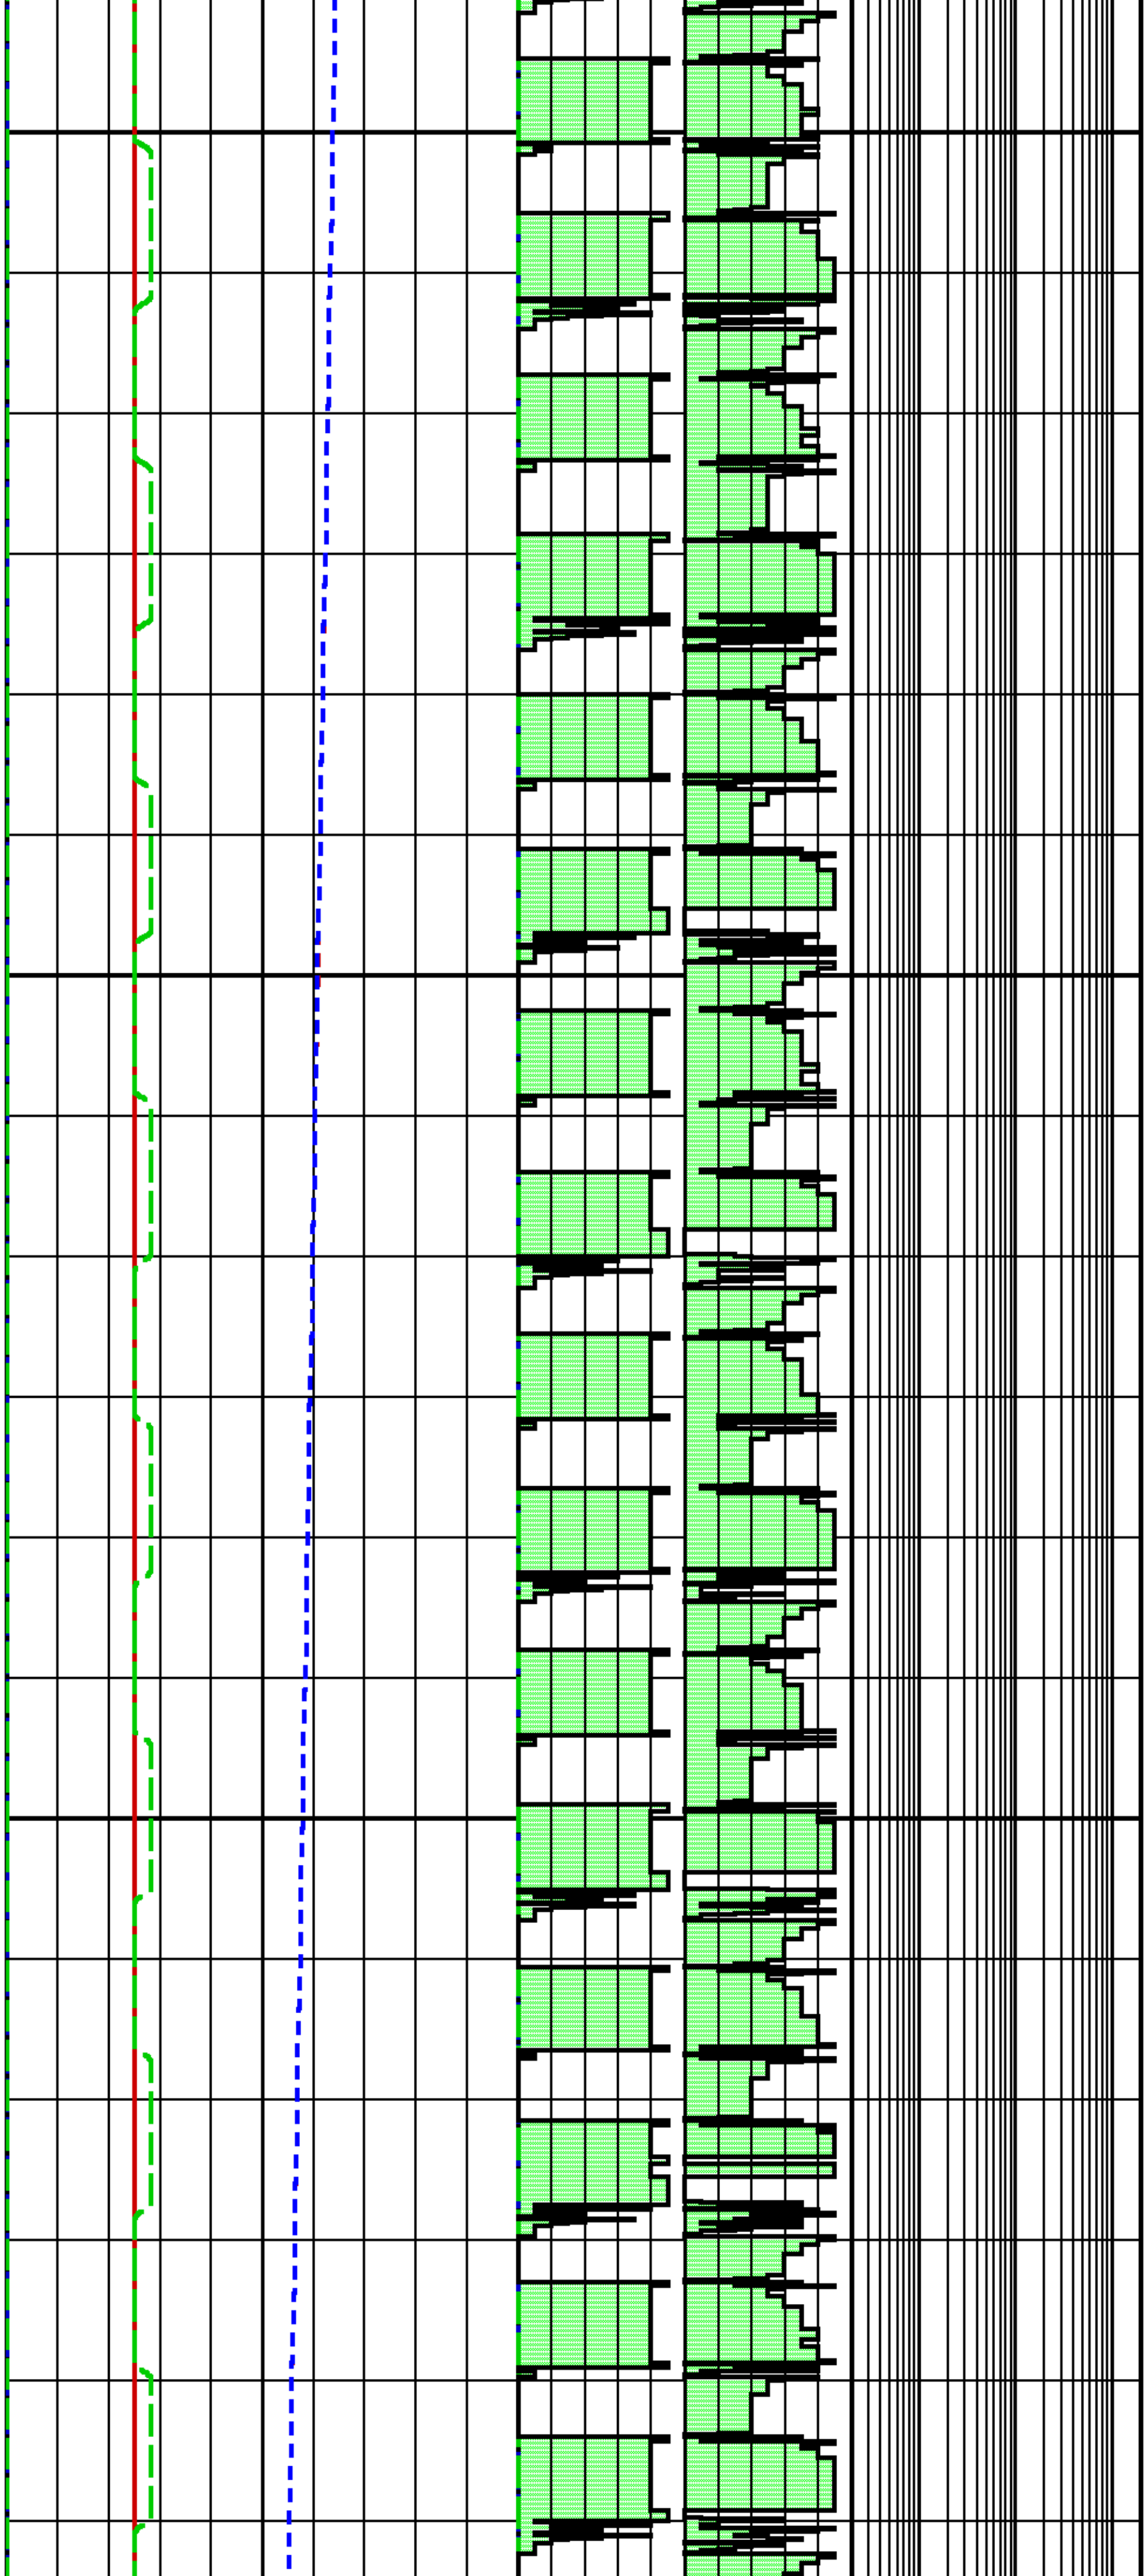

	3759.1	198.6
1200	3758.8	198.6
	3760.5	198.6
1210	3758.9	198.6
	3760.7	198.6
1220	3758.7	198.6
	3760.6	198.6
1230	3758.9	198.6
	3773.8	198.6
1240	3759.7	198.6
	3758.9	198.6
1250	3760.5	198.6
	3759.0	198.6
1260	3760.8	198.6
	3758.7	198.6
1270	3760.5	198.6
	3758.8	198.6
1280	3760.5	198.6
	3760.6	198.6
1290	3758.8	198.6
	3760.5	198.6
1300	3758.9	198.6
	3760.8	198.6
1310	3758.7	198.6
	3760.6	198.6
1320	3758.9	198.6
	3759.5	198.6
1330	3760.6	198.6
	3758.9	198.6
1340	3760.5	198.6
	3759.0	198.6
1350	3760.9	198.6
	3758.7	198.6
1360	3760.5	198.6
	3758.8	198.6
1370	3761.3	198.6

	3760.6	198.6
1380	3758.8	198.6
	3760.5	198.6
1390	3759.0	198.6
	3760.9	198.6
1400	3758.7	198.6
	3760.6	198.6
1410	3758.8	198.6
	3760.7	198.6
1420	3760.0	198.6
	3758.9	198.6
1430	3760.5	198.6
	3759.0	198.6
1440	3760.8	198.6
	3758.8	198.6
1450	3760.5	198.6
	3759.0	198.6
1460	3771.5	198.6
	3758.5	198.6
1470	3758.8	198.6
	3760.5	198.6
1480	3759.0	198.6
	3760.6	198.6
1490	3758.8	198.6
	3760.5	198.6
1500	3758.9	198.6
	3772.5	198.6
1510	3759.1	198.6
	3758.8	198.6
1520	3760.5	198.6
	3759.0	198.6
1530	3761.1	198.6
	3758.9	198.6
1540	3760.5	198.6
	3759.0	198.6
1550	3761.8	198.6
	3758.6	198.6

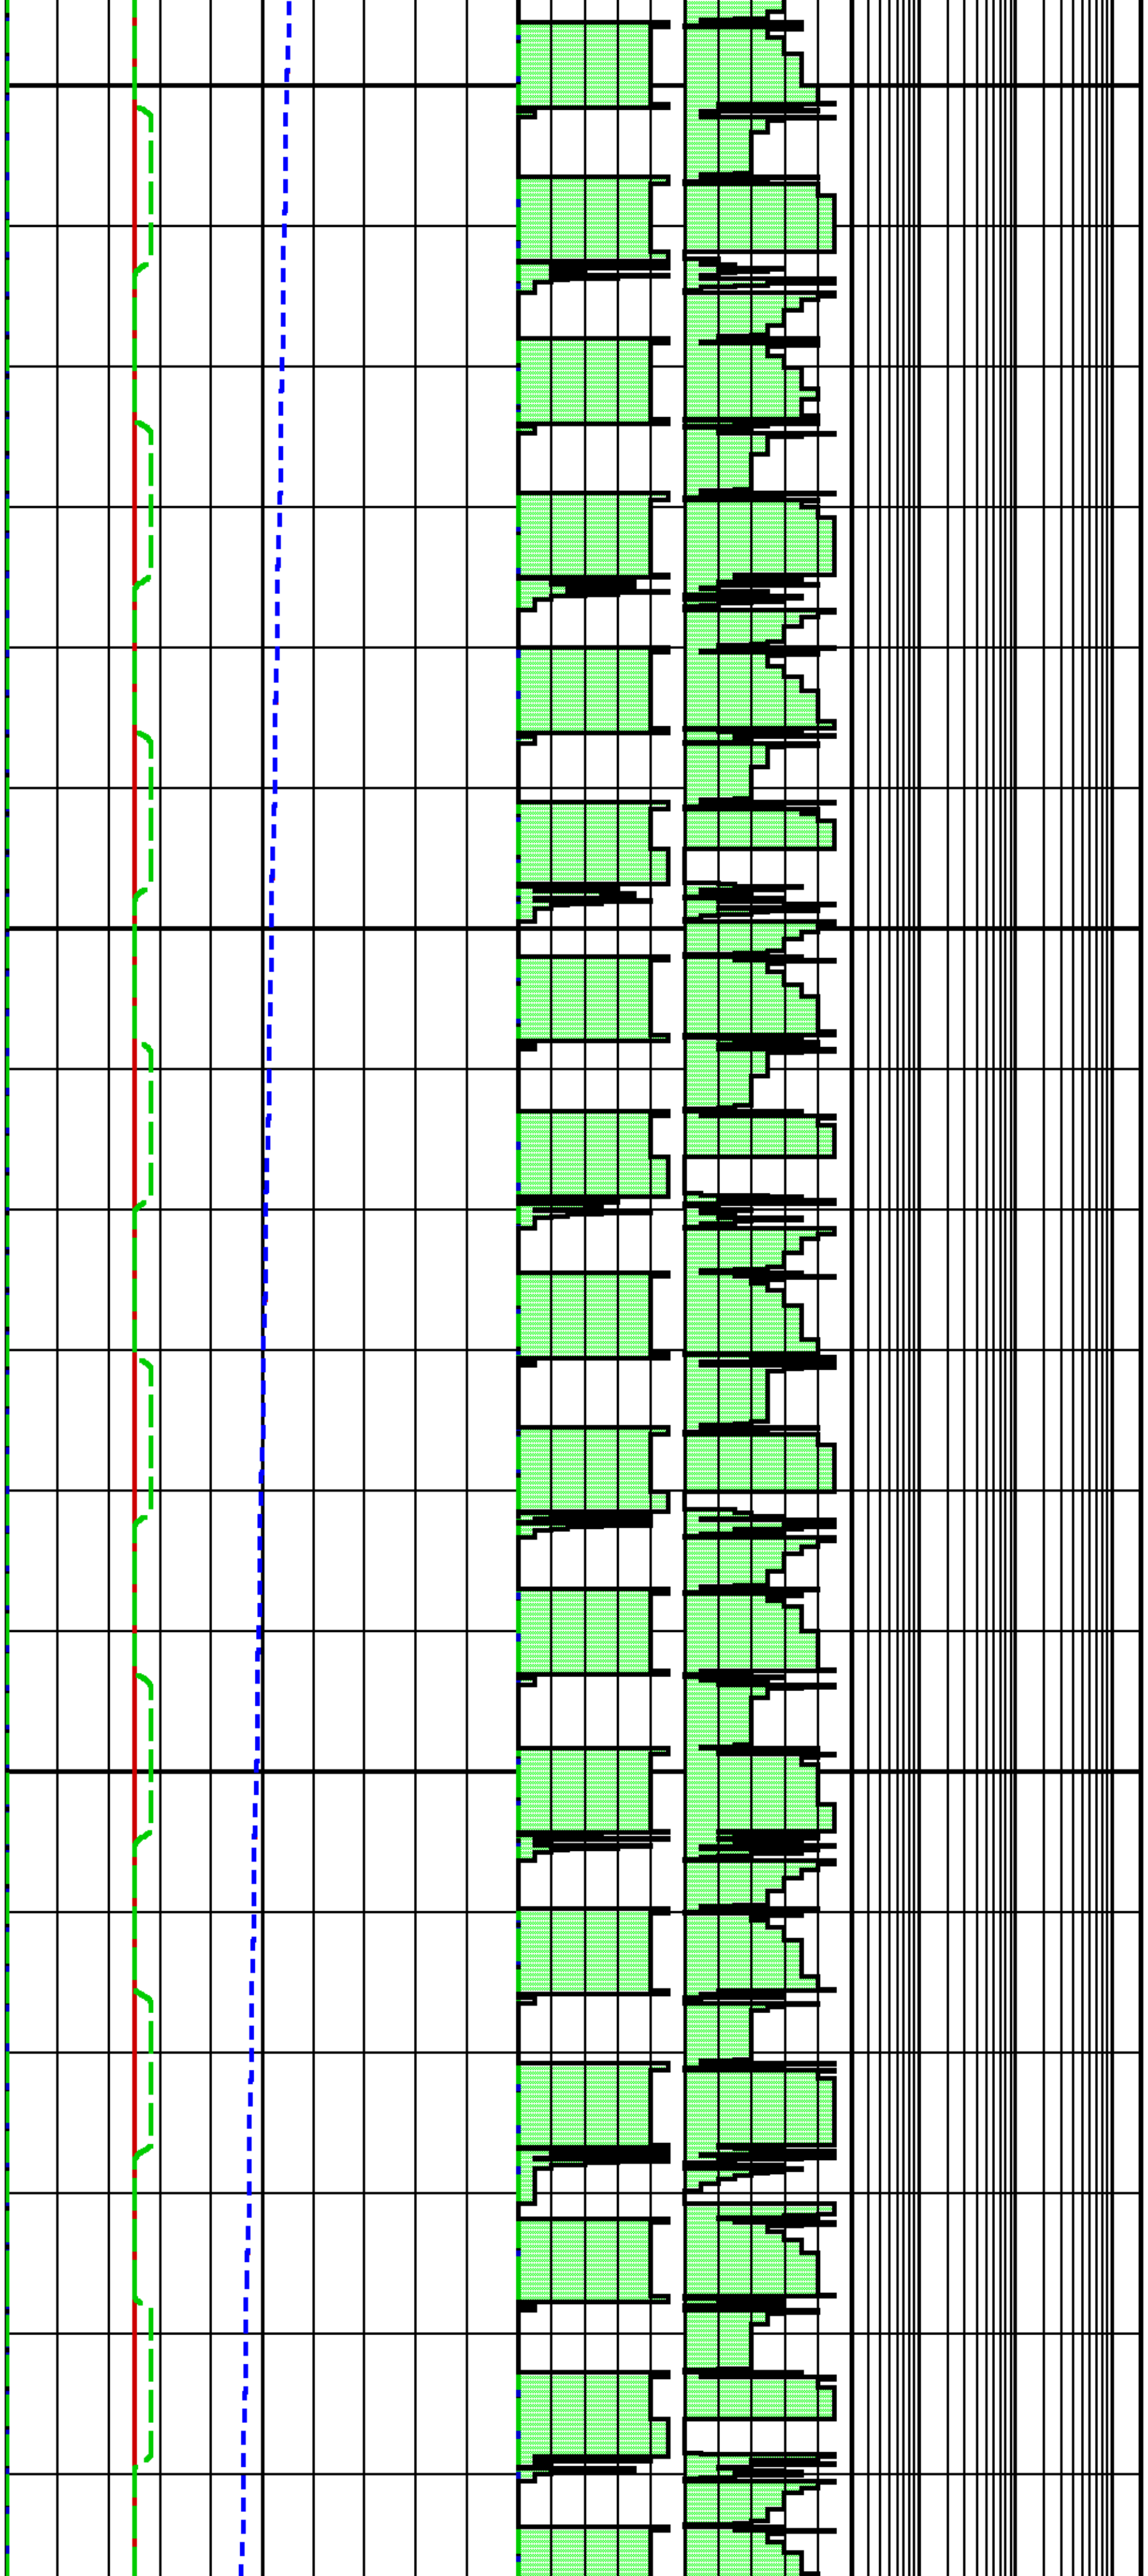

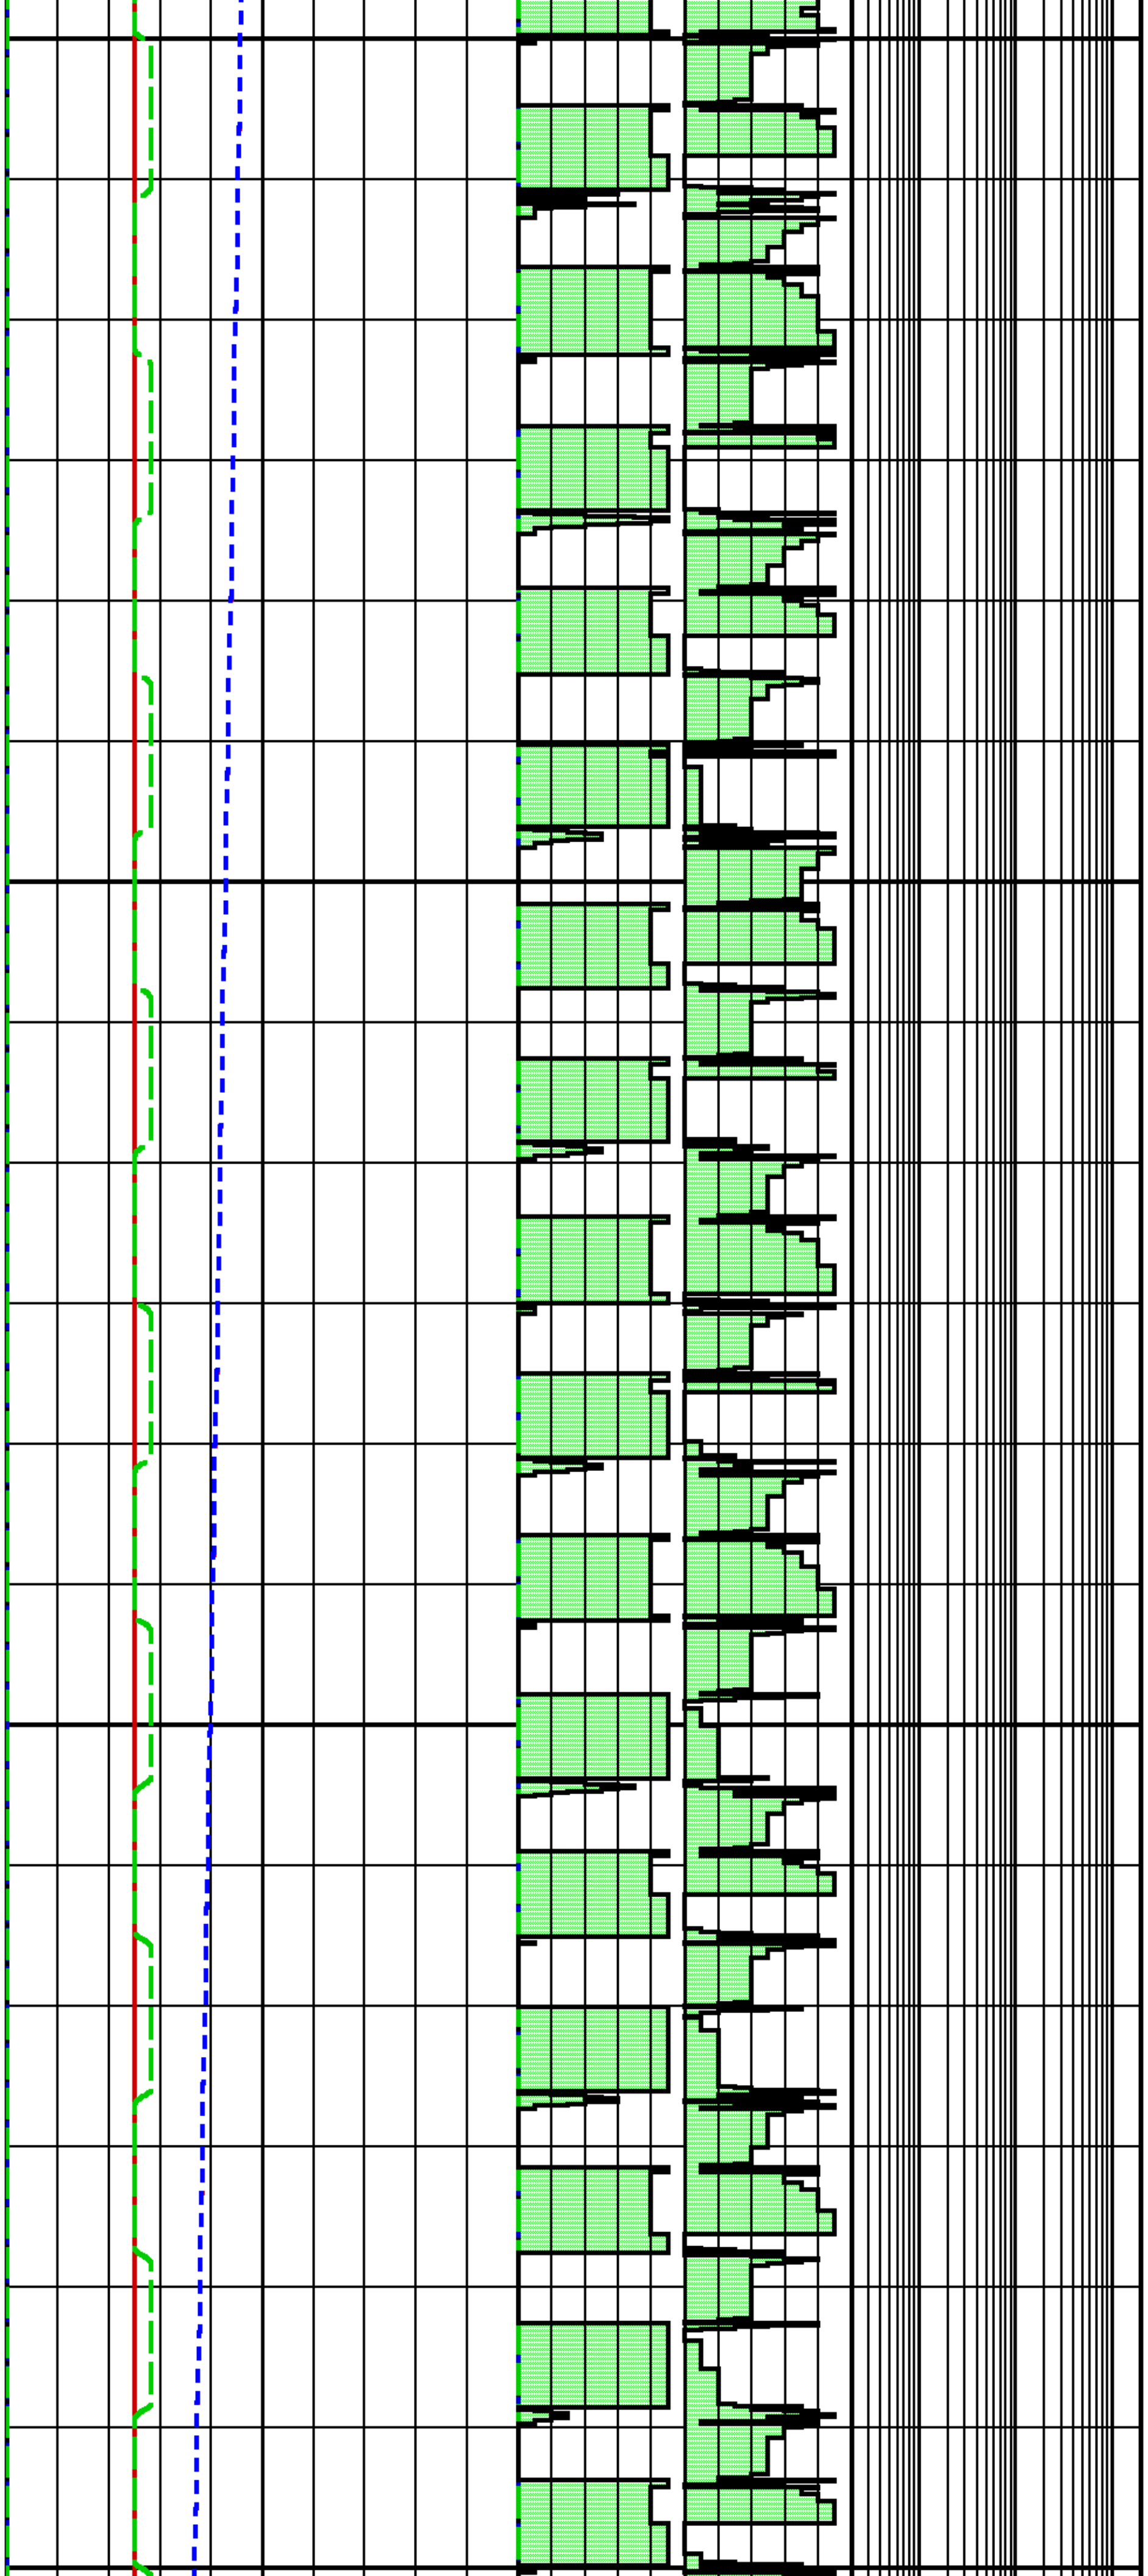

1560	3760.9	198.6
	3759.2	198.6
1570	3759.1	198.6
	3760.6	198.6
1580	3758.9	198.6
	3760.5	198.6
1590	3759.0	198.6
	3761.3	198.6
1600	3758.7	198.6
	3759.3	198.6
1610	3760.2	198.6
	3759.2	198.6
1620	3760.8	198.6
	3759.0	198.6
1630	3760.5	198.6
	3759.1	198.6
1640	3760.7	198.6
	3758.7	198.6
1650	3760.0	198.6
	3759.8	198.6
1660	3759.1	198.6
	3760.6	198.6
1670	3758.9	198.6
	3760.5	198.6
1680	3759.2	198.6
	3761.3	198.6
1690	3758.8	198.6
	3759.8	198.6
1700	3760.0	198.6
	3759.3	198.6
1710	3760.5	198.6
	3758.9	198.6
1720	3760.5	198.6
	3759.2	198.6
1730	3760.7	198.6
	3758.9	198.6
1740	3760.6	198.6

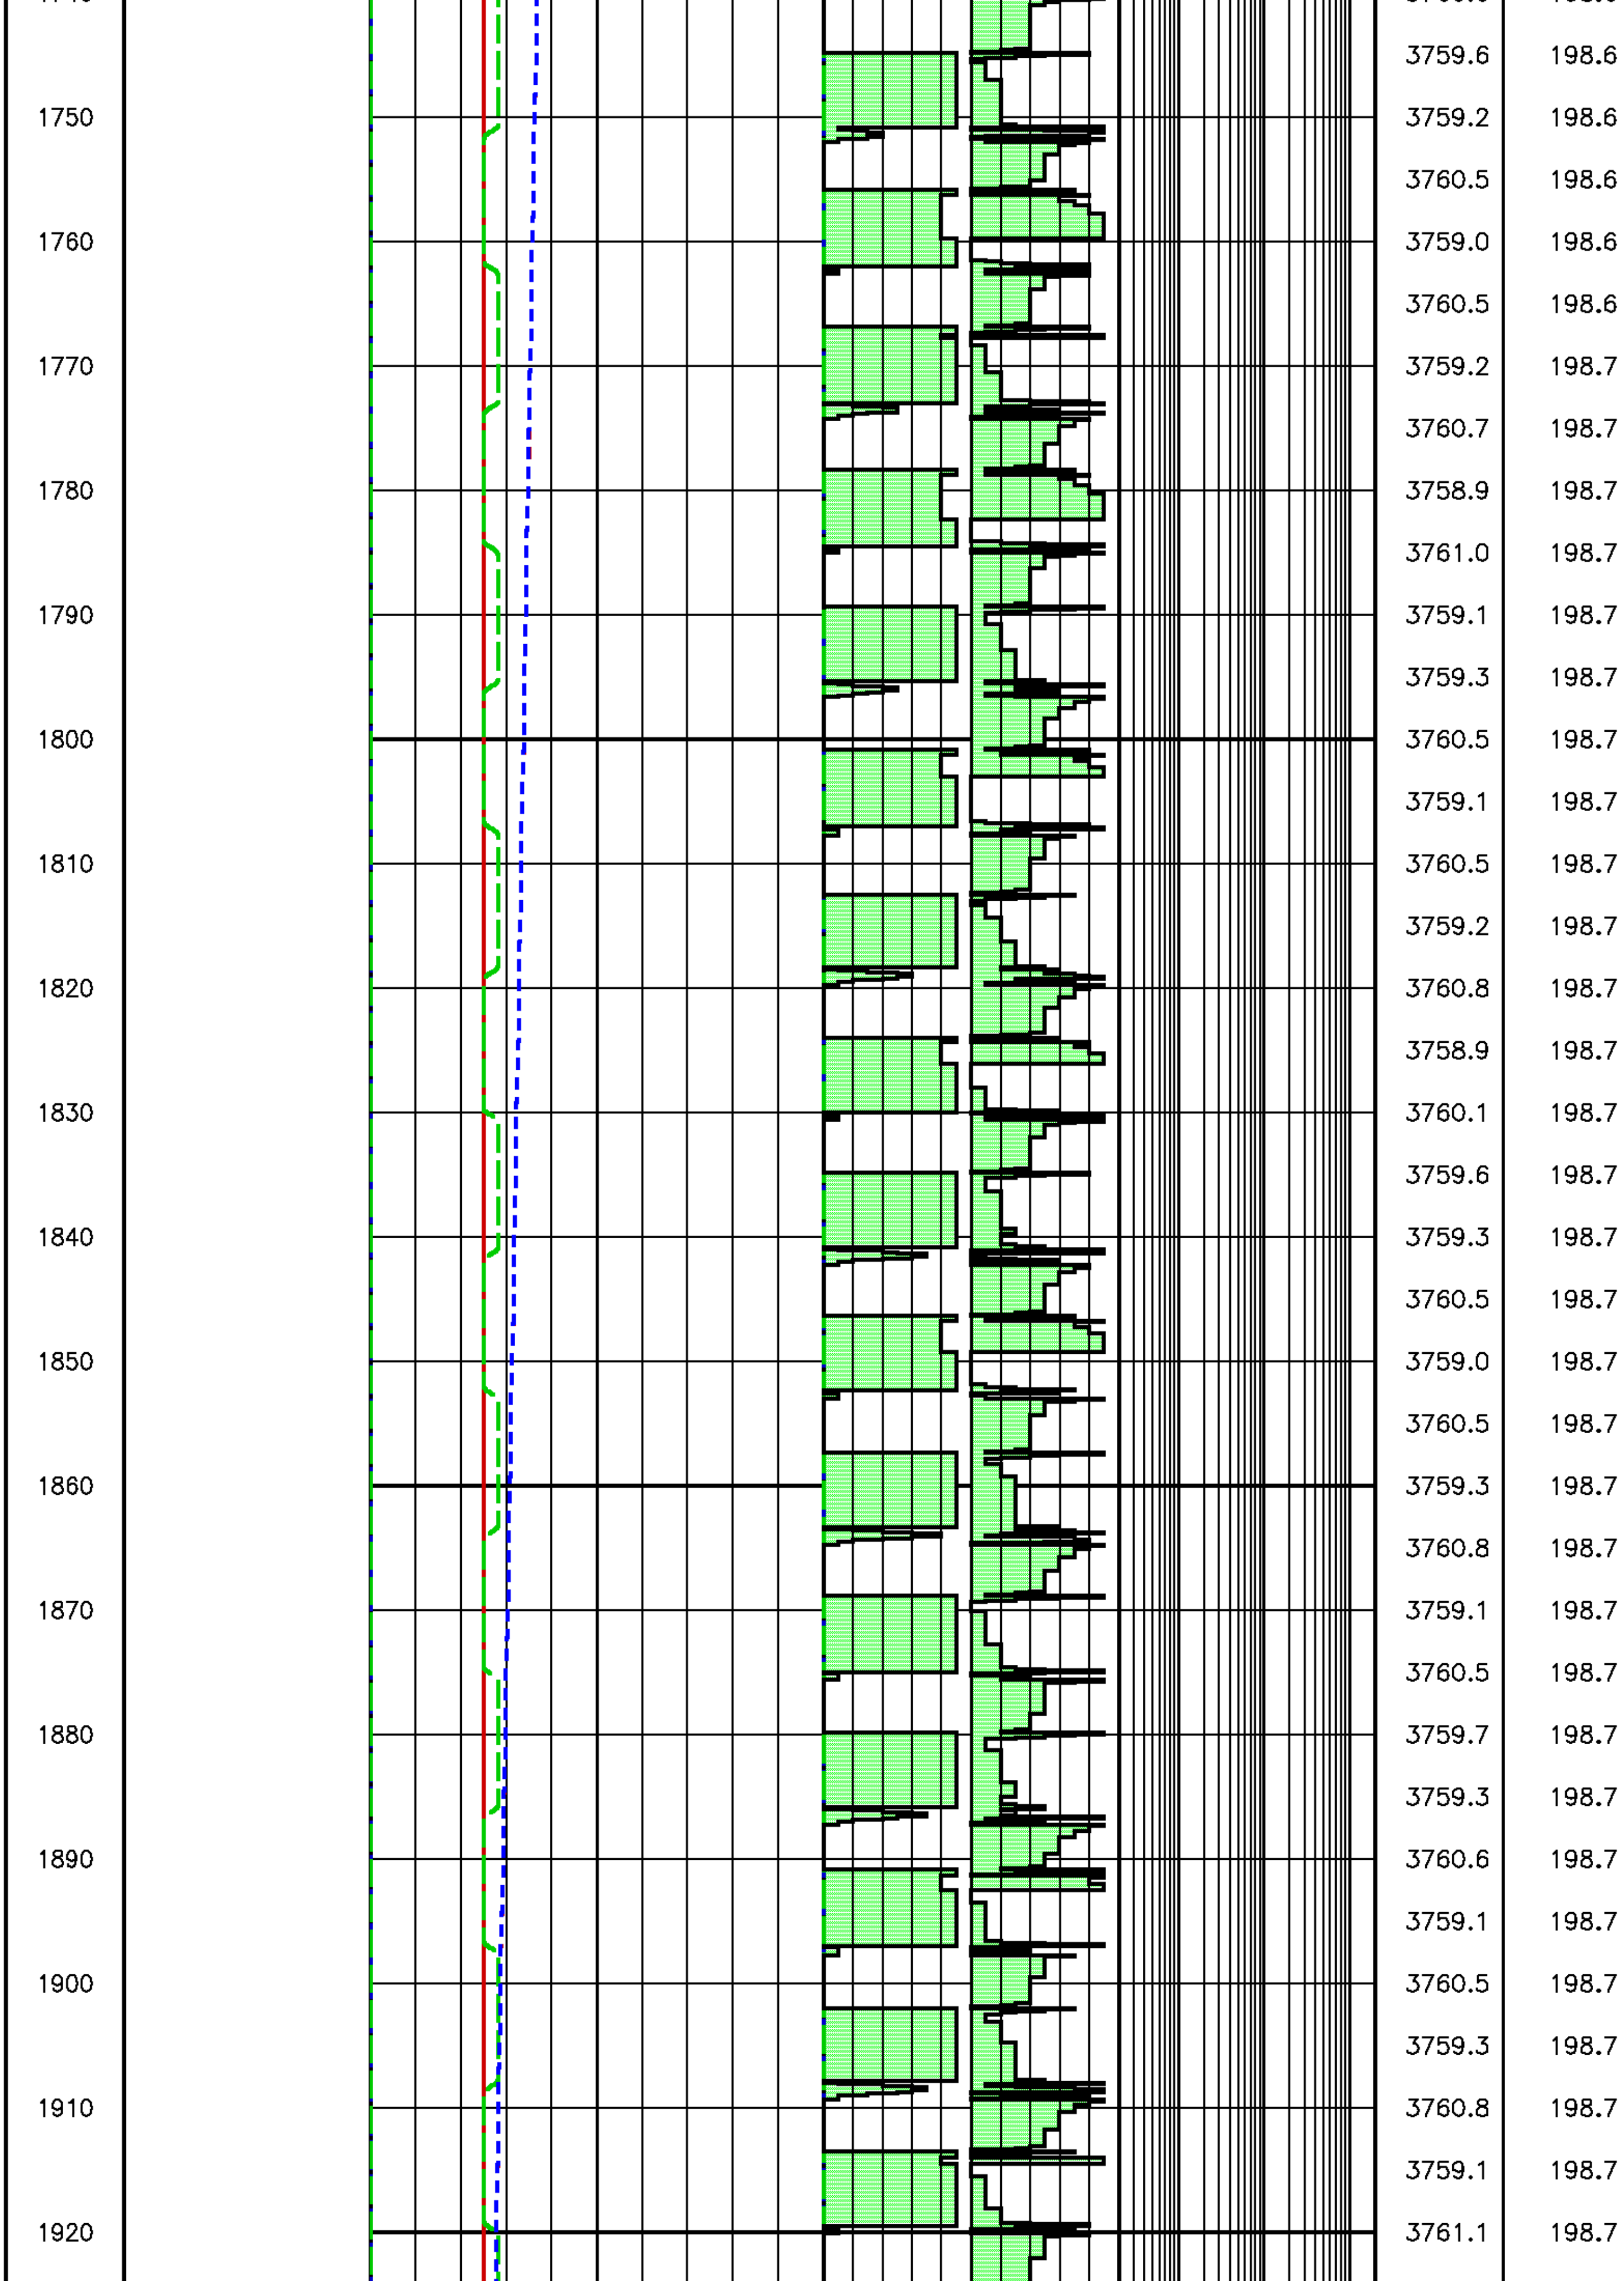

3759.6 198.6
1750 3759.2 198.6
3760.5 198.6
1760 3759.0 198.6
3760.5 198.6
1770 3759.2 198.7
3760.7 198.7
1780 3758.9 198.7
3761.0 198.7
1790 3759.1 198.7
3759.3 198.7
1800 3760.5 198.7
3759.1 198.7
1810 3760.5 198.7
3759.2 198.7
1820 3760.8 198.7
3758.9 198.7
1830 3760.1 198.7
3759.6 198.7
1840 3759.3 198.7
3760.5 198.7
1850 3759.0 198.7
3760.5 198.7
1860 3759.3 198.7
3760.8 198.7
1870 3759.1 198.7
3760.5 198.7
1880 3759.7 198.7
3759.3 198.7
1890 3760.6 198.7
3759.1 198.7
1900 3760.5 198.7
3759.3 198.7
1910 3760.8 198.7
3759.1 198.7
1920 3761.1 198.7

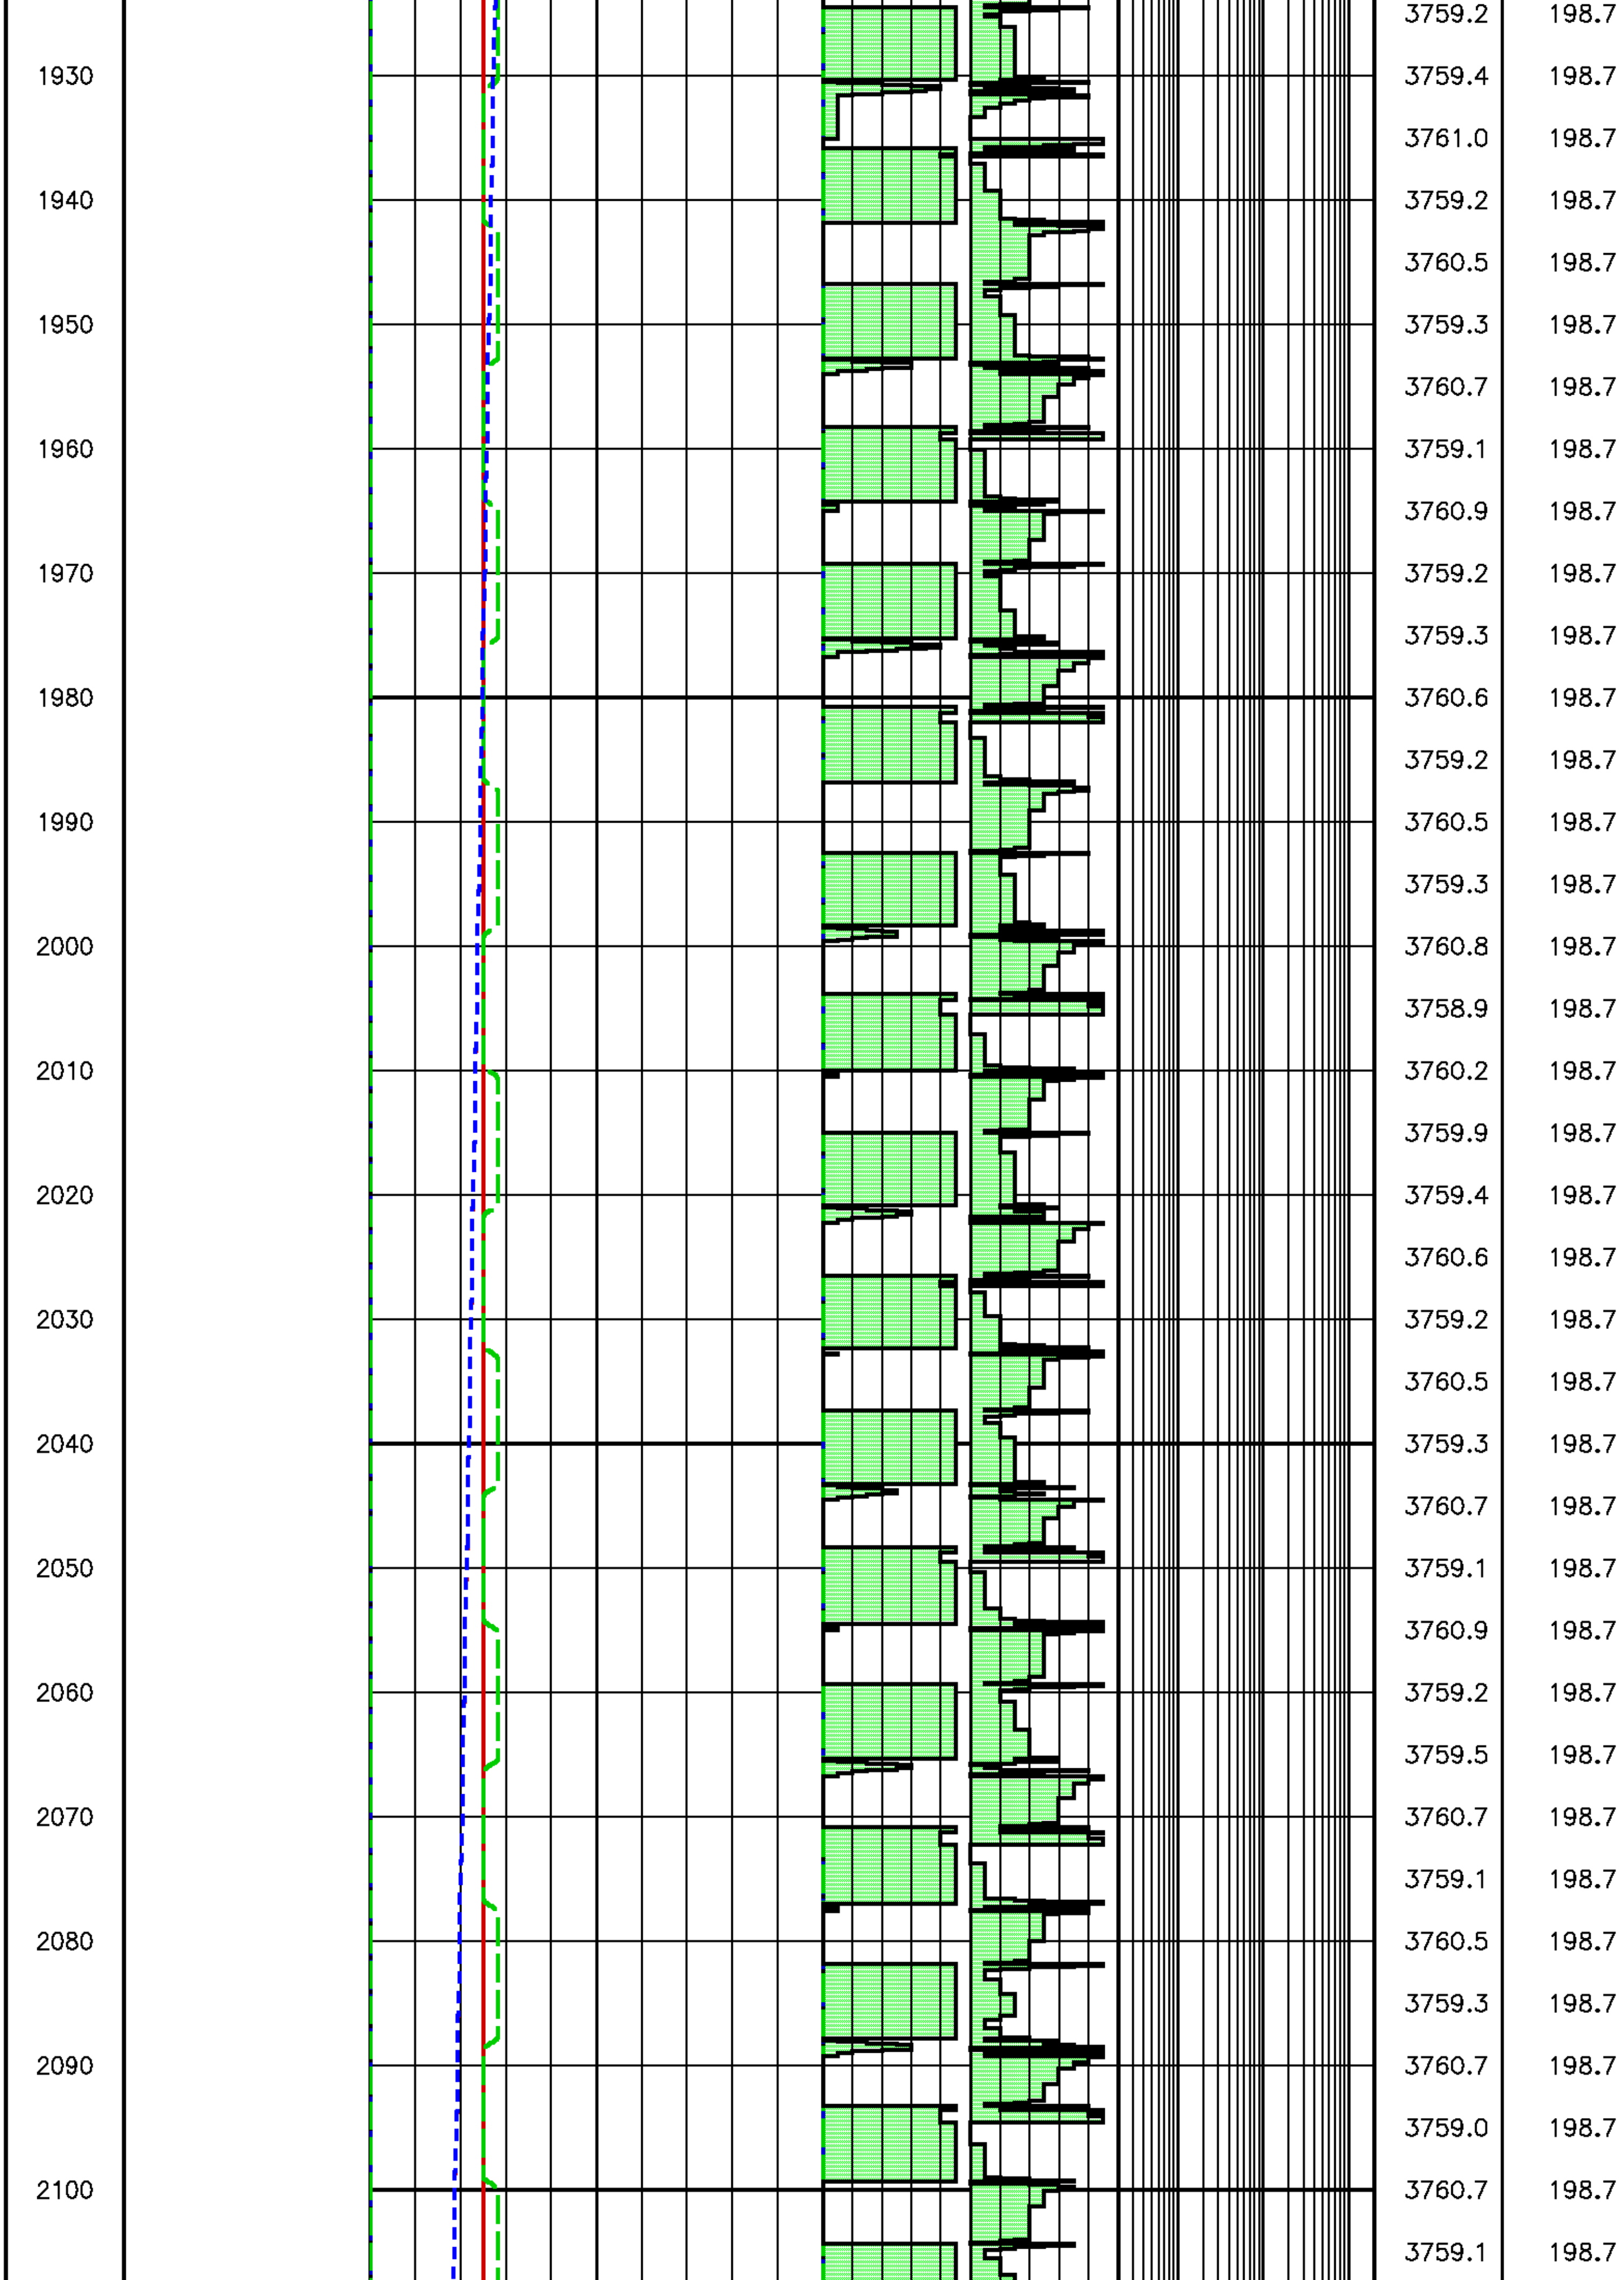
1930
1940
1950
1960
1970
1980
1990
2000
2010
2020
2030
2040
2050
2060
2070
2080
2090
2100
3759.2 198.7
3759.4 198.7
3761.0 198.7
3759.2 198.7
3760.5 198.7
3759.3 198.7
3760.7 198.7
3759.1 198.7
3760.9 198.7
3759.2 198.7
3759.3 198.7
3760.6 198.7
3759.2 198.7
3760.5 198.7
3759.3 198.7
3760.8 198.7
3758.9 198.7
3760.2 198.7
3759.9 198.7
3759.4 198.7
3760.6 198.7
3759.2 198.7
3760.5 198.7
3759.3 198.7
3760.7 198.7
3759.1 198.7
3760.9 198.7
3759.2 198.7
3759.5 198.7
3760.7 198.7
3759.1 198.7
3760.5 198.7
3759.3 198.7
3760.7 198.7
3759.0 198.7
3760.7 198.7
3759.1 198.7

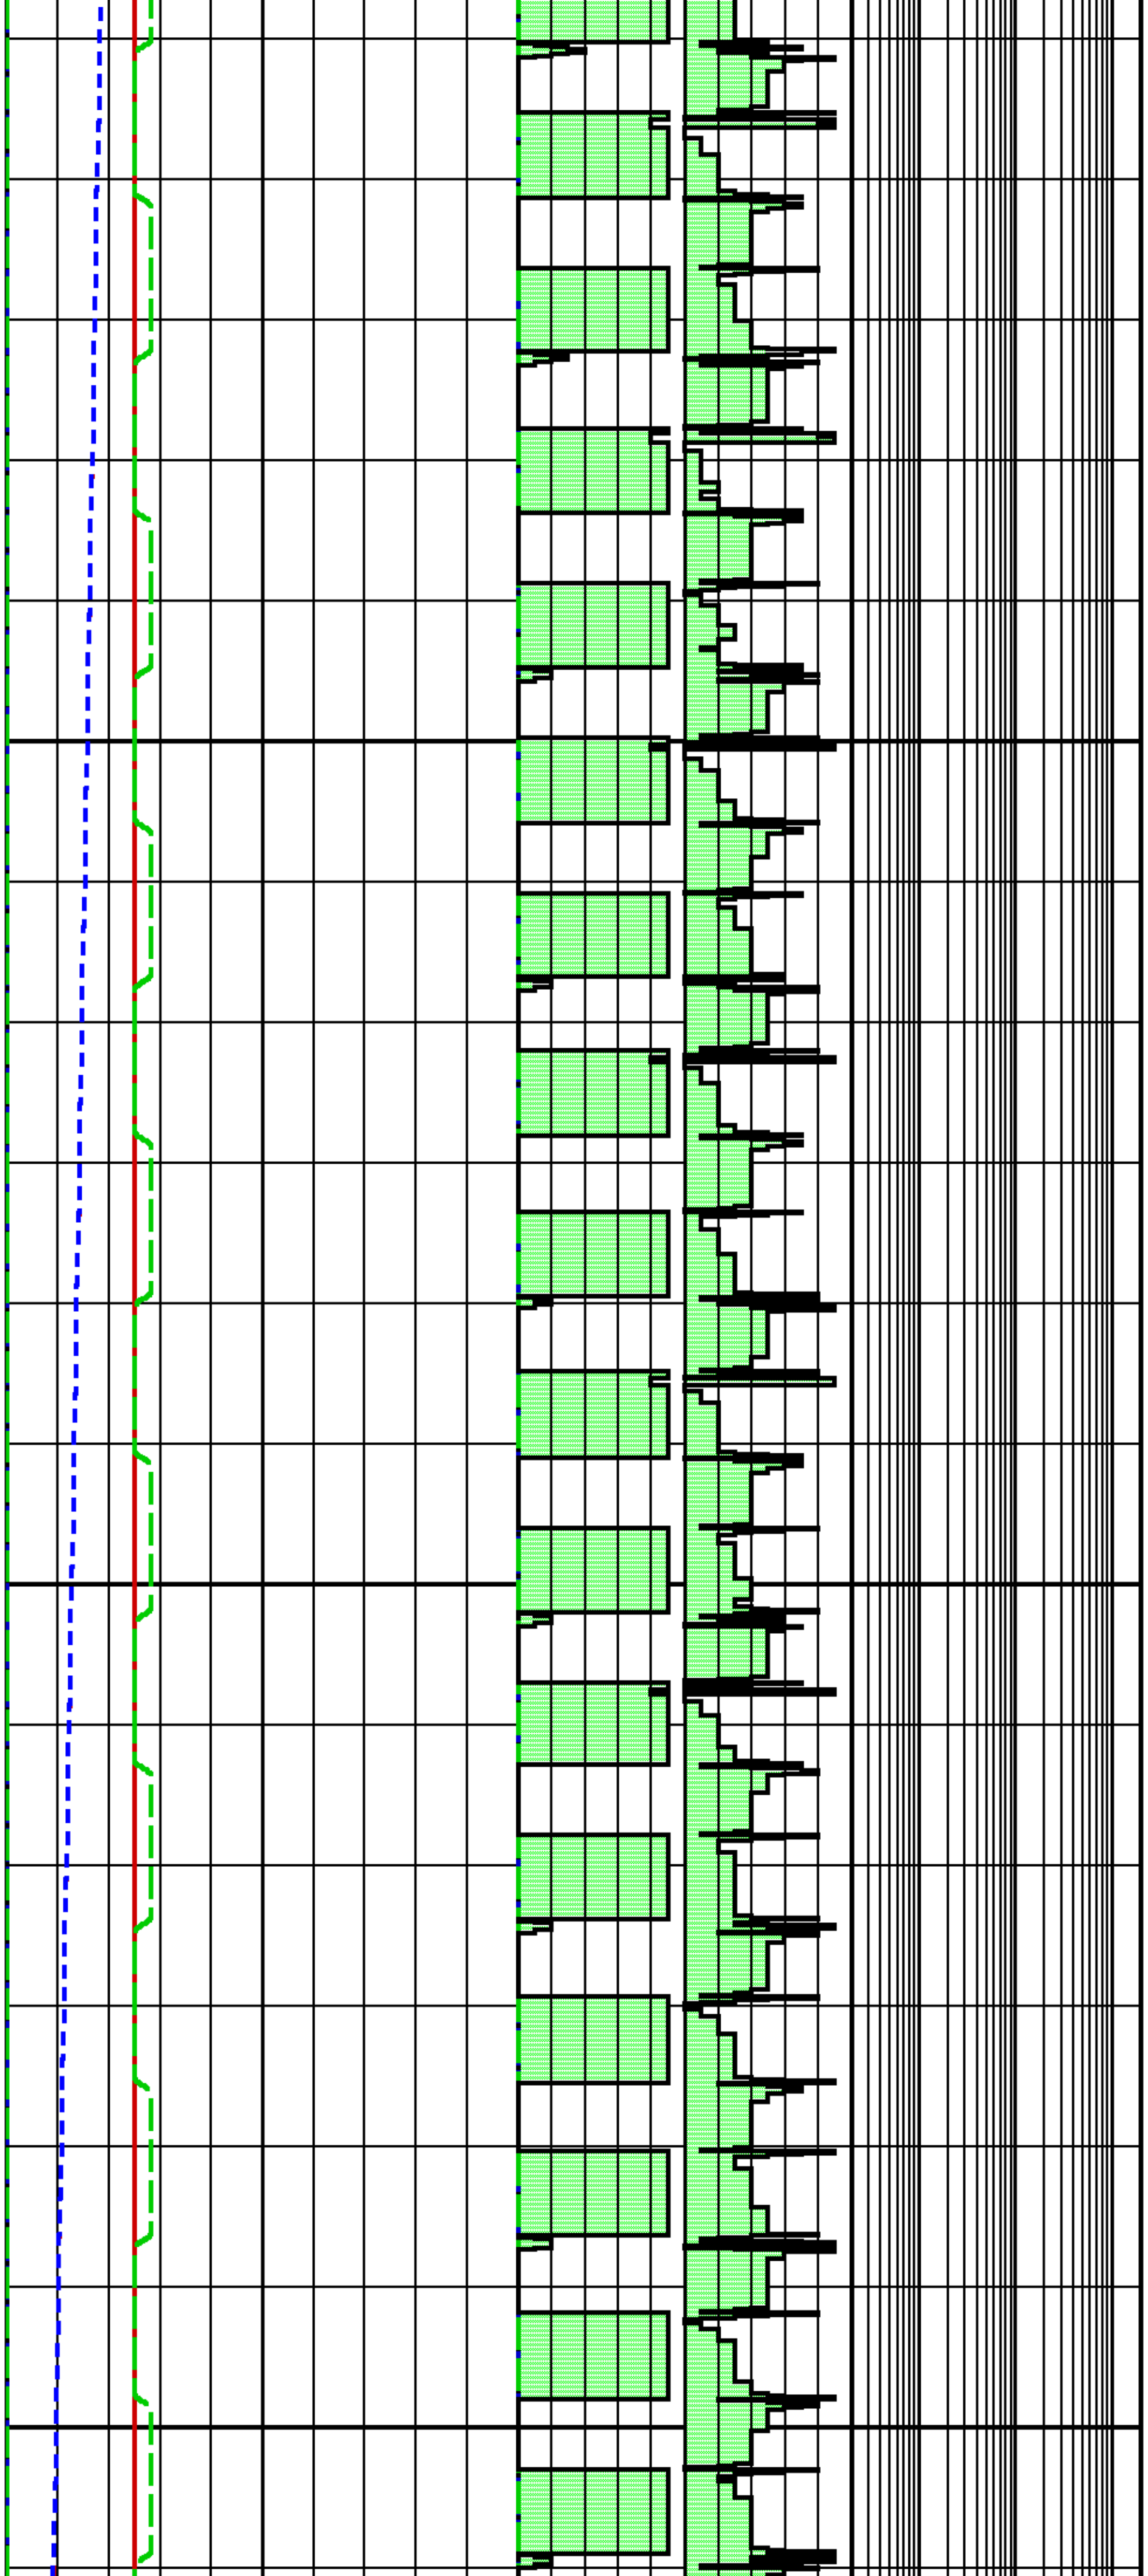

2110	3759.4	198.7
	3760.4	198.7
2120	3759.3	198.7
	3760.5	198.7
2130	3759.4	198.7
	3760.5	198.7
2140	3759.1	198.7
	3760.5	198.7
2150	3759.2	198.7
	3762.2	198.7
2160	3759.2	198.7
	3759.3	198.7
2170	3760.5	198.7
	3759.4	198.7
2180	3760.5	198.7
	3759.2	198.7
2190	3760.5	198.7
	3759.2	198.7
2200	3762.3	198.7
	3759.6	198.7
2210	3759.3	198.7
	3760.5	198.7
2220	3759.4	198.7
	3760.5	198.7
2230	3759.2	198.7
	3760.5	198.7
2240	3759.4	198.7
	3760.7	198.7
2250	3759.0	198.7
	3759.4	198.7
2260	3760.4	198.7
	3759.5	198.7
2270	3760.5	198.7
	3759.4	198.7
2280	3760.5	198.7
	3759.4	198.7
2290	3760.8	198.7

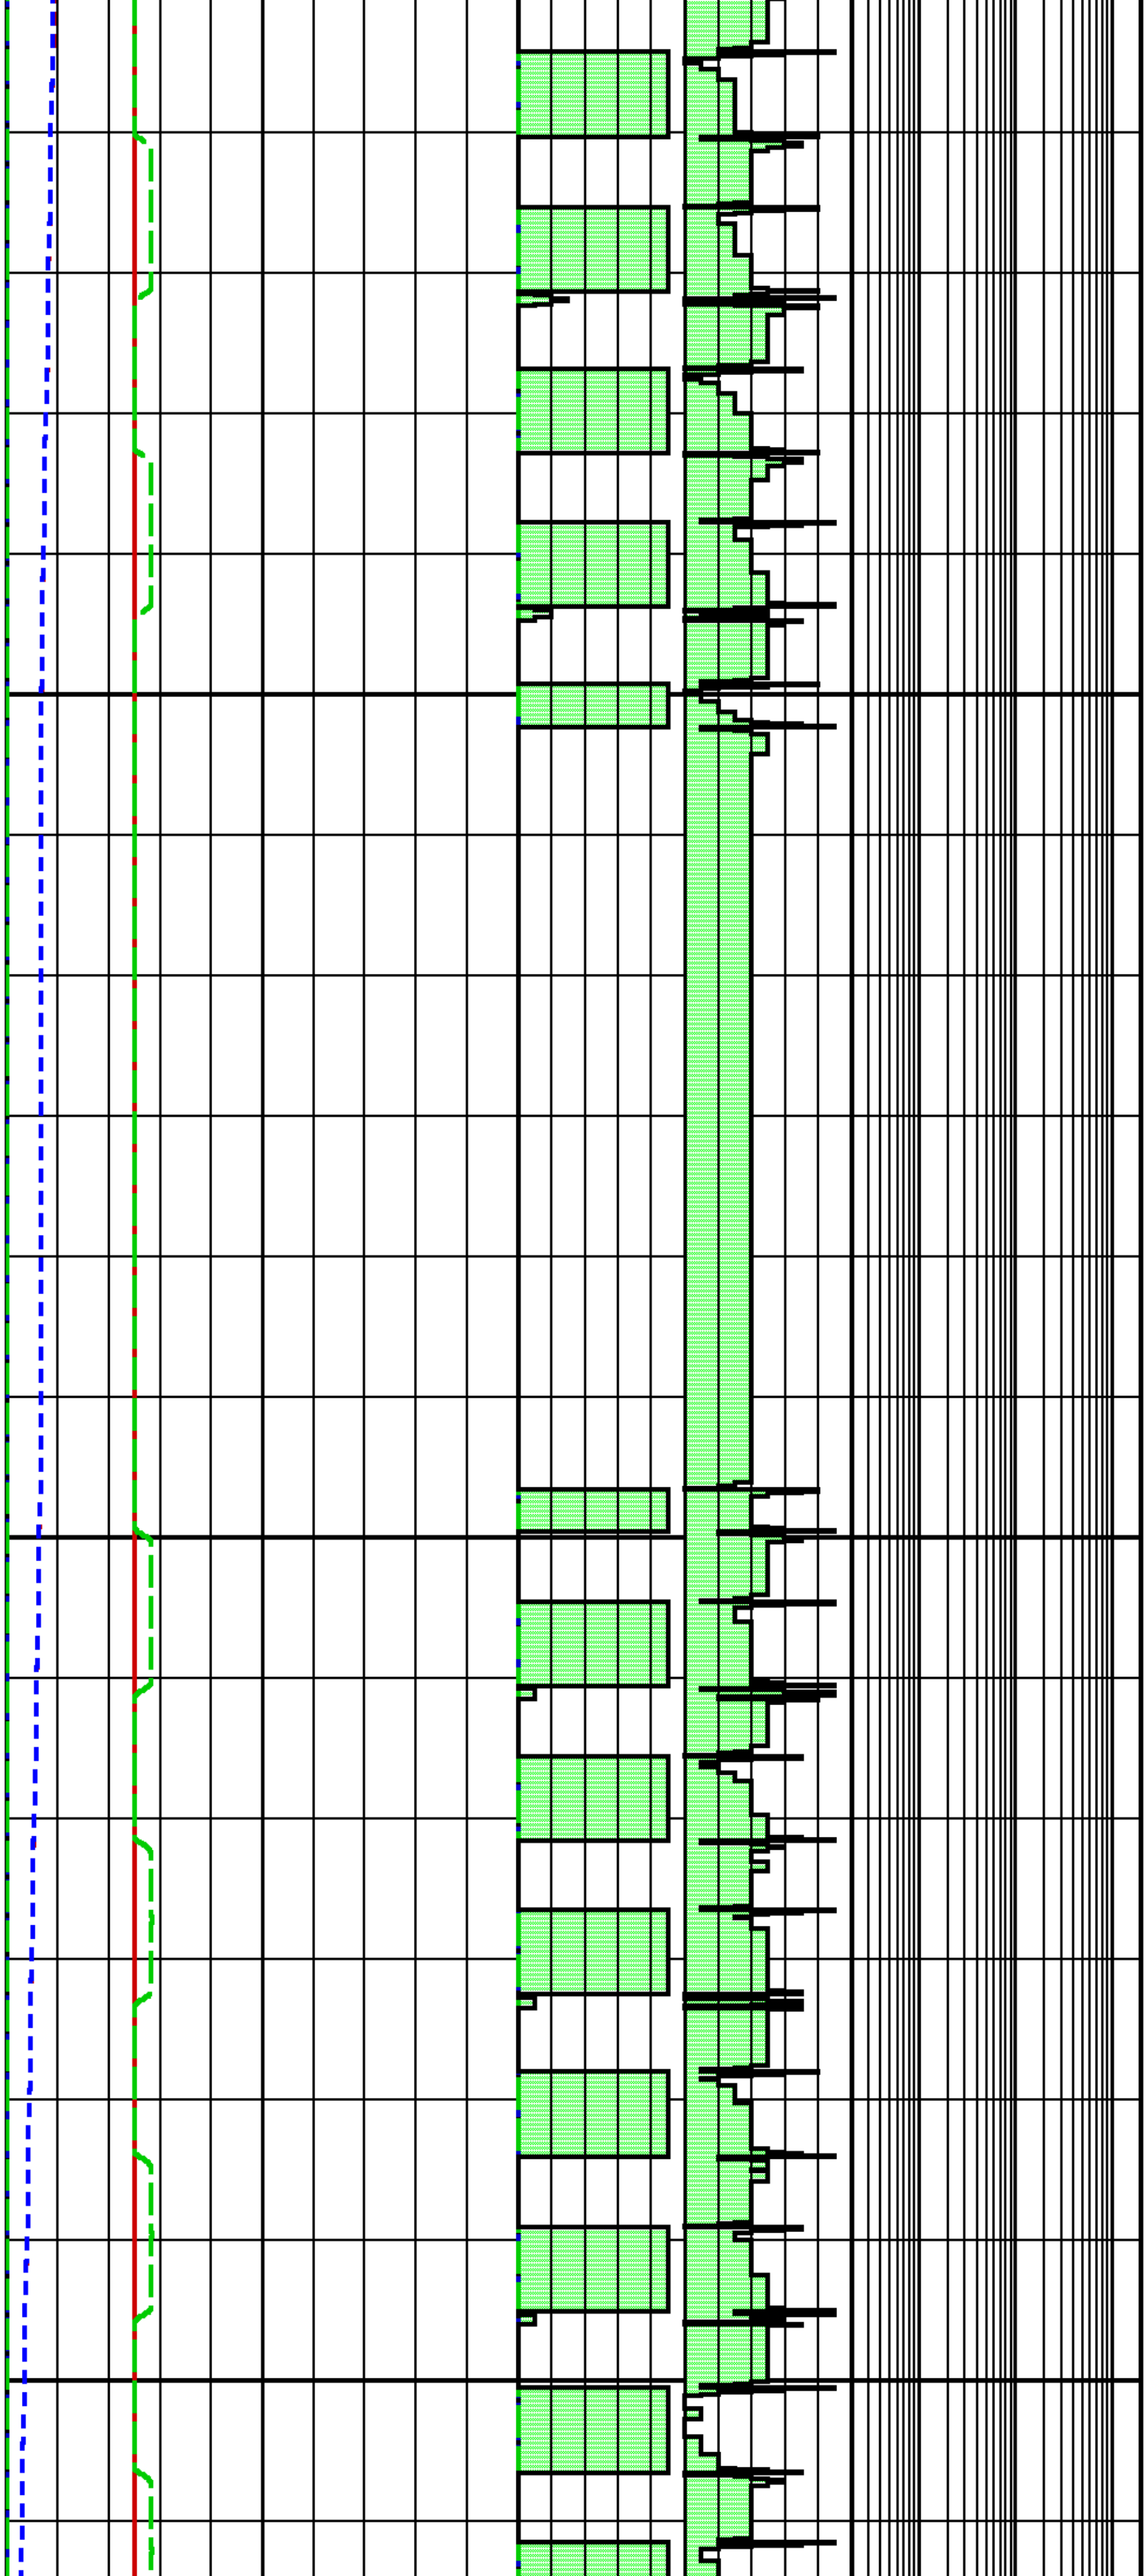

		3759.1	198.7
2300		3759.4	198.7
		3760.4	198.7
2310		3759.4	198.7
		3760.5	198.7
2320		3759.4	198.7
		3760.5	198.7
2330		3759.5	198.7
		3760.6	198.7
2340	BB[1] STOP OPERATION	3759.1	198.7
		3760.5	198.7
2350		3760.5	198.7
		3760.5	198.7
2360	WA[1] CLOSE EXIT-6TANK	3760.5	198.7
		3760.5	198.7
2370	WA[1] OPEN TANK 1	3760.5	198.7
		3760.4	198.7
2380		3760.4	198.7
		3760.4	198.7
2390		3760.4	198.7
	BB[1] RESUME OPERATION	3760.4	198.7
2400		3760.8	198.7
		3759.4	198.7
2410		3759.5	198.7
		3760.5	198.7
2420		3759.5	198.7
		3760.5	198.7
2430		3759.6	198.7
		3760.5	198.7
2440		3759.4	198.7
		3760.5	198.7
2450		3759.4	198.7
		3759.9	198.7
2460		3760.5	198.7
		3759.2	198.7
2470		3760.5	198.7

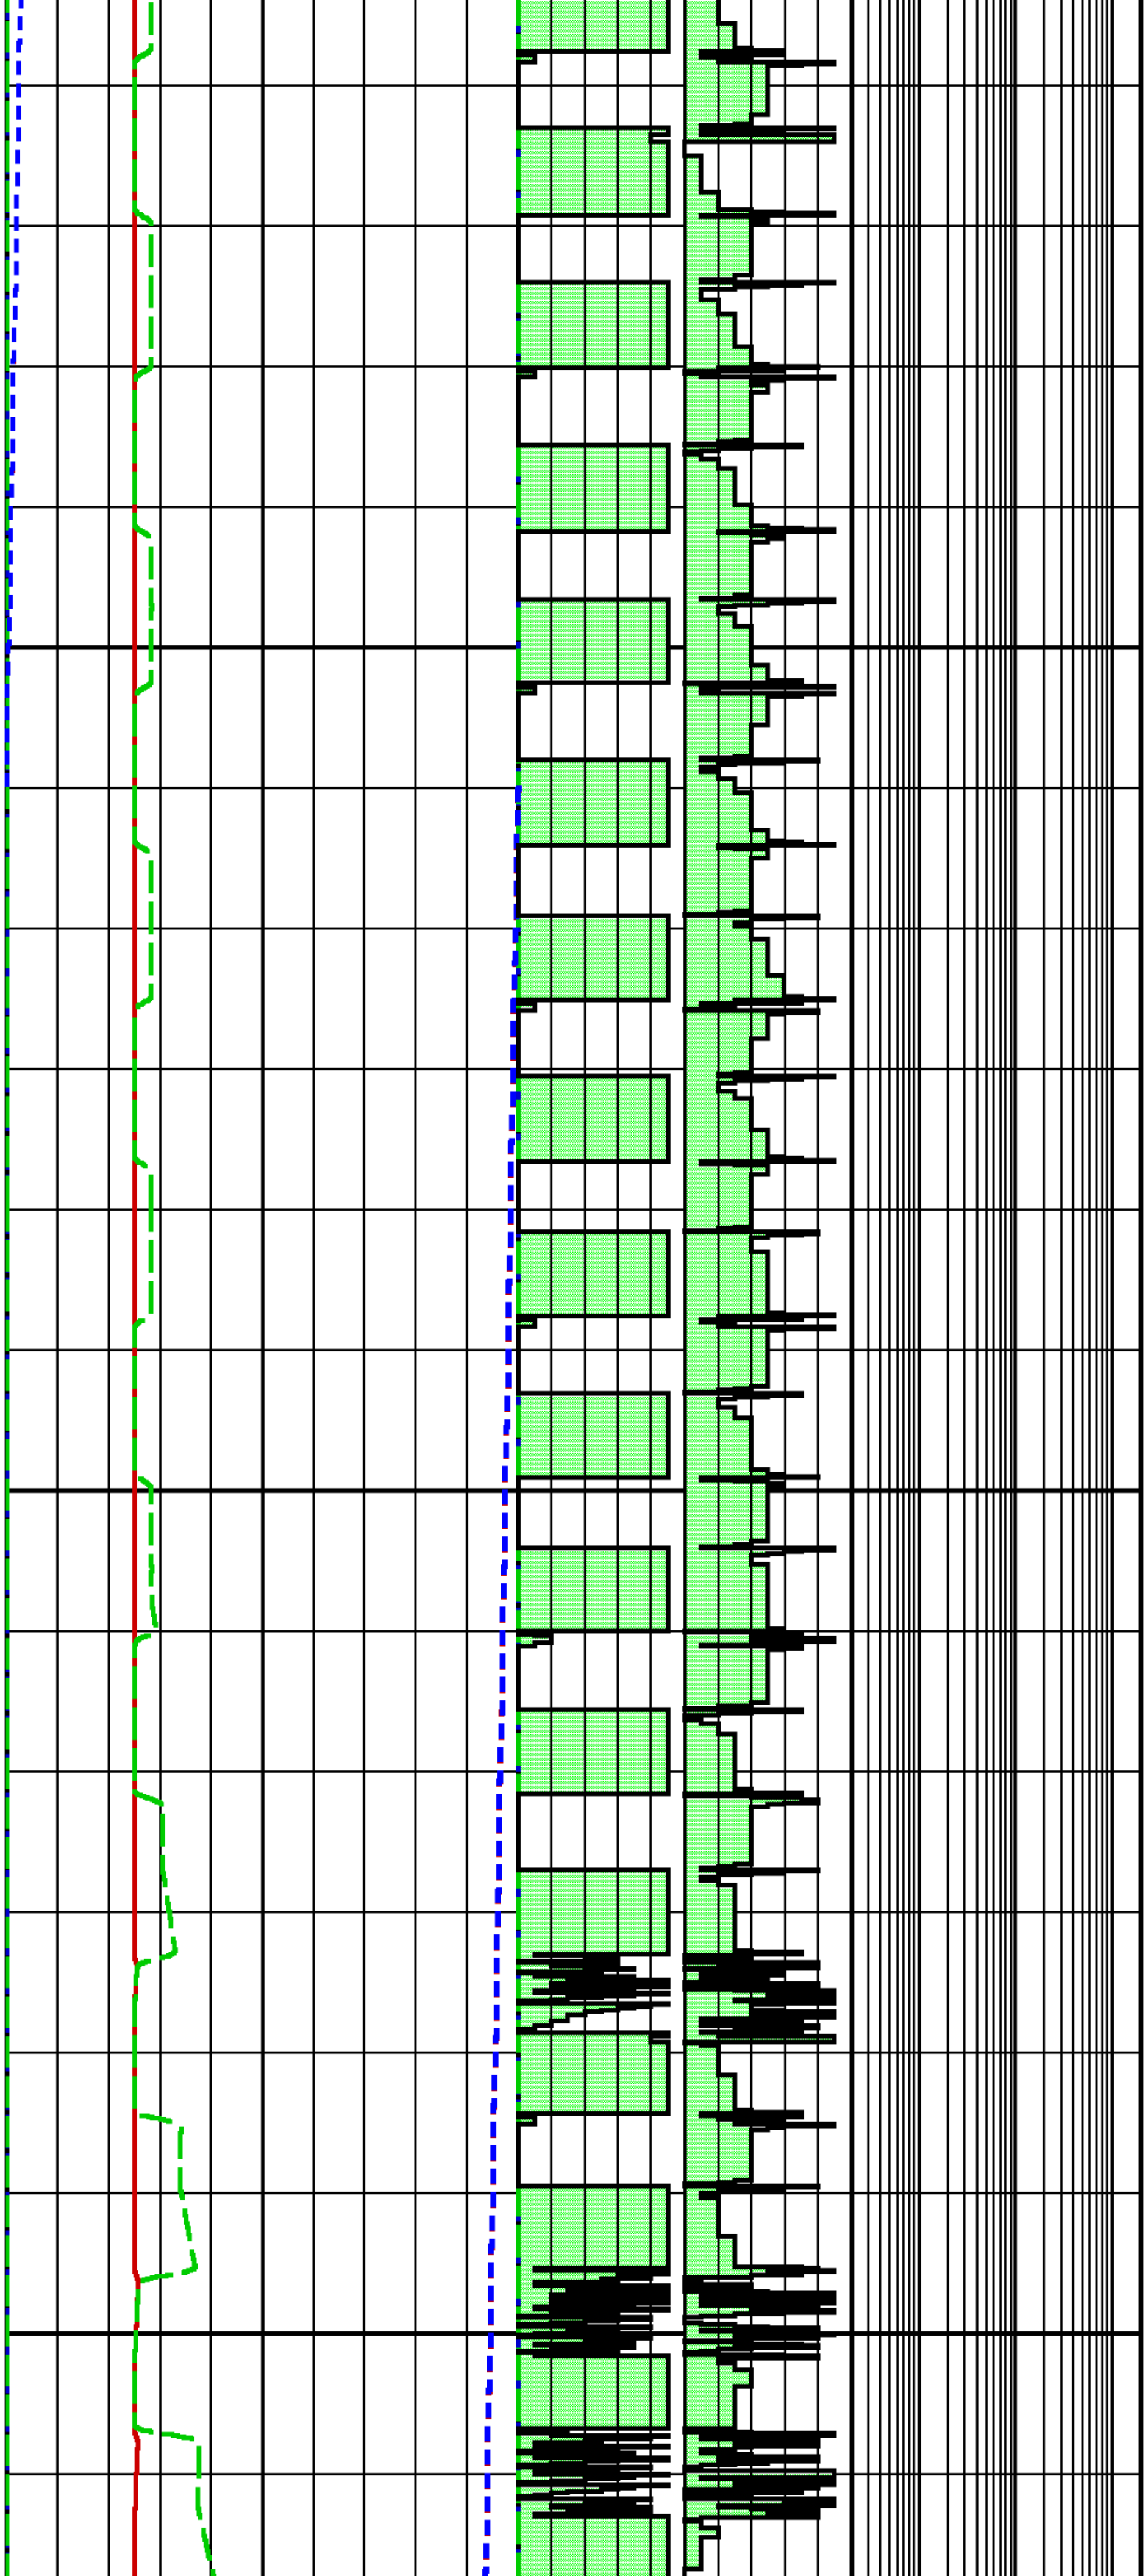

	3759.3	198.7
2480	3760.5	198.7
	3759.1	198.7
2490	3760.5	198.7
	3759.2	198.7
2500	3759.8	198.7
	3760.5	198.7
2510	3759.4	198.7
	3760.5	198.7
2520	3759.5	198.7
	3760.5	198.7
2530	3759.4	198.7
	3760.5	198.7
2540	3759.4	198.7
	3760.0	198.7
2550	3760.5	198.7
	3759.5	198.7
2560	3760.5	198.7
	3759.5	198.7
2570	3760.5	198.7
	3759.4	198.7
2580	3760.5	198.7
	3759.5	198.7
2590	3760.1	198.7
	3760.5	198.7
2600	3759.3	198.7
	3760.5	198.7
2610	3759.3	198.7
	3796.1	198.7
2620	3759.3	198.7
	3761.4	198.7
2630	3759.2	198.7
	3759.3	198.7
2640	3801.9	198.7
	3759.4	198.7
2650	3809.9	198.7
	3759.2	198.7

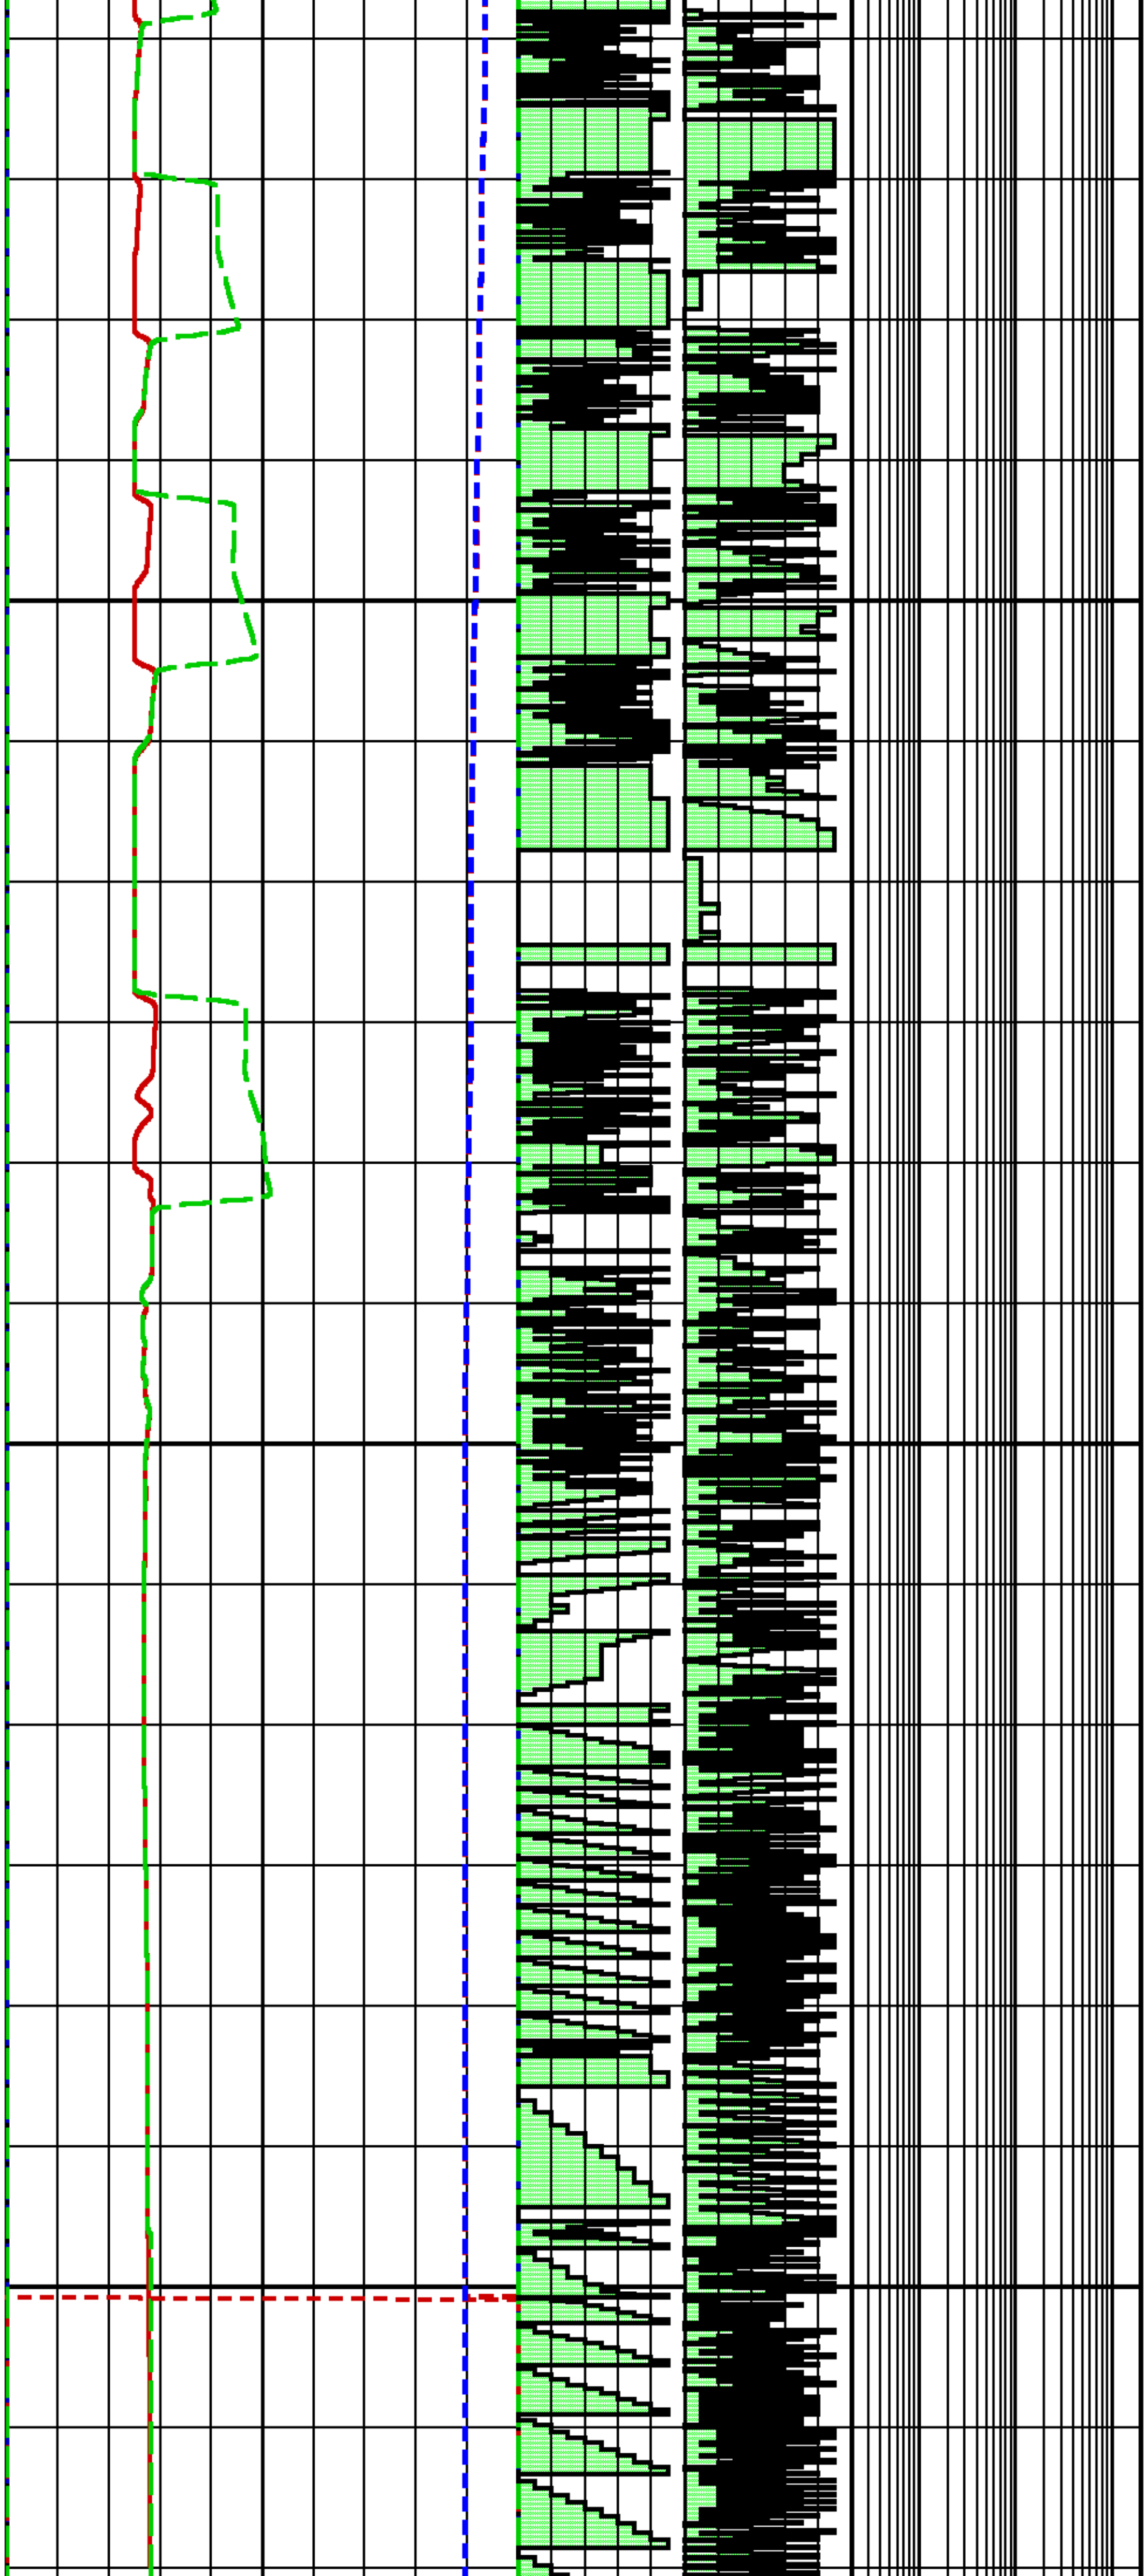

2660		3928.2	198.7
		3759.0	198.7
2670		3822.4	198.7
		3805.6	198.7
2680		3759.1	198.7
		4050.6	198.7
2690		3758.7	198.7
		4194.2	198.7
2700		3759.2	198.7
		4329.9	198.7
2710		4153.6	198.7
		3759.6	198.7
2720		3760.2	198.7
		3759.9	198.7
2730		4369.2	198.7
		3873.4	198.7
2740		3756.0	198.7
		4271.3	198.7
2750		4074.3	198.7
		3995.6	198.7
2760		4123.7	198.7
		4077.3	198.7
2770		4047.8	198.7
		4035.3	198.7
2780	BB[1] STOP OPERATION	4030.7	198.7
	WA[1] CLOSE TANK 1	4054.2	198.7
2790		4083.7	198.7
		4111.9	198.7
2800	WA[1] OPEN EXIT-6TANK	4137.7	198.7
		4129.3	198.7
2810		4135.1	198.7
	BB[1] RESUME OPERATION	4140.8	198.7
2820	BB[1] ABORT	4165.3	198.7
		4188.3	198.7
2830		4202.4	198.7
		4213.5	198.7
2840		4222.3	198.7

SECONDS	TOOL COMMAND ANNOTATIONS	APQL (psi)	RTDQL (degF)
		4229.3	198.7
2850		4234.7	198.7
		4238.9	198.7
2860	BB[1] OPEN BYPASS VALVE	4248.5	198.7
		4248.7	198.7
2870		4249.2	198.7
	MB[1] RETRACT PACK 2600	4248.8	198.7
2880		4256.0	198.7
		4258.9	198.7
2890		4248.1	198.7
		4249.7	198.7
2900		4249.9	198.7
		4250.0	198.7
2910			

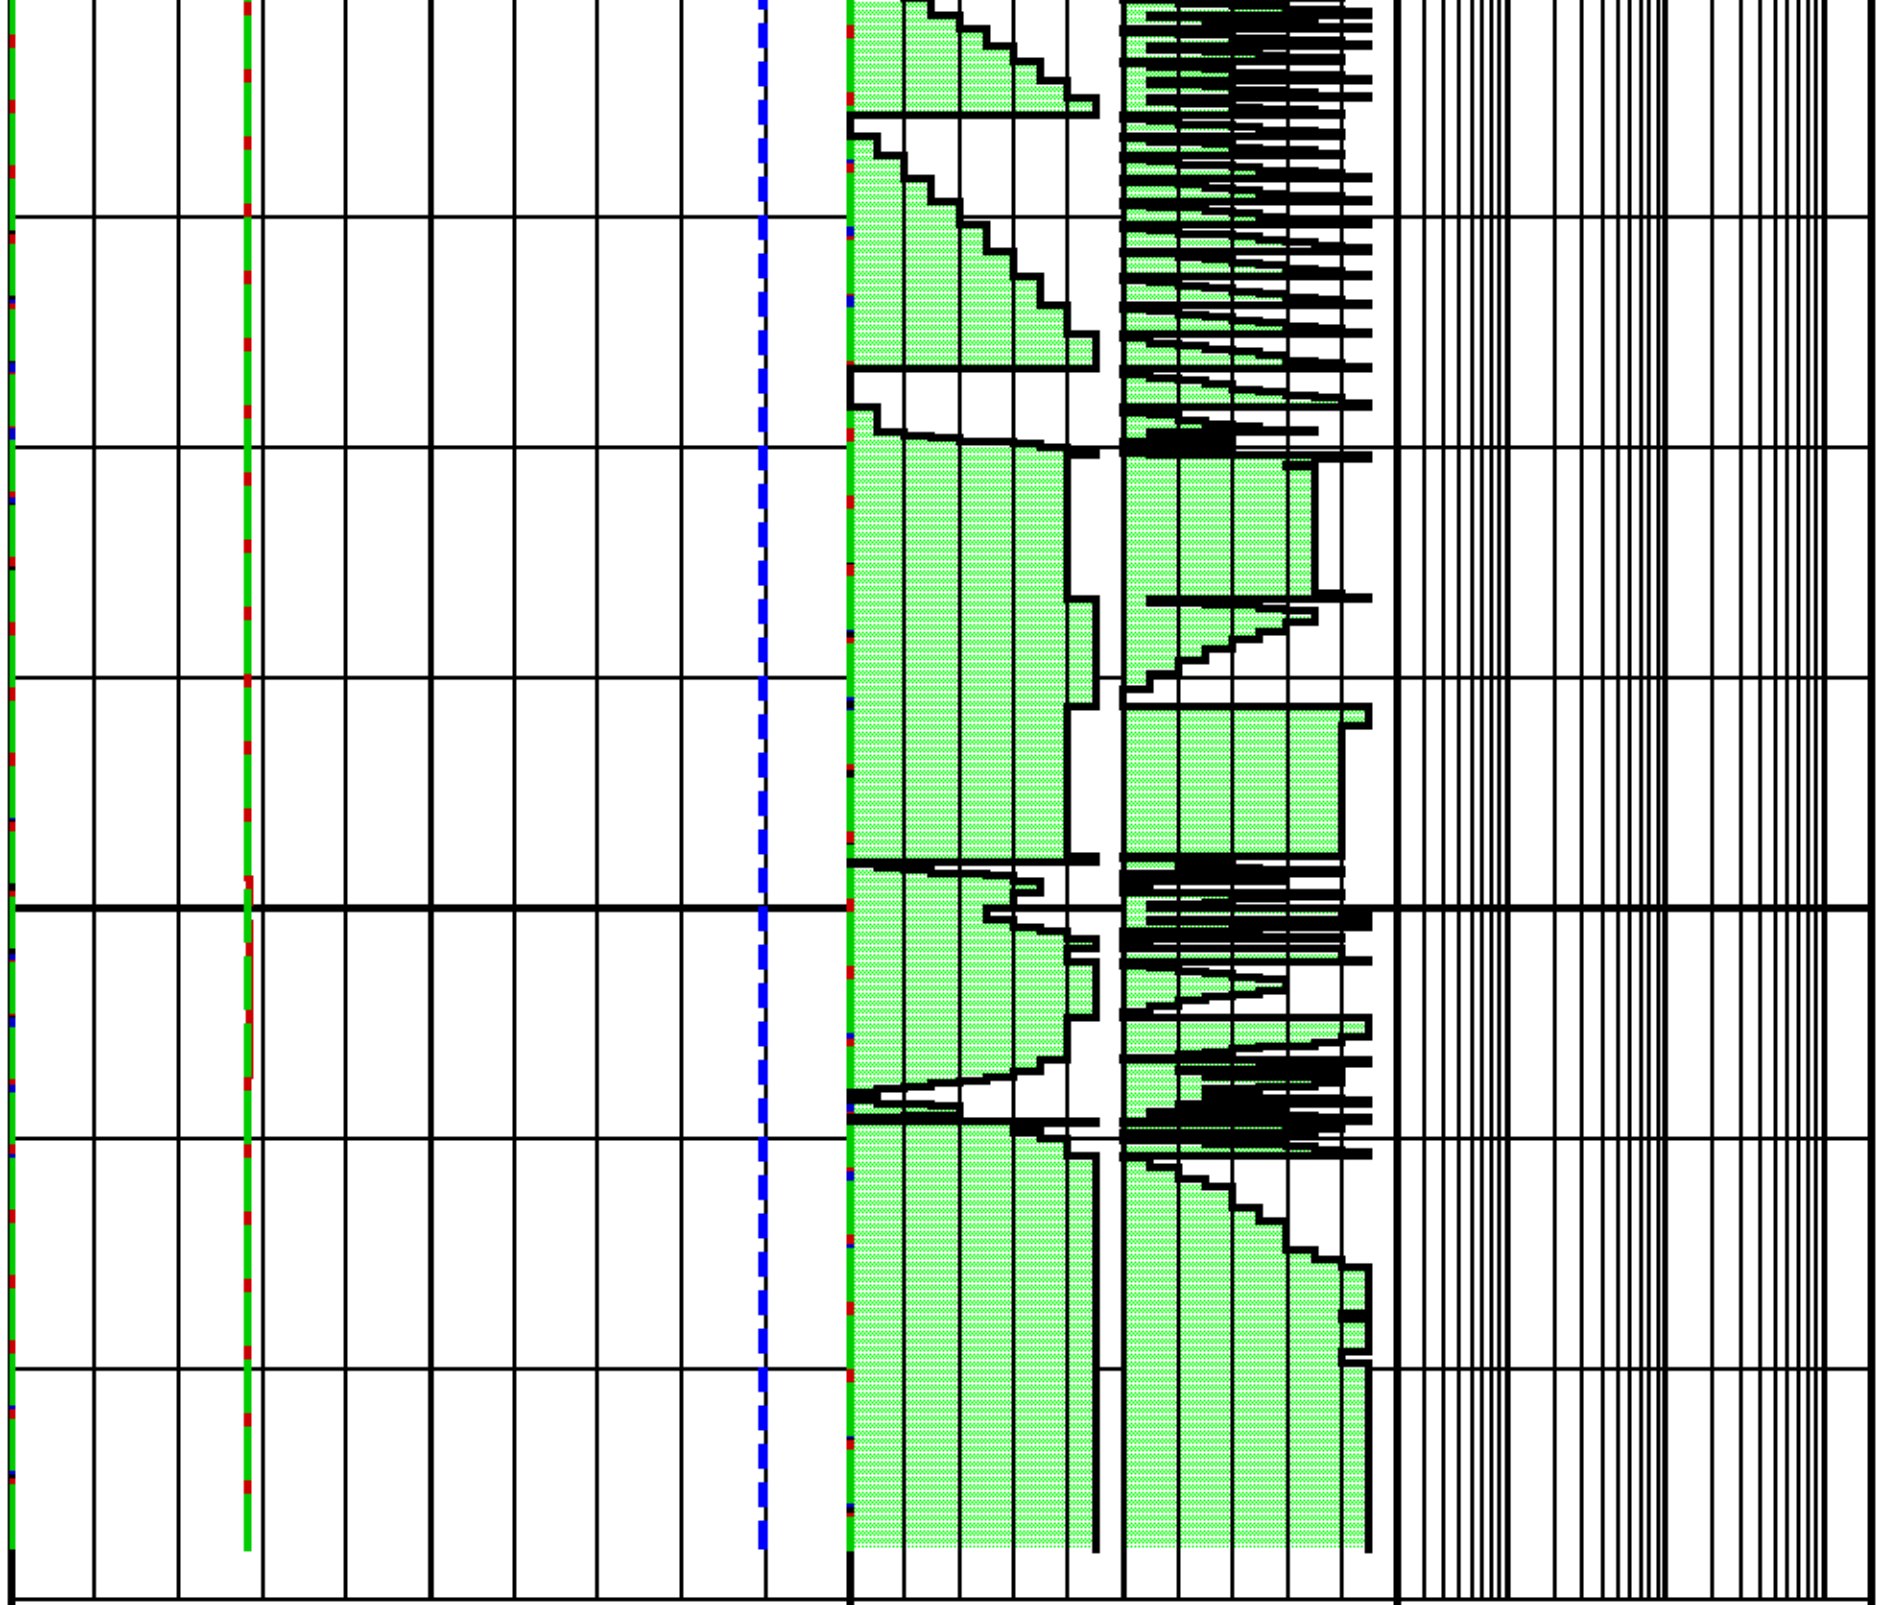

SECONDS

TOOL COMMAND

ANNOTATIONS

Packer Quartz [apql] 0 15000 (psi)

Pump Quartz [apqk] 0 15000 (psi)

DRAW DOWN VOL [ddv] 20 0 (cm3)

PTV VOL [ptv] 10000 0 (cm3)

PVT VOL [pvtv] 100 0 (cm3)

PTVR VOL [ptvr] 10 0 (cm3)

CPTV VOL [cptv] 10000 0 (cm3)

QL ONES 0 10 (psi)

QL DECS 0 10 (psi)

APQL (psi)

RTDQL (degF)

Data File : j800g39.aff
Presentation: sampleview_ibsig.log

SECONDS	ABSORPTION		FLUID FRACTION		ULTRA VIOLET	
						REFR GAS REF WATER

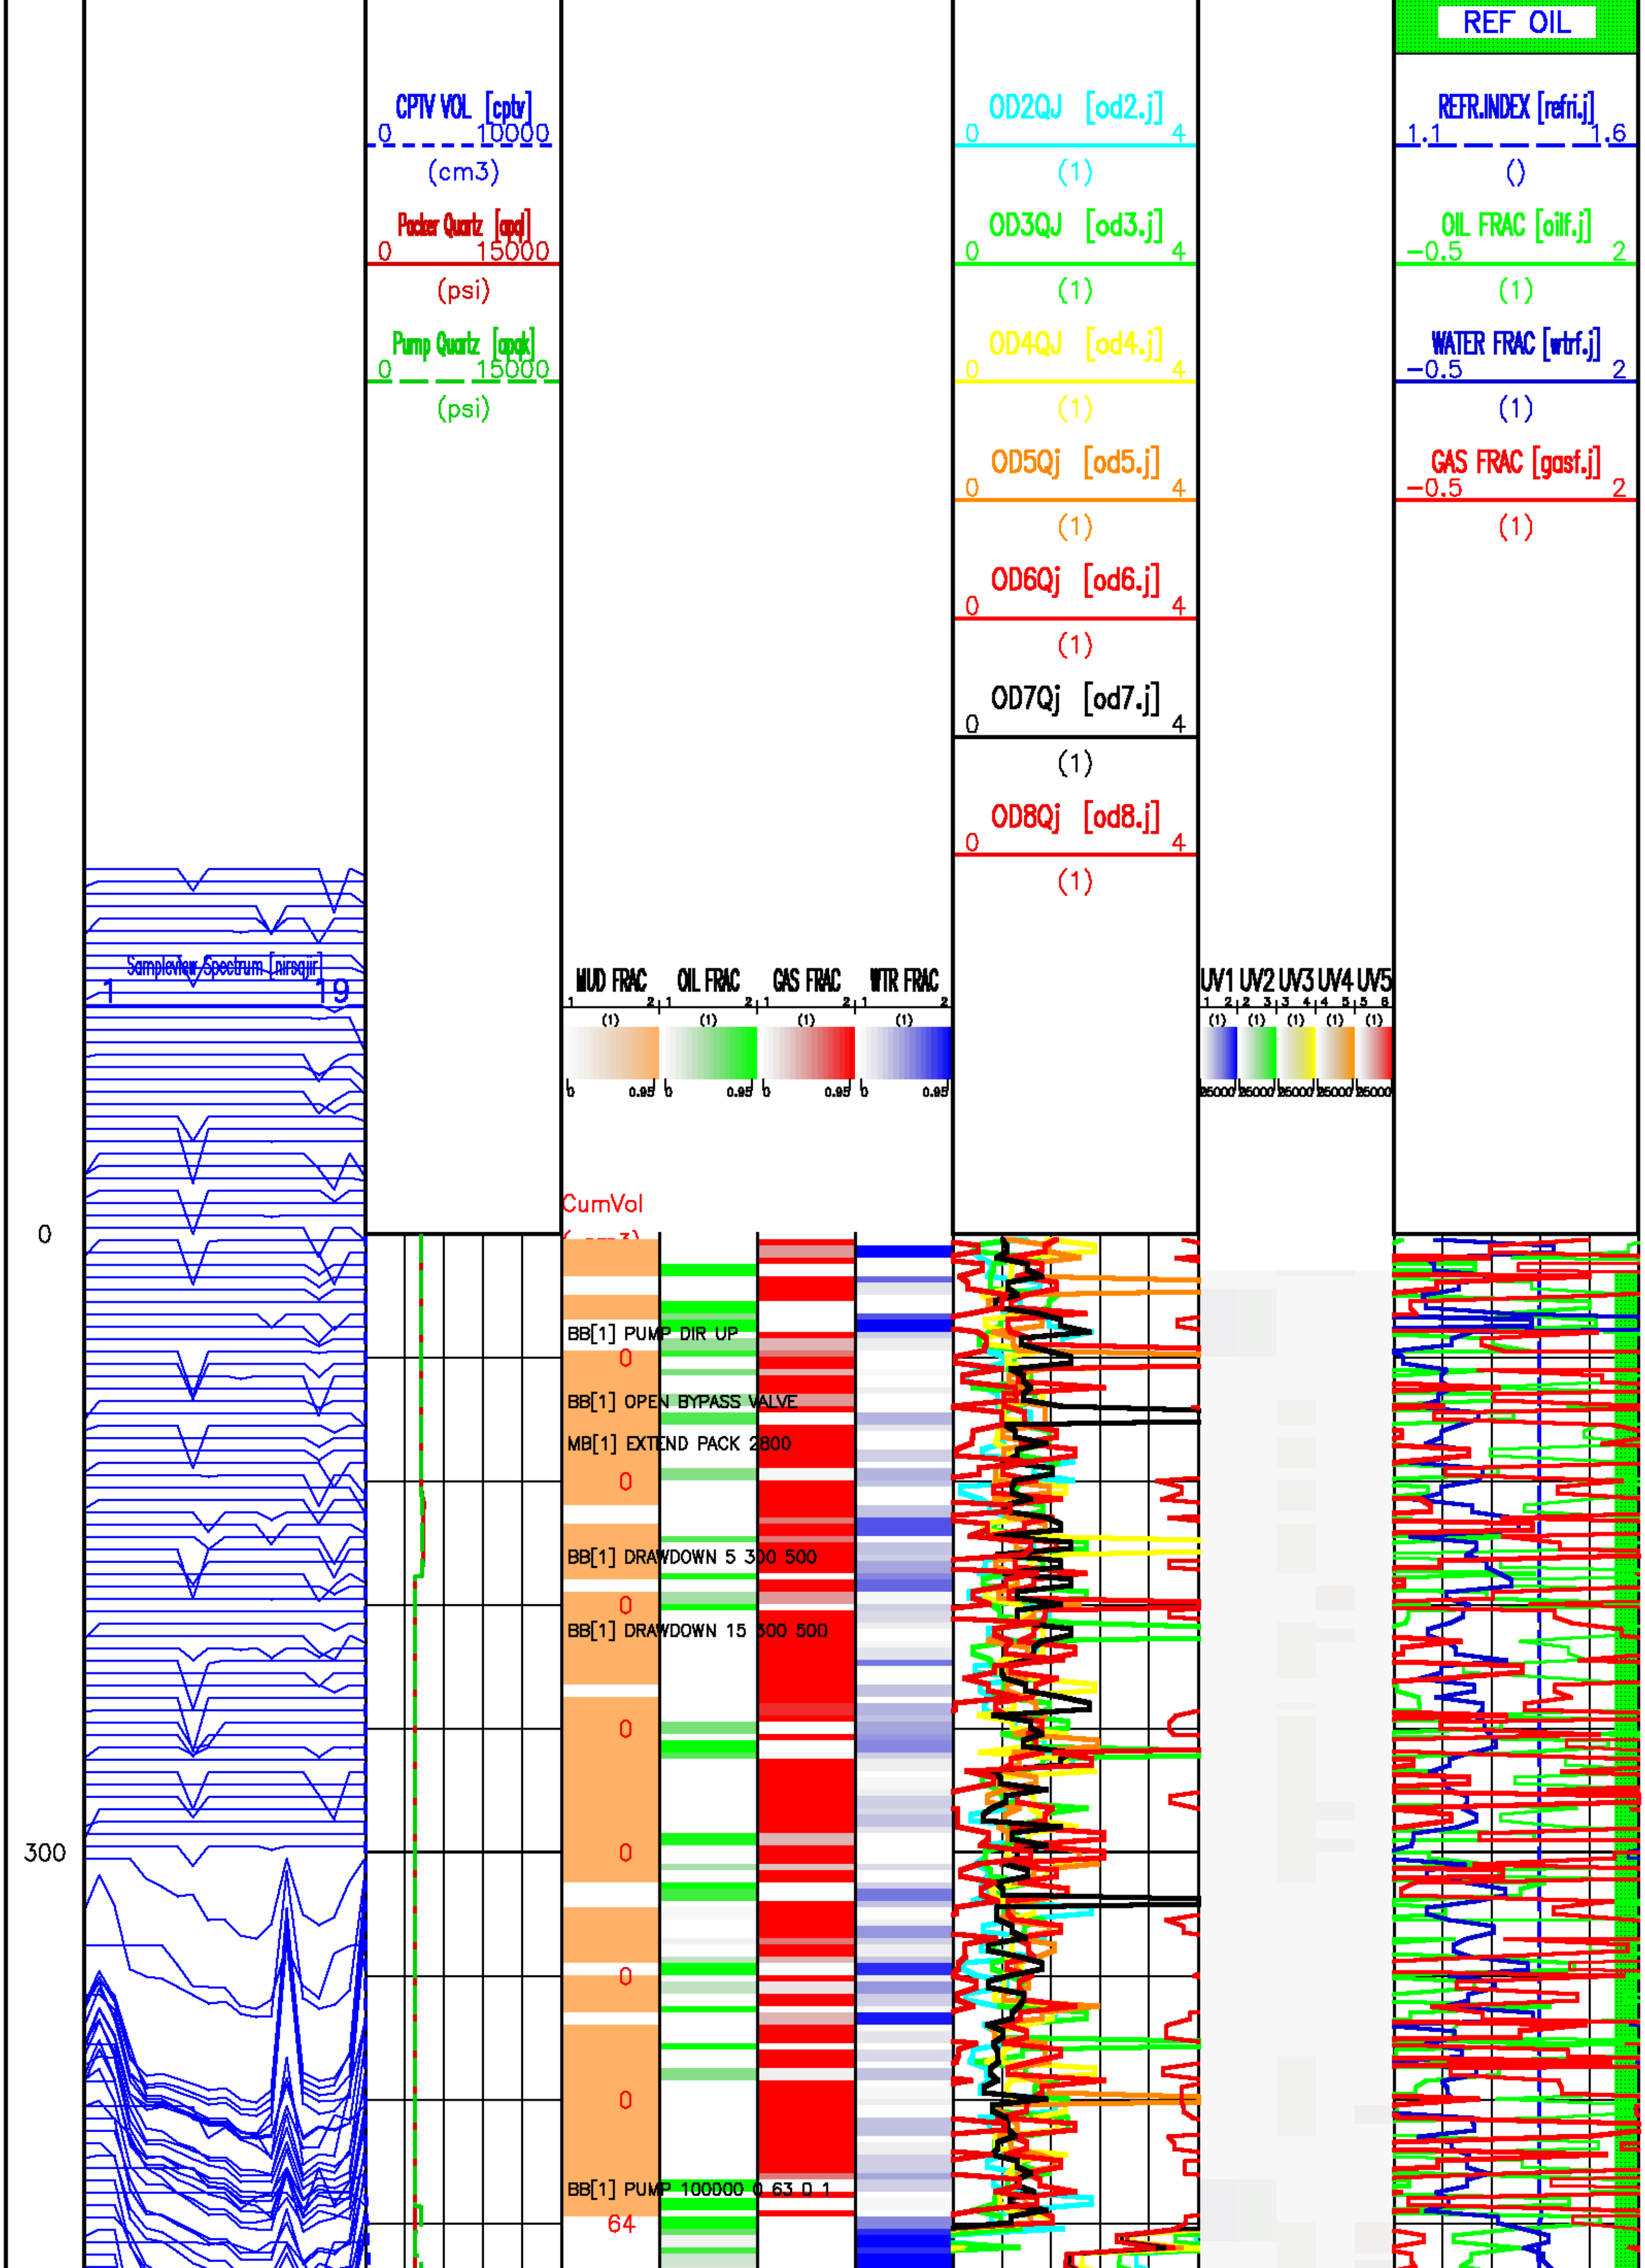
REF OIL
CPTV VOL [cptv]
0 10000
(cm3)
Packer Quartz [apqi]
0 15000
(psi)
Pump Quartz [apqk]
0 15000
(psi)
OD2QJ [od2.j]
0 4
(1)
OD3QJ [od3.j]
0 4
(1)
OD4QJ [od4.j]
0 4
(1)
OD5Qj [od5.j]
0 4
(1)
OD6Qj [od6.j]
0 4
(1)
OD7Qj [od7.j]
0 4
(1)
OD8Qj [od8.j]
0 4
(1)
REFR.INDEX [refri.j]
1.1 1.6
()
OIL FRAC [oilf.j]
-0.5 2
(1)
WATER FRAC [wtrf.j]
-0.5 2
(1)
GAS FRAC [gasf.j]
-0.5 2
(1)
Sampleview Spectrum [nirsqjir]
1 19
MUD FRAC
OIL FRAC
GAS FRAC
WTR FRAC
UV1 UV2 UV3 UV4 UV5
CumVol
0
300
BB[1] PUMP DIR UP
BB[1] OPEN BYPASS VALVE
MB[1] EXTEND PACK 2800
BB[1] DRAWDOWN 5 300 500
BB[1] DRAWDOWN 15 500 500
BB[1] PUMP 100000 0.63 0 1
64

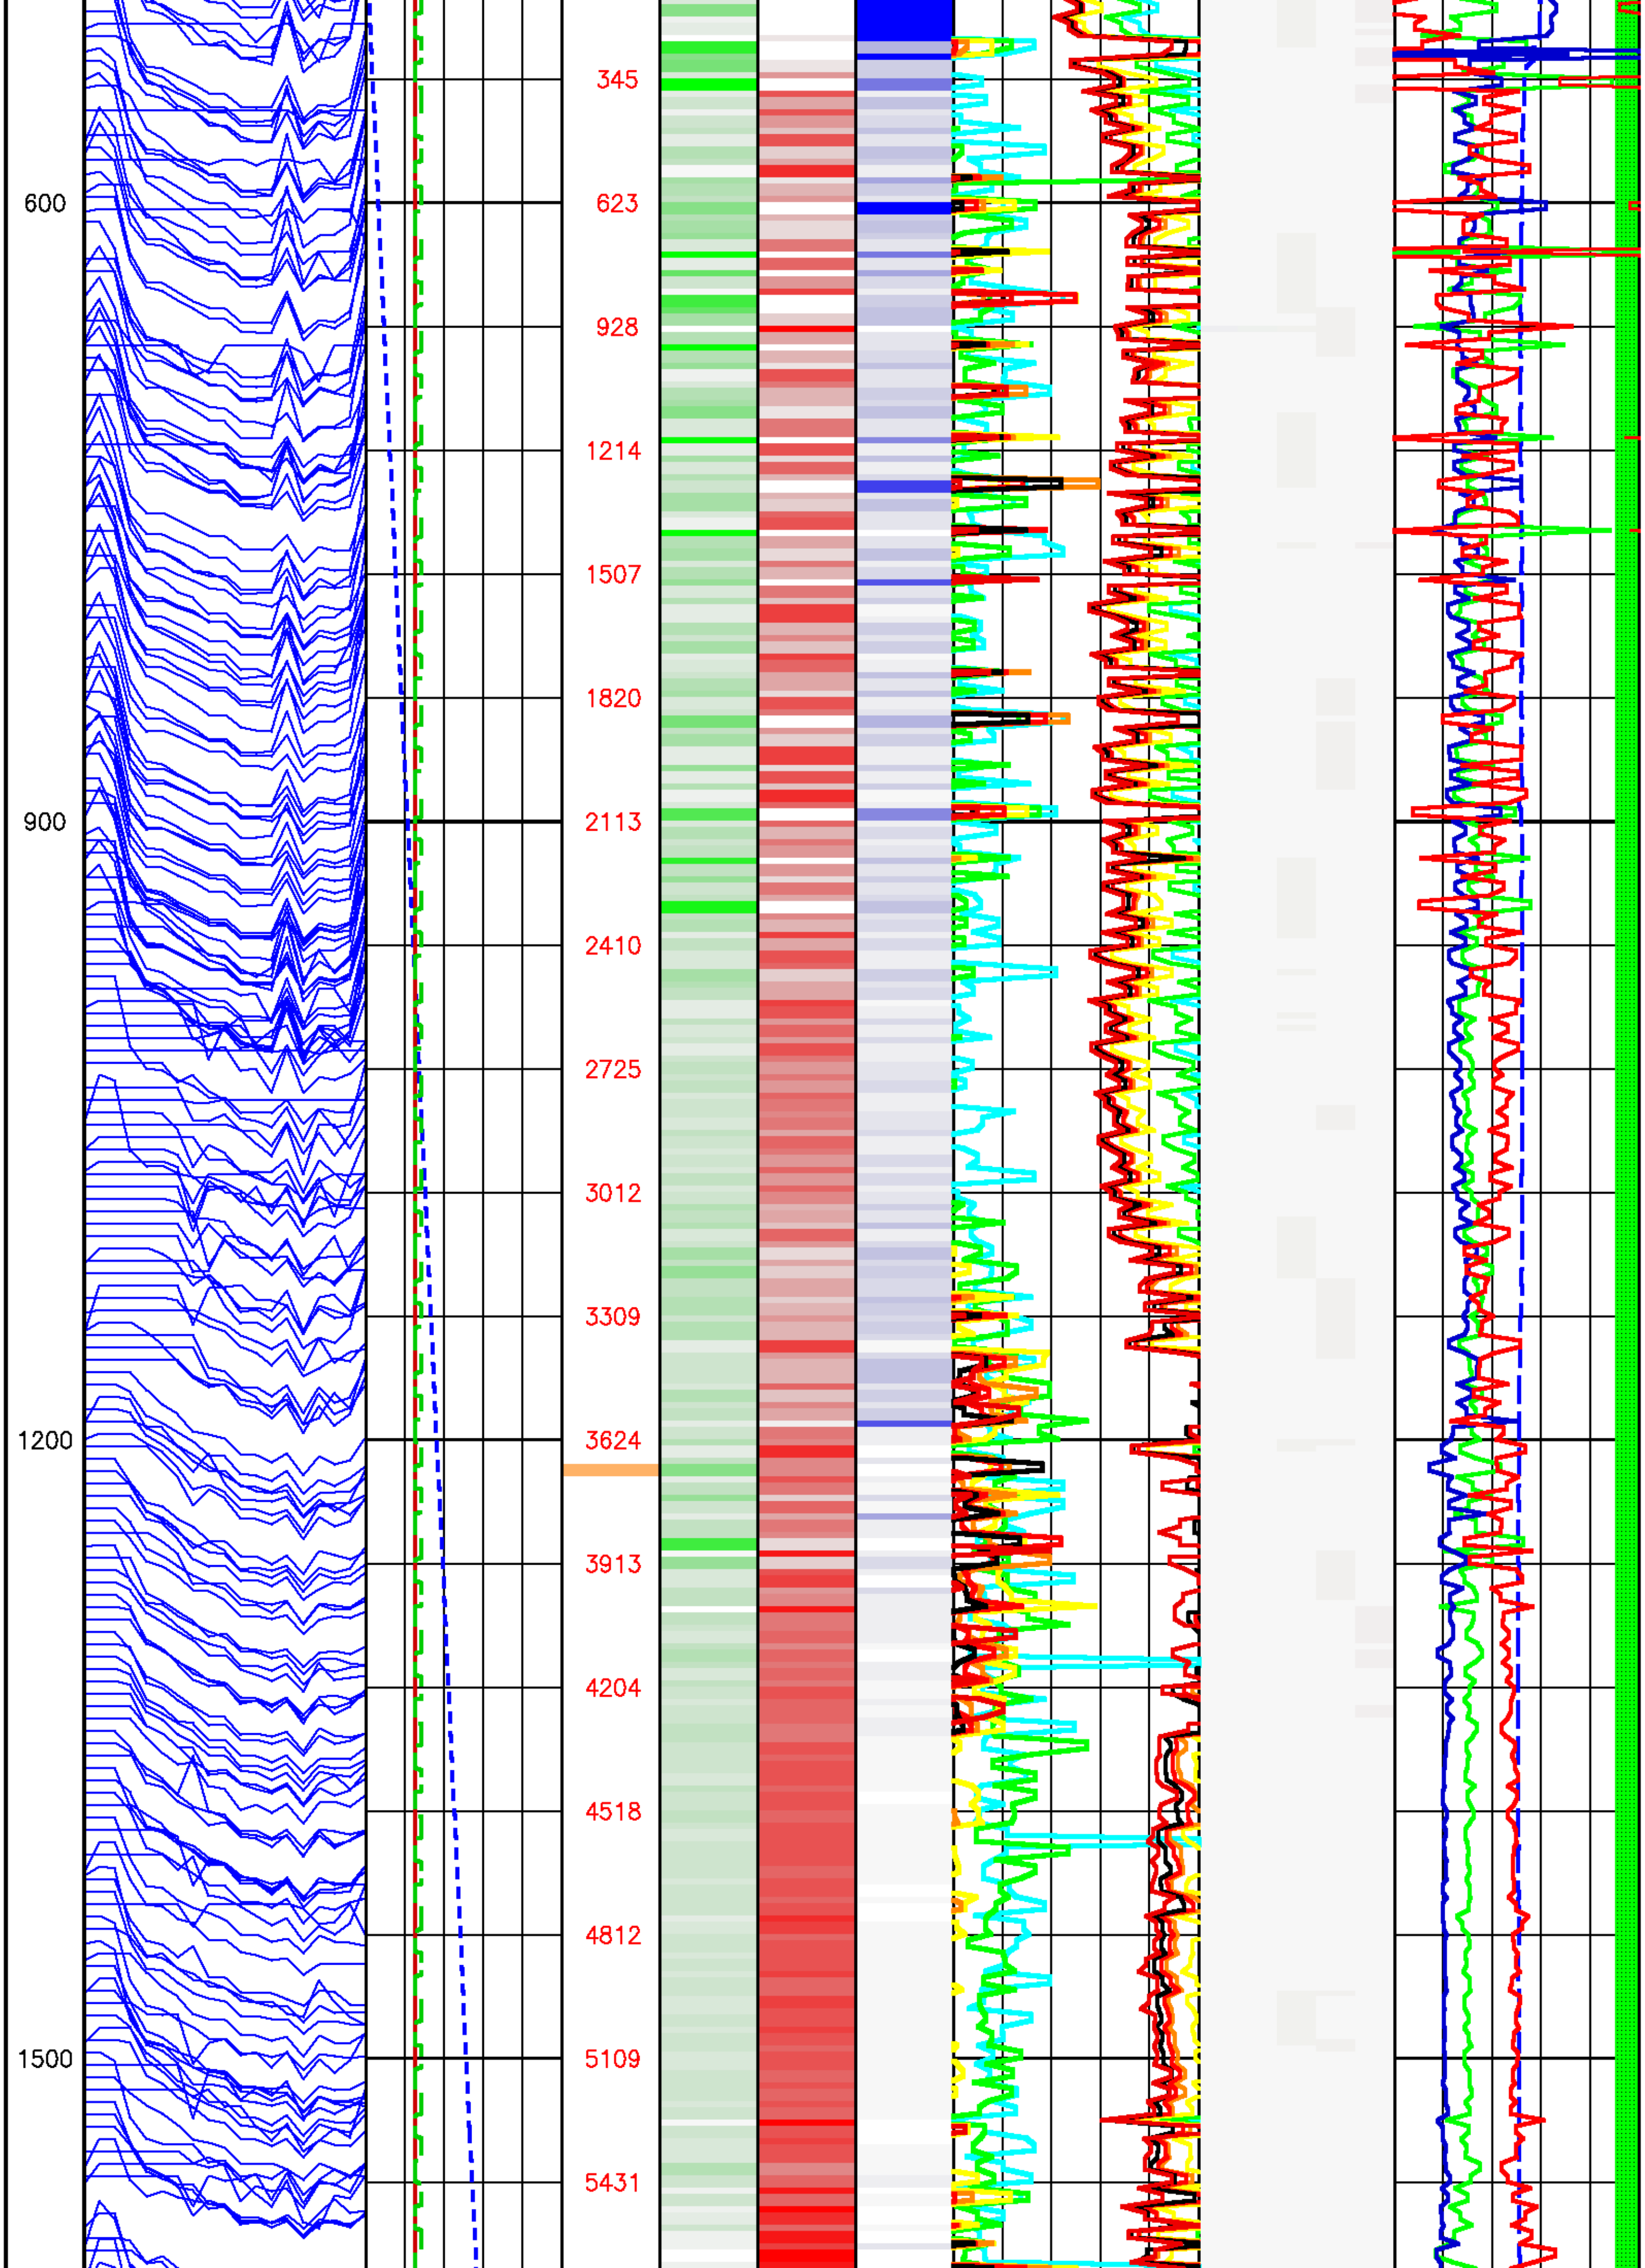
600
900
1200
1500
345
623
928
1214
1507
1820
2113
2410
2725
3012
3309
3624
3913
4204
4518
4812
5109
5431

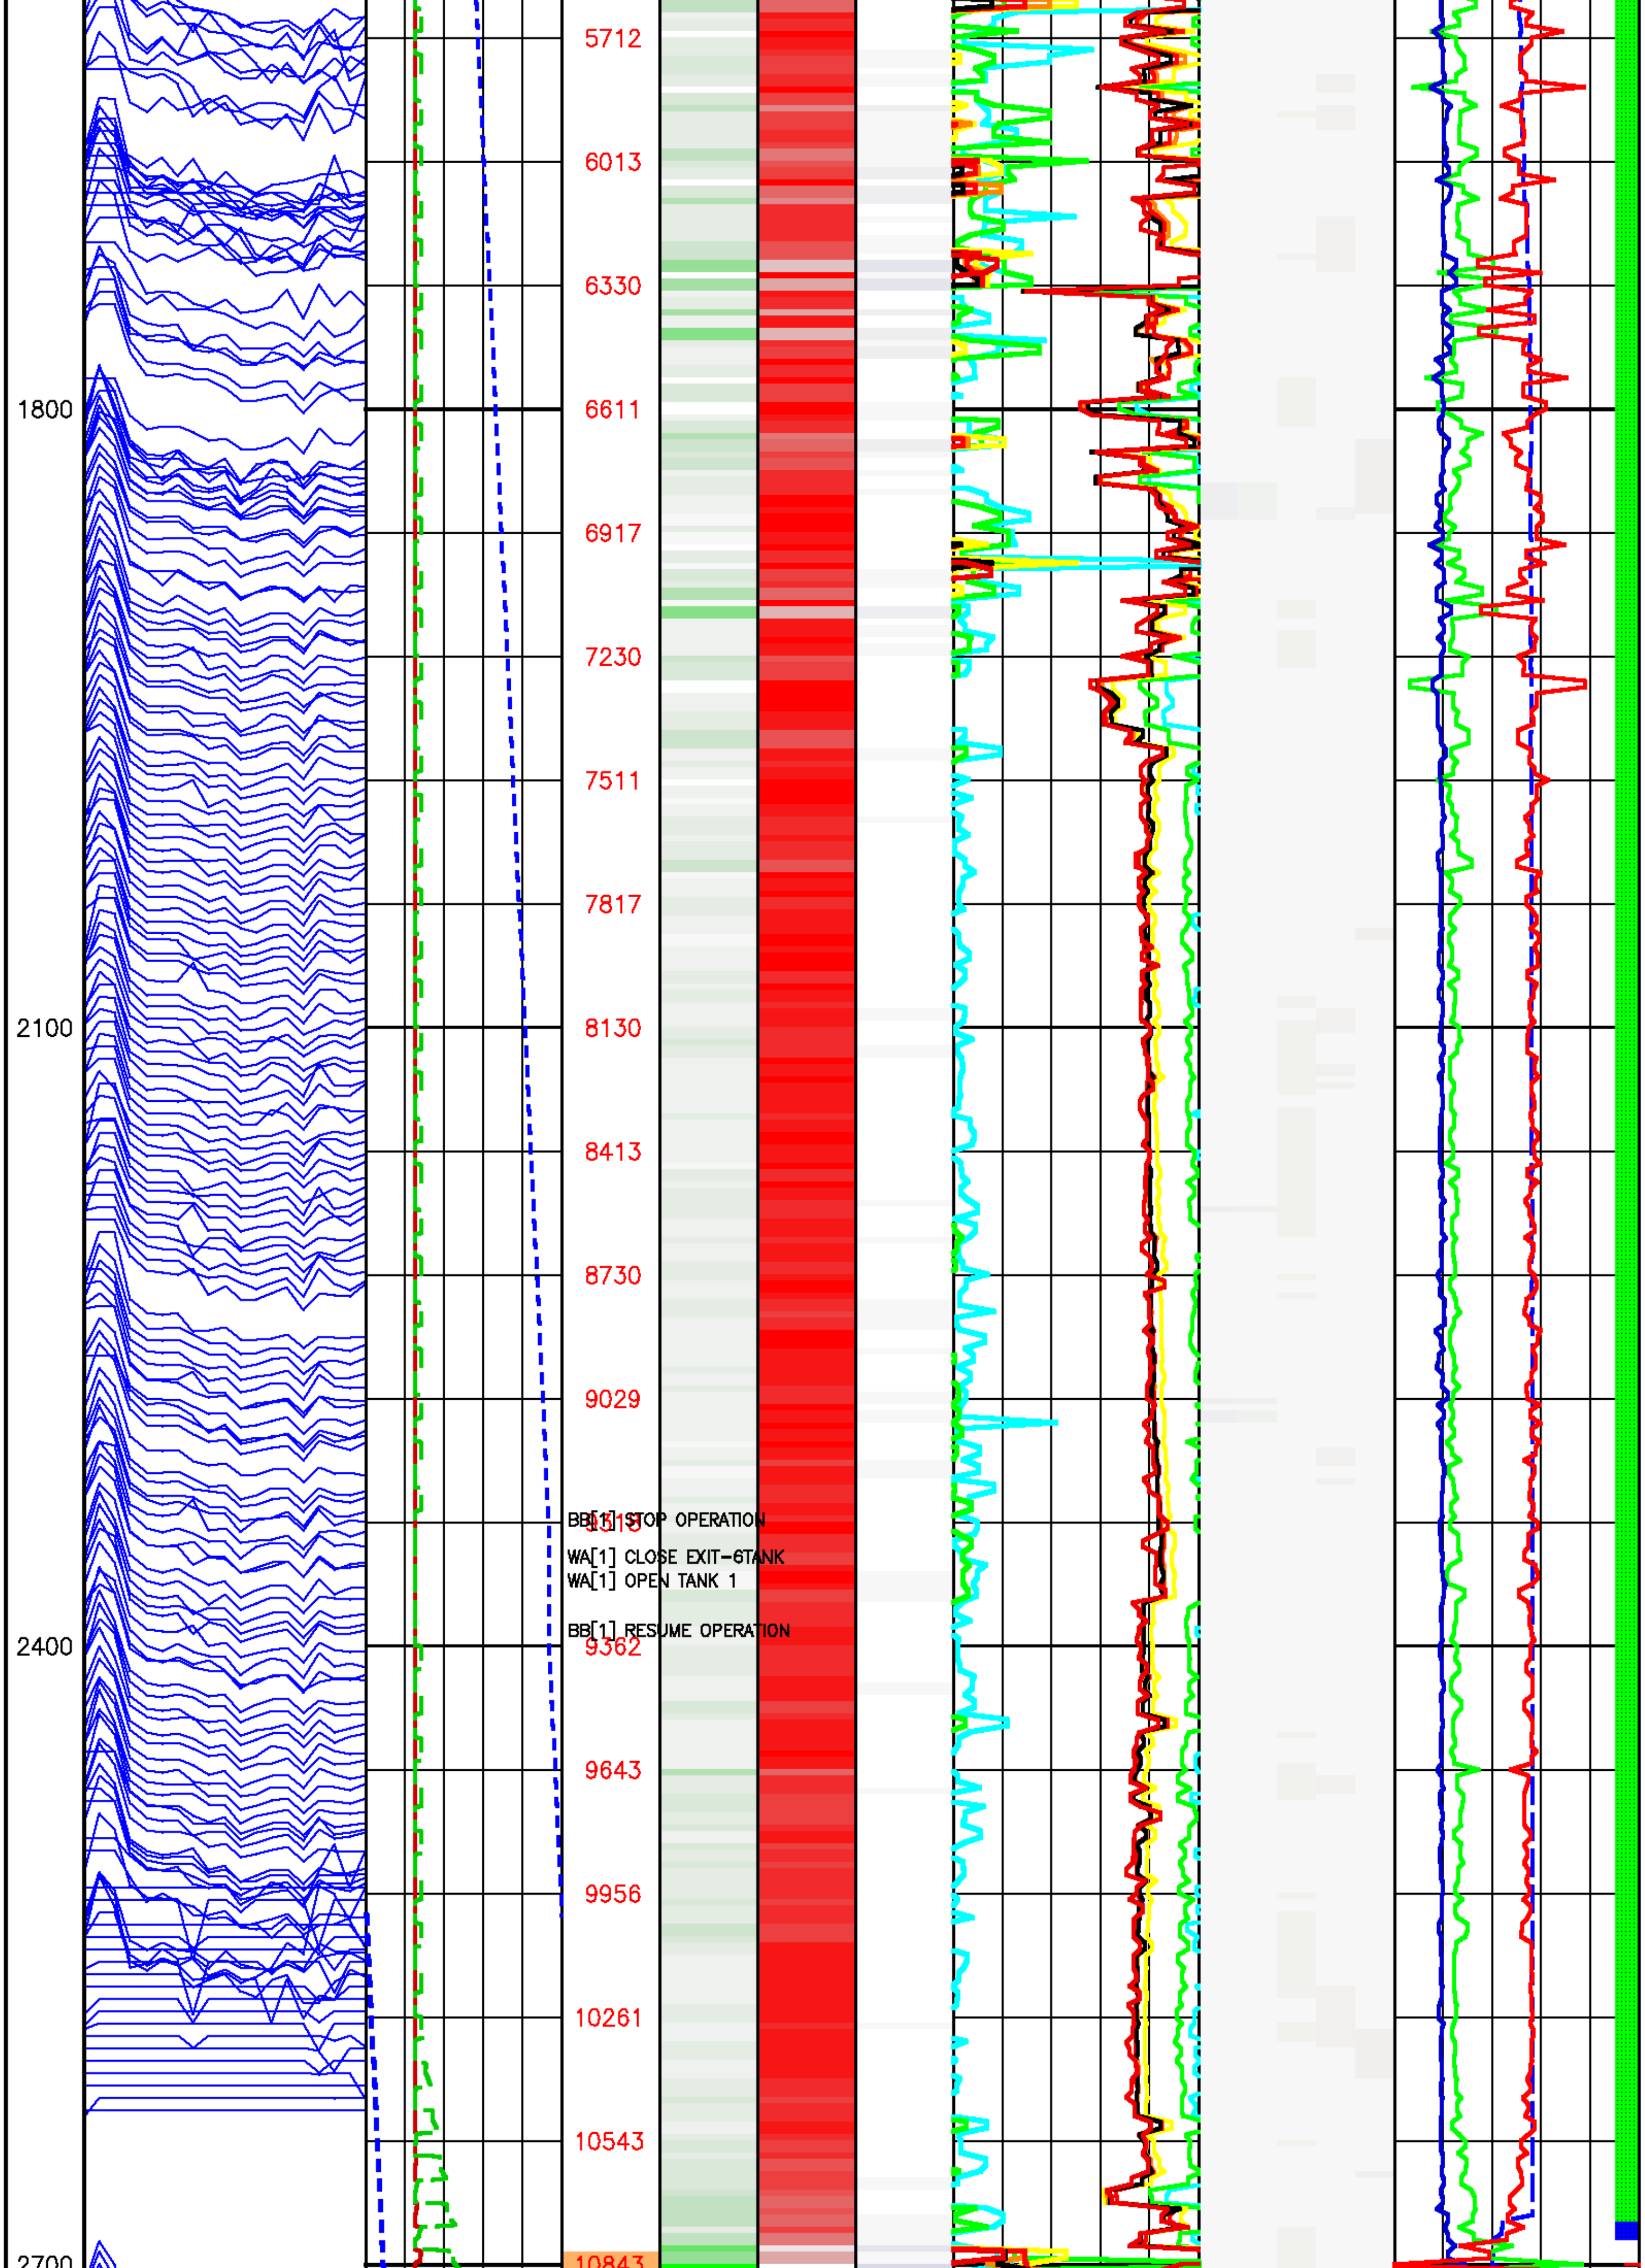
1800
2100
2400
2700
5712
6013
6330
6611
6917
7230
7511
7817
8130
8413
8730
9029
BB[1] STOP OPERATION
WA[1] CLOSE EXIT-6TANK
WA[1] OPEN TANK 1
BB[1] RESUME OPERATION
9362
9643
9956
10261
10543
10843

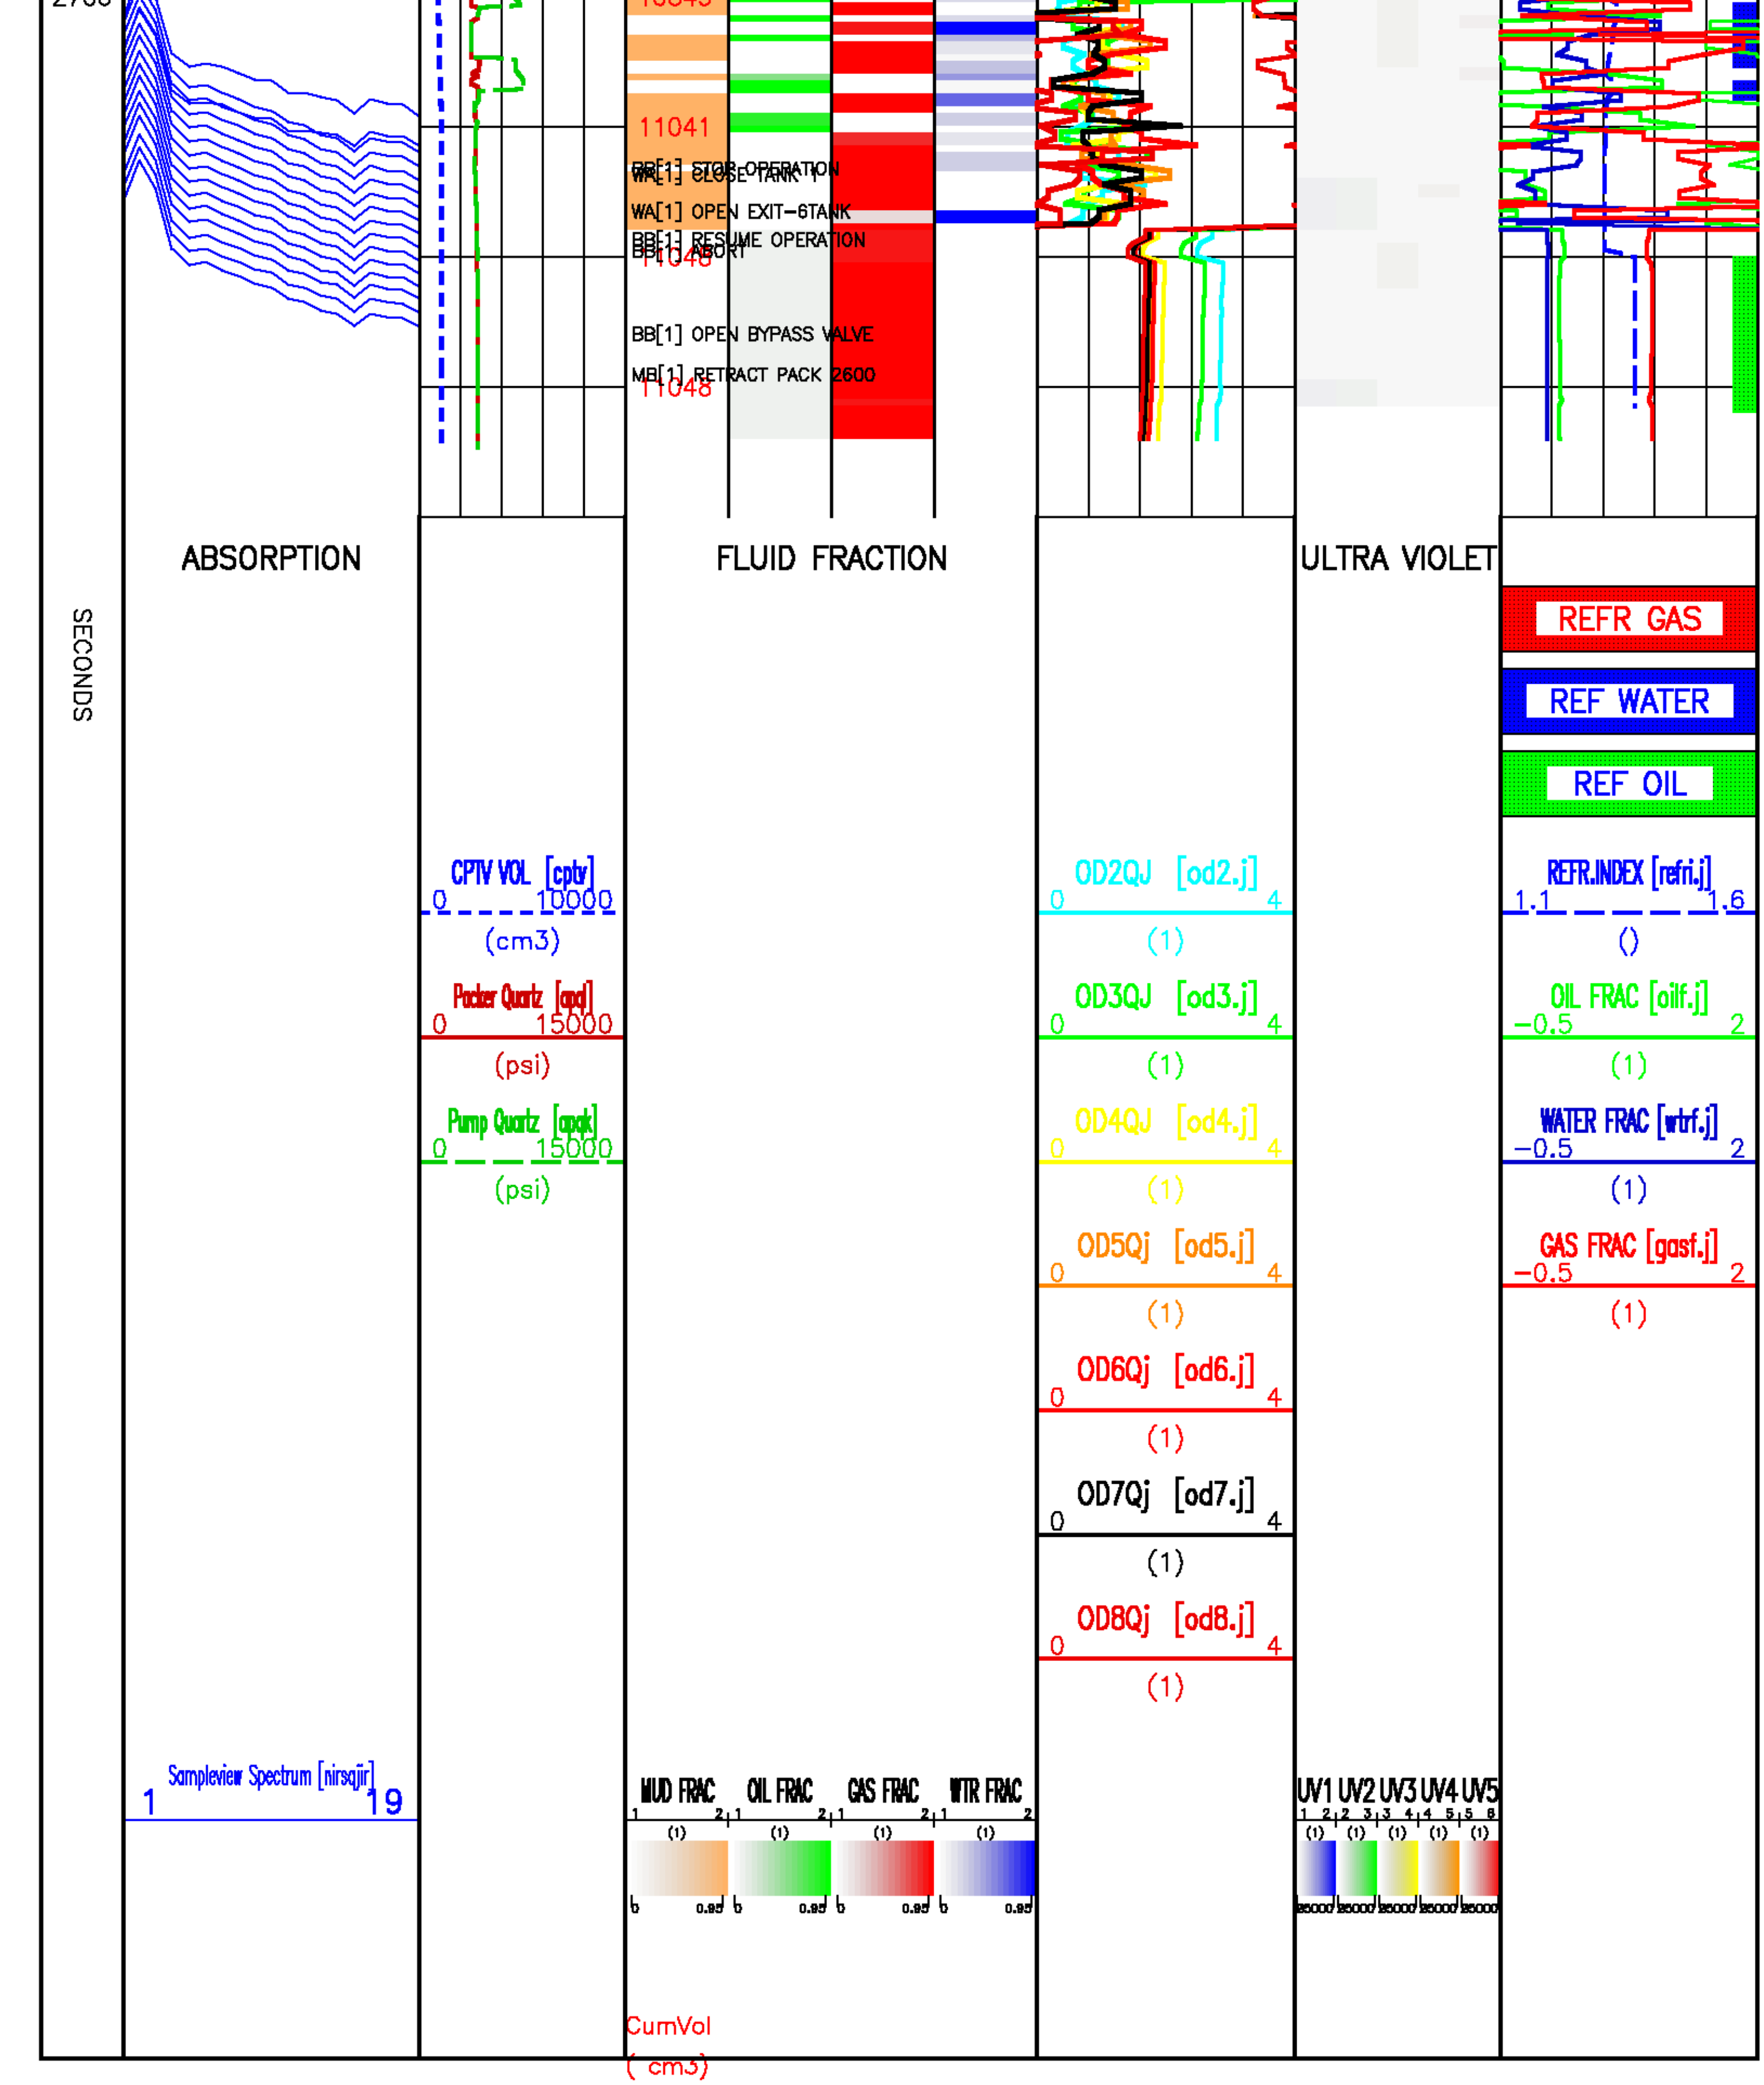

Sample Tests – Level 35 Tool Instance 1

MD 2416.3 m TVD 2416.3 m

PRESSURE HISTORY

Depth MD 2416.3 m TVD 2416.3 m

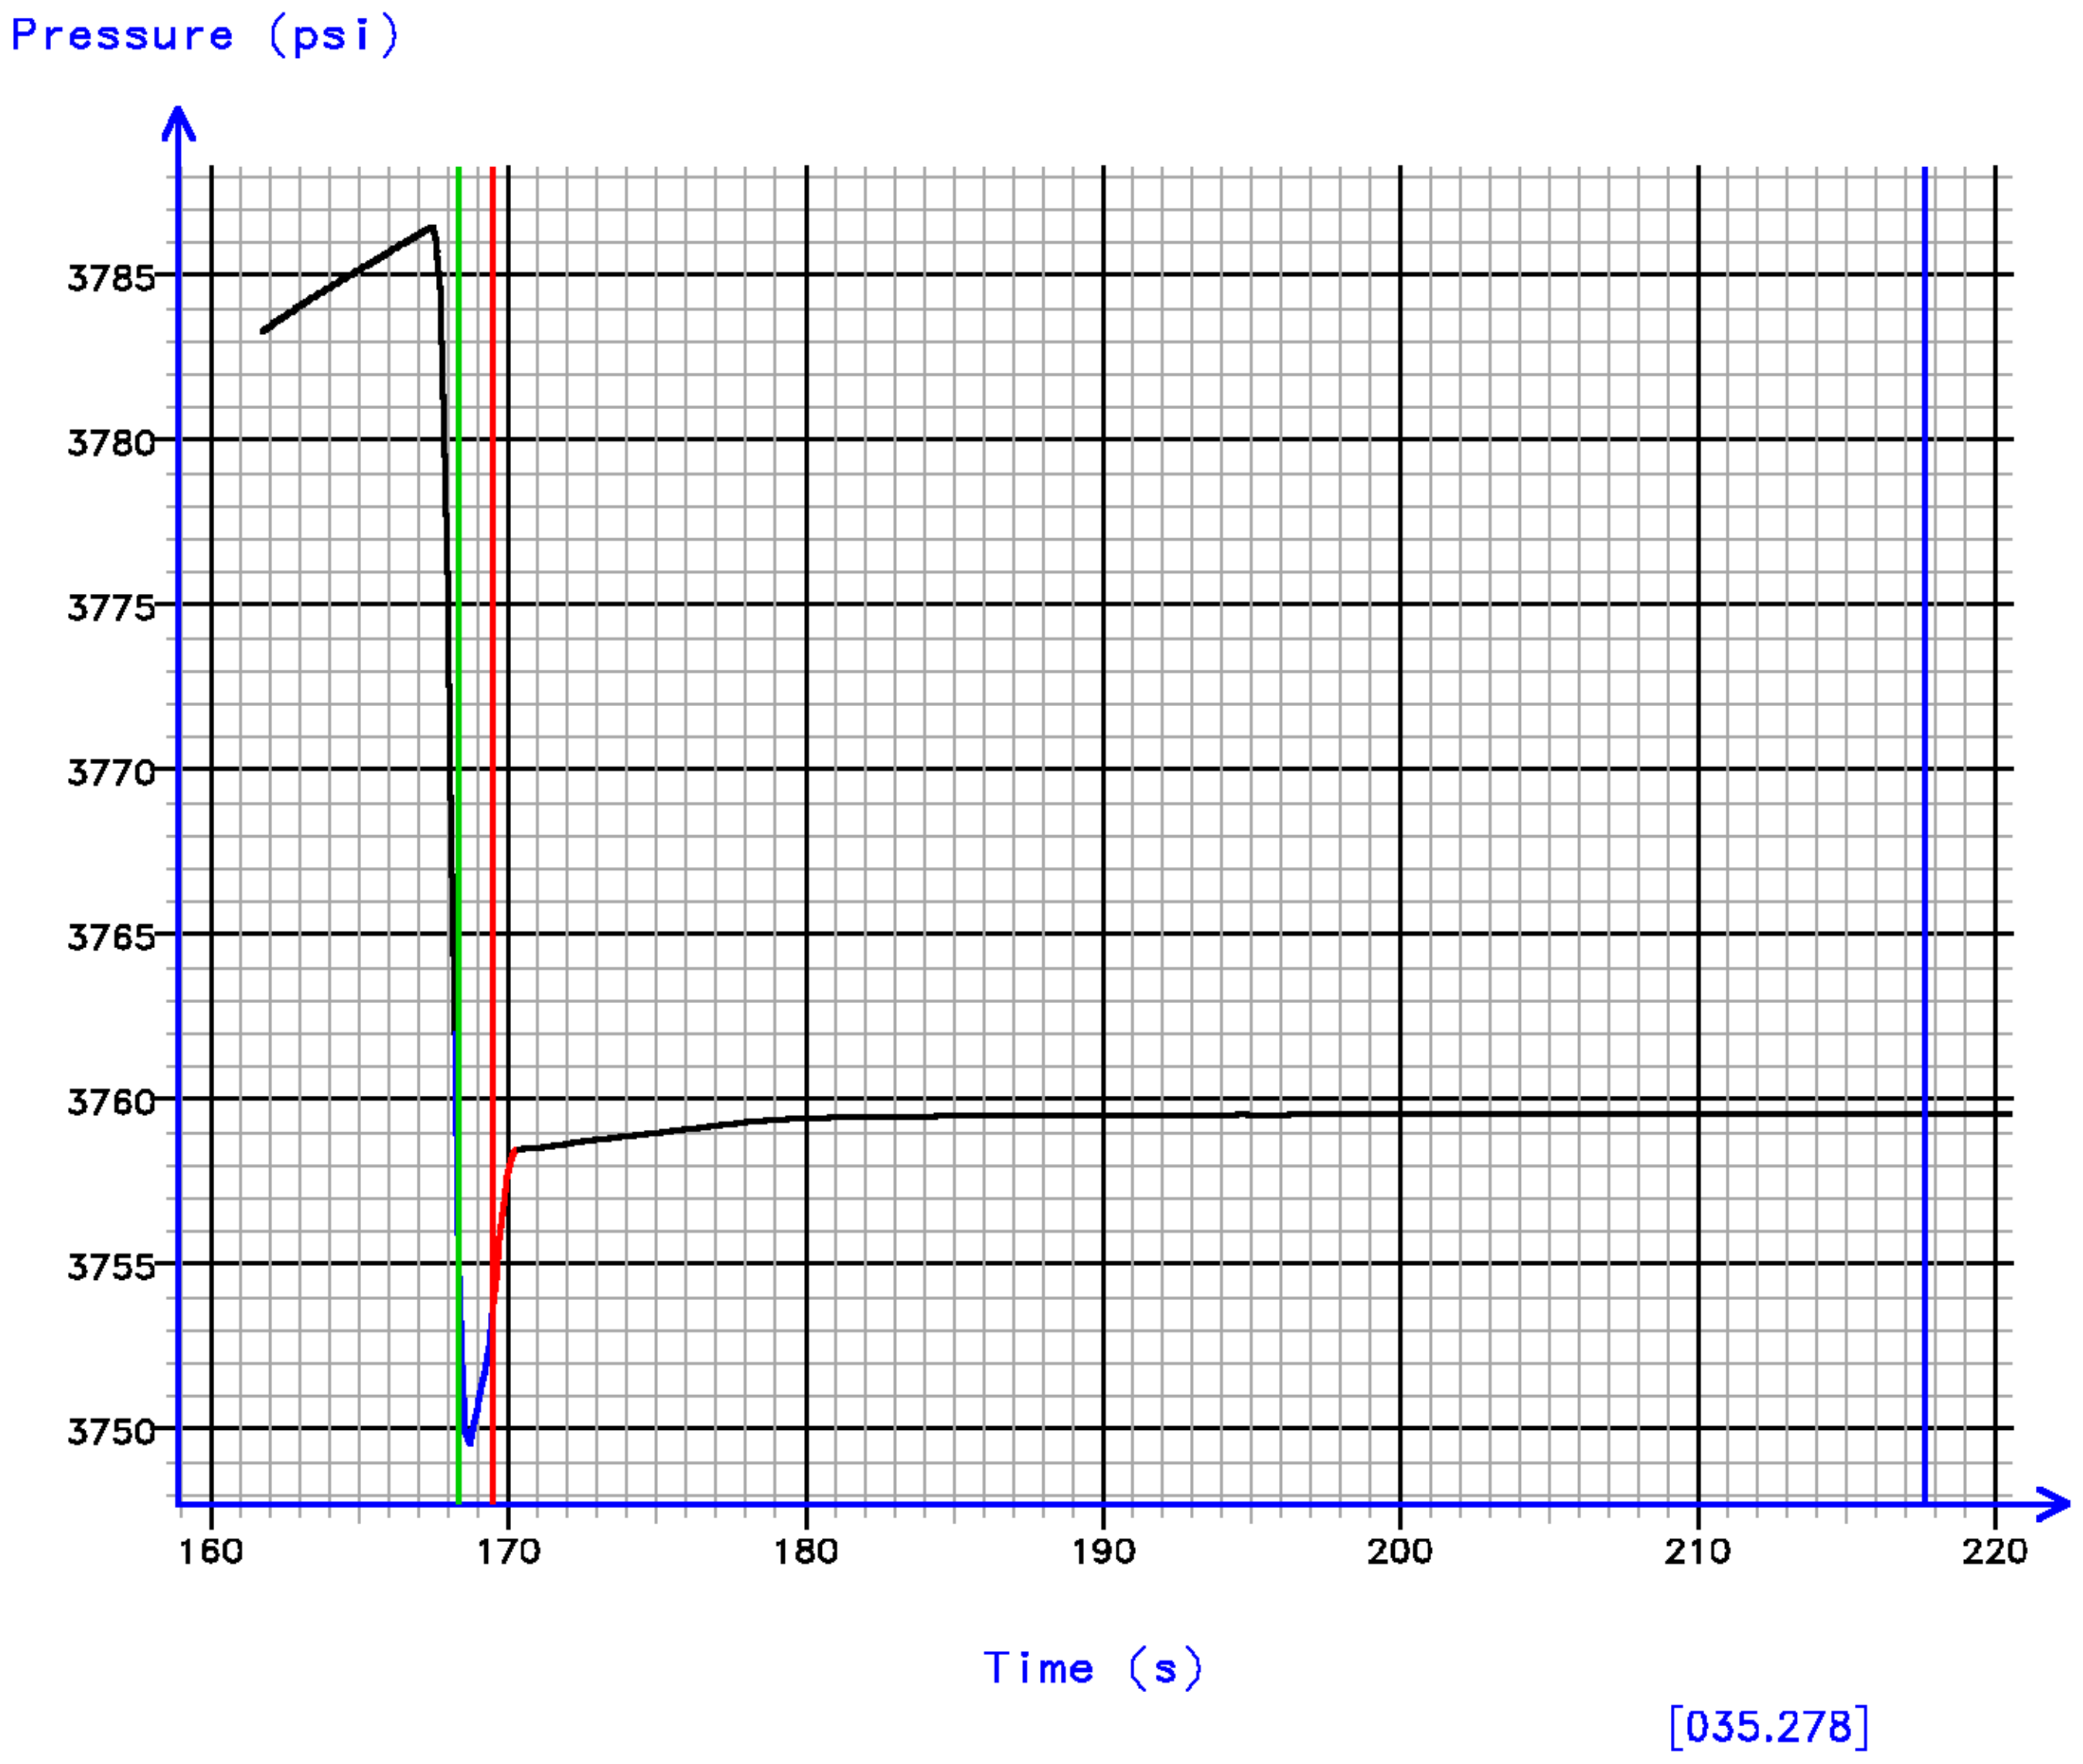

FLOW RATE ANALYSIS

Depth MD 2416.3 m TVD 2416.3 m

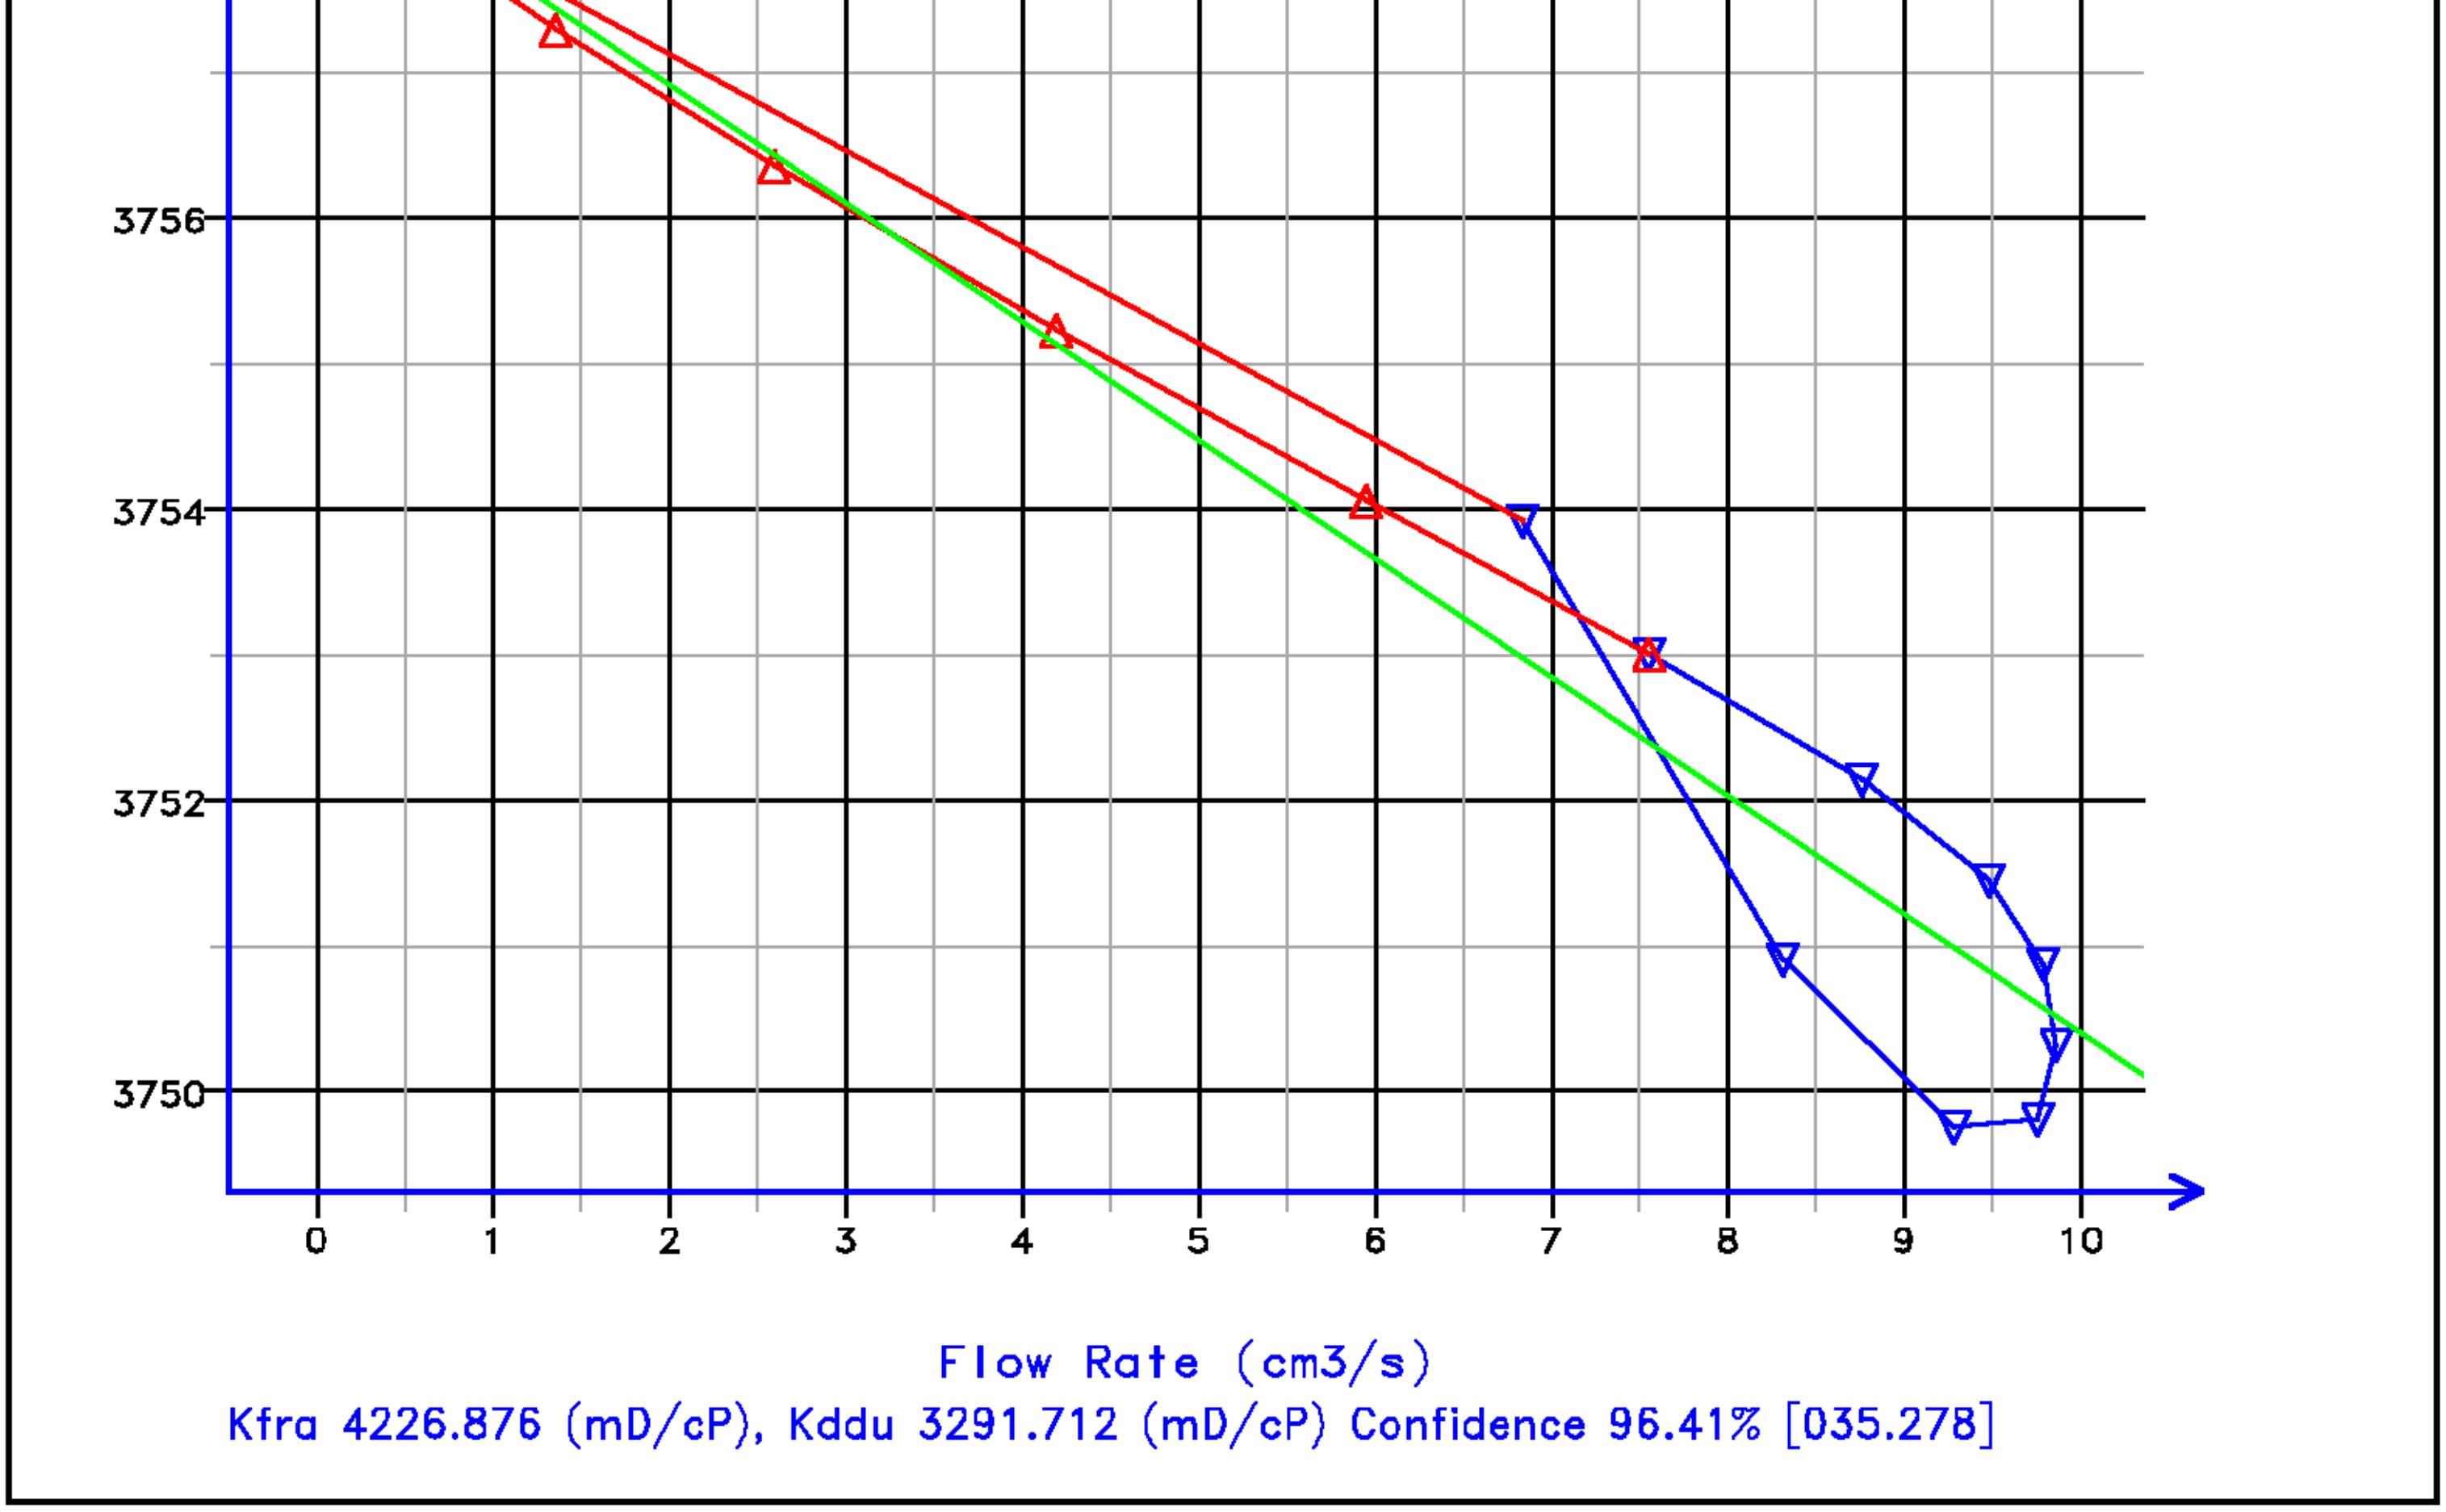

Data File : j800g43.aff
Presentation: gpi_rci-b6xx.log

SECONDS

TOOL COMMAND

ANNOTATIONS

Packer Quartz [apql] 0 15000 (psi)

Pump Quartz [apqk] 0 15000 (psi)

DRAW DOWN VOL [ddv] 20 0 (cm3)

PTV VOL [ptv] 10000 0 (cm3)

PVT VOL [pvtv] 100 0 (cm3)

PTVR VOL [ptvr] 10 0 (cm3)

CPTV VOL [cptv] 10000 0 (cm3)

QL ONES 0 10 (psi)

QL DECS 0 10 (psi)

APQL (psi)

RTDQL (degF)

0

4260.4

199.1

10		4260.4	199.1
		4260.5	199.1
20		4260.4	199.1
		4260.5	199.1
30		4260.5	199.1
		4260.5	199.1
40		4260.5	199.1
		4260.5	199.1
50		4260.5	199.1
		4260.5	199.1
	BB[1] OPEN BYPASS VALVE		
60		4257.6	199.1
		4258.3	199.1
70		4258.0	199.1
		4257.9	199.1
	MB[1] EXTEND PACK 2800		
80		4258.6	199.1
		4259.1	199.1
90		4258.8	199.1
		4258.9	199.1
100		4265.6	199.1
		4254.0	199.1
110		4252.7	199.1
	MB[1] RECHARGE 2800	4252.1	199.1
	BB[1] CLOSE BYPASS VALVE		
120		4252.7	199.2
		4251.6	199.2
	BB[1] PUMP DIR UP		
130		4251.5	199.2
	BB[1] DRAWDOWN 5 300 500	4251.4	199.2
140		4250.3	199.2
		3762.7	199.2
150		3772.1	199.1
		3778.1	199.1
160		3782.2	199.1
		3785.2	199.2
	BB[1] DRAWDOWN 15 300 500		
170		3757.7	199.2
		3759.0	199.2
180		3759.4	199.2
		3759.5	199.2
190		3759.5	199.2

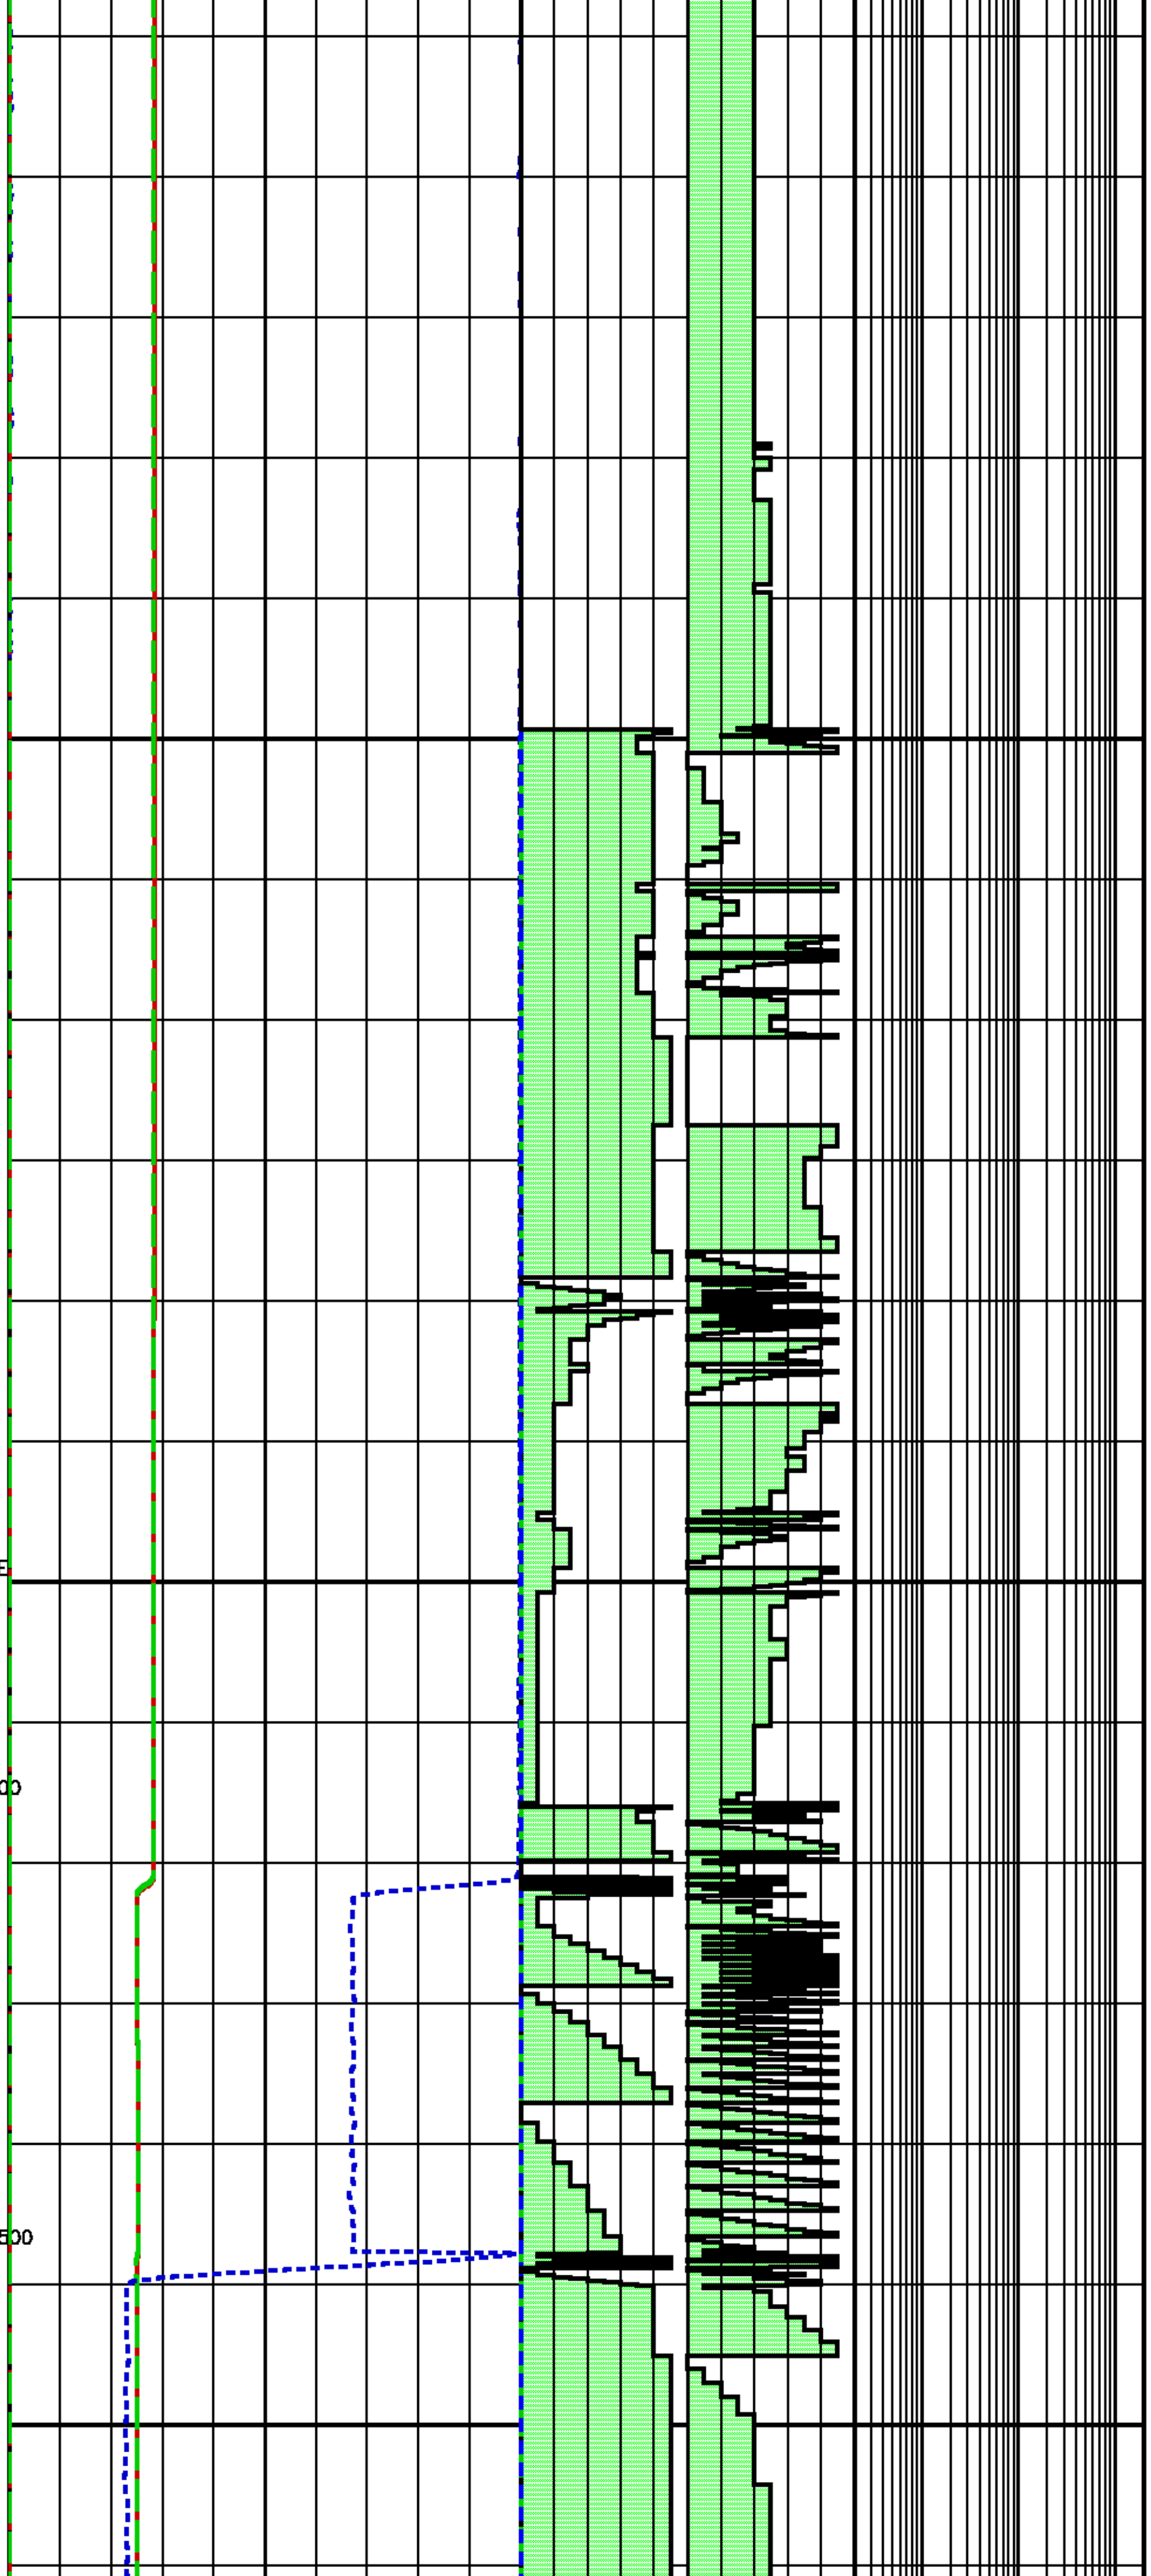

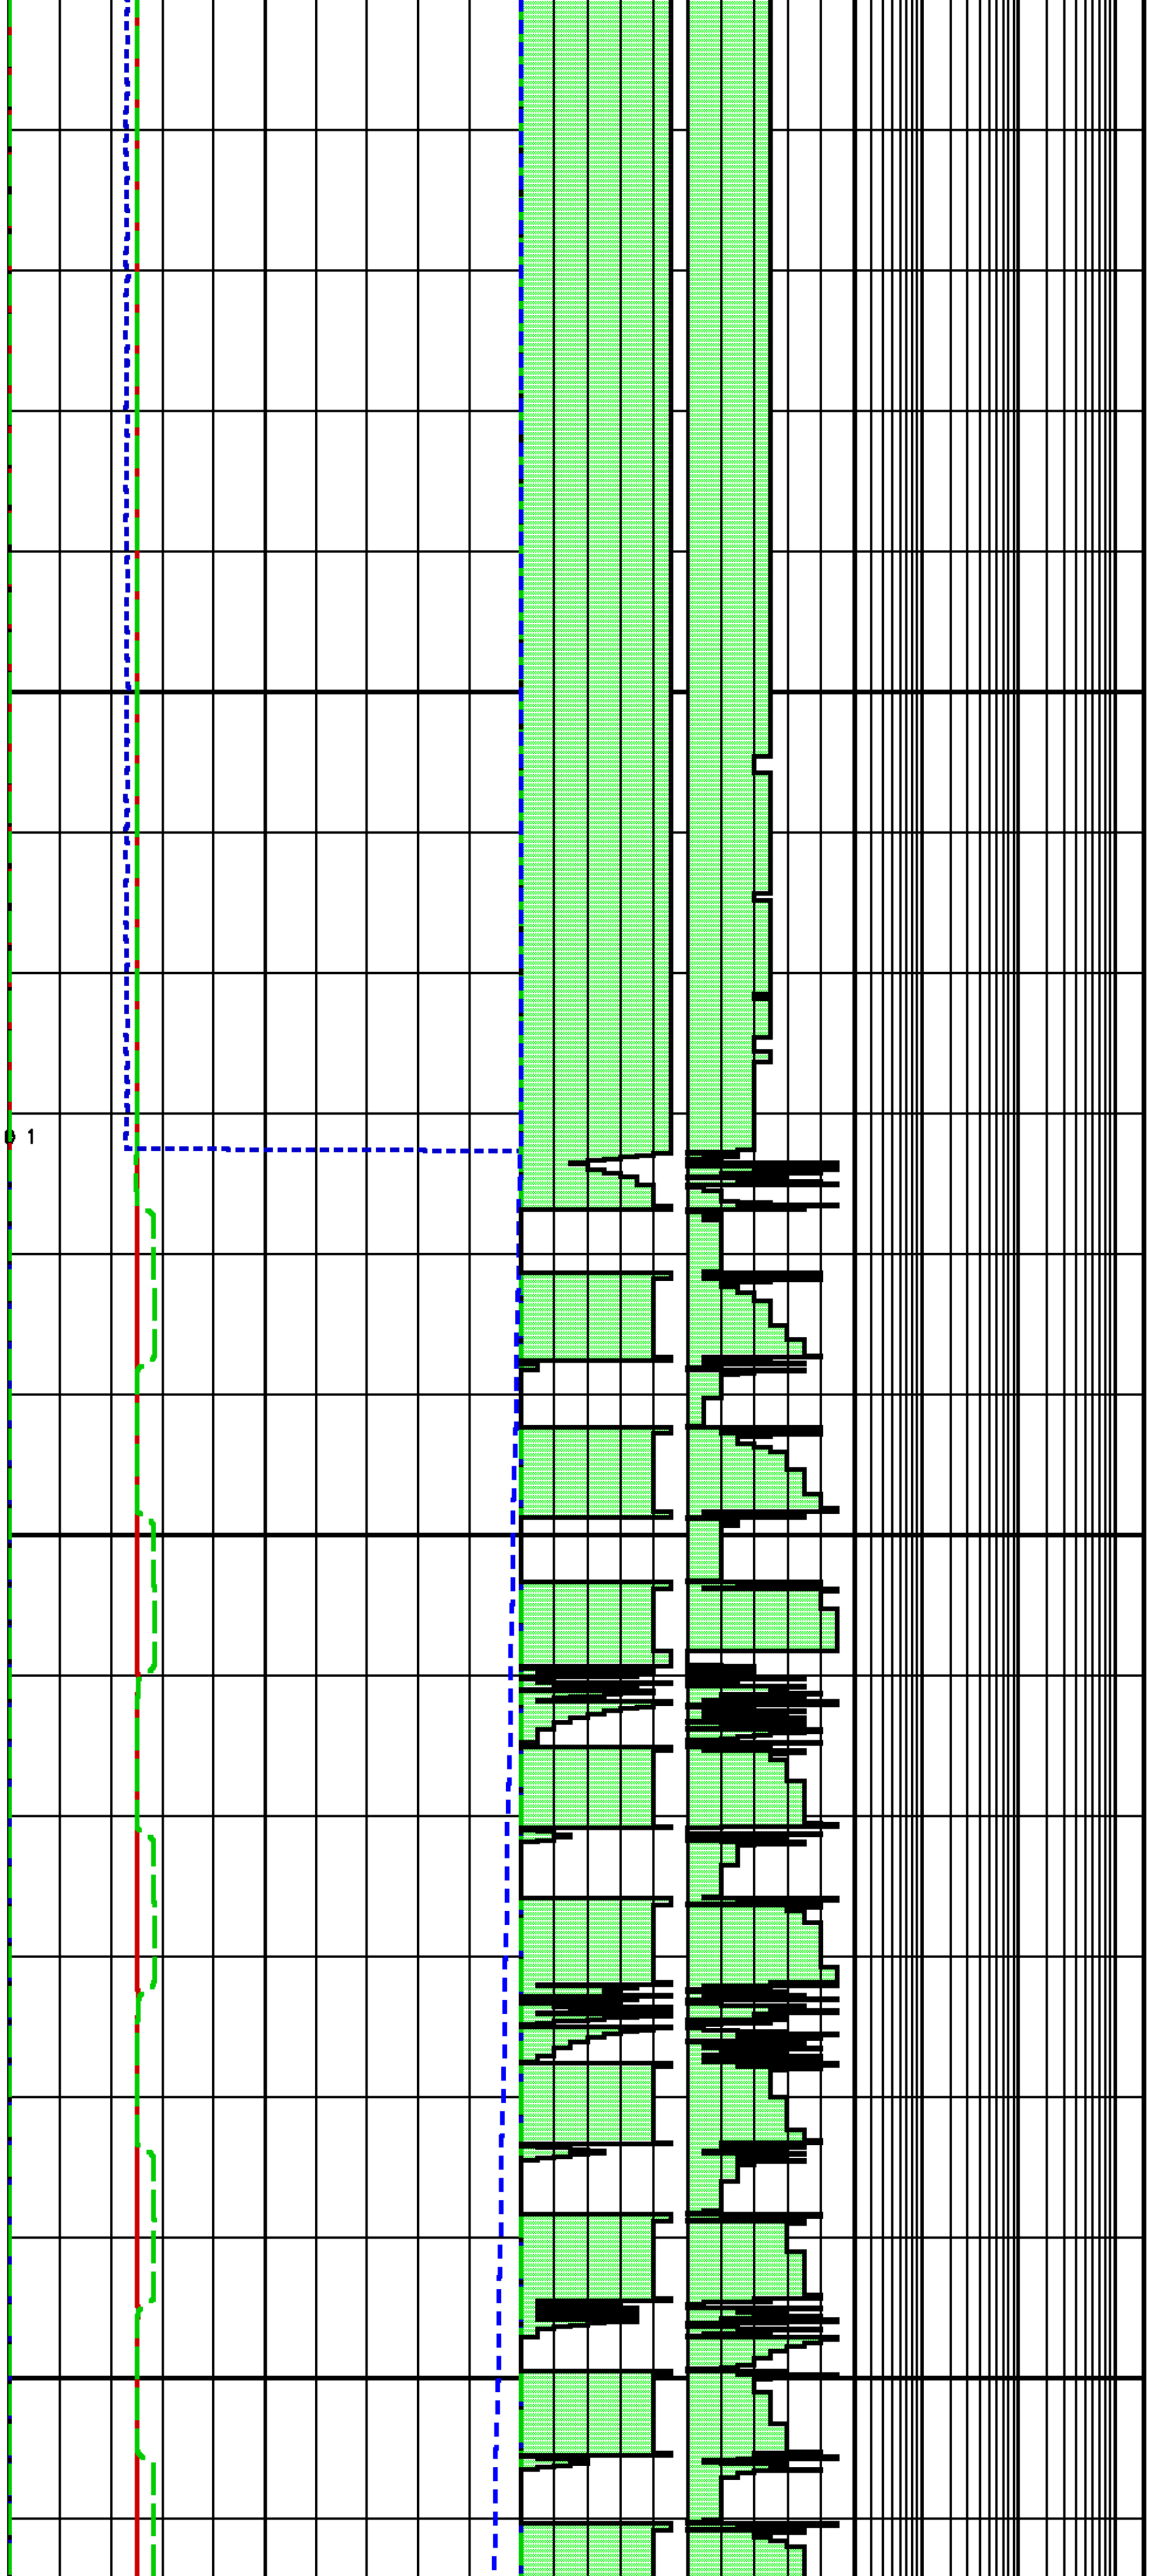

BB[1] PUMP 100000 0 63 0 1

	3759.5	199.2
200	3759.6	199.2
	3759.6	199.2
210	3759.6	199.2
	3759.6	199.2
220	3759.6	199.2
	3759.5	199.2
230	3759.5	199.2
	3759.5	199.2
240	3759.5	199.2
	3759.5	199.2
250	3759.5	199.2
	3759.5	199.2
260	3759.5	199.2
	3759.5	199.2
270	3759.5	199.2
	3758.0	199.2
280	3760.2	199.2
	3758.6	199.2
290	3760.2	199.2
	3758.7	199.2
300	3760.3	199.2
	3758.9	199.2
310	3787.0	199.2
	3760.0	199.2
320	3758.8	199.2
	3760.3	199.2
330	3758.9	199.2
	3769.0	199.2
340	3758.6	199.2
	3760.4	199.2
350	3758.7	199.2
	3787.9	199.2
360	3758.5	199.2
	3758.7	199.2
370	3760.2	199.2

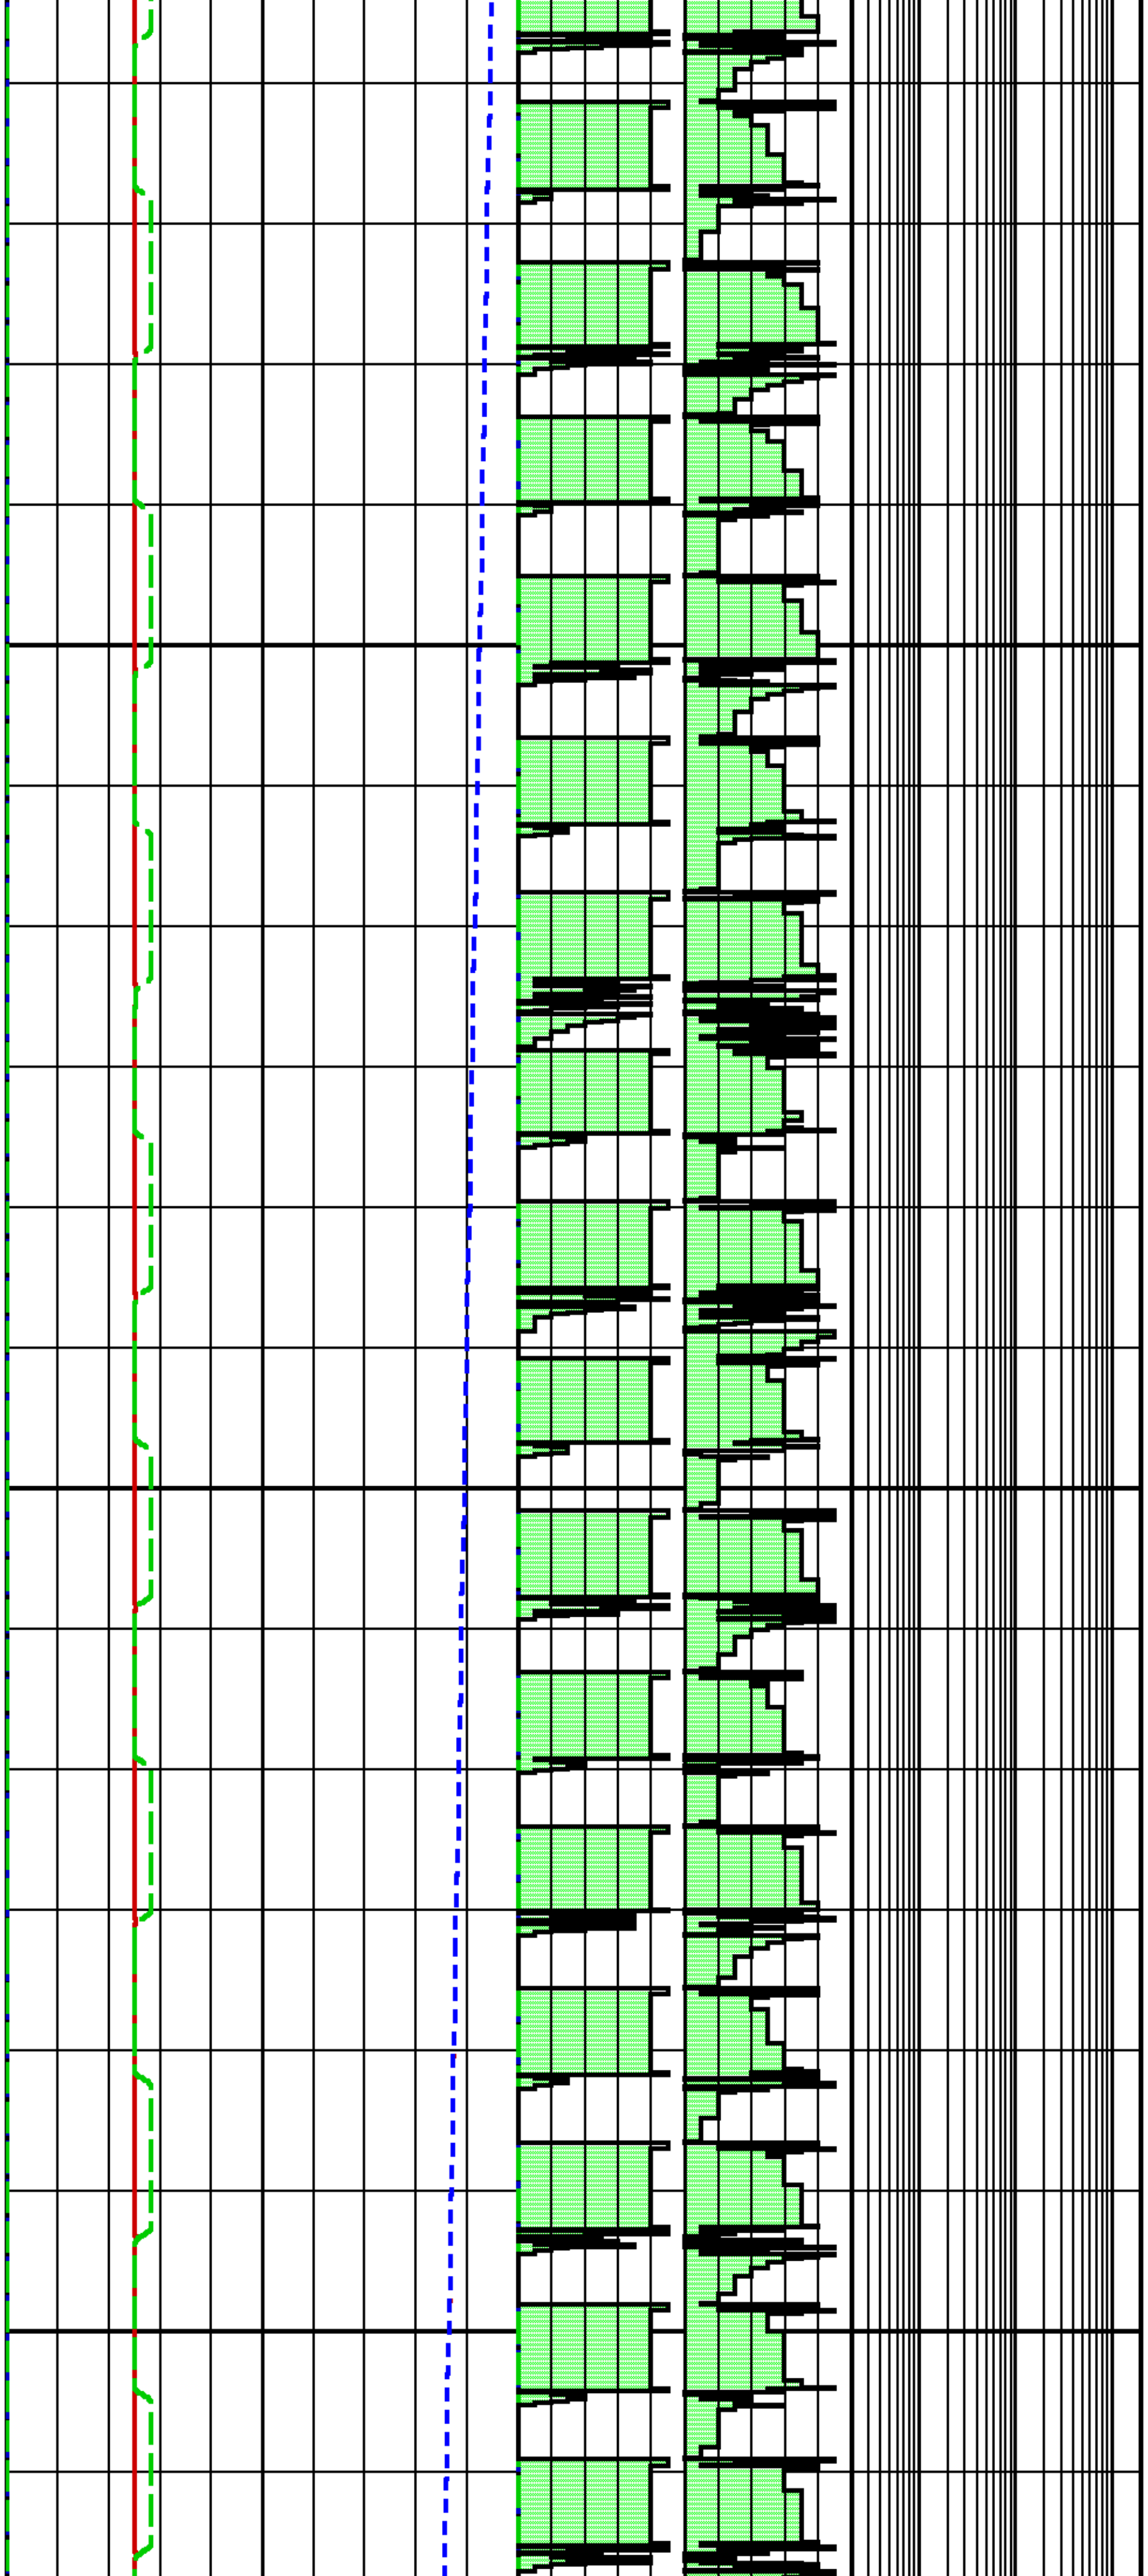

	3758.8	199.2
380	3760.3	199.2
	3758.6	199.2
390	3760.2	199.2
	3758.8	199.2
400	3764.9	199.2
	3758.5	199.2
410	3761.8	199.2
	3760.0	199.2
420	3758.8	199.2
	3760.4	199.2
430	3758.6	199.2
	3760.3	199.2
440	3758.7	199.2
	3788.8	199.3
450	3758.6	199.3
	3763.4	199.3
460	3759.1	199.3
	3758.8	199.3
470	3760.7	199.3
	3758.7	199.3
480	3760.2	199.3
	3758.8	199.3
490	3760.5	199.3
	3758.6	199.3
500	3762.0	199.3
	3758.6	199.3
510	3759.0	199.3
	3760.3	199.3
520	3758.6	199.3
	3760.2	199.3
530	3758.7	199.3
	3760.6	199.3
540	3758.6	199.3
	3762.3	199.3
550	3758.6	199.3
	3758.8	199.3

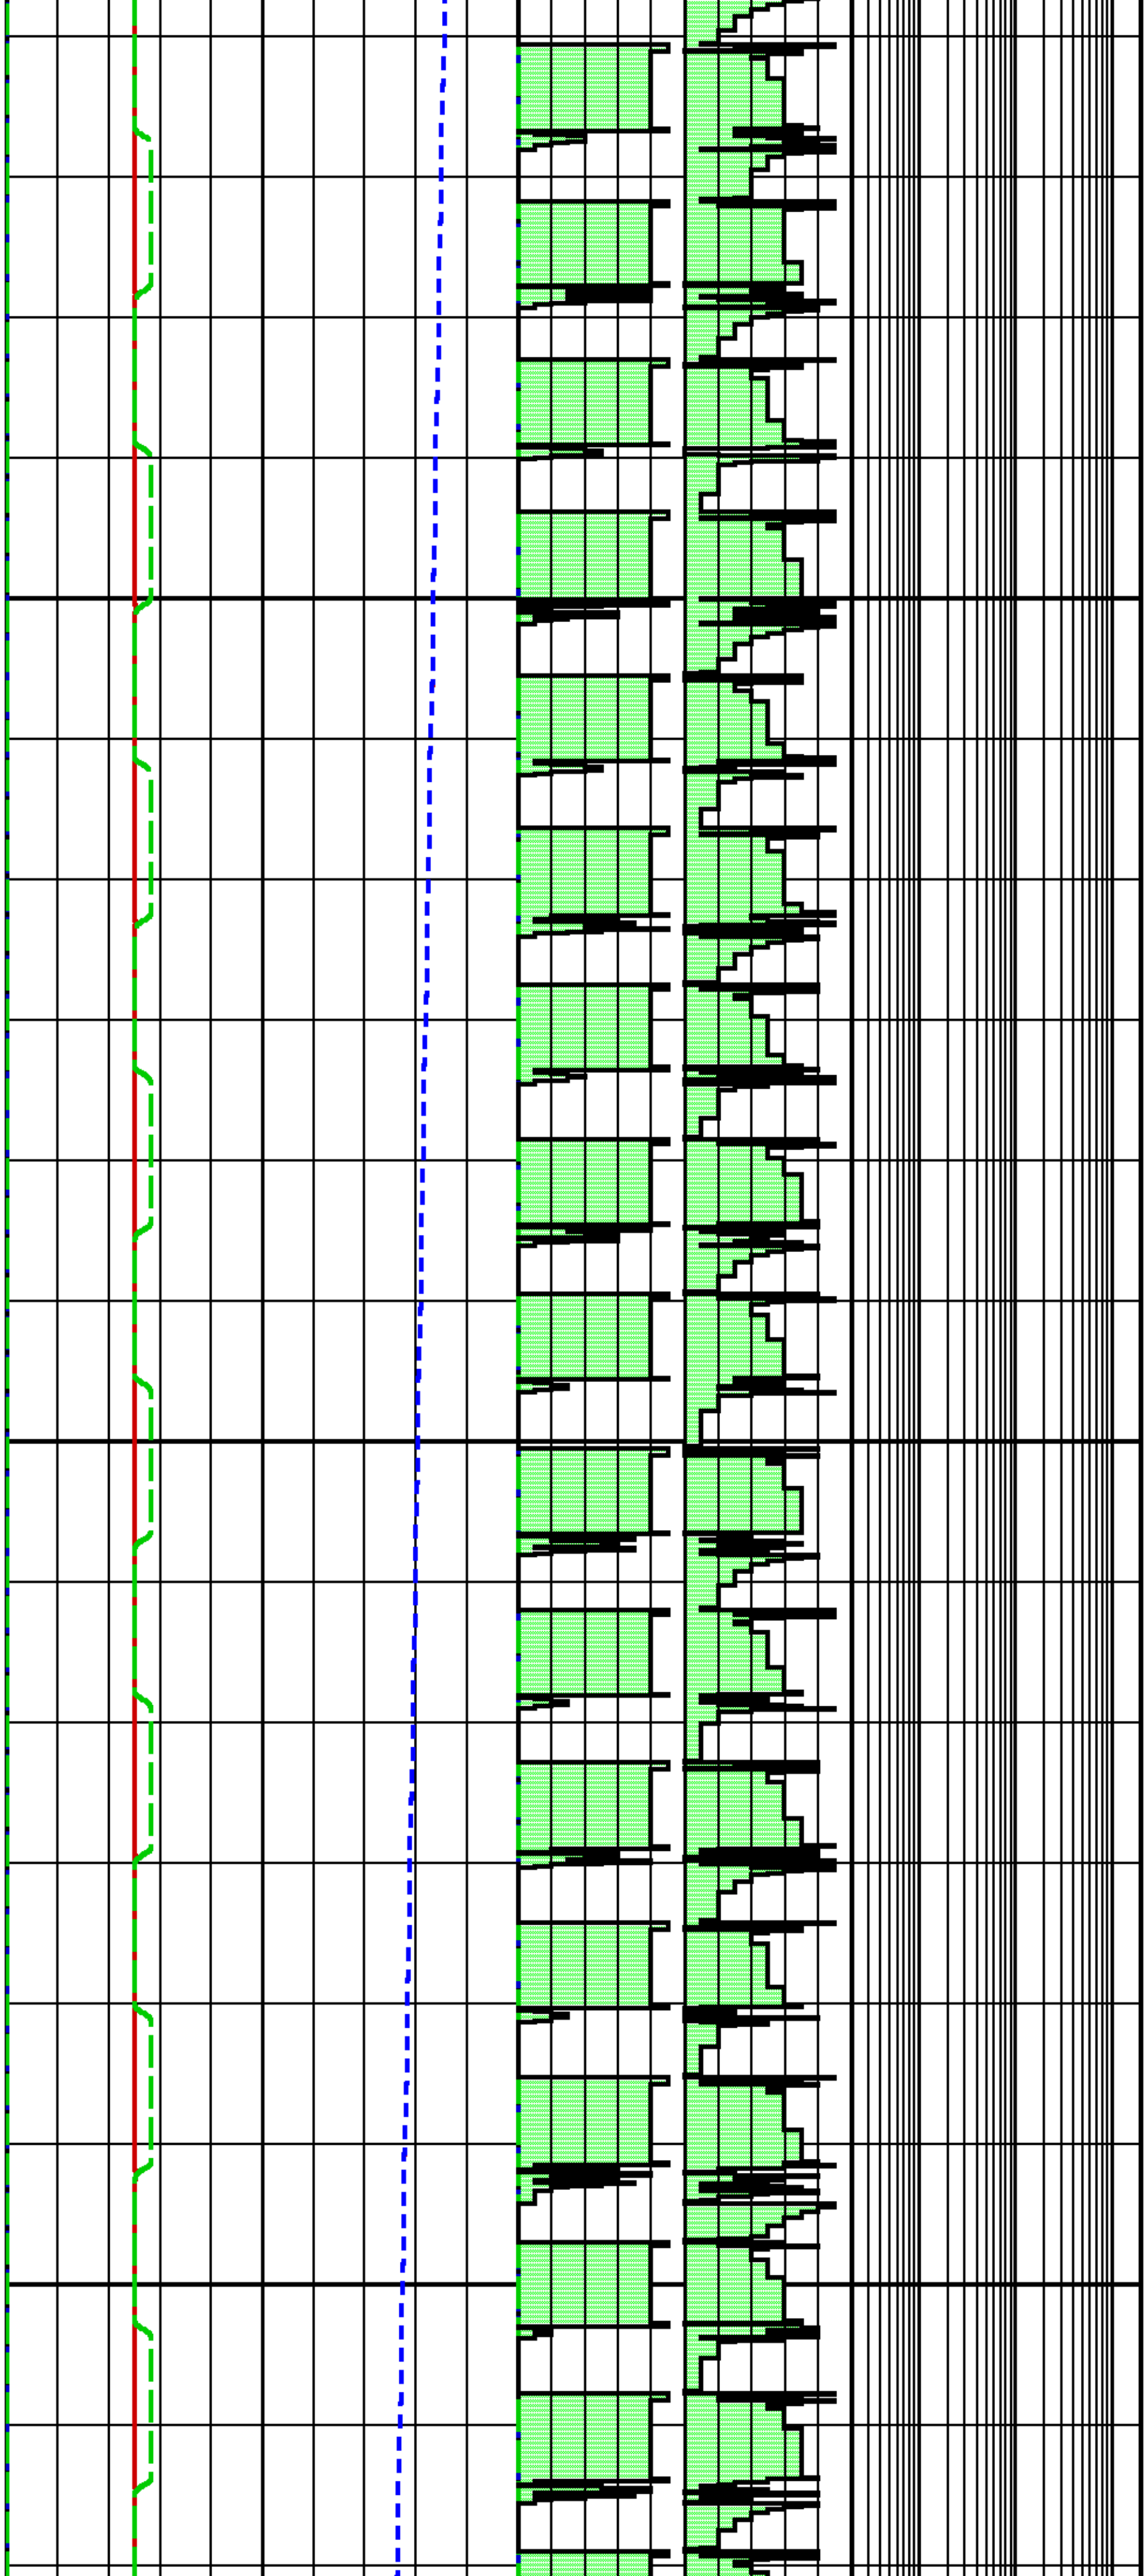

560	3760.3	199.3
	3758.7	199.3
570	3760.5	199.3
	3758.7	199.3
580	3760.5	199.3
	3758.5	199.3
590	3761.7	199.3
	3758.6	199.3
600	3759.2	199.3
	3760.3	199.3
610	3758.6	199.3
	3760.2	199.3
620	3758.7	199.3
	3760.4	199.3
630	3758.5	199.3
	3760.3	199.3
640	3758.6	199.3
	3773.2	199.3
650	3758.7	199.3
	3758.6	199.3
660	3760.1	199.3
	3758.7	199.3
670	3760.3	199.3
	3758.6	199.3
680	3760.2	199.3
	3758.7	199.3
690	3765.2	199.3
	3758.4	199.3
700	3758.7	199.3
	3760.1	199.3
710	3758.7	199.3
	3760.7	199.3
720	3758.6	199.3
	3760.2	199.3
730	3758.7	199.3
	3767.4	199.3
740	3758.4	199.3

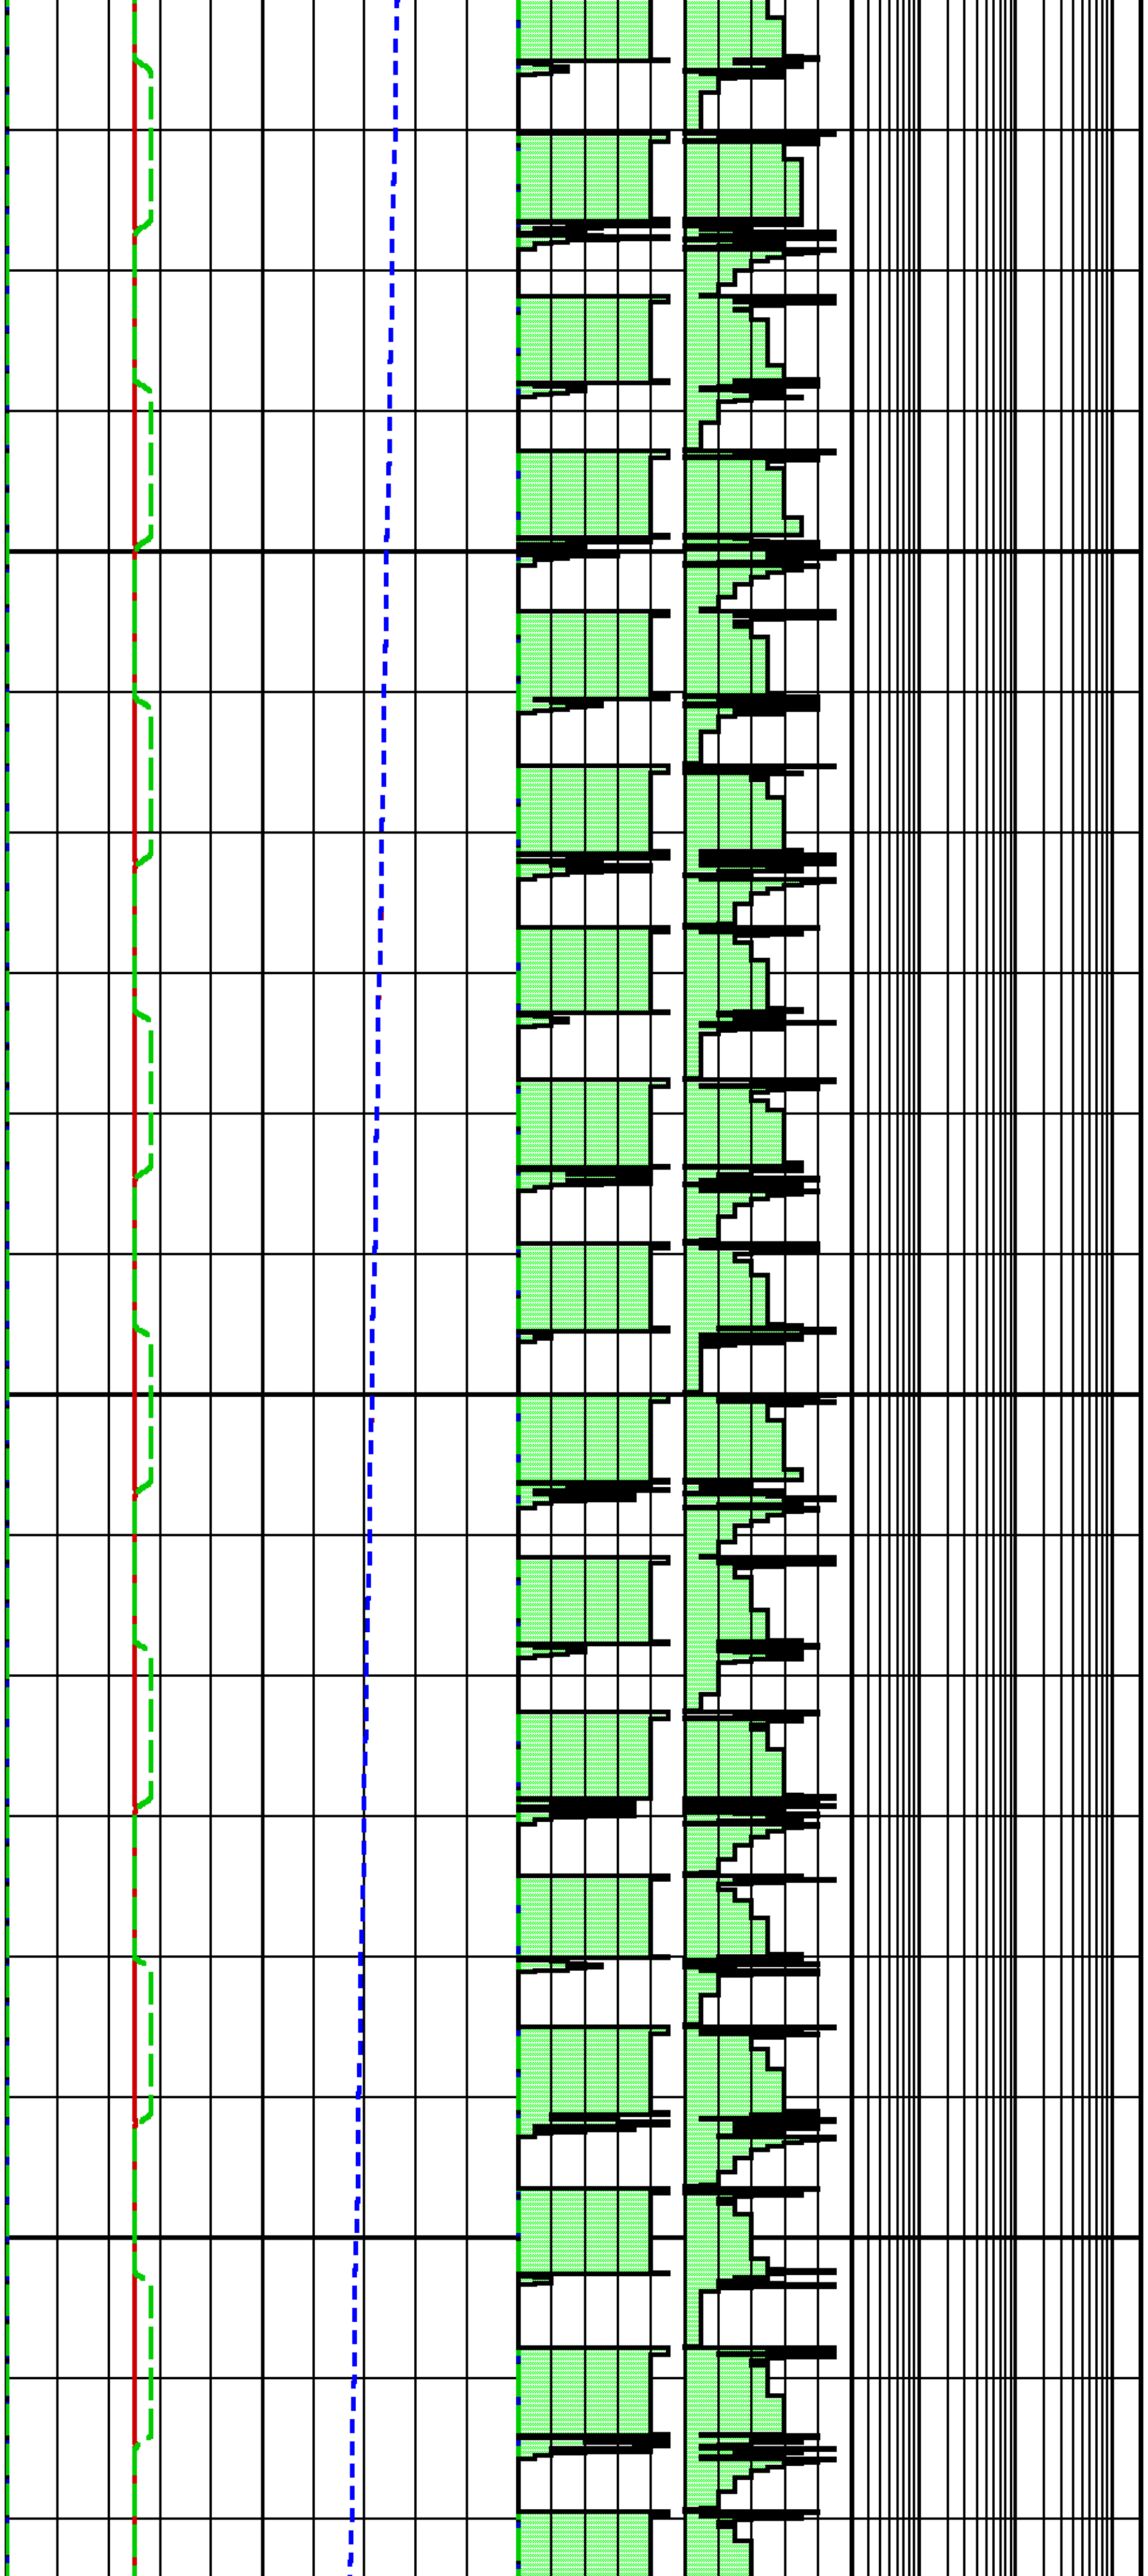

	3759.4	199.3
750	3760.1	199.3
	3758.8	199.3
760	3760.4	199.3
	3758.6	199.3
770	3760.2	199.3
	3758.7	199.3
780	3775.8	199.3
	3758.3	199.3
790	3758.6	199.3
	3760.1	199.3
800	3758.6	199.3
	3760.4	199.3
810	3758.5	199.3
	3760.2	199.3
820	3758.6	199.3
	3765.0	199.3
830	3758.4	199.3
	3758.6	199.3
840	3760.0	199.3
	3758.7	199.3
850	3760.3	199.3
	3758.5	199.3
860	3760.2	199.3
	3758.6	199.3
870	3764.5	199.3
	3758.3	199.3
880	3759.3	199.3
	3760.0	199.3
890	3758.6	199.3
	3760.3	199.3
900	3758.5	199.3
	3760.2	199.3
910	3758.6	199.3
	3773.0	199.3
920	3758.5	199.3

	3758.5	199.3
930	3760.2	199.4
	3758.6	199.4
940	3760.4	199.4
	3758.3	199.4
950	3760.1	199.4
	3758.6	199.4
960	3762.8	199.4
	3758.7	199.4
970	3758.6	199.4
	3760.1	199.4
980	3758.7	199.4
	3760.2	199.4
990	3758.5	199.4
	3760.1	199.4
1000	3758.6	199.4
	3760.6	199.4
1010	3758.4	199.4
	3761.4	199.4
1020	3758.7	199.4
	3758.7	199.4
1030	3760.2	199.4
	3758.6	199.4
1040	3760.1	199.4
	3758.7	199.4
1050	3760.3	199.4
	3758.5	199.4
1060	3760.6	199.4
	3758.6	199.4
1070	3758.7	199.4
	3760.3	199.4
1080	3758.6	199.4
	3760.1	199.4
1090	3758.7	199.4
	3762.5	199.4
1100	3758.6	199.4
	3761.1	199.4

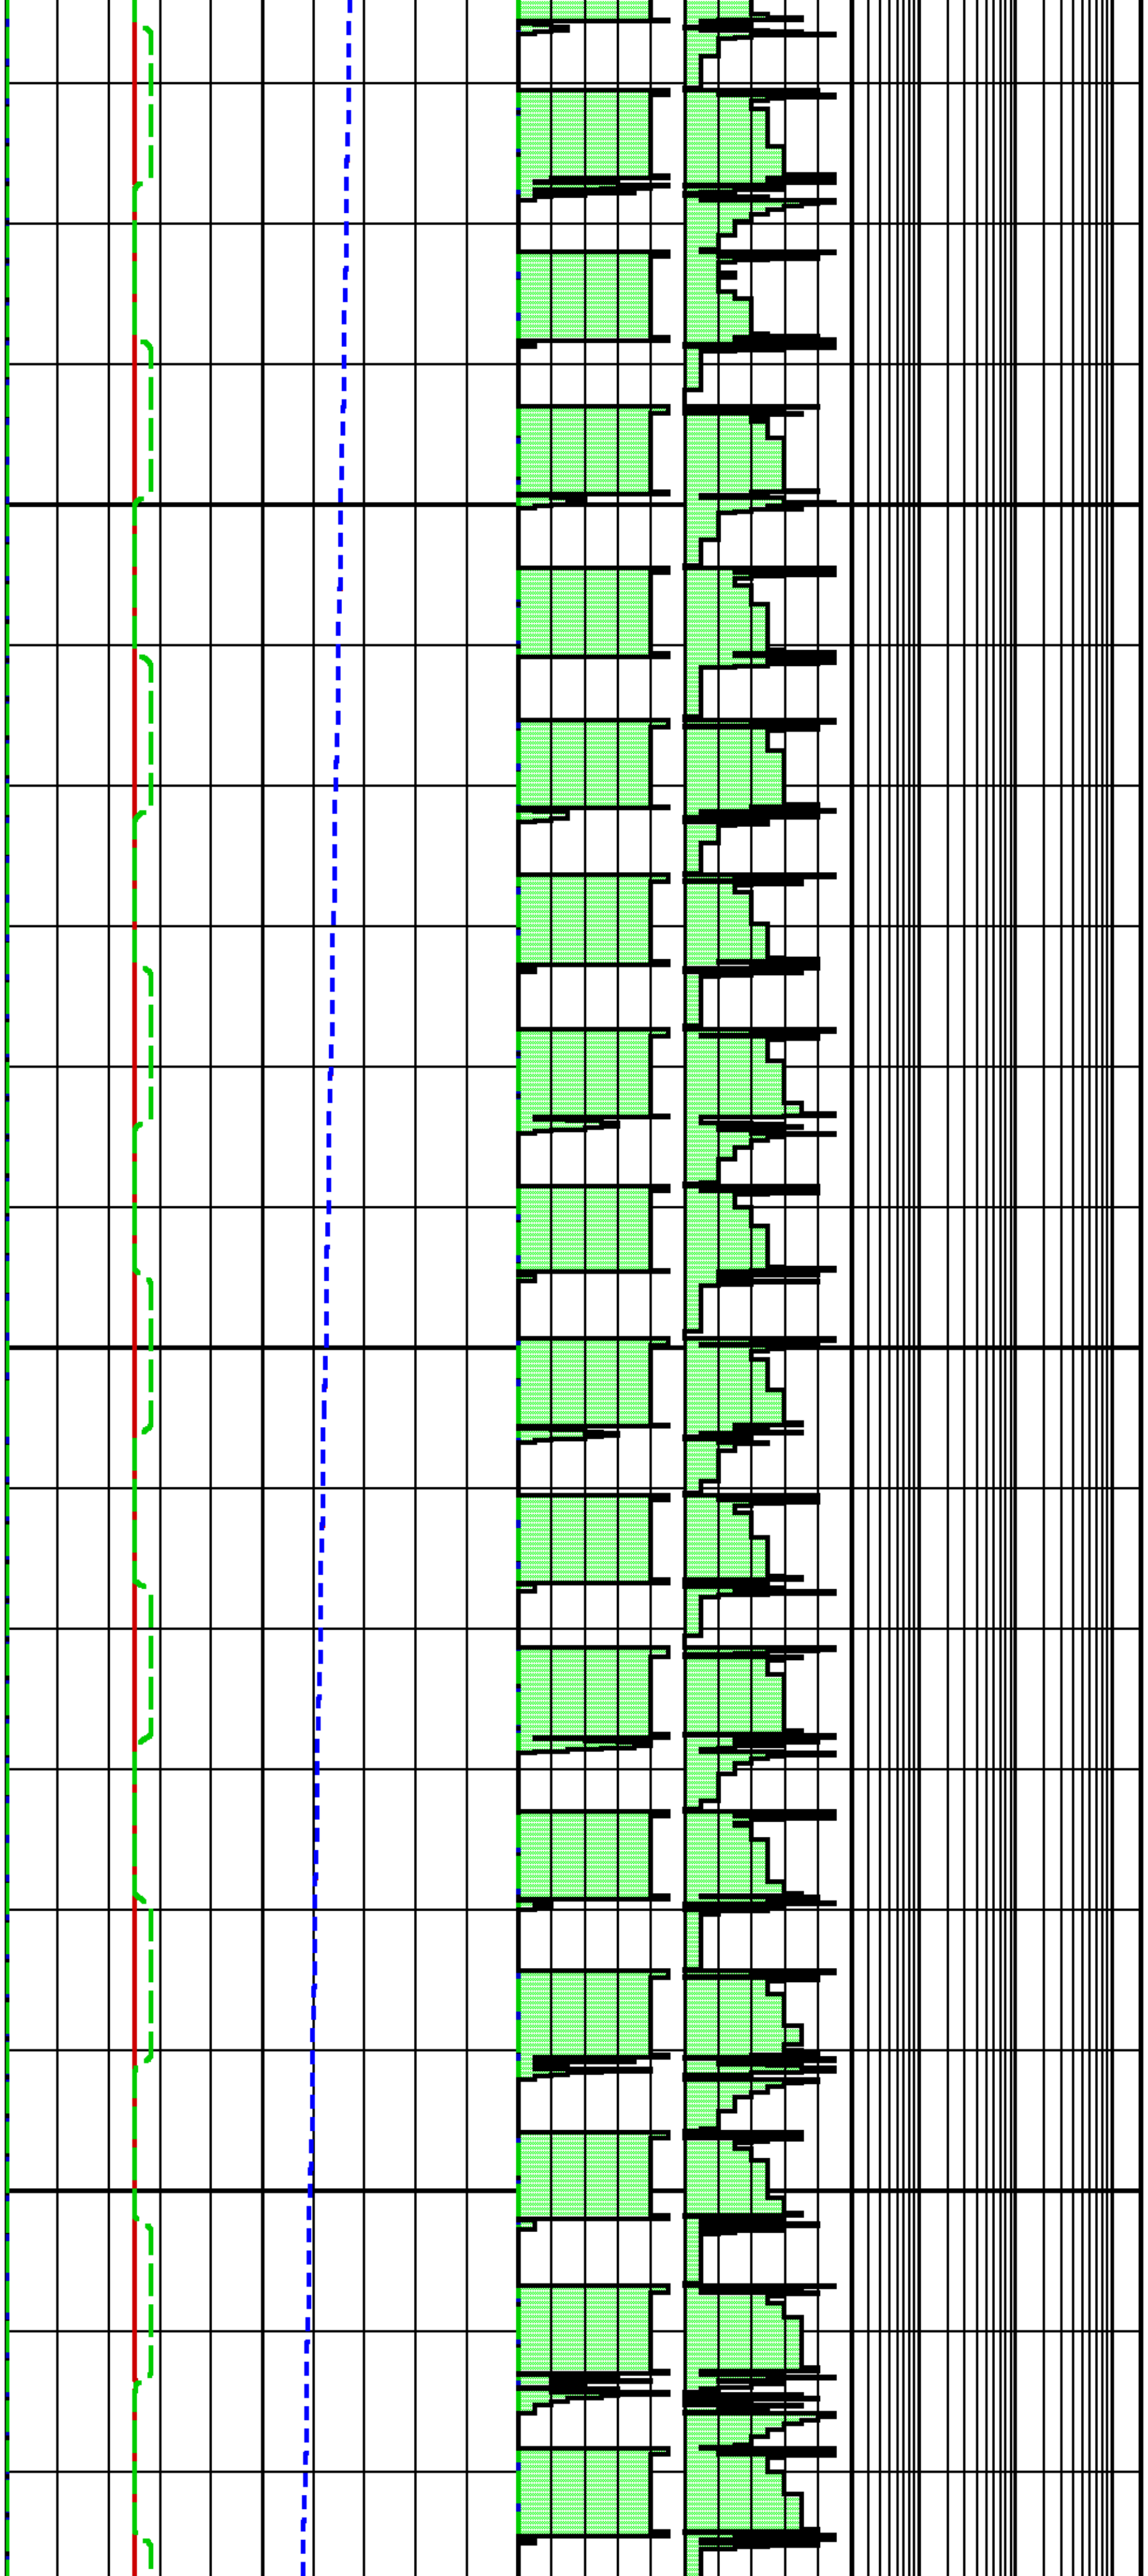

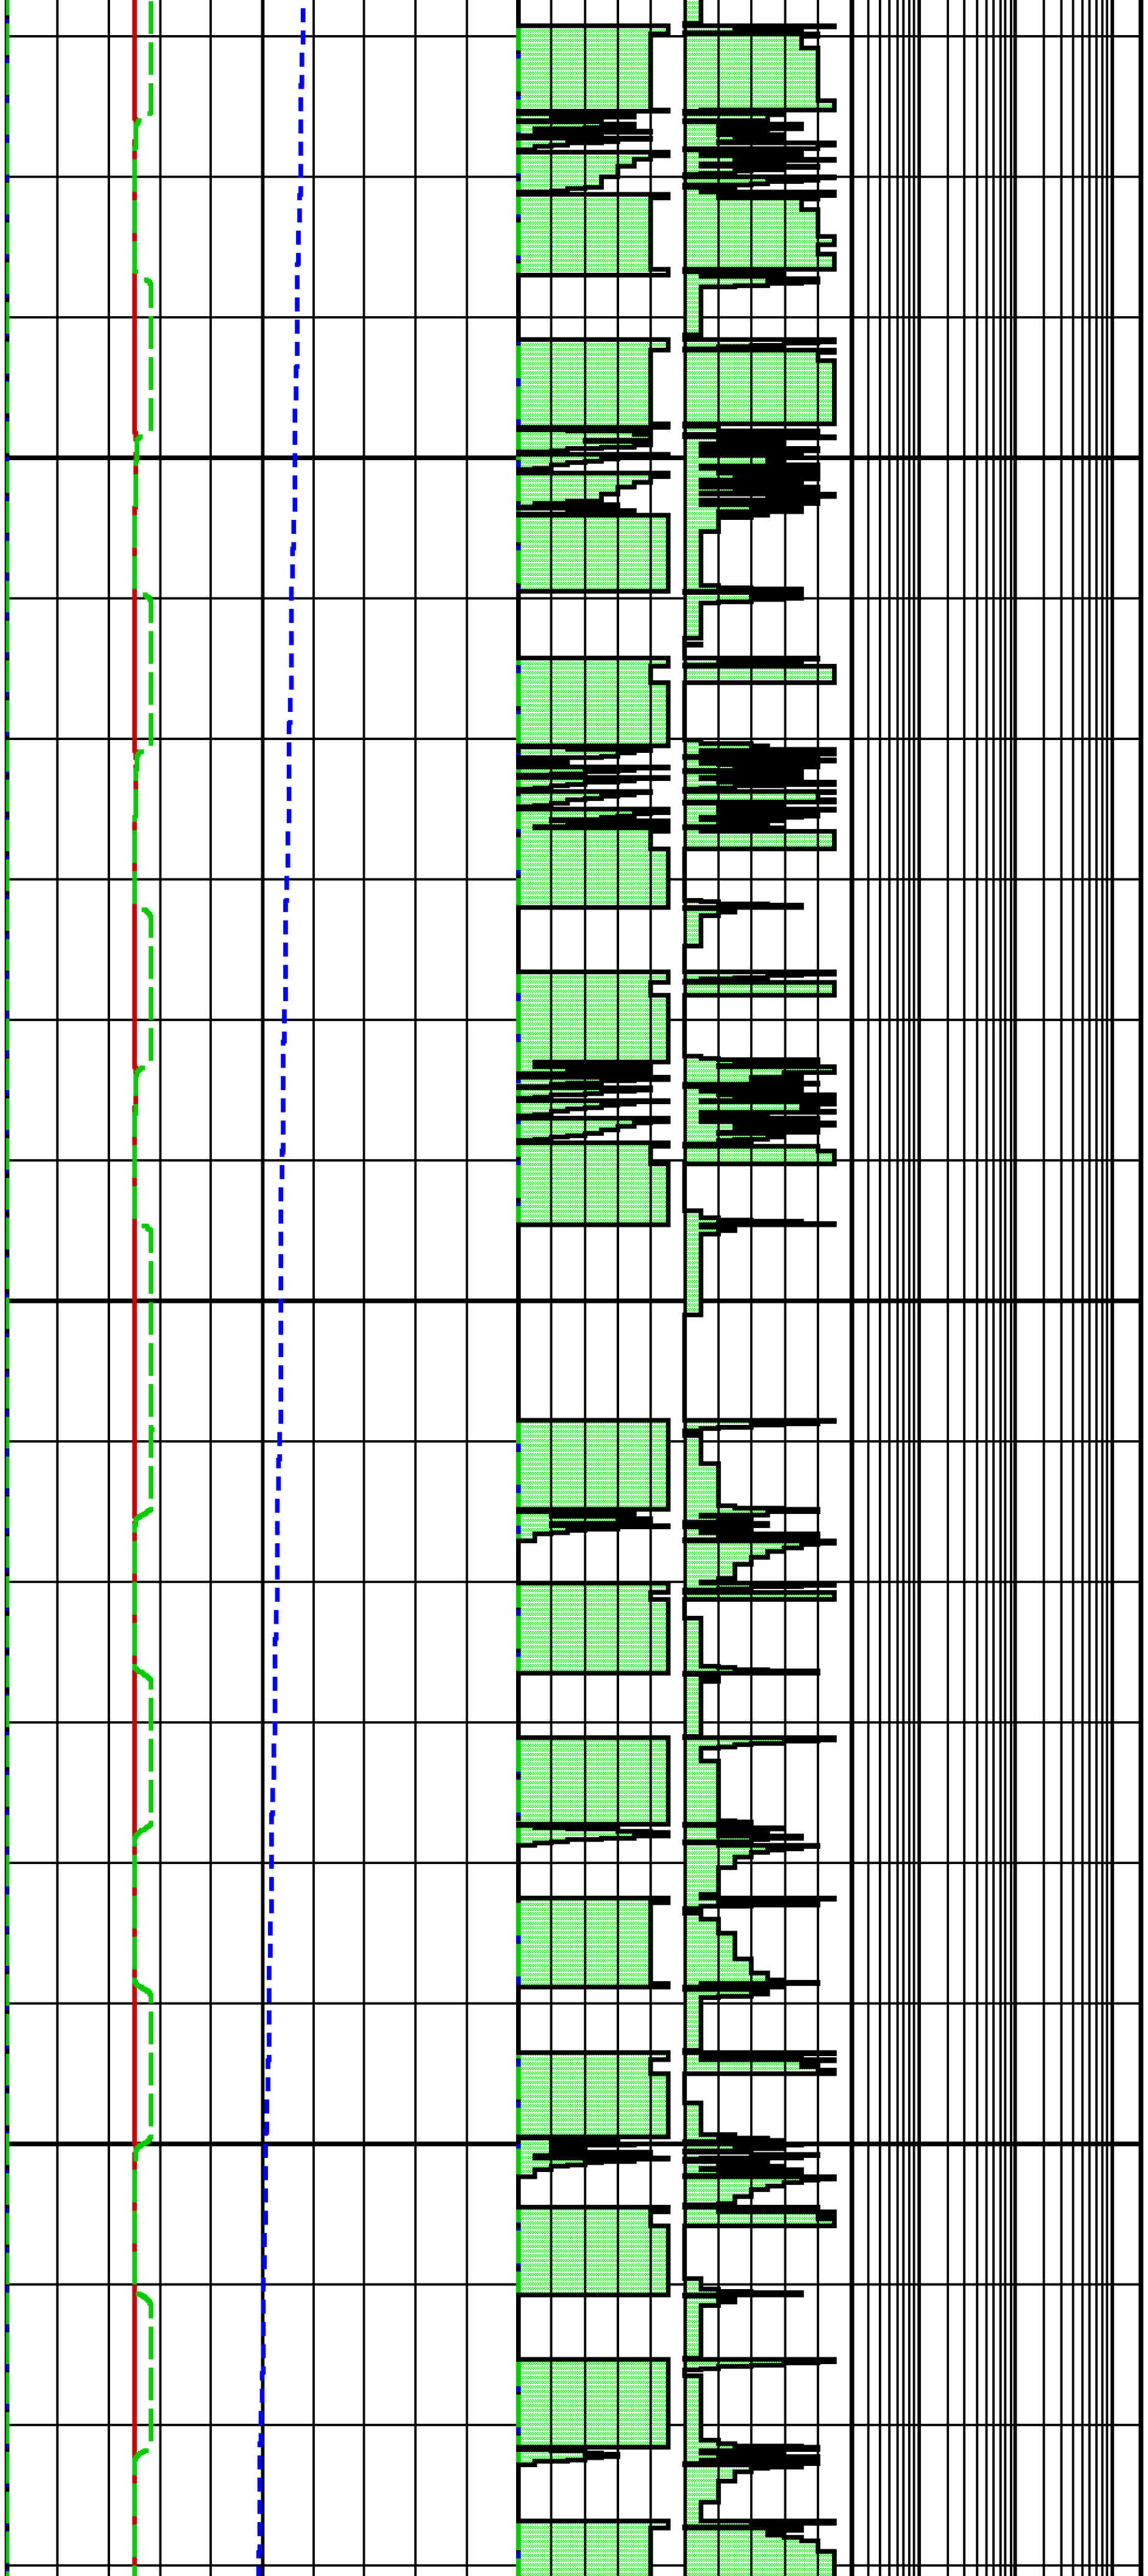

1110		3758.8	199.4
		3758.9	199.4
1120		3765.9	199.4
		3758.9	199.4
1130		3760.1	199.4
		3759.0	199.4
1140		3806.6	199.4
		3759.2	199.4
1150		3760.6	199.4
		3758.9	199.4
1160		3759.1	199.4
		3779.9	199.4
1170		3759.0	199.4
		3760.1	199.4
1180		3759.1	199.4
		3787.2	199.4
1190		3759.0	199.4
	BB[1] STOP OPERATION	3760.3	199.4
1200	MB[1] RECHARGE 2800	3760.1	199.4
	BB[1] RESUME OPERATION	3760.1	199.4
1210		3759.2	199.4
		3763.5	199.4
1220		3760.2	199.4
		3759.2	199.4
1230		3760.1	199.4
		3759.2	199.4
1240		3760.3	199.4
		3758.3	199.4
1250		3760.1	199.4
		3759.0	199.4
1260		3777.8	199.4
		3758.8	199.4
1270		3759.1	199.4
		3760.1	199.4
1280		3759.2	199.4
		3760.2	199.4
1290		3759.0	199.4

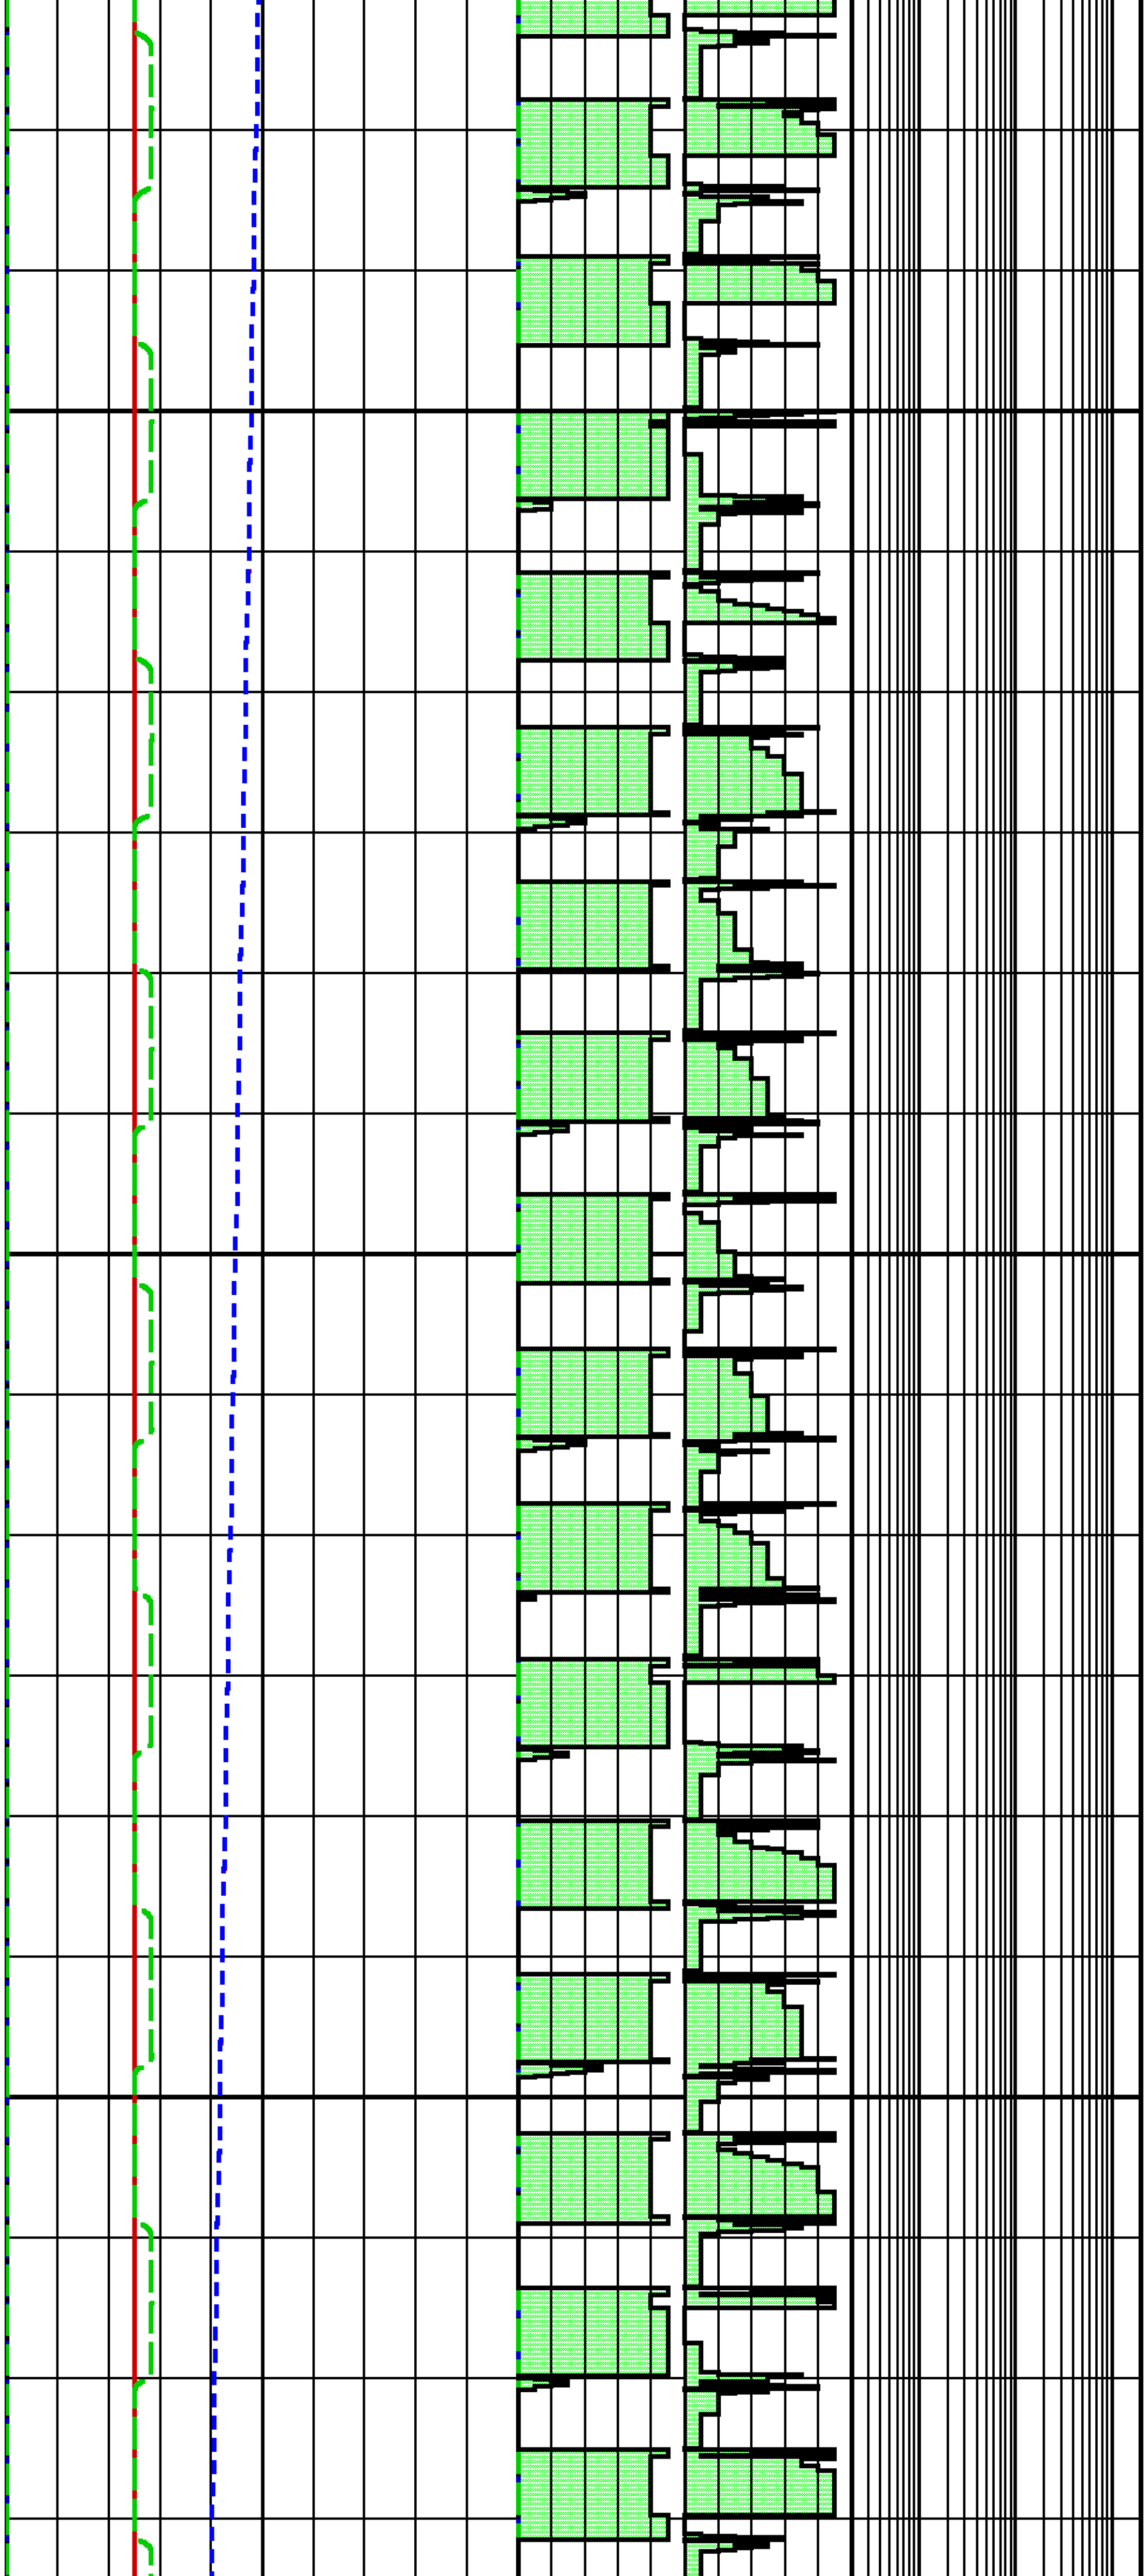

	3760.1	199.4
1300	3758.9	199.4
	3761.5	199.4
1310	3758.8	199.4
	3759.3	199.4
1320	3759.9	199.4
	3759.1	199.4
1330	3760.2	199.4
	3759.0	199.4
1340	3760.1	199.4
	3758.7	199.4
1350	3760.4	199.4
	3758.2	199.4
1360	3760.8	199.4
	3758.3	199.4
1370	3758.6	199.4
	3760.1	199.4
1380	3758.3	199.4
	3760.1	199.4
1390	3758.5	199.4
	3760.2	199.4
1400	3758.4	199.4
	3760.2	199.4
1410	3758.9	199.4
	3759.8	199.4
1420	3760.1	199.4
	3759.0	199.4
1430	3760.1	199.4
	3758.7	199.4
1440	3760.2	199.4
	3758.8	199.4
1450	3760.1	199.4
	3759.0	199.4
1460	3761.6	199.4
	3760.1	199.4
1470	3759.0	199.4

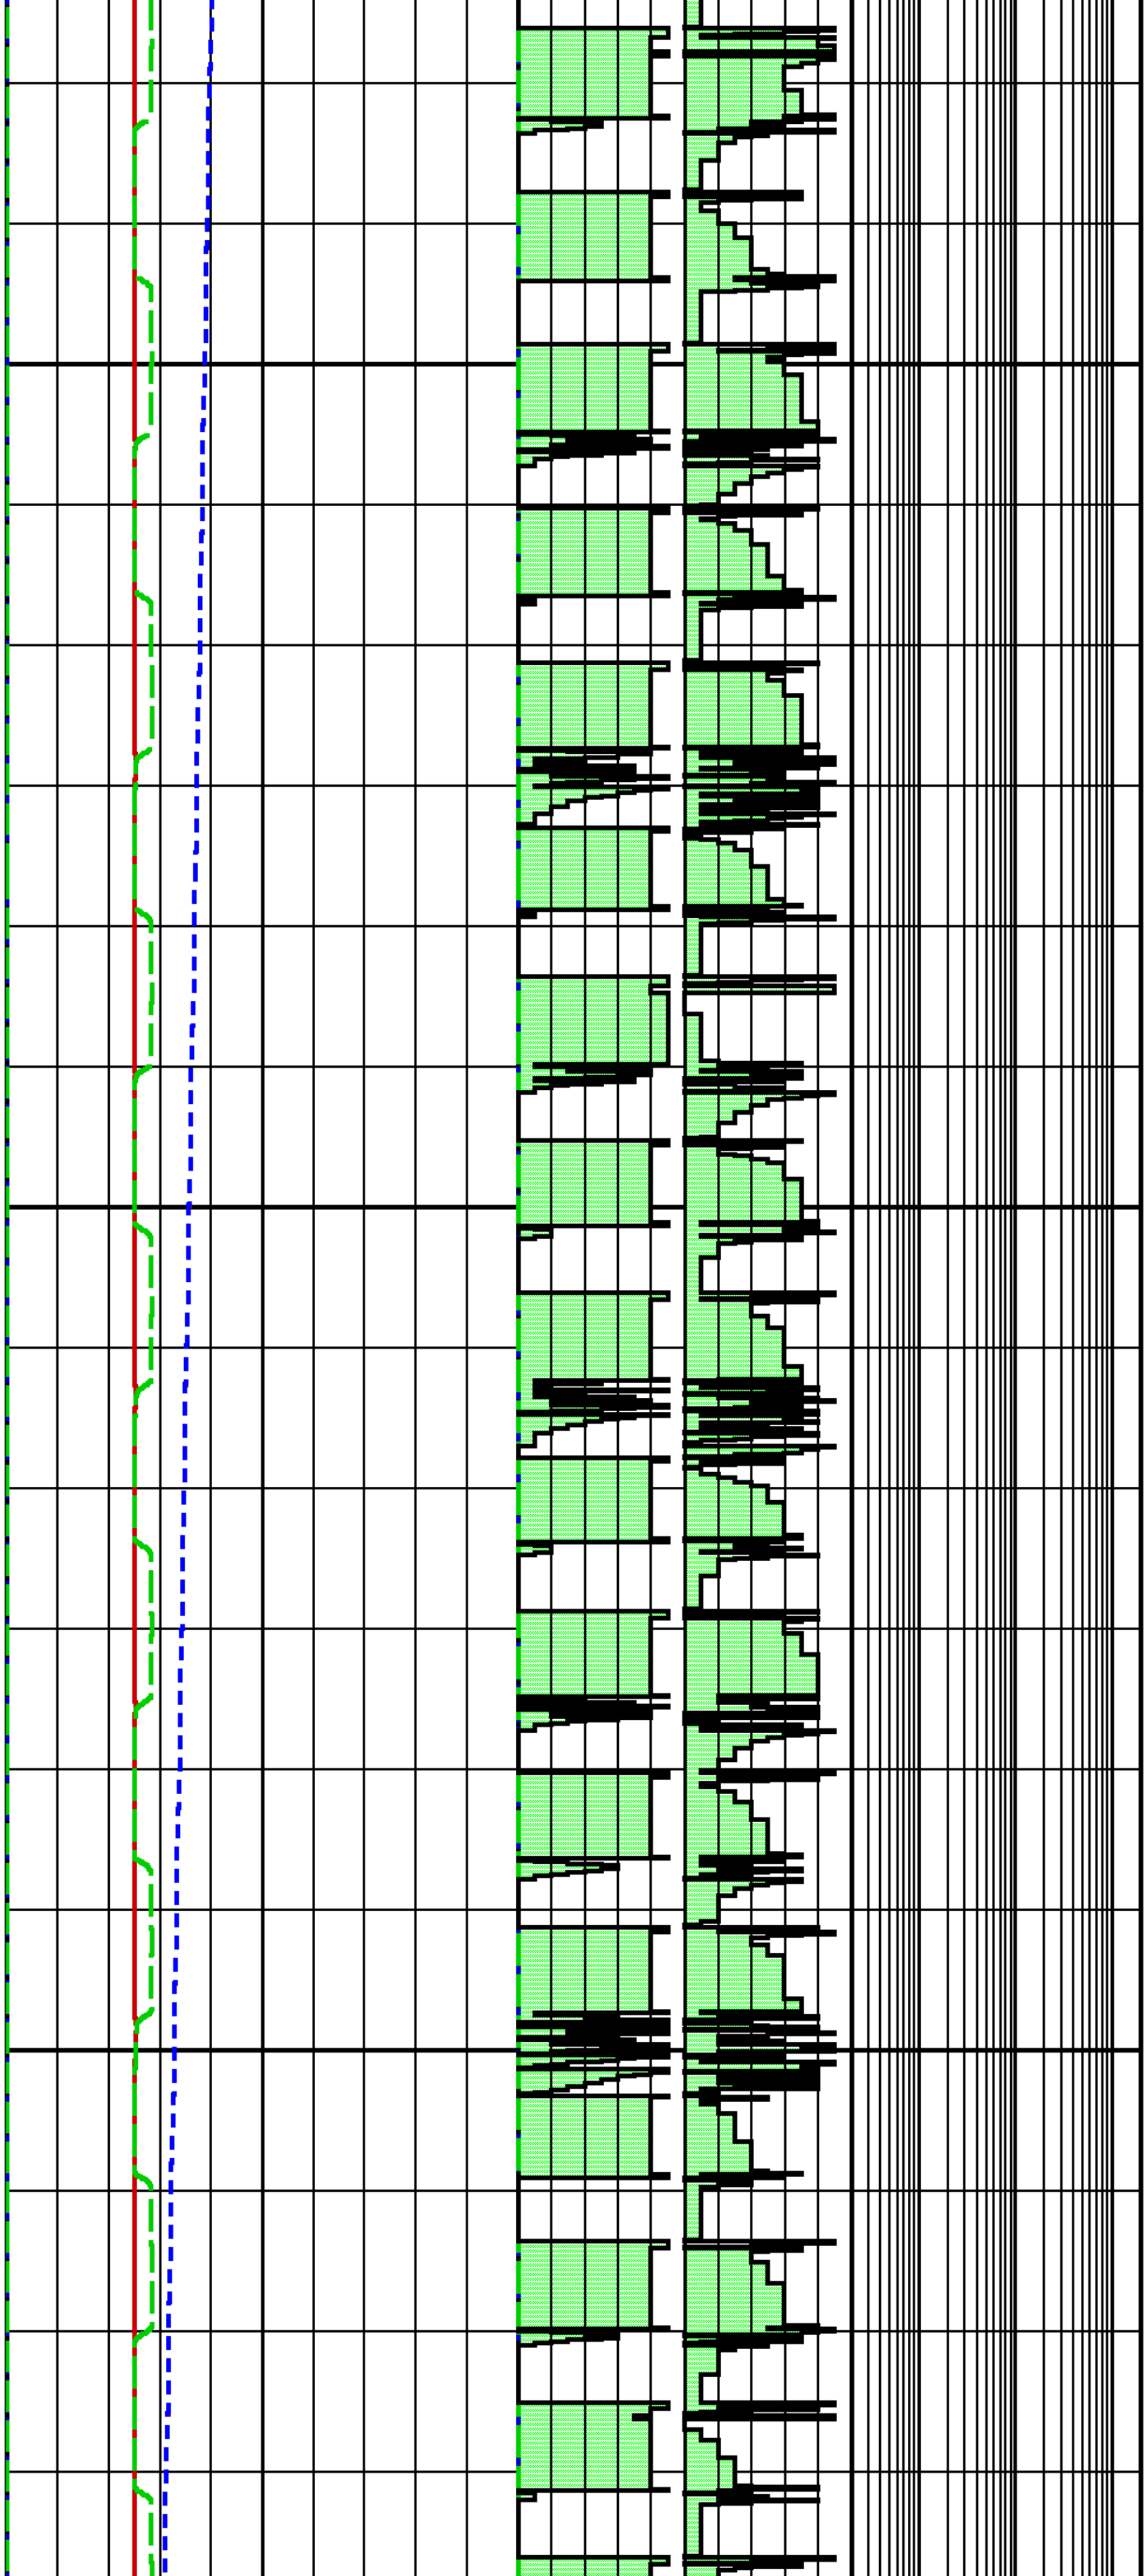

	3760.1	199.4
1480	3758.7	199.4
	3760.2	199.4
1490	3758.3	199.4
	3760.2	199.4
1500	3758.6	199.4
	3762.9	199.4
1510	3760.2	199.4
	3758.6	199.4
1520	3760.1	199.4
	3758.7	199.4
1530	3771.1	199.4
	3758.4	199.4
1540	3760.2	199.4
	3759.0	199.5
1550	3764.3	199.5
	3760.2	199.5
1560	3758.7	199.5
	3760.2	199.5
1570	3758.7	199.5
	3766.6	199.5
1580	3758.5	199.5
	3760.3	199.5
1590	3758.7	199.5
	3764.5	199.5
1600	3760.2	199.5
	3758.5	199.5
1610	3760.2	199.5
	3758.6	199.5
1620	3783.9	199.5
	3758.3	199.5
1630	3760.1	199.5
	3758.5	199.5
1640	3762.9	199.5
	3760.1	199.5
1650	3758.3	199.5
	3760.1	199.5

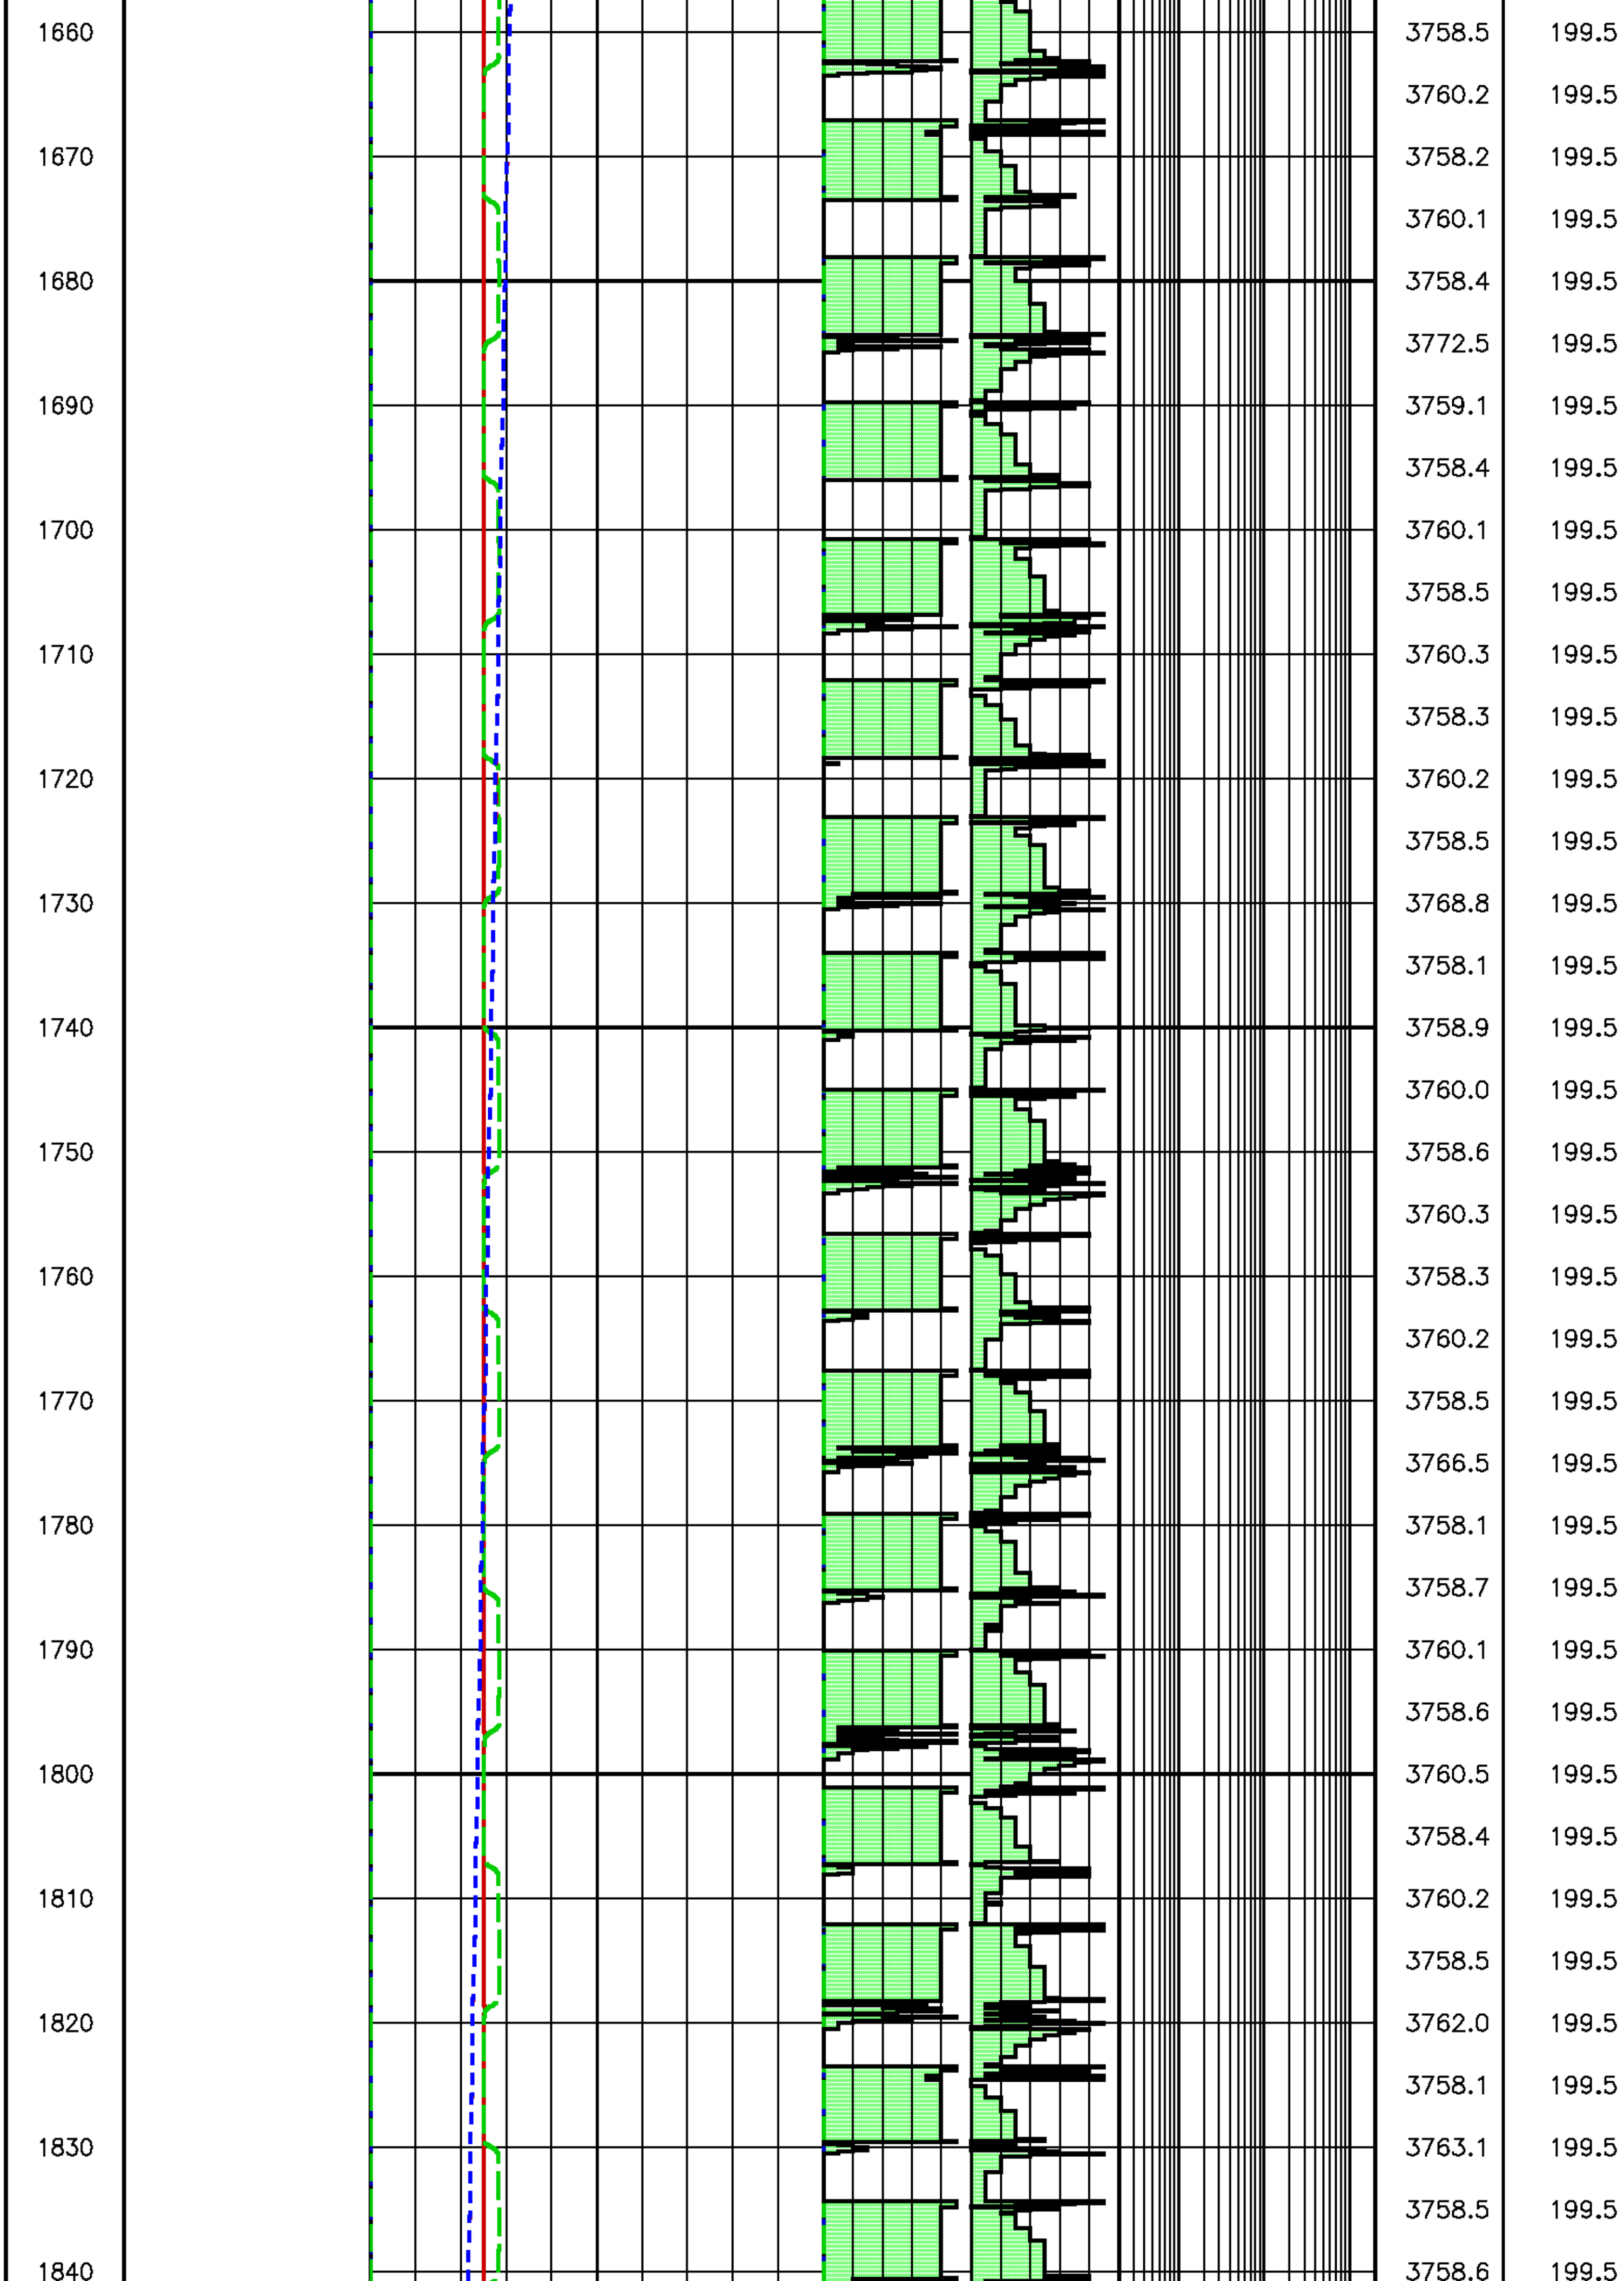
1660 3758.5 199.5
3760.2 199.5
1670 3758.2 199.5
3760.1 199.5
1680 3758.4 199.5
3772.5 199.5
1690 3759.1 199.5
3758.4 199.5
1700 3760.1 199.5
3758.5 199.5
1710 3760.3 199.5
3758.3 199.5
1720 3760.2 199.5
3758.5 199.5
1730 3768.8 199.5
3758.1 199.5
1740 3758.9 199.5
3760.0 199.5
1750 3758.6 199.5
3760.3 199.5
1760 3758.3 199.5
3760.2 199.5
1770 3758.5 199.5
3766.5 199.5
1780 3758.1 199.5
3758.7 199.5
1790 3760.1 199.5
3758.6 199.5
1800 3760.5 199.5
3758.4 199.5
1810 3760.2 199.5
3758.5 199.5
1820 3762.0 199.5
3758.1 199.5
1830 3763.1 199.5
3758.5 199.5
1840 3758.6 199.5

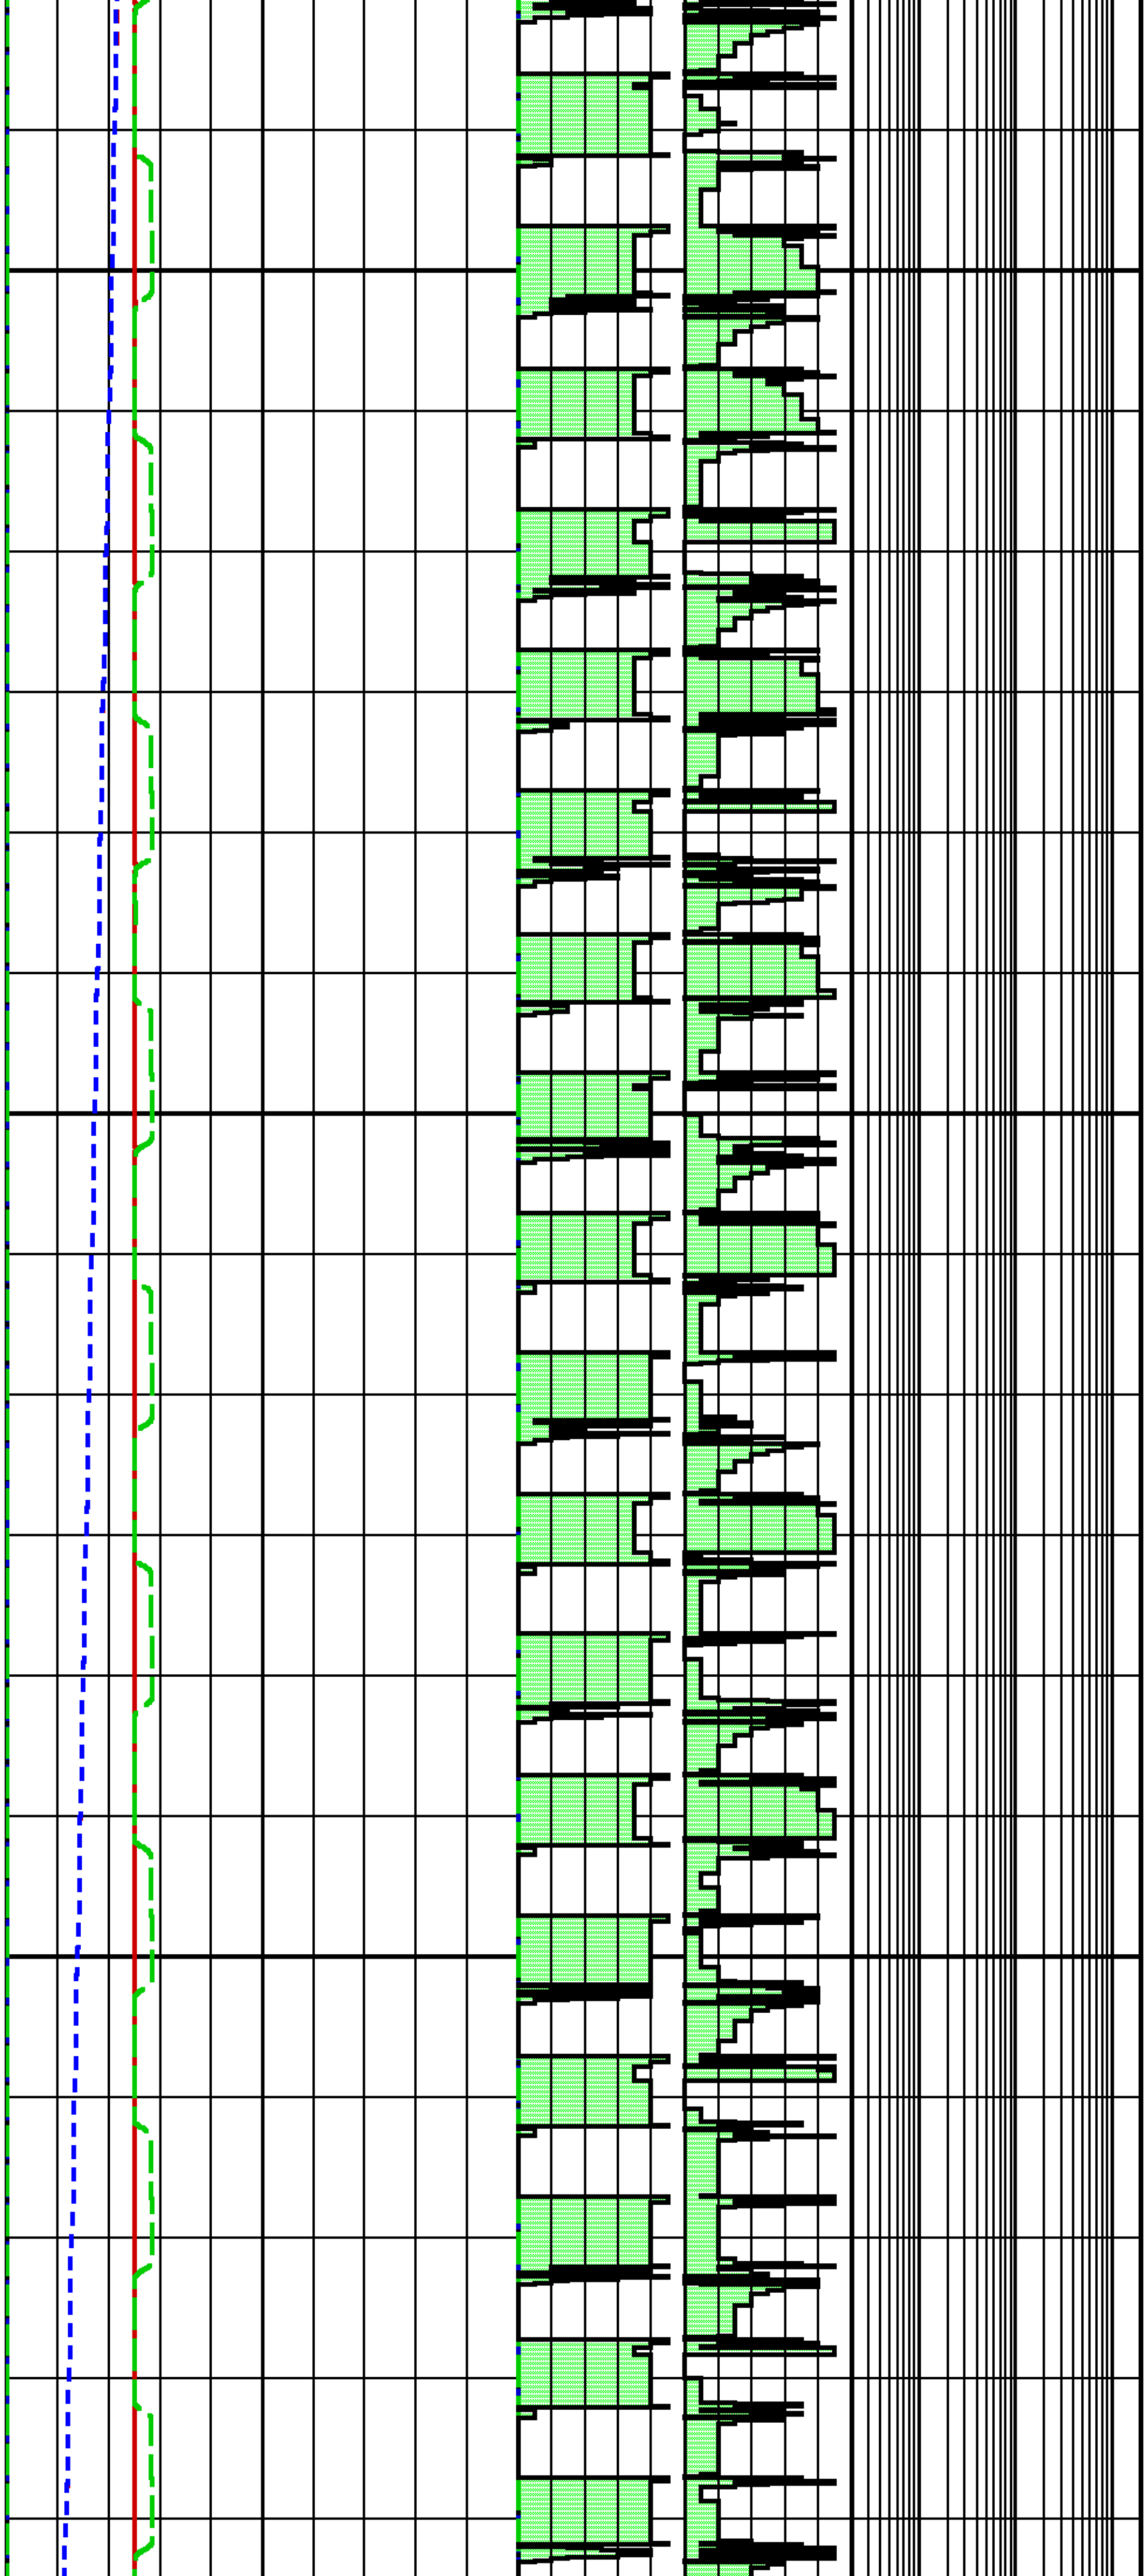

	3760.3	199.5
1850	3758.2	199.5
	3760.2	199.5
1860	3757.8	199.5
	3760.3	199.5
1870	3757.8	199.5
	3760.2	199.5
1880	3758.0	199.5
	3760.4	199.5
1890	3757.9	199.5
	3760.2	199.5
1900	3758.0	199.5
	3760.4	199.5
1910	3757.9	199.5
	3760.2	199.5
1920	3758.1	199.5
	3760.3	199.5
1930	3757.9	199.5
	3760.2	199.5
1940	3758.1	199.5
	3760.4	199.5
1950	3758.0	199.5
	3760.2	199.5
1960	3758.1	199.5
	3760.3	199.5
1970	3757.9	199.5
	3760.2	199.5
1980	3758.2	199.5
	3760.4	199.5
1990	3758.1	199.5
	3760.3	199.5
2000	3758.3	199.5
	3760.4	199.5
2010	3758.1	199.5
	3760.3	199.5
2020	3758.2	199.5

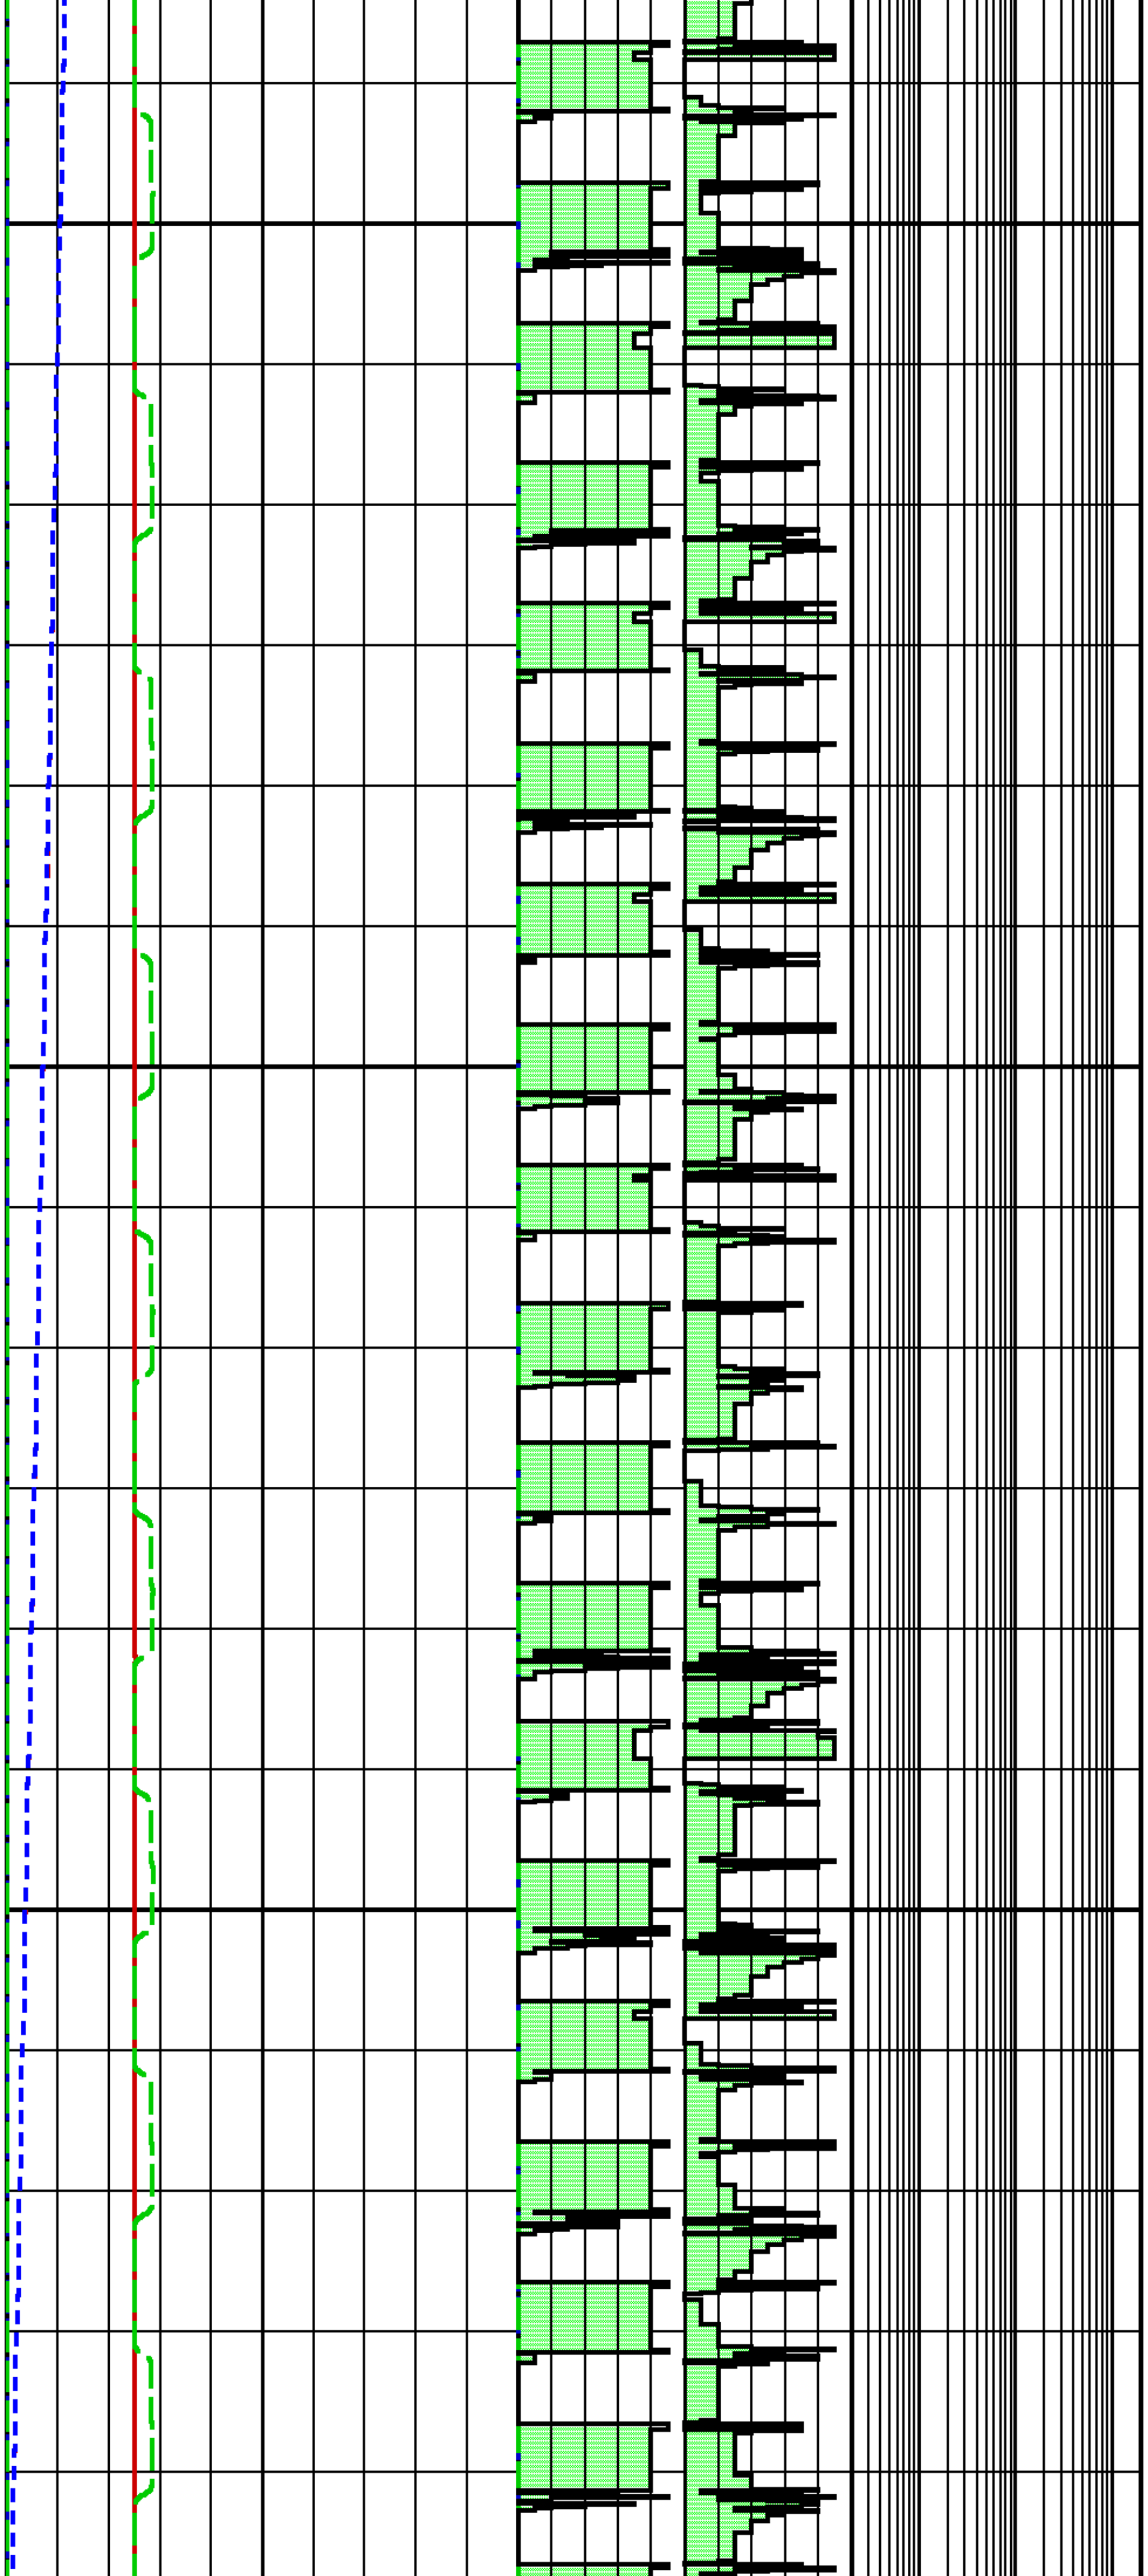

	3760.4	199.5
2030	3758.1	199.5
	3760.3	199.5
2040	3758.2	199.5
	3760.4	199.5
2050	3758.1	199.5
	3760.3	199.5
2060	3758.2	199.5
	3760.4	199.5
2070	3758.1	199.5
	3760.3	199.5
2080	3758.3	199.5
	3760.5	199.5
2090	3758.1	199.5
	3760.3	199.5
2100	3758.3	199.5
	3760.3	199.5
2110	3758.1	199.5
	3760.3	199.5
2120	3758.3	199.5
	3760.4	199.5
2130	3758.1	199.5
	3760.3	199.5
2140	3758.2	199.5
	3760.5	199.5
2150	3758.0	199.5
	3760.3	199.5
2160	3758.3	199.5
	3760.5	199.5
2170	3758.1	199.5
	3760.3	199.5
2180	3758.3	199.5
	3760.4	199.5
2190	3758.2	199.5
	3760.3	199.5
2200	3758.4	199.5
	3760.4	199.5

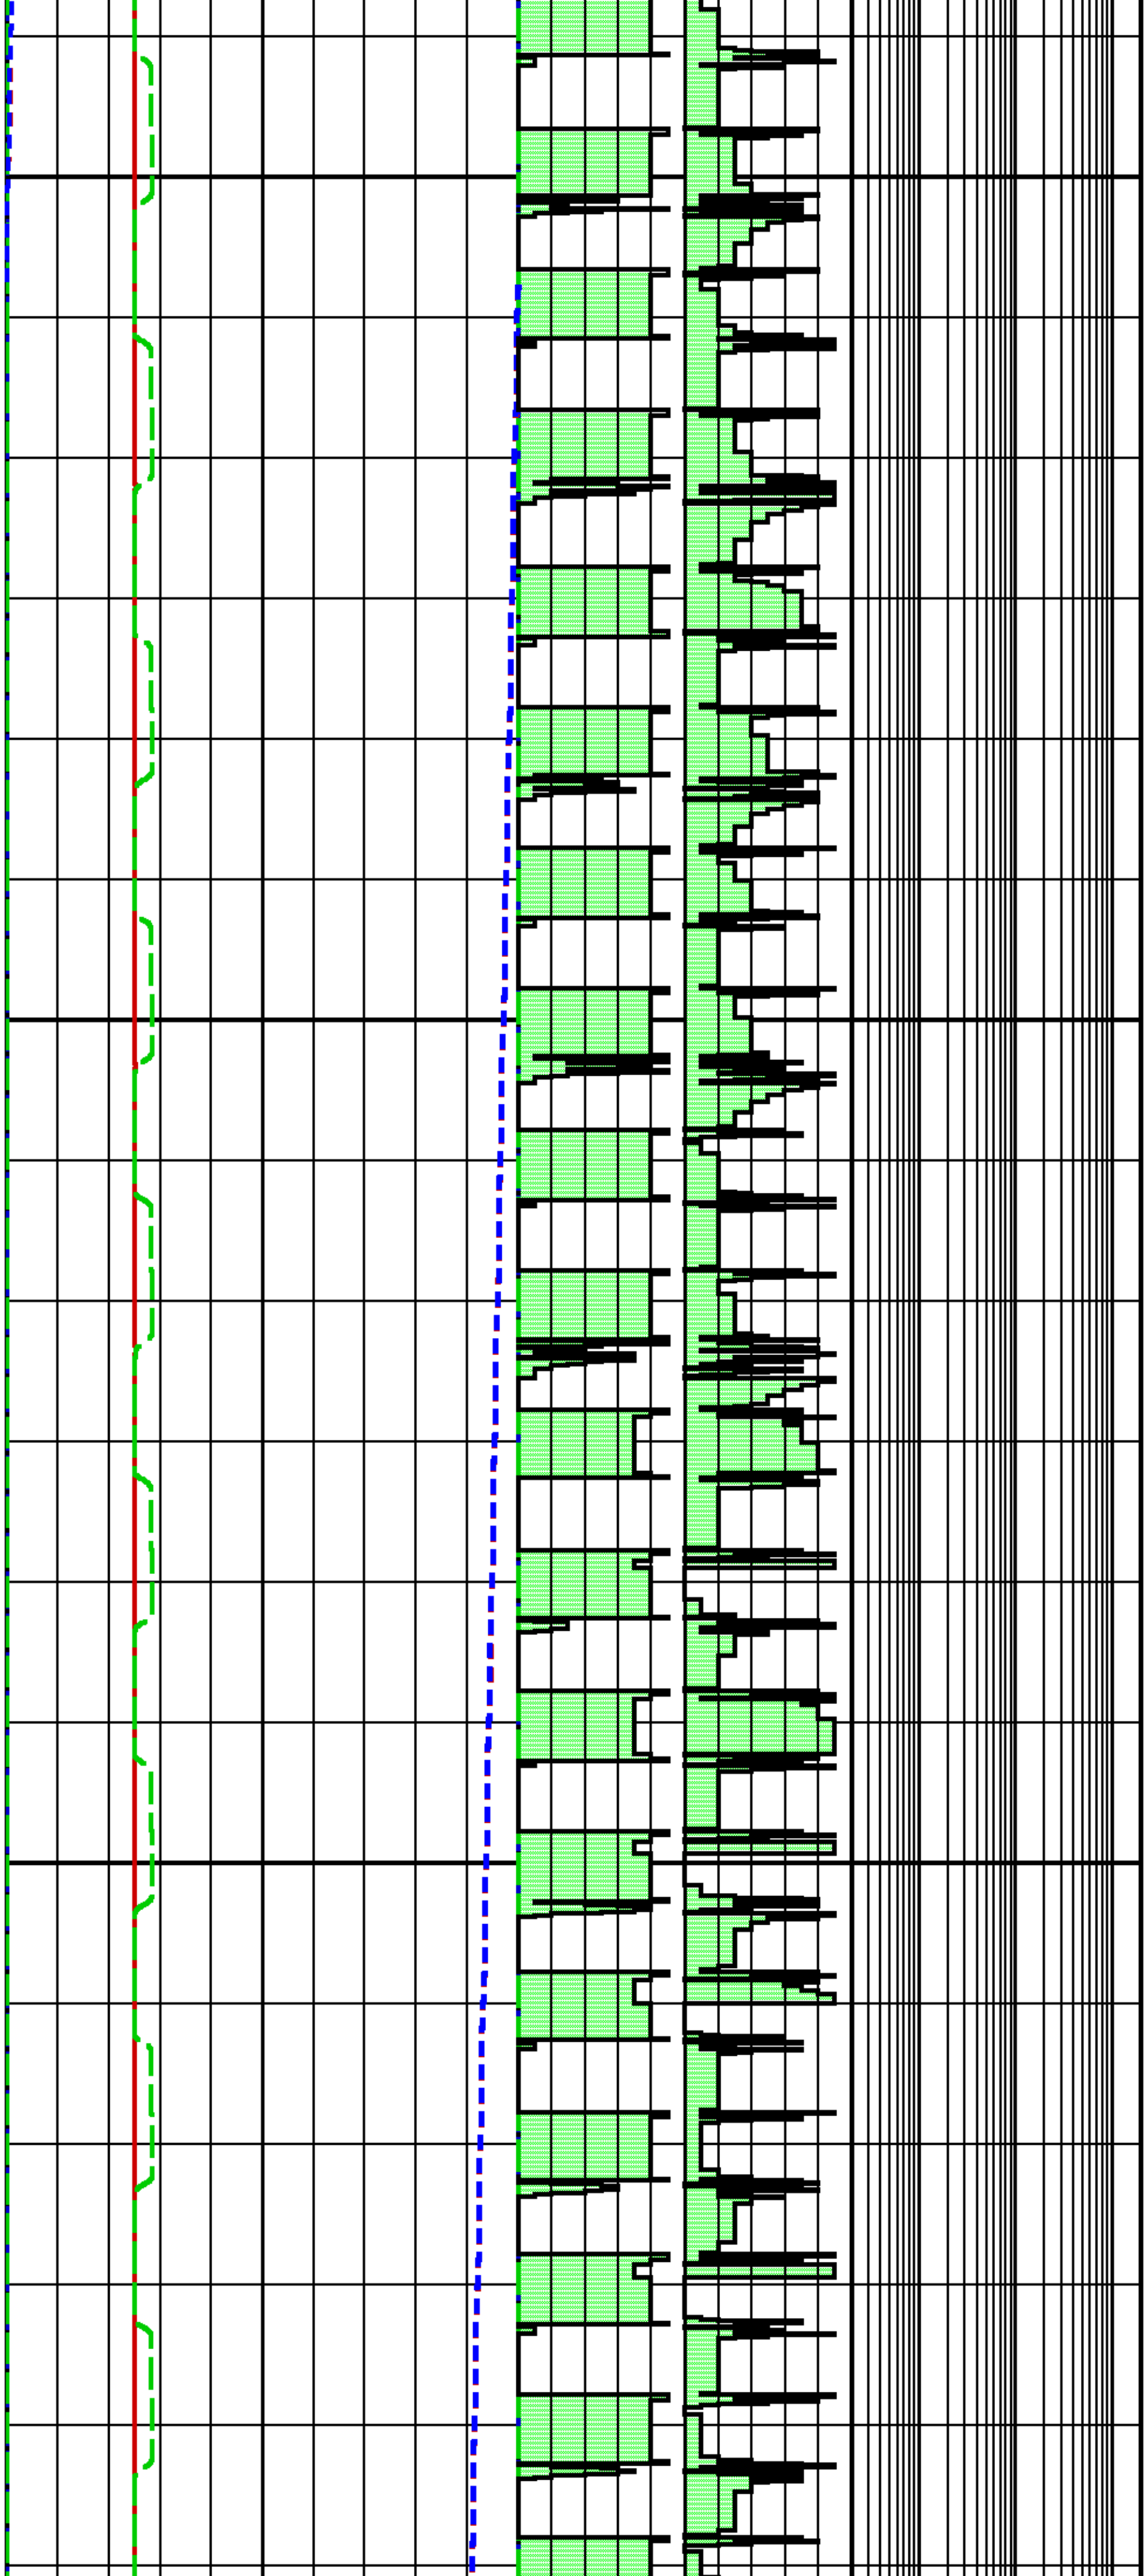

2210	3758.3	199.5
	3760.3	199.5
2220	3758.4	199.5
	3760.4	199.5
2230	3758.3	199.5
	3760.3	199.5
2240	3758.4	199.5
	3760.5	199.5
2250	3758.7	199.5
	3760.3	199.5
2260	3758.5	199.5
	3760.6	199.5
2270	3758.4	199.5
	3760.3	199.5
2280	3758.4	199.5
	3760.7	199.5
2290	3758.2	199.5
	3760.3	199.5
2300	3758.3	199.5
	3761.5	199.5
2310	3757.8	199.5
	3760.3	199.5
2320	3758.1	199.5
	3760.3	199.5
2330	3757.9	199.5
	3760.3	199.5
2340	3758.0	199.5
	3760.4	199.5
2350	3758.0	199.5
	3760.3	199.5
2360	3758.2	199.6
	3760.3	199.6
2370	3758.0	199.6
	3760.3	199.6
2380	3758.1	199.6
	3760.4	199.6
2390	3758.2	199.6

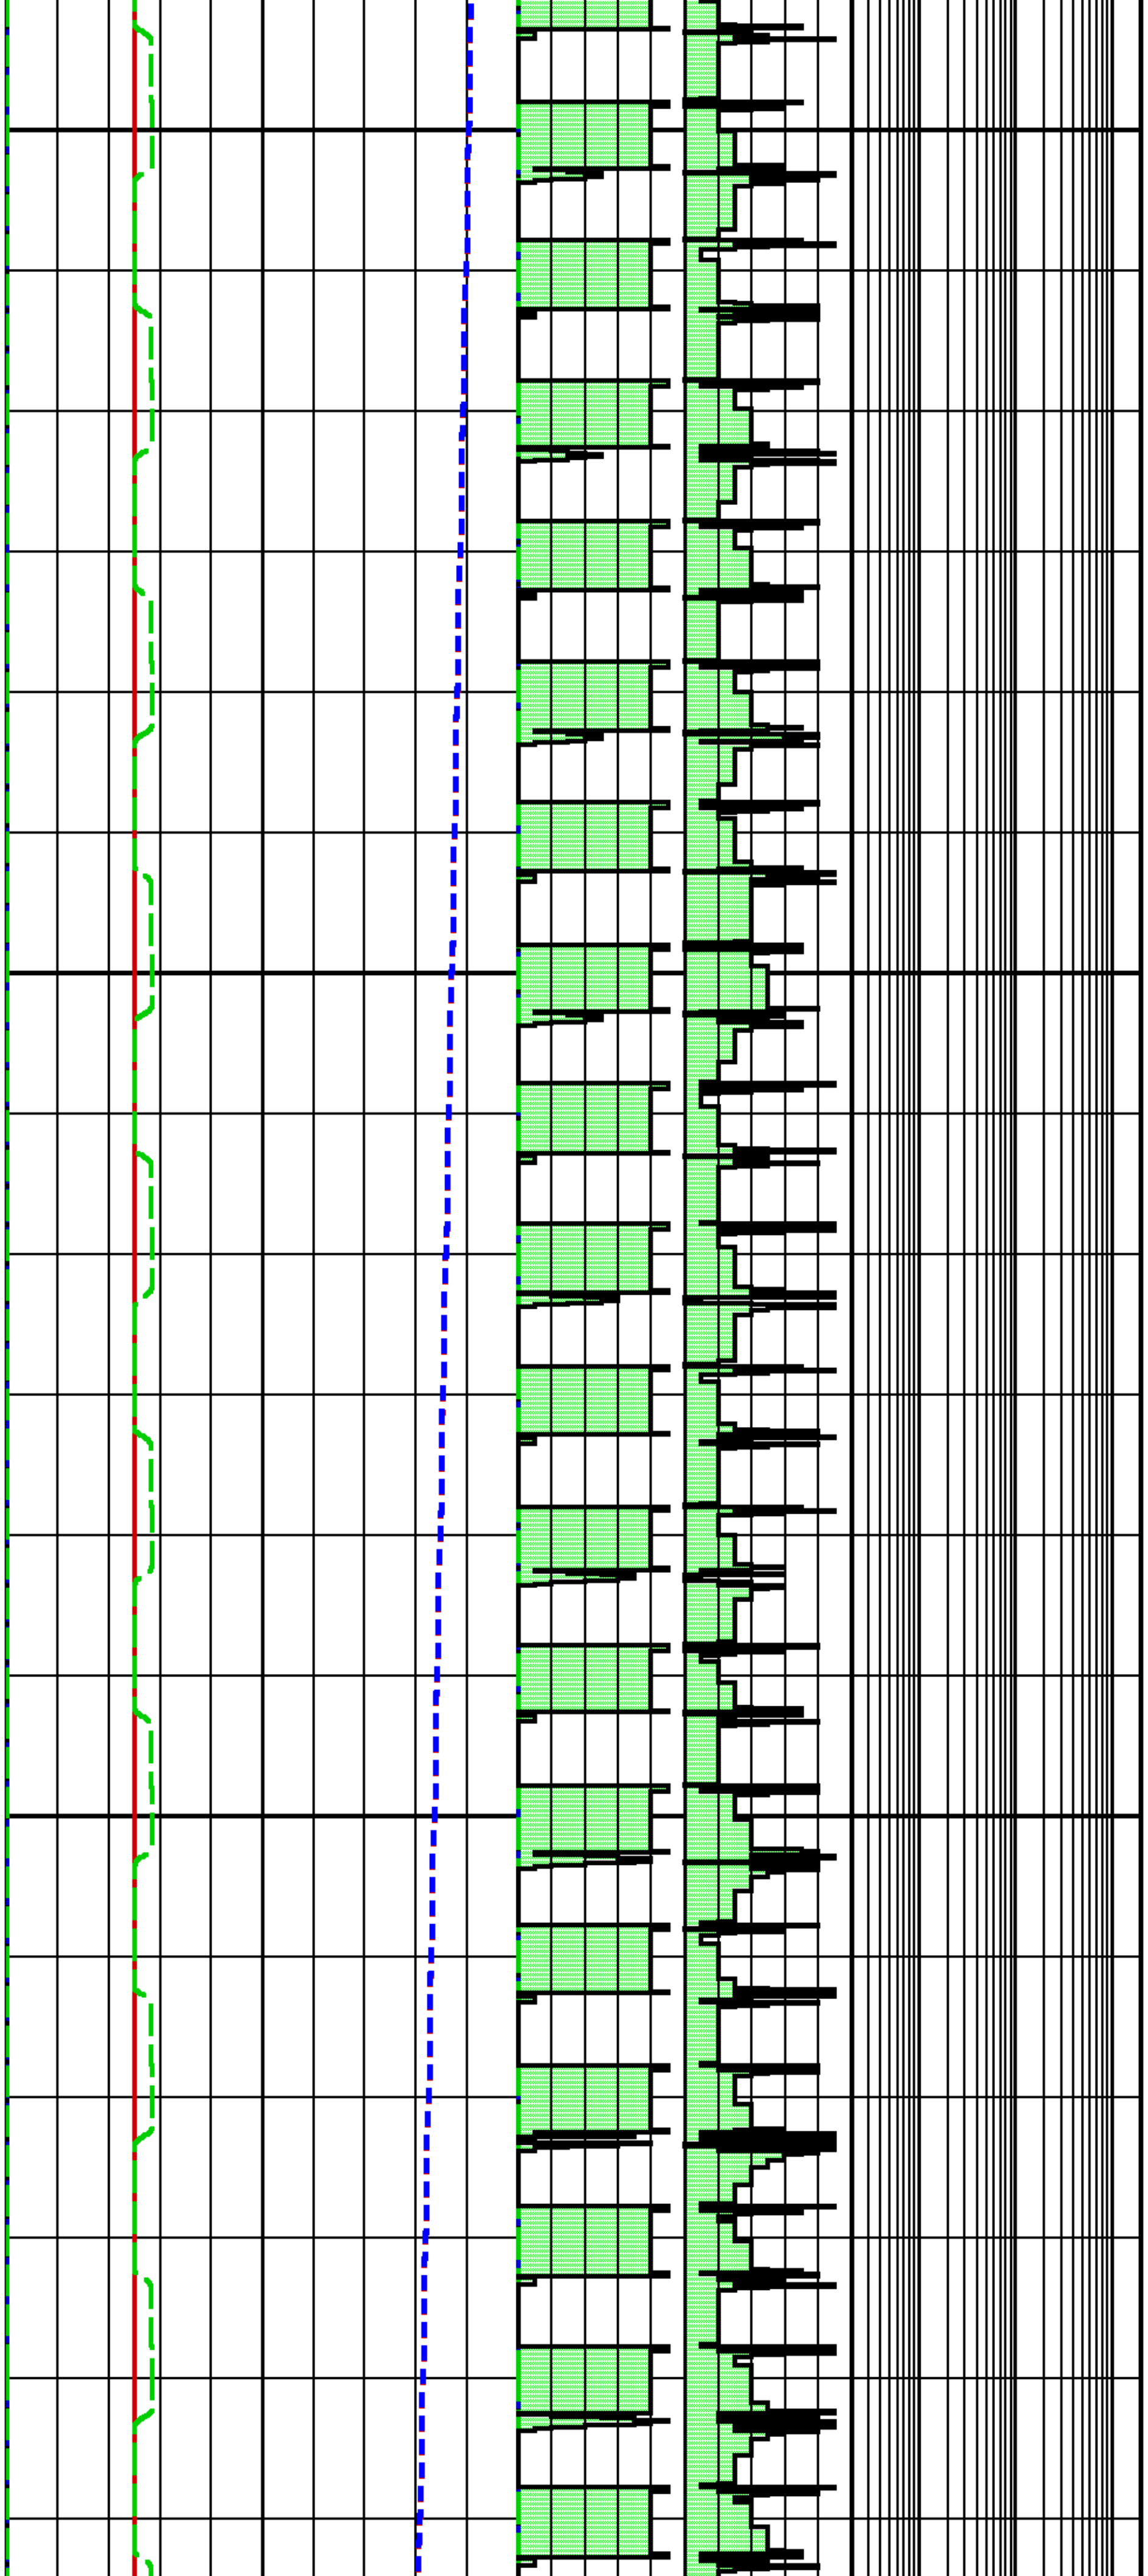

	3760.3	199.6
2400	3758.3	199.6
	3760.3	199.6
2410	3758.2	199.6
	3760.3	199.6
2420	3758.4	199.6
	3760.3	199.6
2430	3758.4	199.6
	3760.3	199.6
2440	3758.4	199.6
	3760.3	199.6
2450	3758.4	199.6
	3760.4	199.6
2460	3758.5	199.6
	3760.3	199.6
2470	3758.2	199.6
	3760.3	199.6
2480	3758.3	199.6
	3760.4	199.6
2490	3758.3	199.6
	3760.3	199.6
2500	3758.3	199.6
	3760.4	199.6
2510	3758.3	199.6
	3760.3	199.6
2520	3758.4	199.6
	3760.4	199.6
2530	3758.3	199.6
	3760.3	199.6
2540	3758.4	199.6
	3760.5	199.6
2550	3758.4	199.6
	3760.3	199.6
2560	3758.4	199.6
	3760.4	199.6
2570	3758.5	199.6

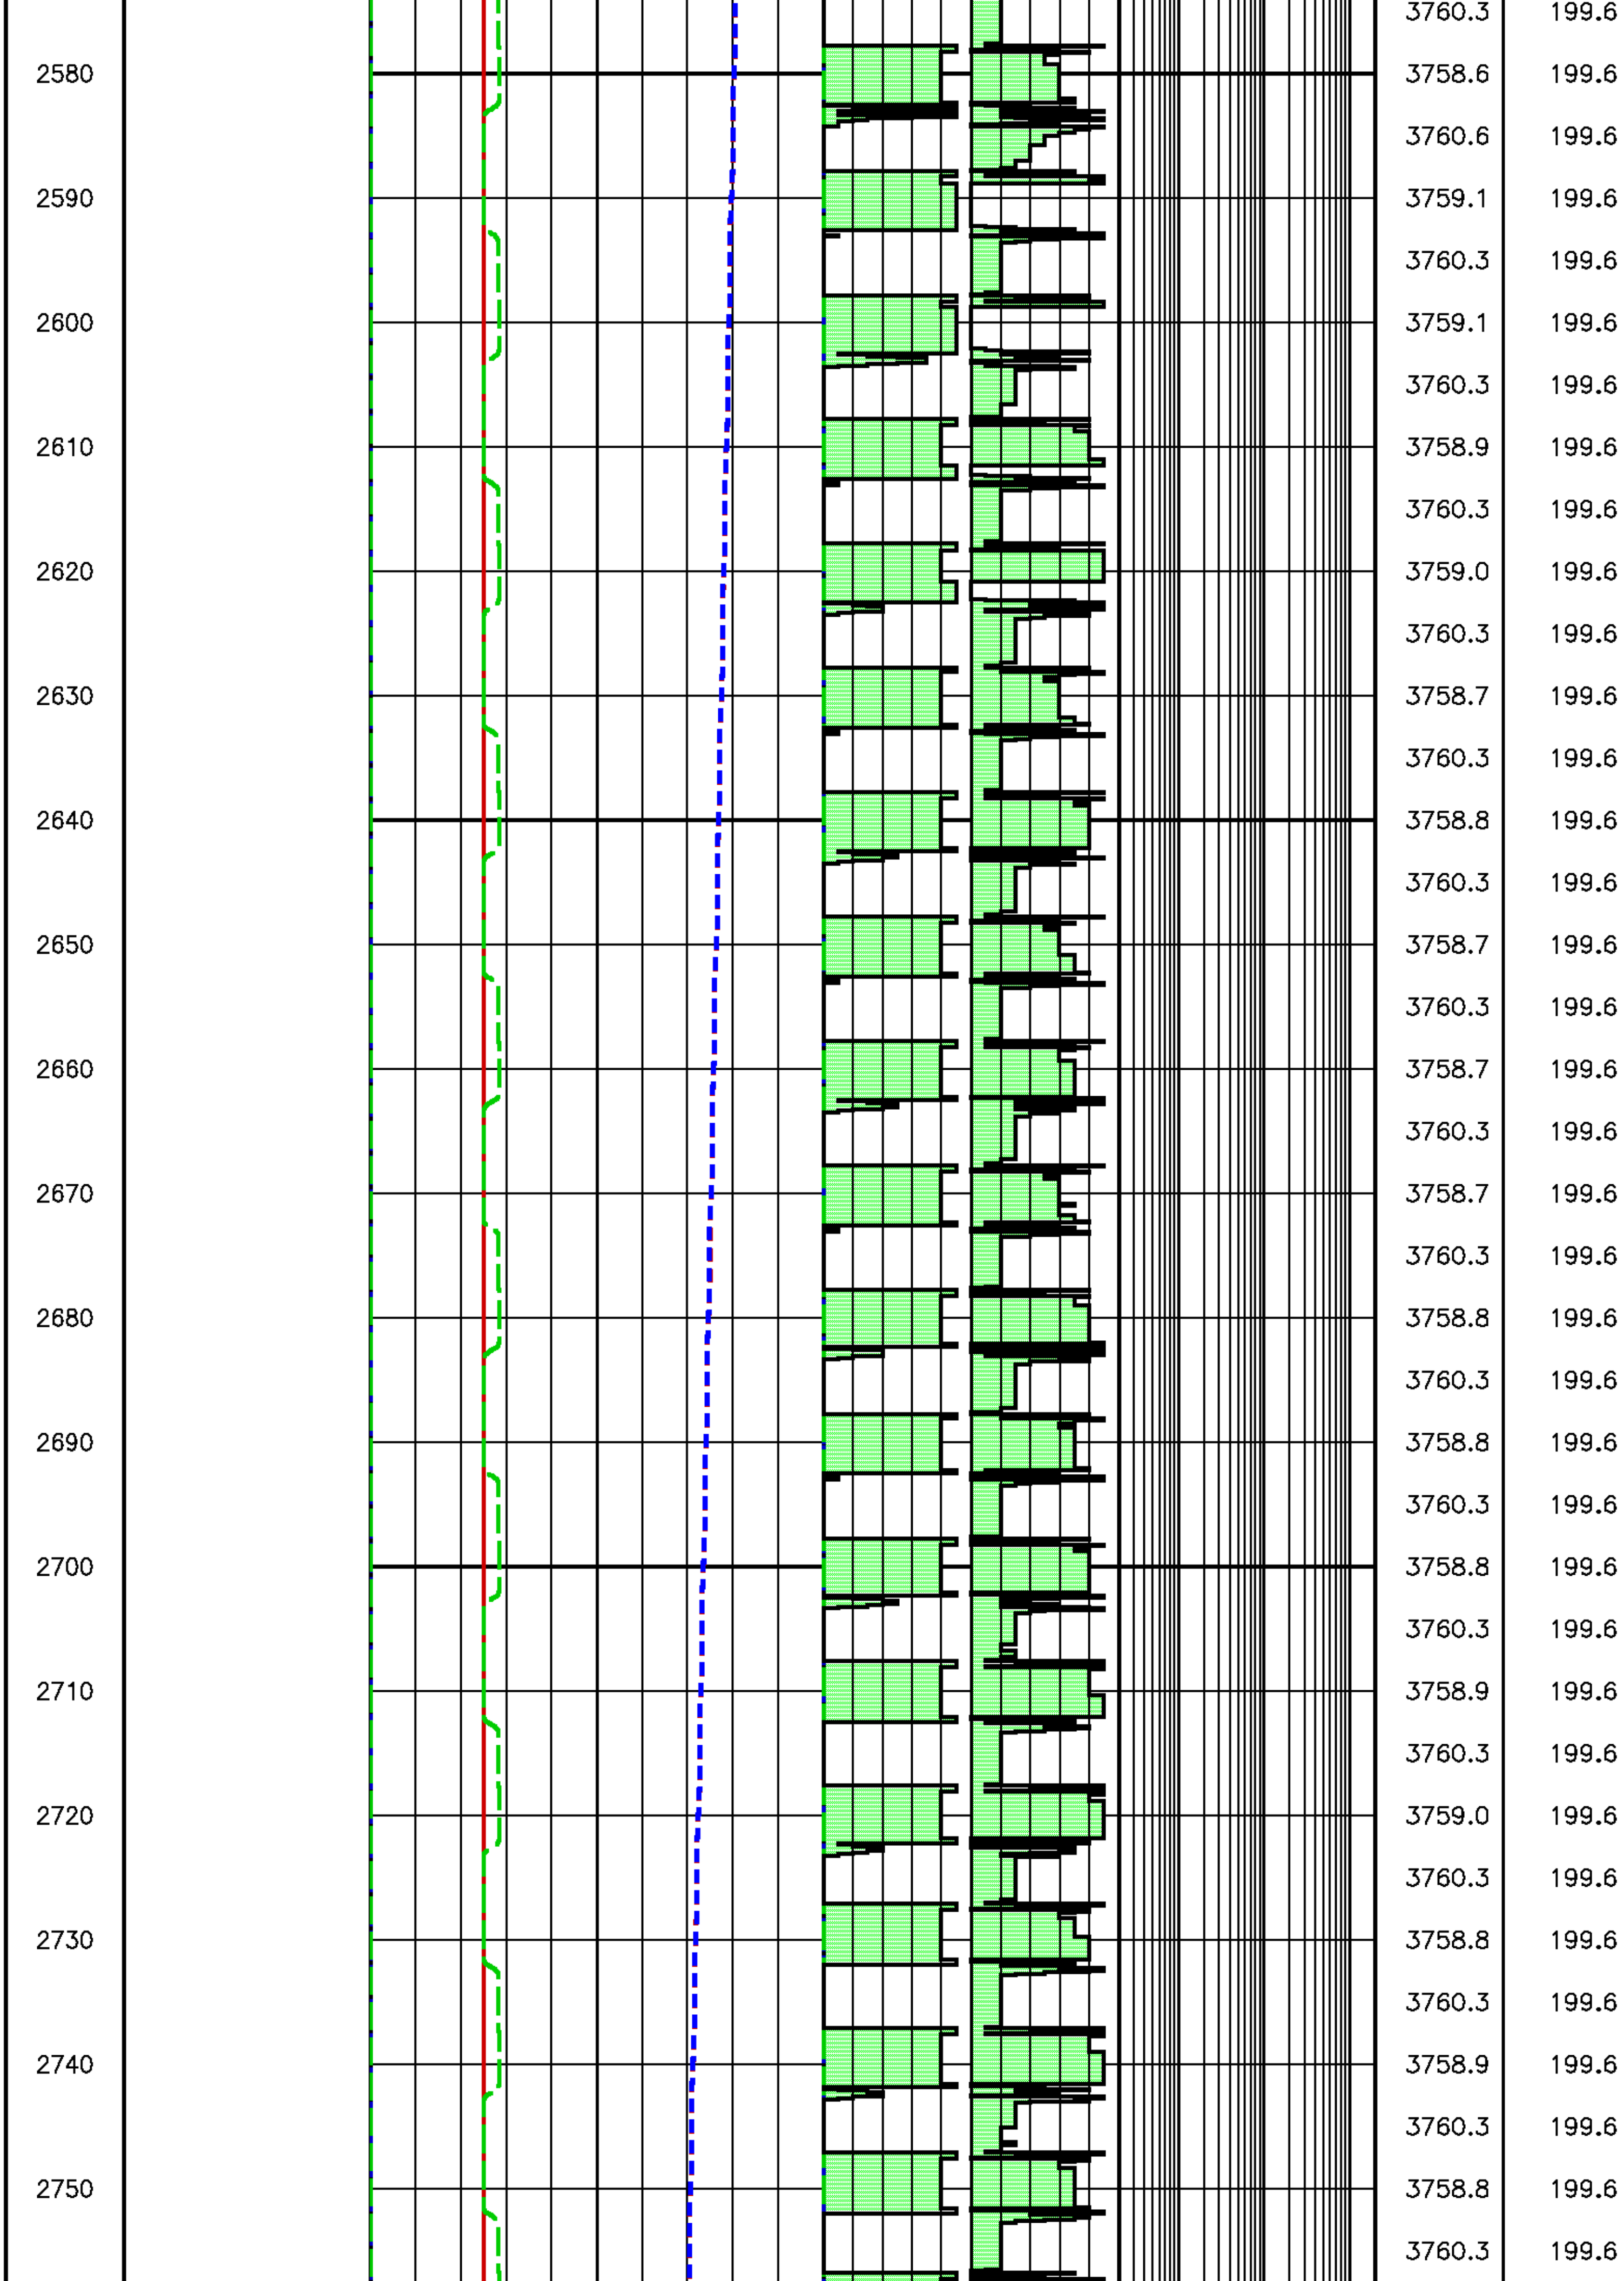
3760.3 199.6
2580 3758.6 199.6
3760.6 199.6
2590 3759.1 199.6
3760.3 199.6
2600 3759.1 199.6
3760.3 199.6
2610 3758.9 199.6
3760.3 199.6
2620 3759.0 199.6
3760.3 199.6
2630 3758.7 199.6
3760.3 199.6
2640 3758.8 199.6
3760.3 199.6
2650 3758.7 199.6
3760.3 199.6
2660 3758.7 199.6
3760.3 199.6
2670 3758.7 199.6
3760.3 199.6
2680 3758.8 199.6
3760.3 199.6
2690 3758.8 199.6
3760.3 199.6
2700 3758.8 199.6
3760.3 199.6
2710 3758.9 199.6
3760.3 199.6
2720 3759.0 199.6
3760.3 199.6
2730 3758.8 199.6
3760.3 199.6
2740 3758.9 199.6
3760.3 199.6
2750 3758.8 199.6
3760.3 199.6

2760	3758.9	199.6
	3760.4	199.6
2770	3758.8	199.6
	3760.3	199.6
2780	3759.0	199.6
	3760.3	199.6
2790	3758.8	199.6
	3760.3	199.6
2800	3758.9	199.6
	3760.3	199.6
2810	3758.7	199.6
	3760.3	199.6
2820	3758.7	199.6
	3760.3	199.6
2830	3759.0	199.6
	3760.3	199.6
2840	3759.2	199.6
	3760.3	199.6
2850	3759.1	199.6
	3760.2	199.6
2860	3762.9	199.6
	3760.1	199.6
2870	3760.2	199.6
	3760.2	199.6
2880	3761.0	199.6
	3760.2	199.6
2890	3760.0	199.6
	3760.2	199.6
2900	3761.7	199.6
	3760.2	199.6
2910	3760.4	199.6
	3759.8	199.6
2920	3764.2	199.6
	3759.7	199.6
2930	3760.9	199.6
	3758.4	199.6
2940	3766.1	199.6

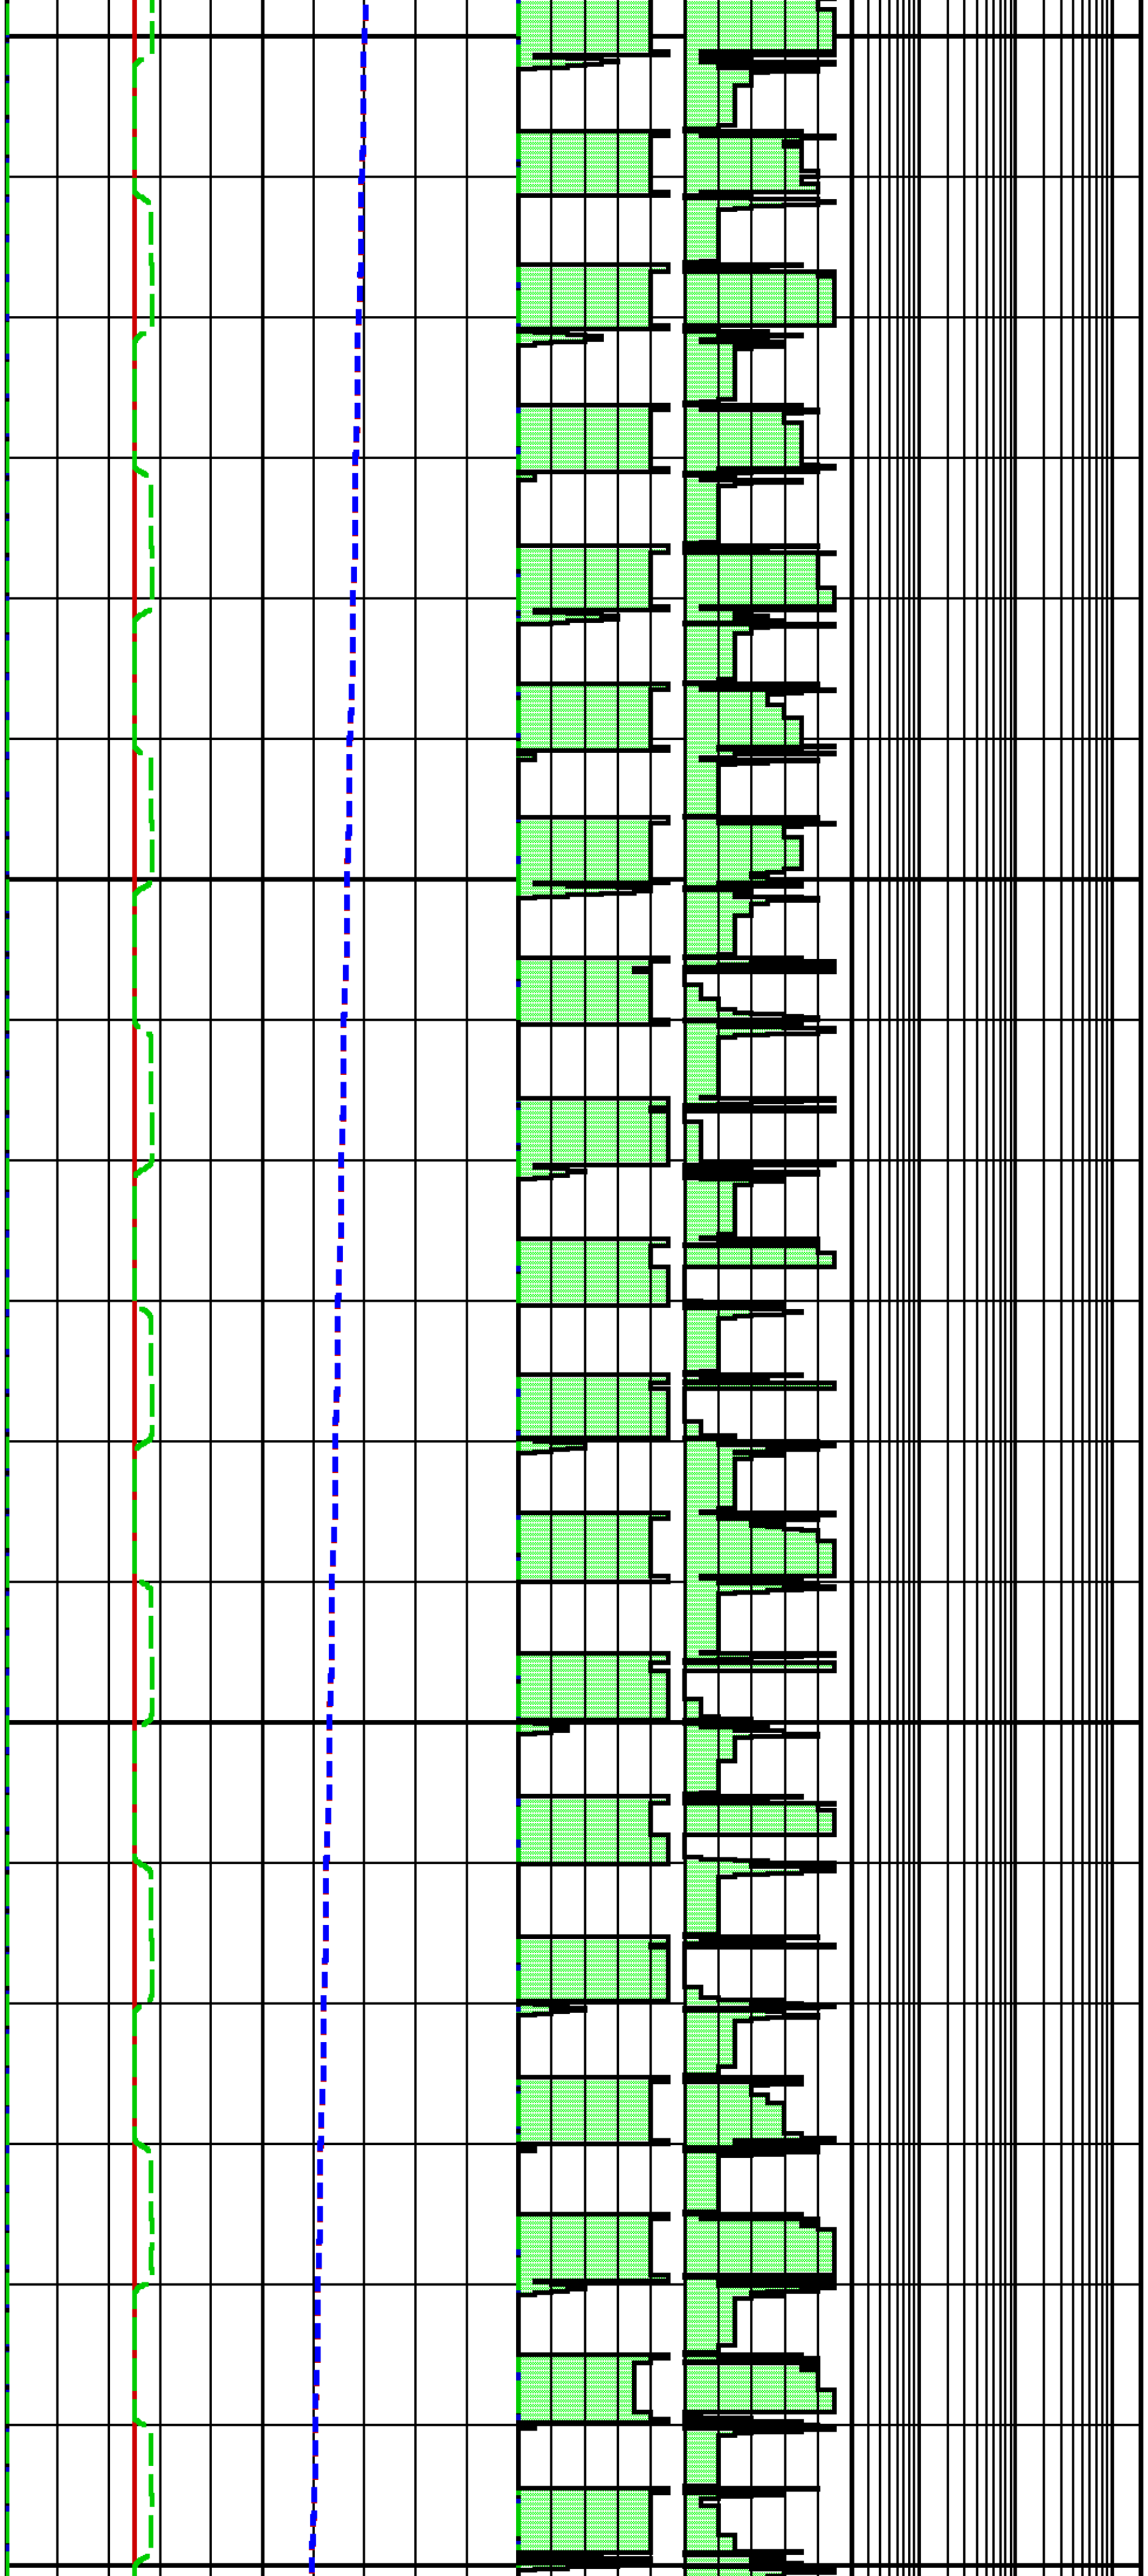

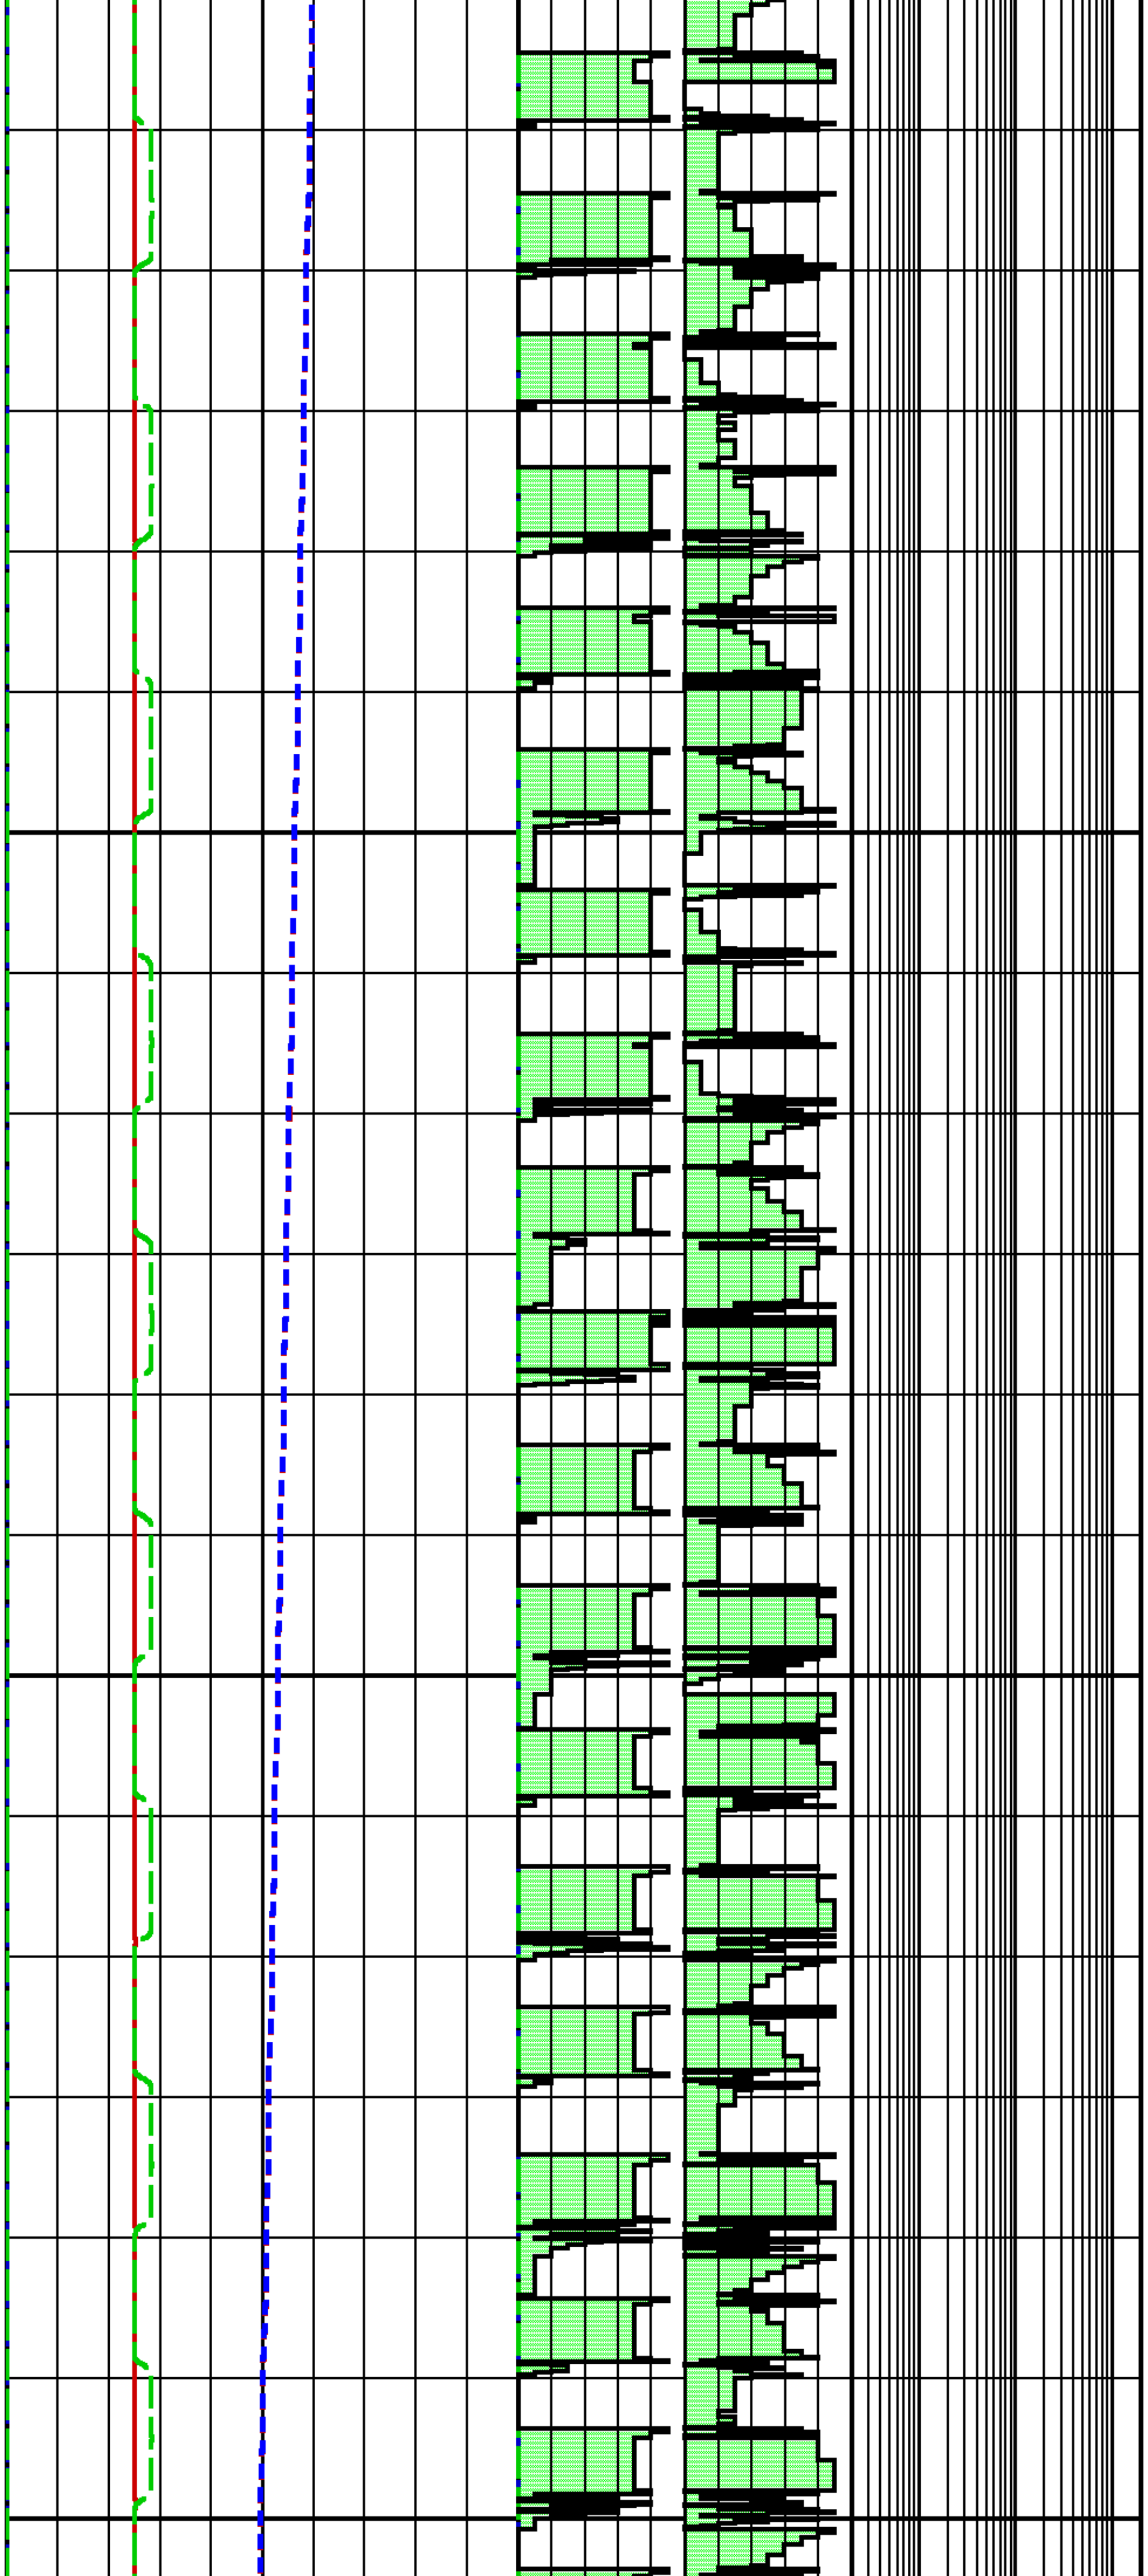

	3758.1	199.6
2950	3760.5	199.6
	3758.6	199.6
2960	3767.7	199.6
	3758.3	199.6
2970	3760.6	199.6
	3758.4	199.6
2980	3762.4	199.6
	3758.1	199.6
2990	3760.7	199.6
	3758.3	199.6
3000	3761.2	199.6
	3758.1	199.6
3010	3760.3	199.6
	3758.0	199.6
3020	3763.4	199.6
	3757.5	199.6
3030	3762.9	199.6
	3759.0	199.6
3040	3760.4	199.6
	3757.6	199.6
3050	3760.3	199.6
	3757.9	199.6
3060	3762.3	199.6
	3757.8	199.6
3070	3760.3	199.6
	3757.9	199.6
3080	3761.2	199.6
	3757.6	199.6
3090	3760.3	199.6
	3757.8	199.6
3100	3771.6	199.6
	3757.5	199.6
3110	3760.3	199.6
	3757.9	199.6
3120	3761.8	199.6

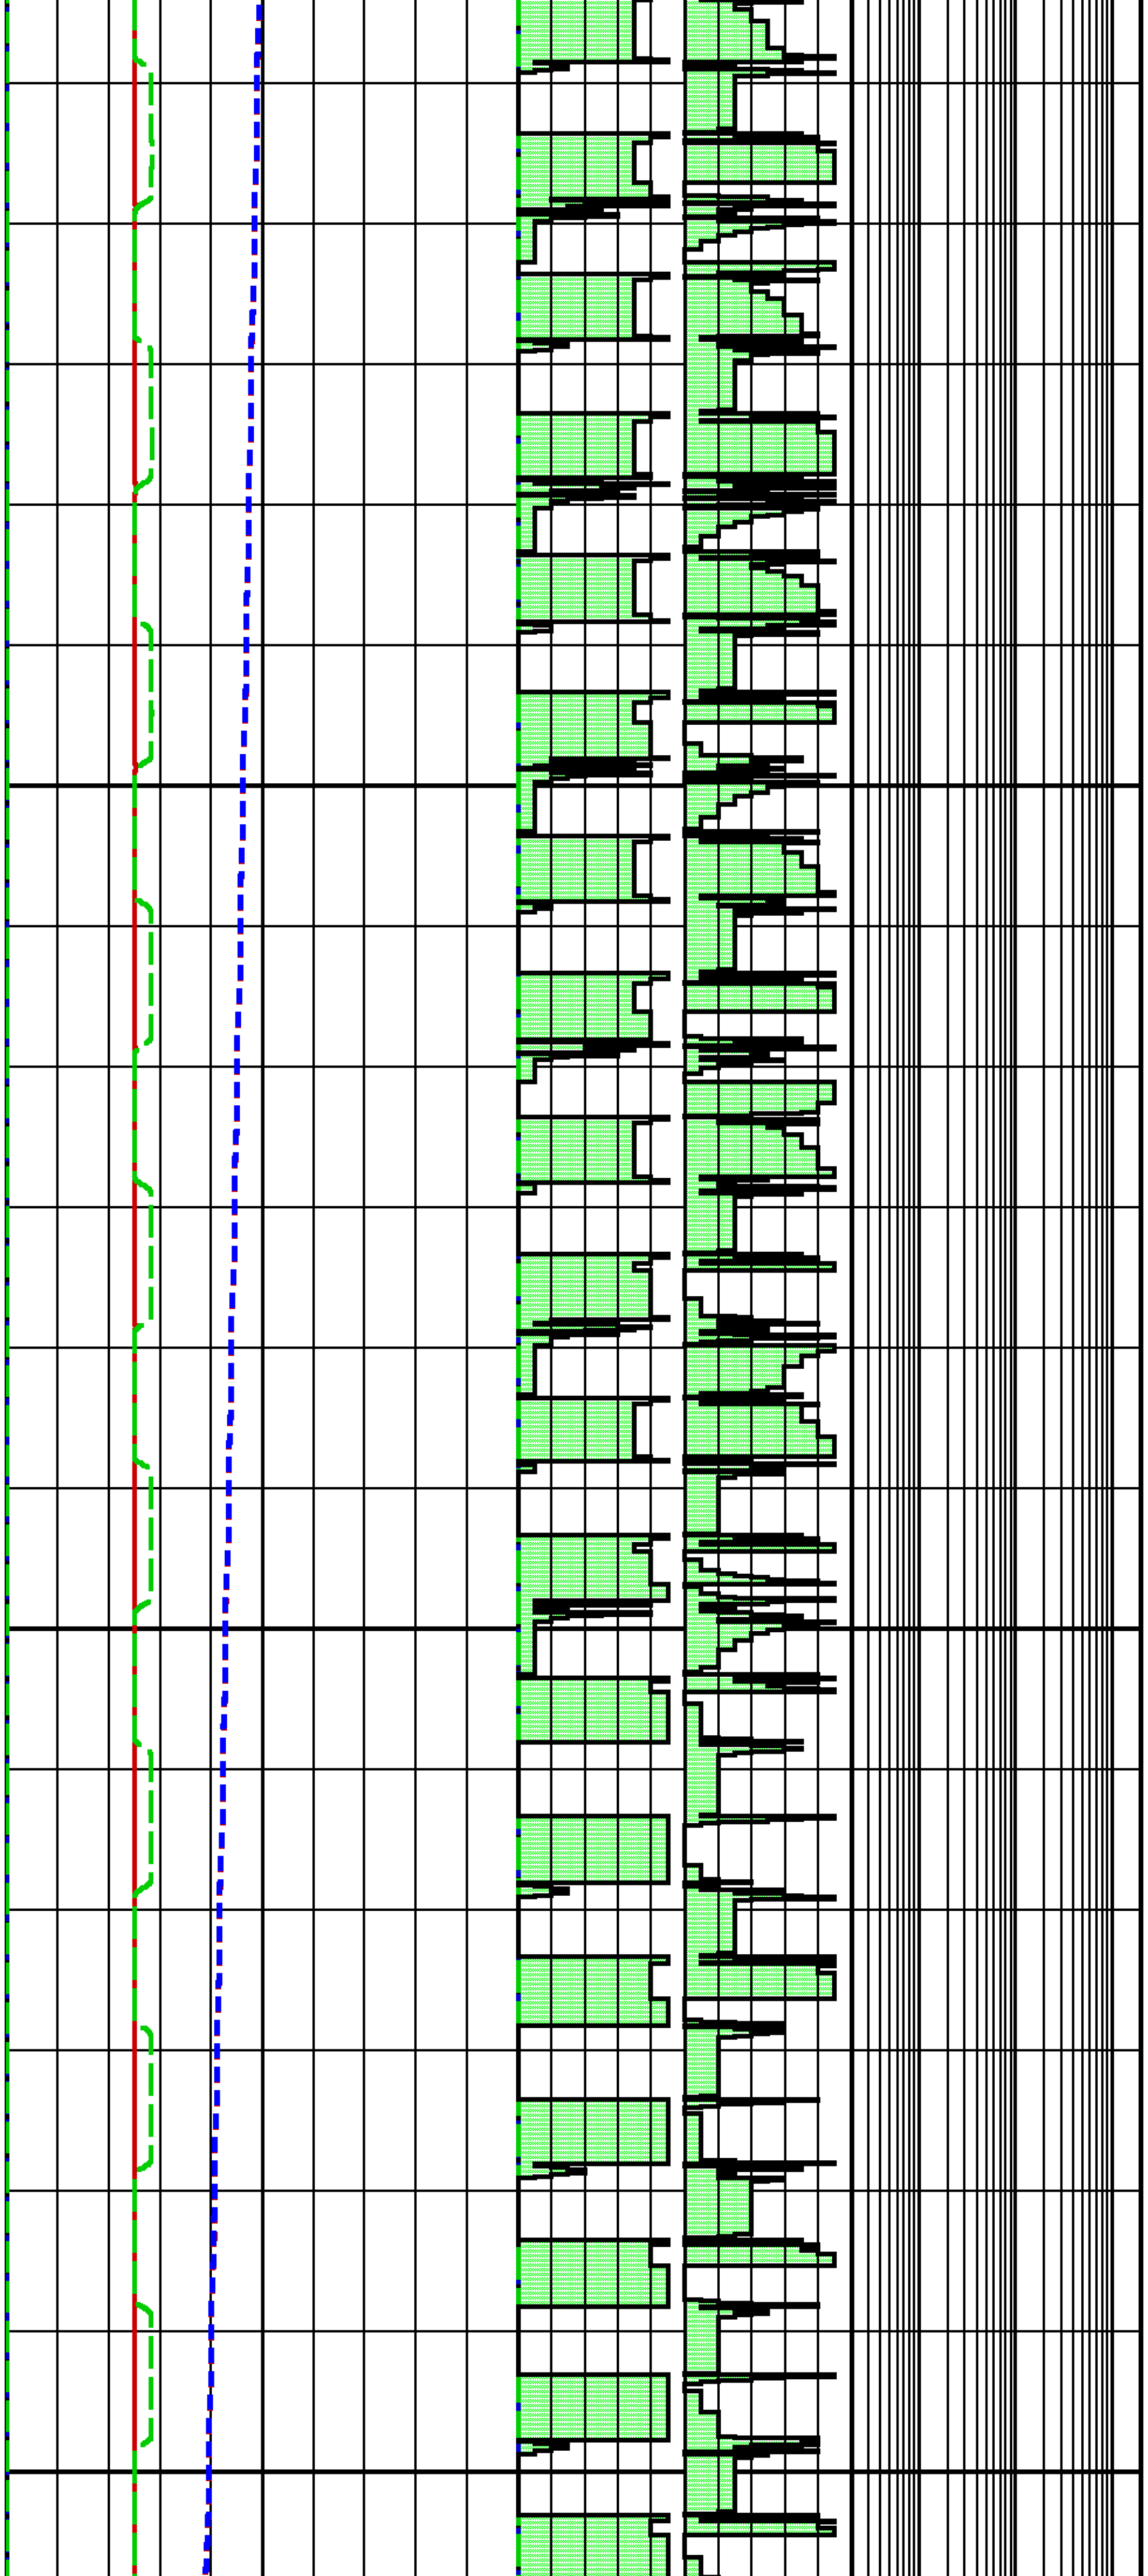

	3757.4	199.6
3130	3760.3	199.6
	3757.9	199.6
3140	3761.7	199.6
	3757.6	199.6
3150	3760.4	199.6
	3757.9	199.6
3160	3762.2	199.6
	3757.7	199.6
3170	3760.4	199.6
	3758.0	199.6
3180	3761.7	199.6
	3757.7	199.6
3190	3760.3	199.6
	3758.0	199.6
3200	3761.2	199.6
	3757.7	199.6
3210	3760.3	199.6
	3758.0	199.6
3220	3761.9	199.6
	3757.8	199.6
3230	3760.3	199.6
	3758.1	199.6
3240	3761.6	199.6
	3759.1	199.6
3250	3760.3	199.6
	3759.1	199.6
3260	3760.3	199.6
	3758.9	199.6
3270	3760.3	199.6
	3759.1	199.6
3280	3760.5	199.6
	3759.0	199.6
3290	3760.3	199.6
	3759.2	199.6
3300	3760.4	199.6
	3759.1	199.6

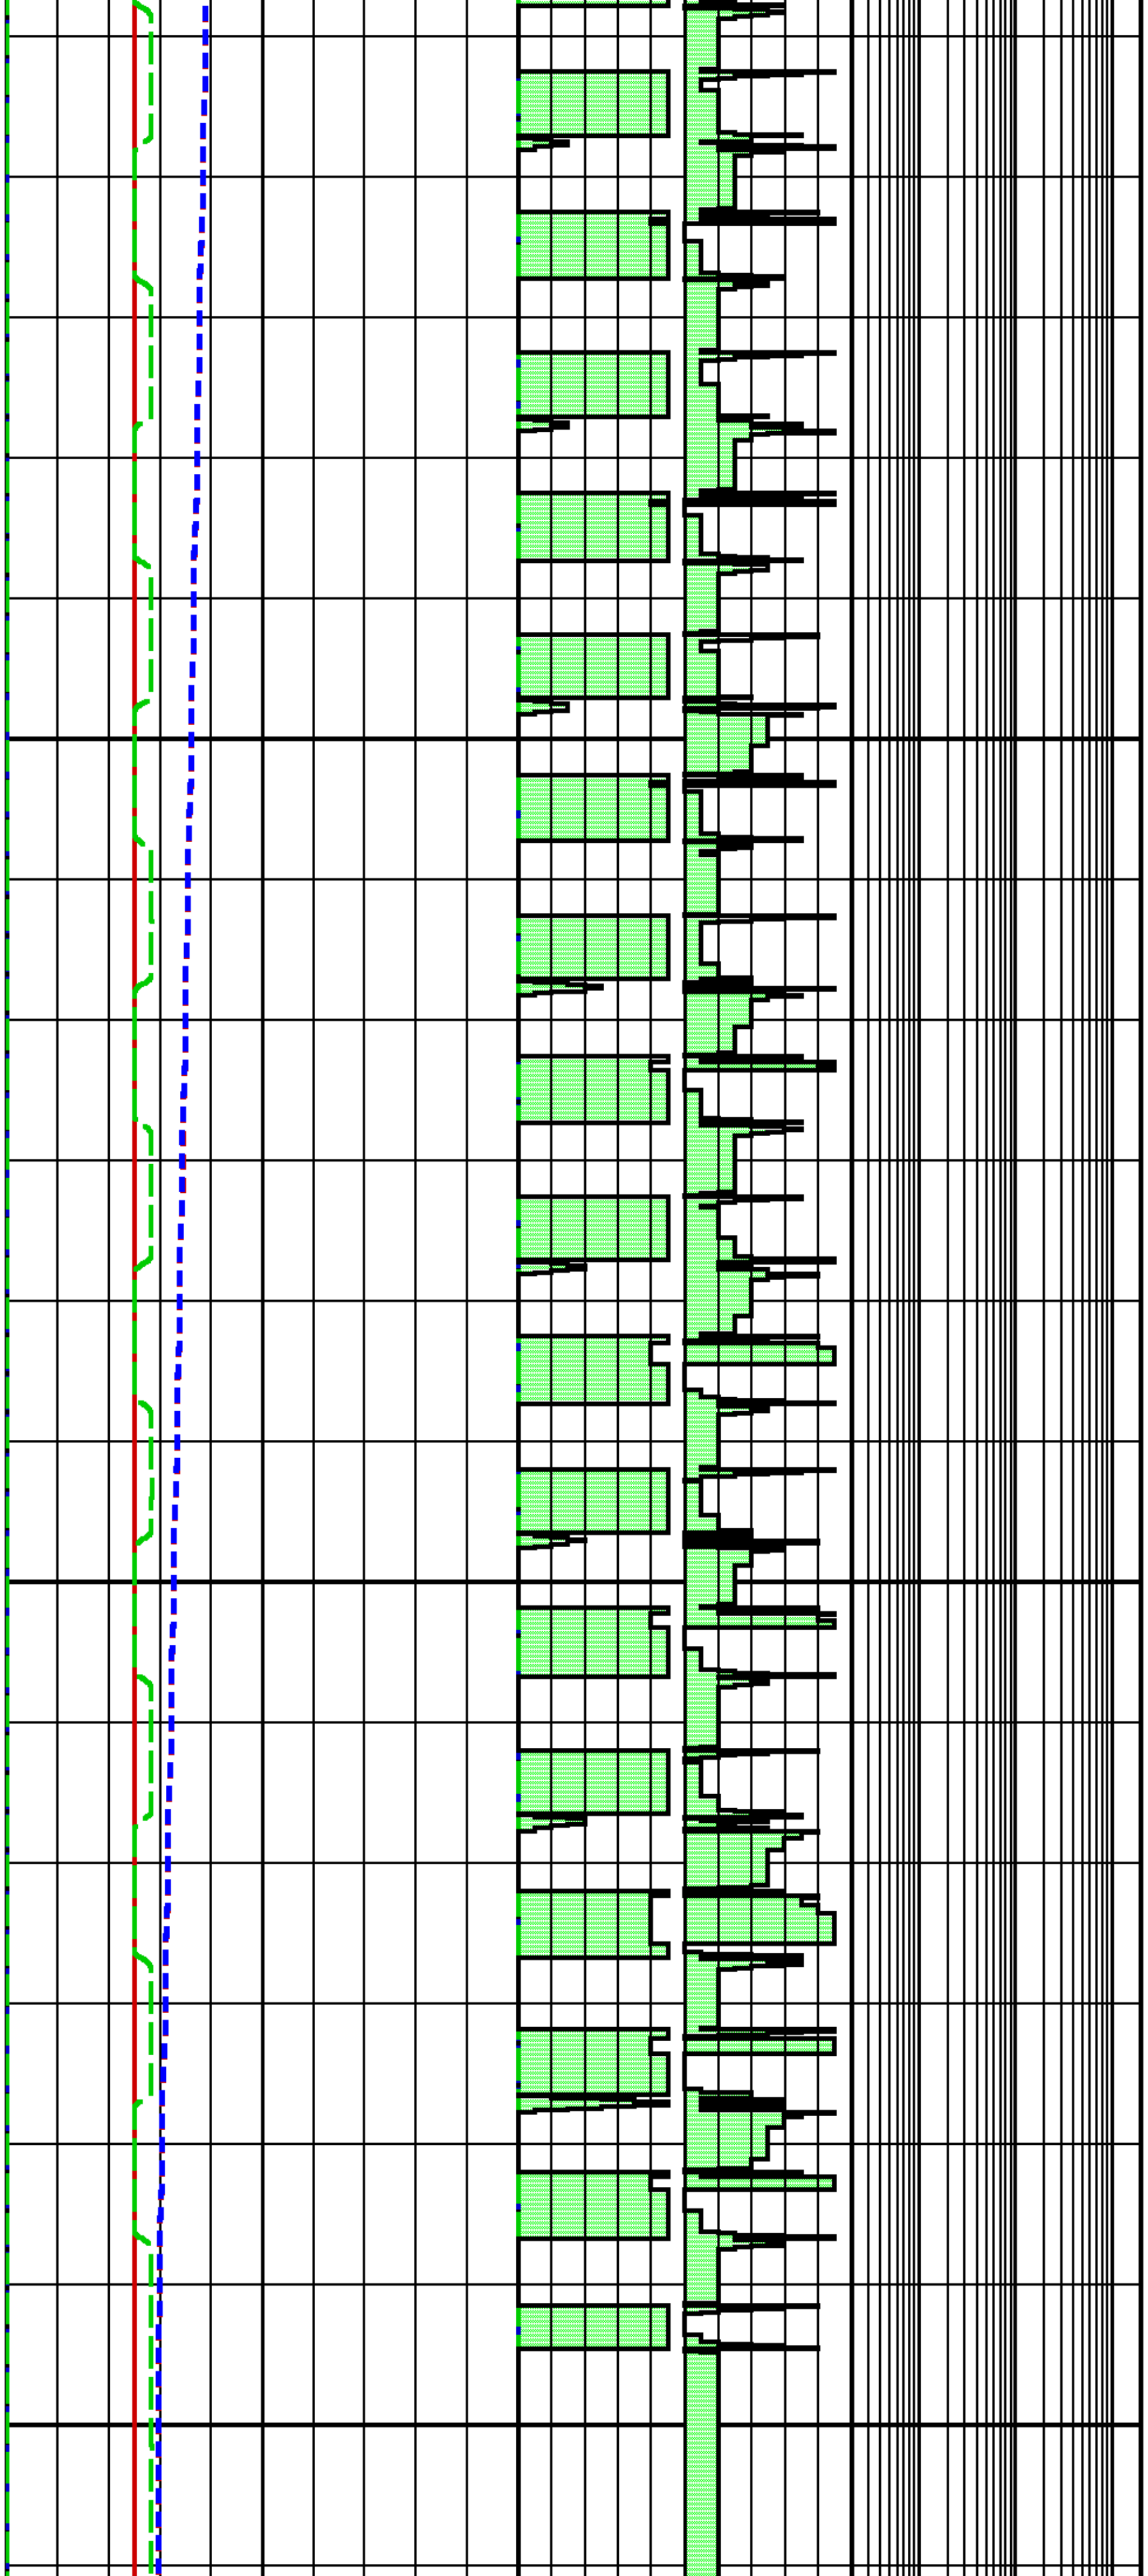

3310		3760.3	199.6
		3759.2	199.6
3320		3760.4	199.6
		3759.1	199.6
3330		3760.3	199.6
		3759.2	199.6
3340		3760.4	199.6
		3759.2	199.6
3350		3760.3	199.6
		3759.2	199.6
3360		3760.5	199.6
		3759.1	199.6
3370		3760.3	199.6
		3759.2	199.6
3380		3760.4	199.6
		3759.1	199.6
3390		3760.4	199.6
		3759.3	199.6
3400		3760.4	199.6
		3759.0	199.6
3410		3760.3	199.6
		3759.2	199.6
3420		3760.4	199.6
		3759.1	199.6
3430		3760.3	199.6
		3759.2	199.6
3440		3760.6	199.6
		3759.0	199.6
3450		3760.3	199.6
		3759.1	199.6
3460		3760.5	199.6
		3759.1	199.6
3470		3760.3	199.6
	BB[1] STOP OPERATION	3760.3	199.6
3480	WA[1] CLOSE EXIT-6TANK	3760.3	199.6
		3760.3	199.6
3490		3760.3	199.6

	WA[1] OPEN TANK 2	3760.3	199.6
3500		3760.3	199.6
	BB[1] RESUME OPERATION	3760.3	199.6
3510		3760.5	199.6
		3758.9	199.6
3520		3760.3	199.6
		3759.1	199.6
3530		3760.6	199.6
		3758.9	199.6
3540		3760.3	199.6
		3759.2	199.6
3550		3761.0	199.6
		3759.0	199.6
3560		3760.3	199.6
		3759.2	199.6
3570		3760.6	199.6
		3759.0	199.6
3580		3760.5	199.6
		3759.4	199.6
3590		3760.5	199.7
		3759.0	199.7
3600		3760.3	199.7
		3759.1	199.7
3610		3760.4	199.7
		3759.1	199.7
3620		3760.3	199.7
		3759.2	199.7
3630		3760.4	199.7
		3759.1	199.7
3640		3760.3	199.7
		3759.1	199.7
3650		3760.4	199.7
		3759.0	199.7
3660		3760.3	199.7
		3759.1	199.7
3670		3760.4	199.7

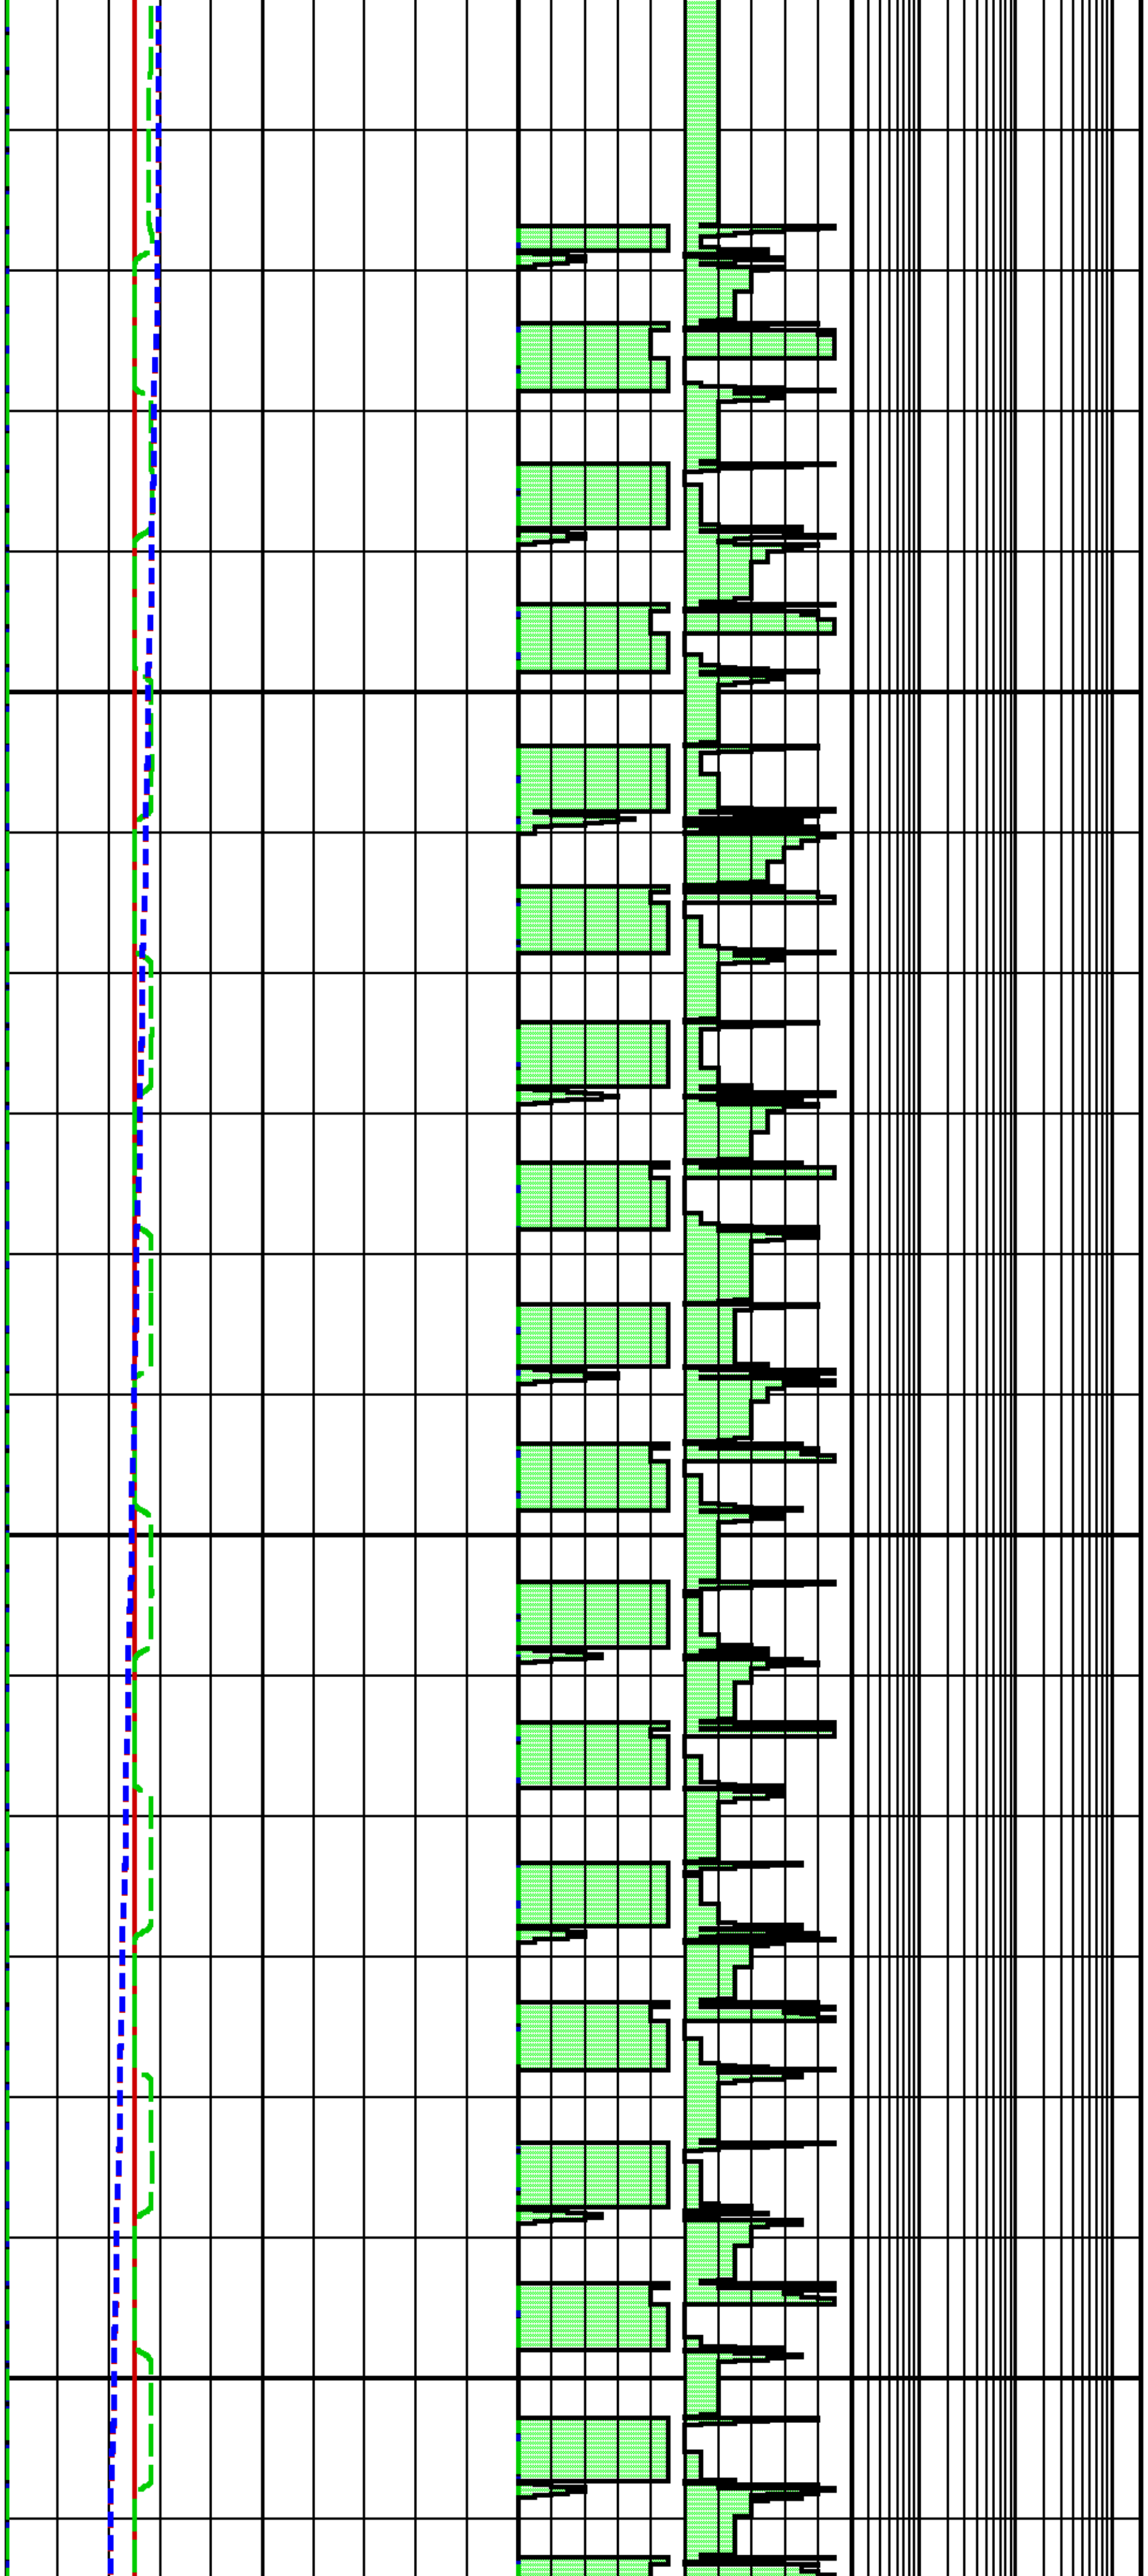

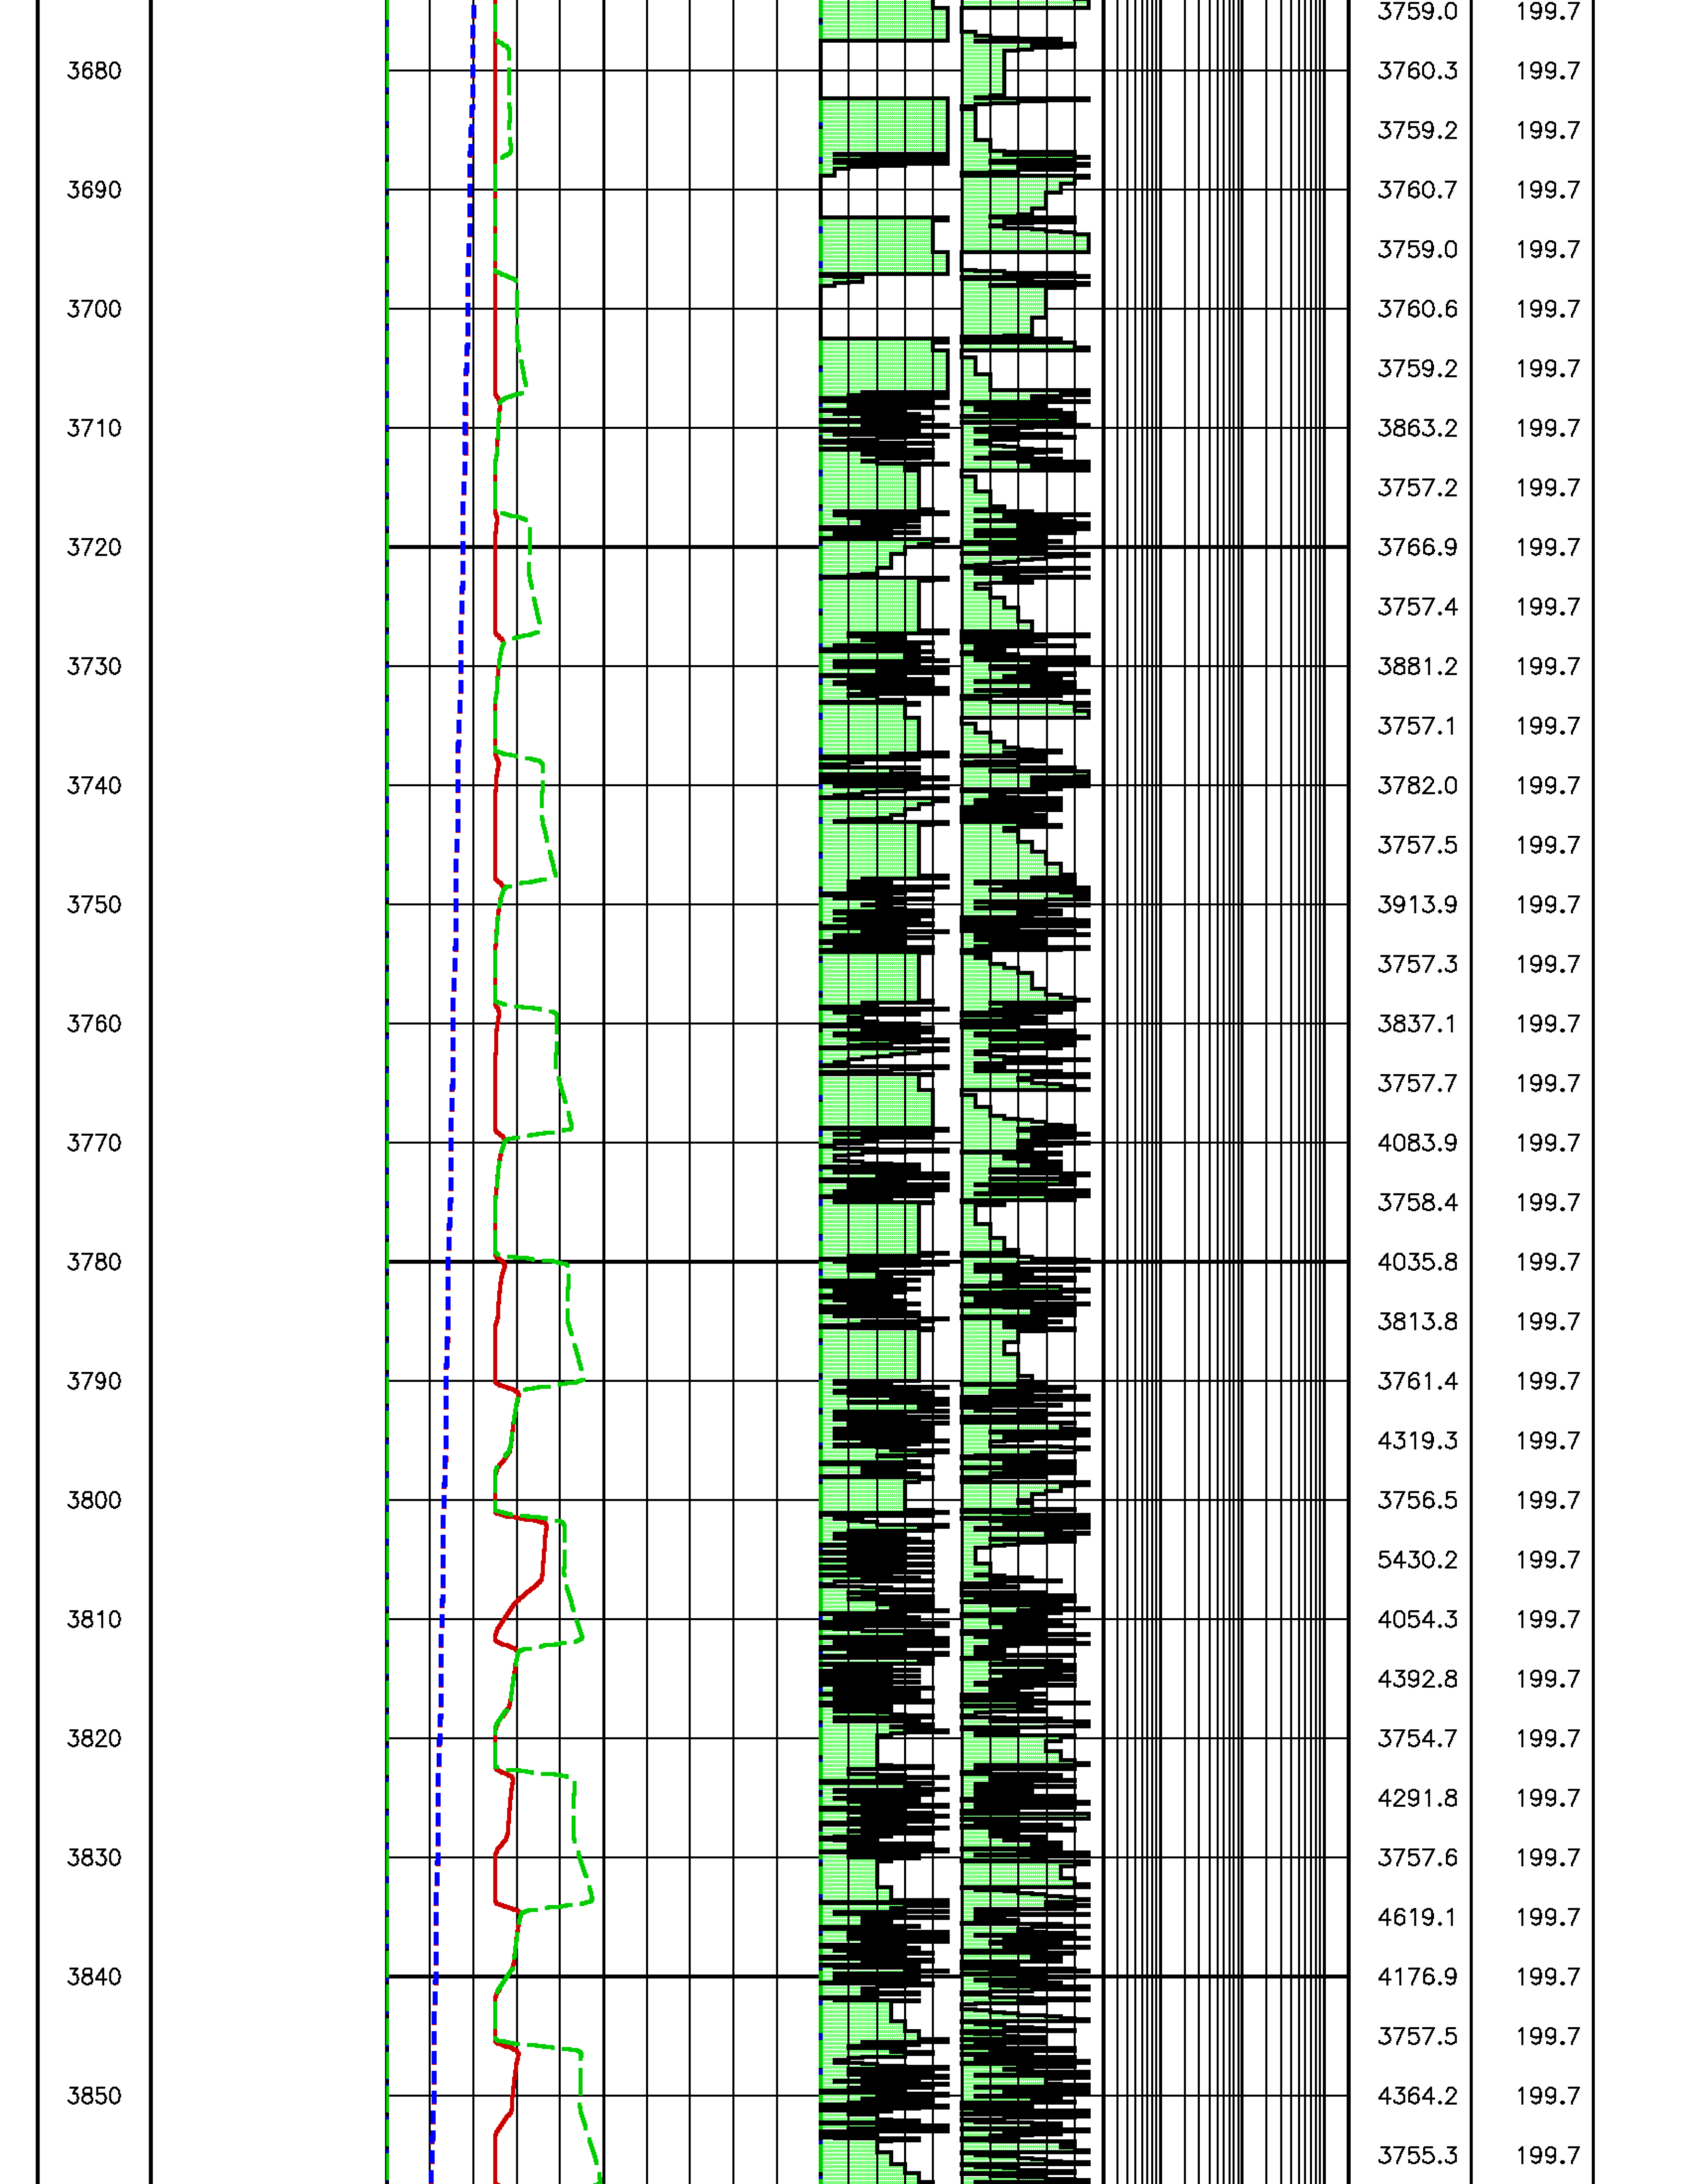

3759.0 199.7
3680
3760.3 199.7
3759.2 199.7
3690
3760.7 199.7
3759.0 199.7
3700
3760.6 199.7
3759.2 199.7
3710
3863.2 199.7
3757.2 199.7
3720
3766.9 199.7
3757.4 199.7
3730
3881.2 199.7
3757.1 199.7
3740
3782.0 199.7
3757.5 199.7
3750
3913.9 199.7
3757.3 199.7
3760
3837.1 199.7
3757.7 199.7
3770
4083.9 199.7
3758.4 199.7
3780
4035.8 199.7
3813.8 199.7
3790
3761.4 199.7
4319.3 199.7
3800
3756.5 199.7
5430.2 199.7
3810
4054.3 199.7
4392.8 199.7
3820
3754.7 199.7
4291.8 199.7
3830
3757.6 199.7
4619.1 199.7
3840
4176.9 199.7
3757.5 199.7
3850
4364.2 199.7
3755.3 199.7

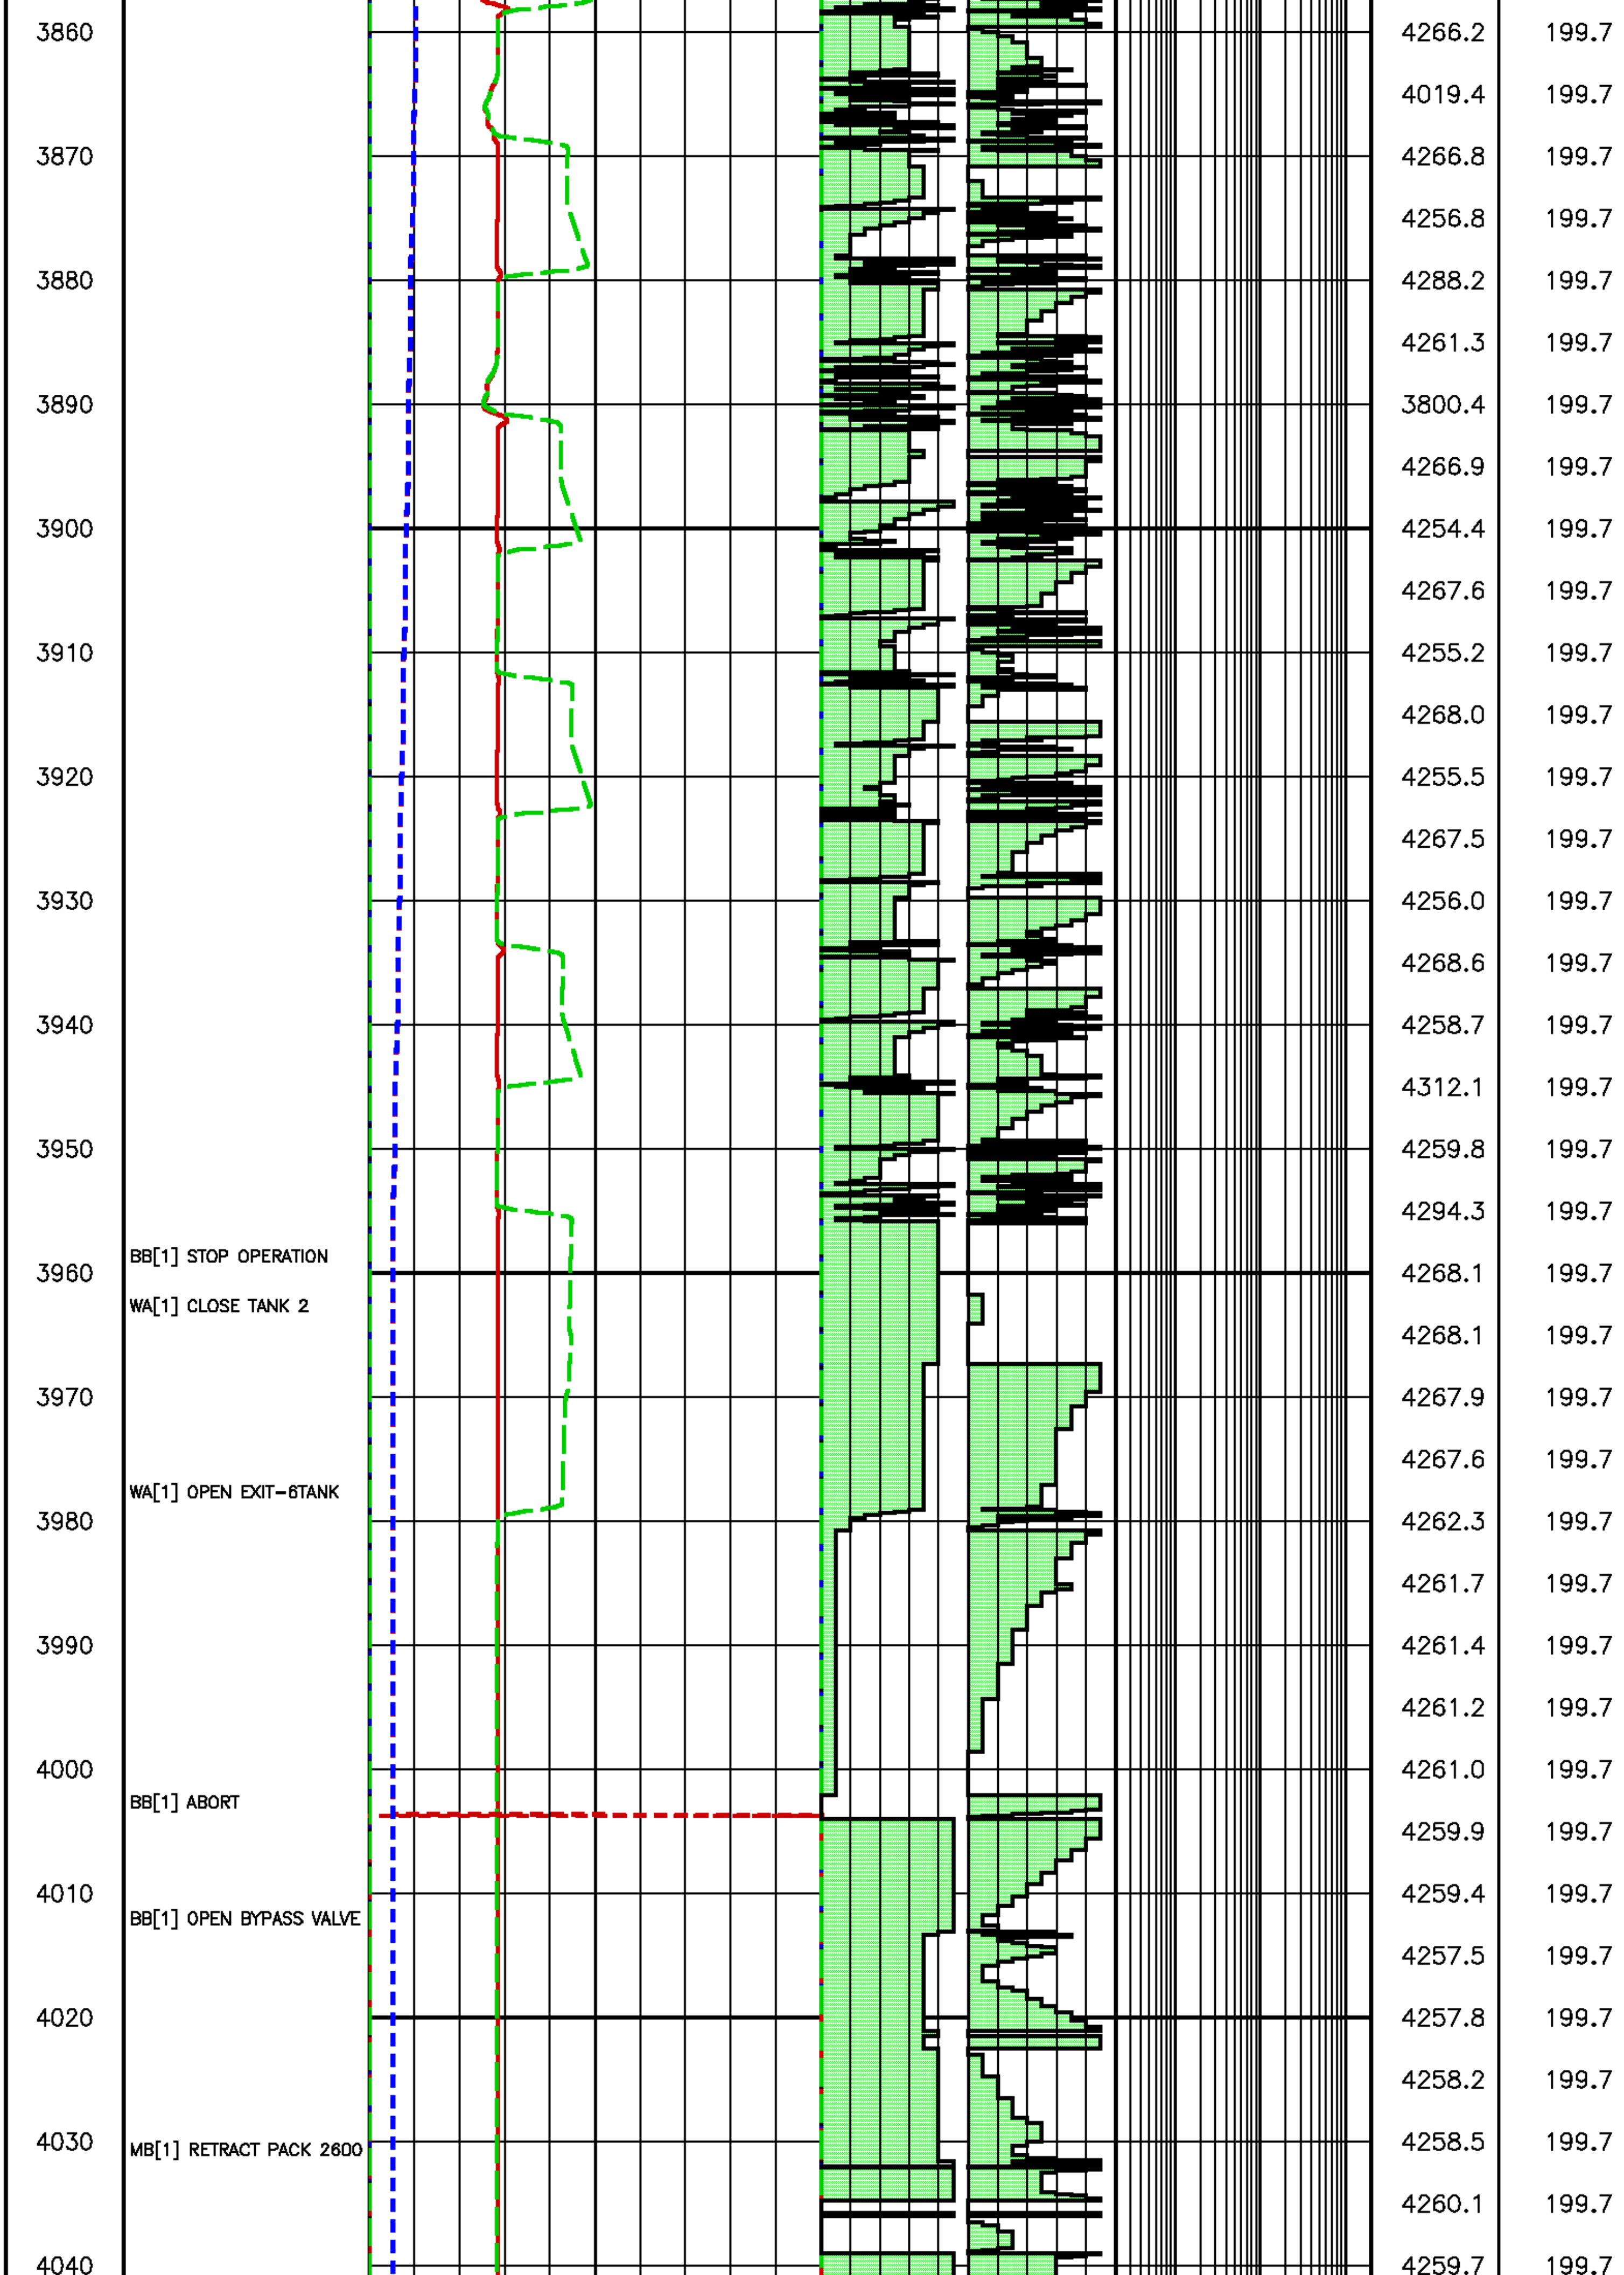
3860 4266.2 199.7
4019.4 199.7
3870 4266.8 199.7
4256.8 199.7
3880 4288.2 199.7
4261.3 199.7
3890 3800.4 199.7
4266.9 199.7
3900 4254.4 199.7
4267.6 199.7
3910 4255.2 199.7
4268.0 199.7
3920 4255.5 199.7
4267.5 199.7
3930 4256.0 199.7
4268.6 199.7
3940 4258.7 199.7
4312.1 199.7
3950 4259.8 199.7
4294.3 199.7
BB[1] STOP OPERATION
3960 4268.1 199.7
WA[1] CLOSE TANK 2
4268.1 199.7
3970 4267.9 199.7
4267.6 199.7
WA[1] OPEN EXIT-6TANK
3980 4262.3 199.7
4261.7 199.7
3990 4261.4 199.7
4261.2 199.7
4000 4261.0 199.7
BB[1] ABORT
4259.9 199.7
4010 4259.4 199.7
BB[1] OPEN BYPASS VALVE
4257.5 199.7
4020 4257.8 199.7
4258.2 199.7
4030 MB[1] RETRACT PACK 2600 4258.5 199.7
4260.1 199.7
4040 4259.7 199.7

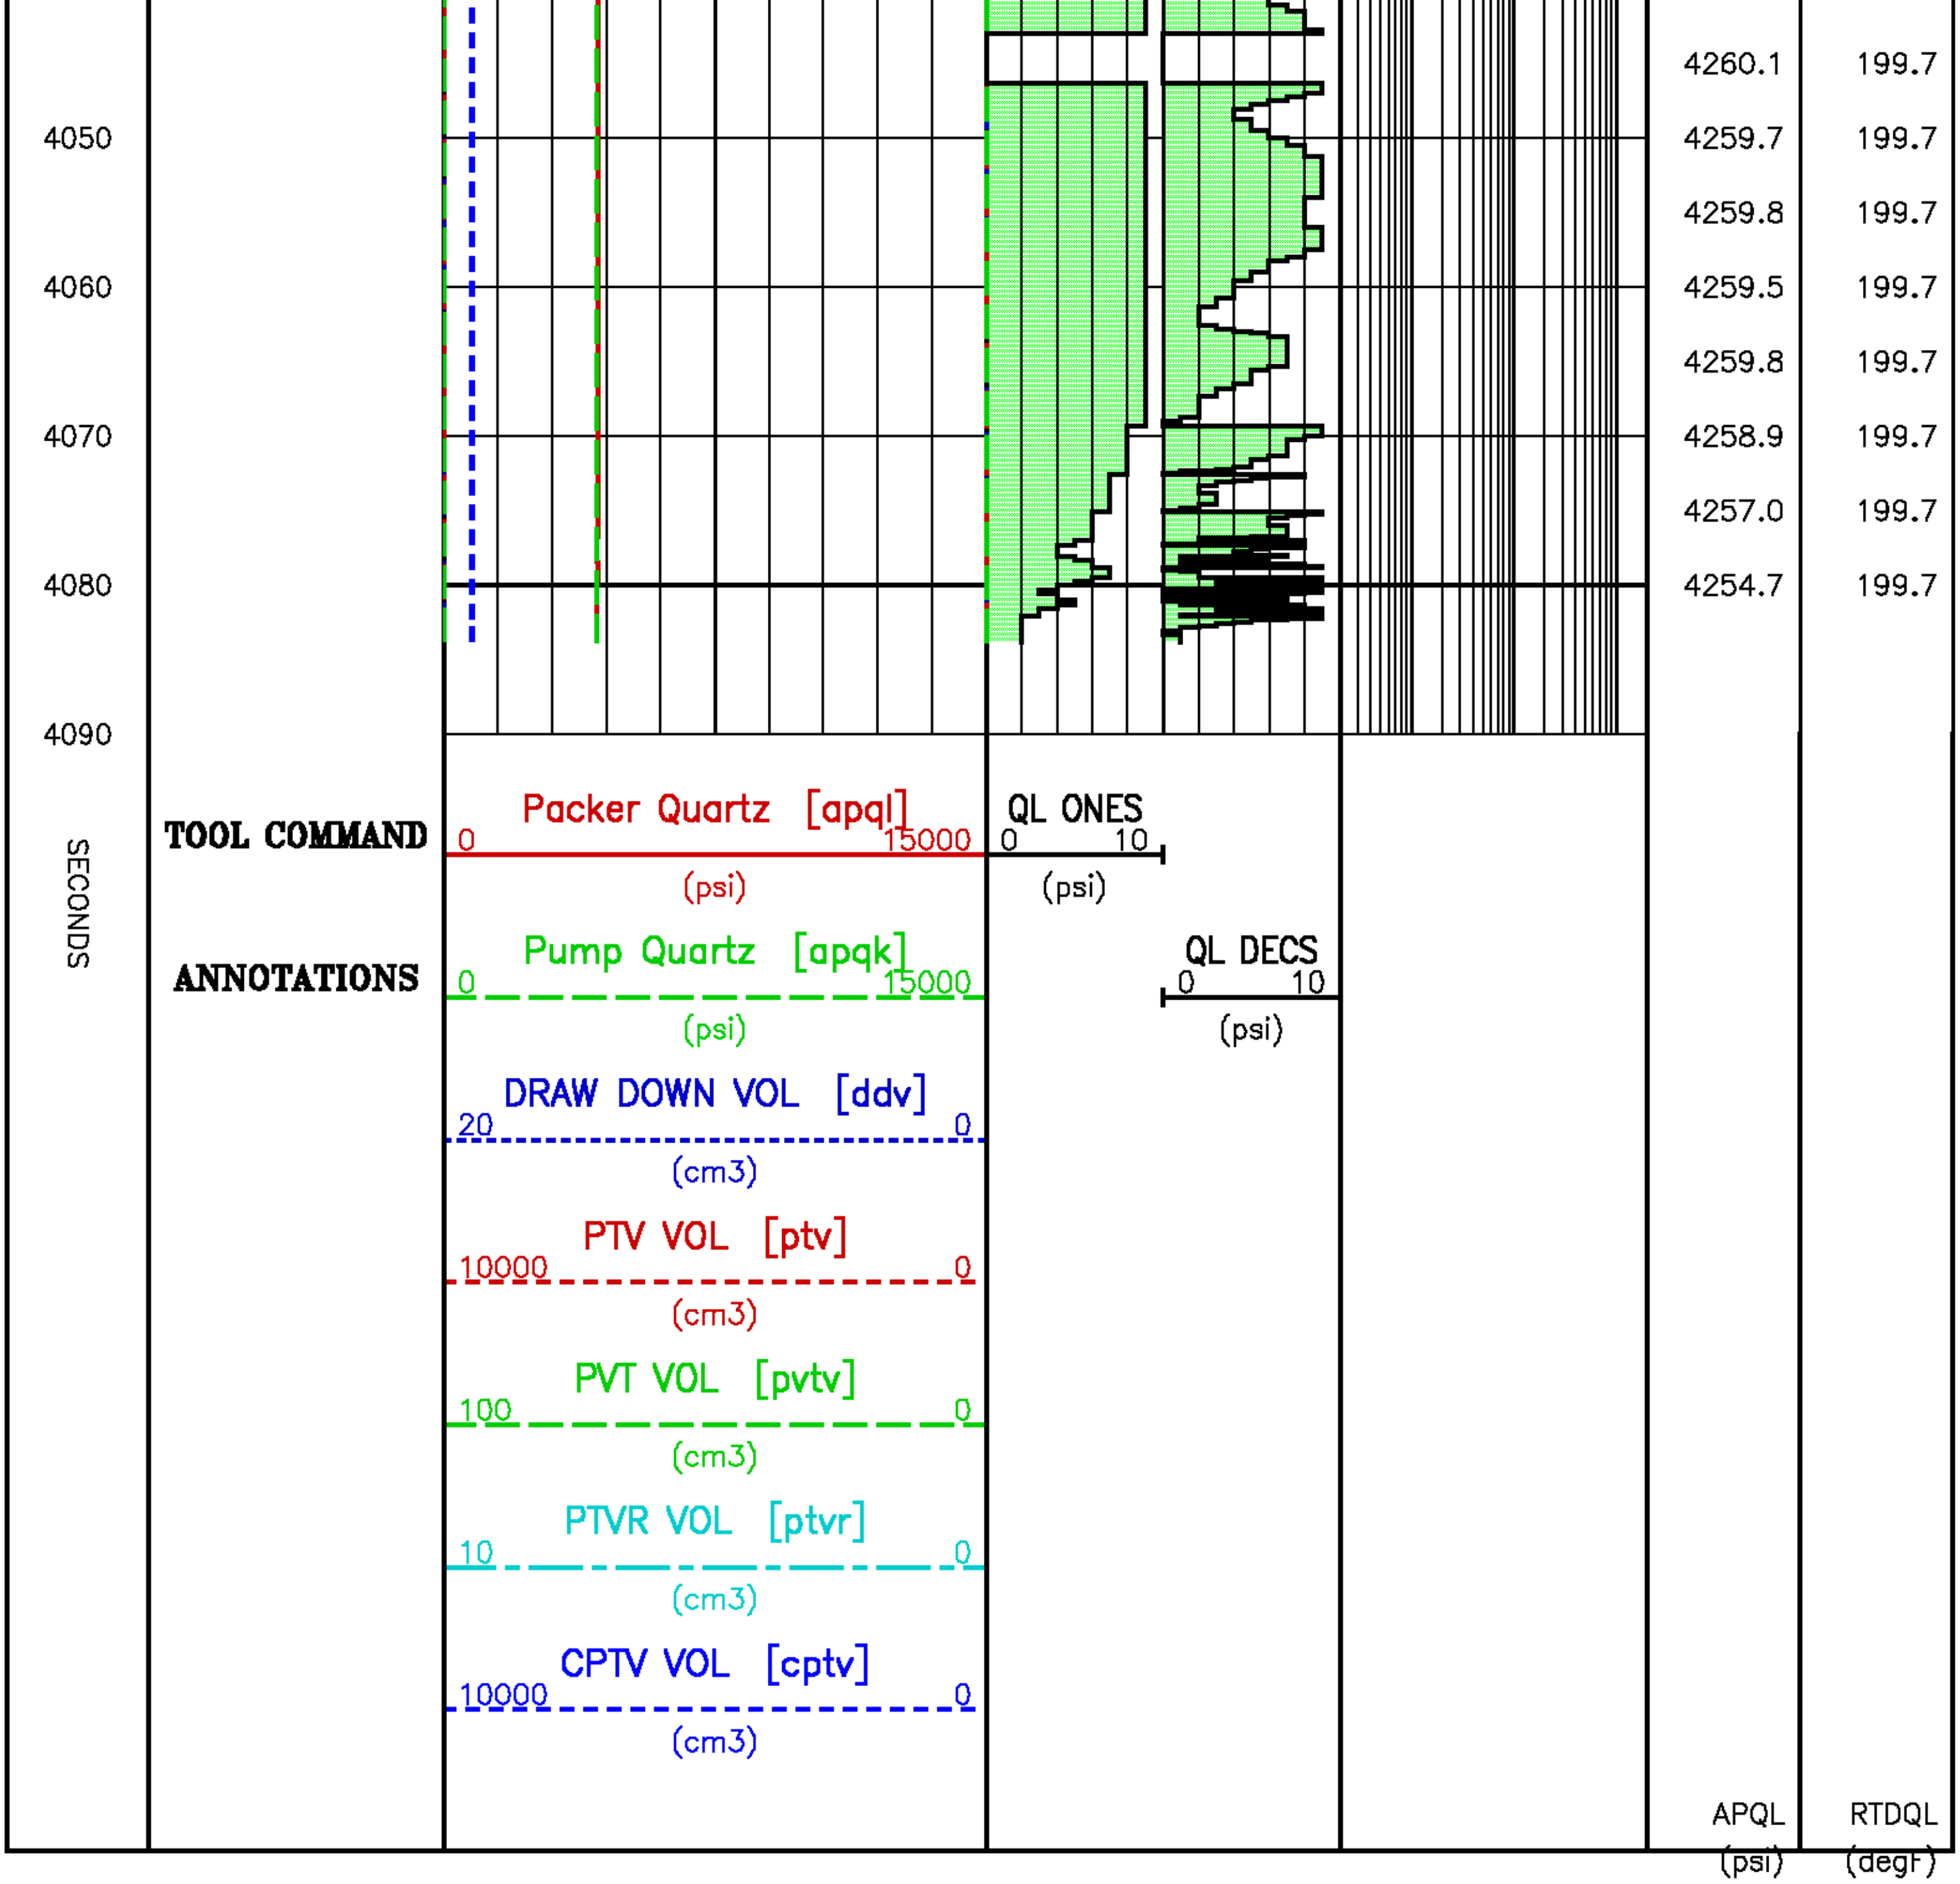

Data File : j800g43.aff
Presentation: sampleview_ibsig.log

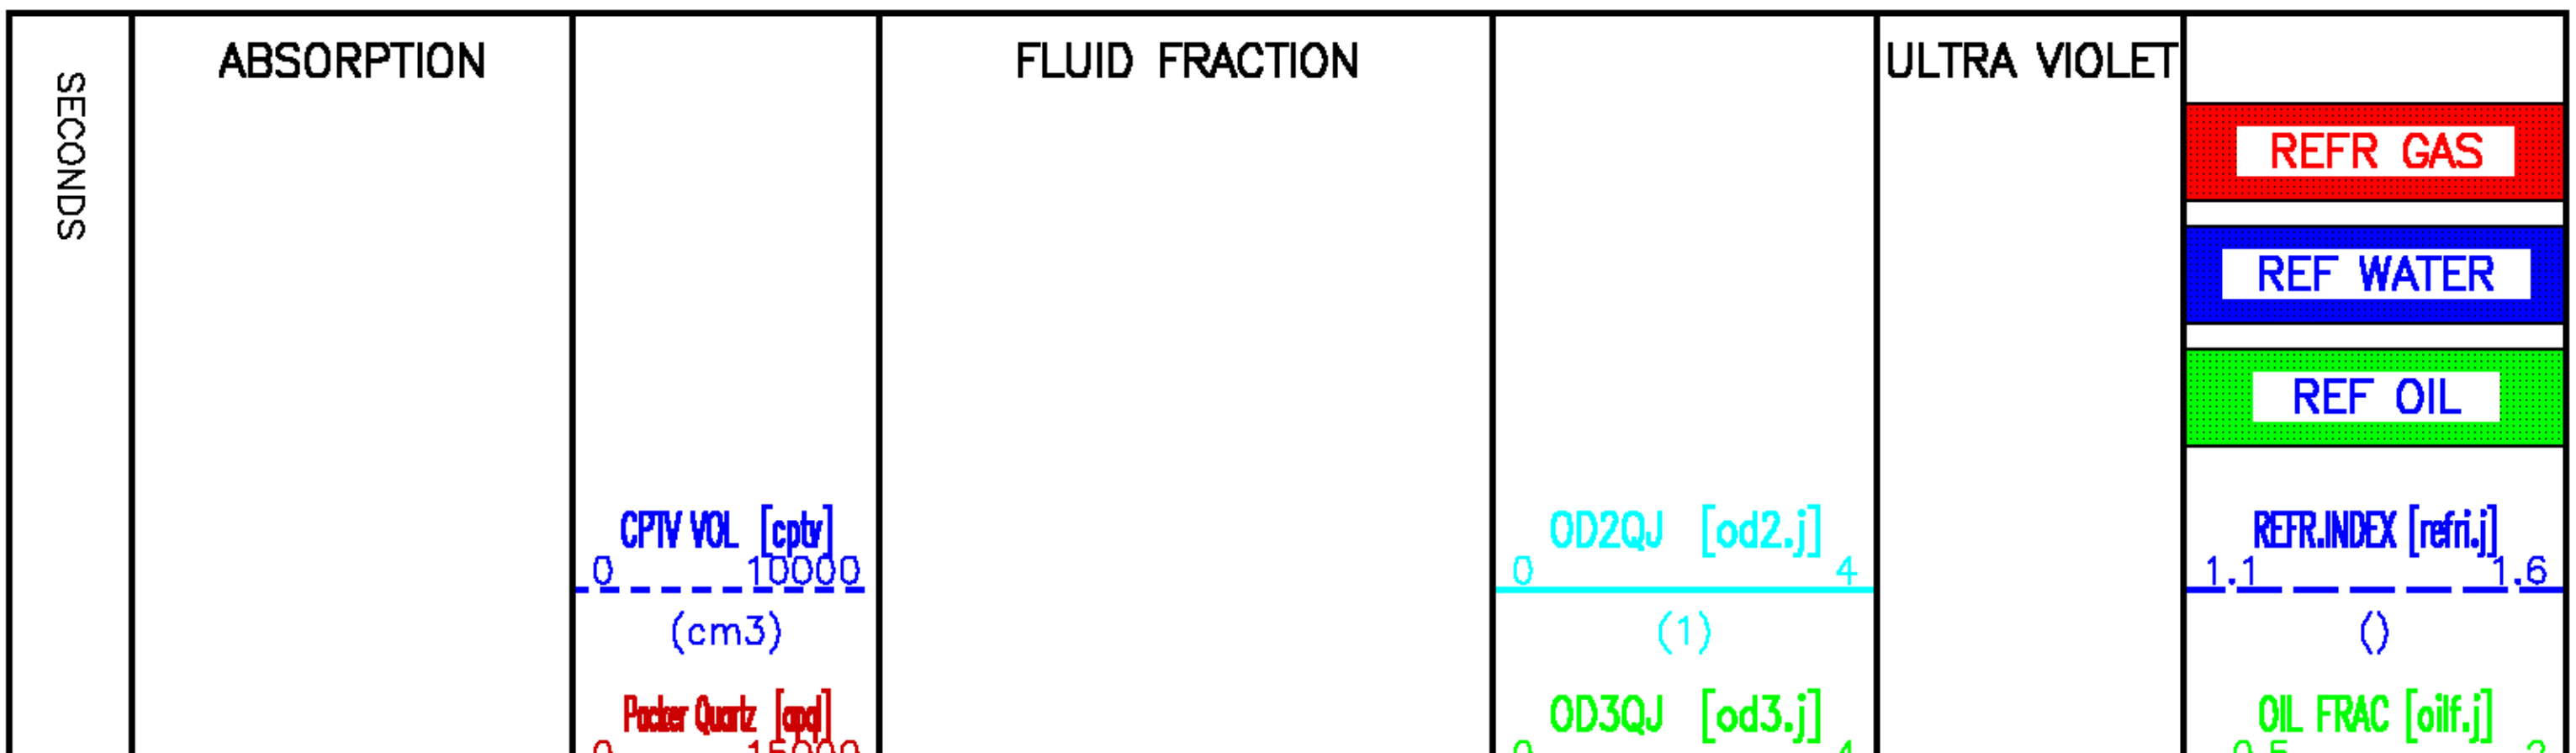

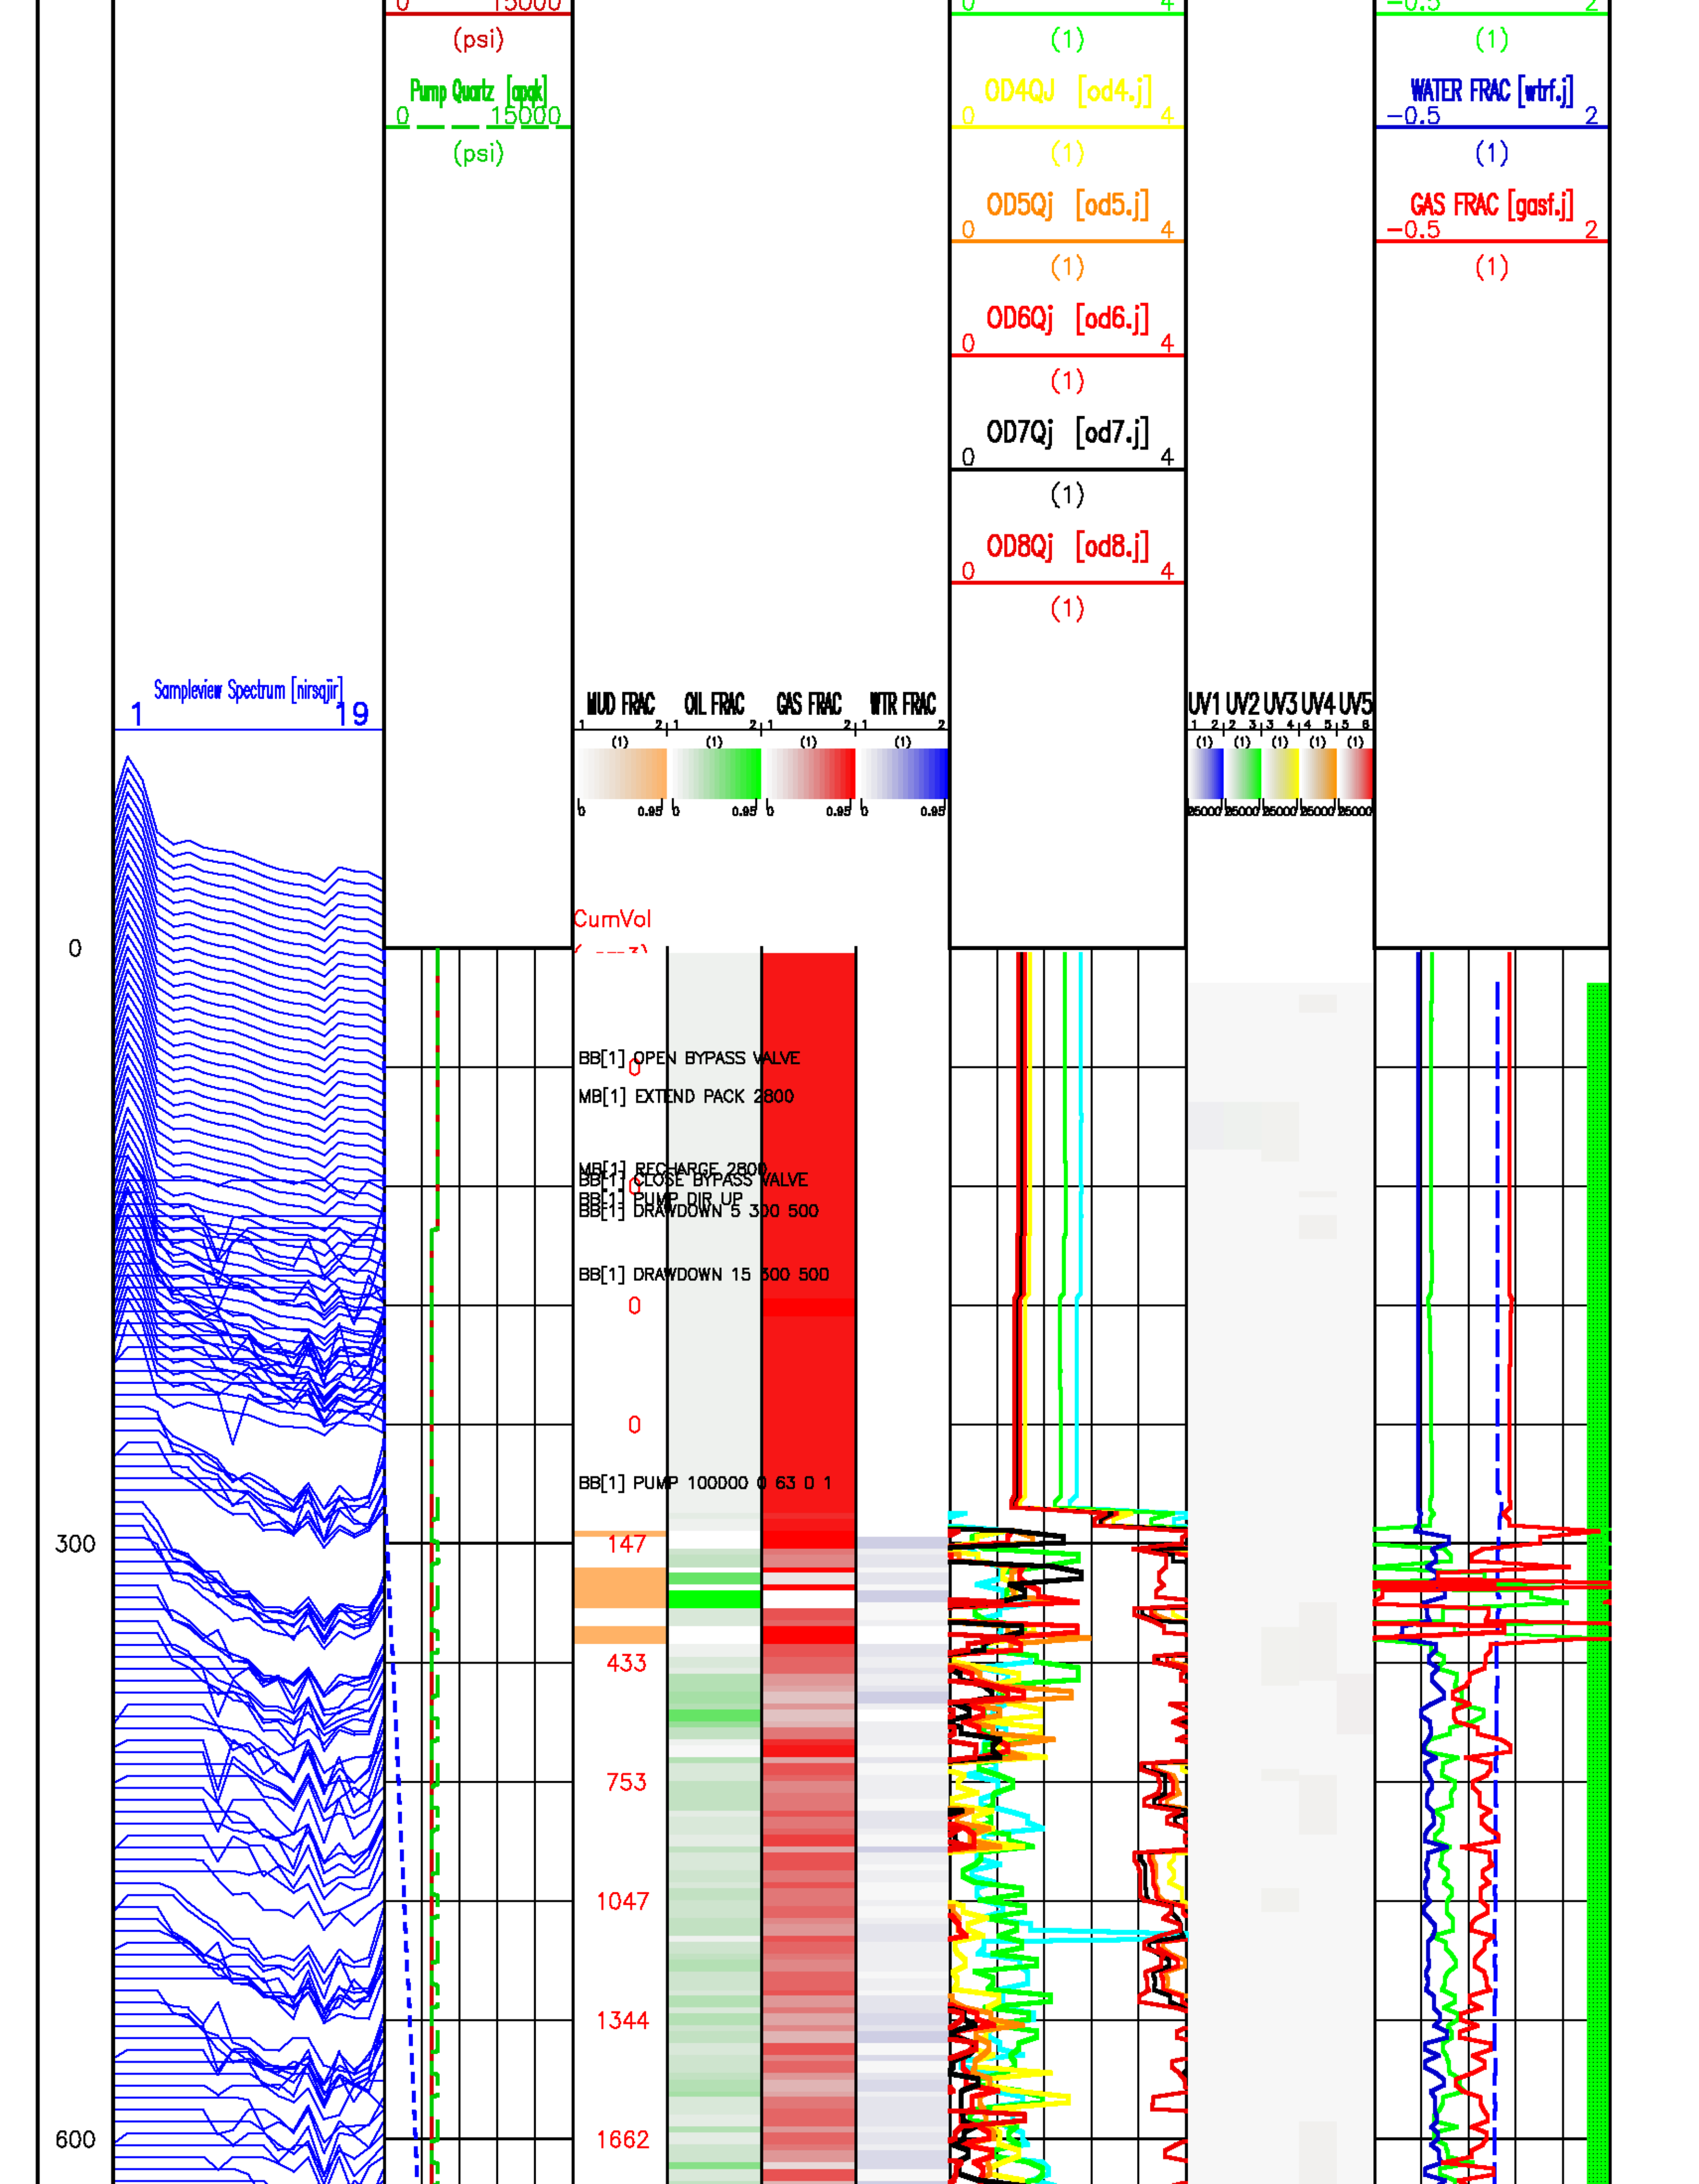

(psi)
Pump Quartz [apqk]
0 15000
(psi)
OD4QJ [od4.j]
OD5Qj [od5.j]
OD6Qj [od6.j]
OD7Qj [od7.j]
OD8Qj [od8.j]
WATER FRAC [wtrf.j]
-0.5 2
GAS FRAC [gasf.j]
Sampleview Spectrum [nirsqjir]
1 19
MUD FRAC
OIL FRAC
GAS FRAC
WTR FRAC
UV1 UV2 UV3 UV4 UV5
CumVol
0
300
600
BB[1] OPEN BYPASS VALVE
MB[1] EXTEND PACK 2800
MB[1] RECHARGE 2800
BB[1] CLOSE BYPASS VALVE
BB[1] PUMP DIR UP
BB[1] DRAWDOWN 5 300 500
BB[1] DRAWDOWN 15 300 500
BB[1] PUMP 100000 0 63 0 1
147
433
753
1047
1344
1662

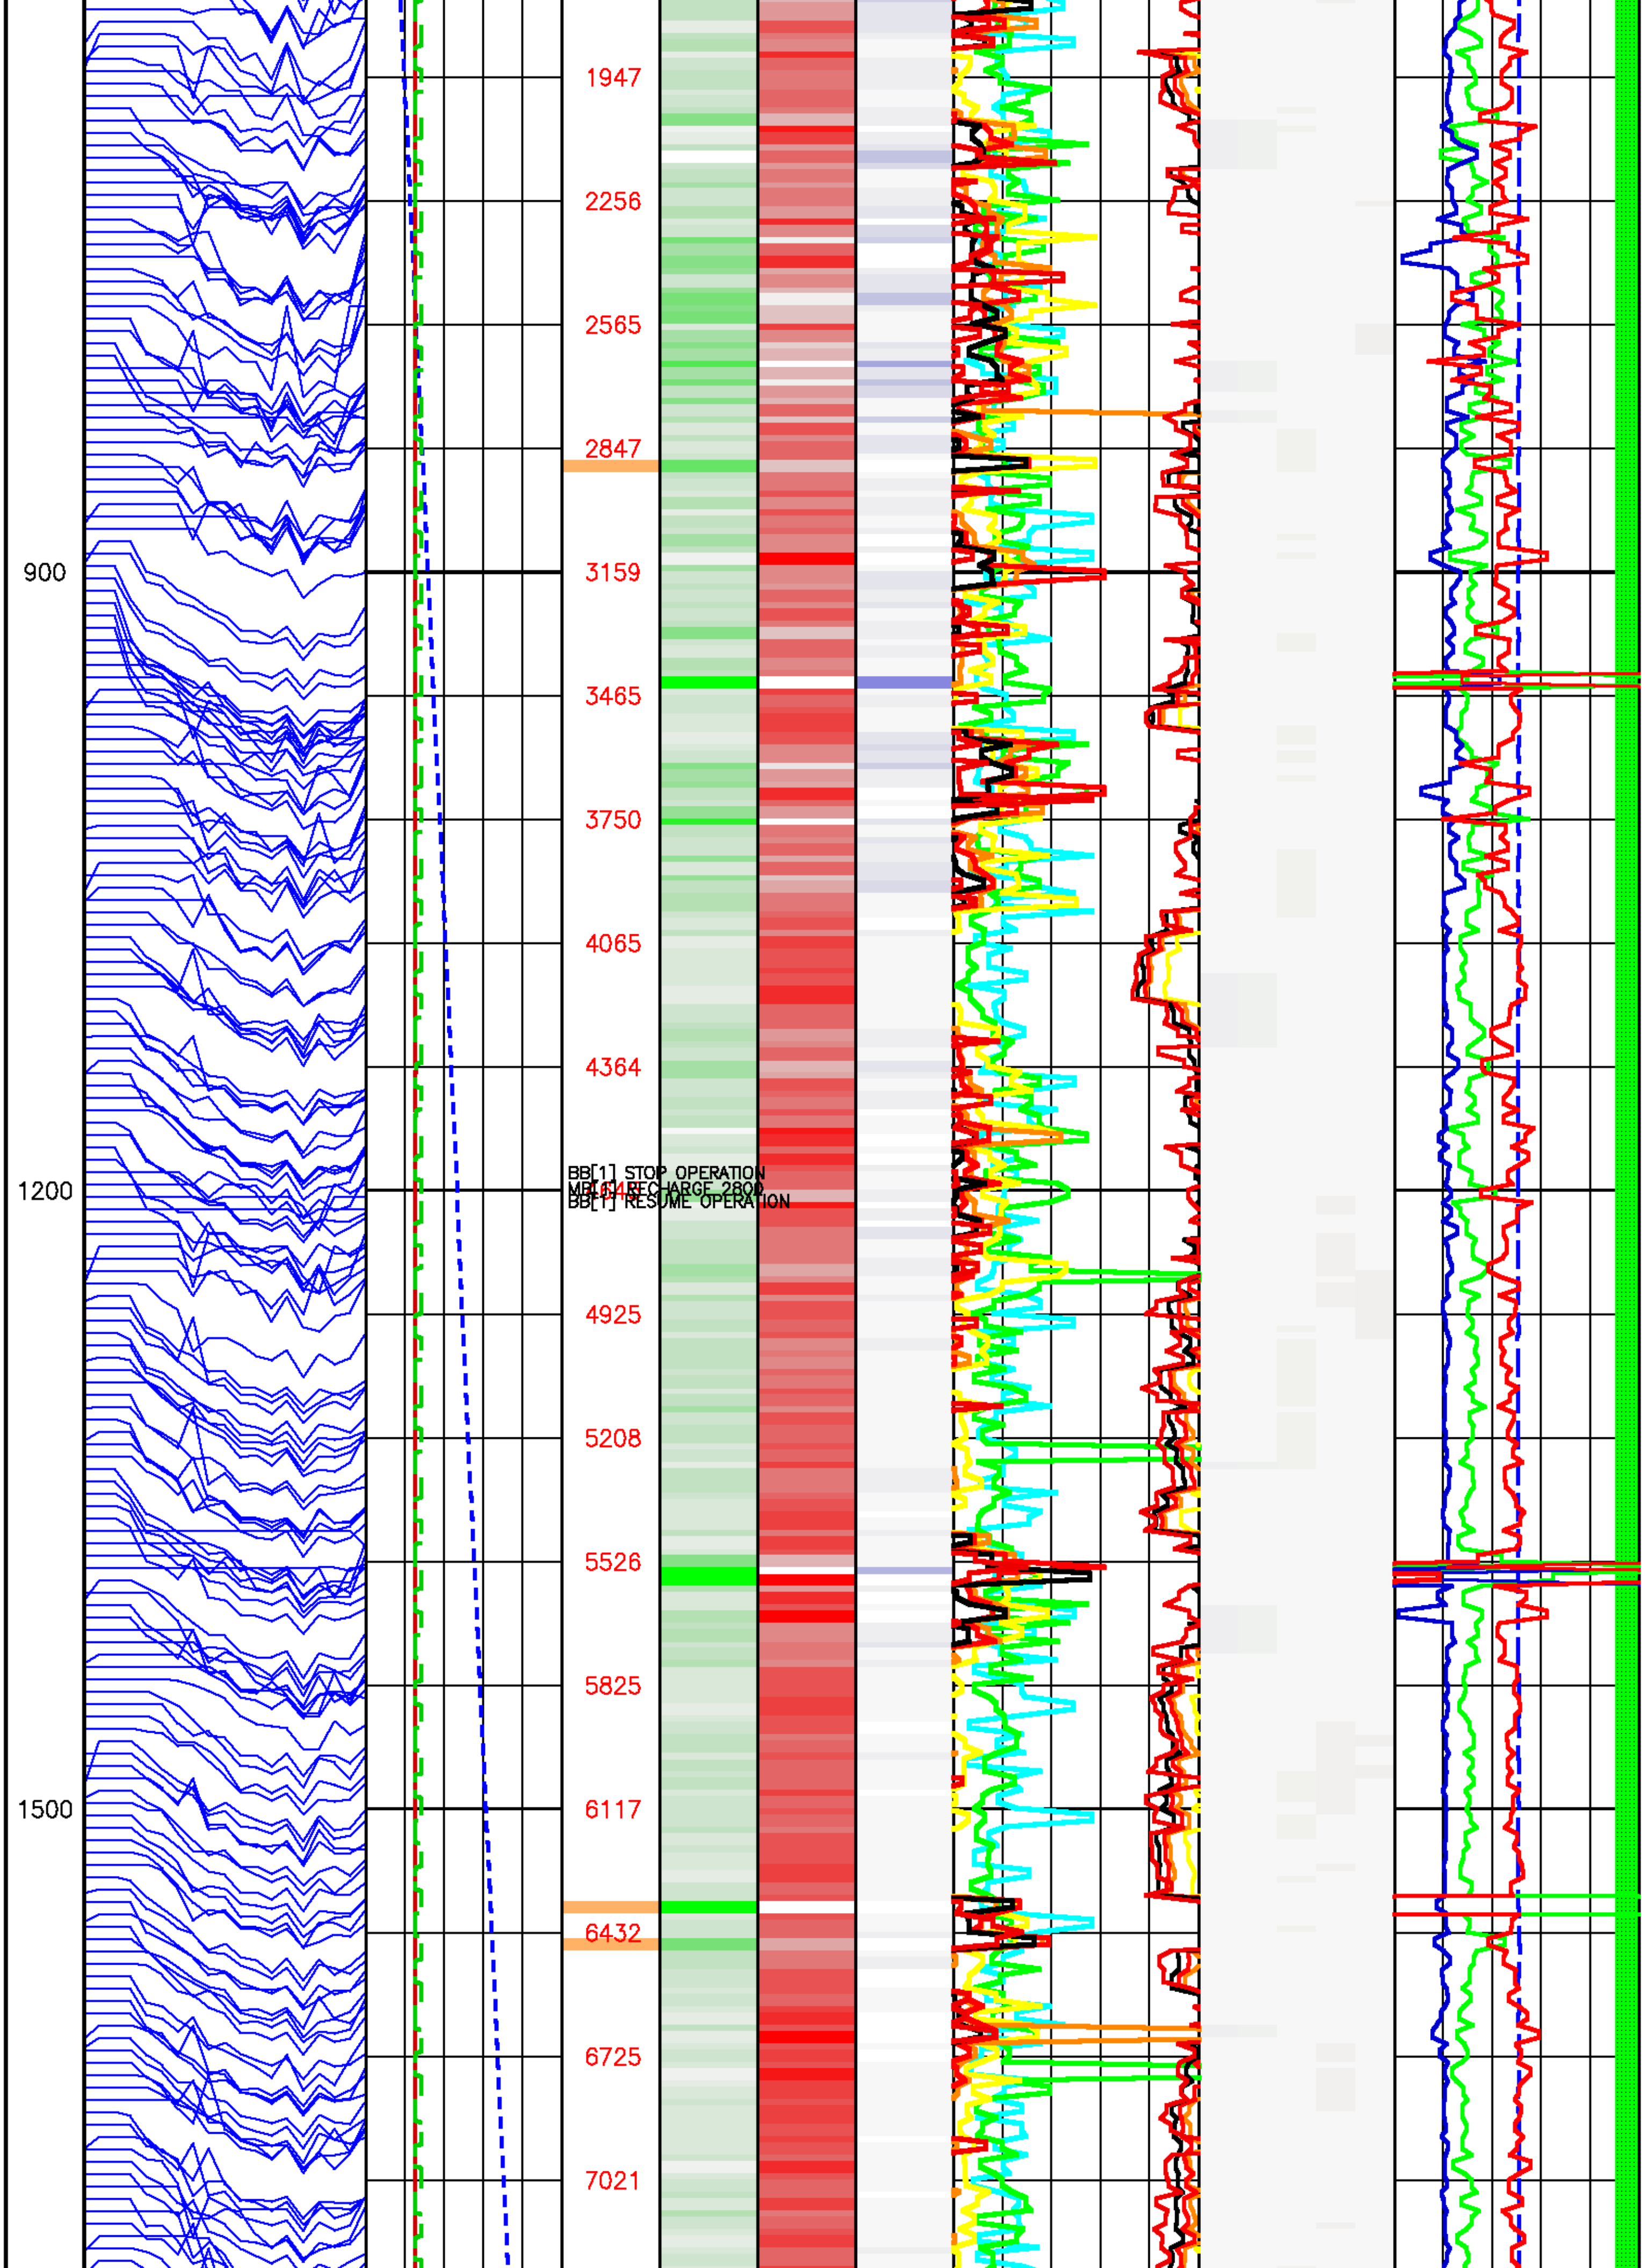

900
1200
1500
1947
2256
2565
2847
3159
3465
3750
4065
4364
BB[1] STOP OPERATION
RECHARGE 2800
BB[1] RESUME OPERATION
4925
5208
5526
5825
6117
6432
6725
7021

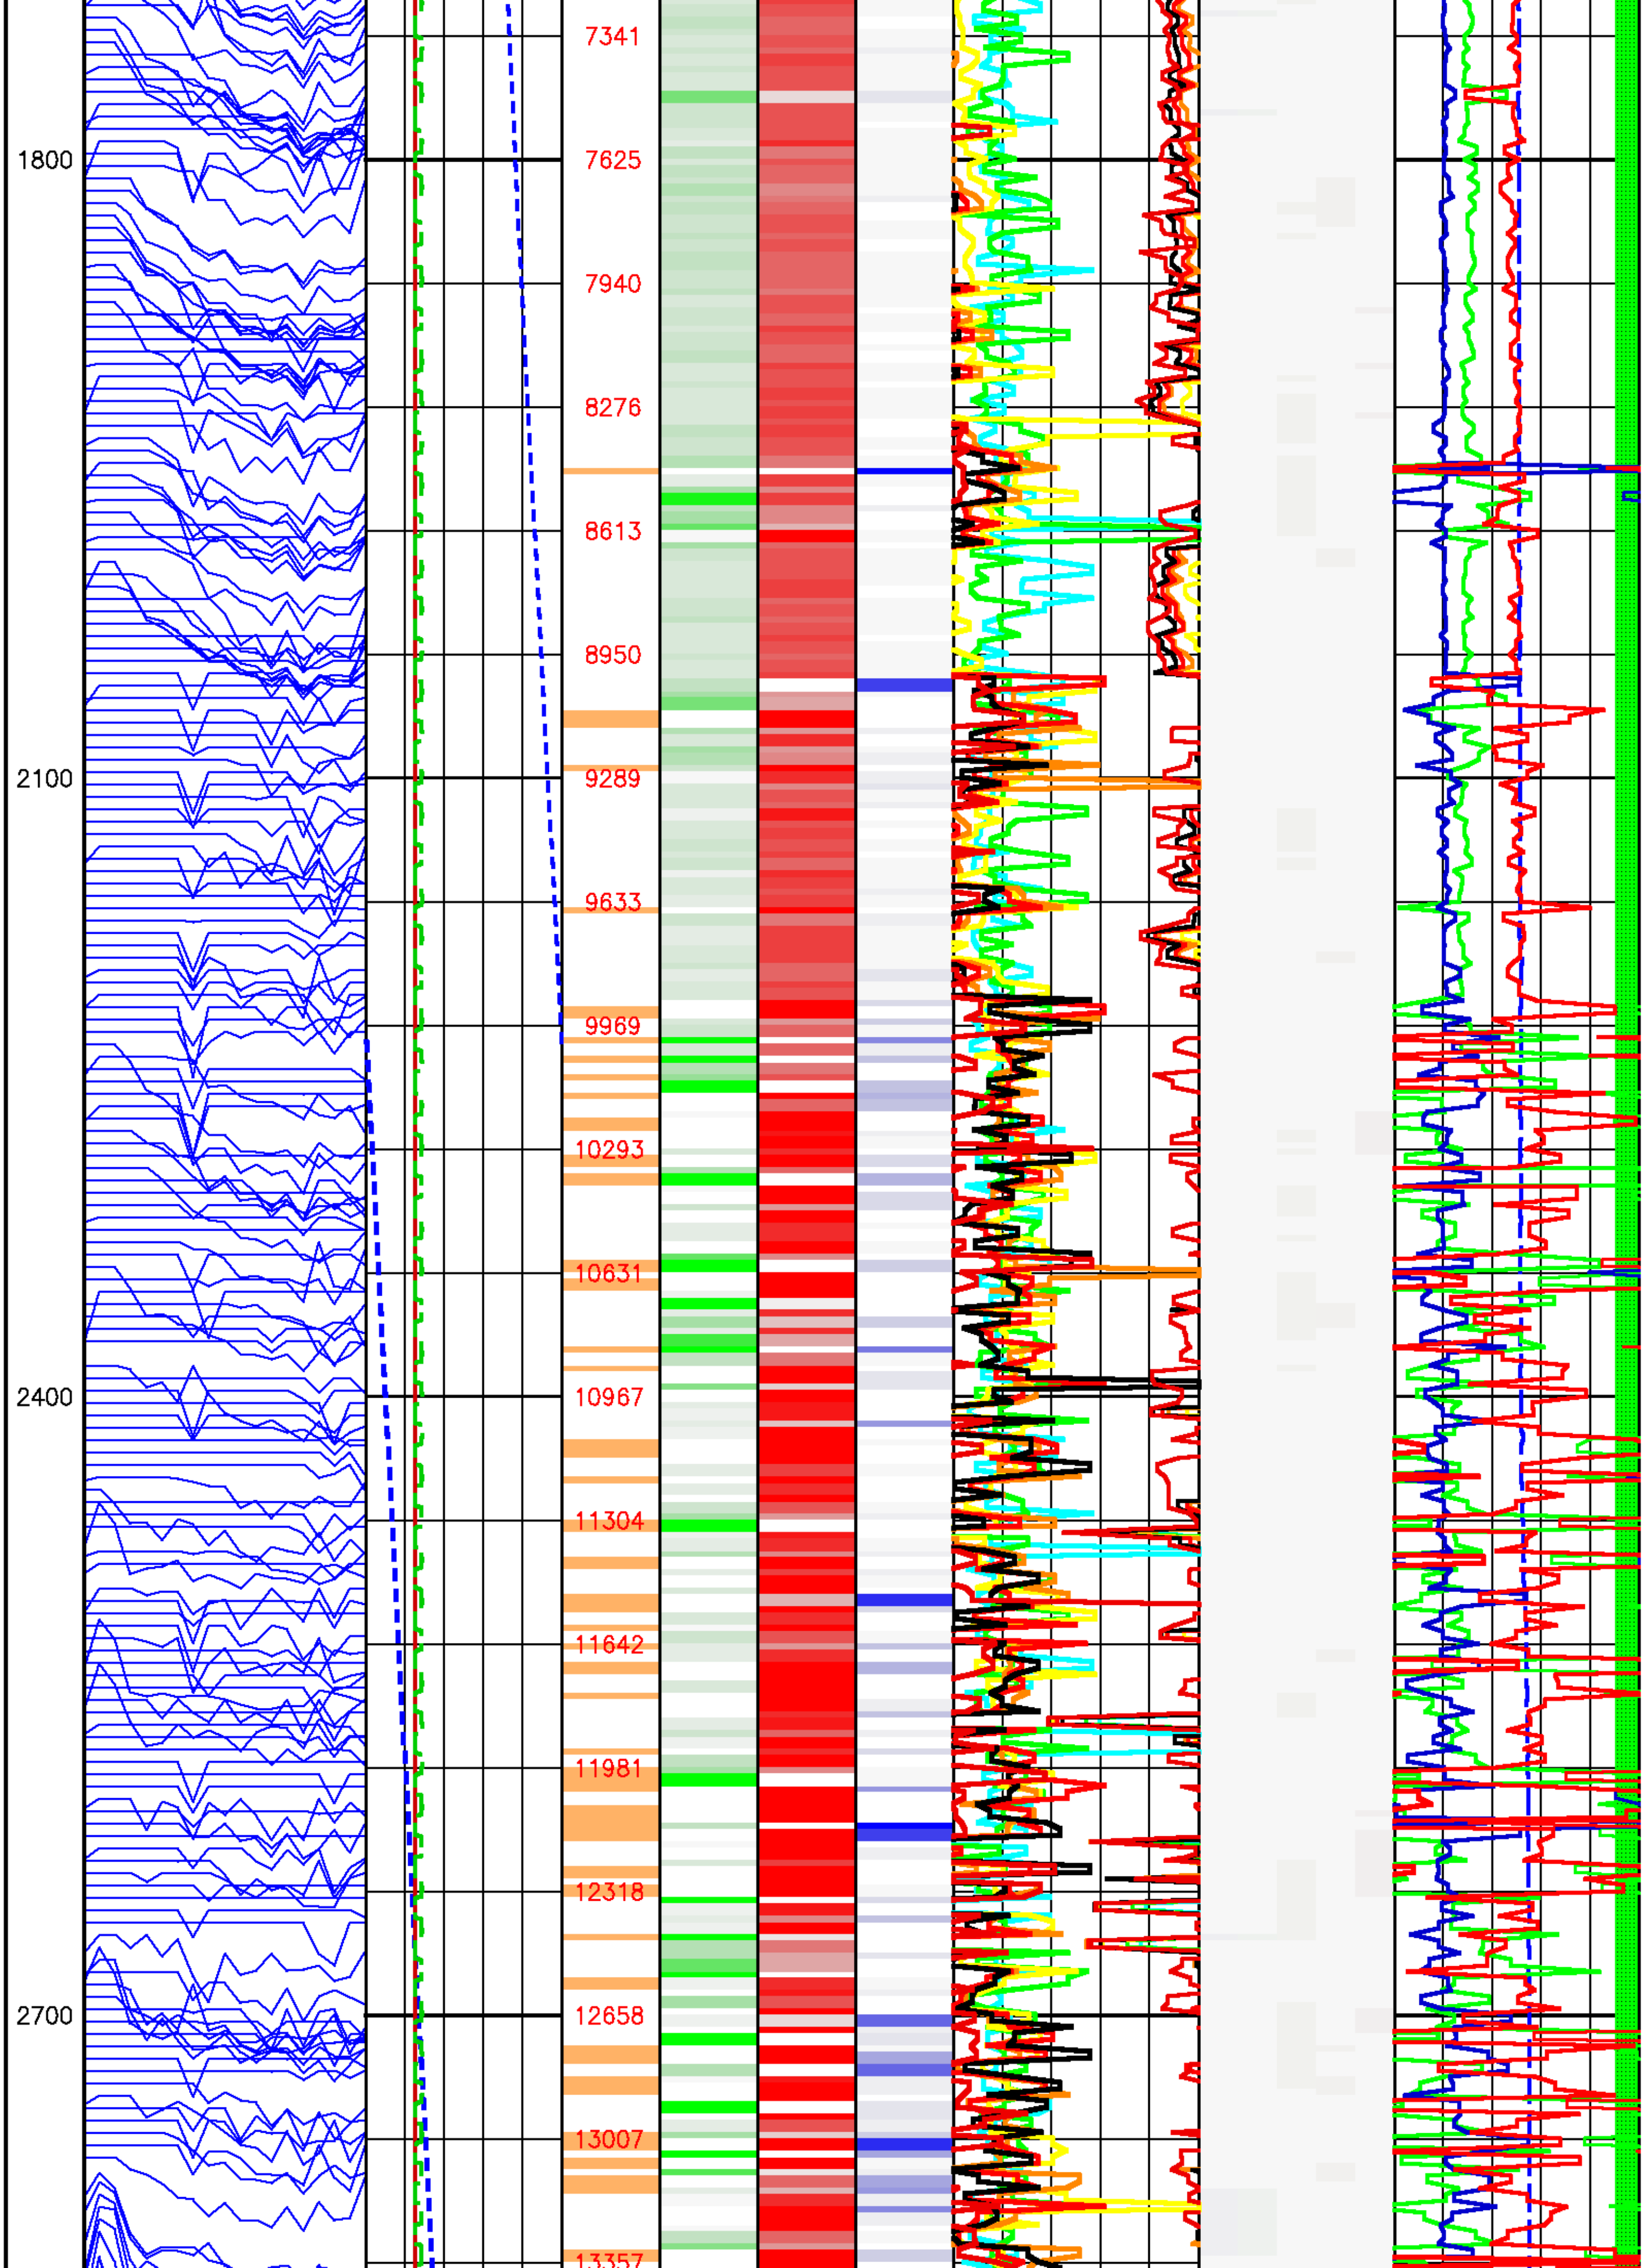
1800
2100
2400
2700
7341
7625
7940
8276
8613
8950
9289
9633
9969
10293
10631
10967
11304
11642
11981
12318
12658
13007
13357

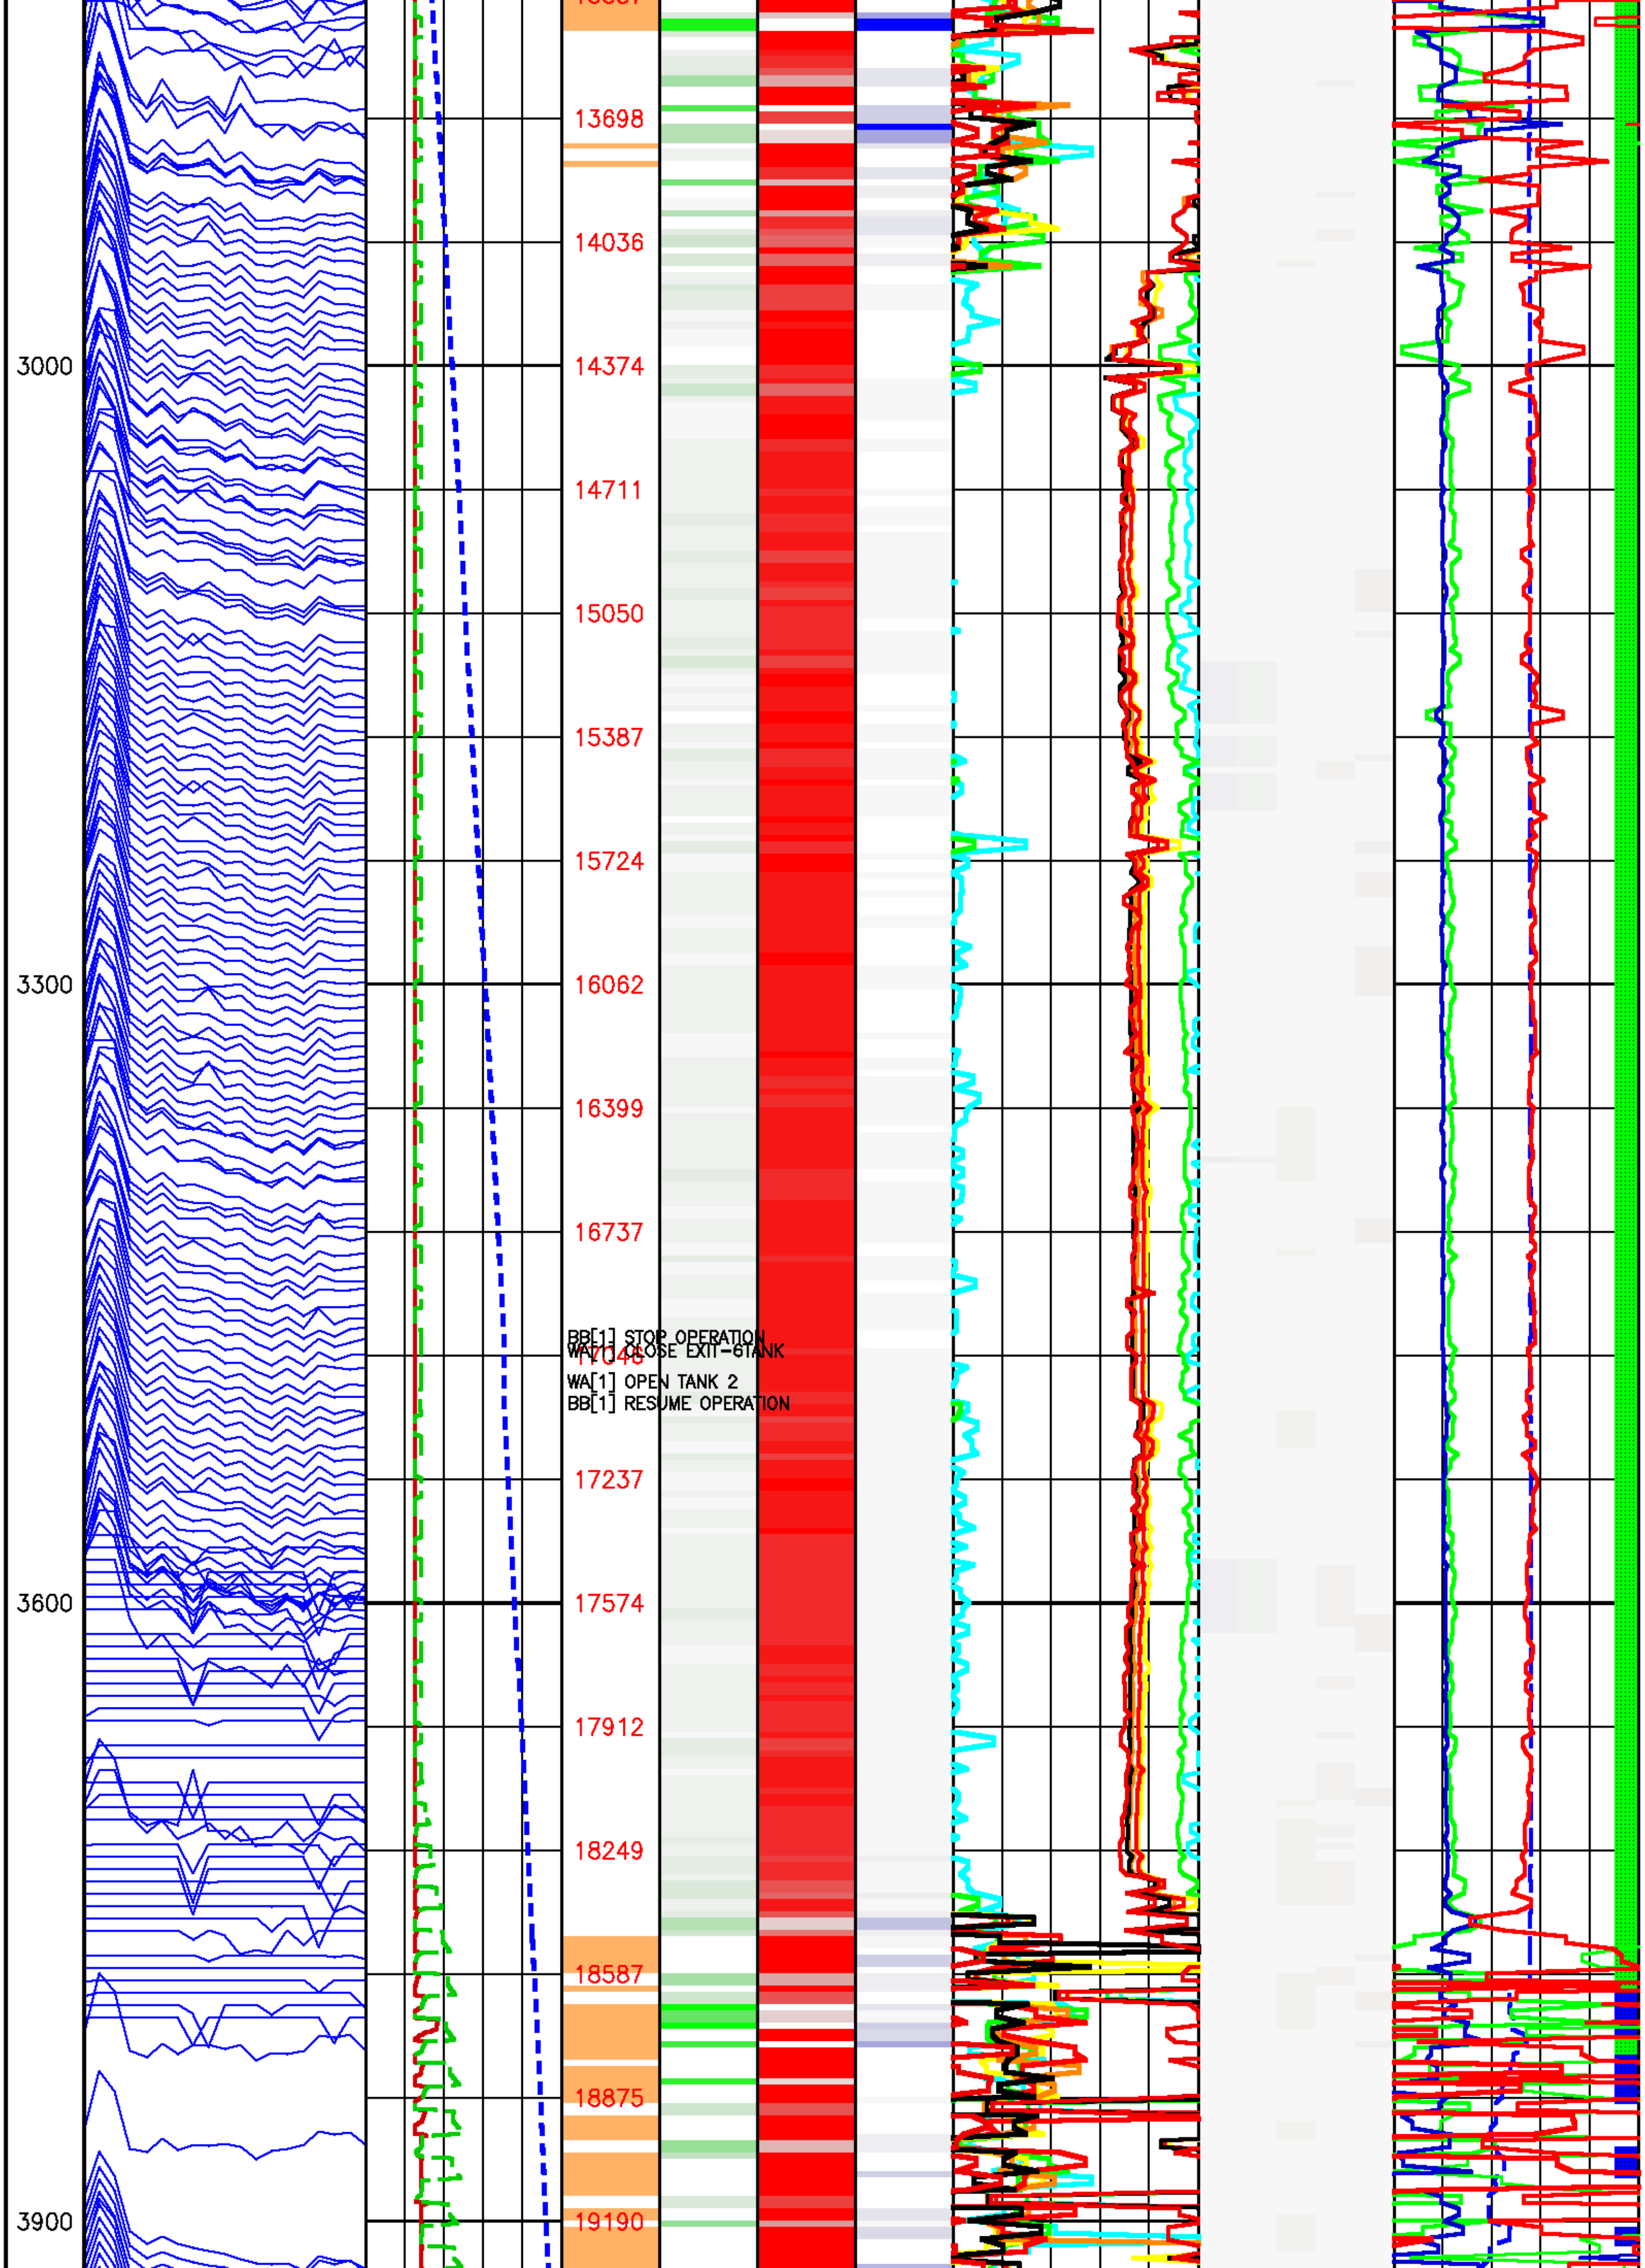

13698
14036
3000
14374
14711
15050
15387
15724
3300
16062
16399
16737
BB[1] STOP OPERATION
WA[1] CLOSE EXIT-6TANK
WA[1] OPEN TANK 2
BB[1] RESUME OPERATION
17237
3600
17574
17912
18249
18587
18875
3900
19190

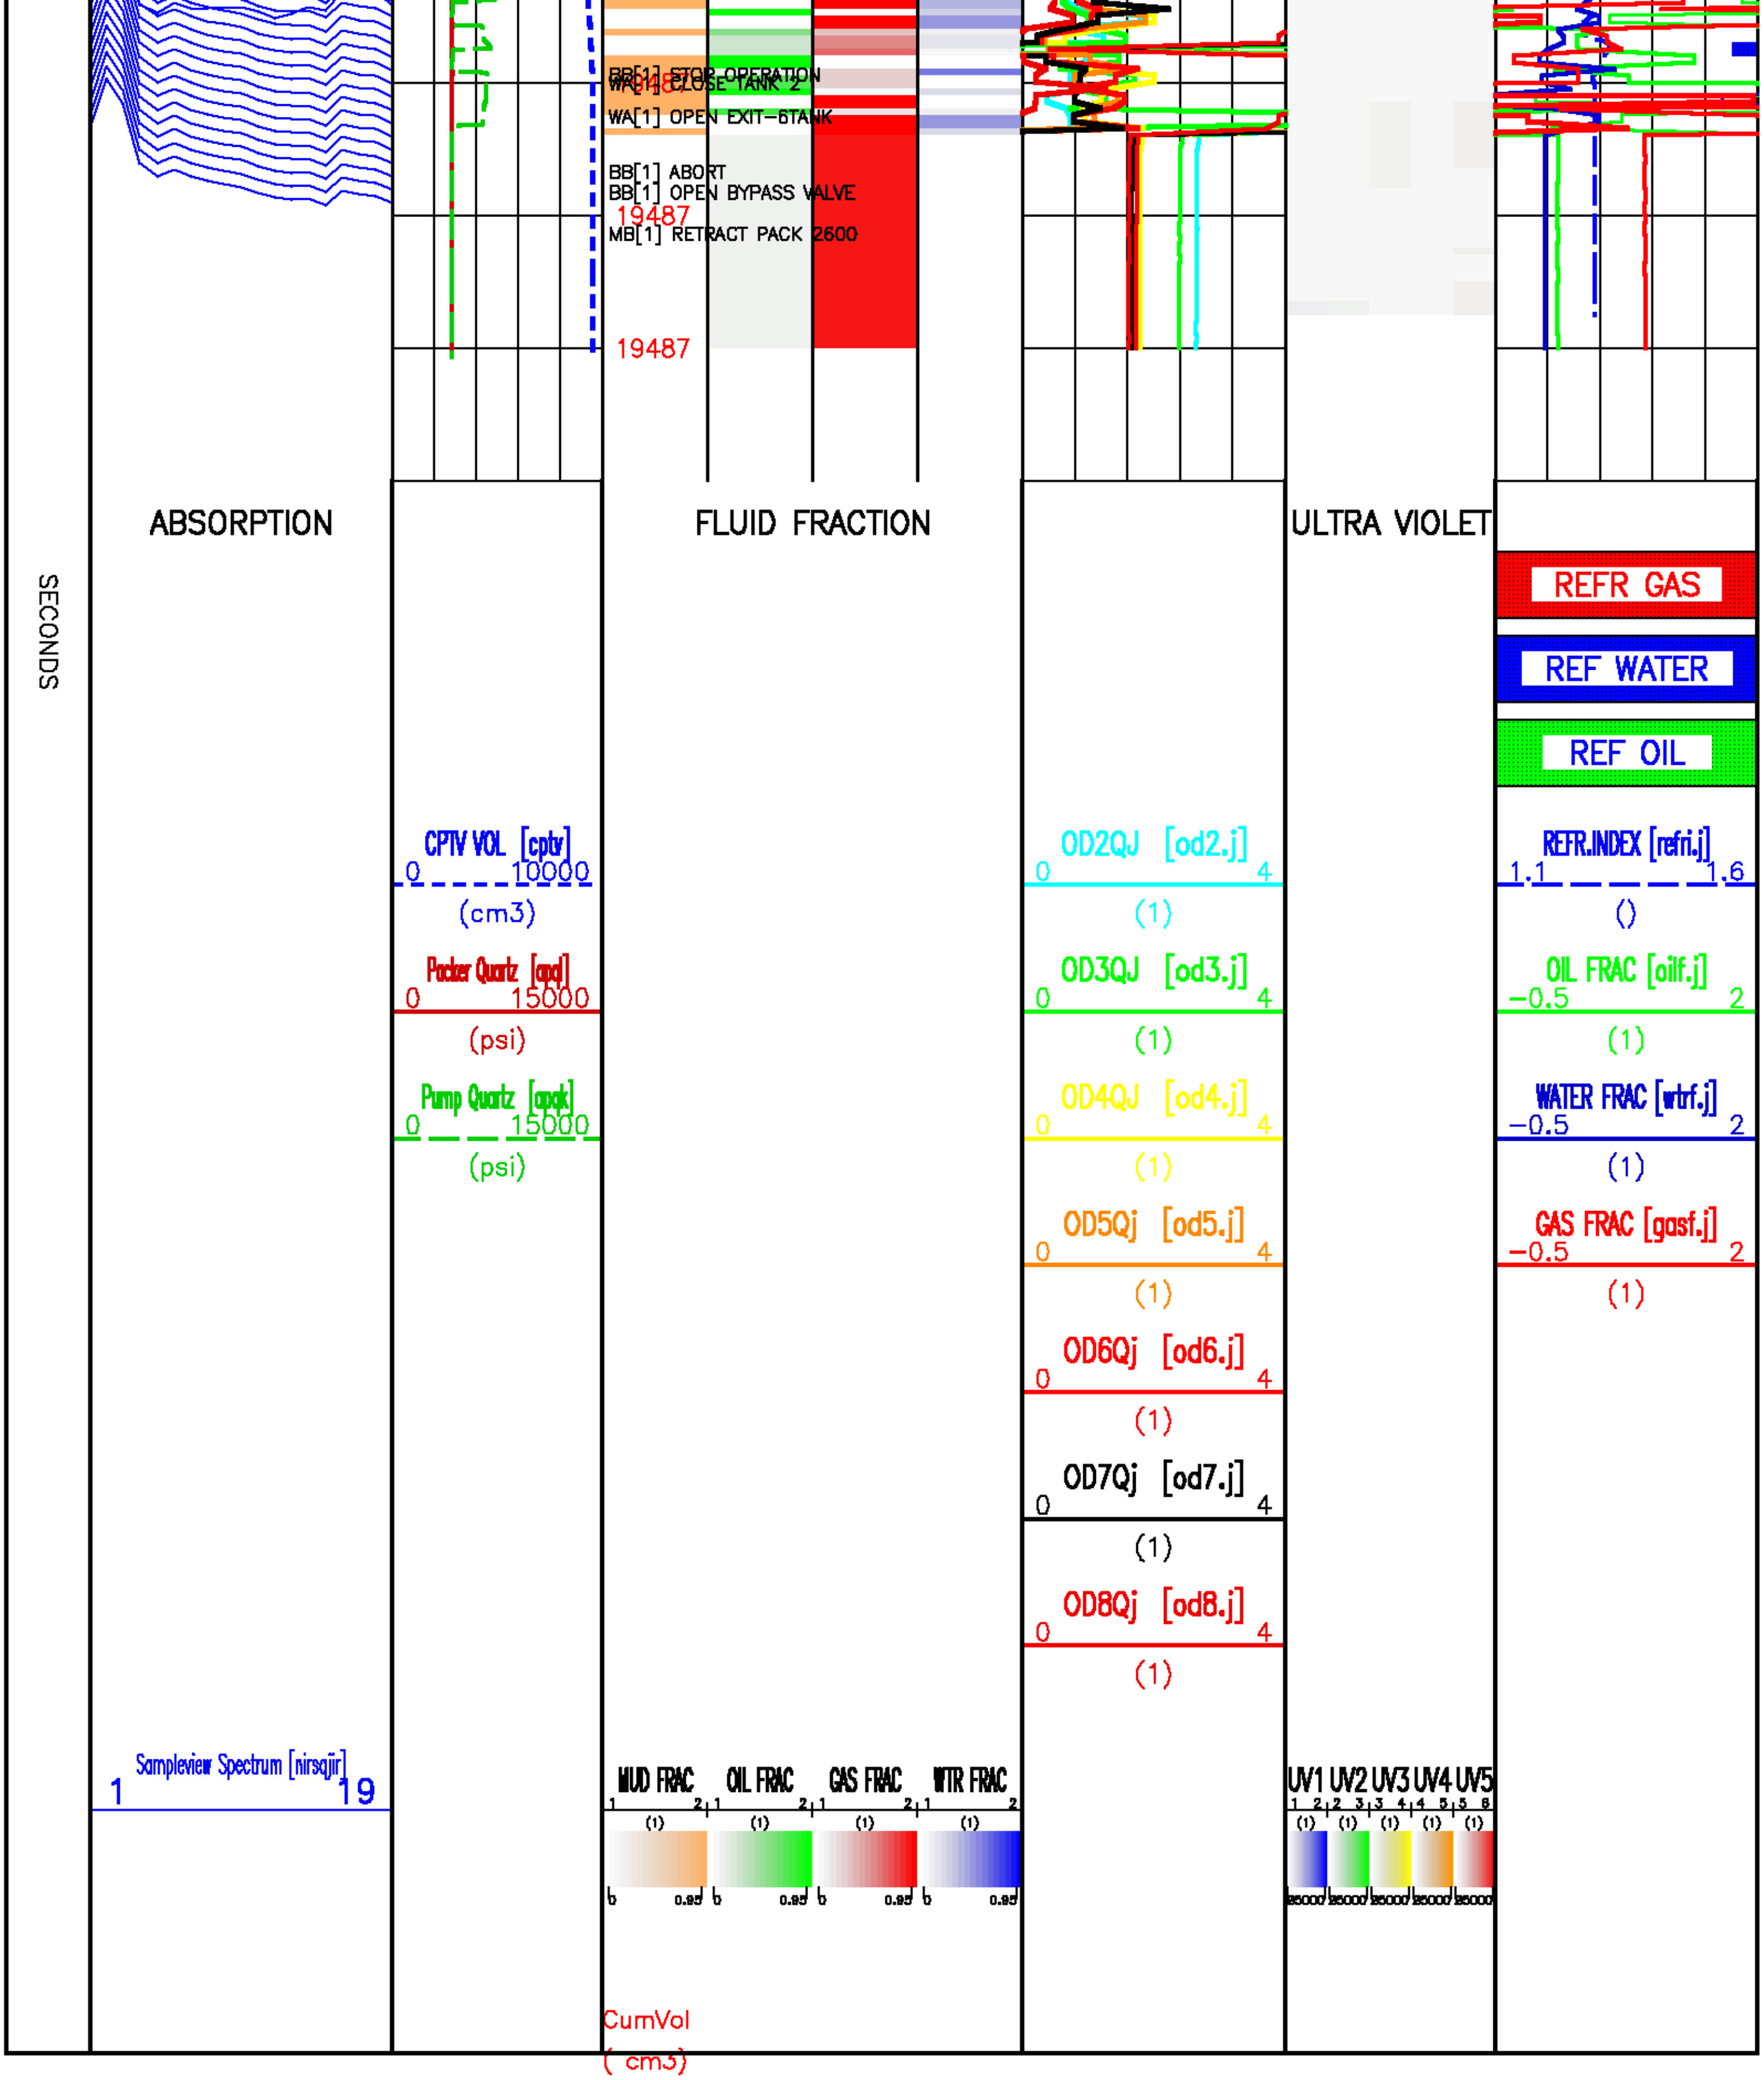

Sample Tests – Level 52 Tool Instance 1
MD 2414.3 m TVD 2414.3 m

PRESSURE HISTORY

Depth MD 2414.3 m TVD 2414.3 m

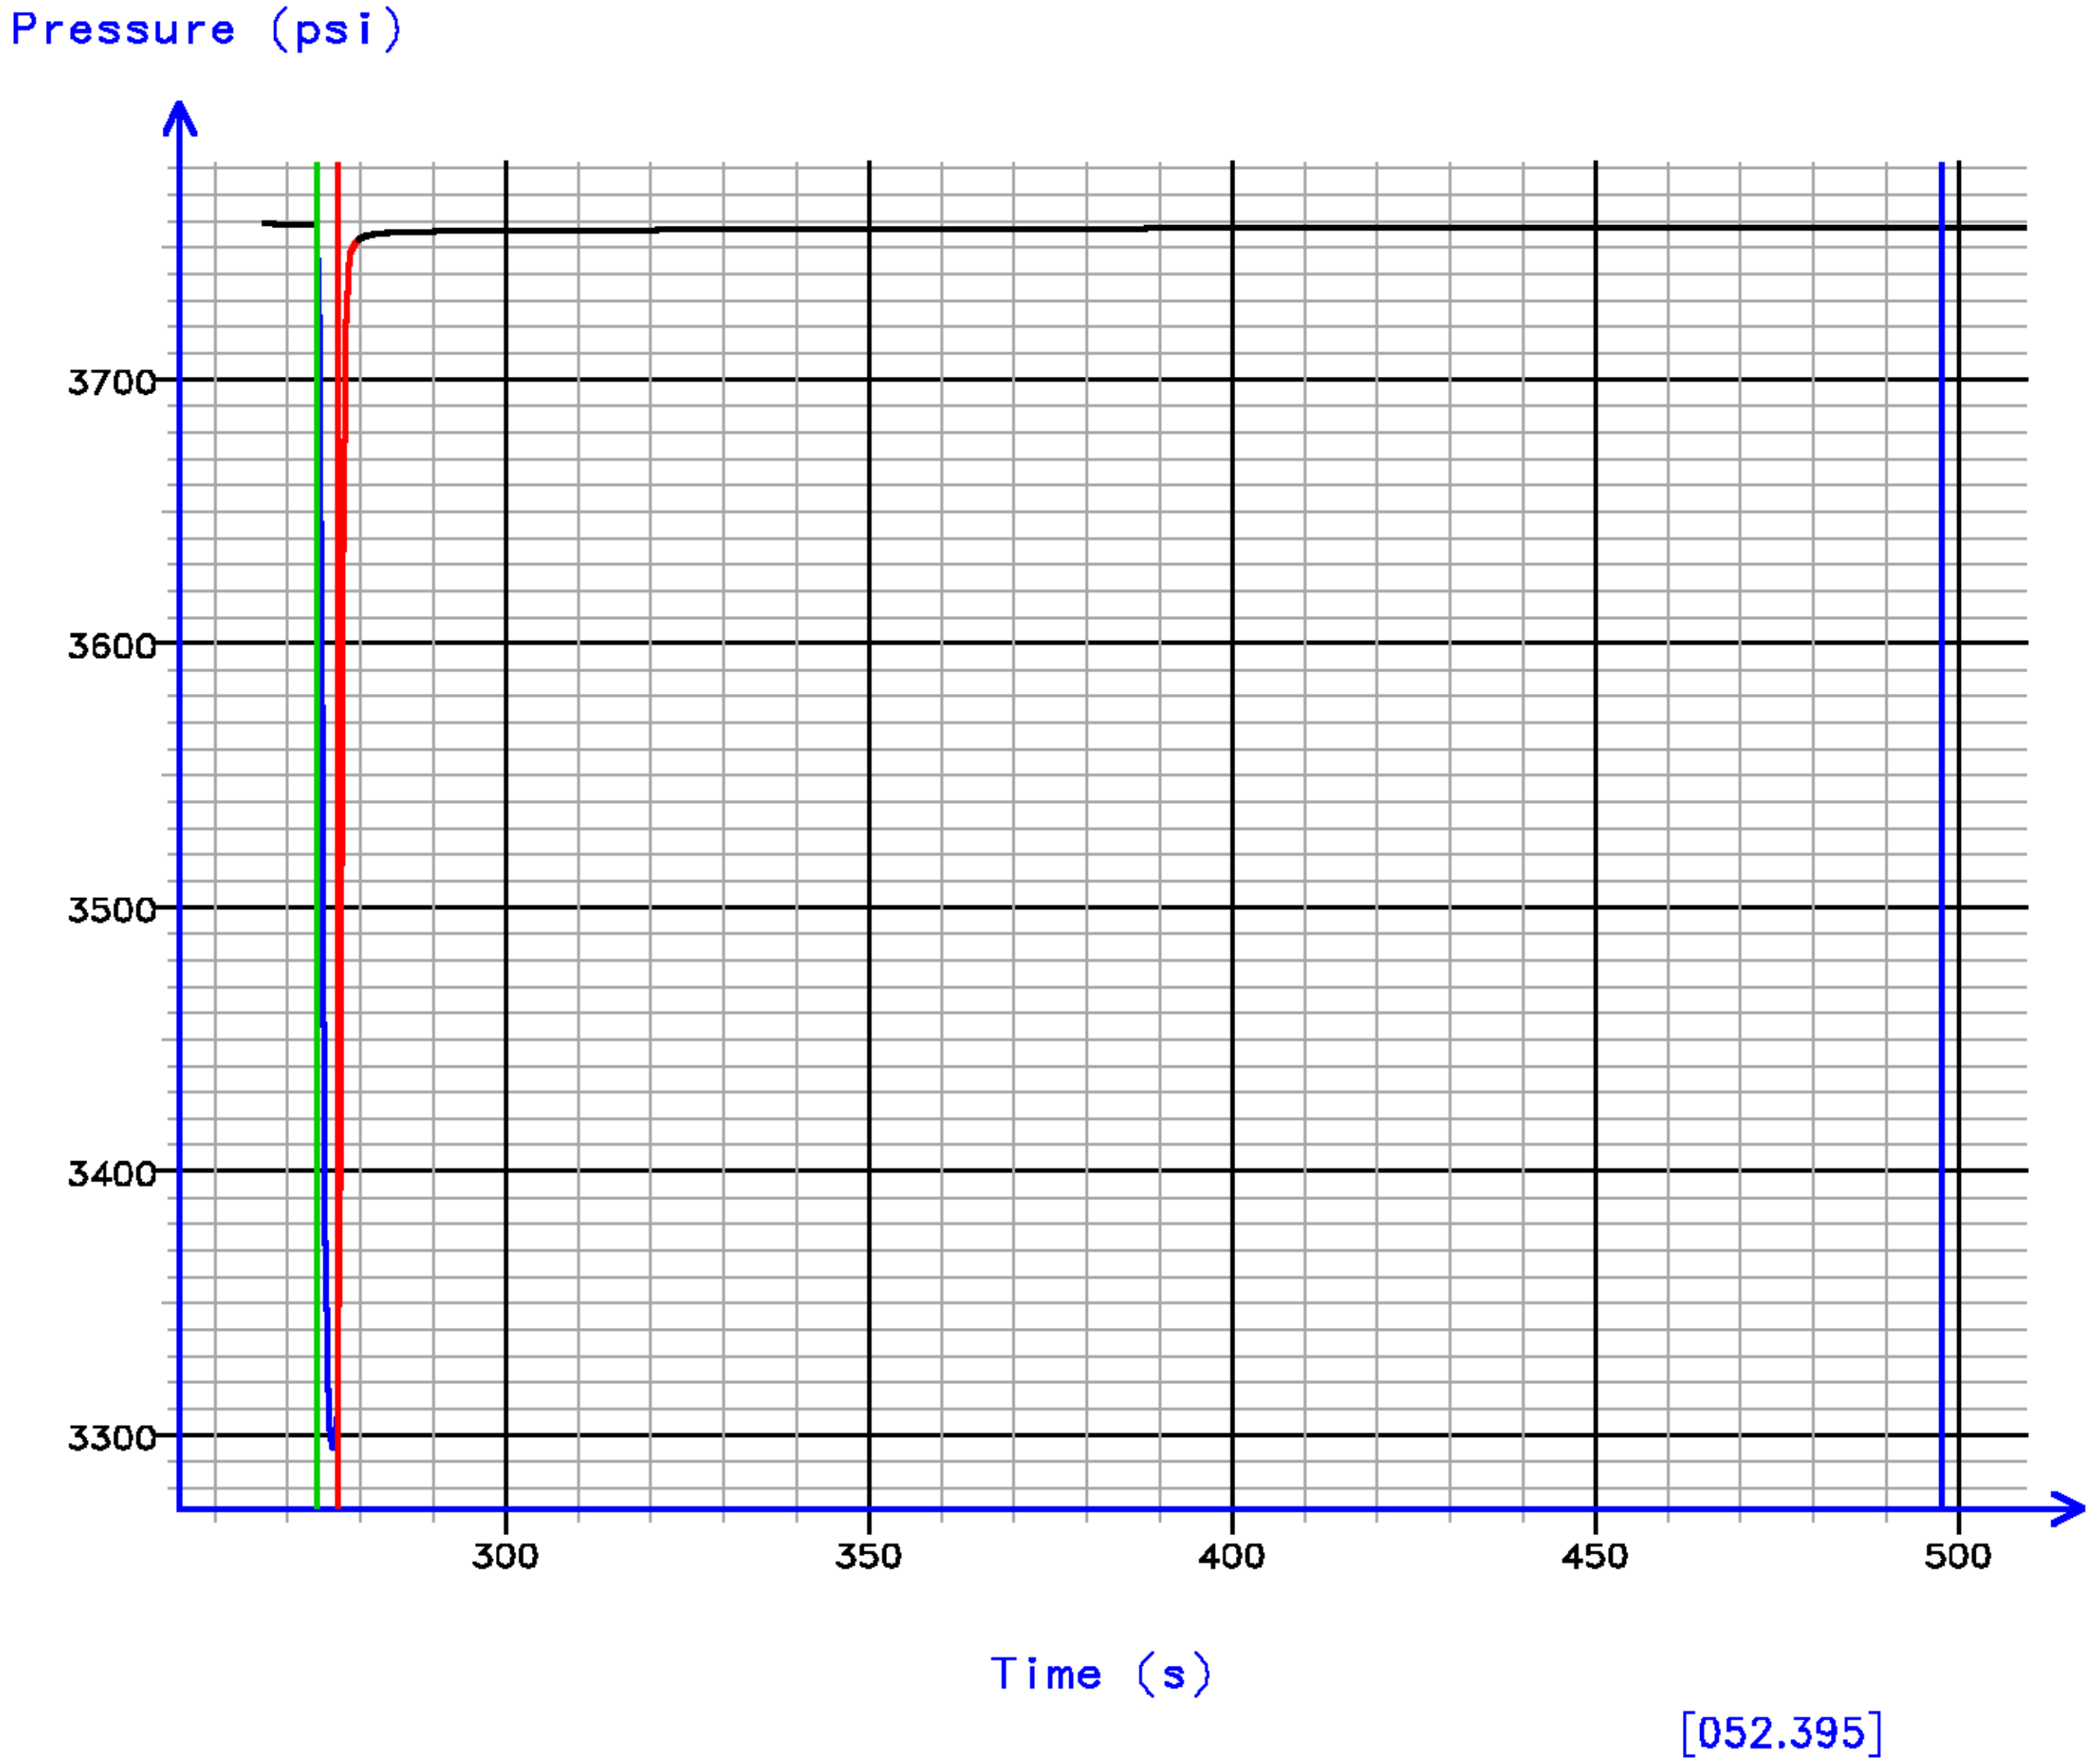

FLOW RATE ANALYSIS

Depth MD 2414.3 m TVD 2414.3 m

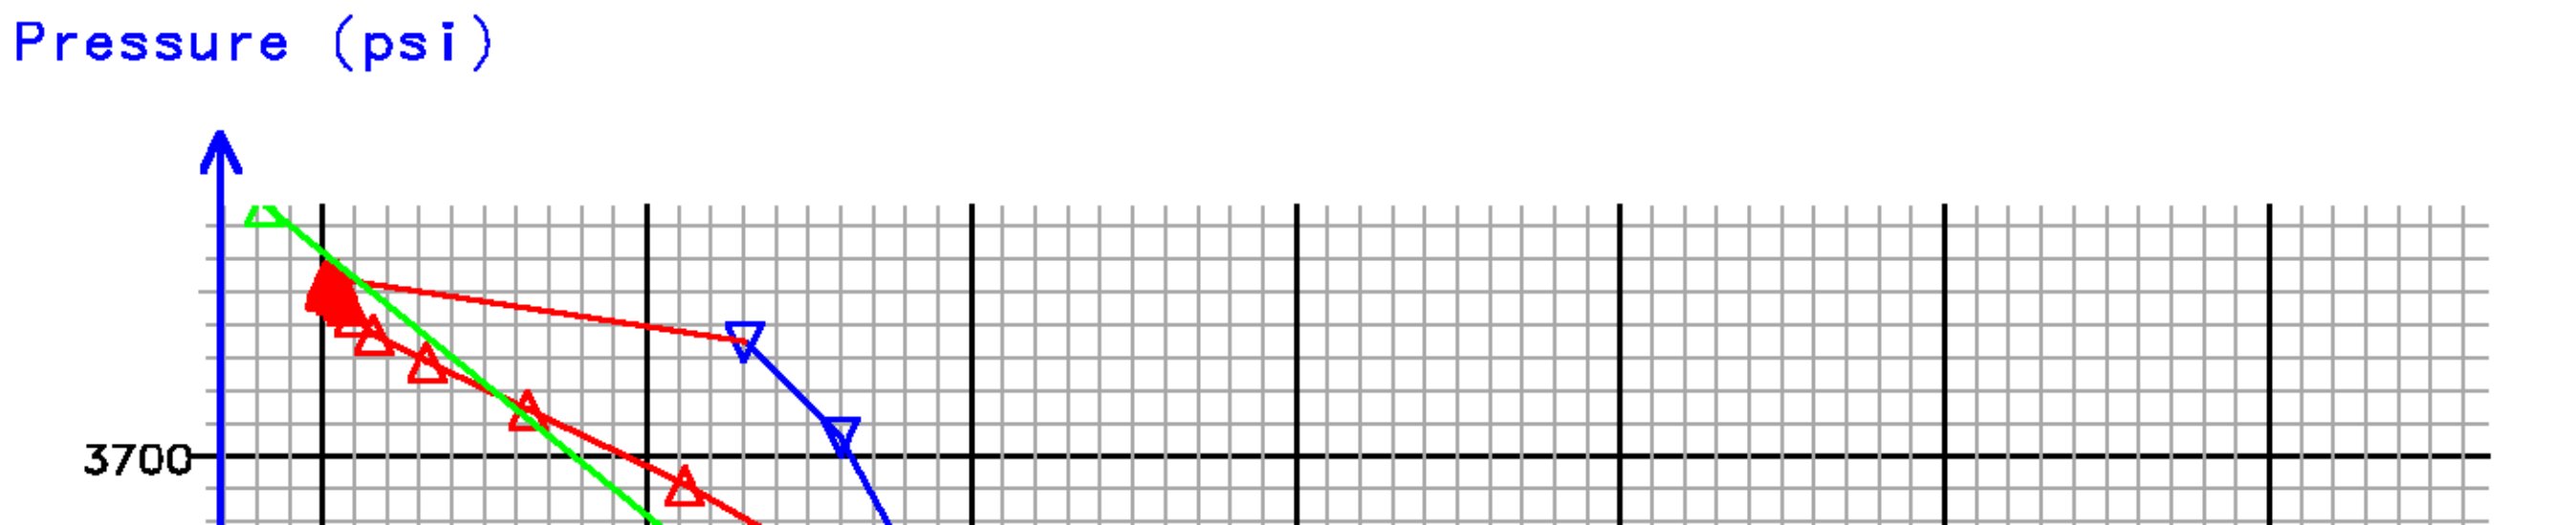

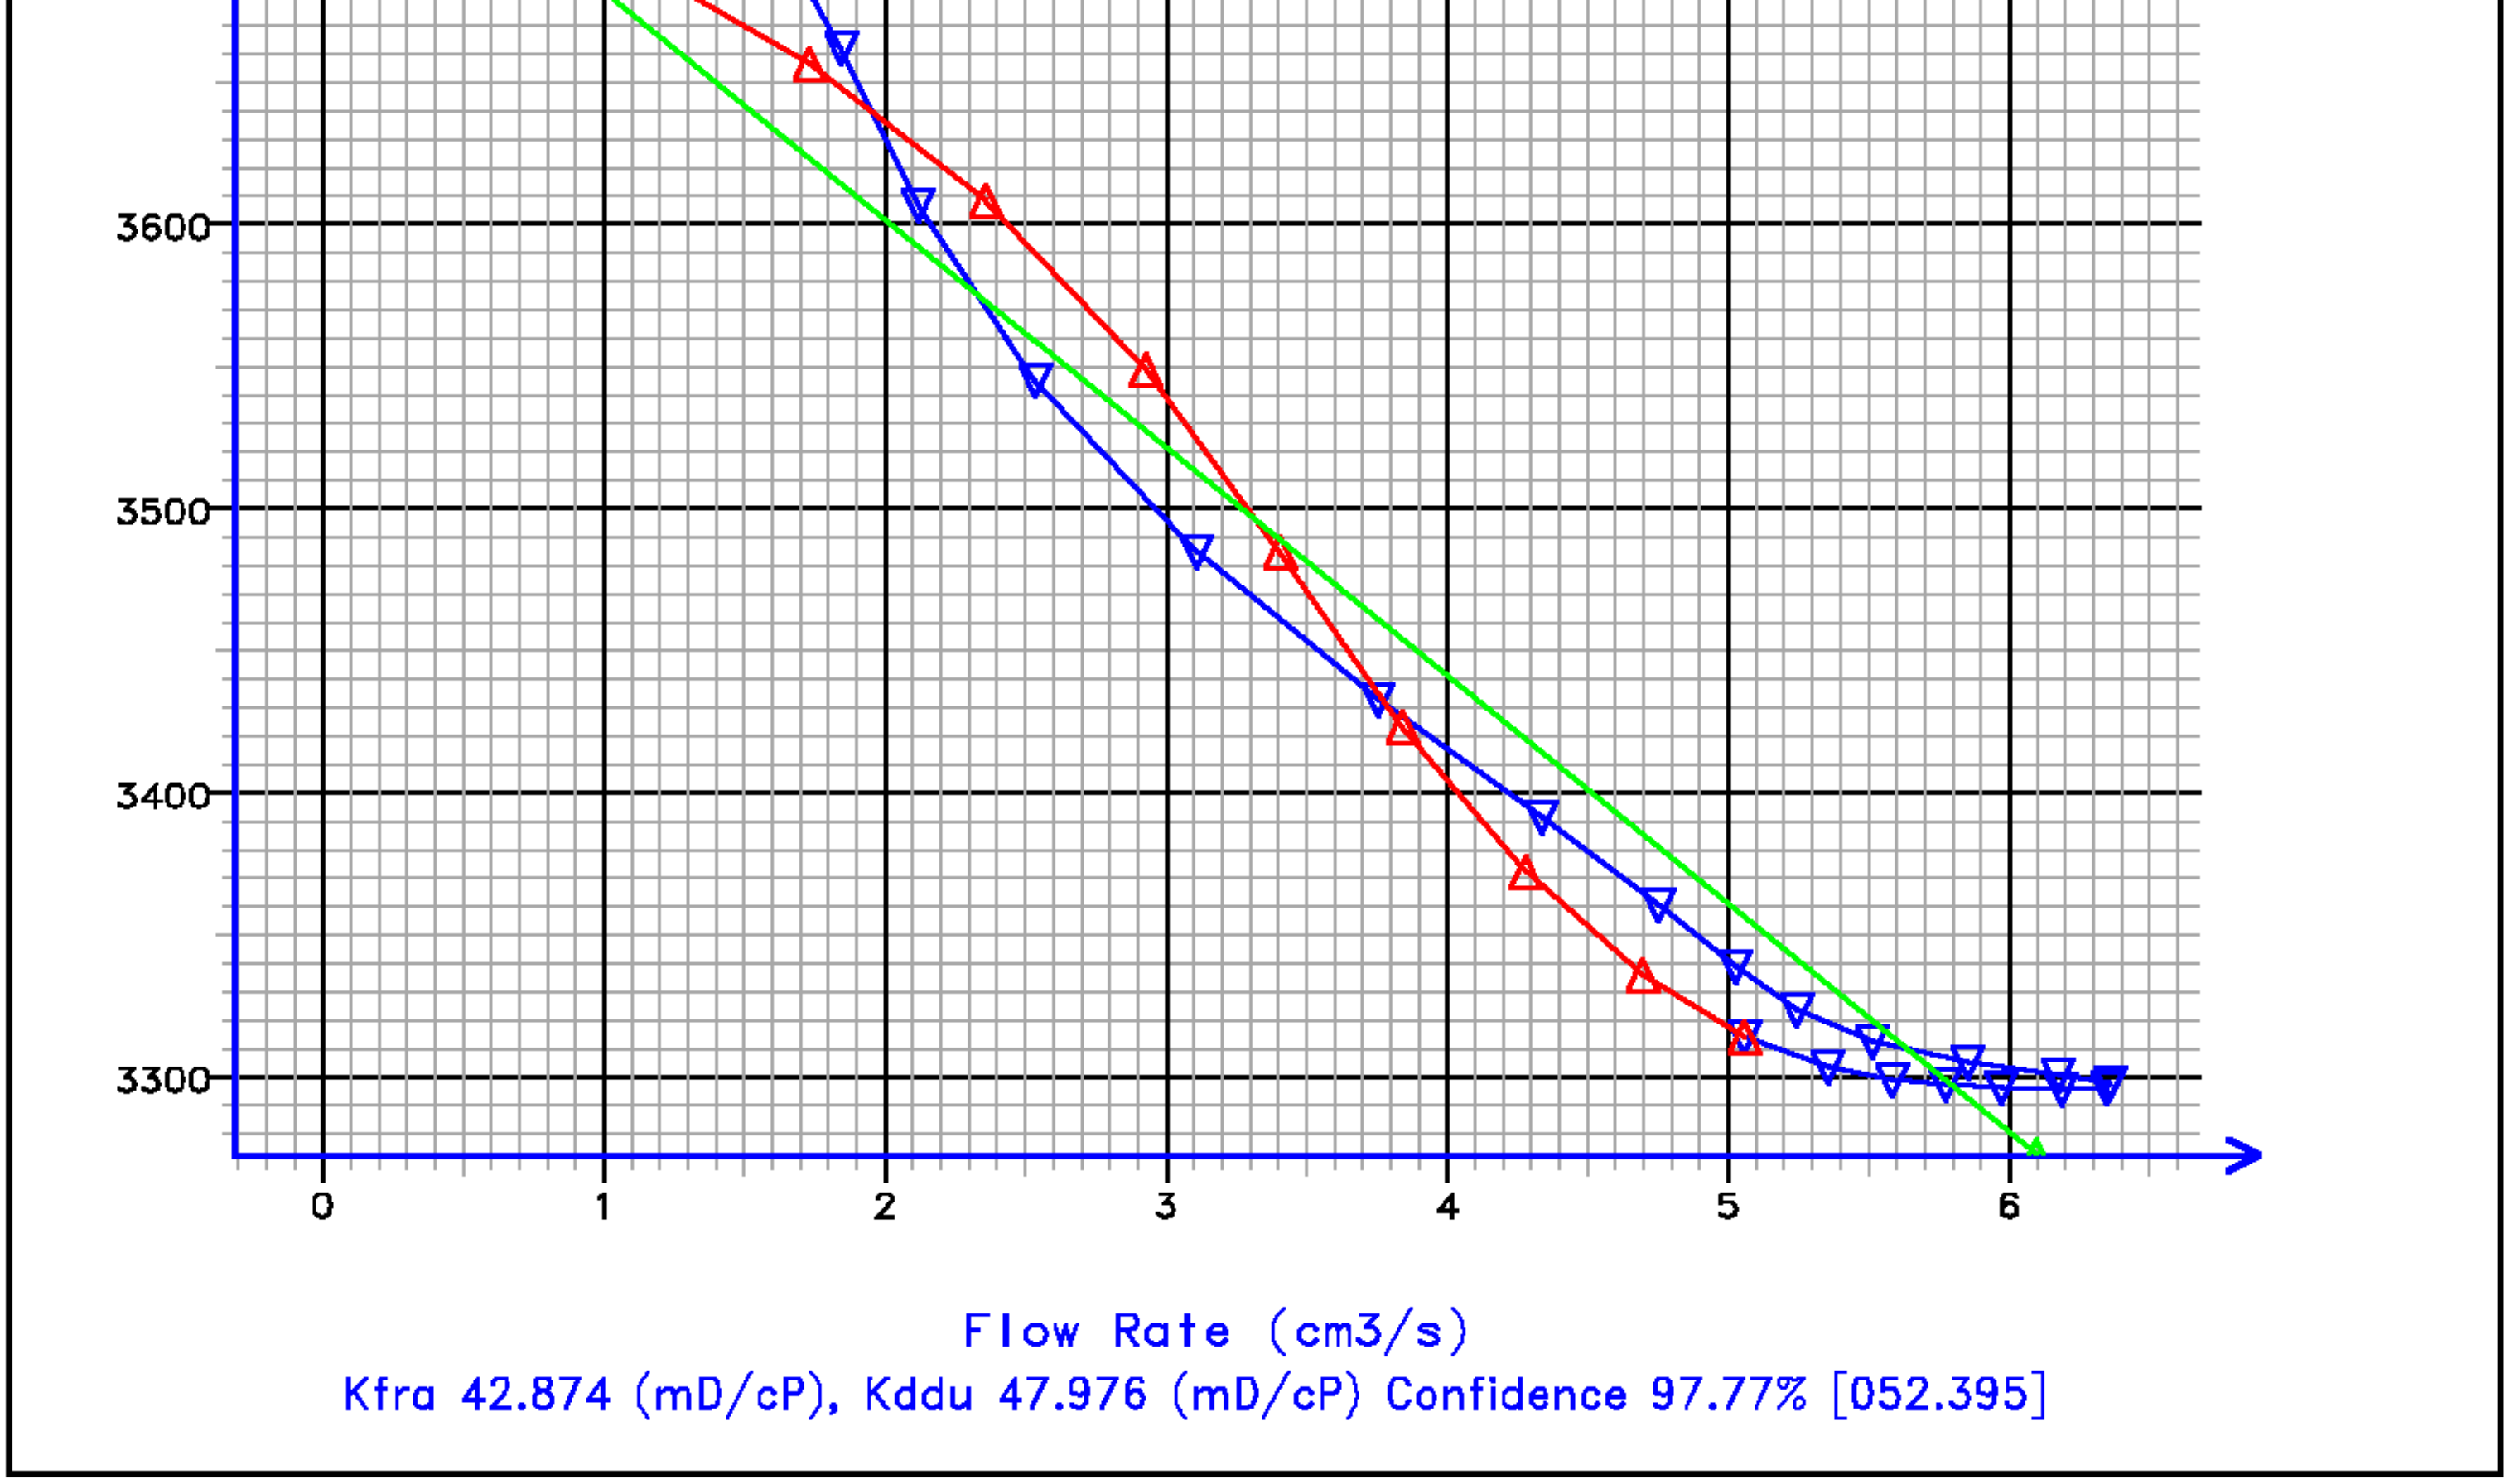

Data File : j800g62.aff
Presentation: gpi_rci-b6xx.log

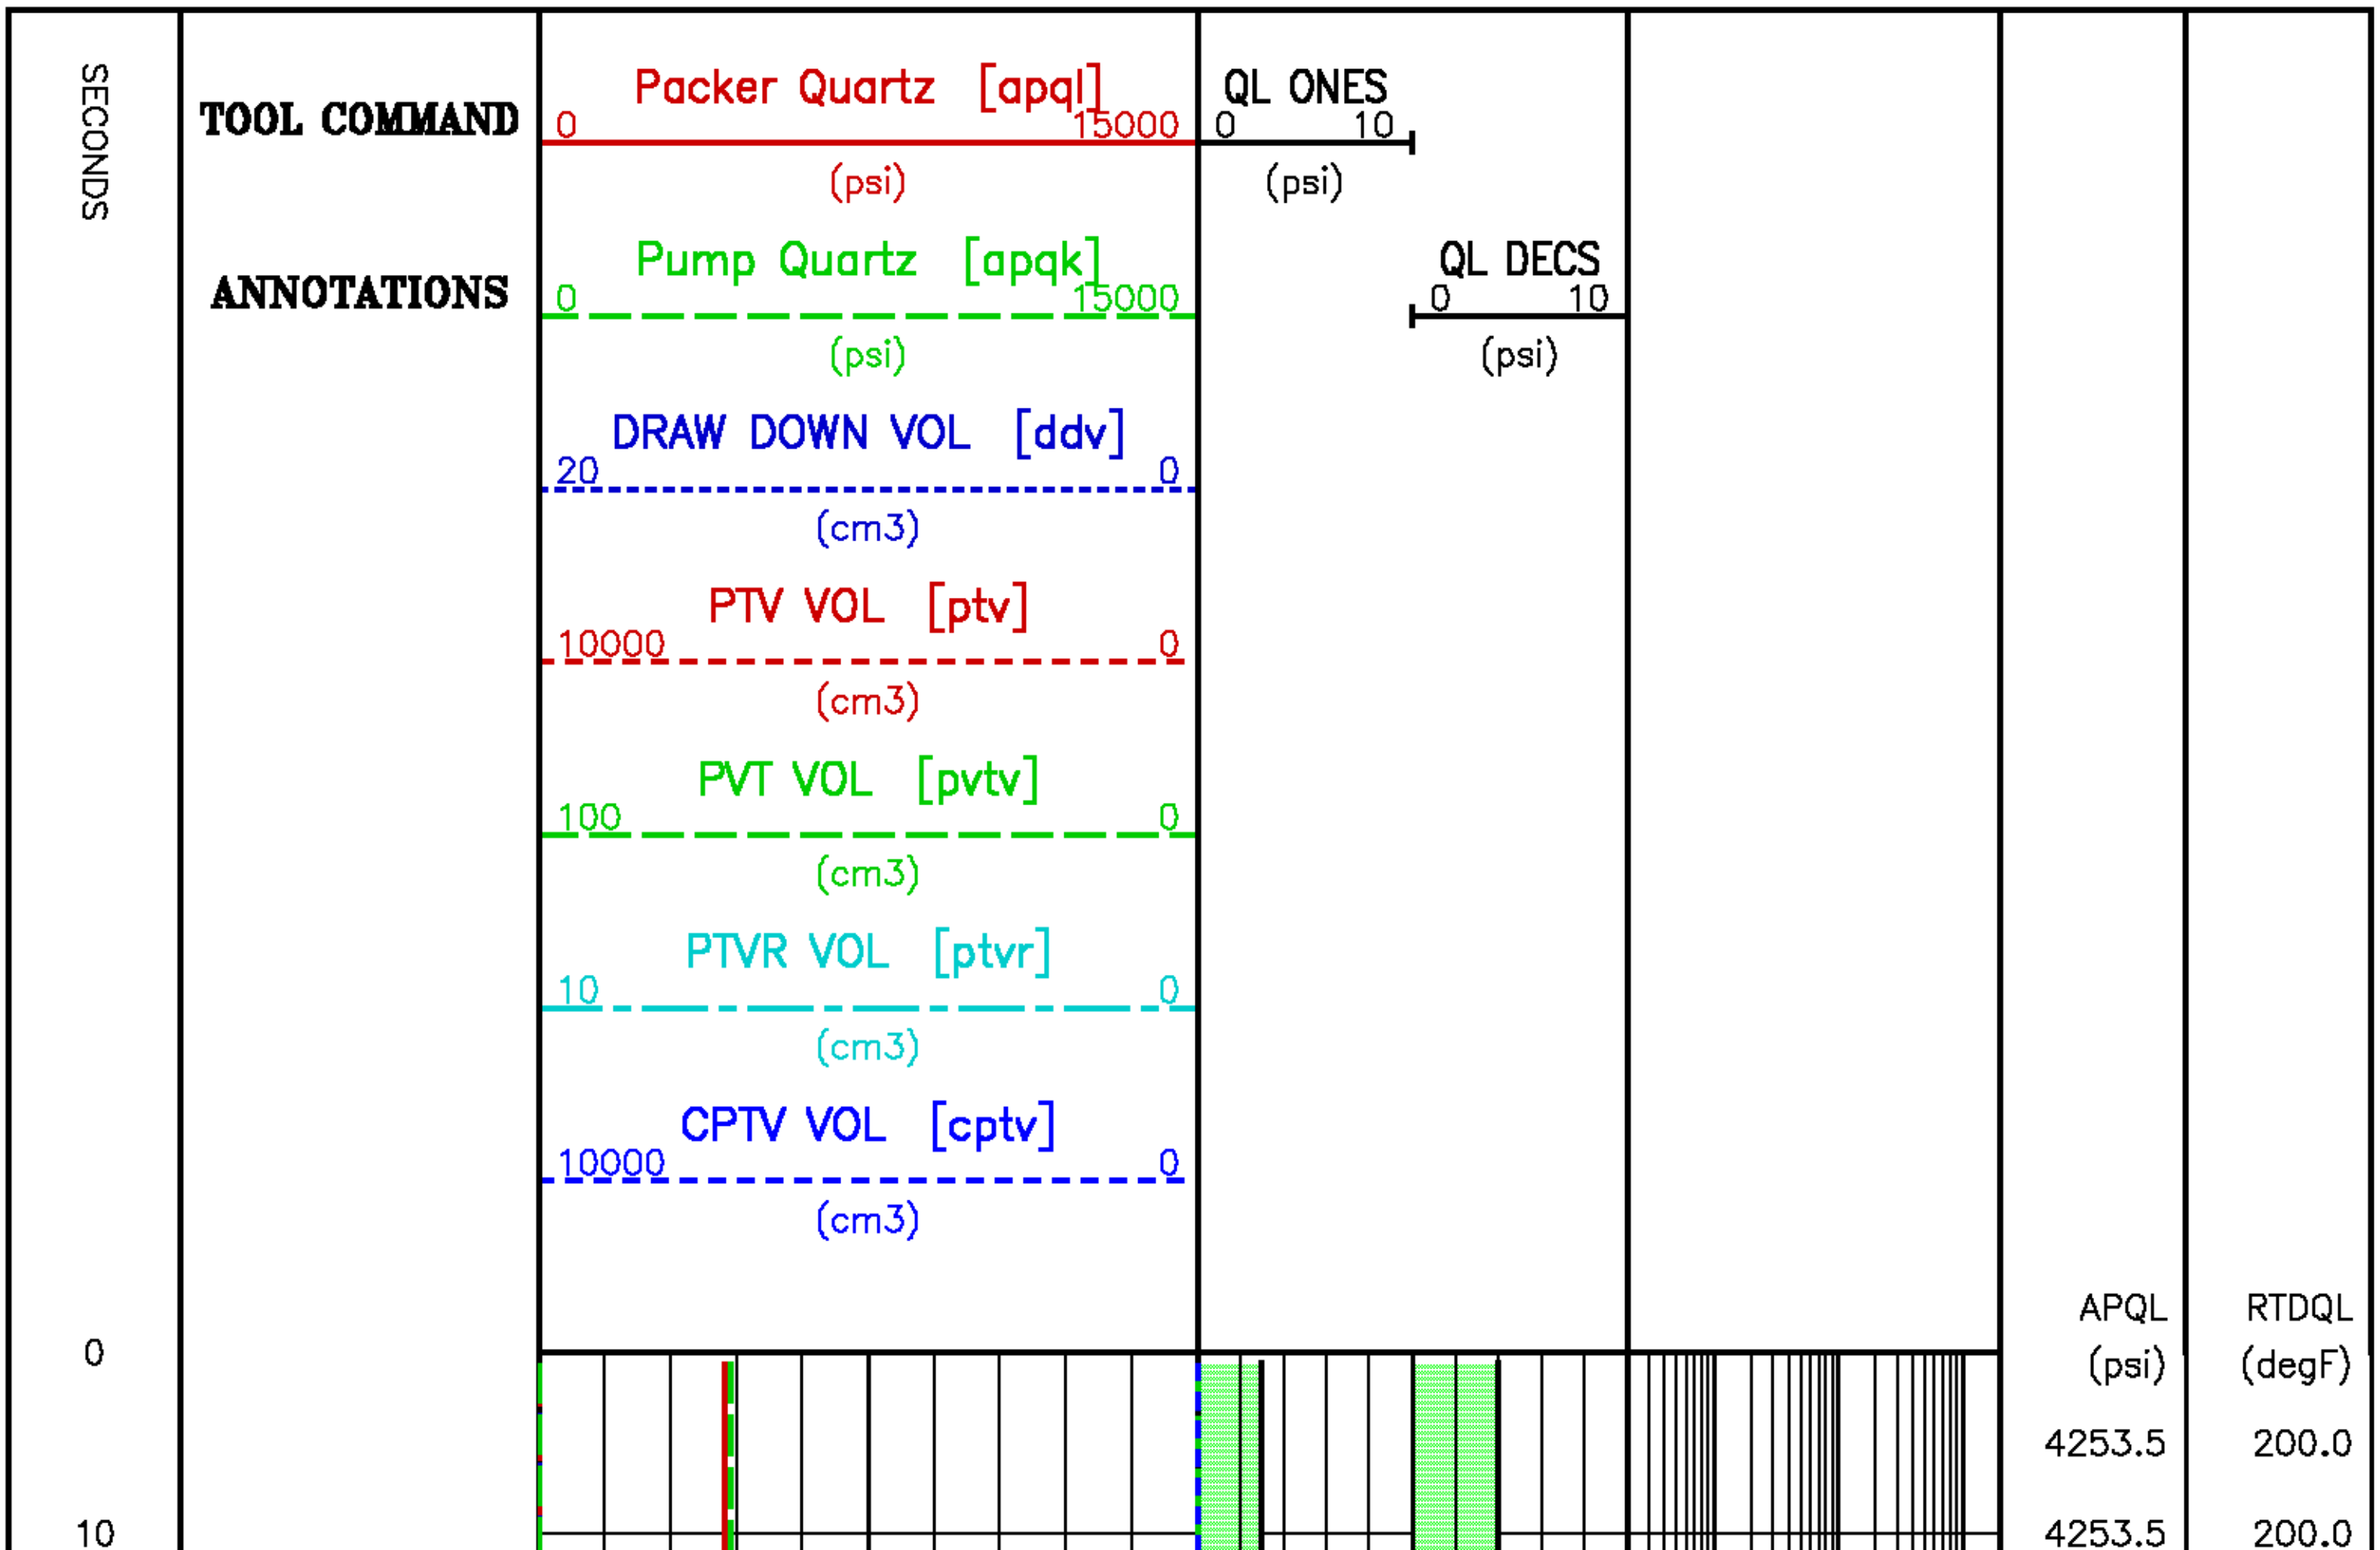

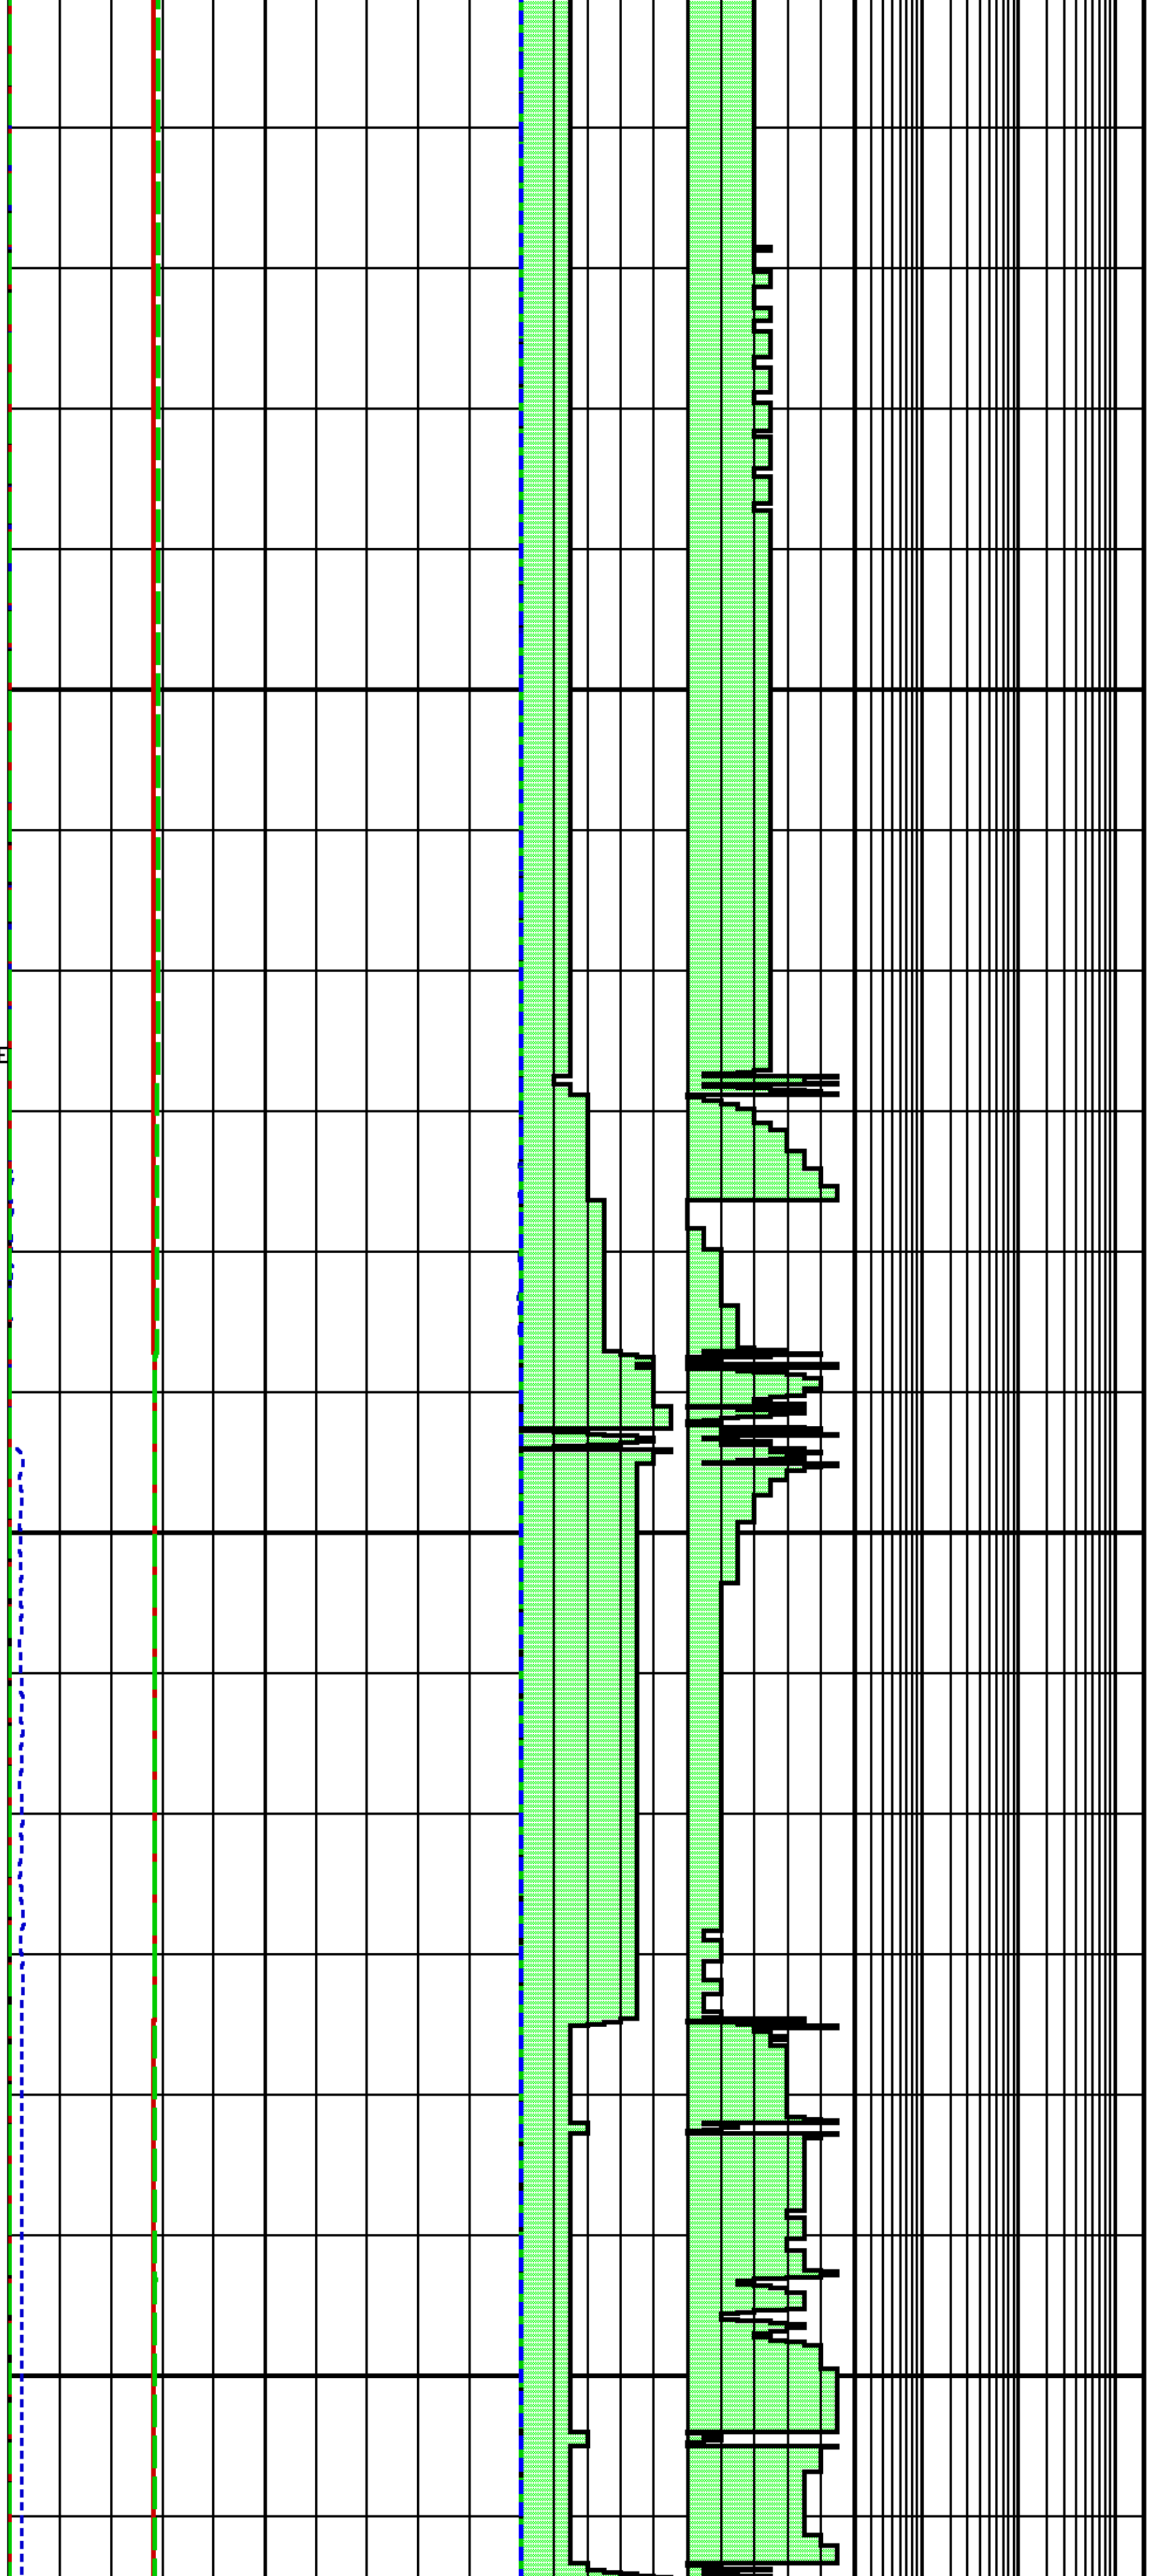

Depth	Event		
		4253.5	200.0
20		4253.5	200.0
		4253.5	200.0
30		4253.5	200.0
		4253.5	200.0
40		4253.5	200.0
		4253.5	200.0
50		4253.5	200.0
		4253.5	200.0
60		4253.5	200.0
		4253.5	200.0
70		4253.5	200.0
		4253.5	200.1
80		4253.5	200.1
	BB[1] CLOSE BYPASS VALVE	4253.5	200.1
90		4254.4	200.1
		4254.9	200.1
100		4255.2	200.1
	BB[1] PUMP DIR DOWN	4255.4	200.1
	BB[1] STROKE 127		
110		4258.8	200.1
		4258.1	200.1
120		4257.4	200.1
		4257.3	200.1
130		4257.3	200.1
		4257.3	200.1
140	BB[1] PUMP DIR UP	4257.2	200.1
		4257.2	200.1
150		4257.2	200.1
	BB[1] OPEN BYPASS VALVE	4254.5	200.1
160		4253.6	200.1
		4253.7	200.1
170		4253.7	200.1
	MB[1] EXTEND PACK 2800	4253.8	200.1
180		4253.9	200.1
		4253.9	200.1
190		4253.8	200.1

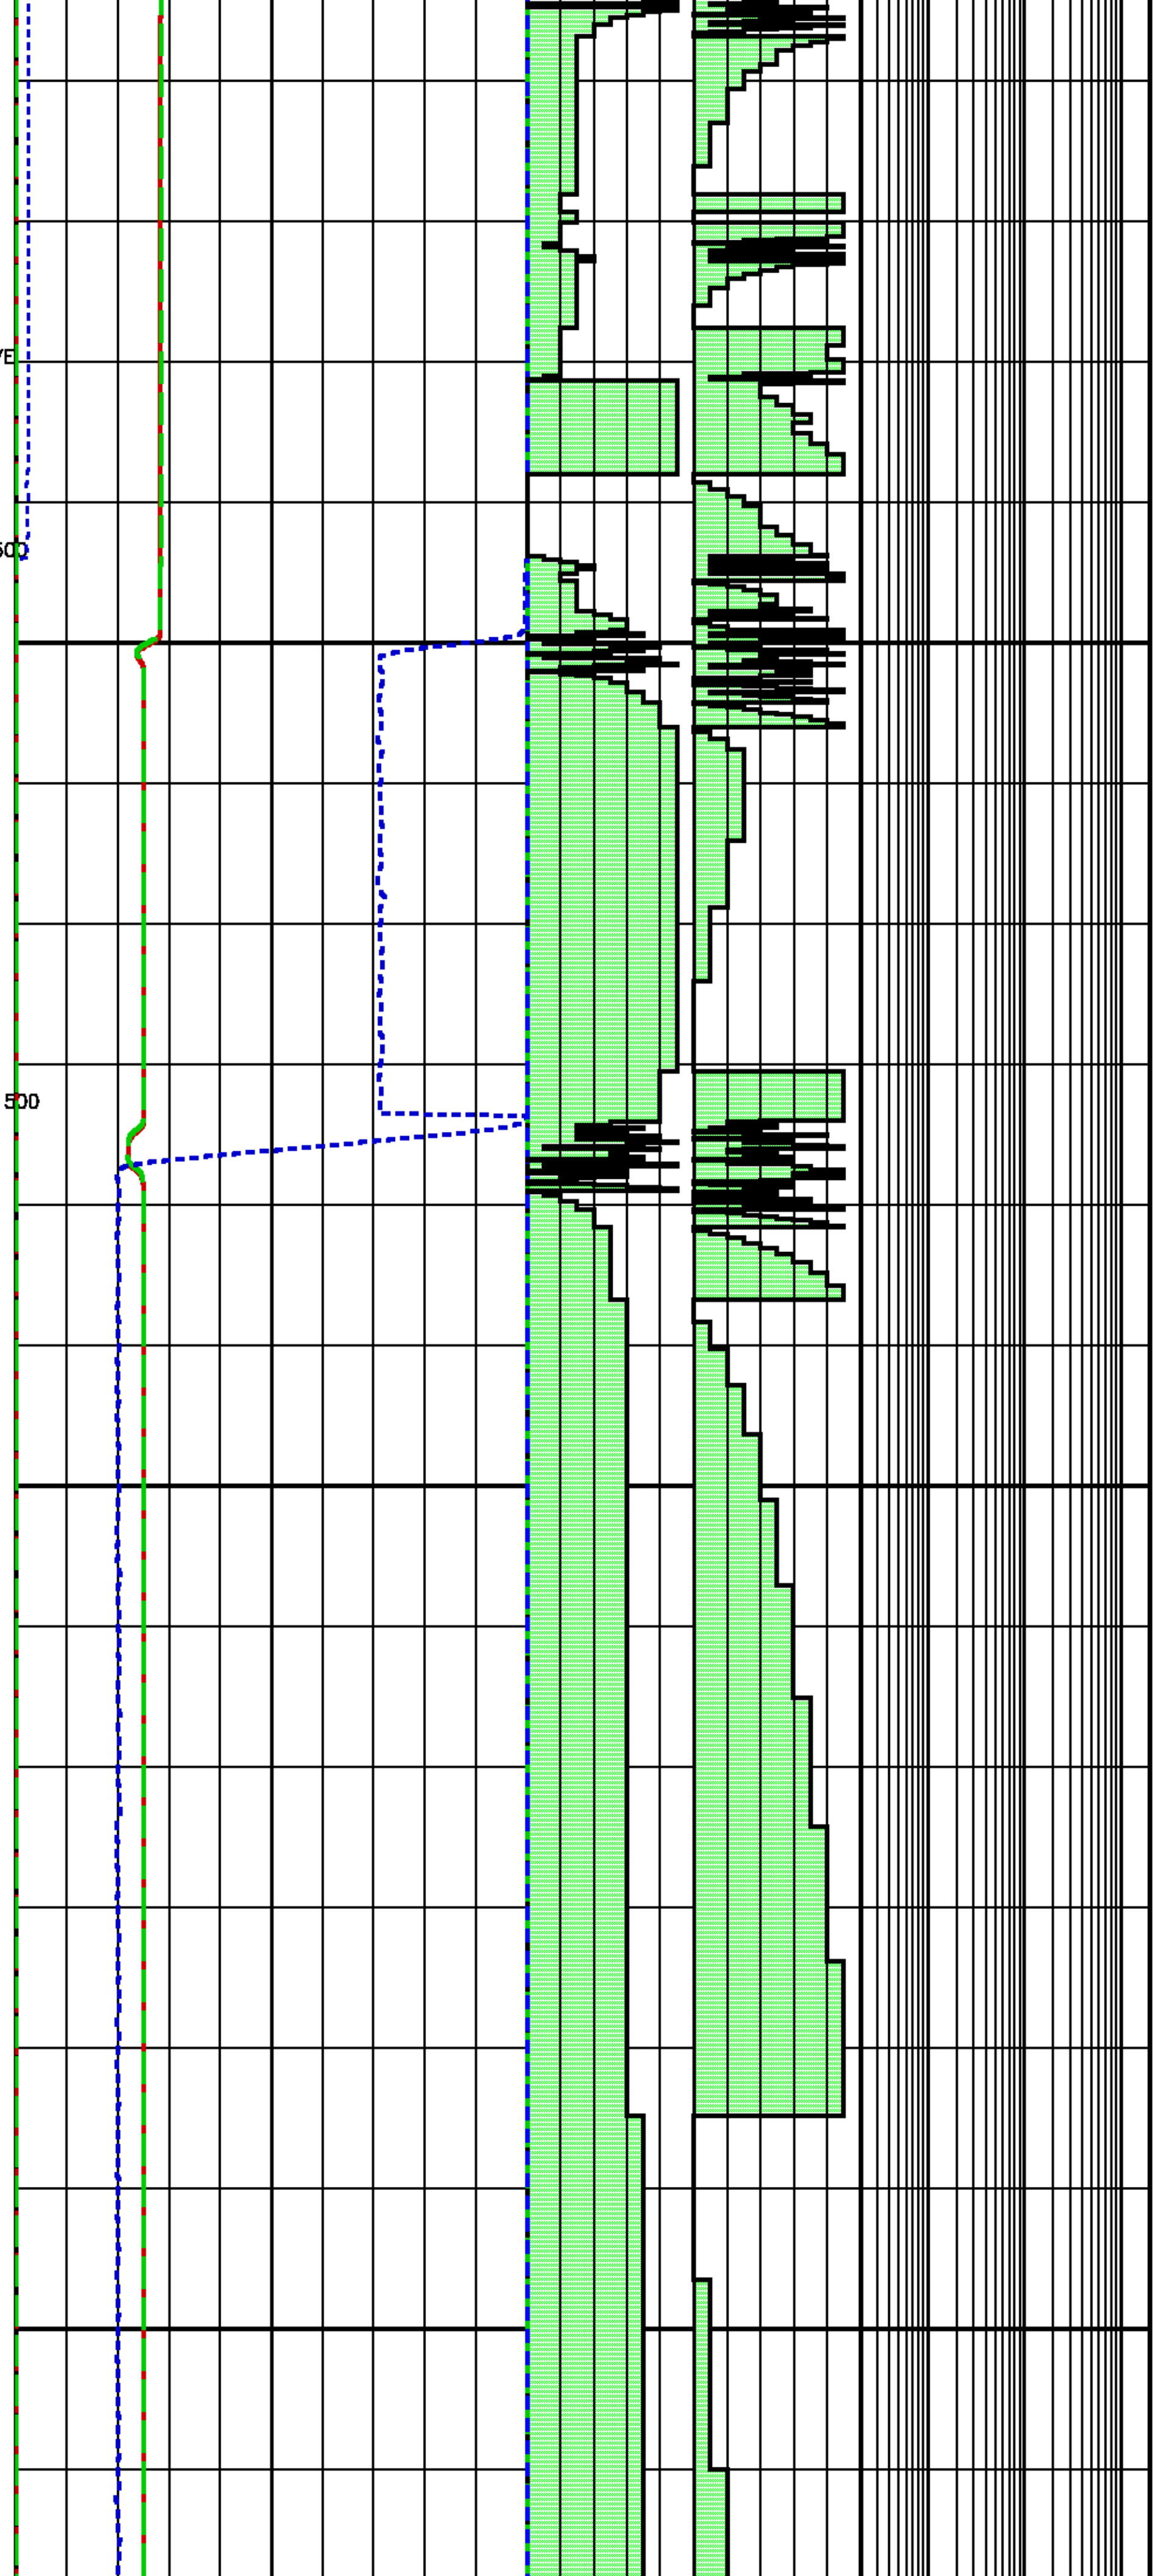

		4258.5	200.1
200		4253.3	200.1
		4253.1	200.1
210	MB[1] RECHARGE 2800	4253.0	200.1
		4253.2	200.1
220	BB[1] CLOSE BYPASS VALVE	4252.9	200.1
		4249.7	200.1
230		4250.4	200.2
	BB[1] DRAWDOWN 5 300 500	4253.1	200.2
240		4001.1	200.2
		3758.6	200.1
250		3759.4	200.1
		3759.3	200.1
260		3759.2	200.1
		3759.1	200.1
270		3759.0	200.2
	BB[1] DRAWDOWN 15 300 500	3455.9	200.2
280		3753.5	200.2
		3755.8	200.2
290		3756.2	200.2
		3756.4	200.2
300		3756.5	200.2
		3756.6	200.2
310		3756.6	200.2
		3756.7	200.2
320		3756.8	200.2
		3756.8	200.2
330		3756.9	200.2
		3756.9	200.2
340		3757.0	200.2
		3757.0	200.2
350		3757.0	200.2
		3757.1	200.2
360		3757.1	200.2
		3757.2	200.2
370		3757.2	200.2
		3757.2	200.2

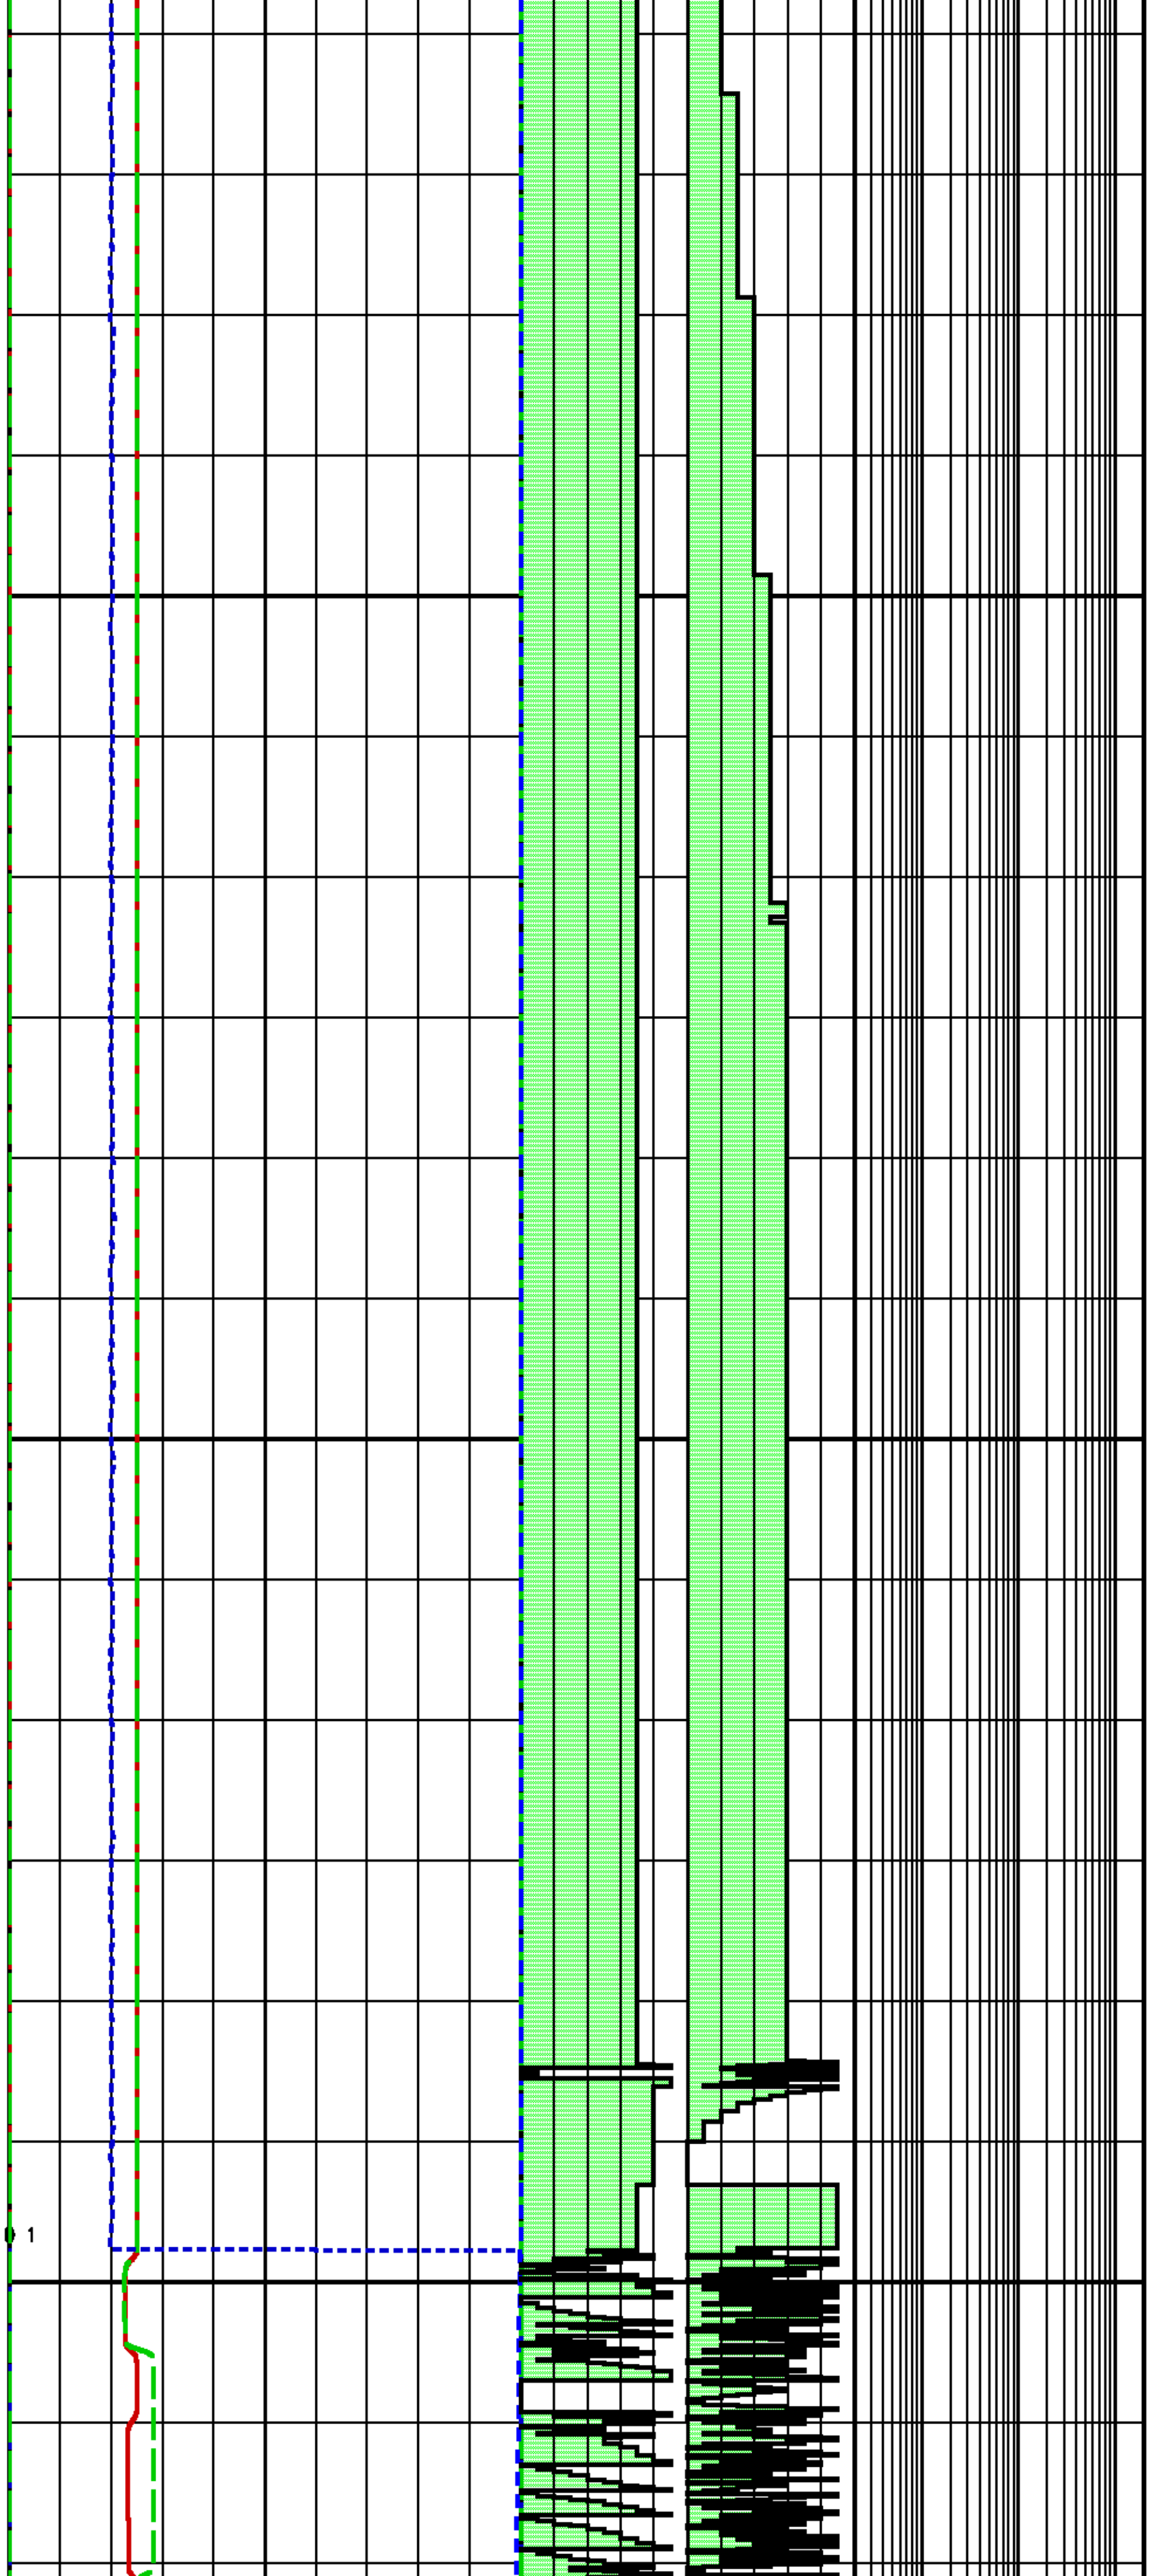

380		3757.3	200.2
		3757.3	200.2
390		3757.3	200.2
		3757.4	200.2
400		3757.4	200.2
		3757.4	200.2
410		3757.5	200.2
		3757.5	200.2
420		3757.5	200.3
		3757.5	200.3
430		3757.5	200.3
		3757.6	200.3
440		3757.6	200.3
		3757.6	200.3
450		3757.6	200.3
		3757.6	200.3
460		3757.6	200.3
		3757.7	200.3
470		3757.7	200.3
		3757.7	200.3
480		3757.7	200.3
		3757.7	200.3
490		3757.7	200.3
		3757.7	200.3
500		3757.7	200.3
		3757.7	200.3
510		3757.7	200.3
		3757.7	200.3
520		3757.7	200.3
	MB[1] RECHARGE 2800	3761.4	200.3
530		3758.1	200.3
	BB[1] PUMP 100000 0 63 0 1	3758.0	200.3
540		3398.2	200.3
		3628.8	200.3
550		3578.8	200.3
		3491.1	200.3
560		3515.9	200.3

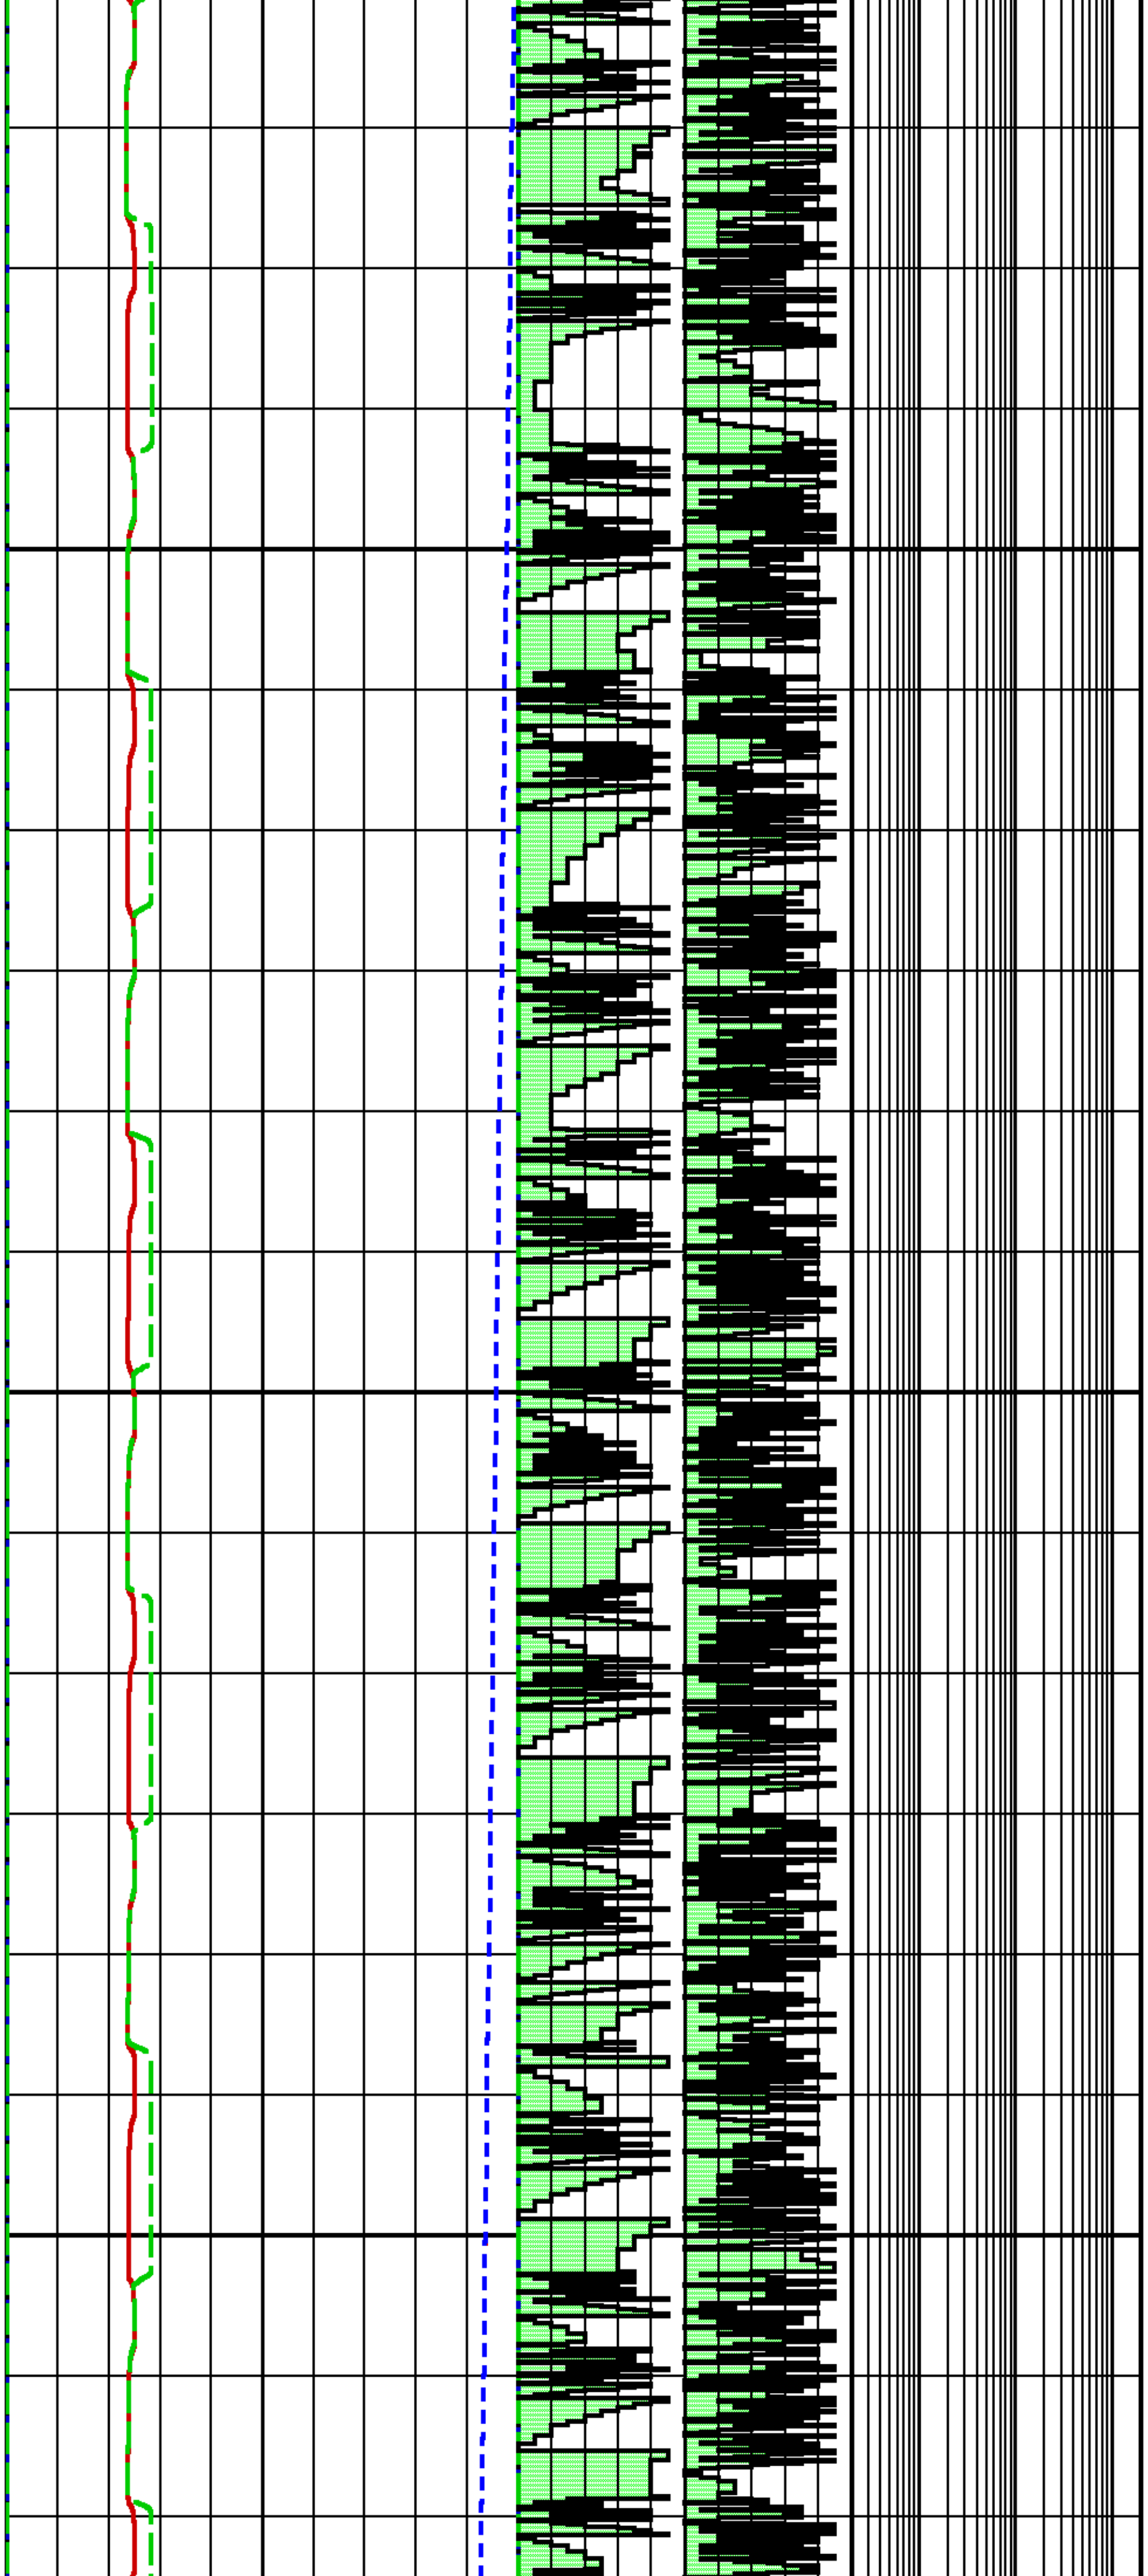

	3755.6	200.3
570	3520.0	200.3
	3518.9	200.3
580	3750.2	200.3
	3553.6	200.3
590	3552.0	200.3
	3742.5	200.3
600	3572.7	200.3
	3549.1	200.3
610	3710.6	200.3
	3625.7	200.4
620	3566.5	200.4
	3562.1	200.4
630	3754.0	200.4
	3561.2	200.4
640	3552.3	200.4
	3751.5	200.4
650	3584.7	200.4
	3569.3	200.4
660	3740.3	200.4
	3594.1	200.4
670	3558.9	200.4
	3727.4	200.4
680	3637.4	200.4
	3581.3	200.4
690	3577.4	200.4
	3768.2	200.4
700	3586.0	200.4
	3566.4	200.4
710	3754.7	200.4
	3591.4	200.4
720	3578.0	200.4
	3745.3	200.4
730	3598.2	200.4
	3570.7	200.4
740	3735.8	200.4

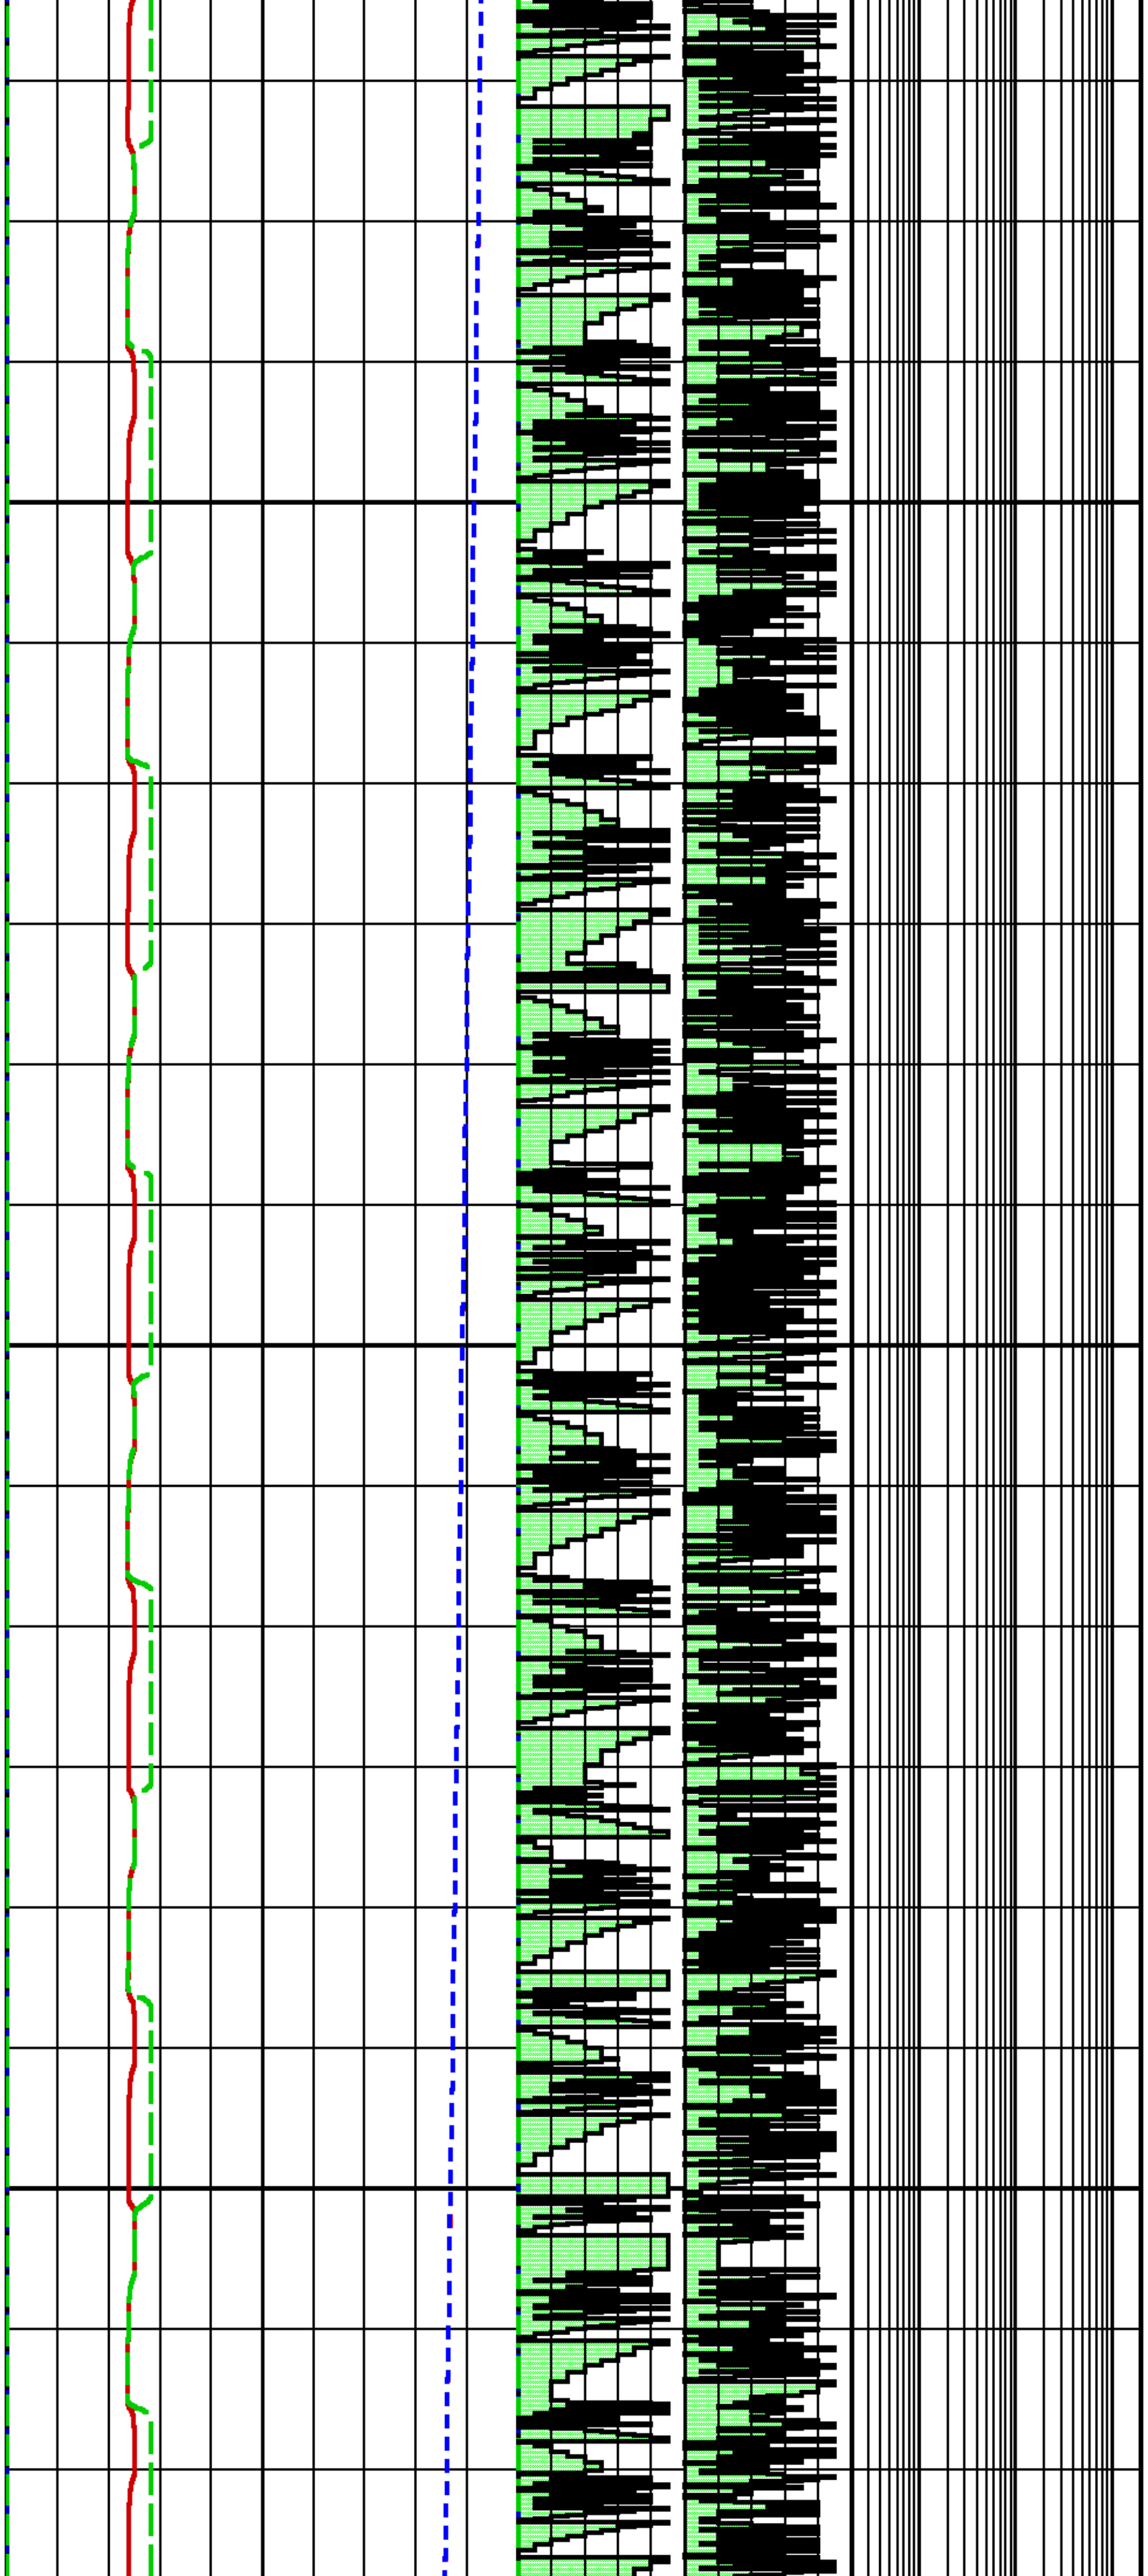

	3638.1	200.4
750	3573.5	200.4
	3691.1	200.4
760	3681.2	200.4
	3550.4	200.4
770	3730.7	200.4
	3630.0	200.4
780	3565.8	200.4
	3734.2	200.4
790	3622.2	200.4
	3555.2	200.4
800	3748.3	200.4
	3609.8	200.4
810	3567.6	200.4
	3750.5	200.4
820	3588.7	200.4
	3554.1	200.4
830	3750.6	200.4
	3592.3	200.4
840	3572.1	200.4
	3751.3	200.4
850	3584.4	200.5
	3561.6	200.5
860	3753.3	200.5
	3590.7	200.5
870	3574.9	200.5
	3760.2	200.5
880	3585.2	200.5
	3569.8	200.5
890	3755.0	200.5
	3587.9	200.5
900	3579.1	200.5
	3759.2	200.5
910	3573.8	200.5
	3562.5	200.5
920	3755.4	200.5
	3582.9	200.5

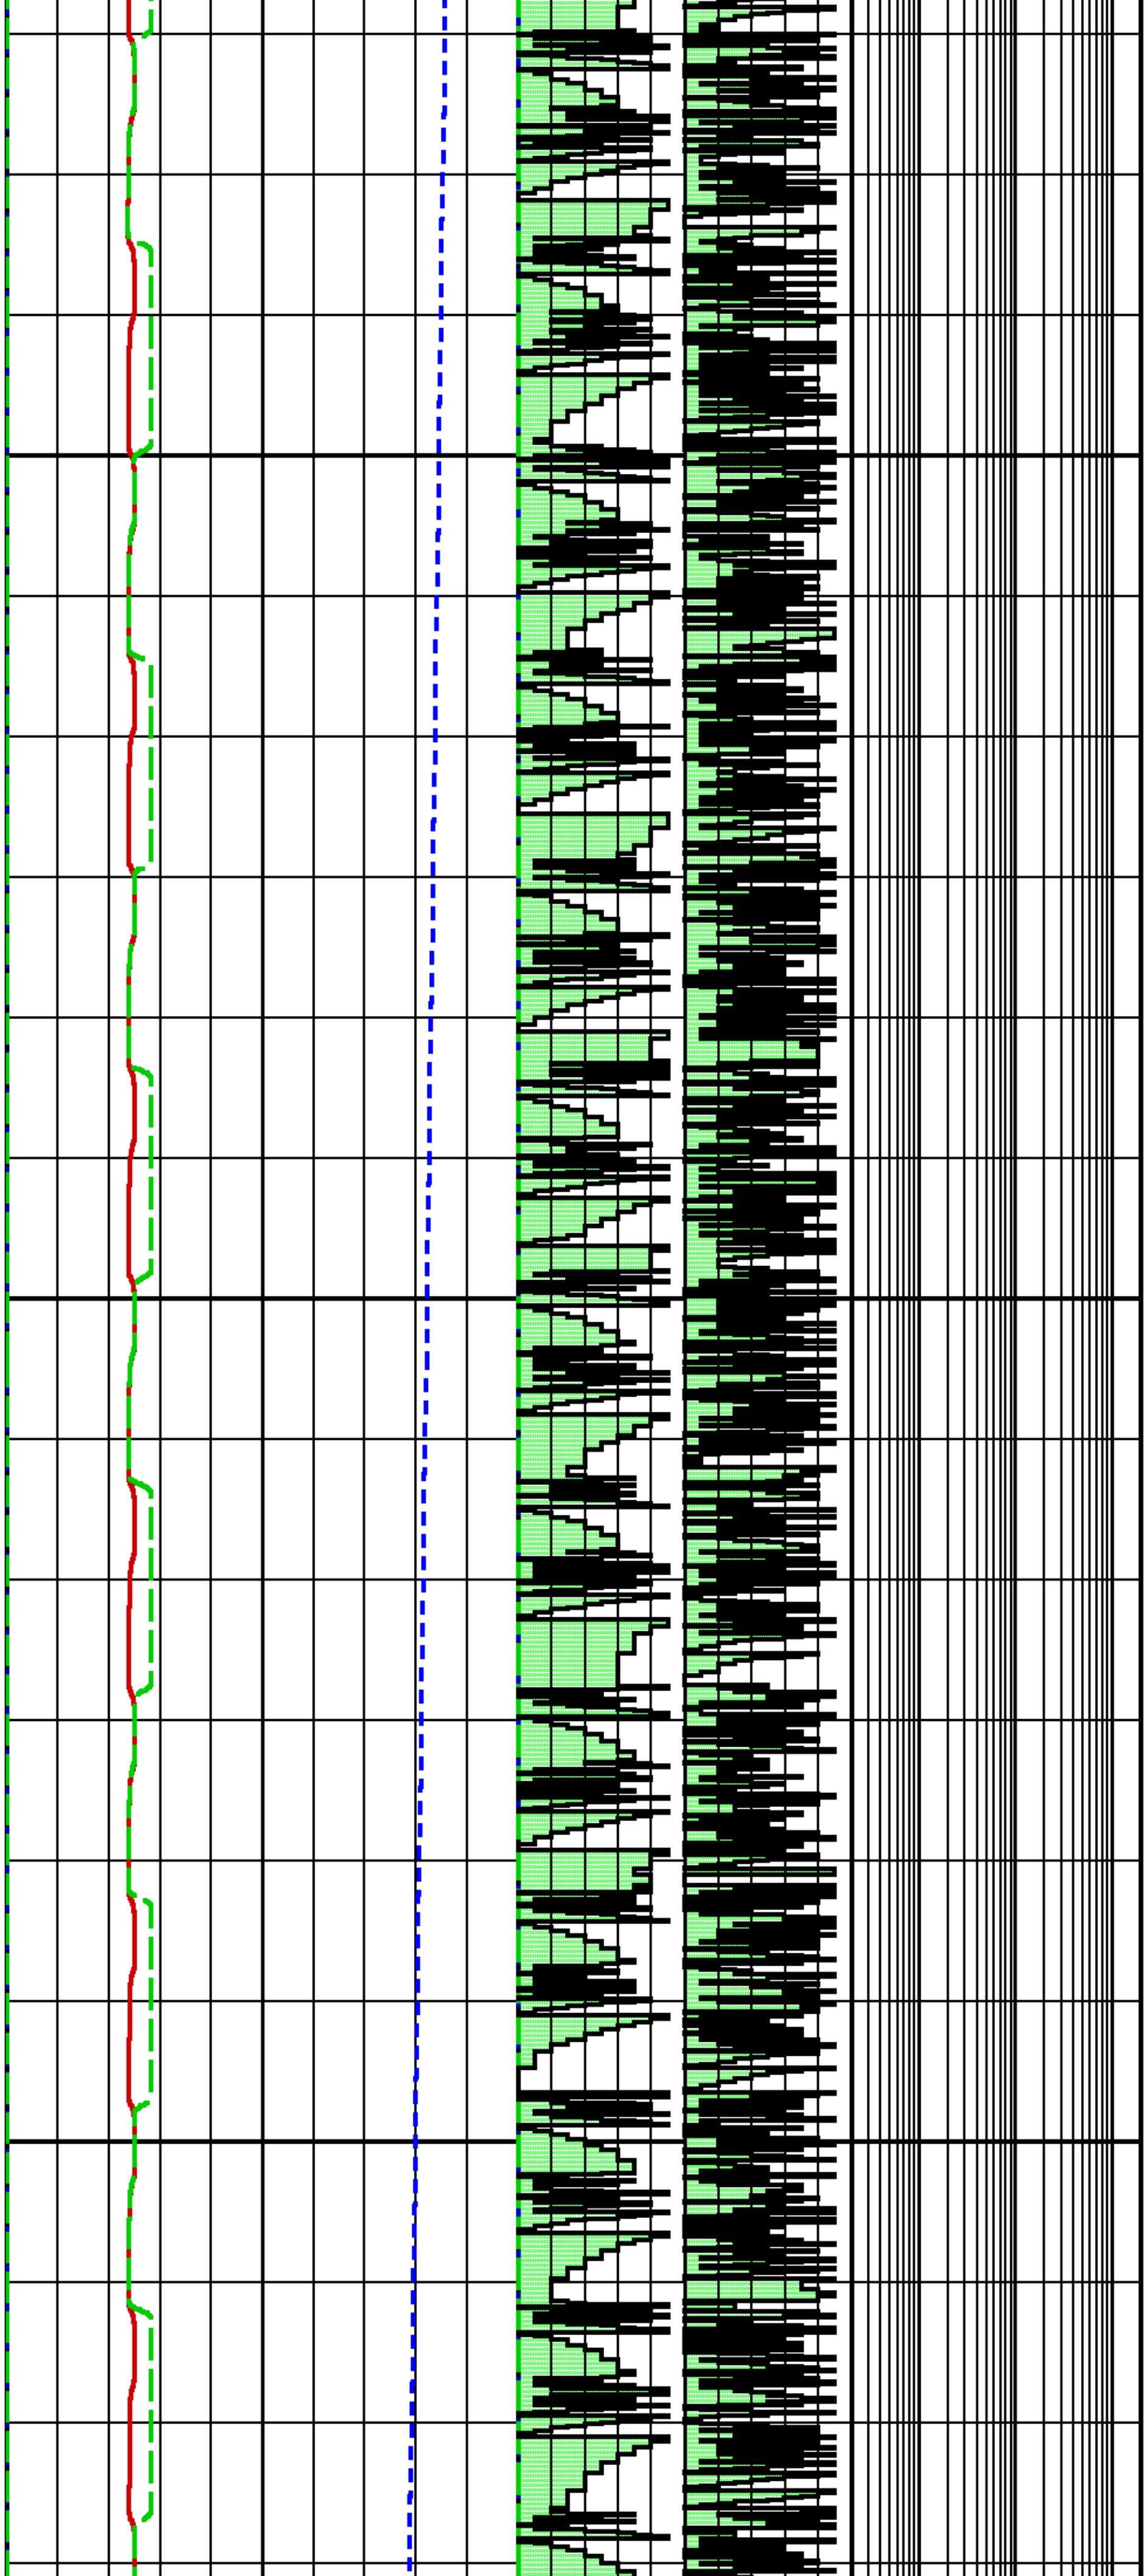

930	3591.0	200.5
	3756.5	200.5
940	3574.6	200.5
	3643.4	200.5
950	3737.3	200.5
	3587.4	200.5
960	3681.2	200.5
	3738.7	200.5
970	3579.1	200.5
	3732.2	200.5
980	3671.5	200.5
	3590.6	200.5
990	3742.0	200.5
	3655.1	200.5
1000	3582.0	200.5
	3745.4	200.5
1010	3635.3	200.5
	3594.7	200.5
1020	3747.4	200.5
	3627.1	200.5
1030	3586.4	200.5
	3750.9	200.5
1040	3622.9	200.5
	3597.1	200.5
1050	3751.9	200.5
	3617.4	200.5
1060	3588.4	200.5
	3753.3	200.5
1070	3617.2	200.5
	3600.7	200.5
1080	3754.6	200.5
	3609.9	200.5
1090	3592.7	200.5
	3755.3	200.5
1100	3615.2	200.5
	3603.9	200.5
1110	3756.1	200.5

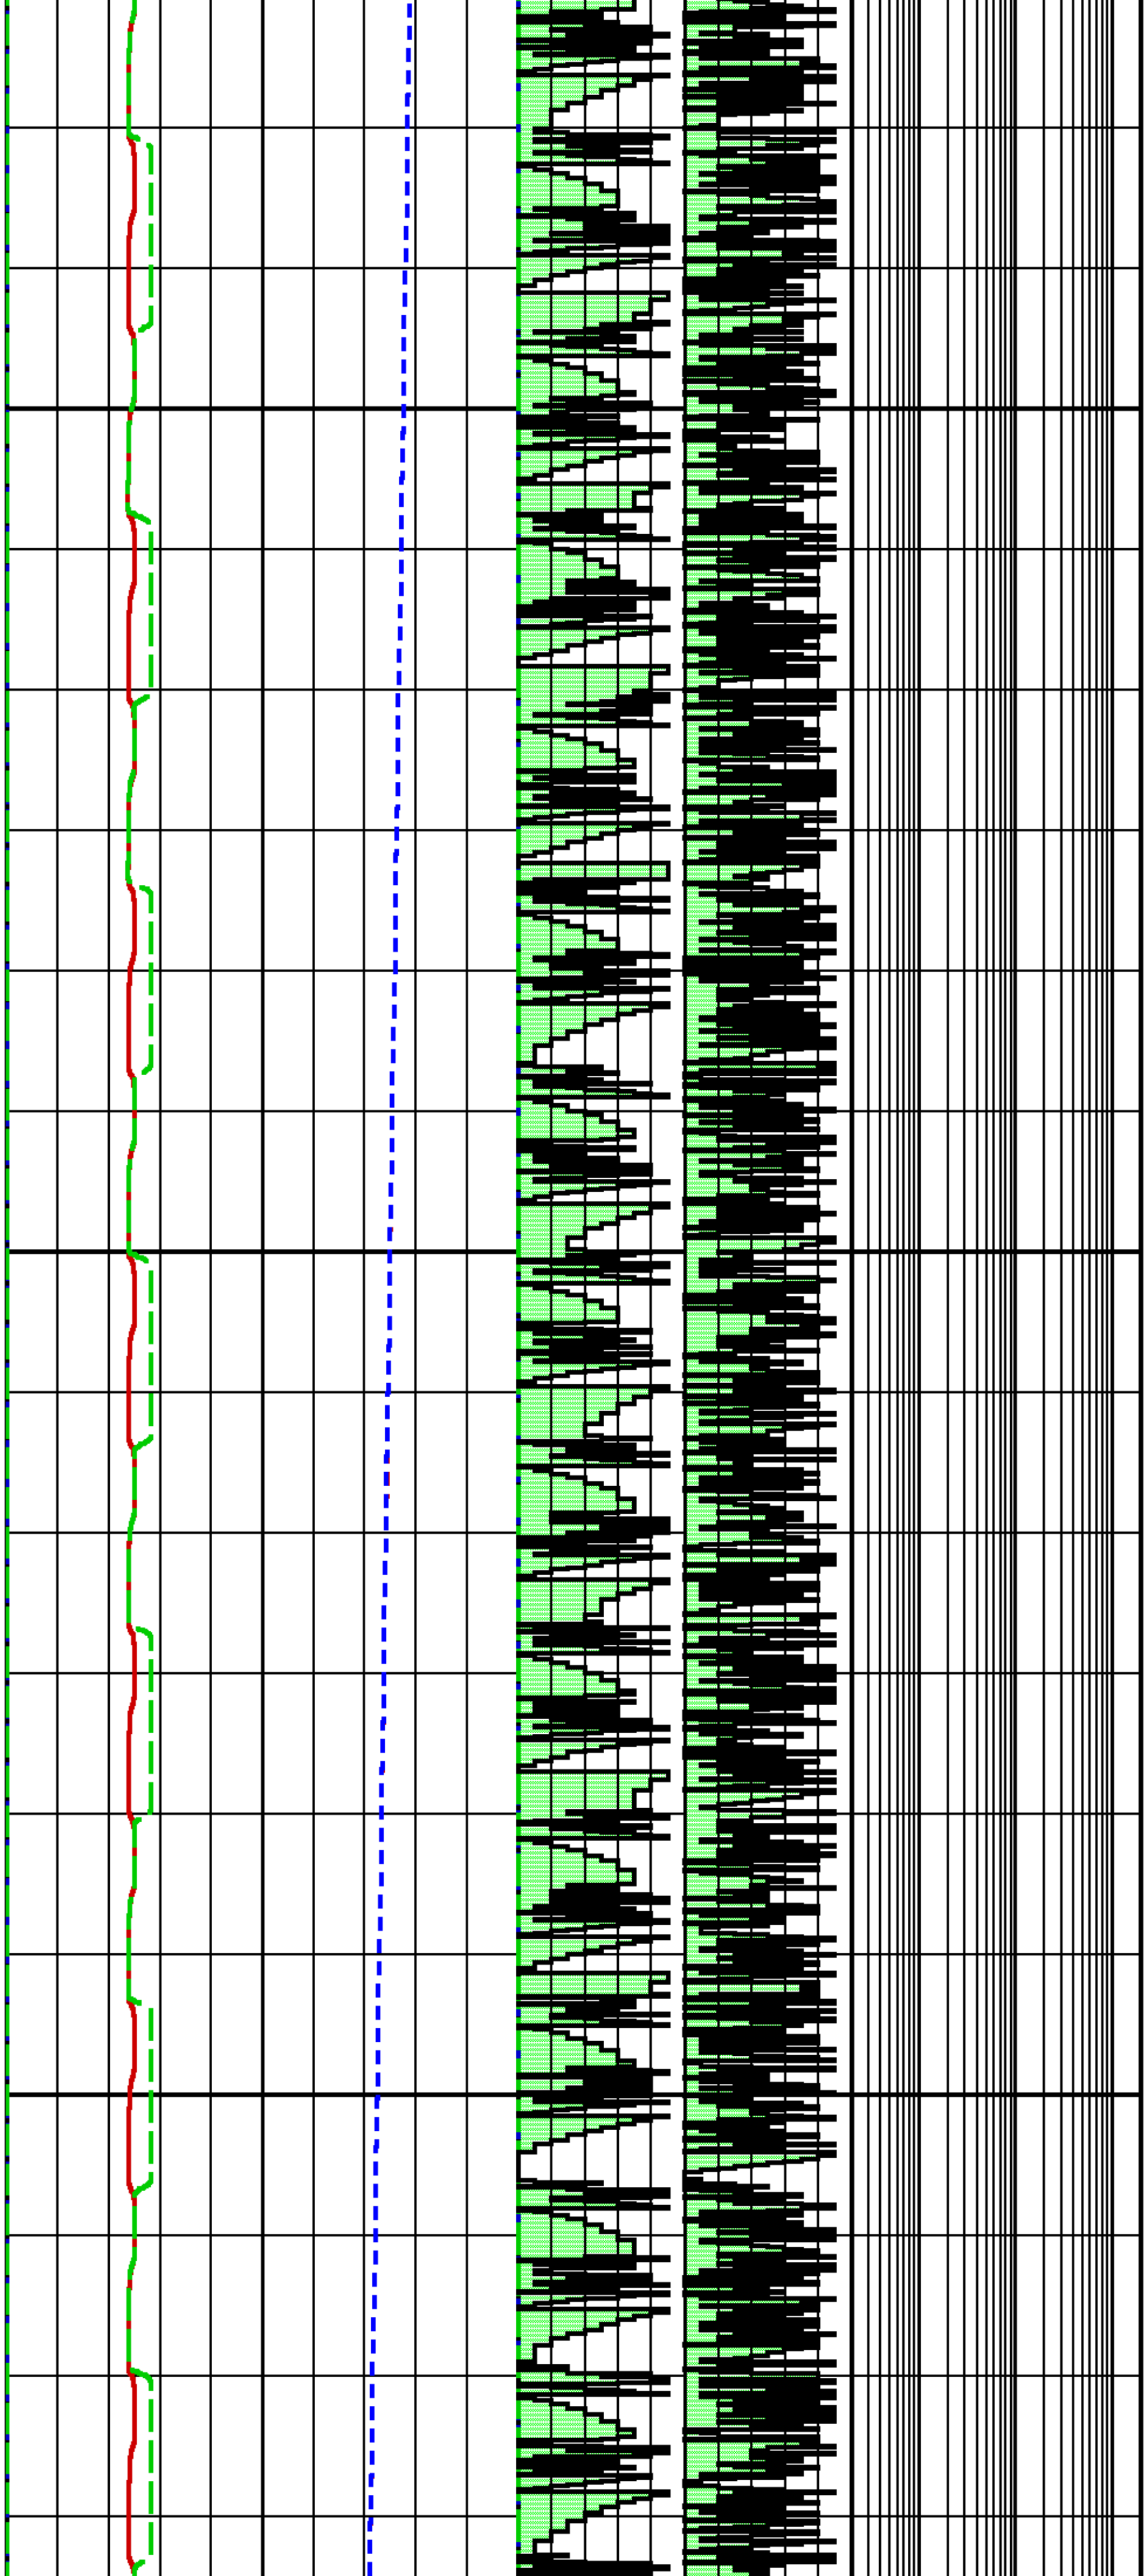

	3598.1	200.6
1120	3582.1	200.6
	3756.7	200.6
1130	3584.8	200.6
	3733.8	200.6
1140	3667.3	200.6
	3571.0	200.6
1150	3753.4	200.6
	3595.8	200.6
1160	3578.1	200.6
	3757.0	200.6
1170	3576.9	200.6
	3741.7	200.6
1180	3629.2	200.6
	3582.7	200.6
1190	3754.4	200.6
	3590.0	200.6
1200	3578.3	200.6
	3754.9	200.6
1210	3588.6	200.6
	3748.5	200.6
1220	3623.6	200.6
	3575.5	200.6
1230	3755.2	200.6
	3597.3	200.6
1240	3605.6	200.6
	3756.6	200.6
1250	3584.0	200.6
	3749.7	200.6
1260	3618.0	200.6
	3590.5	200.6
1270	3756.6	200.6
	3591.1	200.6
1280	3675.8	200.6
	3715.9	200.6
1290	3594.4	200.6

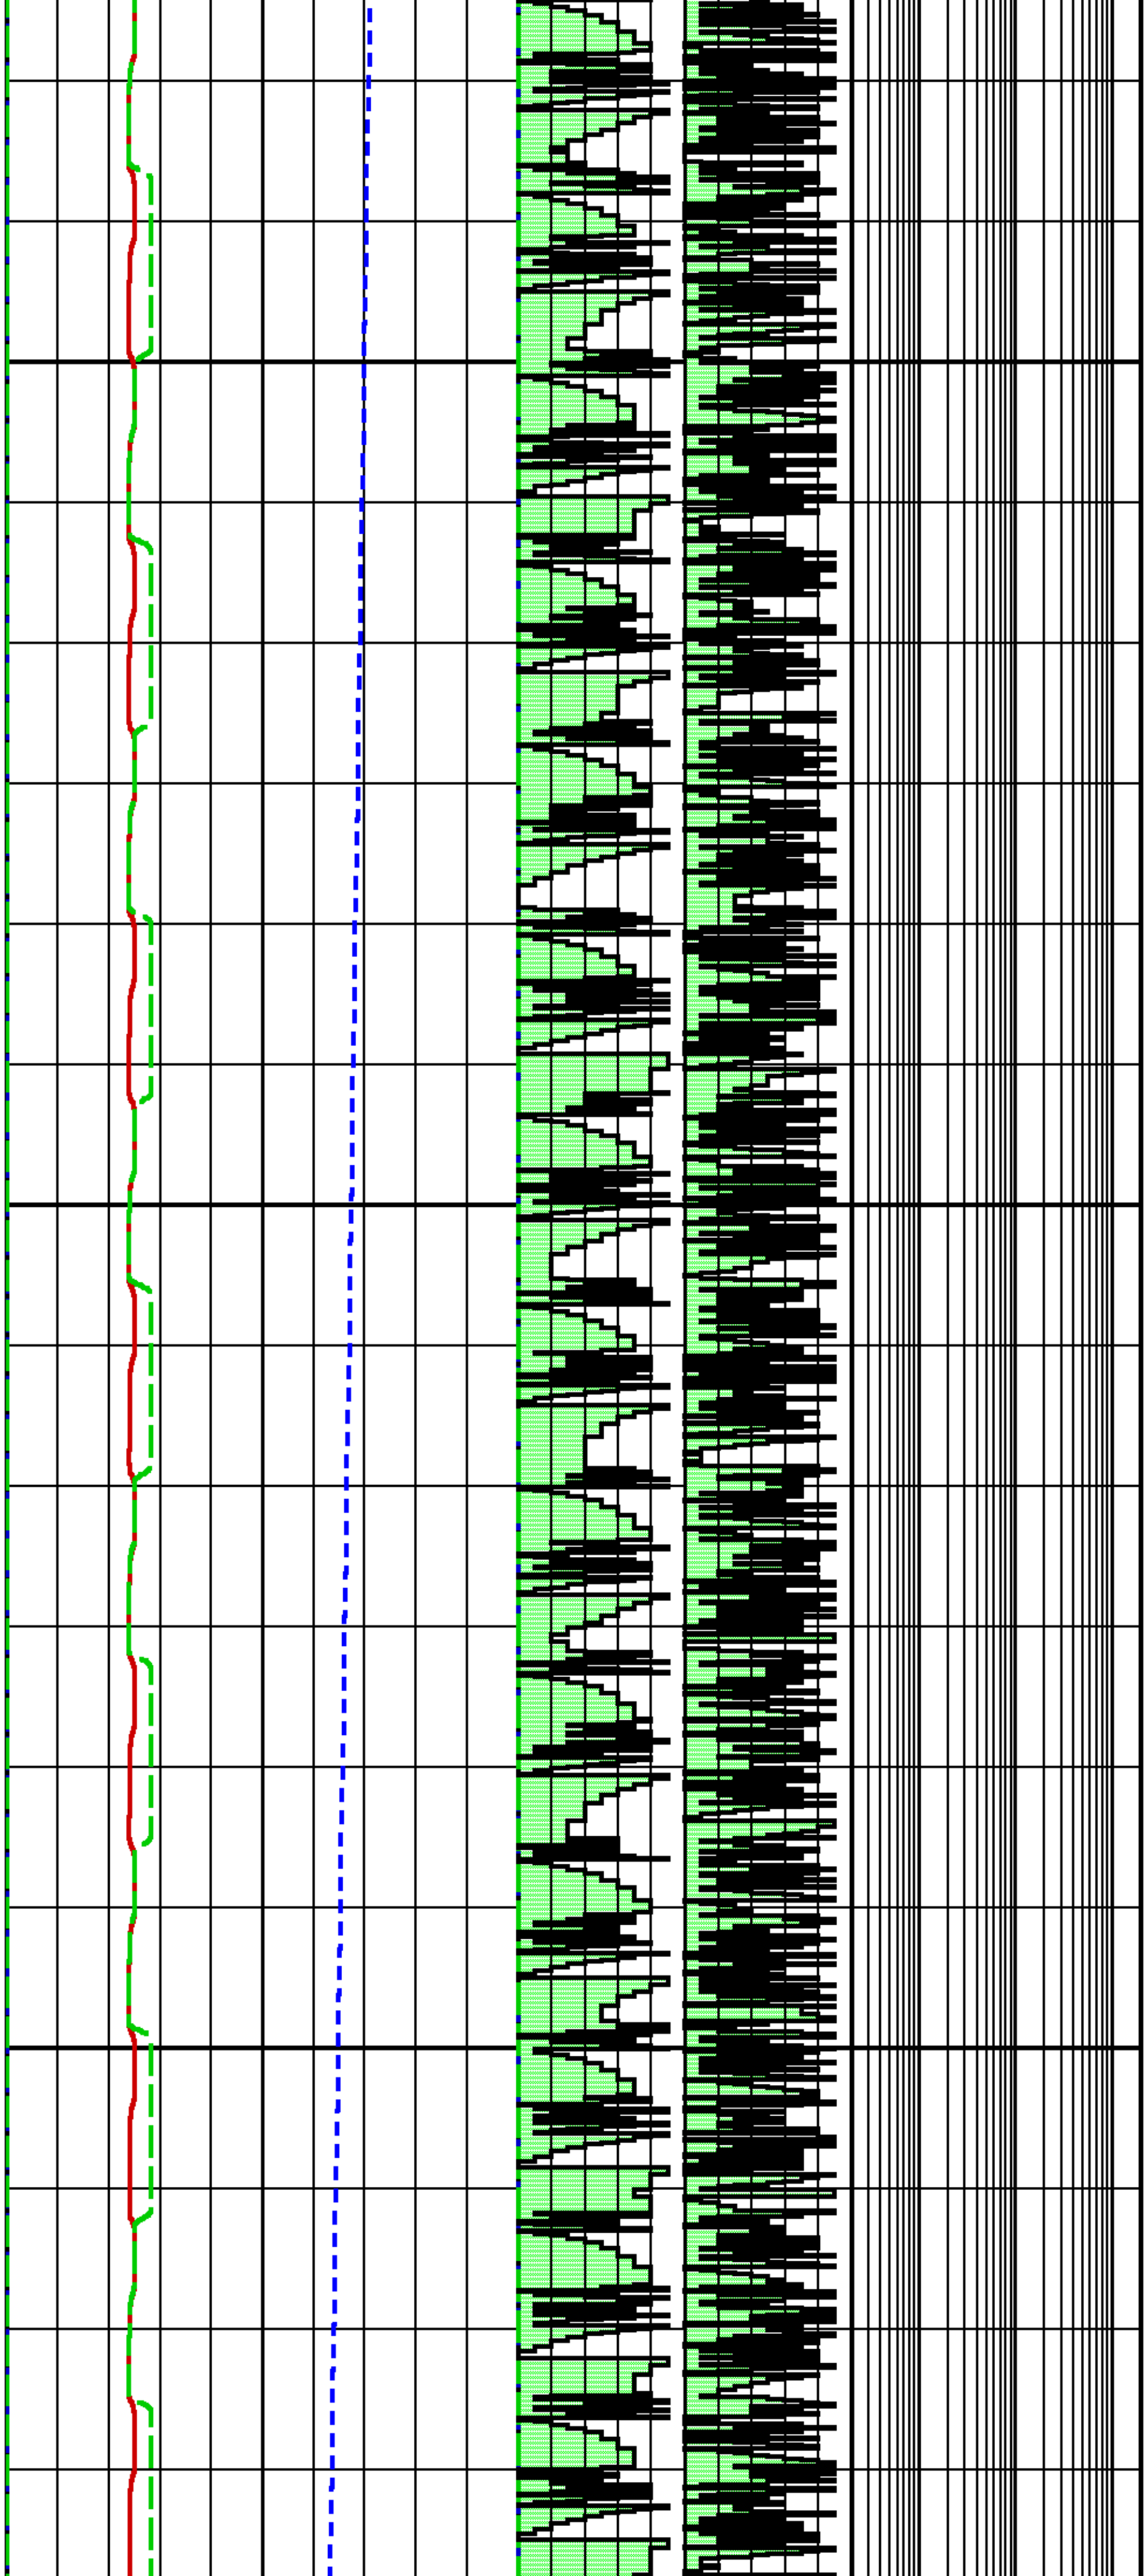

	3754.2	200.6
1300	3612.0	200.6
	3583.0	200.6
1310	3756.6	200.6
	3599.9	200.6
1320	3719.1	200.6
	3706.1	200.6
1330	3589.0	200.6
	3753.9	200.6
1340	3612.1	200.6
	3595.9	200.6
1350	3757.8	200.6
	3596.8	200.6
1360	3737.7	200.6
	3649.9	200.6
1370	3599.3	200.6
	3755.8	200.6
1380	3608.0	200.6
	3592.1	200.6
1390	3757.7	200.6
	3607.1	200.6
1400	3749.6	200.6
	3651.4	200.6
1410	3594.1	200.6
	3756.4	200.6
1420	3613.5	200.6
	3604.0	200.6
1430	3758.4	200.6
	3599.8	200.7
1440	3750.0	200.6
	3637.6	200.7
1450	3608.1	200.7
	3757.3	200.7
1460	3607.6	200.7
	3627.6	200.7
1470	3750.8	200.7
	3609.9	200.7

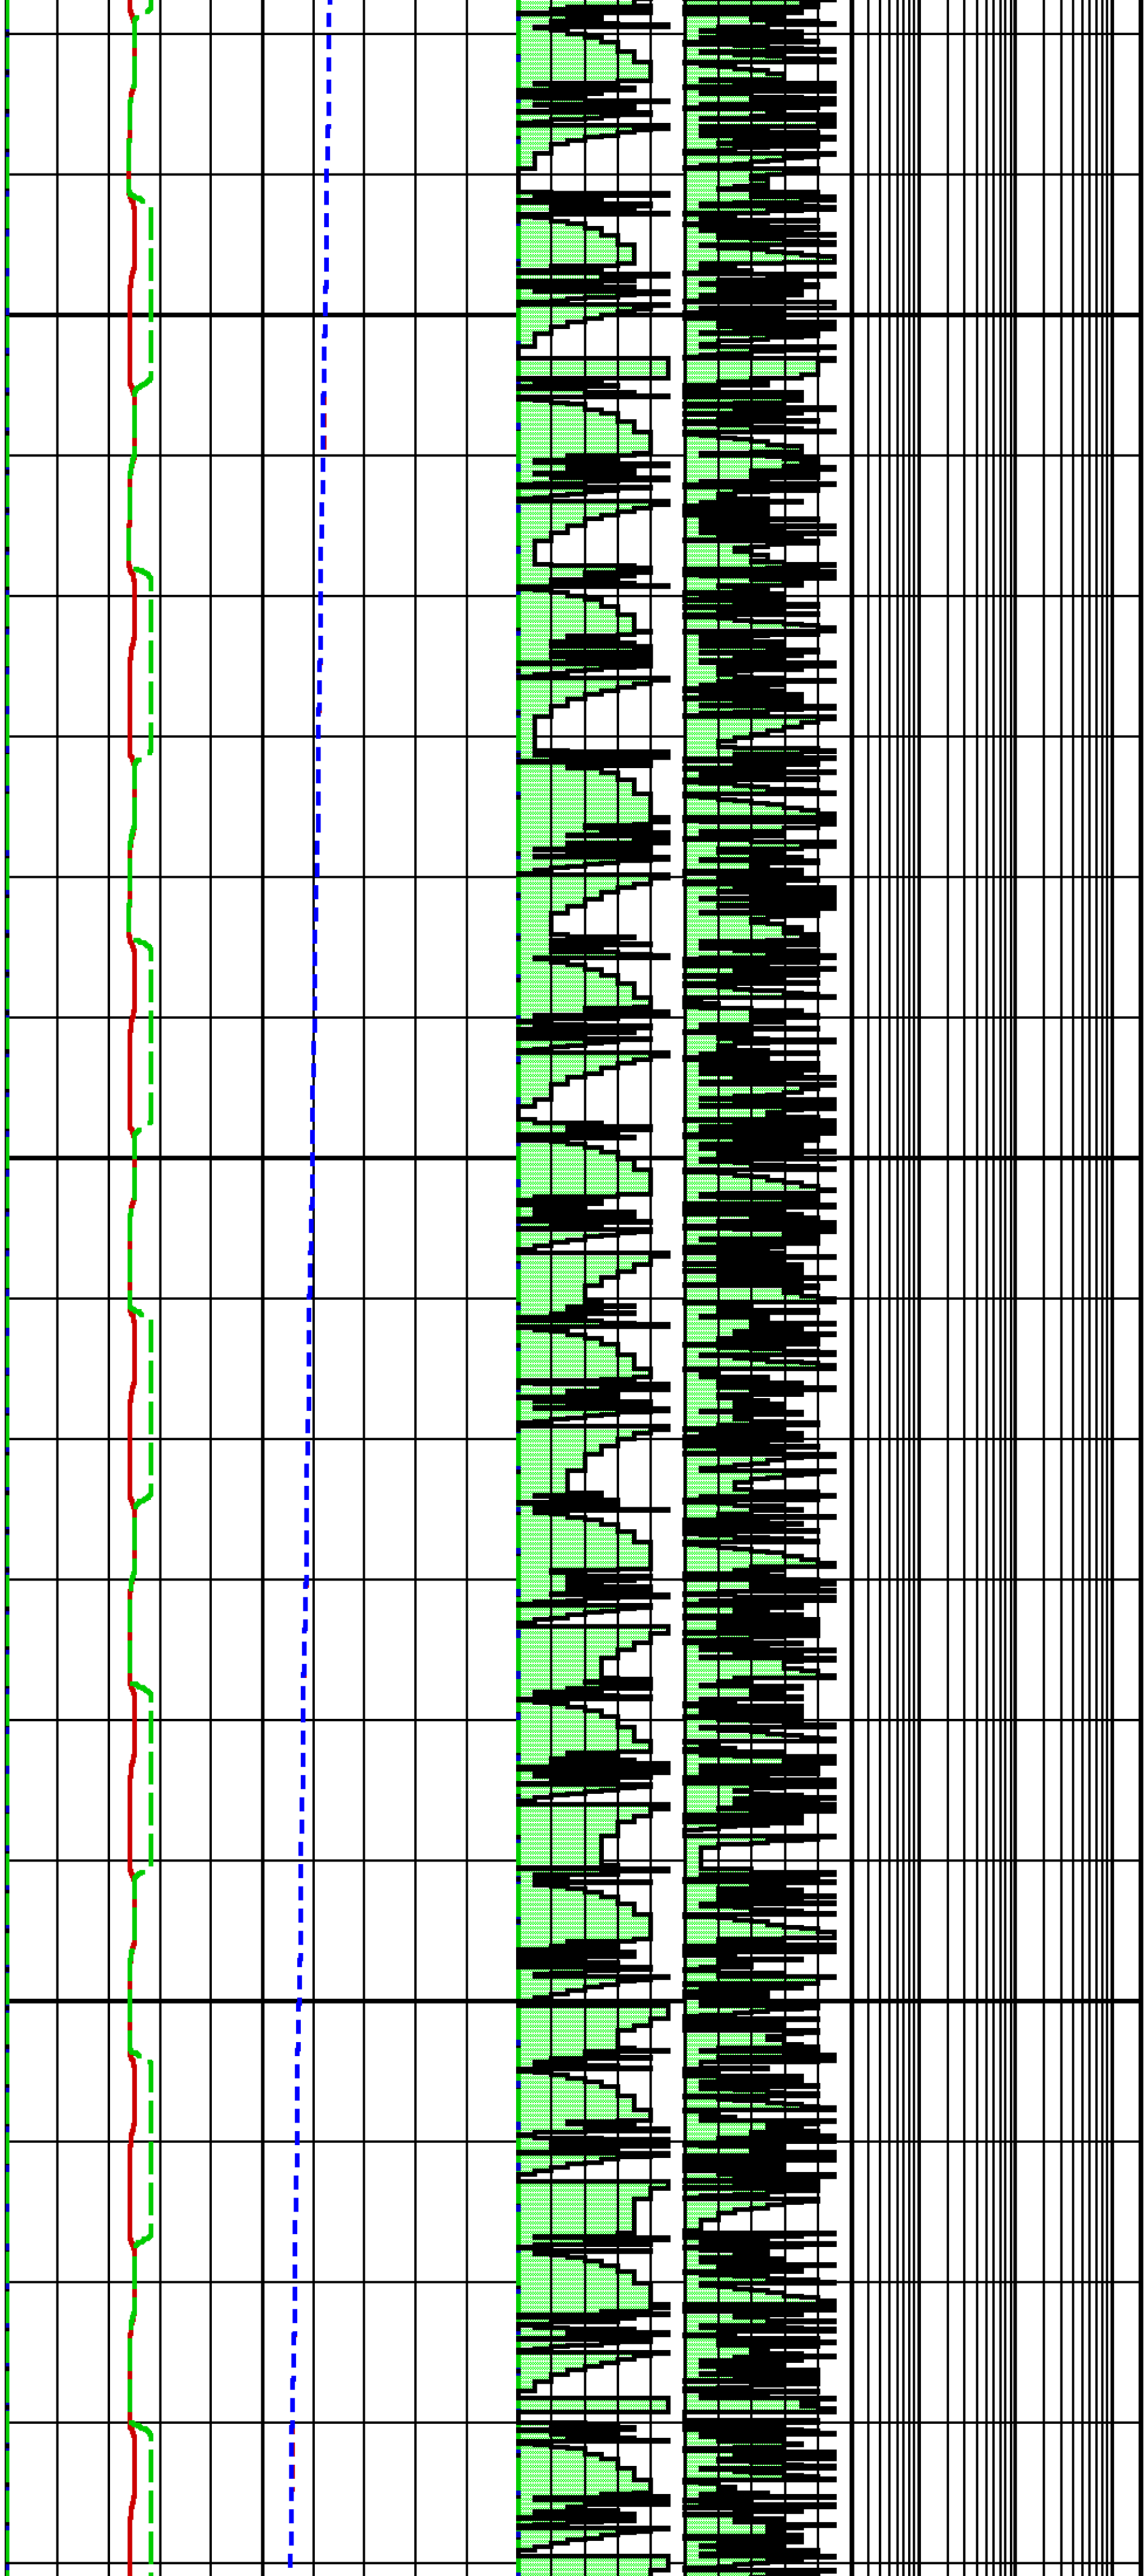

1480	3754.3	200.7
	3631.1	200.7
1490	3600.5	200.7
	3757.1	200.7
1500	3615.6	200.7
	3656.1	200.7
1510	3753.6	200.7
	3603.9	200.7
1520	3754.2	200.7
	3627.3	200.7
1530	3611.4	200.7
	3758.7	200.7
1540	3609.3	200.7
	3722.1	200.7
1550	3696.5	200.7
	3612.8	200.7
1560	3757.0	200.7
	3620.4	200.7
1570	3604.9	200.7
	3758.1	200.7
1580	3616.8	200.7
	3749.7	200.7
1590	3687.9	200.7
	3606.9	200.7
1600	3756.4	200.7
	3625.4	200.7
1610	3615.2	200.7
	3758.9	200.7
1620	3610.7	200.7
	3751.2	200.7
1630	3645.7	200.7
	3617.3	200.7
1640	3758.0	200.7
	3619.5	200.7
1650	3614.1	200.7
	3757.5	200.7
1660	3619.4	200.7

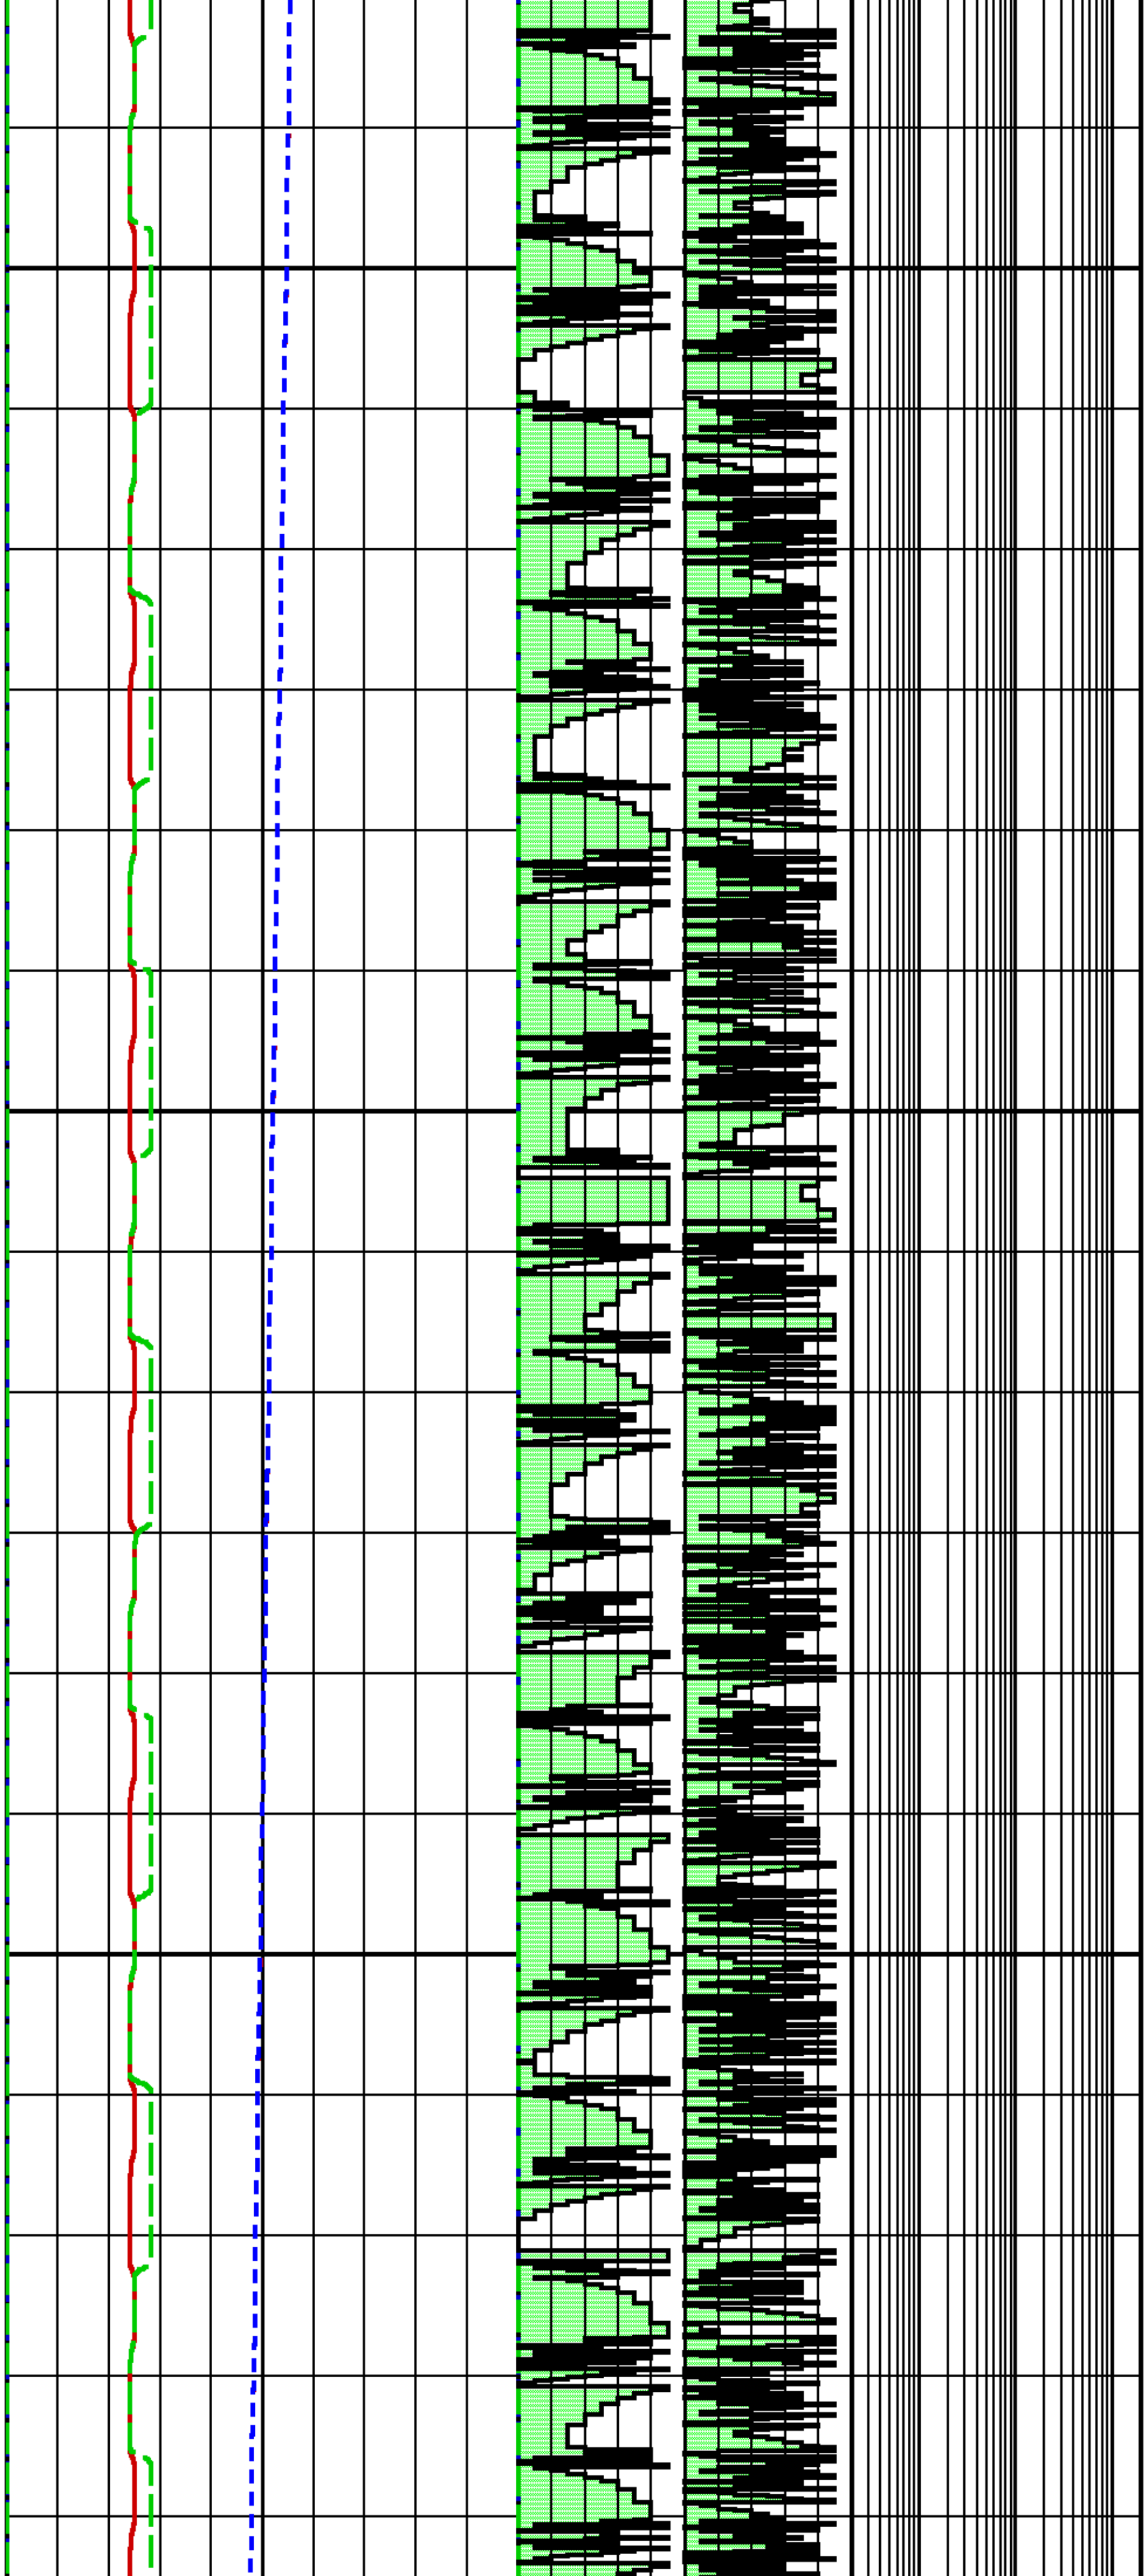

	3755.7	200.7
1670	3639.6	200.7
	3611.6	200.7
1680	3757.8	200.7
	3625.2	200.7
1690	3661.2	200.7
	3752.8	200.7
1700	3615.2	200.7
	3755.7	200.7
1710	3636.1	200.7
	3621.7	200.7
1720	3759.0	200.7
	3620.0	200.7
1730	3707.6	200.7
	3713.6	200.7
1740	3623.8	200.7
	3759.9	200.7
1750	3632.0	200.7
	3615.0	200.7
1760	3758.3	200.7
	3625.2	200.7
1770	3792.7	200.7
	3701.5	200.7
1780	3607.4	200.7
	3756.3	200.7
1790	3626.1	200.7
	3616.3	200.7
1800	3759.2	200.7
	3615.0	200.8
1810	3751.4	200.8
	3656.6	200.8
1820	3620.3	200.8
	3758.1	200.8
1830	3624.0	200.8
	3613.8	200.8
1840	3758.6	200.8

		3624.9	200.8
1850		3755.5	200.8
		3653.7	200.8
1860		3616.2	200.8
		3757.8	200.8
1870		3630.0	200.8
		3632.4	200.8
1880		3759.3	200.8
		3621.1	200.8
1890		3755.4	200.8
		3644.7	200.8
1900		3626.7	200.8
		3759.1	200.8
1910		3626.5	200.8
	BB[1] STOP OPERATION	3727.2	200.8
1920	WA[1] CLOSE EXIT-6TANK	3757.0	200.8
		3758.6	200.8
1930	WA[1] OPEN TANK 3	3758.4	200.8
		3759.1	200.8
1940	BB[1] RESUME OPERATION	3691.5	200.8
		3760.1	200.8
1950		3623.9	200.8
		3757.5	200.8
1960		3645.5	200.8
		3619.3	200.8
1970		3758.1	200.8
		3631.0	200.8
1980		3669.3	200.8
		3720.6	200.8
1990		3621.9	200.8
		3757.3	200.8
2000		3638.3	200.8
		3629.4	200.8
2010		3759.7	200.8
		3625.3	200.8
2020		3752.3	200.8
		3677.2	200.8

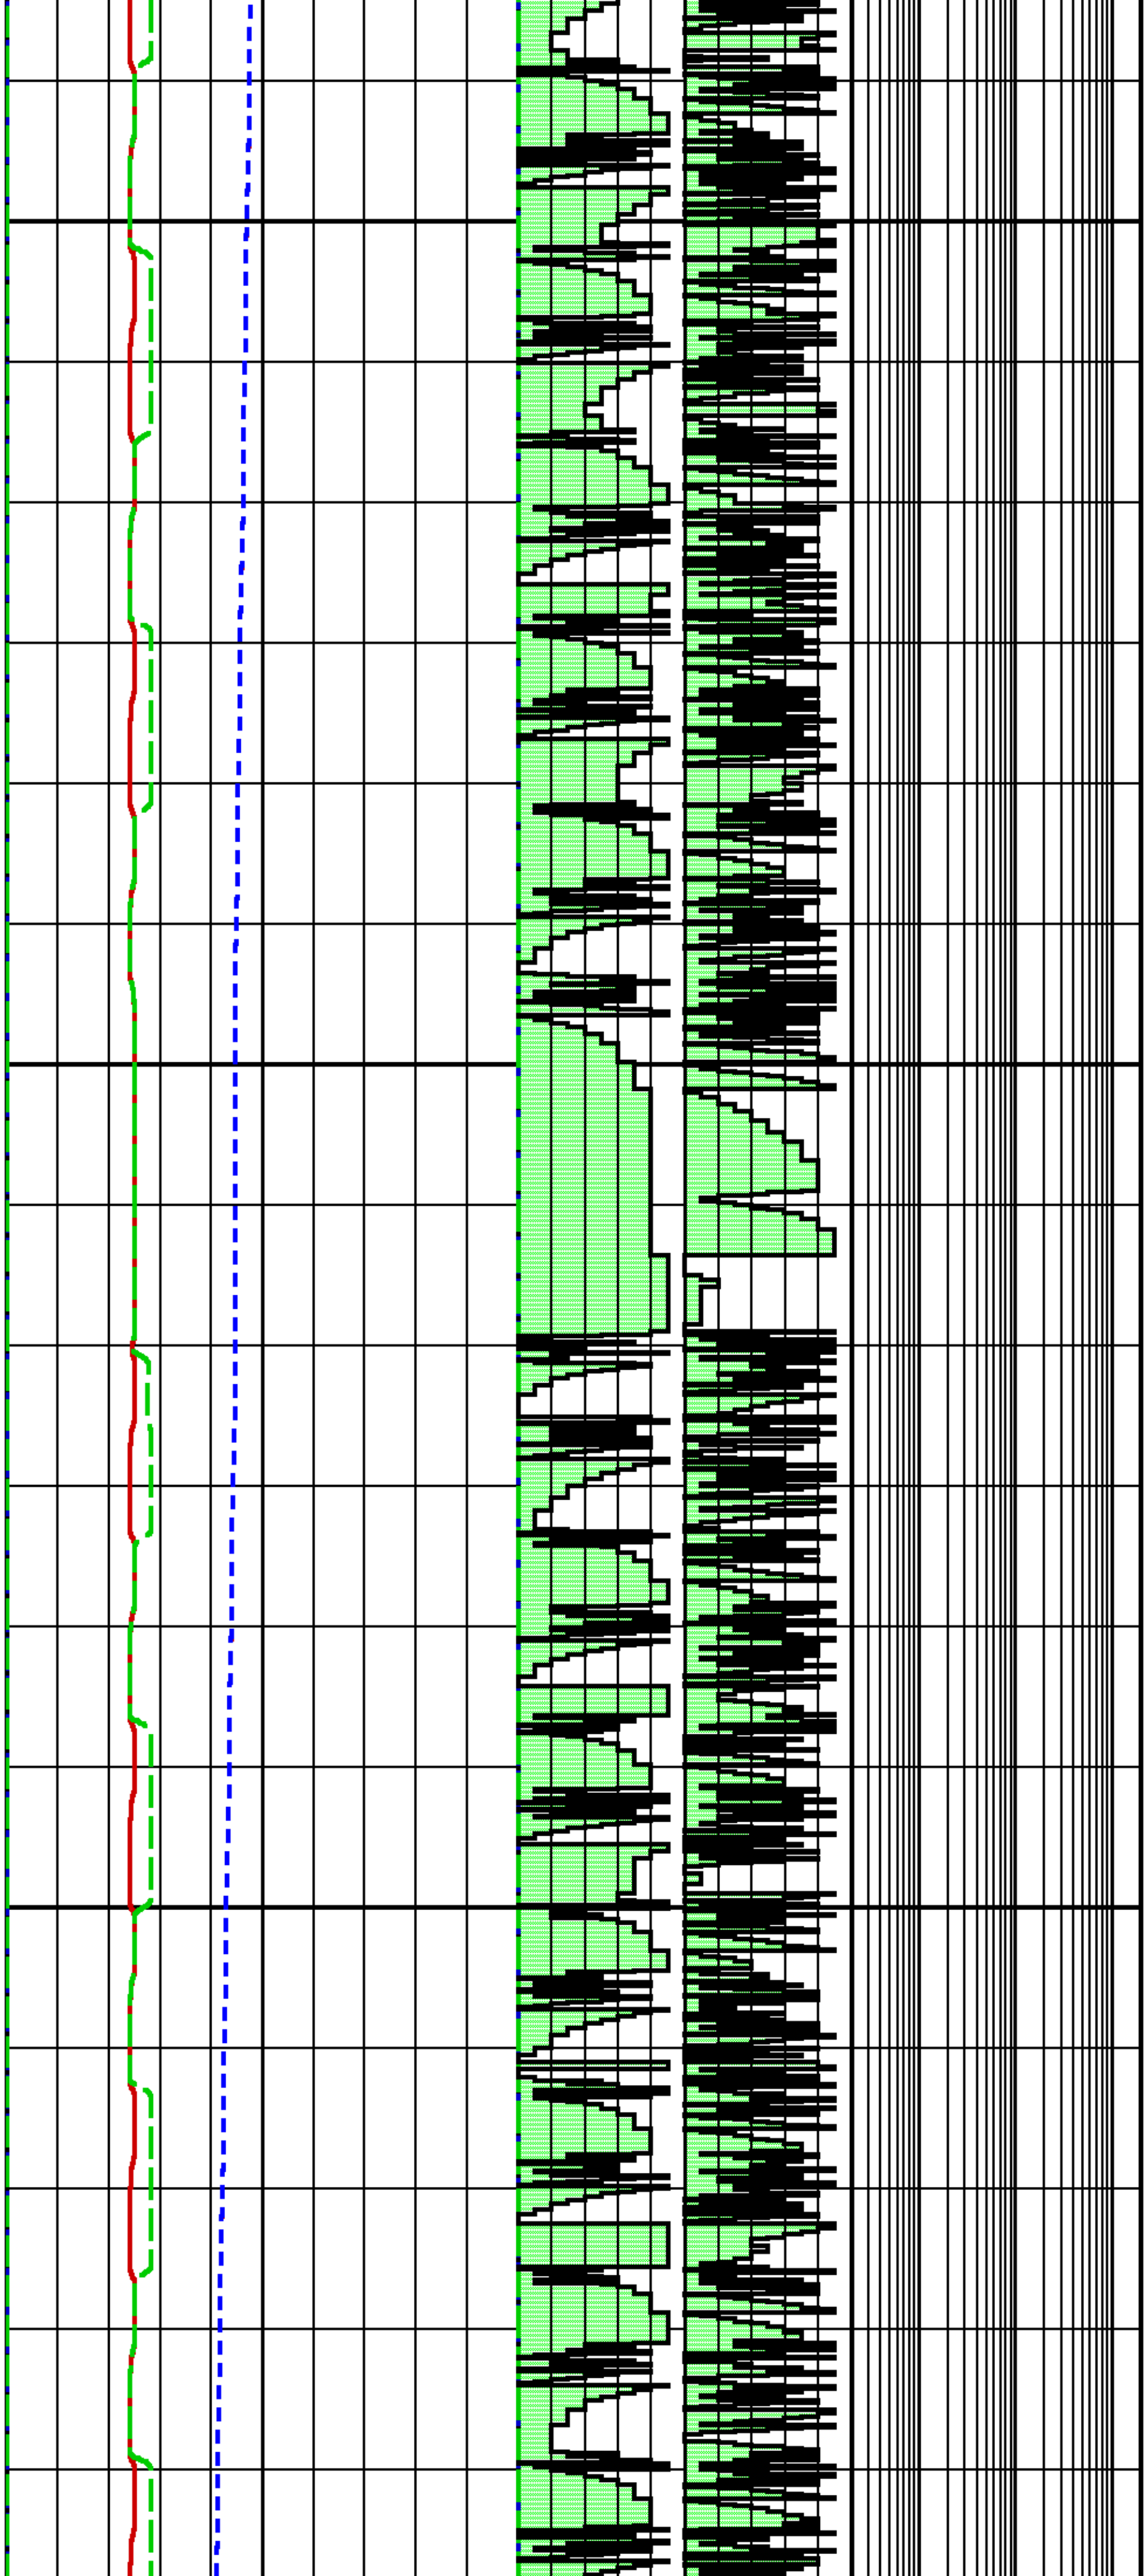

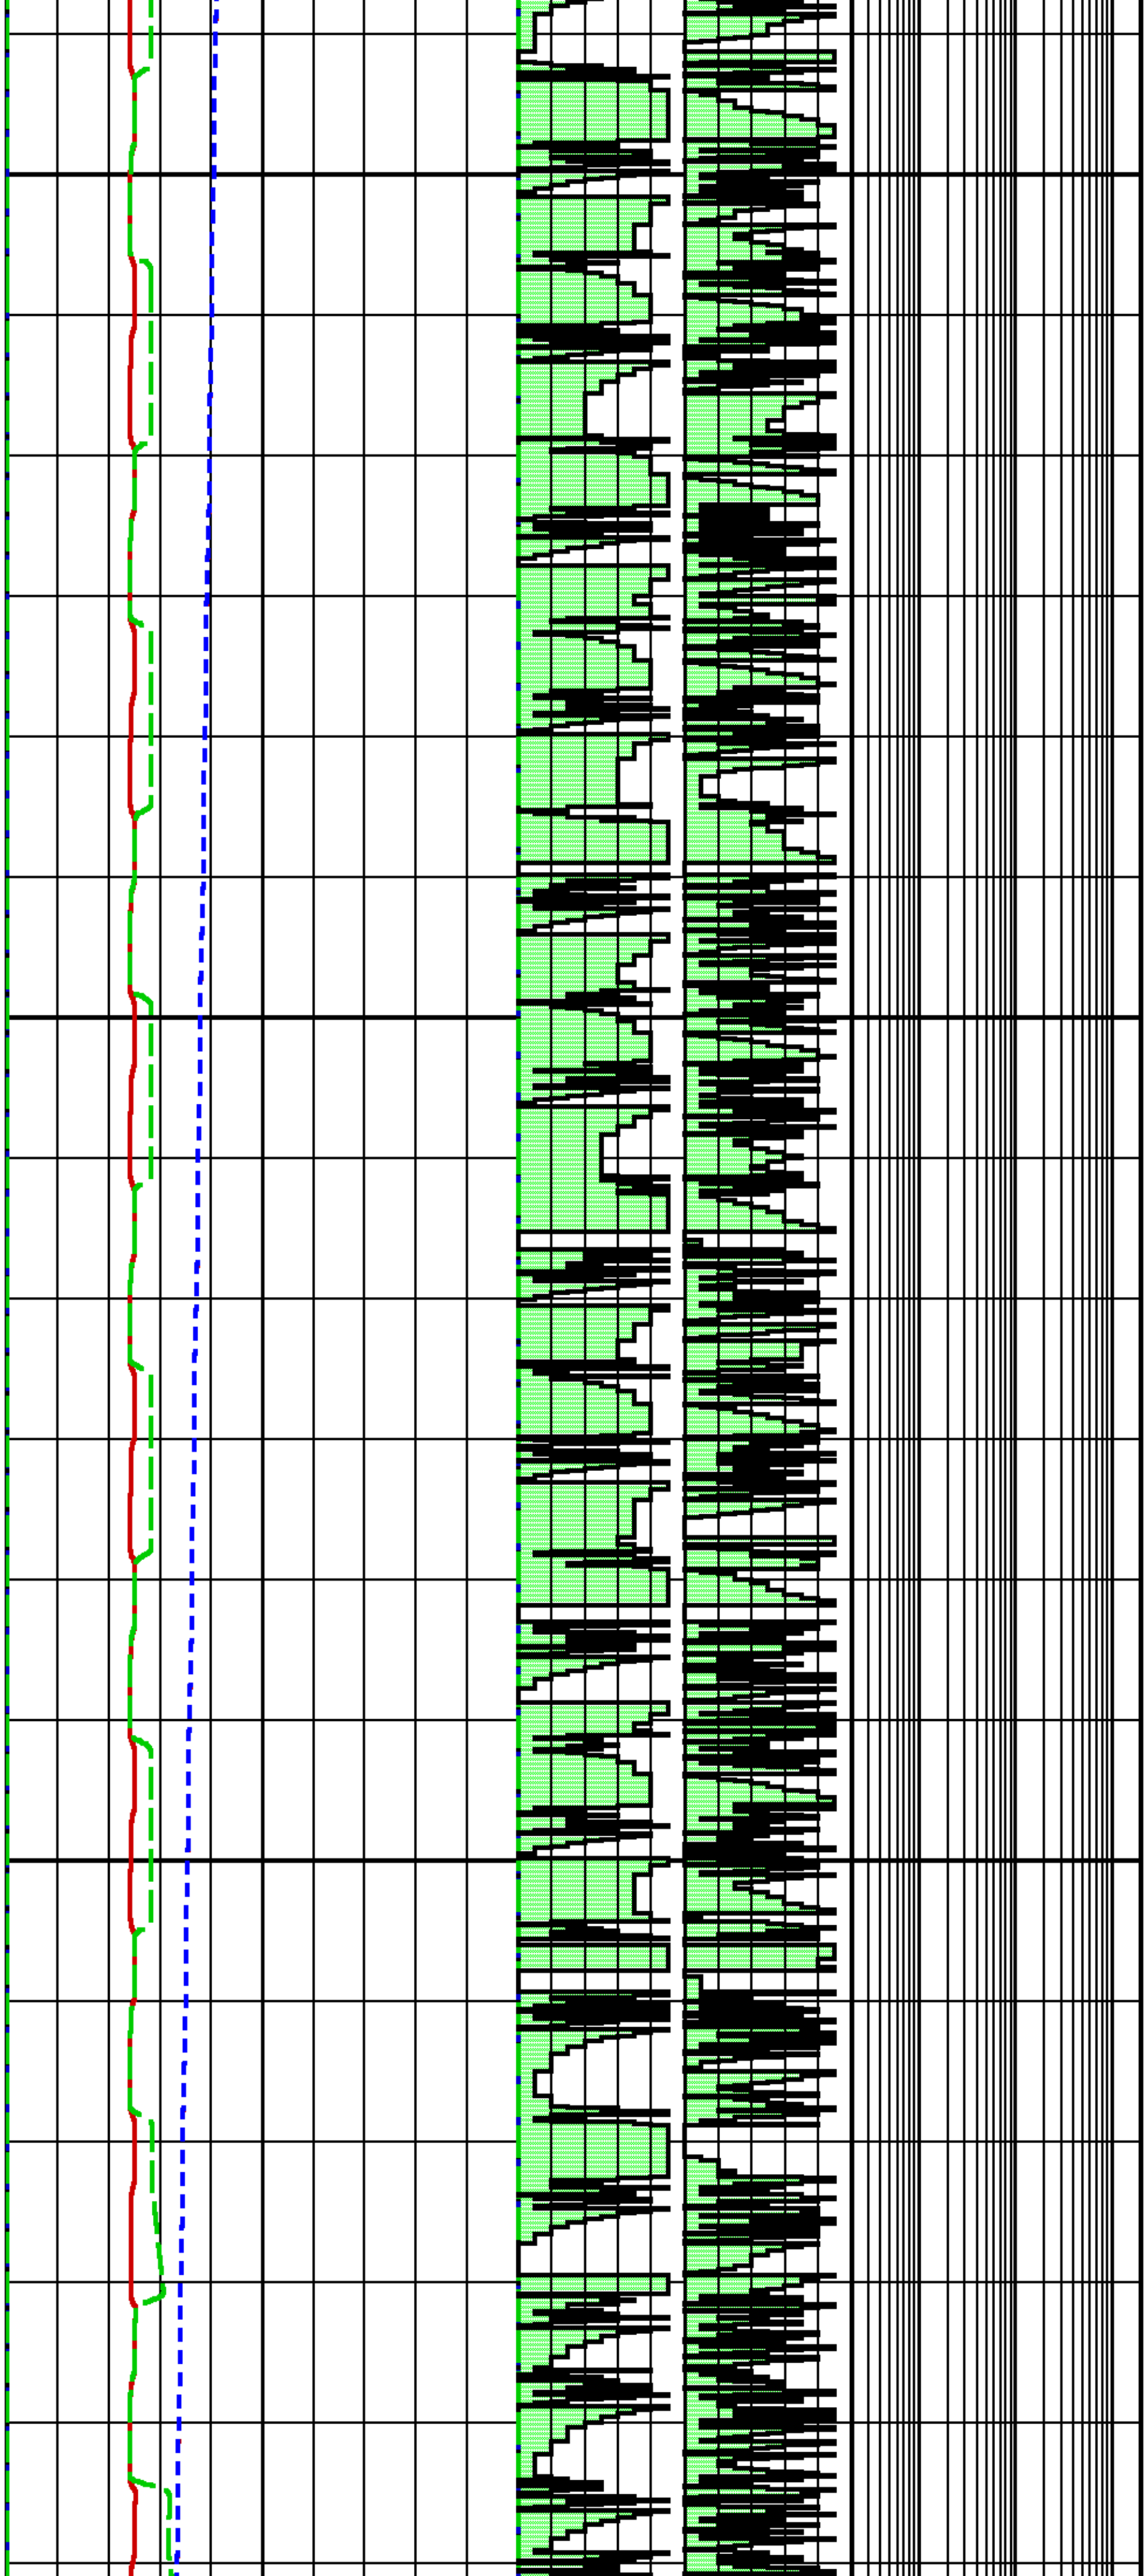

2030	3631.5	200.8
	3759.4	200.8
2040	3637.1	200.8
	3627.6	200.8
2050	3758.8	200.8
	3635.4	200.8
2060	3757.8	200.8
	3654.6	200.8
2070	3628.0	200.8
	3758.4	200.8
2080	3639.4	200.8
	3643.2	200.8
2090	3759.5	200.8
	3628.4	200.8
2100	3756.7	200.8
	3649.4	200.8
2110	3635.7	200.8
	3759.9	200.8
2120	3631.3	200.8
	3691.6	200.8
2130	3741.4	200.8
	3637.5	200.8
2140	3759.4	200.8
	3645.6	200.8
2150	3628.2	200.8
	3758.8	200.8
2160	3639.5	200.8
	3726.6	200.8
2170	3733.0	200.8
	3632.0	200.8
2180	3759.1	200.8
	3647.7	200.8
2190	3639.7	200.8
	3763.3	200.8
2200	3624.8	200.8
	3790.9	200.8
2210	3696.4	200.8

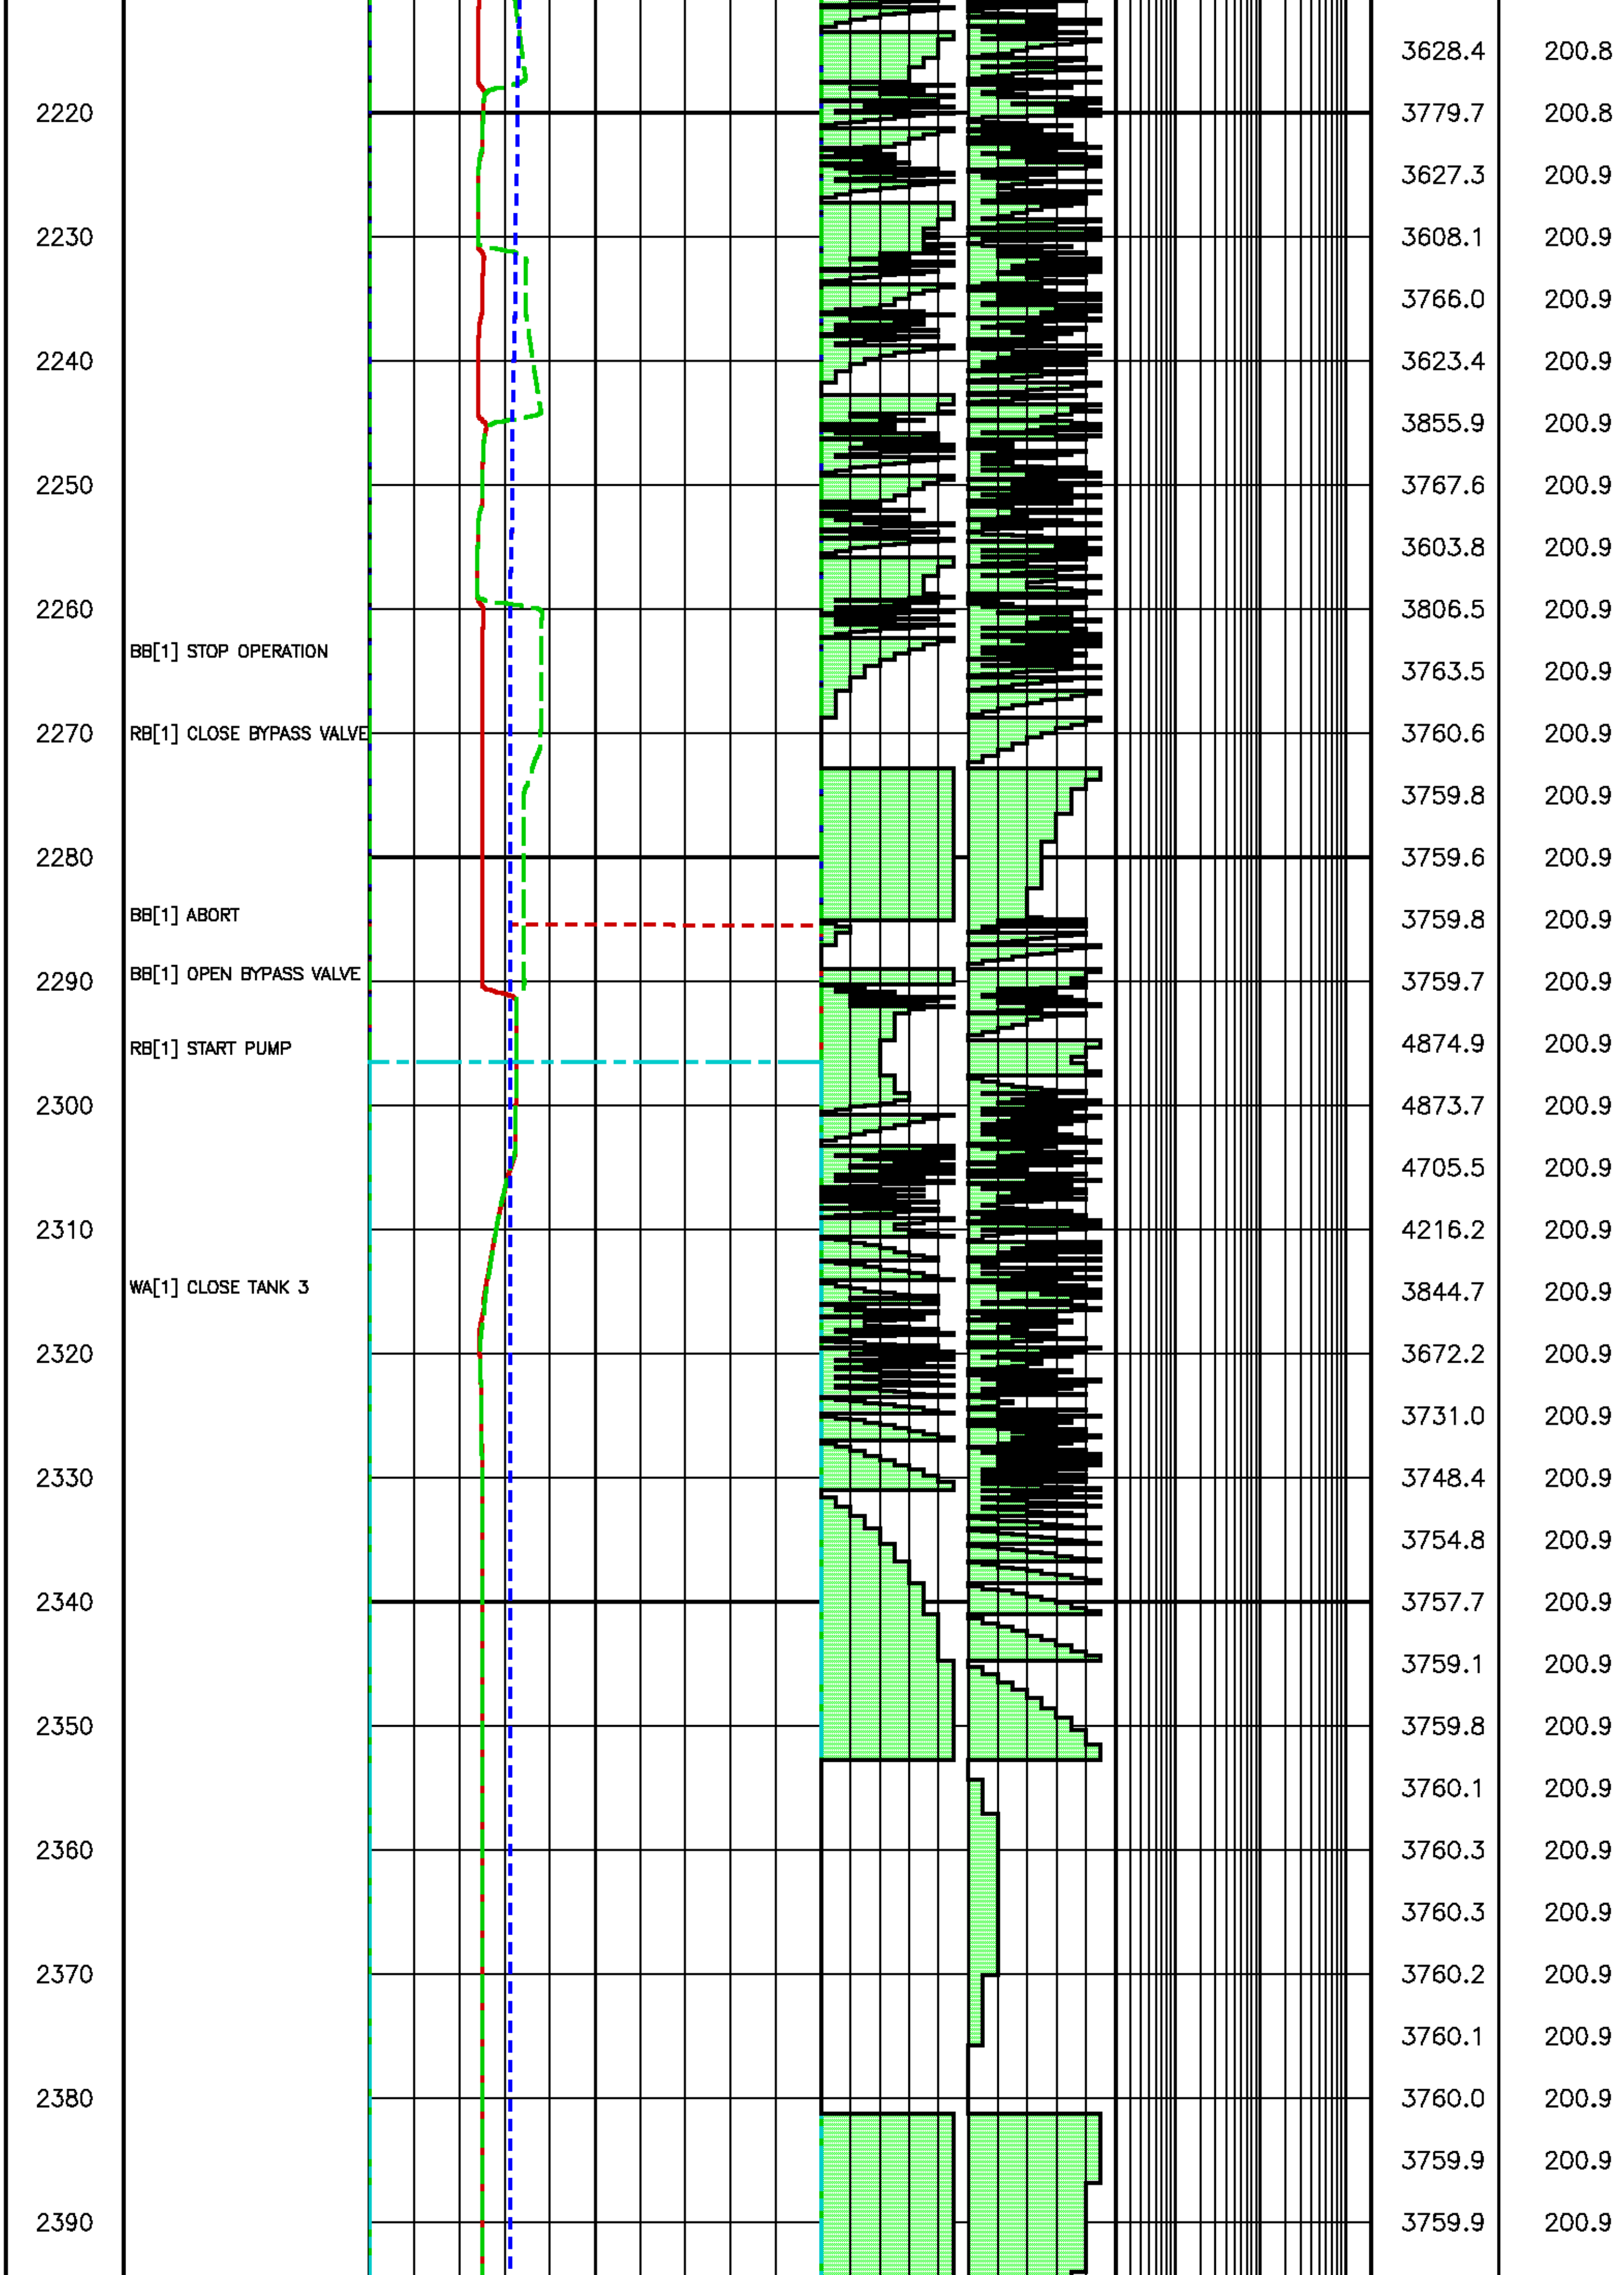

2220
2230
2240
2250
2260
2270
2280
2290
2300
2310
2320
2330
2340
2350
2360
2370
2380
2390
BB[1] STOP OPERATION
RB[1] CLOSE BYPASS VALVE
BB[1] ABORT
BB[1] OPEN BYPASS VALVE
RB[1] START PUMP
WA[1] CLOSE TANK 3
3628.4 200.8
3779.7 200.8
3627.3 200.9
3608.1 200.9
3766.0 200.9
3623.4 200.9
3855.9 200.9
3767.6 200.9
3603.8 200.9
3806.5 200.9
3763.5 200.9
3760.6 200.9
3759.8 200.9
3759.6 200.9
3759.8 200.9
3759.7 200.9
4874.9 200.9
4873.7 200.9
4705.5 200.9
4216.2 200.9
3844.7 200.9
3672.2 200.9
3731.0 200.9
3748.4 200.9
3754.8 200.9
3757.7 200.9
3759.1 200.9
3759.8 200.9
3760.1 200.9
3760.3 200.9
3760.3 200.9
3760.2 200.9
3760.1 200.9
3760.0 200.9
3759.9 200.9
3759.9 200.9

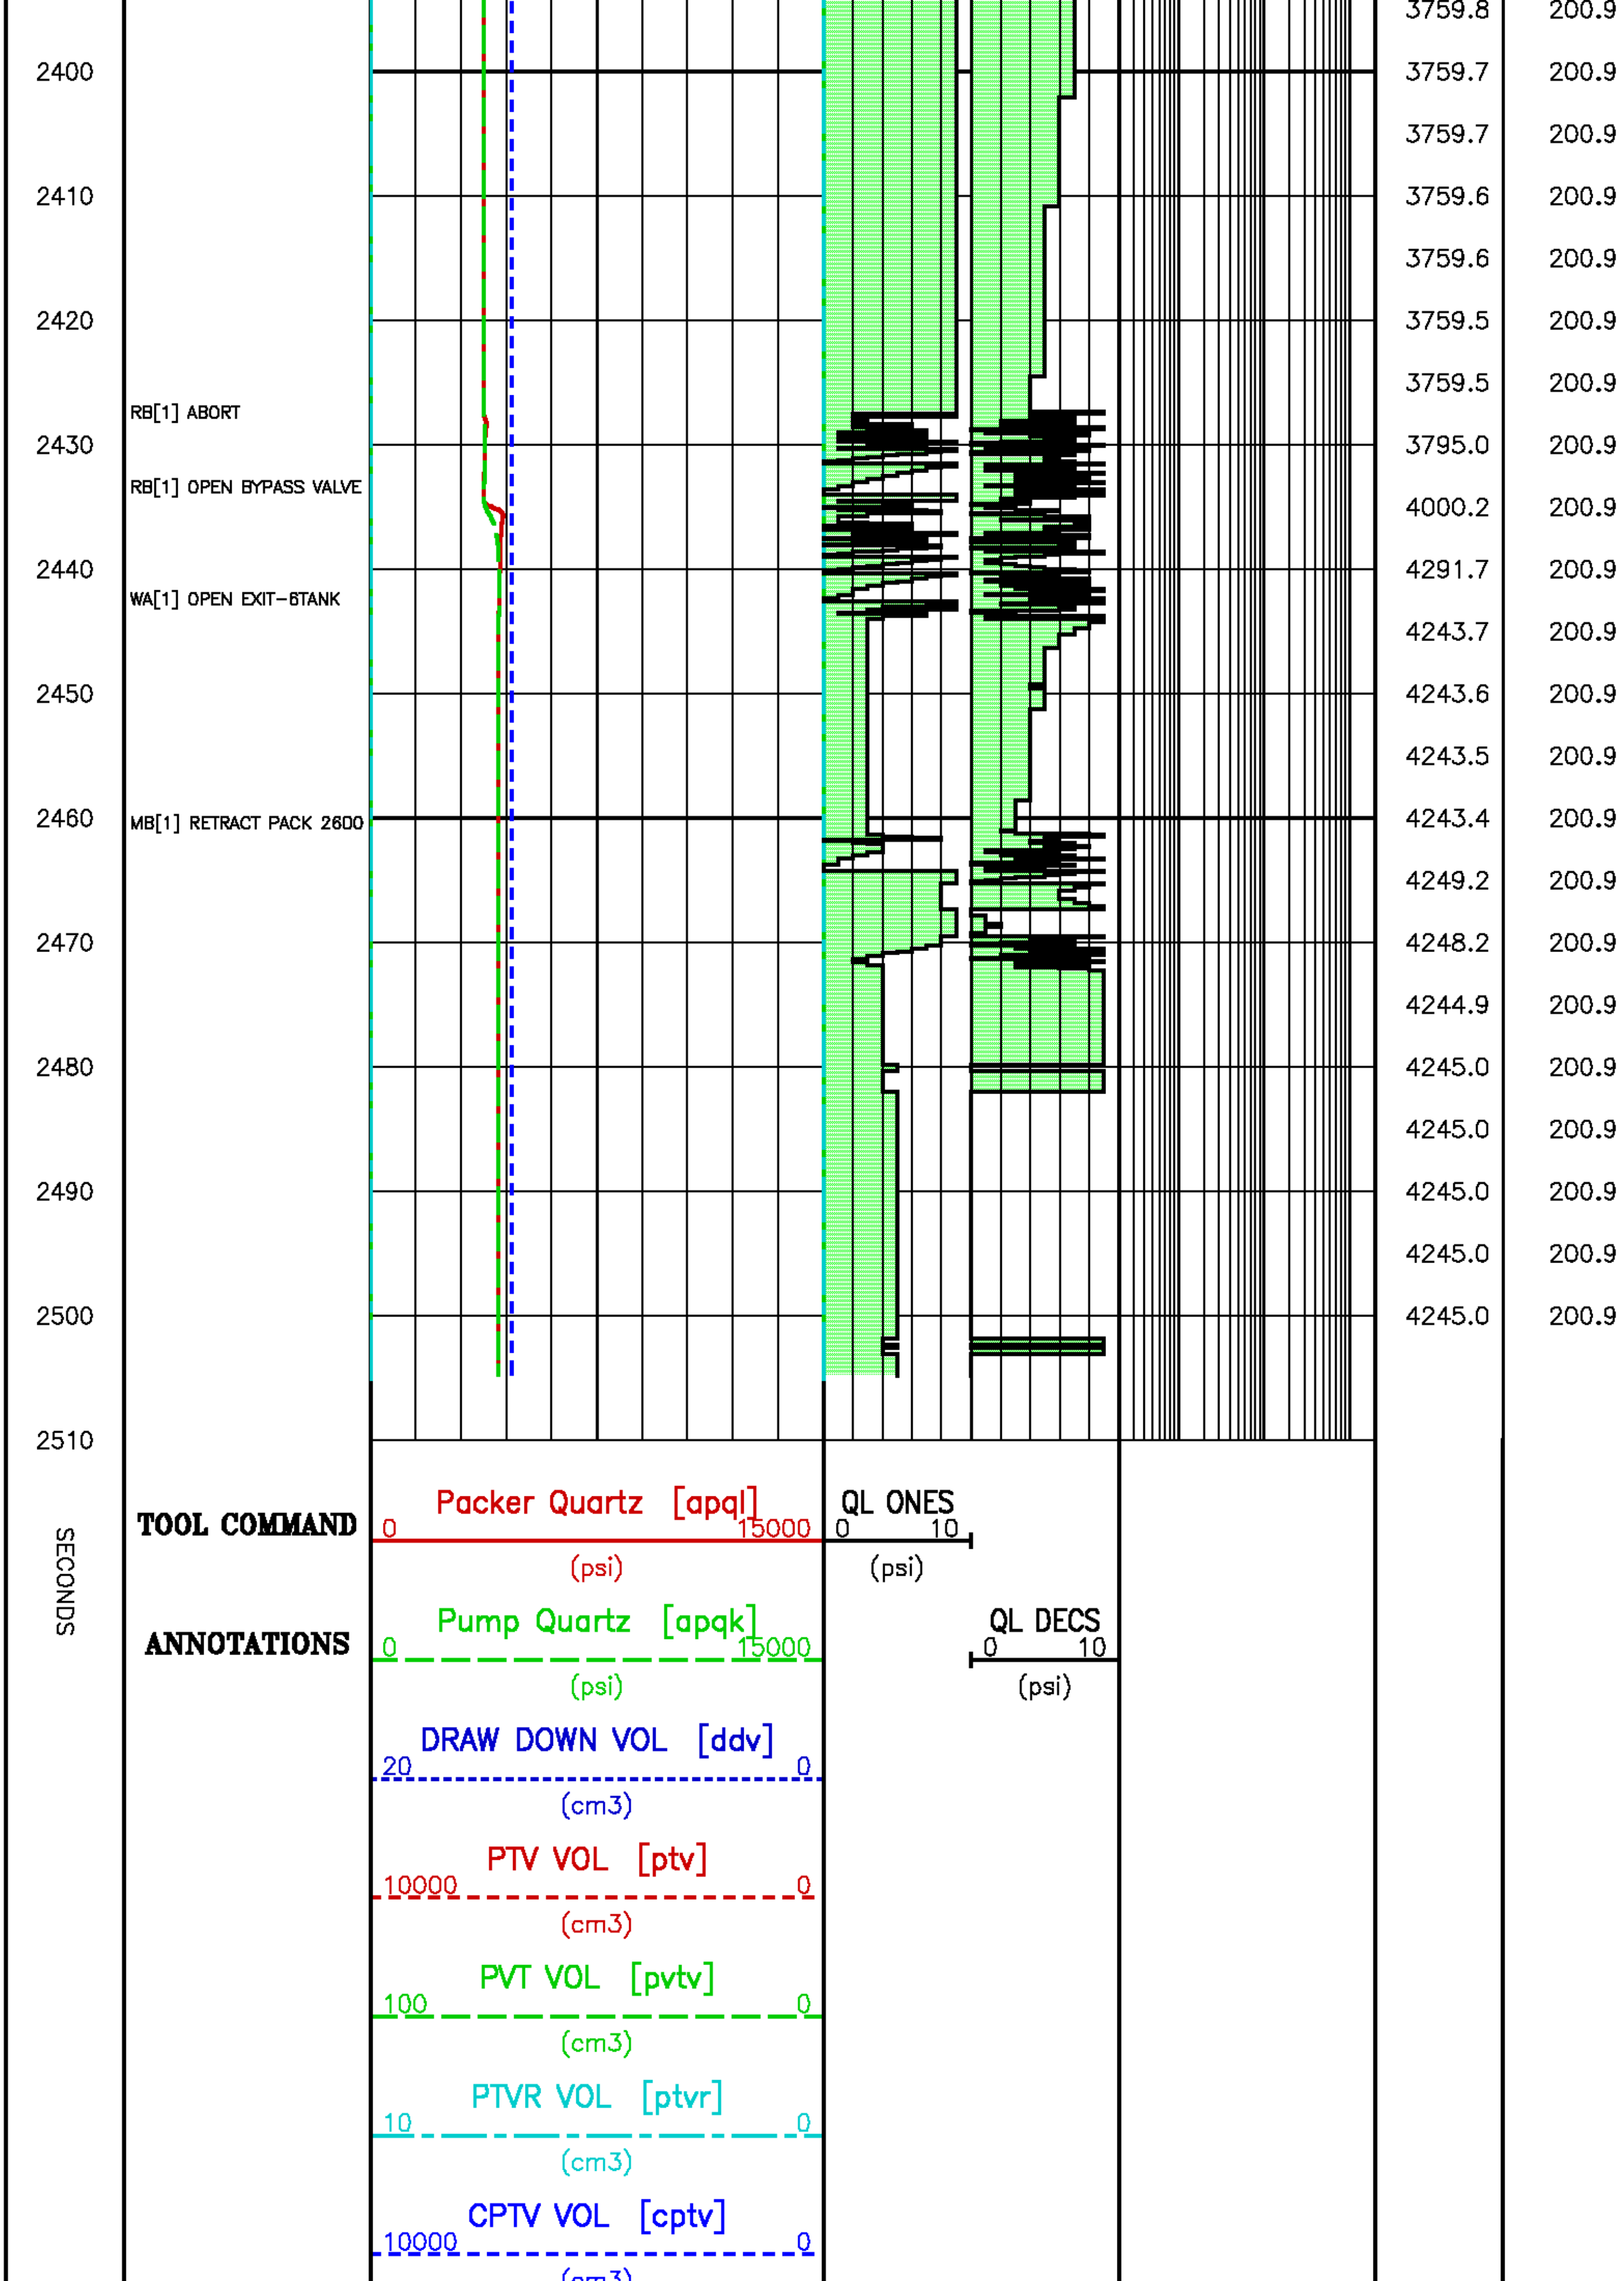

2400
2410
2420
2430
2440
2450
2460
2470
2480
2490
2500
2510
SECONDS
RB[1] ABORT
RB[1] OPEN BYPASS VALVE
WA[1] OPEN EXIT-6TANK
MB[1] RETRACT PACK 2600
3759.8 200.9
3759.7 200.9
3759.7 200.9
3759.6 200.9
3759.6 200.9
3759.5 200.9
3759.5 200.9
3795.0 200.9
4000.2 200.9
4291.7 200.9
4243.7 200.9
4243.6 200.9
4243.5 200.9
4243.4 200.9
4249.2 200.9
4248.2 200.9
4244.9 200.9
4245.0 200.9
4245.0 200.9
4245.0 200.9
4245.0 200.9
4245.0 200.9
TOOL COMMAND
ANNOTATIONS
Packer Quartz [apql]
0 15000
(psi)
Pump Quartz [apqk]
0 15000
(psi)
DRAW DOWN VOL [ddv]
20 0
(cm3)
PTV VOL [ptv]
10000 0
(cm3)
PVT VOL [pvtv]
100 0
(cm3)
PTVR VOL [ptvr]
10 0
(cm3)
CPTV VOL [cptv]
10000 0
(cm3)
QL ONES
0 10
(psi)
QL DECS
0 10
(psi)

(cm3) APQL (psi) RTDQL (degF)

Data File : j800g62.aff
Presentation: sampleview_ibsig.log

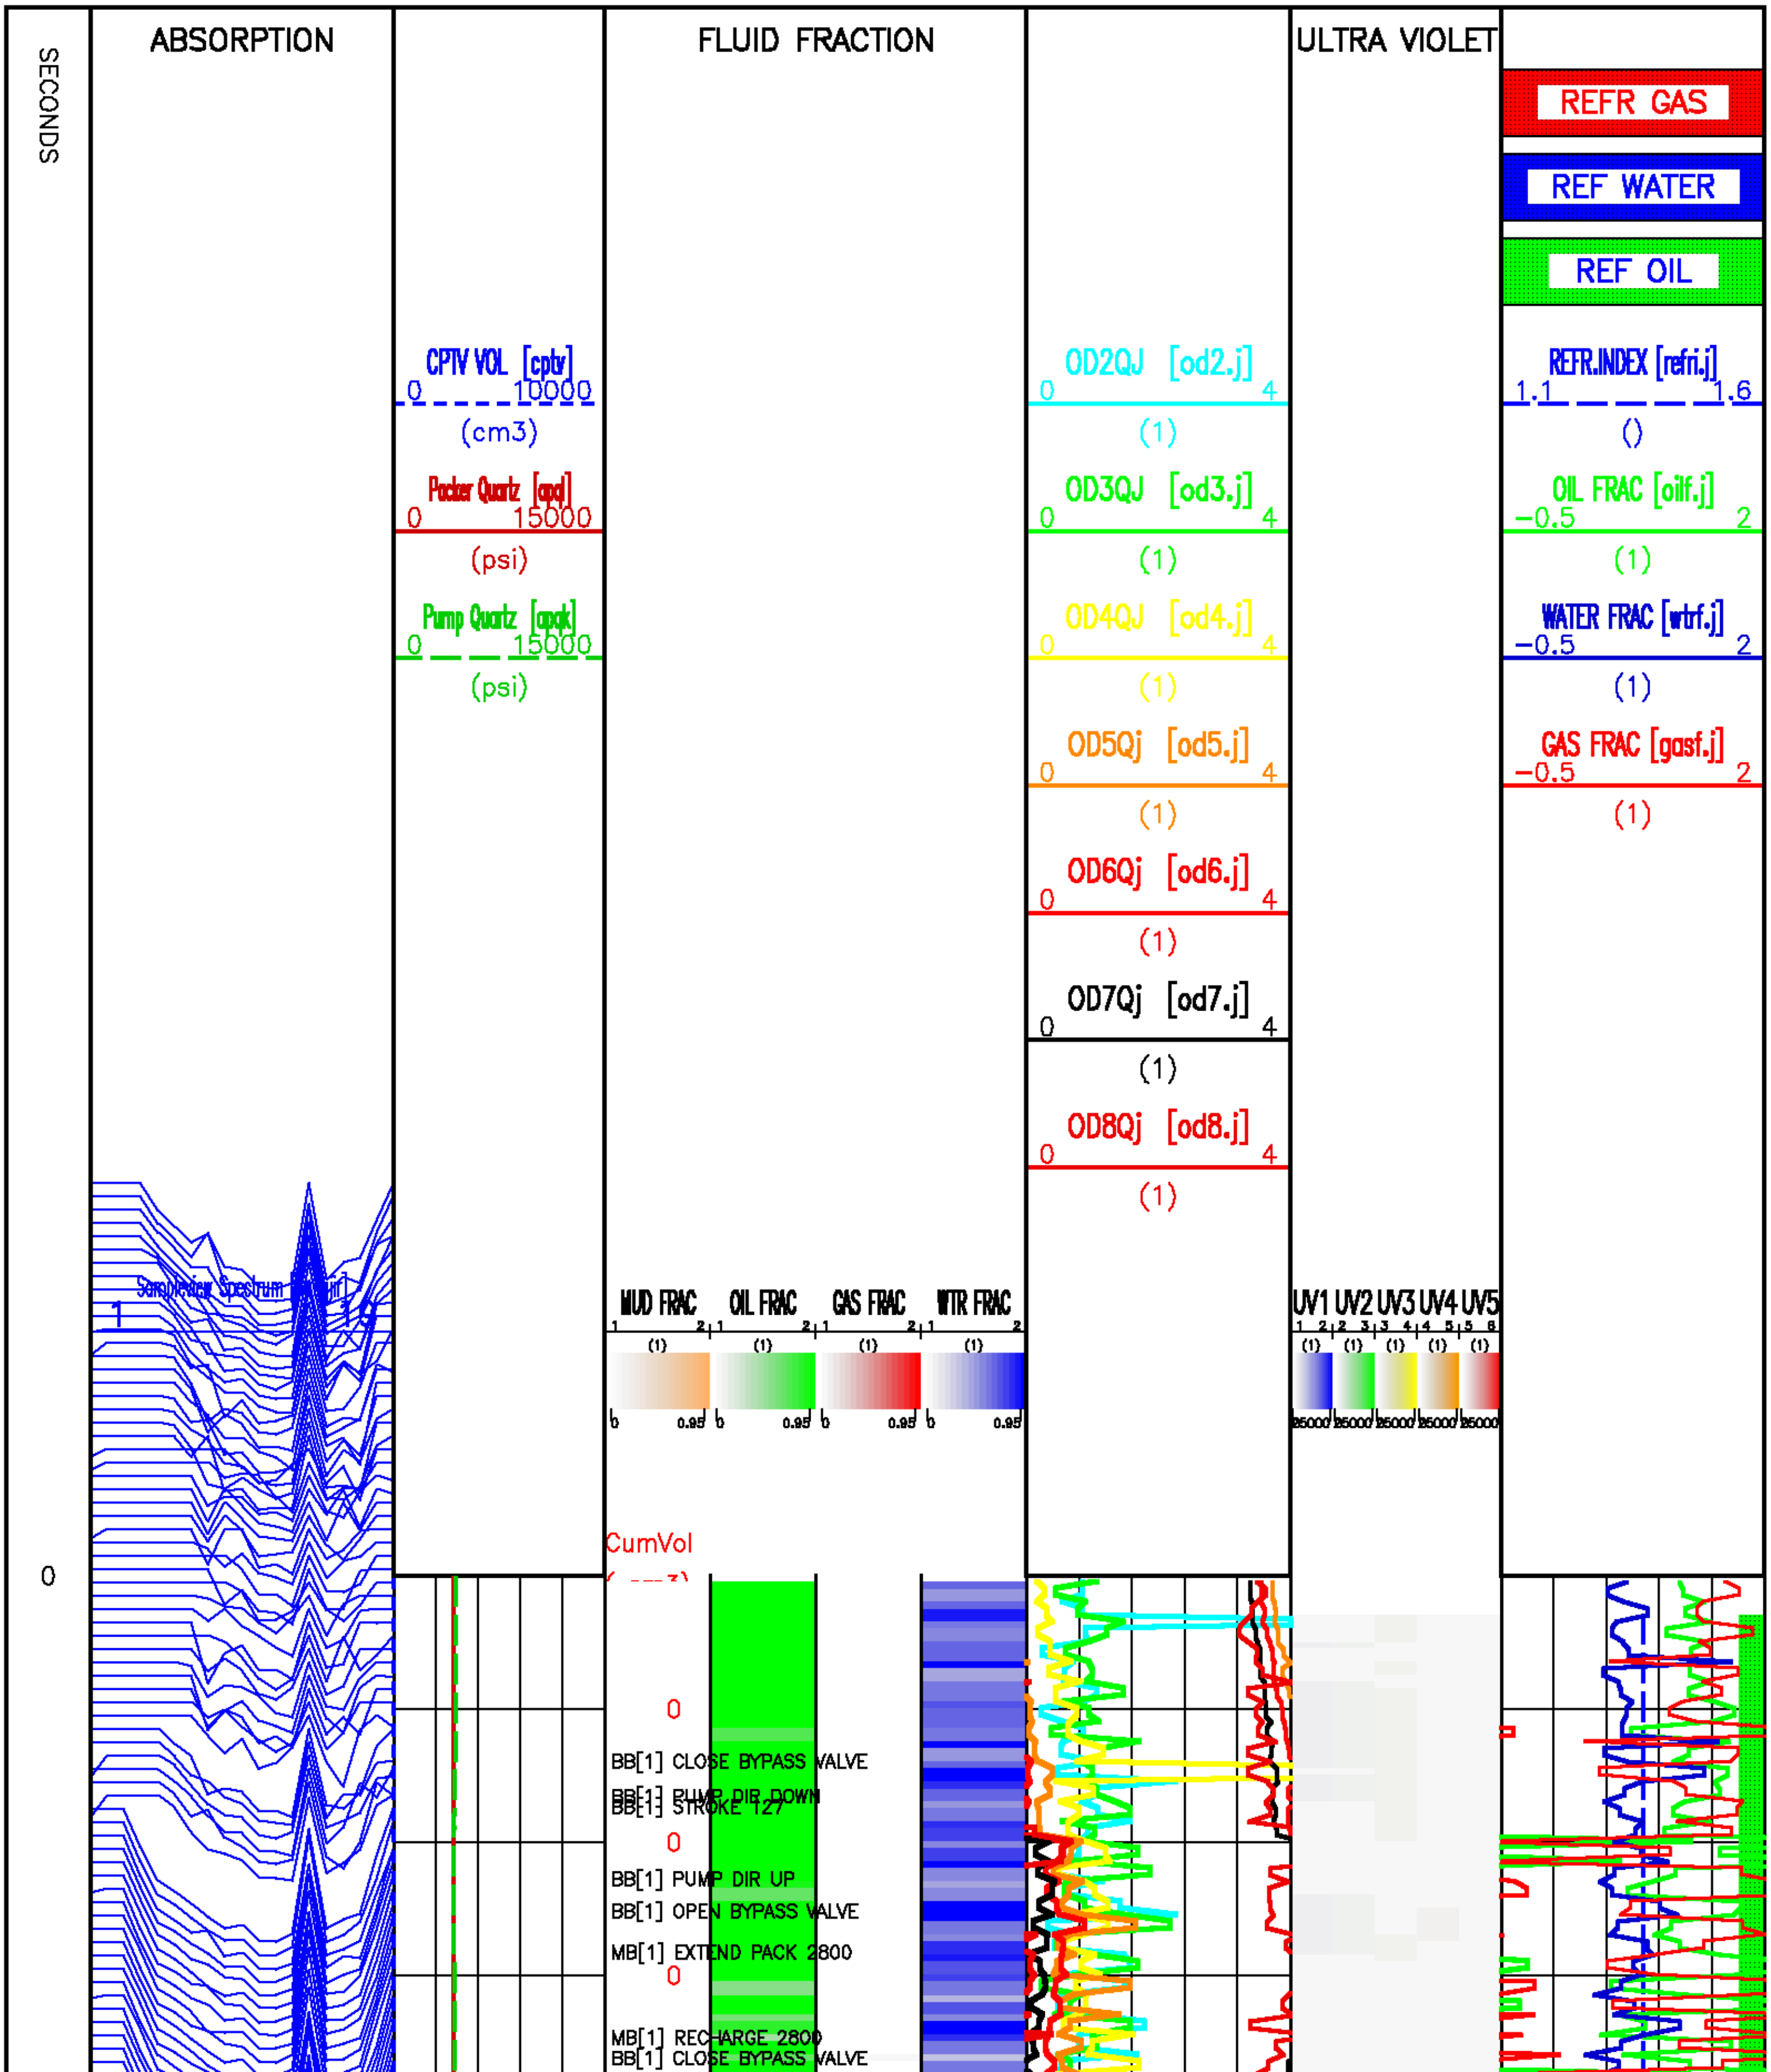

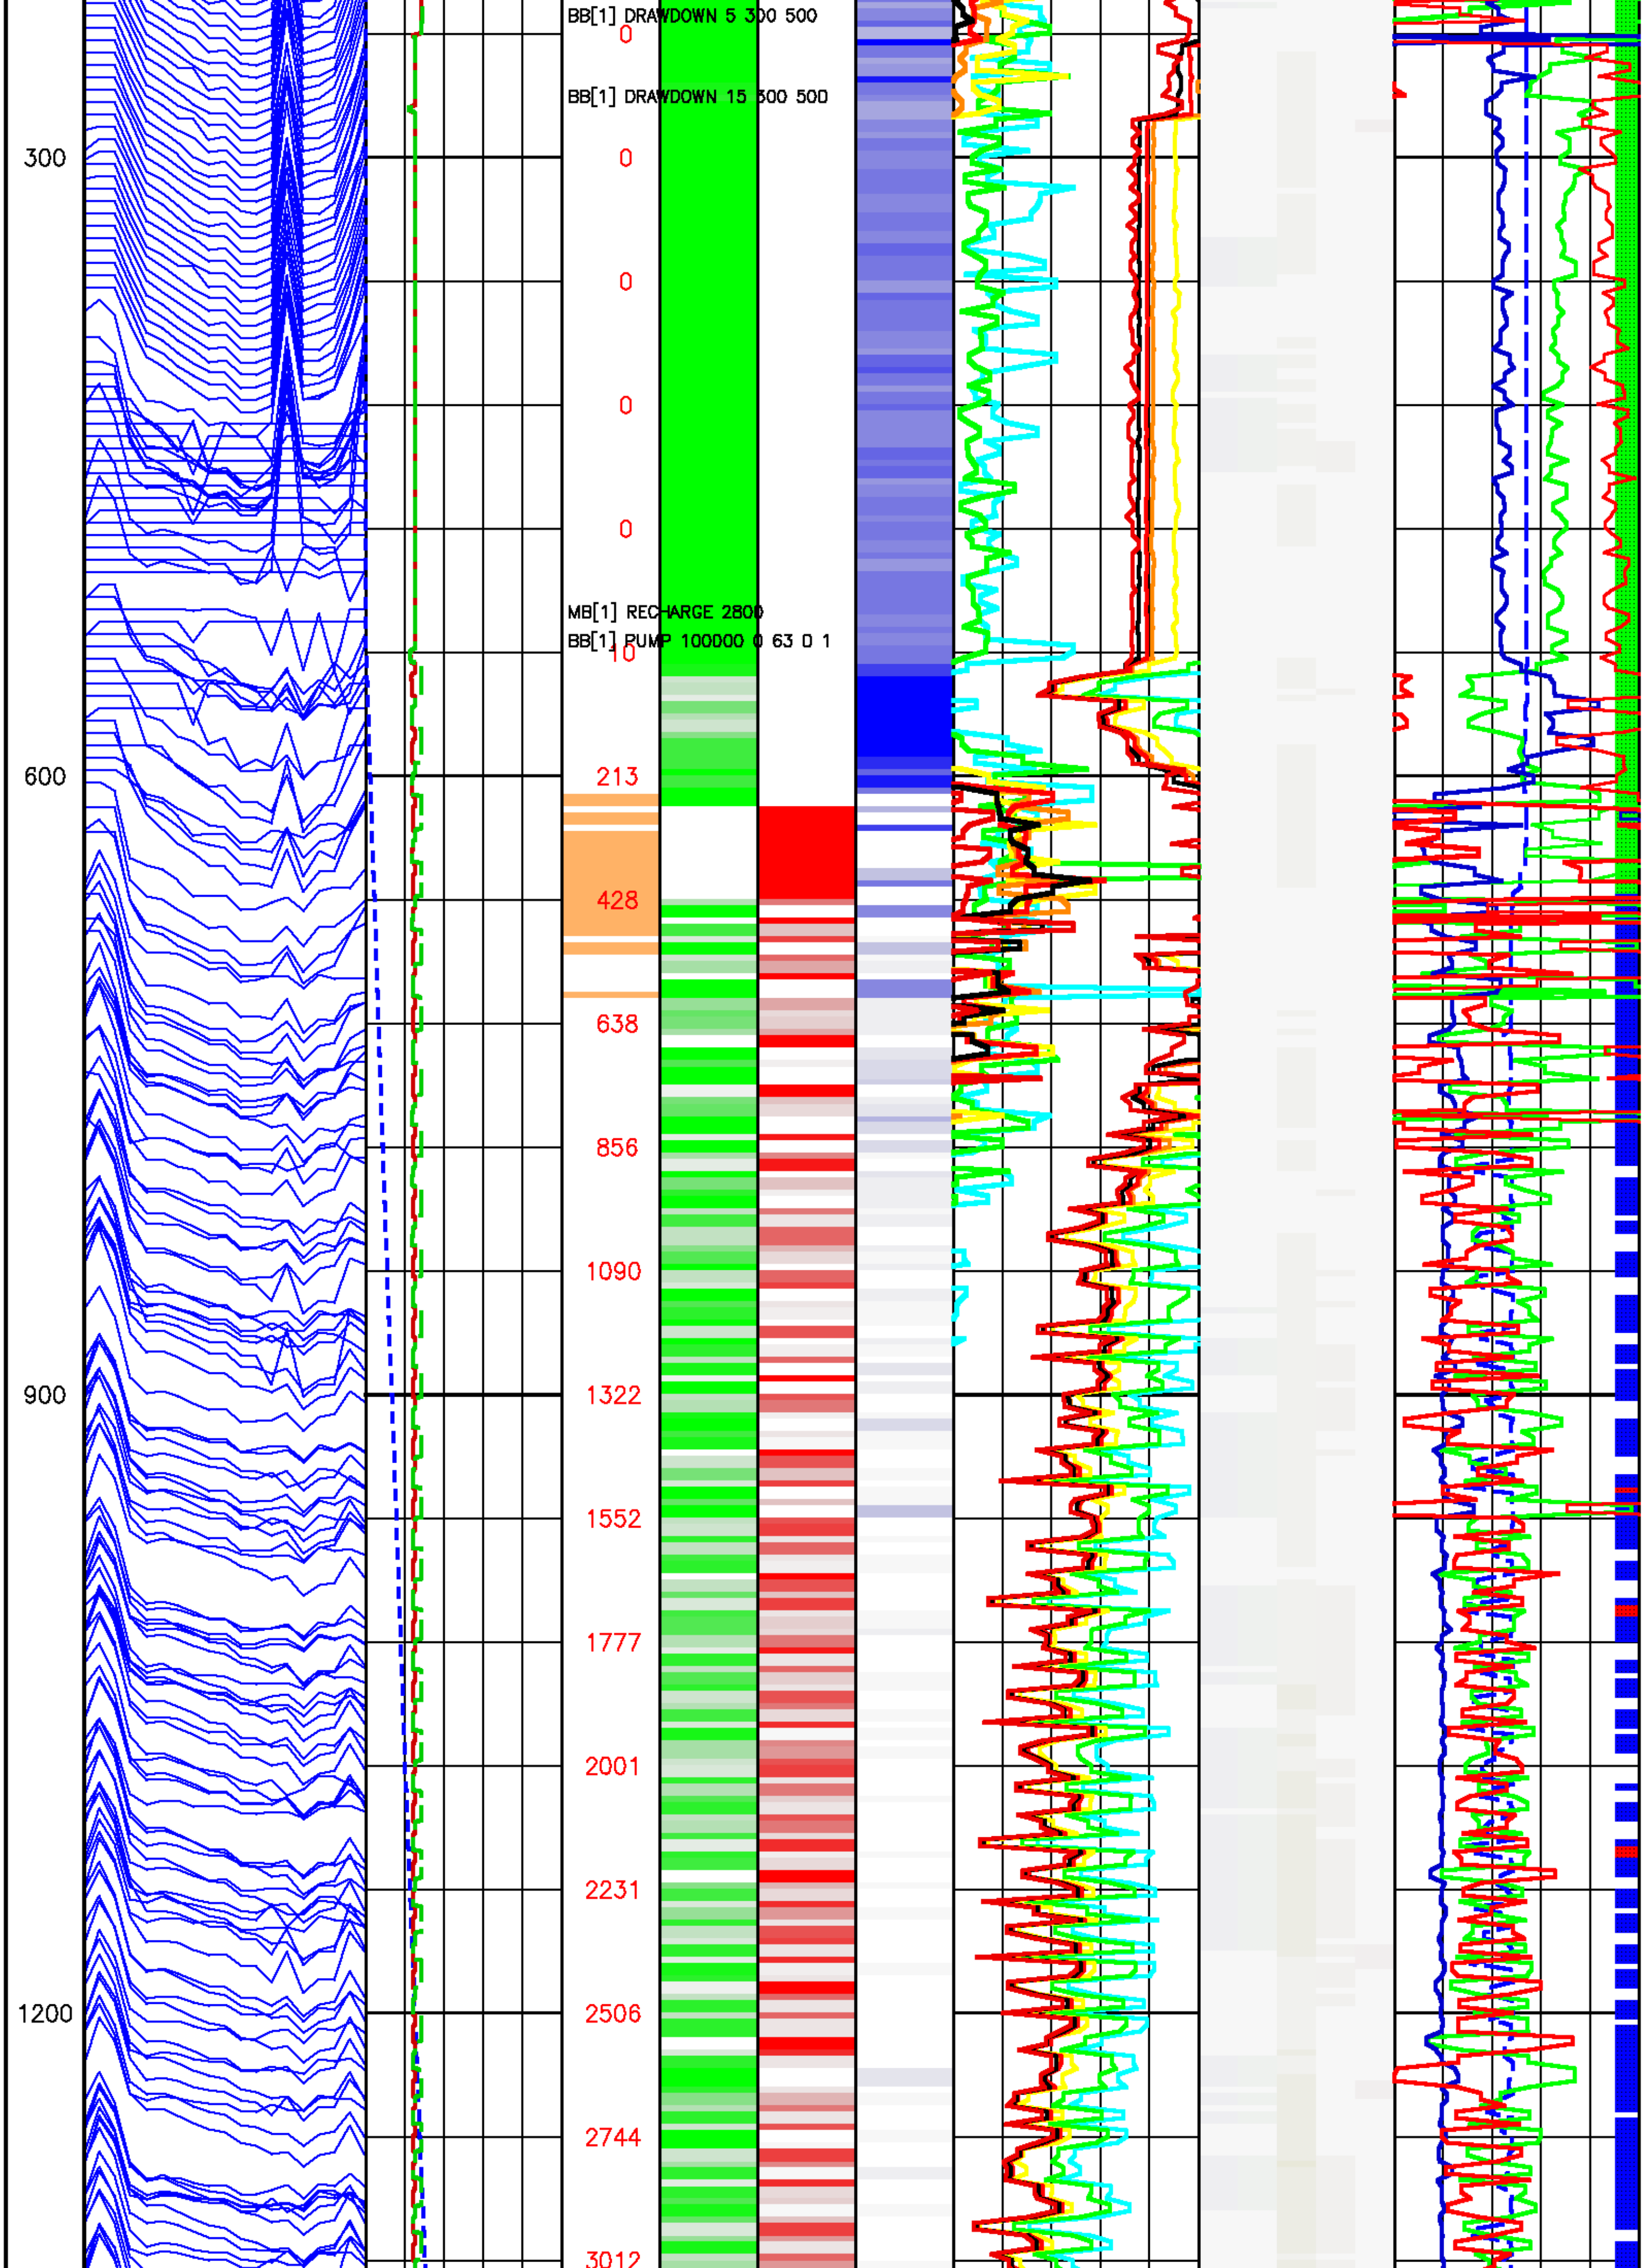

BB[1] DRAWDOWN 5 300 500
BB[1] DRAWDOWN 15 500 500
MB[1] RECHARGE 2800
BB[1] PUMP 100000 0 63 0 1
300
600
900
1200
0
0
0
0
0
10
213
428
638
856
1090
1322
1552
1777
2001
2231
2506
2744
3012

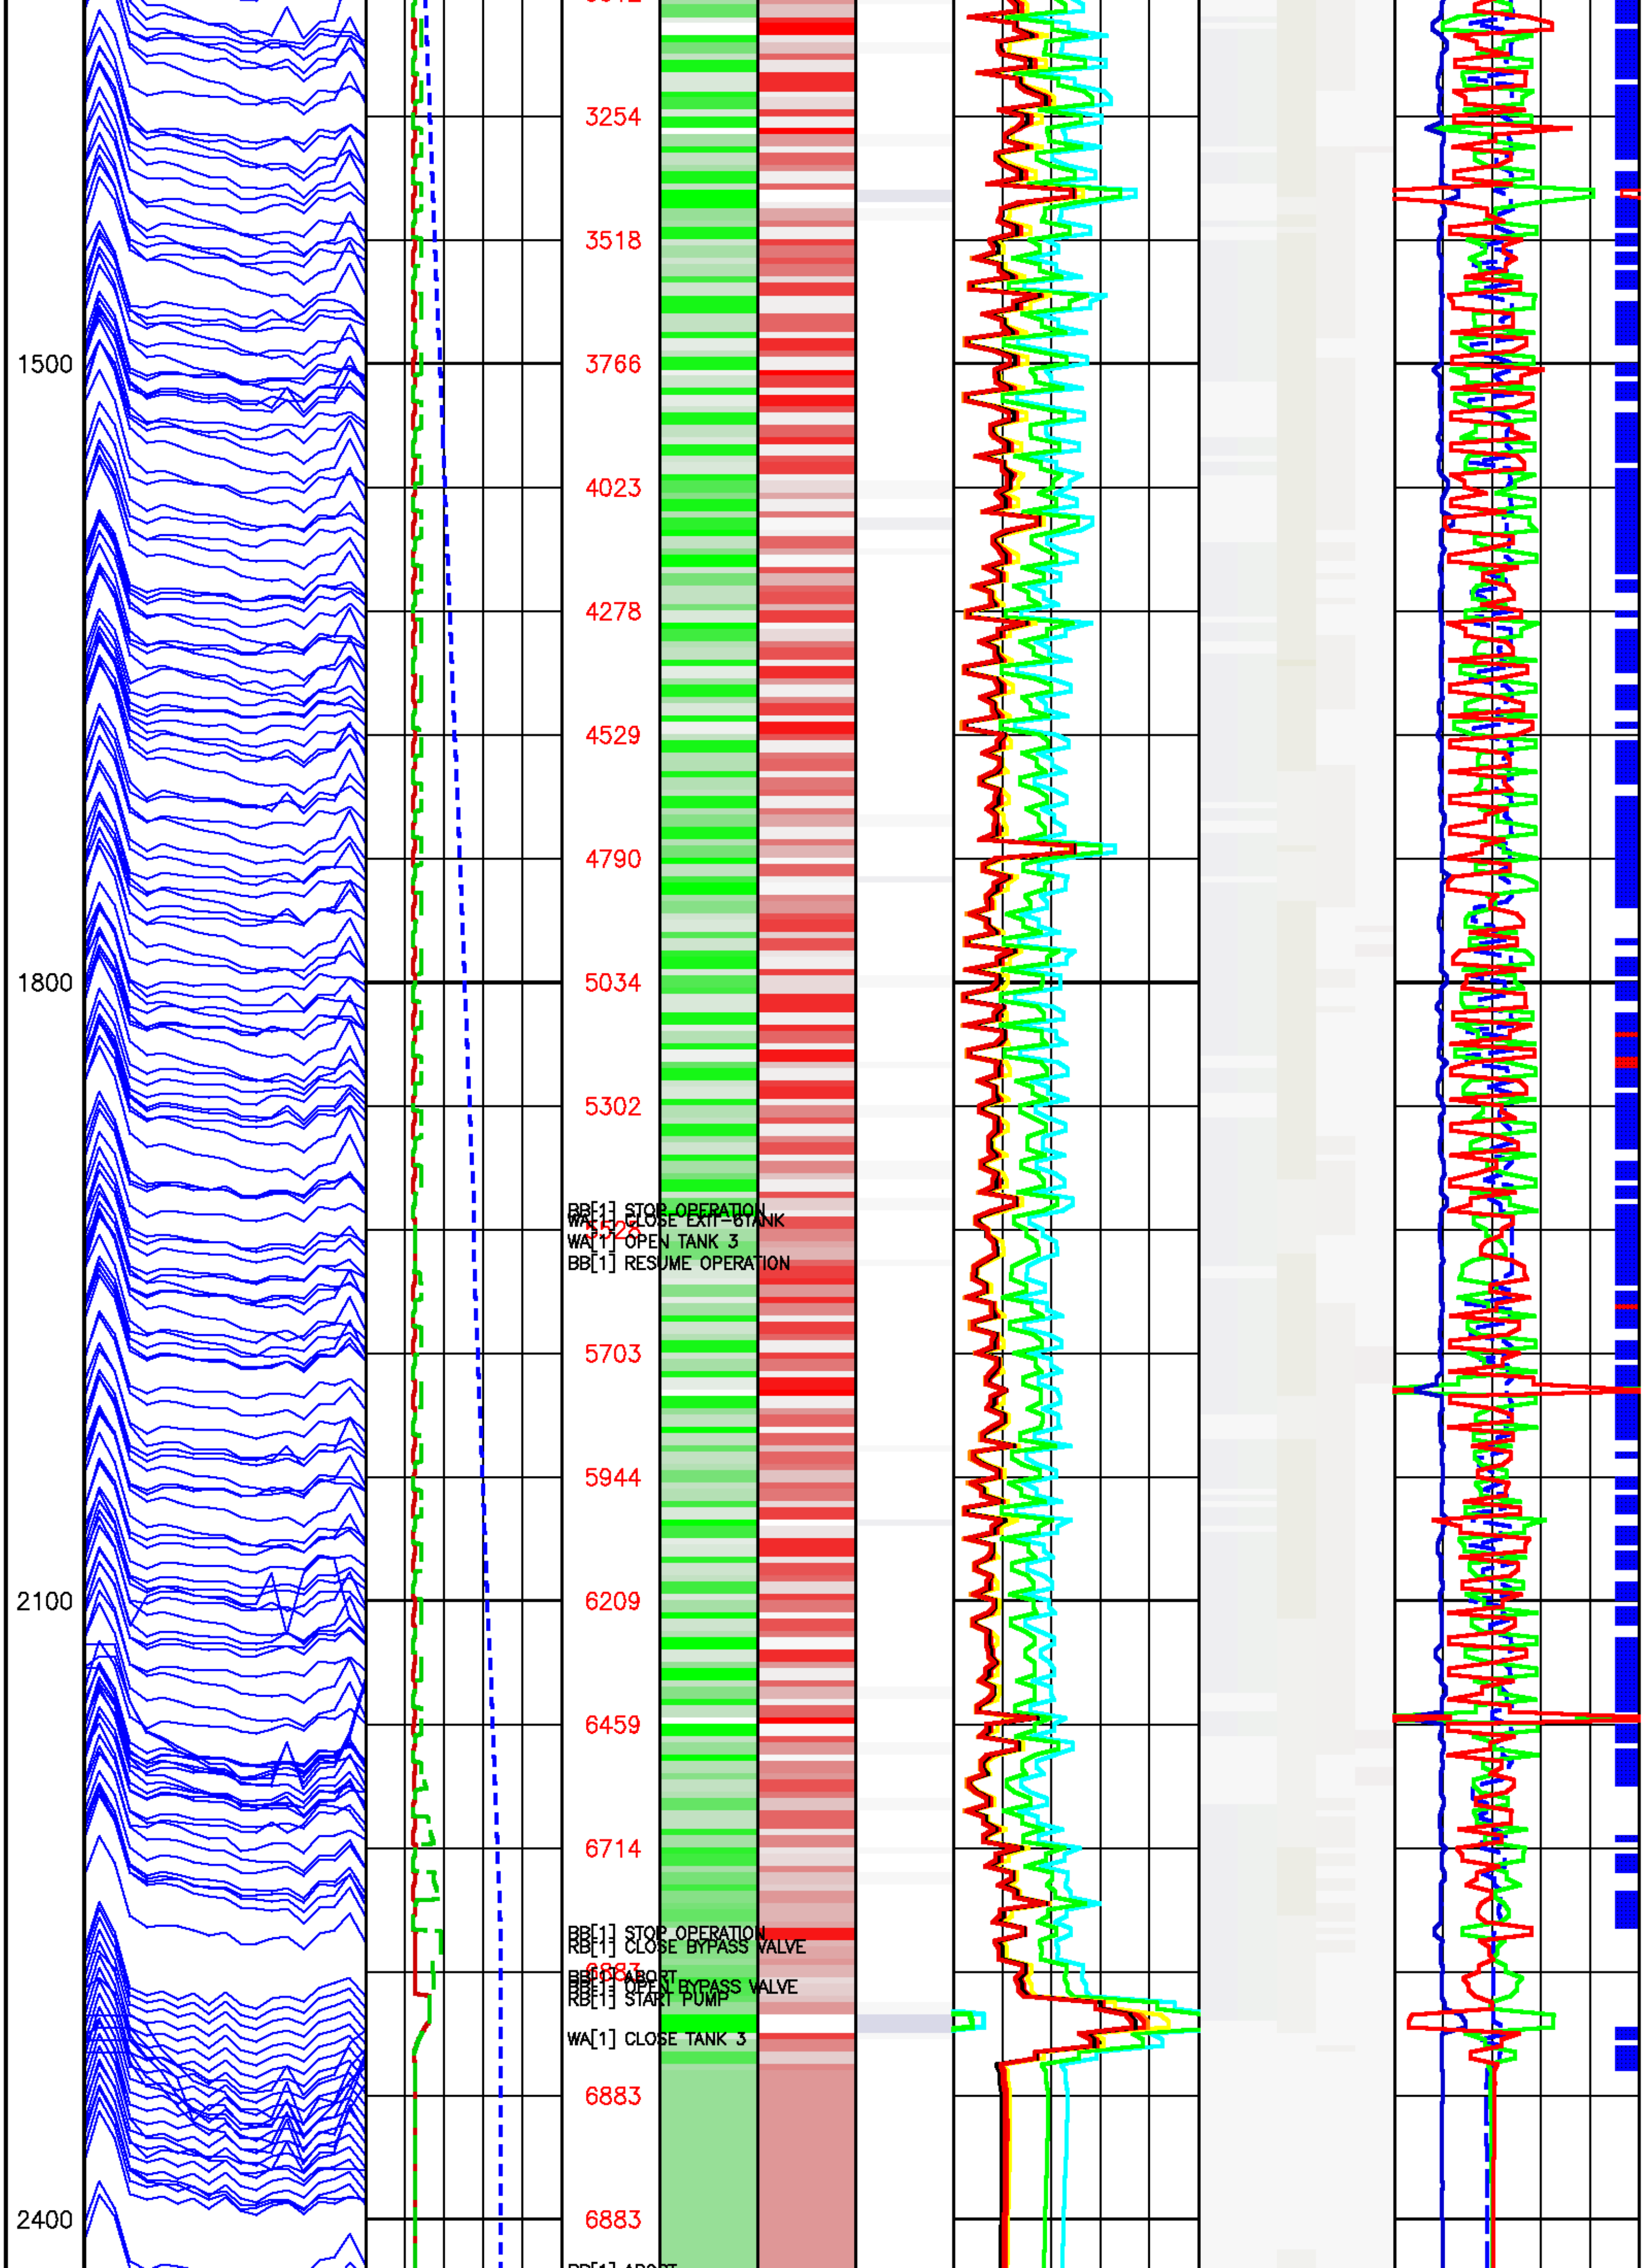
1500
1800
2100
2400
3254
3518
3766
4023
4278
4529
4790
5034
5302
BB[1] STOP OPERATION
WA[1] CLOSE EXIT-6TANK
WA[1] OPEN TANK 3
BB[1] RESUME OPERATION
5703
5944
6209
6459
6714
BB[1] STOP OPERATION
BB[1] CLOSE BYPASS VALVE
BB[1] ABORT
BB[1] OPEN BYPASS VALVE
BB[1] START PUMP
WA[1] CLOSE TANK 3
6883
6883

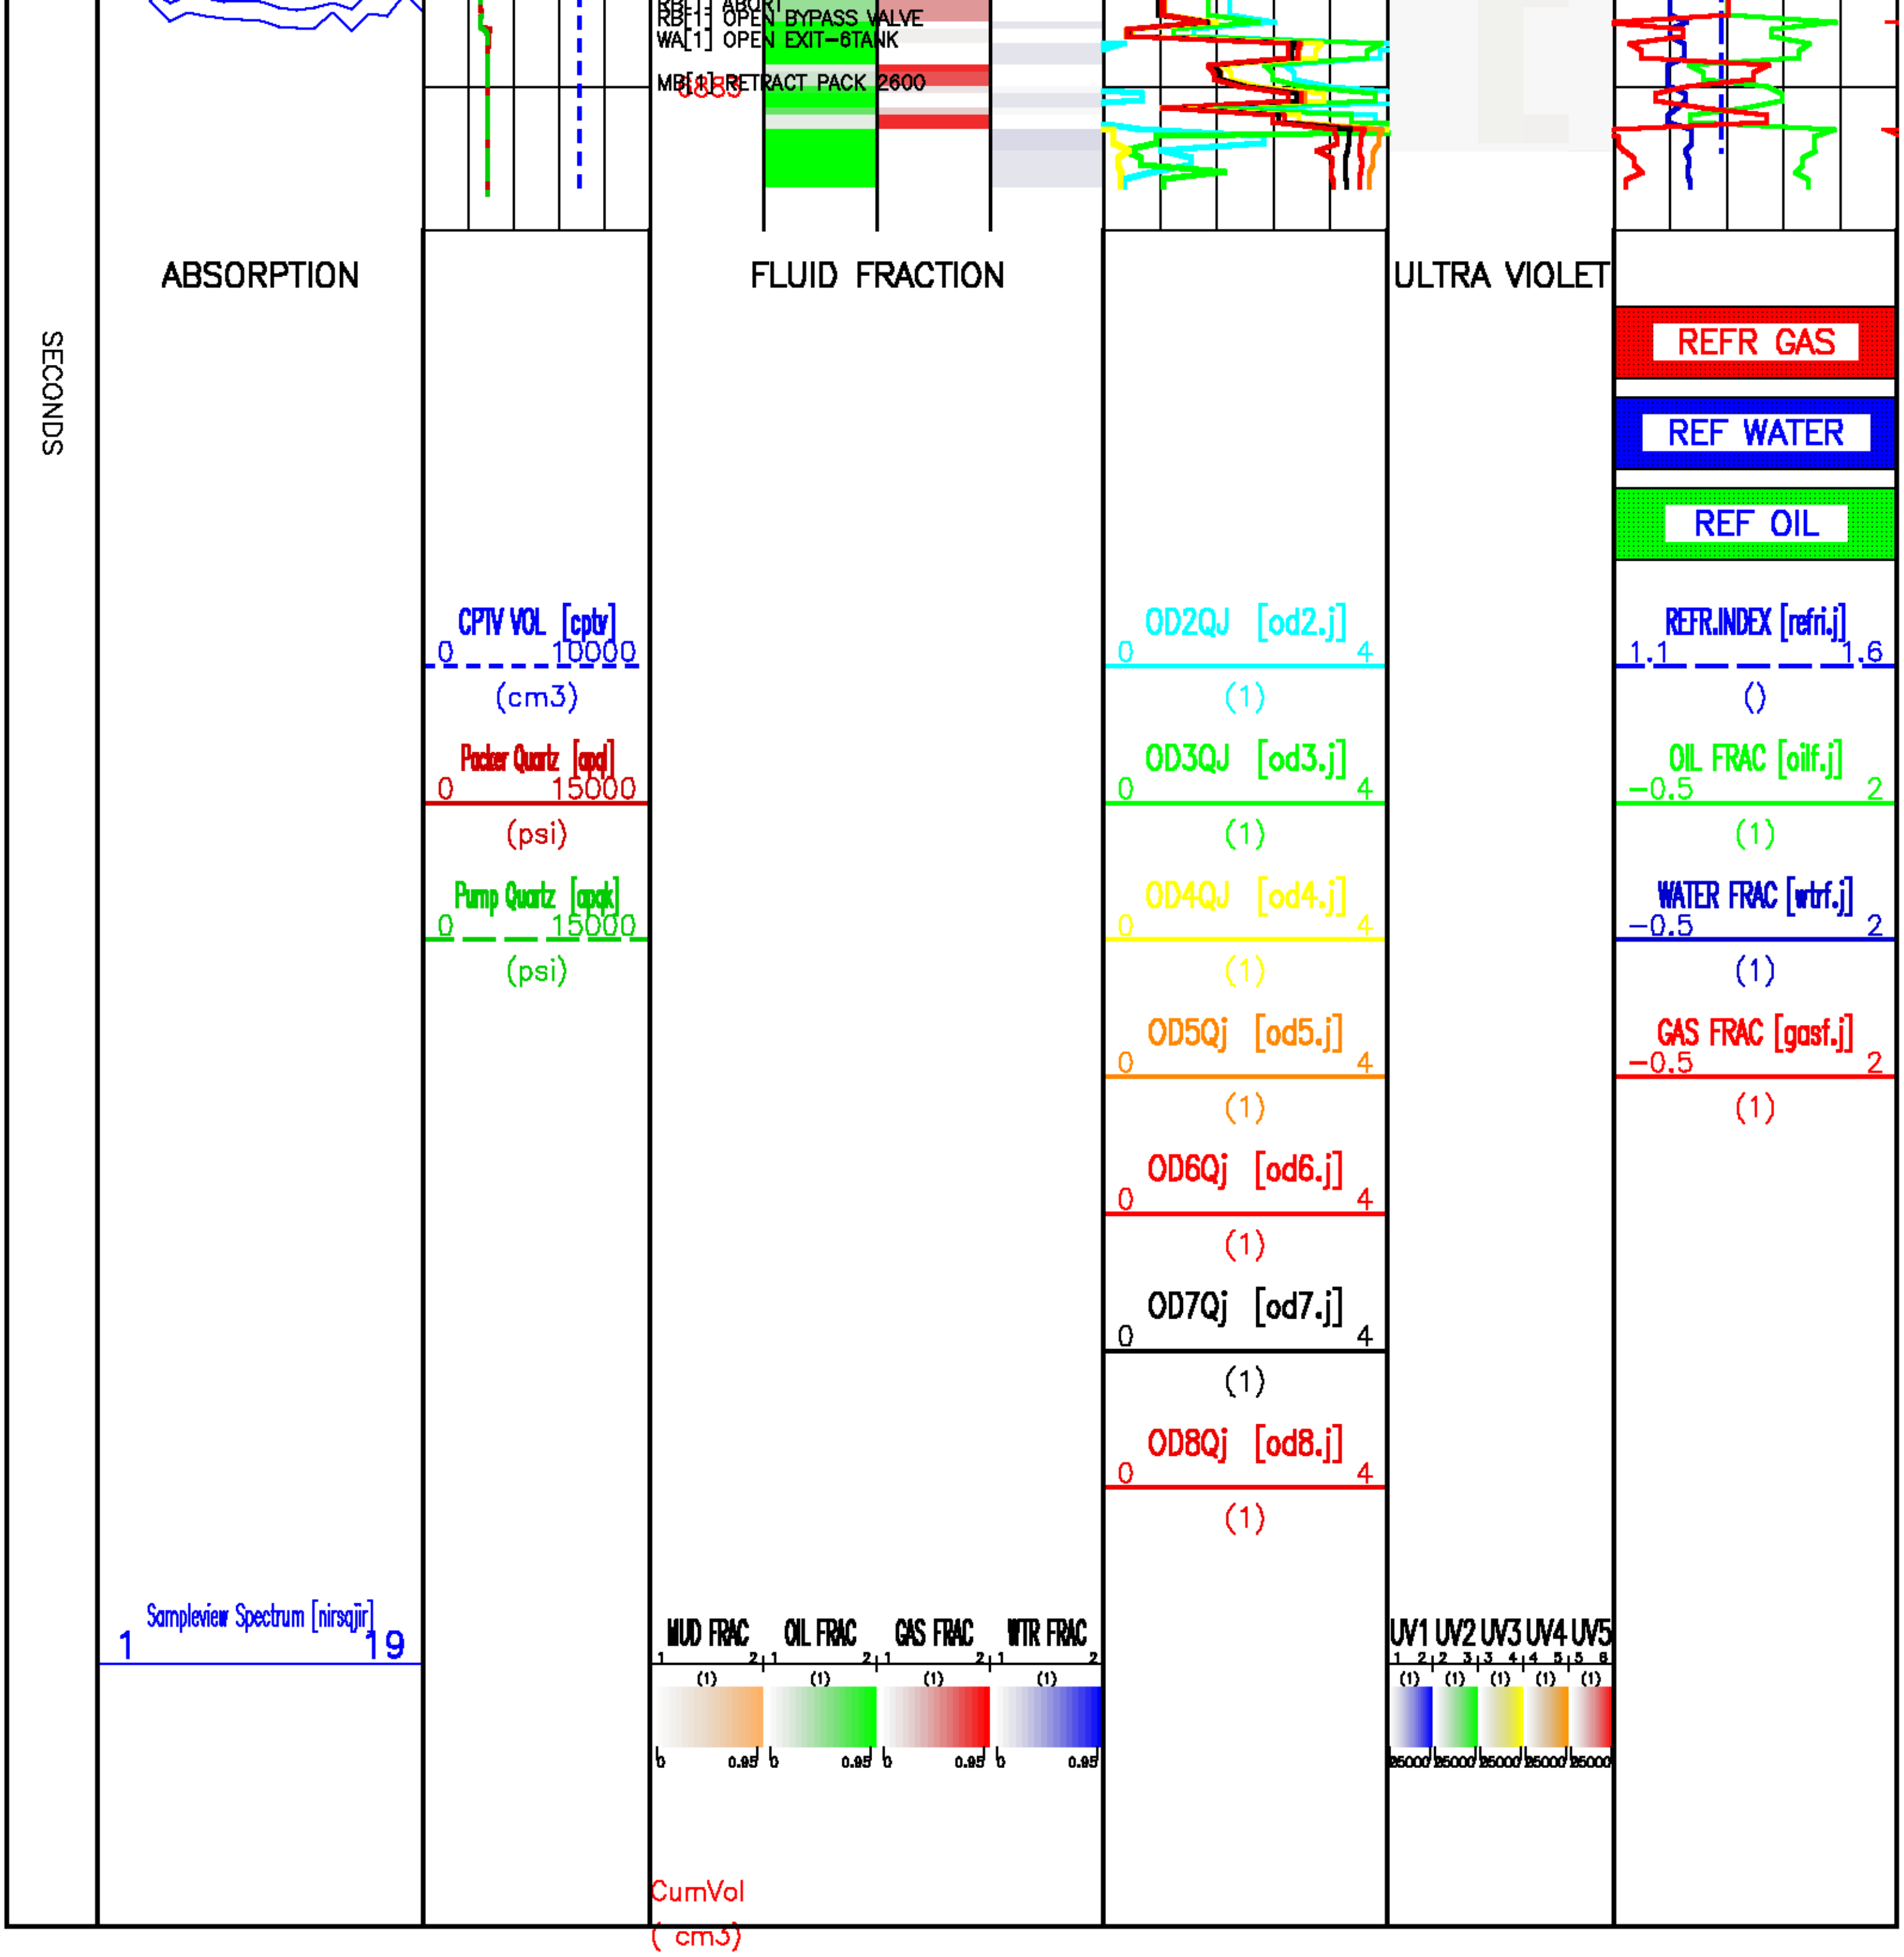

Pressure Tests – Level 55 Tool Instance 1
MD 2514.1 m TVD 2514.1 m

PRESSURE HISTORY

Depth MD 2514.1 m TVD 2514.1 m

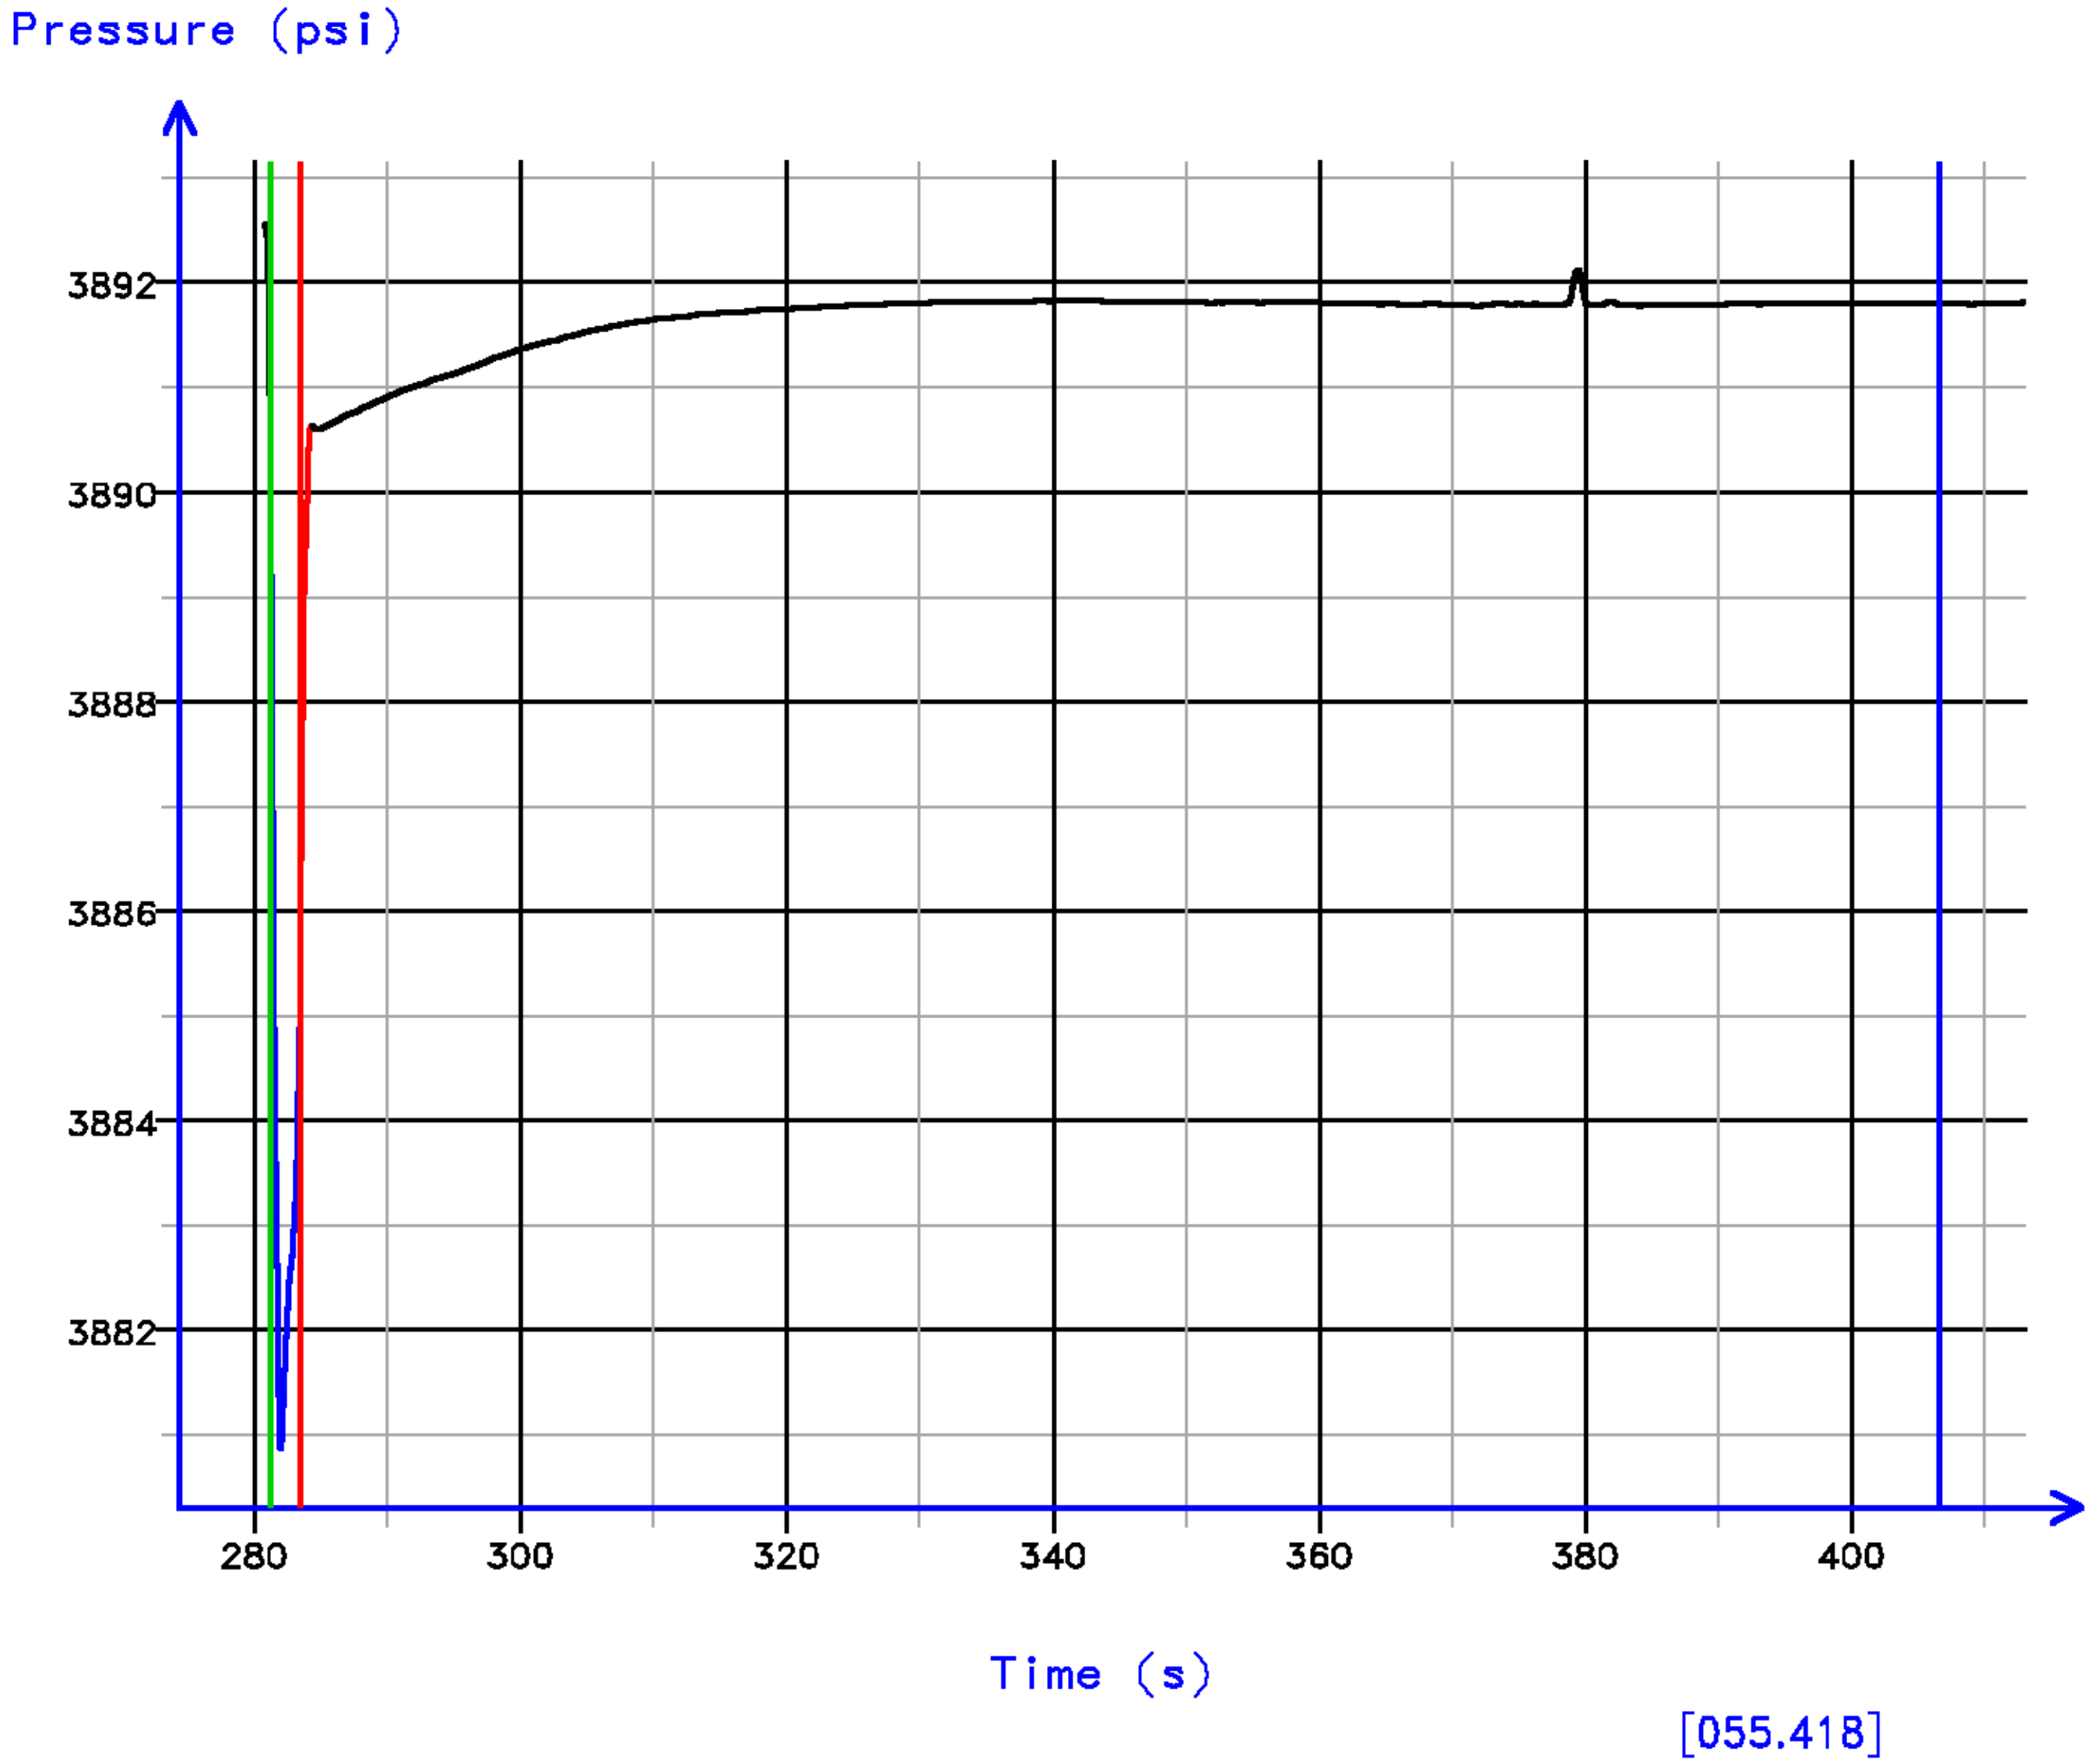

FLOW RATE ANALYSIS

Depth MD 2514.1 m TVD 2514.1 m

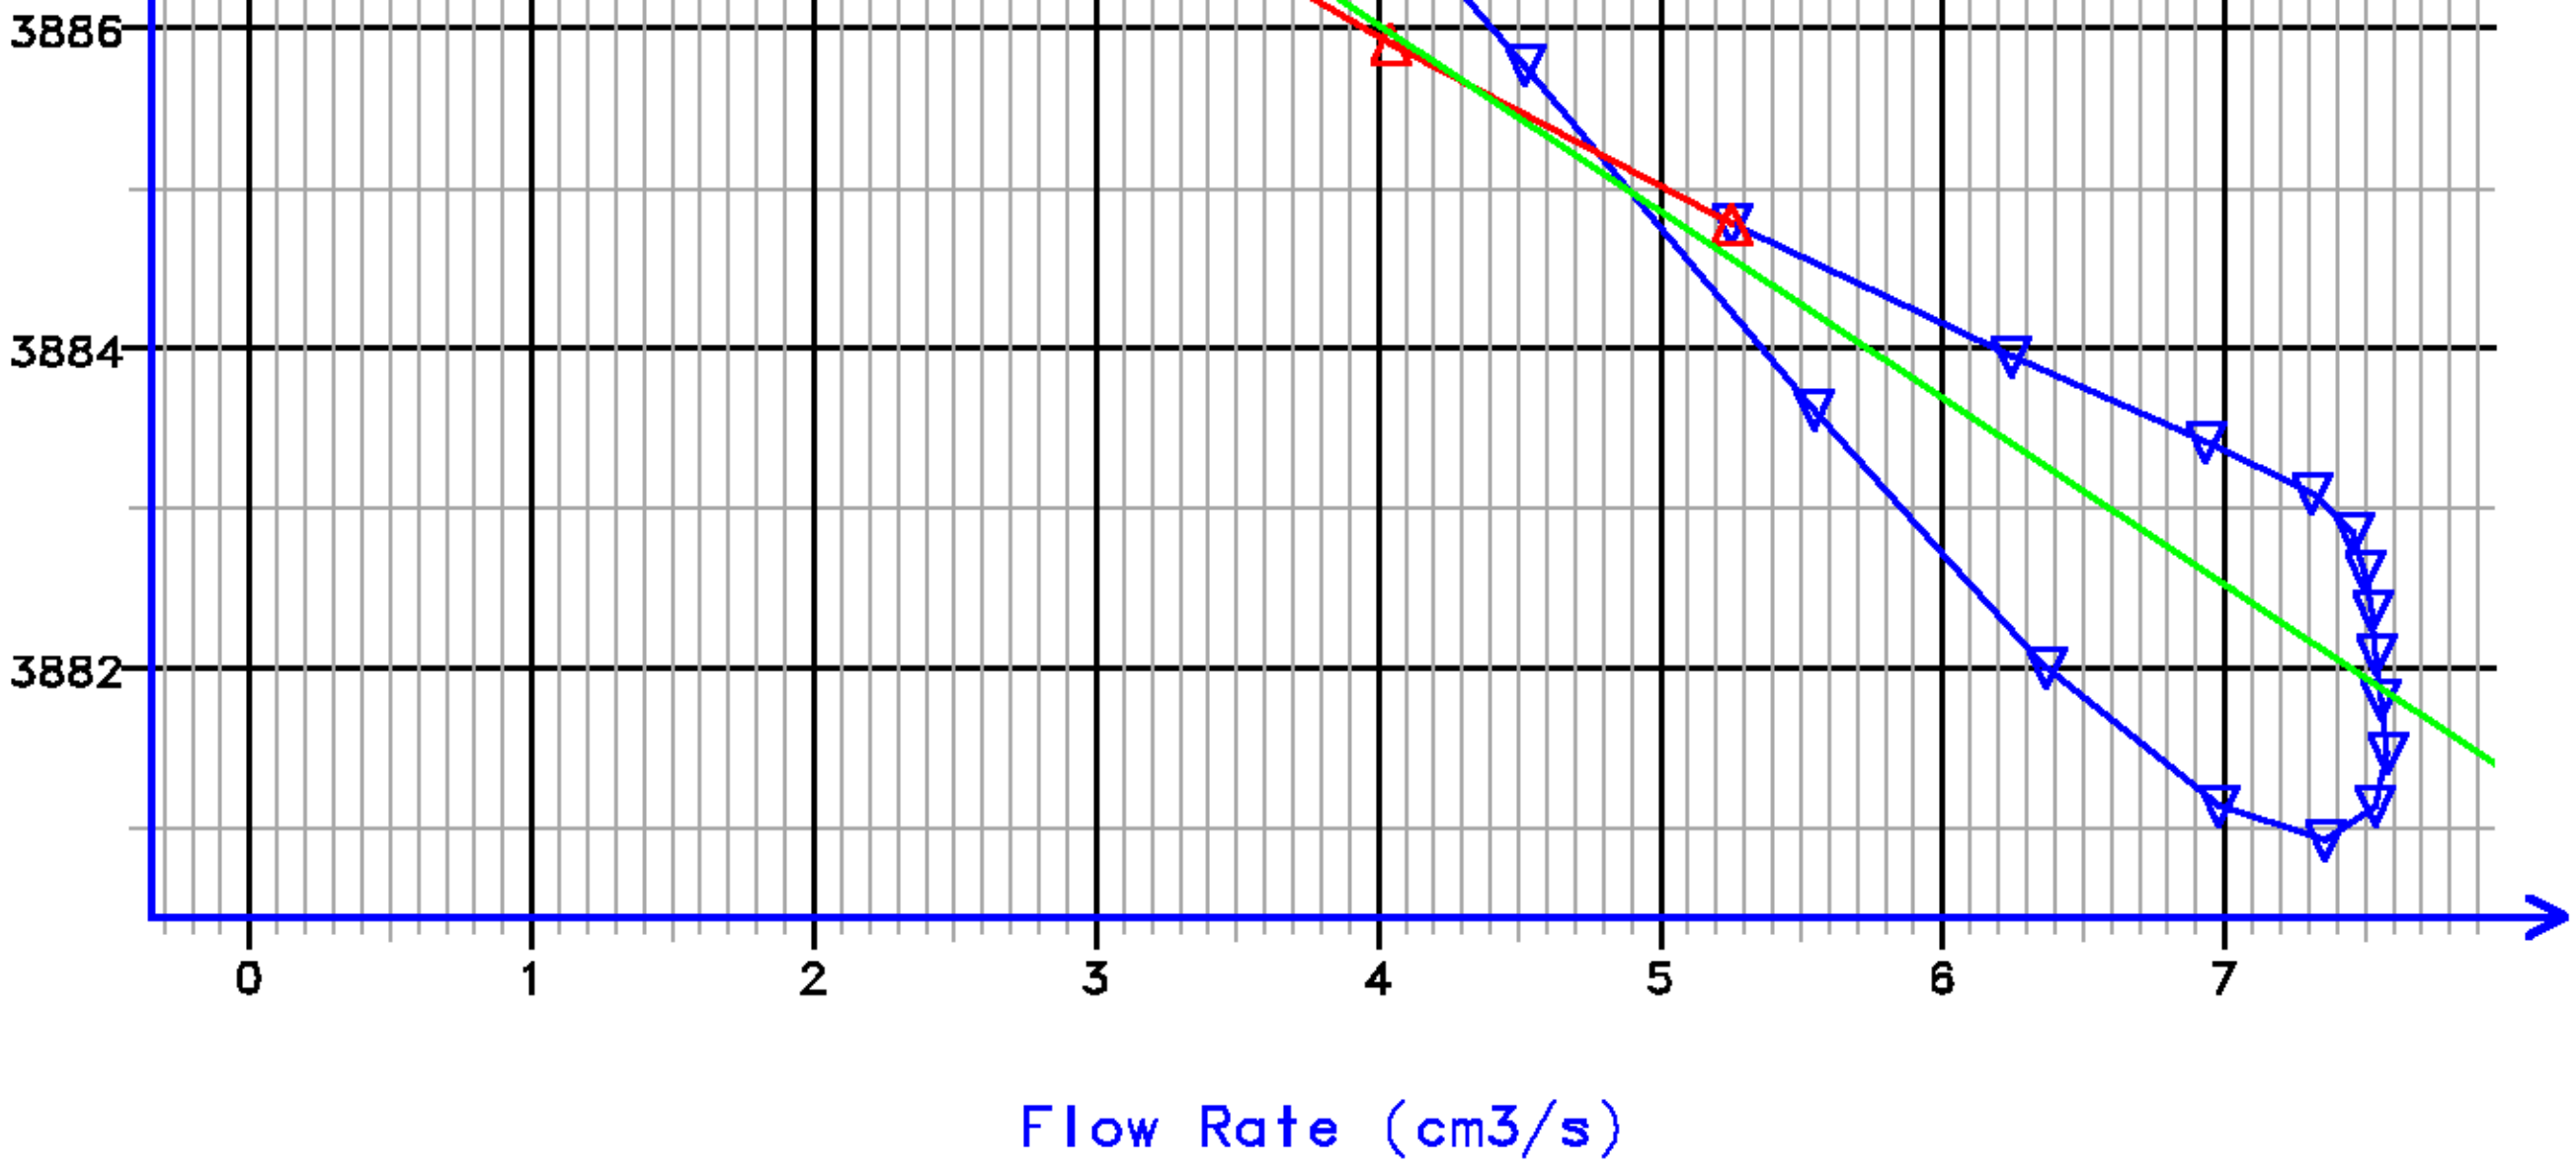

Kfra 2947.147 (mD/cP), Kddu 2346.382 (mD/cP) Confidence 95.38% [055.418]

Data File : j800g66.aff
Presentation: gpi_rci-b3xx.log

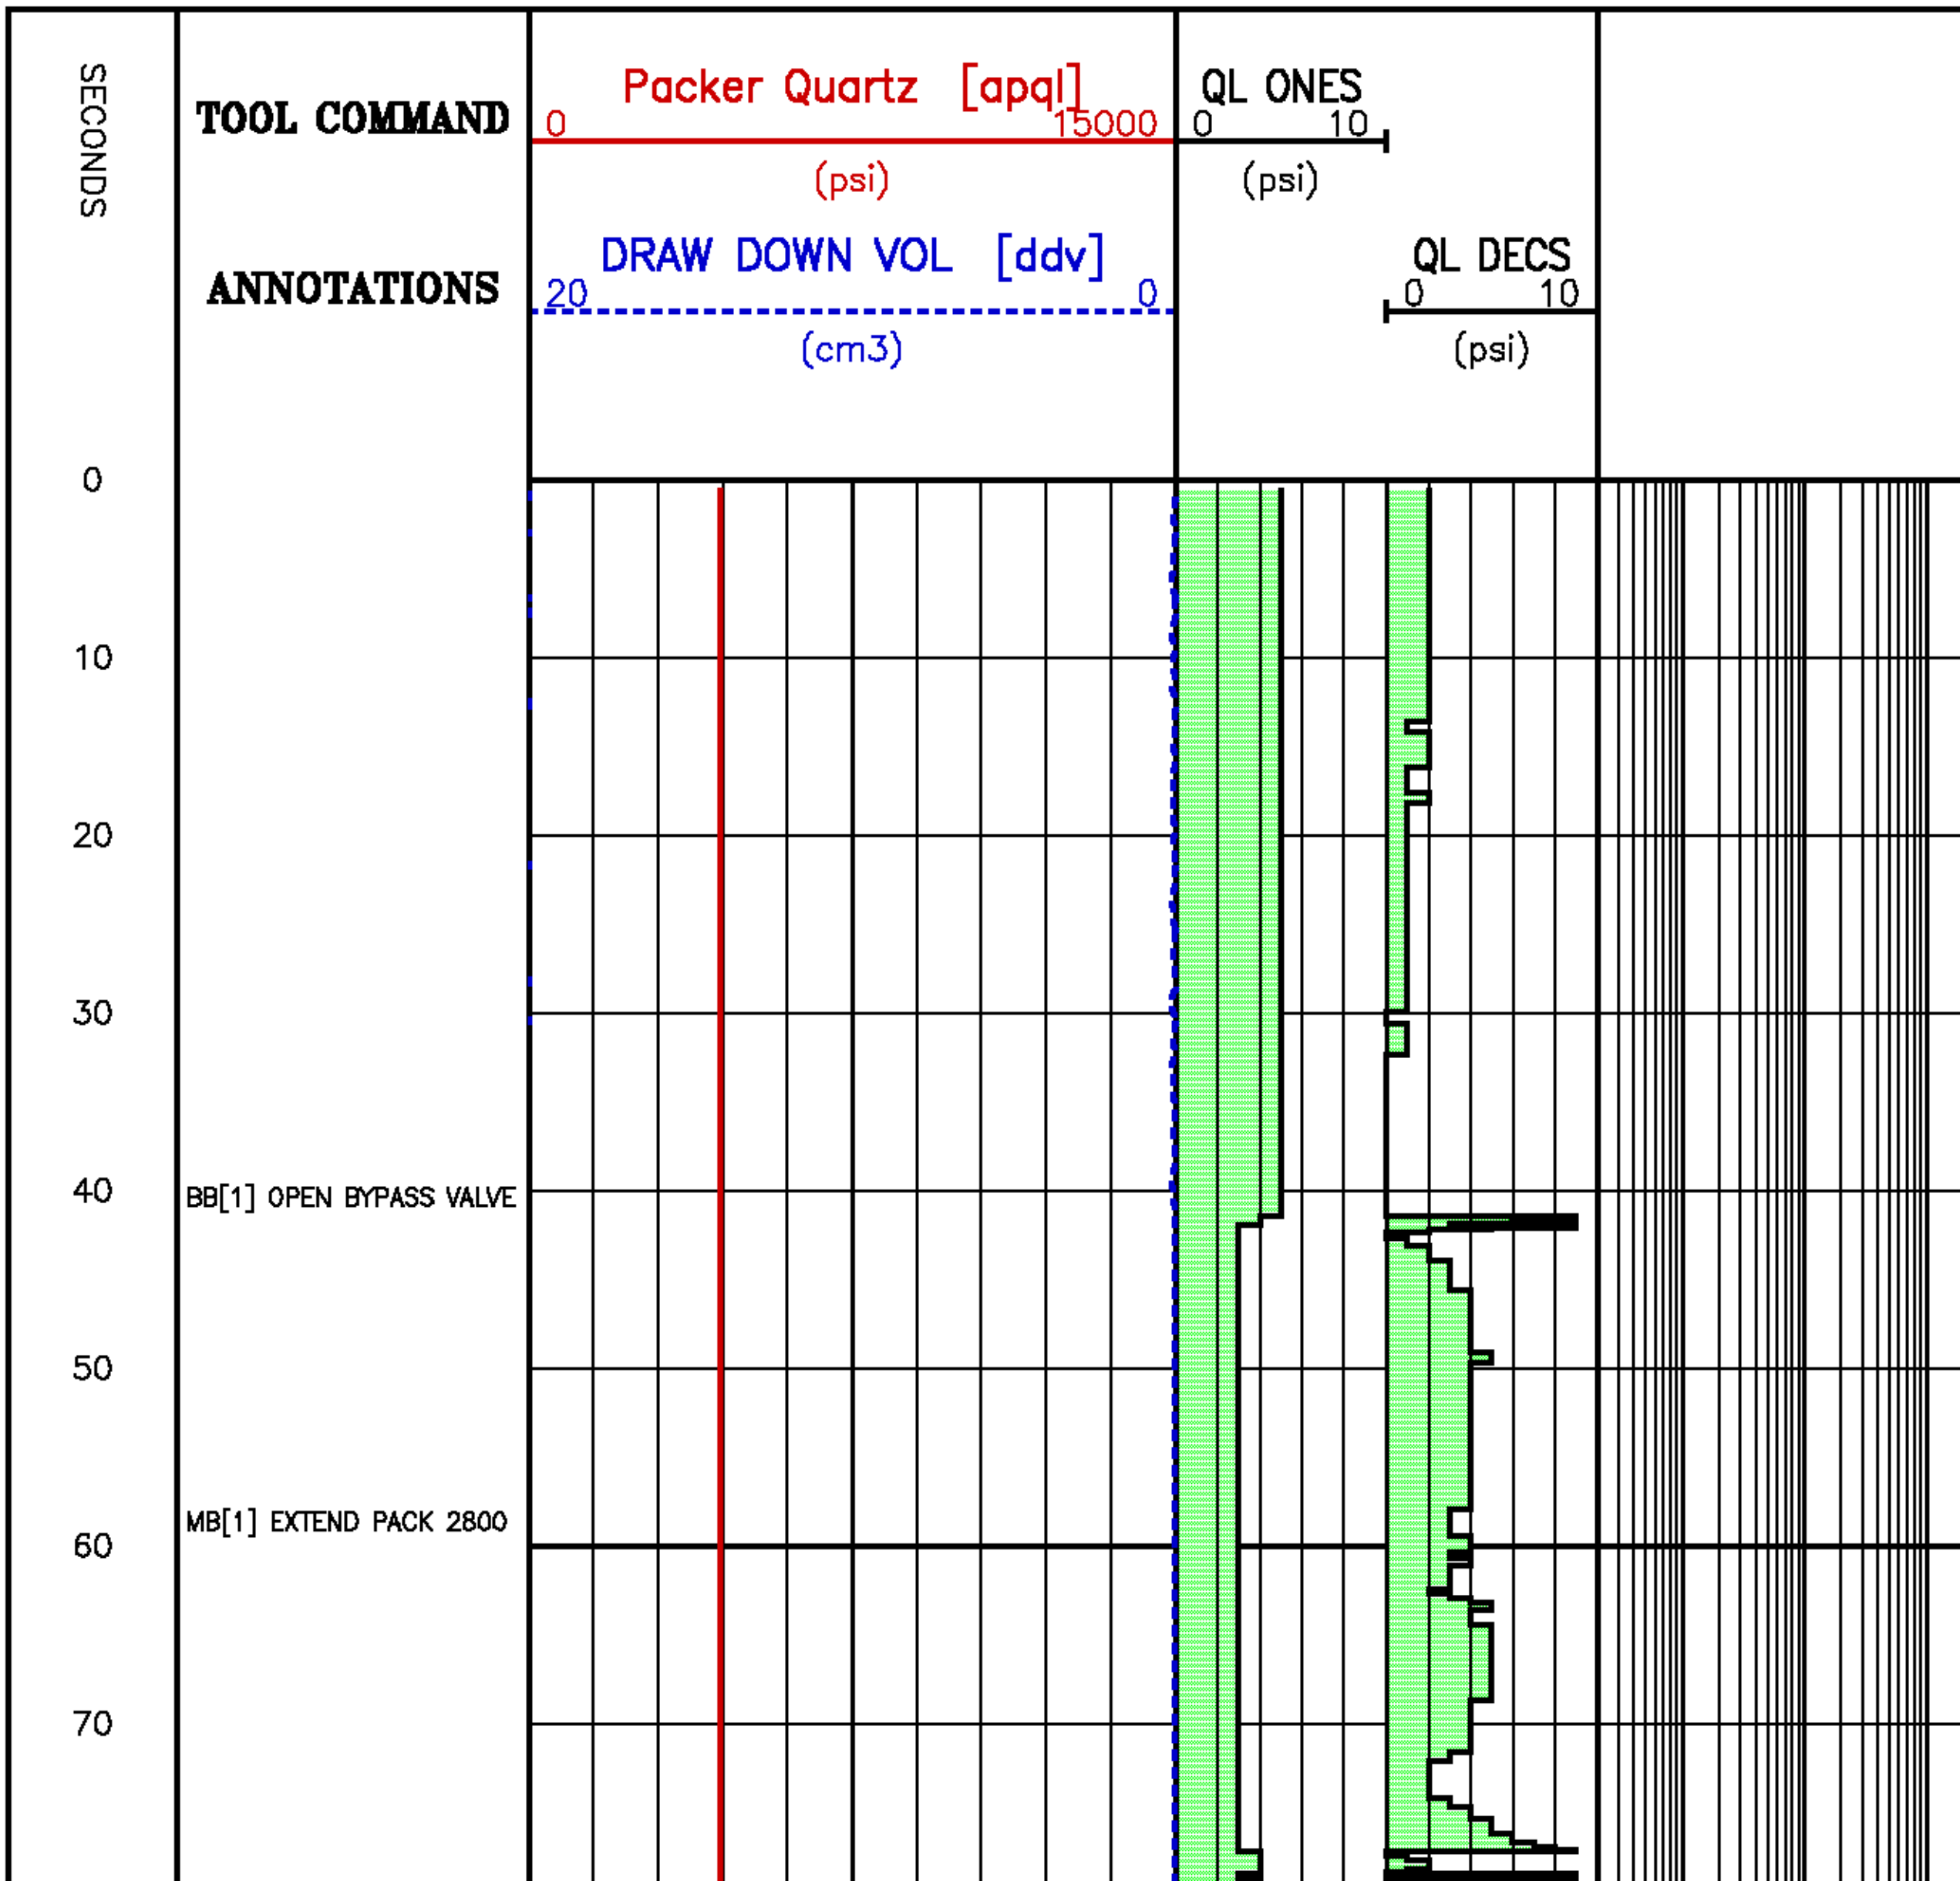

APQL (psi)	RTDQL (degF)
4445.3	200.4
4445.2	200.4
4445.2	200.4
4445.2	200.4
4445.1	200.4
4445.1	200.4
4445.1	200.4
4445.1	200.4
4443.4	200.4
4443.4	200.4
4443.4	200.4
4443.5	200.4
4443.5	200.4
4443.5	200.4
4443.4	200.4

80		4445.9	200.4
		4440.7	200.4
90		4440.3	200.4
		4440.1	200.4
	MB[1] RECHARGE 2800		
100		4440.2	200.4
	BB[1] CLOSE BYPASS VALVE		
		4439.6	200.4
110		4439.4	200.4
		4439.4	200.4
120		4439.2	200.4
		4439.1	200.4
	BB[1] DRAWDOWN 5 300 500		
130		4437.0	200.4
		4435.4	200.4
140		3907.5	200.4
		3904.1	200.4
150		3903.9	200.4
		3908.7	200.4
160		3919.3	200.4
		3928.8	200.4
	BB[1] DRAWDOWN 15 300 500		
170		3879.8	200.4
		3891.9	200.4
180		3892.6	200.4
		3892.6	200.4
190		3892.7	200.4
		3892.7	200.4
200		3892.8	200.4
		3892.8	200.4
210		3892.8	200.4
		3892.8	200.4
220		3892.8	200.4
		3892.8	200.4
230		3892.9	200.4
		3892.8	200.4
240		3892.9	200.4
		3892.9	200.4
250		3892.9	200.4
		3892.9	200.4
260		3892.8	200.4

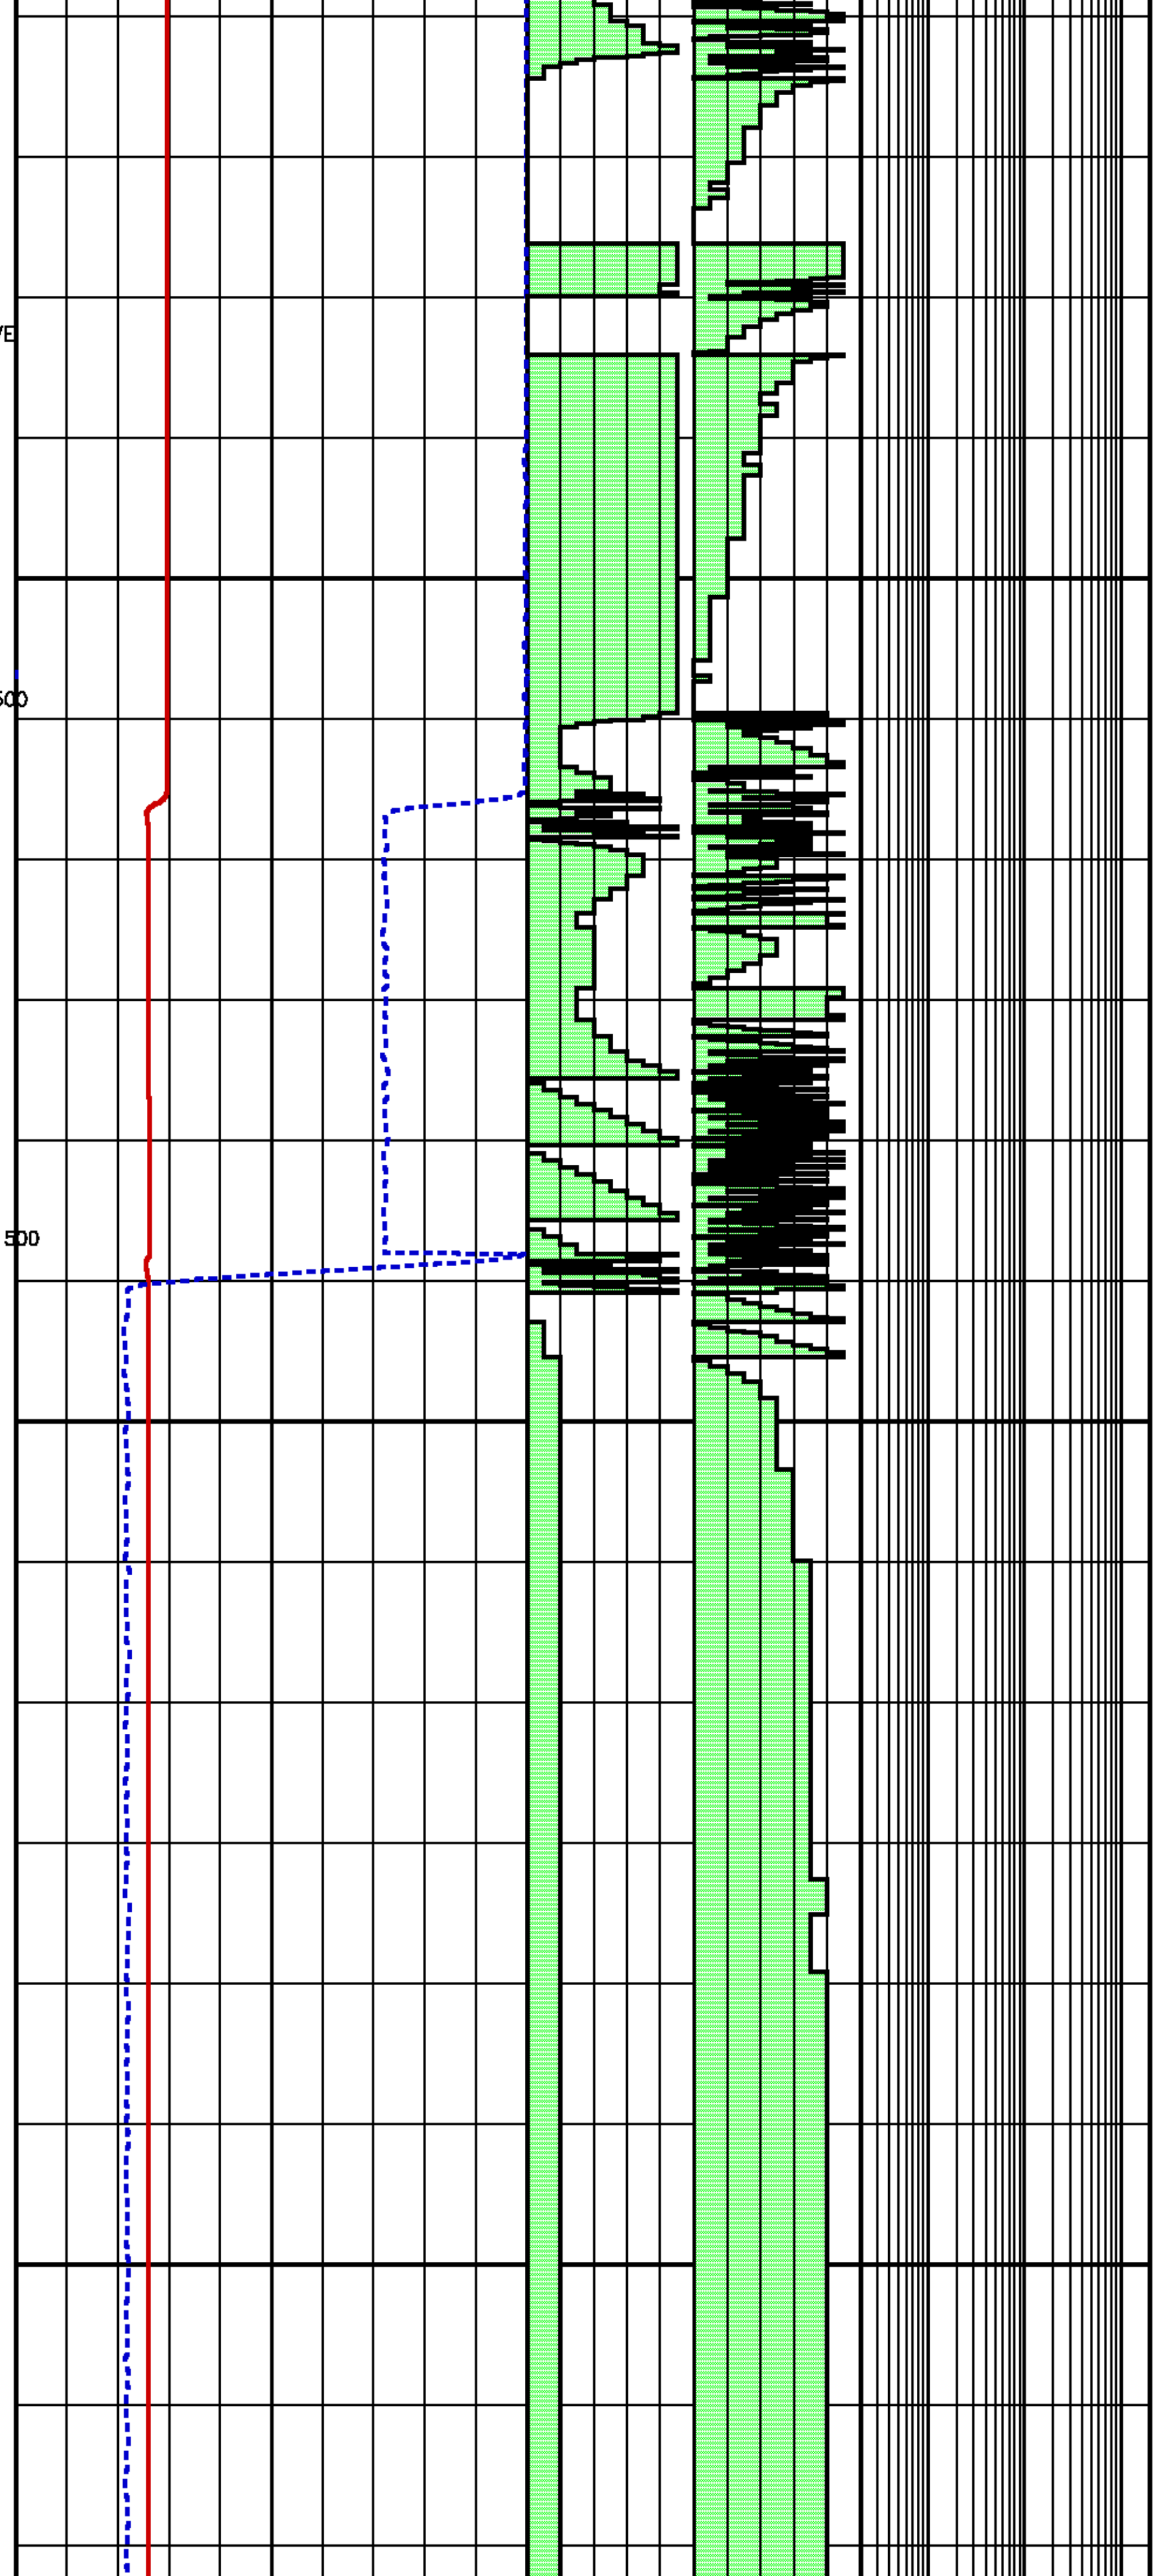

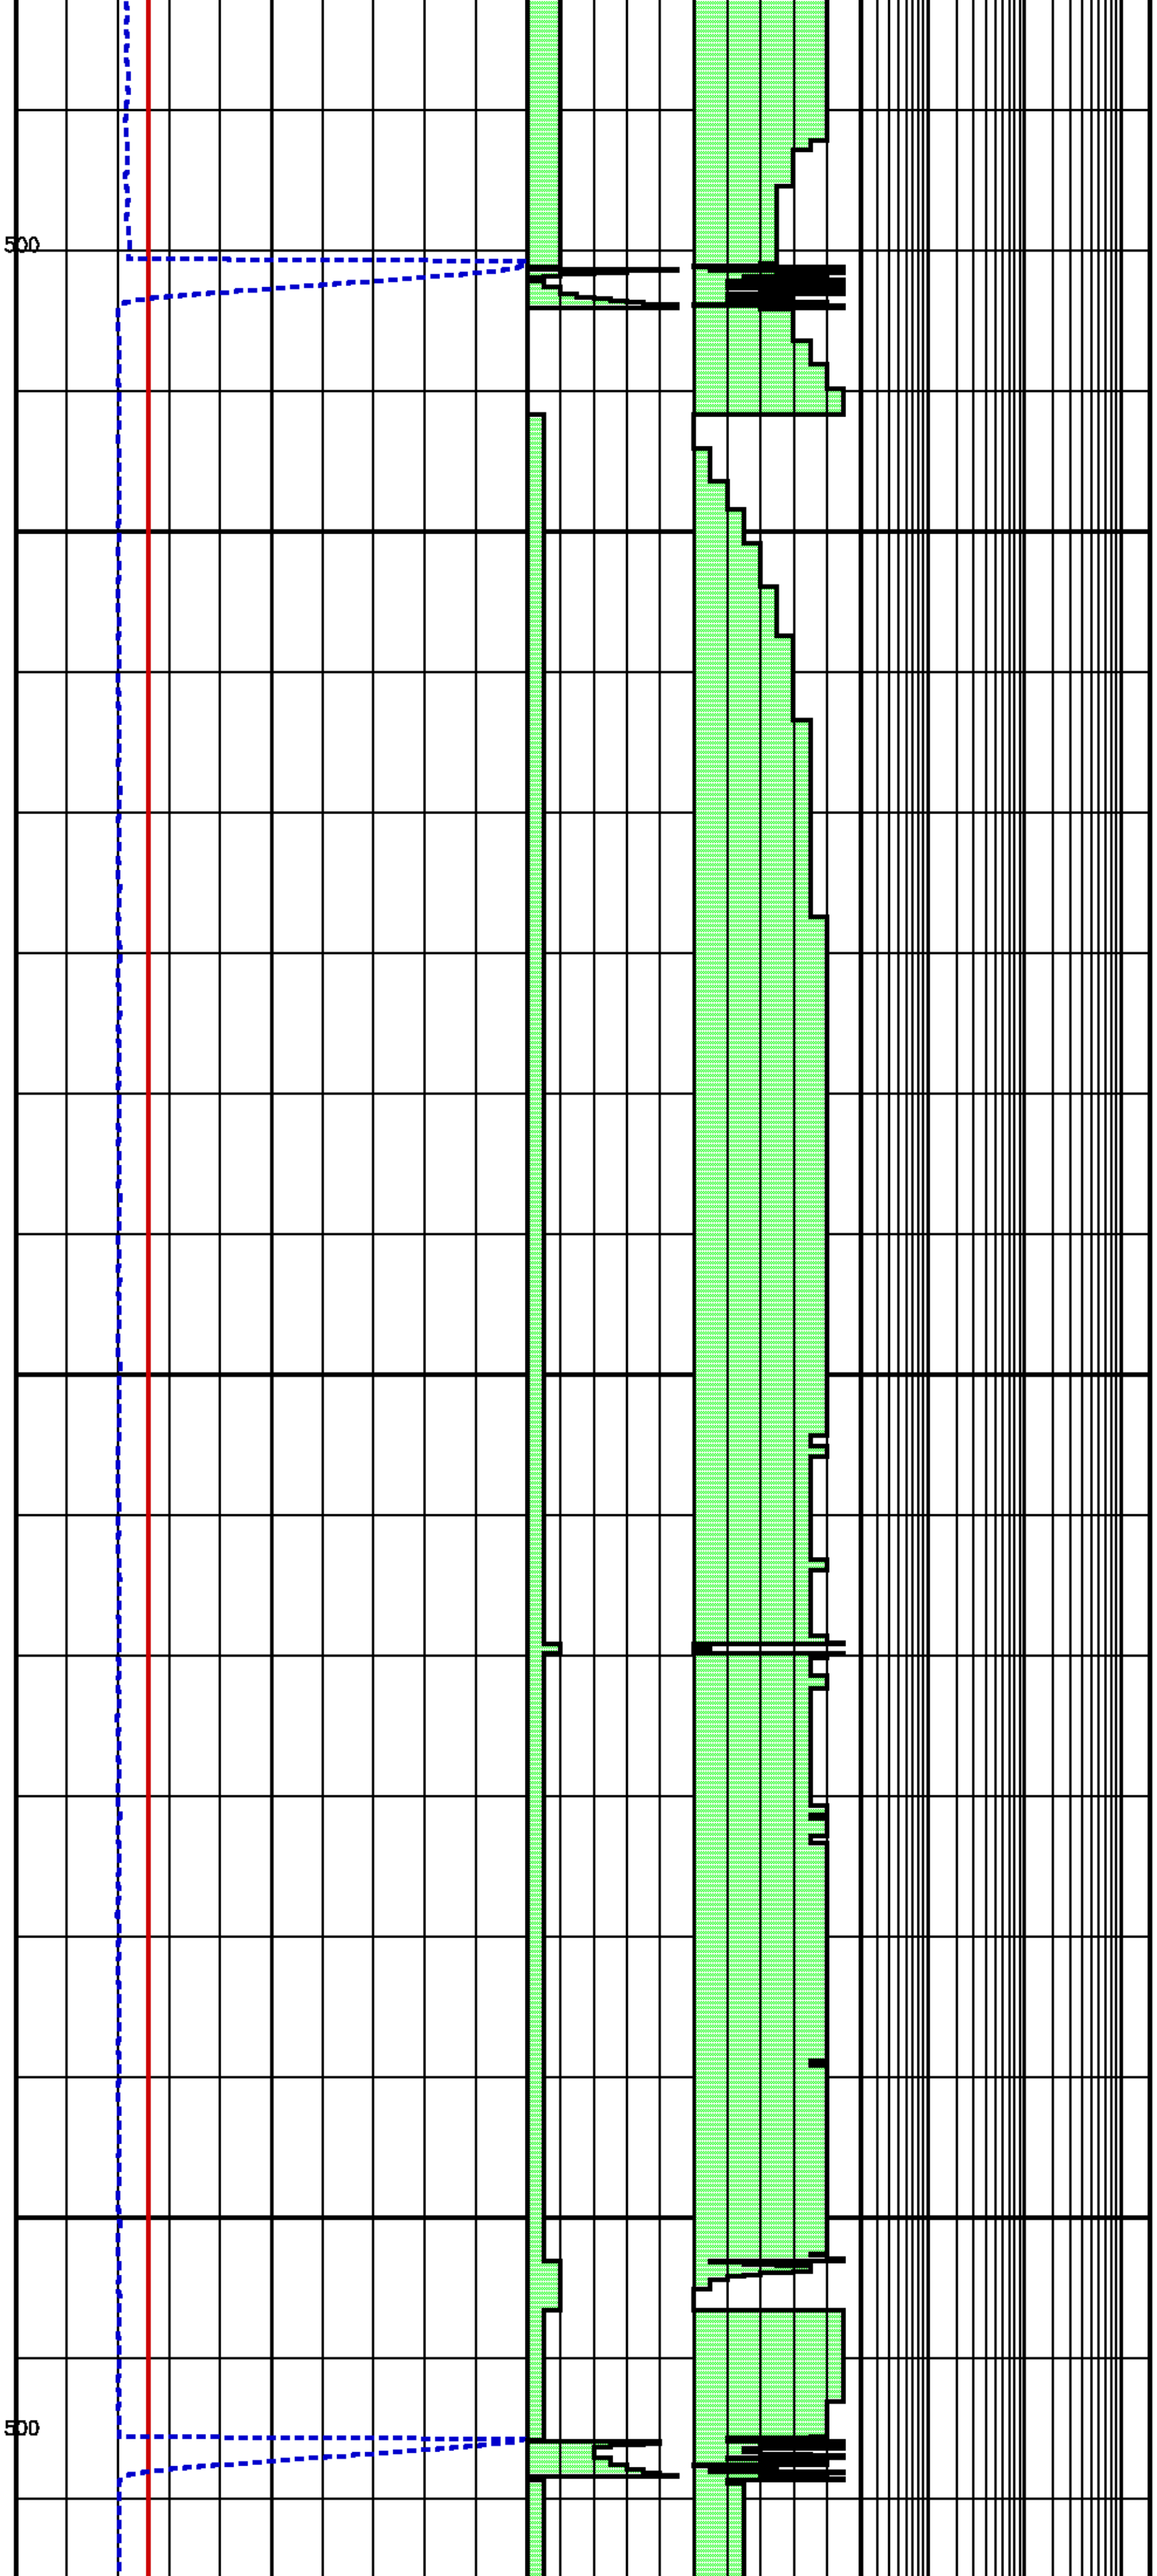

		3892.8	200.4
270		3892.9	200.4
		3892.6	200.4
280	BB[1] DRAWDOWN 15 300 500	3892.6	200.4
		3890.6	200.4
290		3890.9	200.4
		3891.1	200.4
300		3891.4	200.4
		3891.5	200.4
310		3891.6	200.4
		3891.7	200.4
320		3891.8	200.4
		3891.8	200.4
330		3891.8	200.4
		3891.8	200.4
340		3891.8	200.4
		3891.8	200.4
350		3891.8	200.4
		3891.8	200.4
360		3891.8	200.4
		3891.8	200.4
370		3891.8	200.5
		3891.8	200.5
380		3891.9	200.5
		3891.8	200.5
390		3891.8	200.5
		3891.8	200.5
400		3891.8	200.5
		3891.8	200.5
410		3891.8	200.5
		3891.8	200.5
420	MB[1] RECHARGE 2800	3891.8	200.5
		3892.1	200.5
430		3891.9	200.5
	BB[1] DRAWDOWN 15 300 500	3891.9	200.5
440		3891.3	200.5
		3891.4	200.5

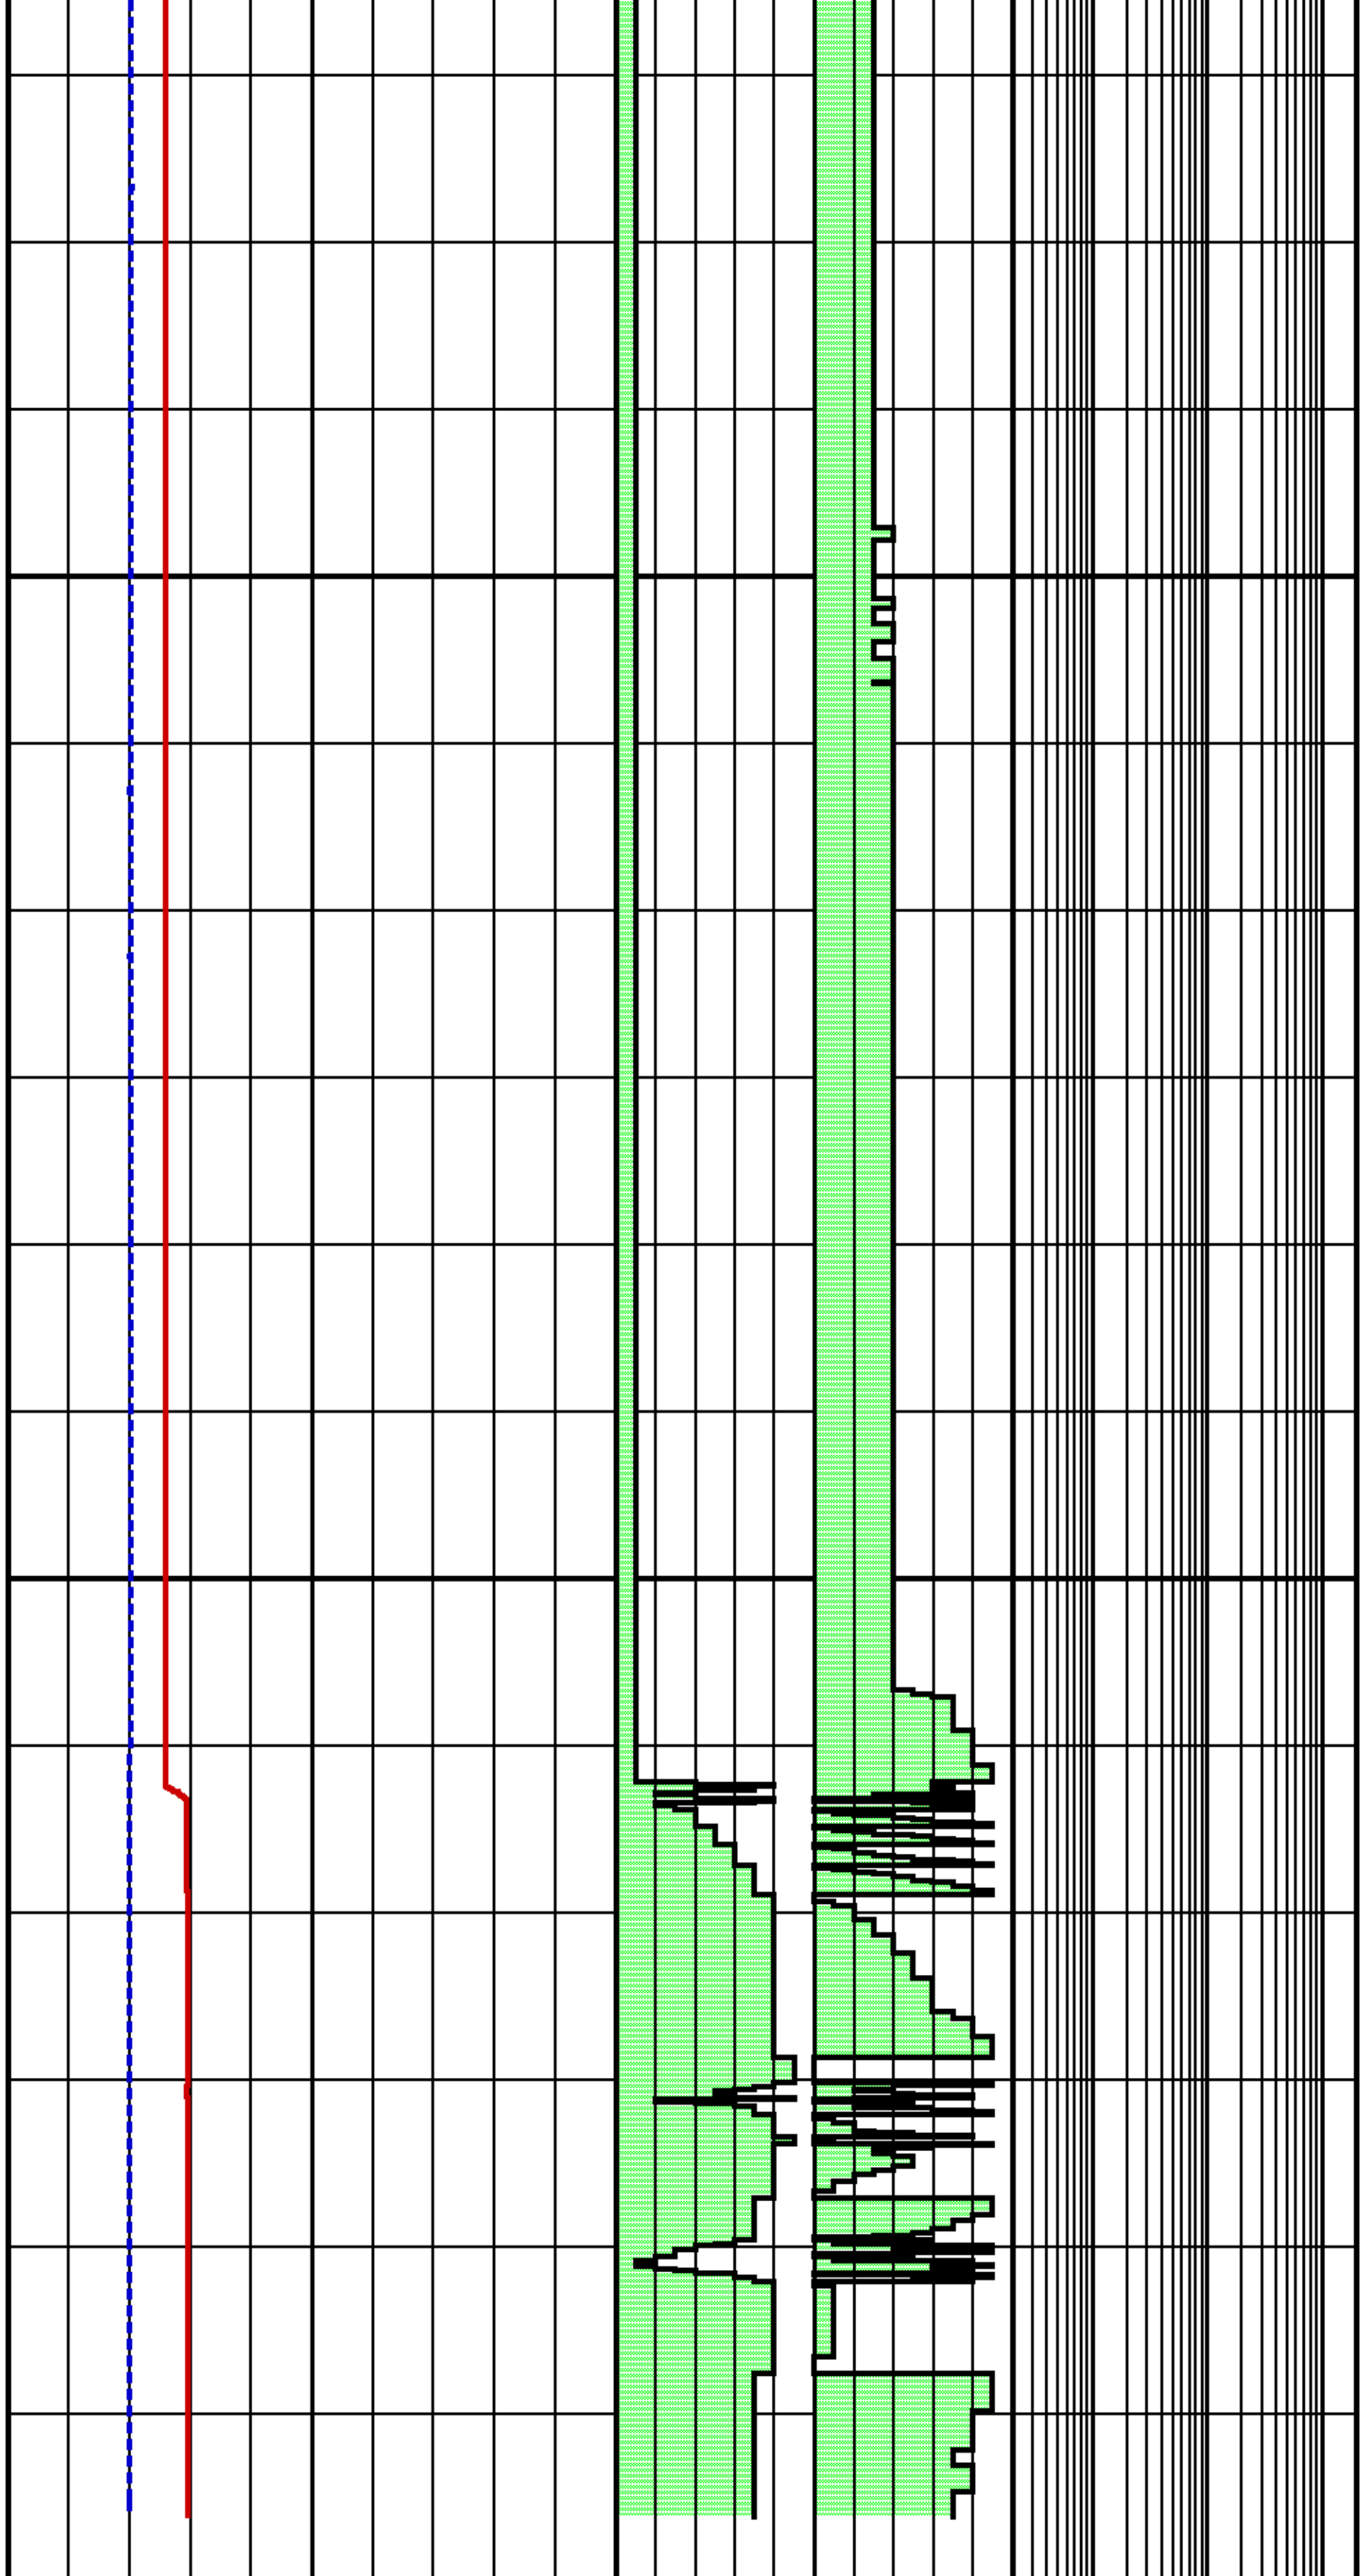

SECONDS	TOOL COMMAND / ANNOTATIONS	APQL (psi)	RTDQL (degF)
450		3891.4	200.5
		3891.4	200.5
460		3891.4	200.5
		3891.4	200.5
470		3891.4	200.5
		3891.4	200.5
480		3891.4	200.5
		3891.4	200.5
490		3891.4	200.5
		3891.4	200.5
500		3891.4	200.5
		3891.4	200.5
510		3891.4	200.5
		3891.4	200.5
520		3891.4	200.5
		3891.4	200.5
530		3891.4	200.5
		3891.4	200.5
540		3891.4	200.5
	BB[1] ABORT	3891.4	200.5
550	BB[1] OPEN BYPASS VALVE	3891.9	200.5
		4425.2	200.5
560		4428.2	200.5
		4428.7	200.5
570	MB[1] RETRACT PACK 2600	4429.1	200.5
		4438.5	200.5
580		4435.0	200.5
		4438.2	200.5
590		4437.9	200.5
		4437.8	200.5
600			

SECONDS

TOOL COMMAND

ANNOTATIONS

Packer Quartz [apql] 0 15000 (psi)

DRAW DOWN VOL [ddv] 20 0 (cm3)

QL ONES 0 10 (psi)

QL DECS 0 10 (psi)

APQL (psi)

RTDQL (degF)

Sample Tests – Level 64 Tool Instance 1
MD 2415.0 m TVD 2415.0 m

PRESSURE HISTORY

Depth MD 2415.0 m TVD 2415.0 m

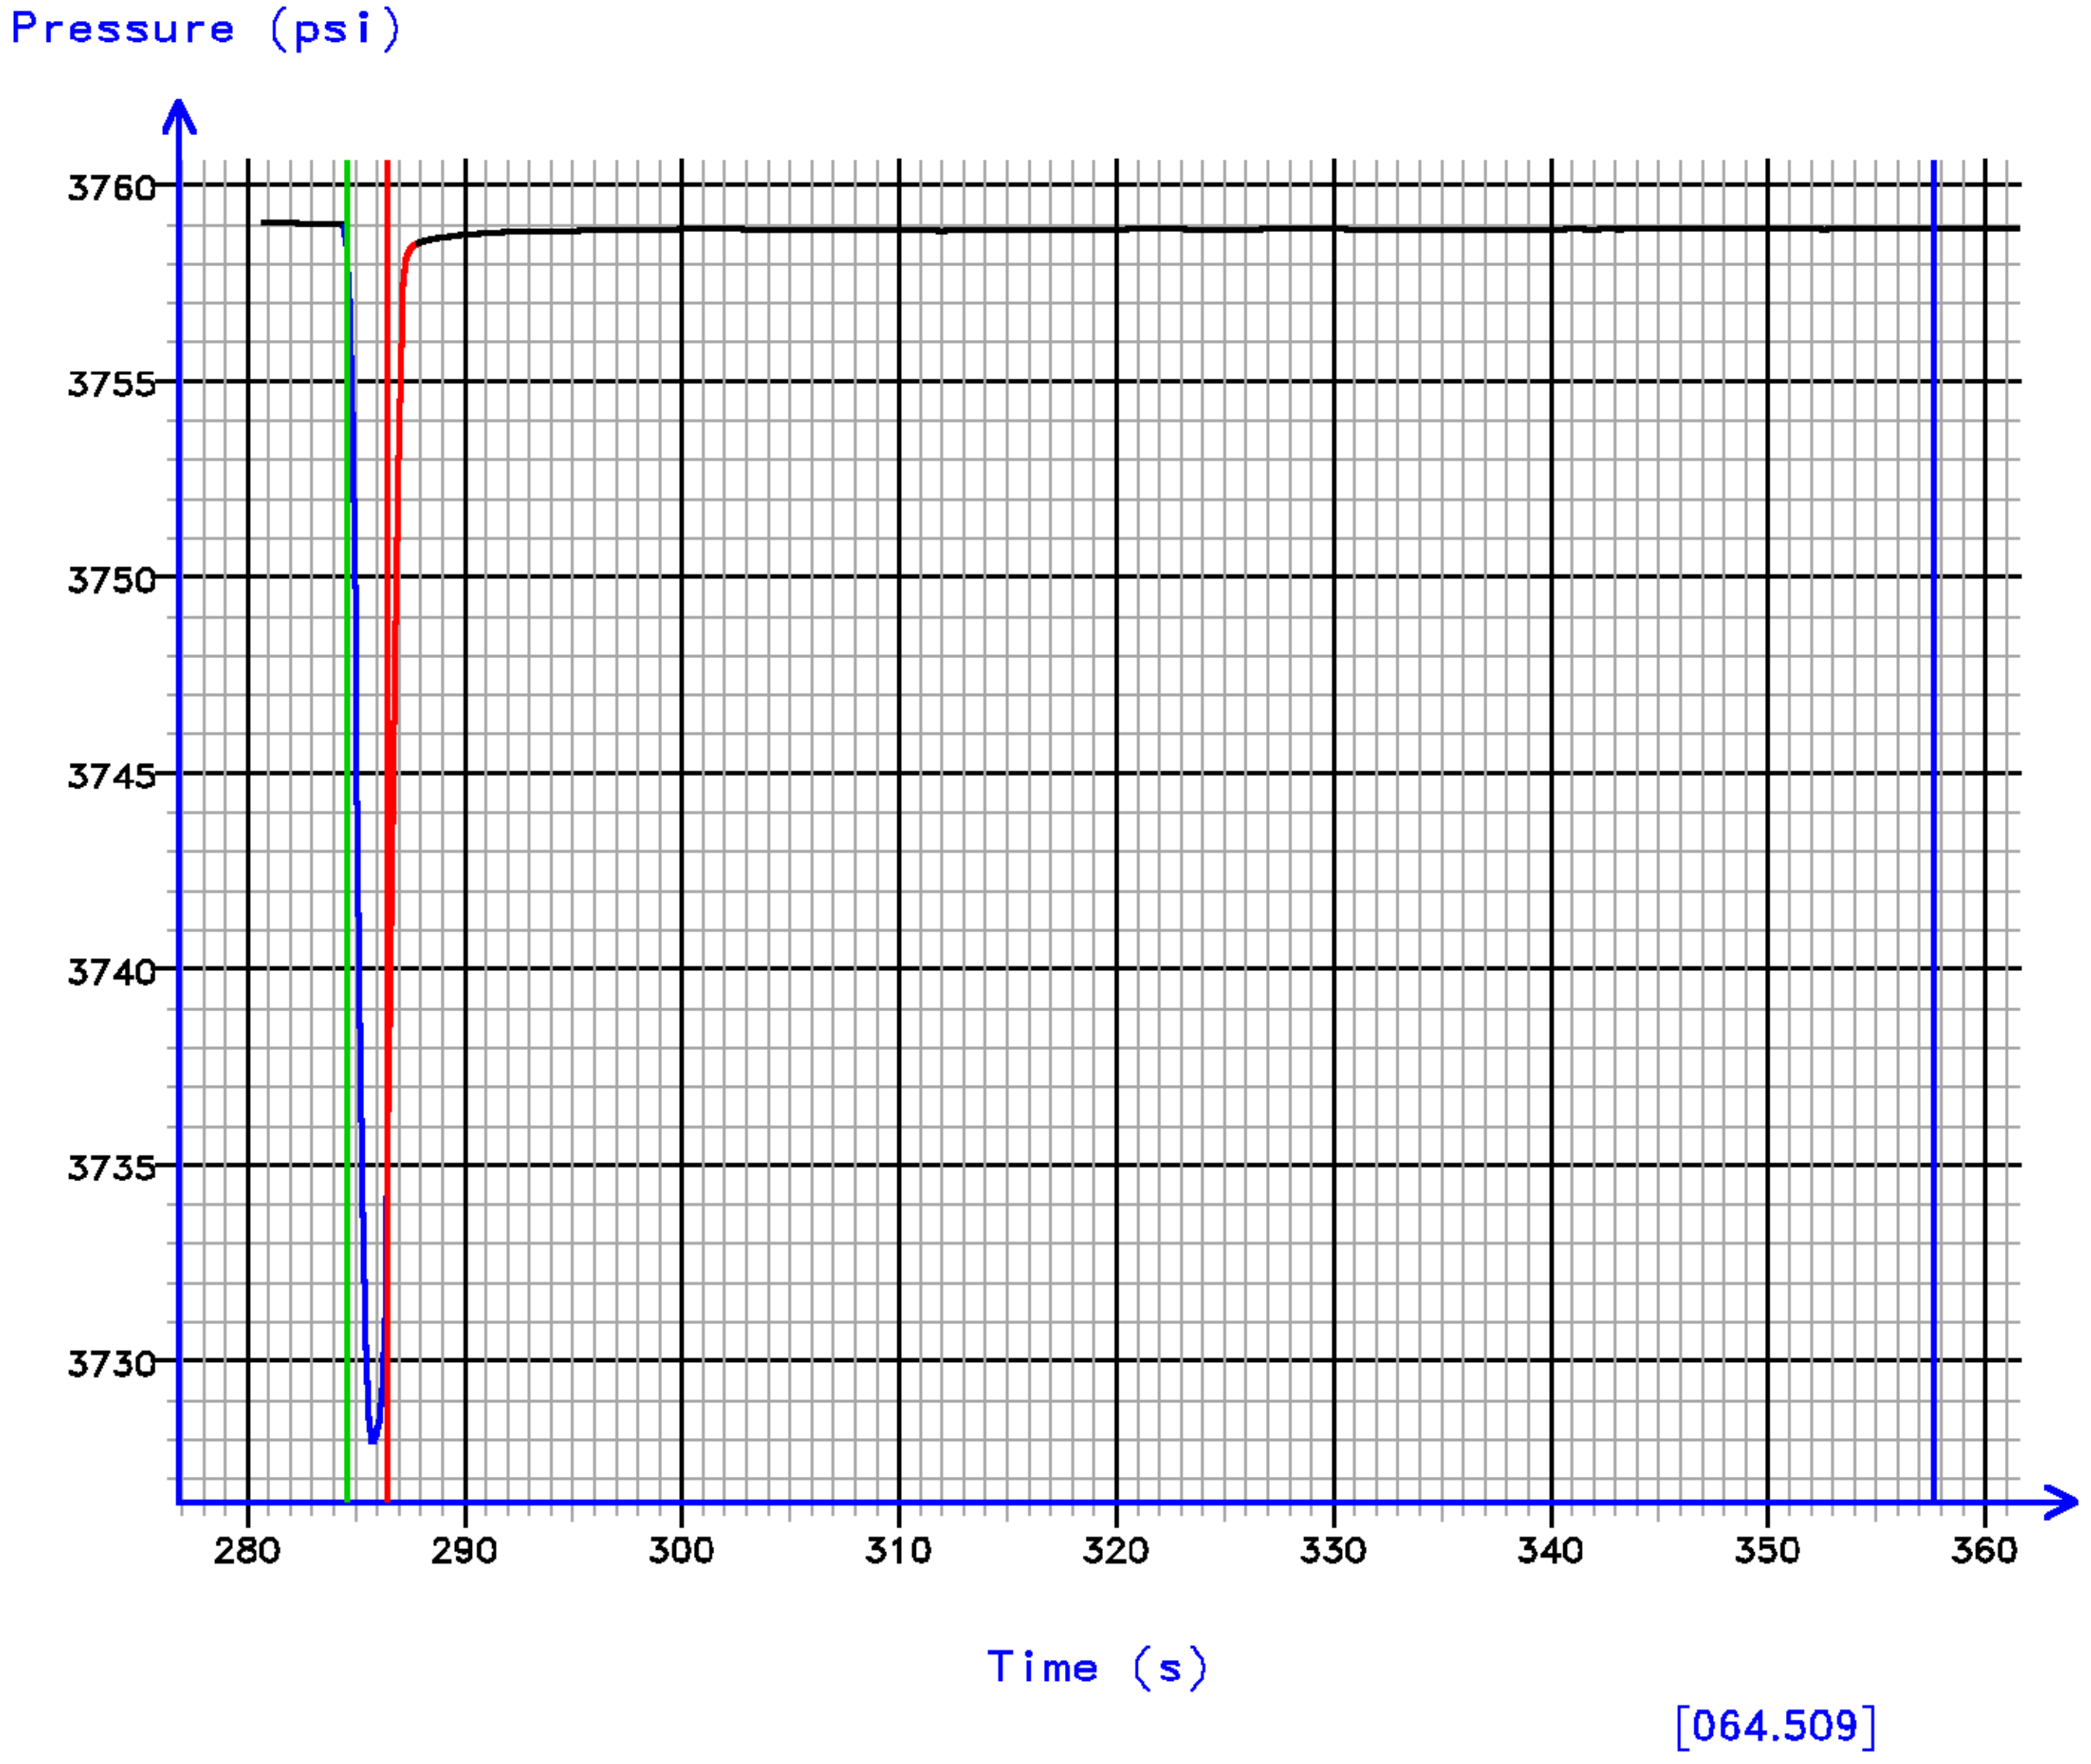

FLOW RATE ANALYSIS

Depth MD 2415.0 m TVD 2415.0 m

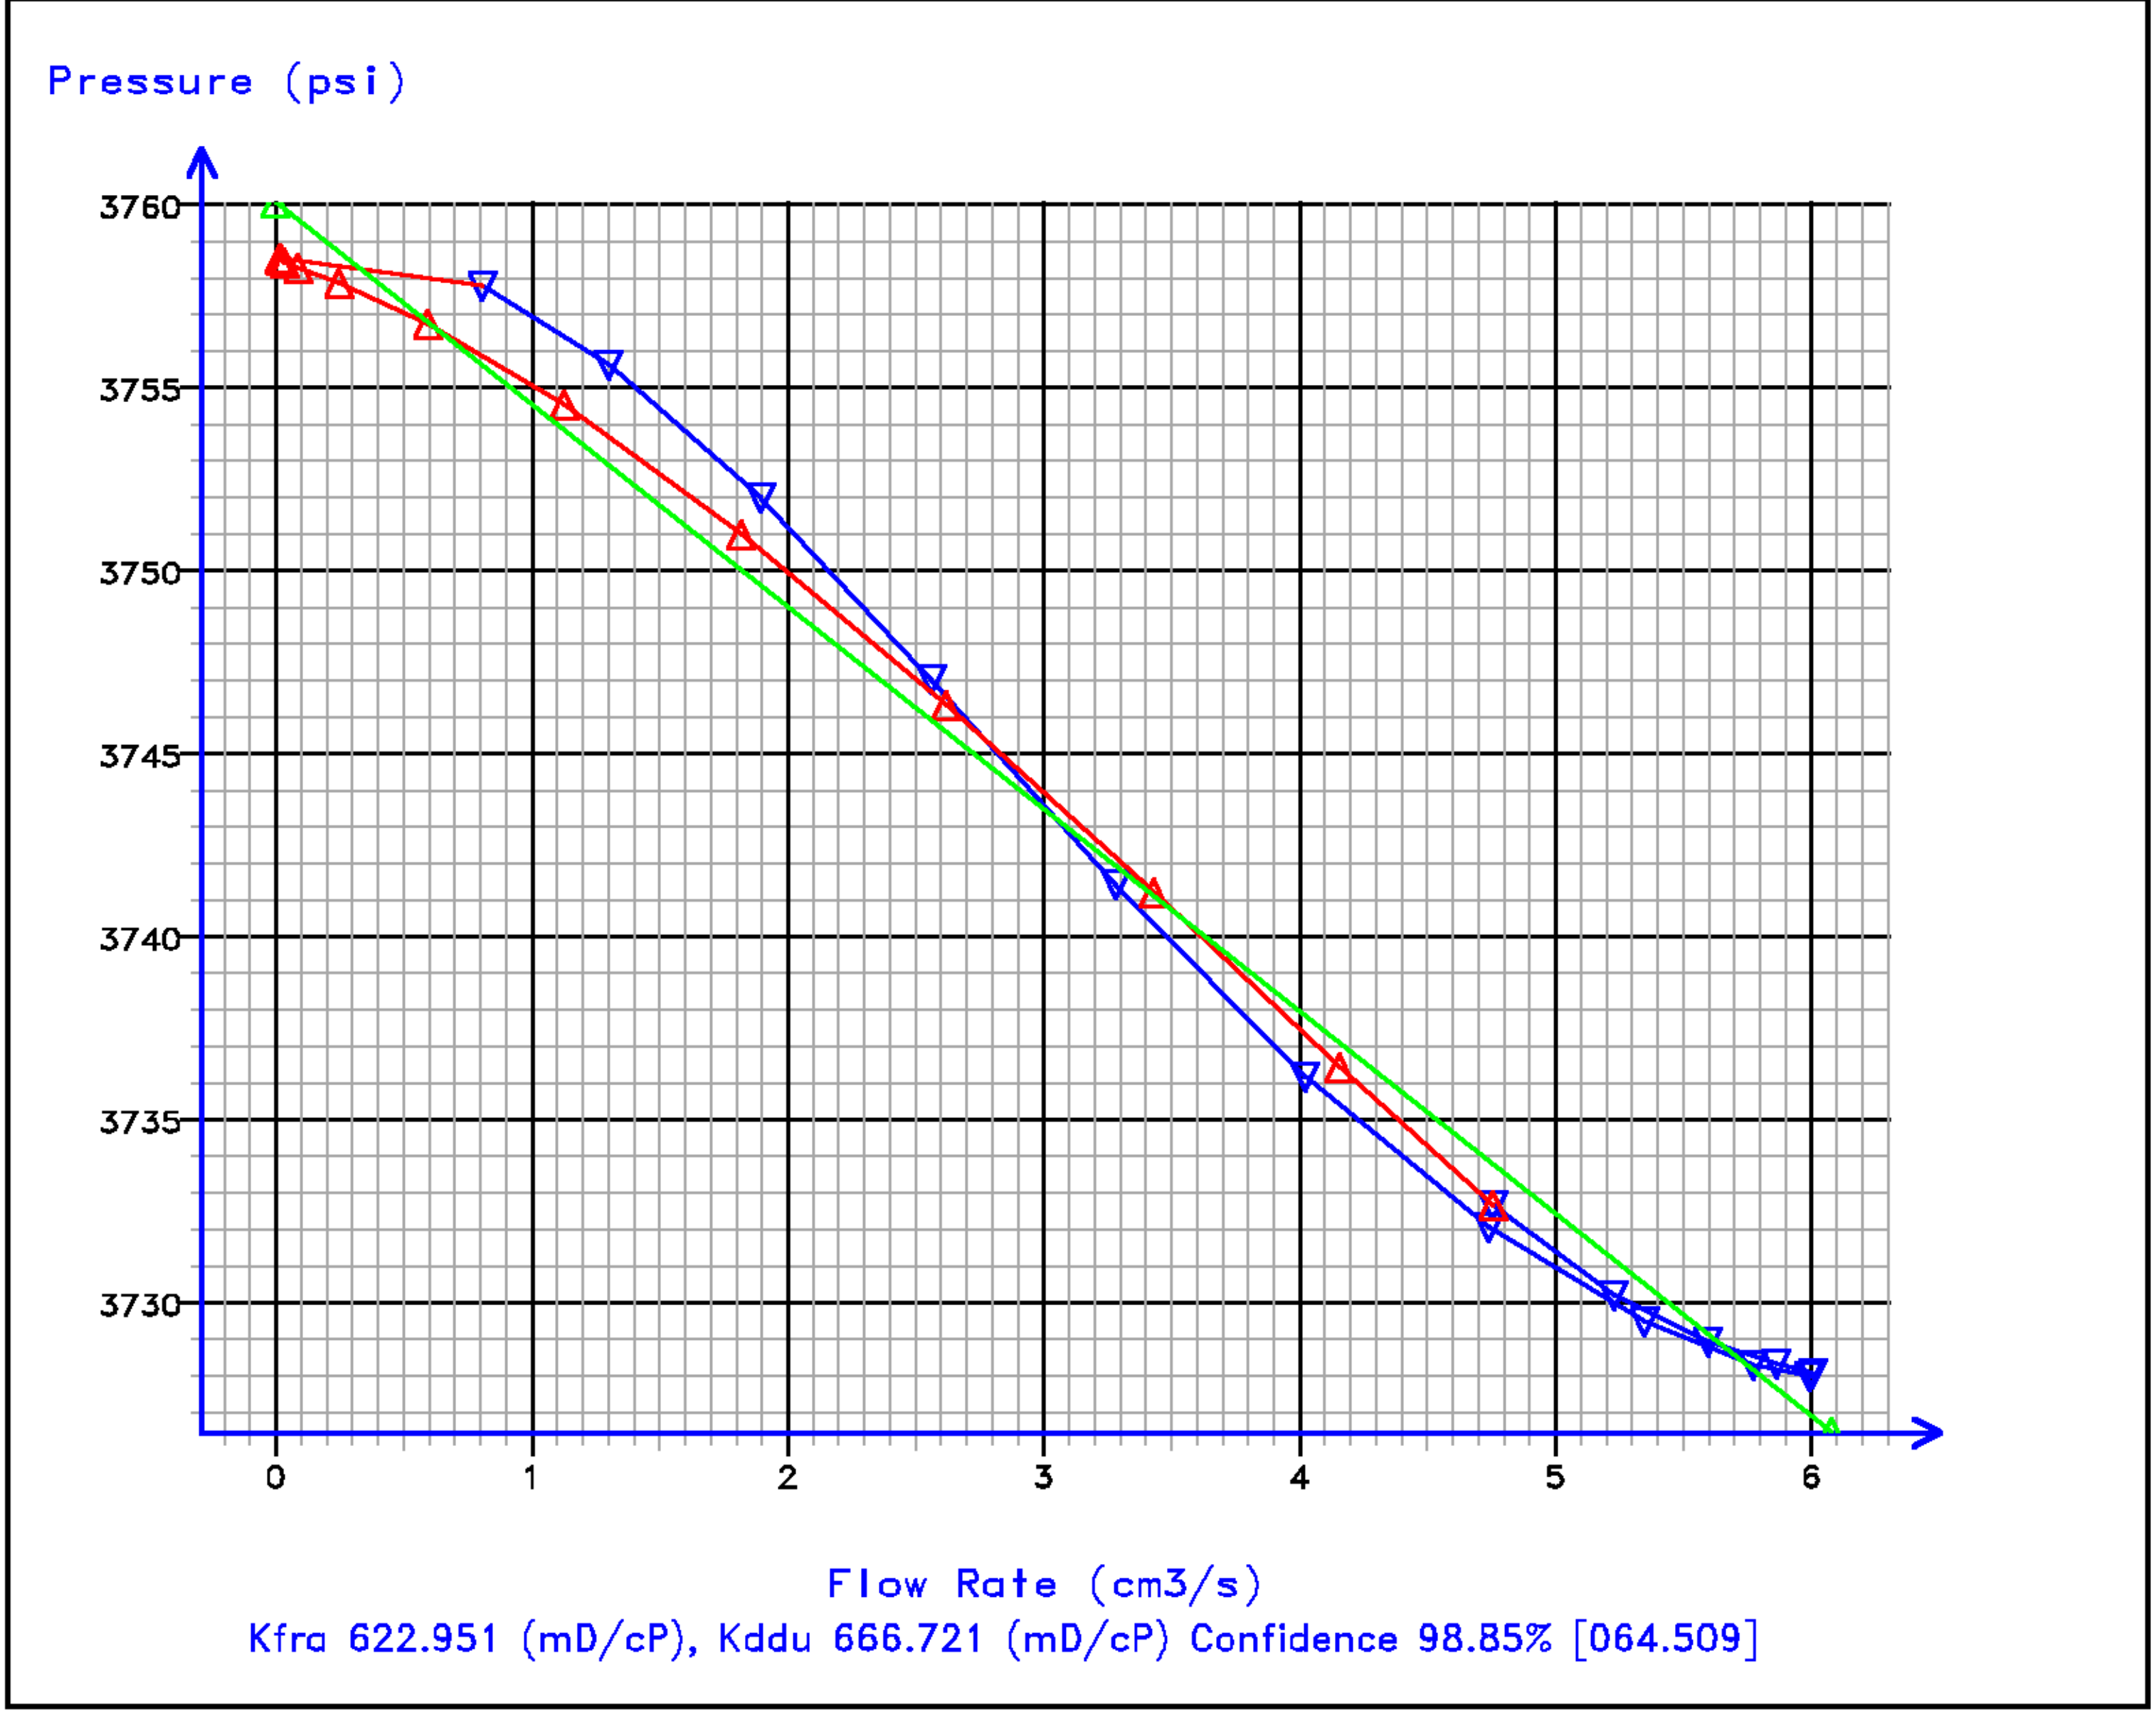

Data File : j800g77.aff
Presentation: gpi_rci-b6xx.log

SECONDS	TOOL COMMAND ANNOTATIONS	Packer Quartz [apql] 0 15000 (psi) Pump Quartz [apqk] 0 15000 (psi) DRAW DOWN VOL [ddv] 20 0 (cm3) PTV VOL [ptv] 10000 0 (cm3) PVT VOL [pvtv] 100 0 (cm3) PTVR VOL [ptvr] 10 0 (cm3)	QL ONES 0 10 (psi) QL DECS 0 10 (psi)			

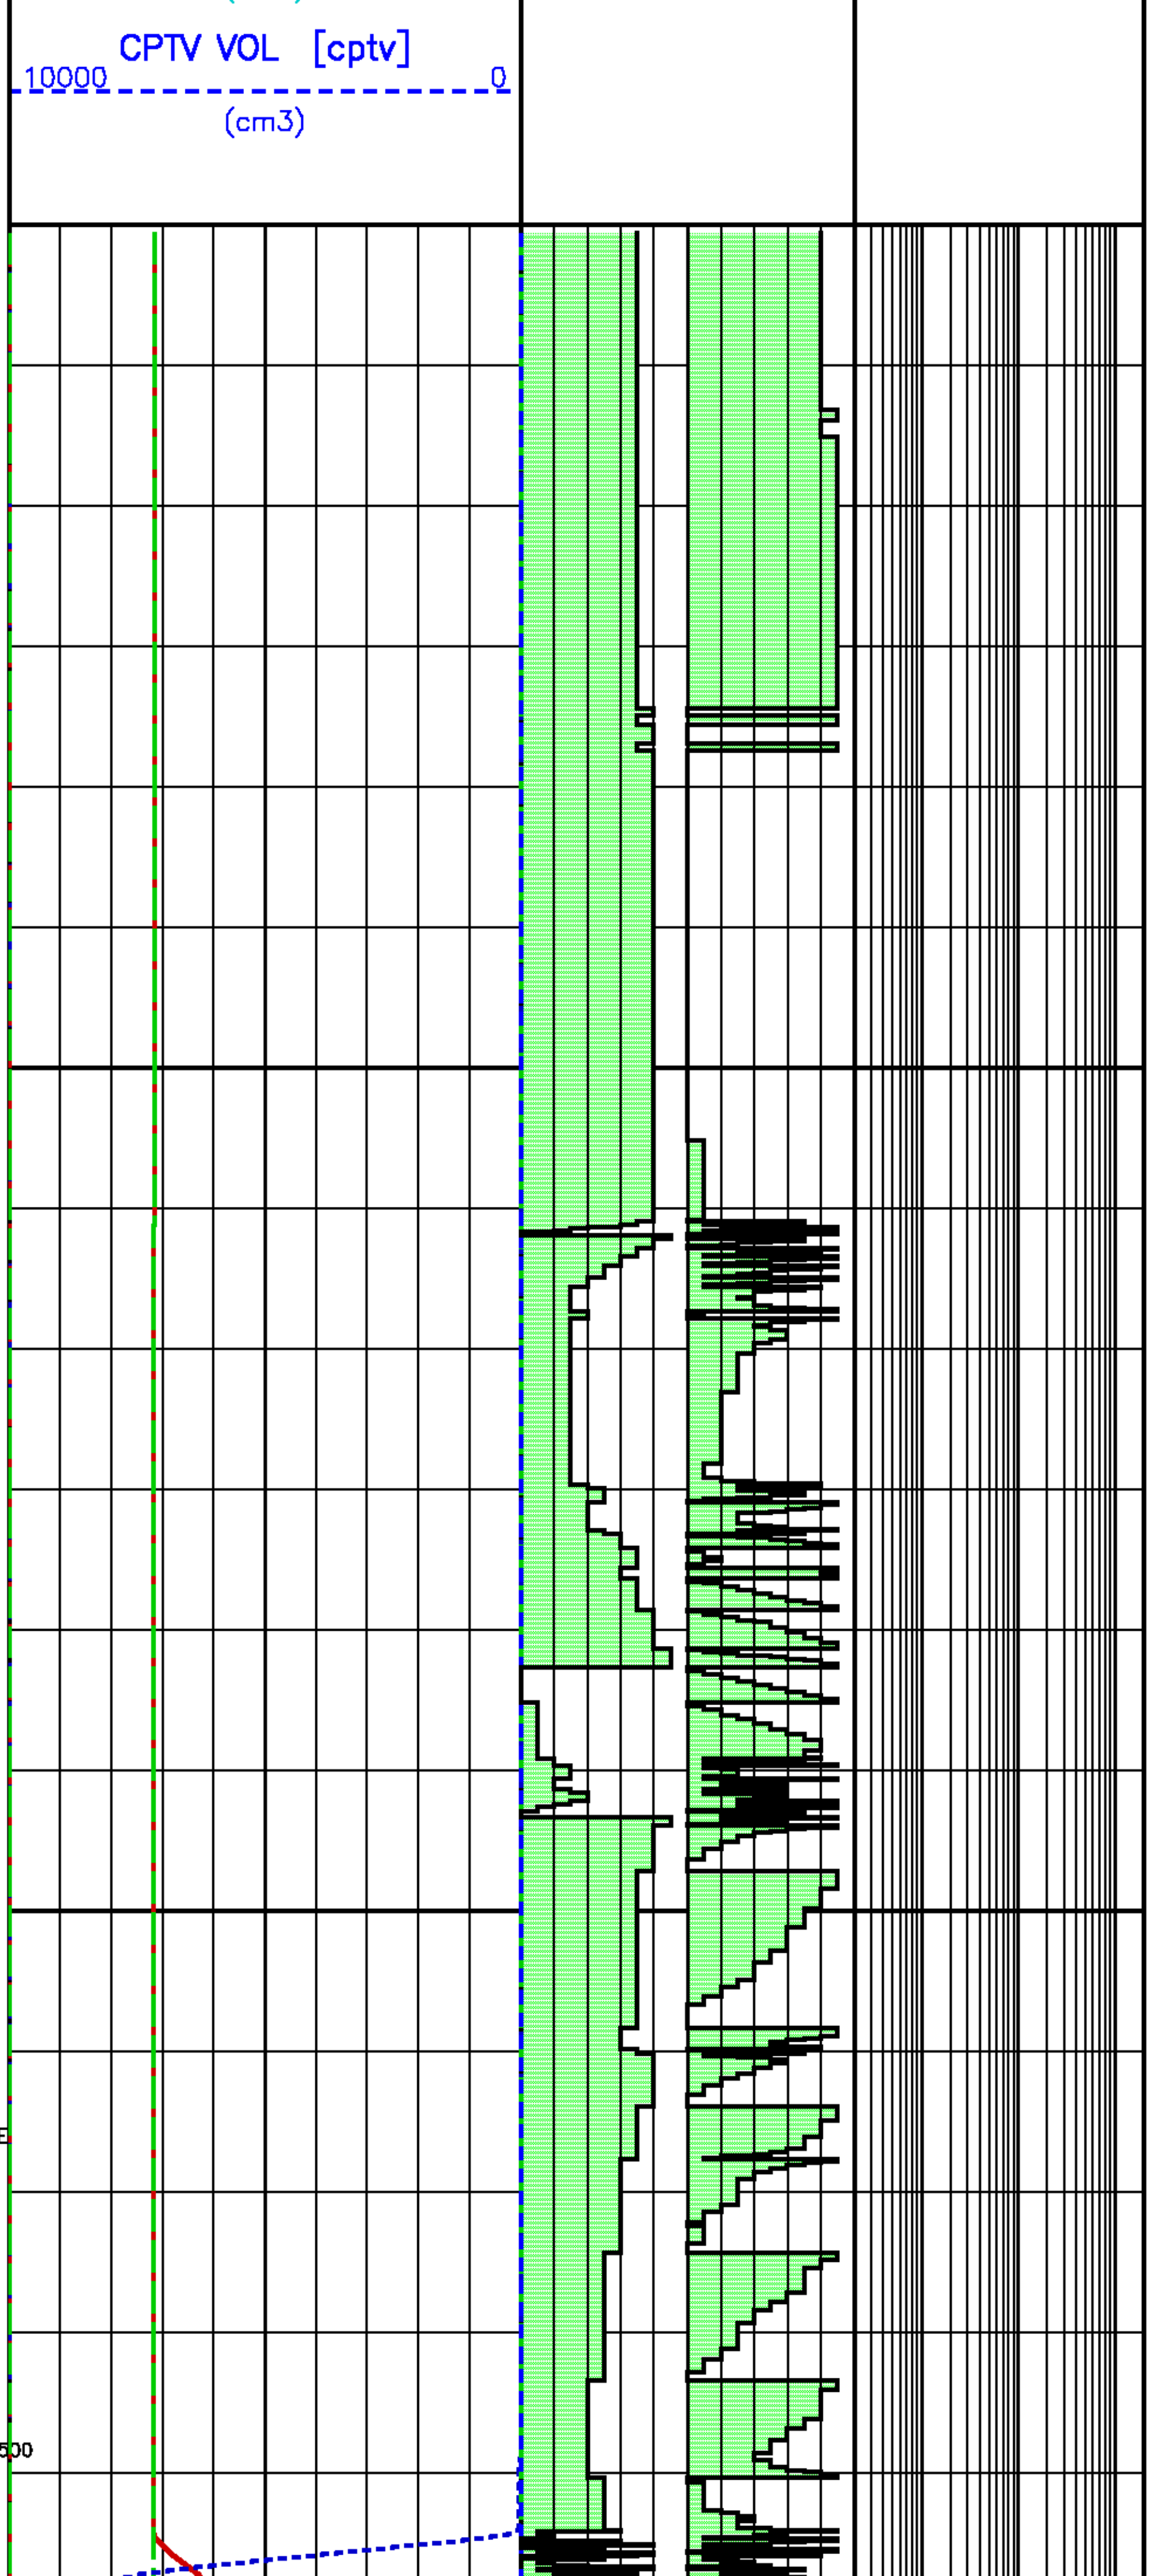

Depth	Annotation	APQL (psi)	RTDQL (degF)
0			
		4257.9	200.7
10		4257.9	200.7
		4257.9	200.7
20		4257.9	200.7
		4257.9	200.7
30		4258.0	200.7
		4258.0	200.7
40		4258.0	200.7
		4258.0	200.7
50		4258.1	200.7
		4258.1	200.7
60		4258.1	200.7
		4258.1	200.7
70	BB[1] OPEN BYPASS VALVE	4258.1	200.7
		4245.0	200.7
80		4243.4	200.7
		4243.3	200.7
90	MB[1] EXTEND PACK 2800	4245.3	200.7
		4247.2	200.7
100		4248.7	200.7
		4250.9	200.7
110		4253.3	200.7
		4248.3	200.7
120		4247.8	200.7
		4247.4	200.7
	MB[1] RECHARGE 2800		
130		4247.4	200.7
	BB[1] CLOSE BYPASS VALVE	4247.9	200.7
140		4246.3	200.7
		4245.9	200.8
150		4245.3	200.8
		4244.8	200.8
	BB[1] DRAWDOWN 10 300 500		
160		4244.8	200.8
		4446.6	200.8

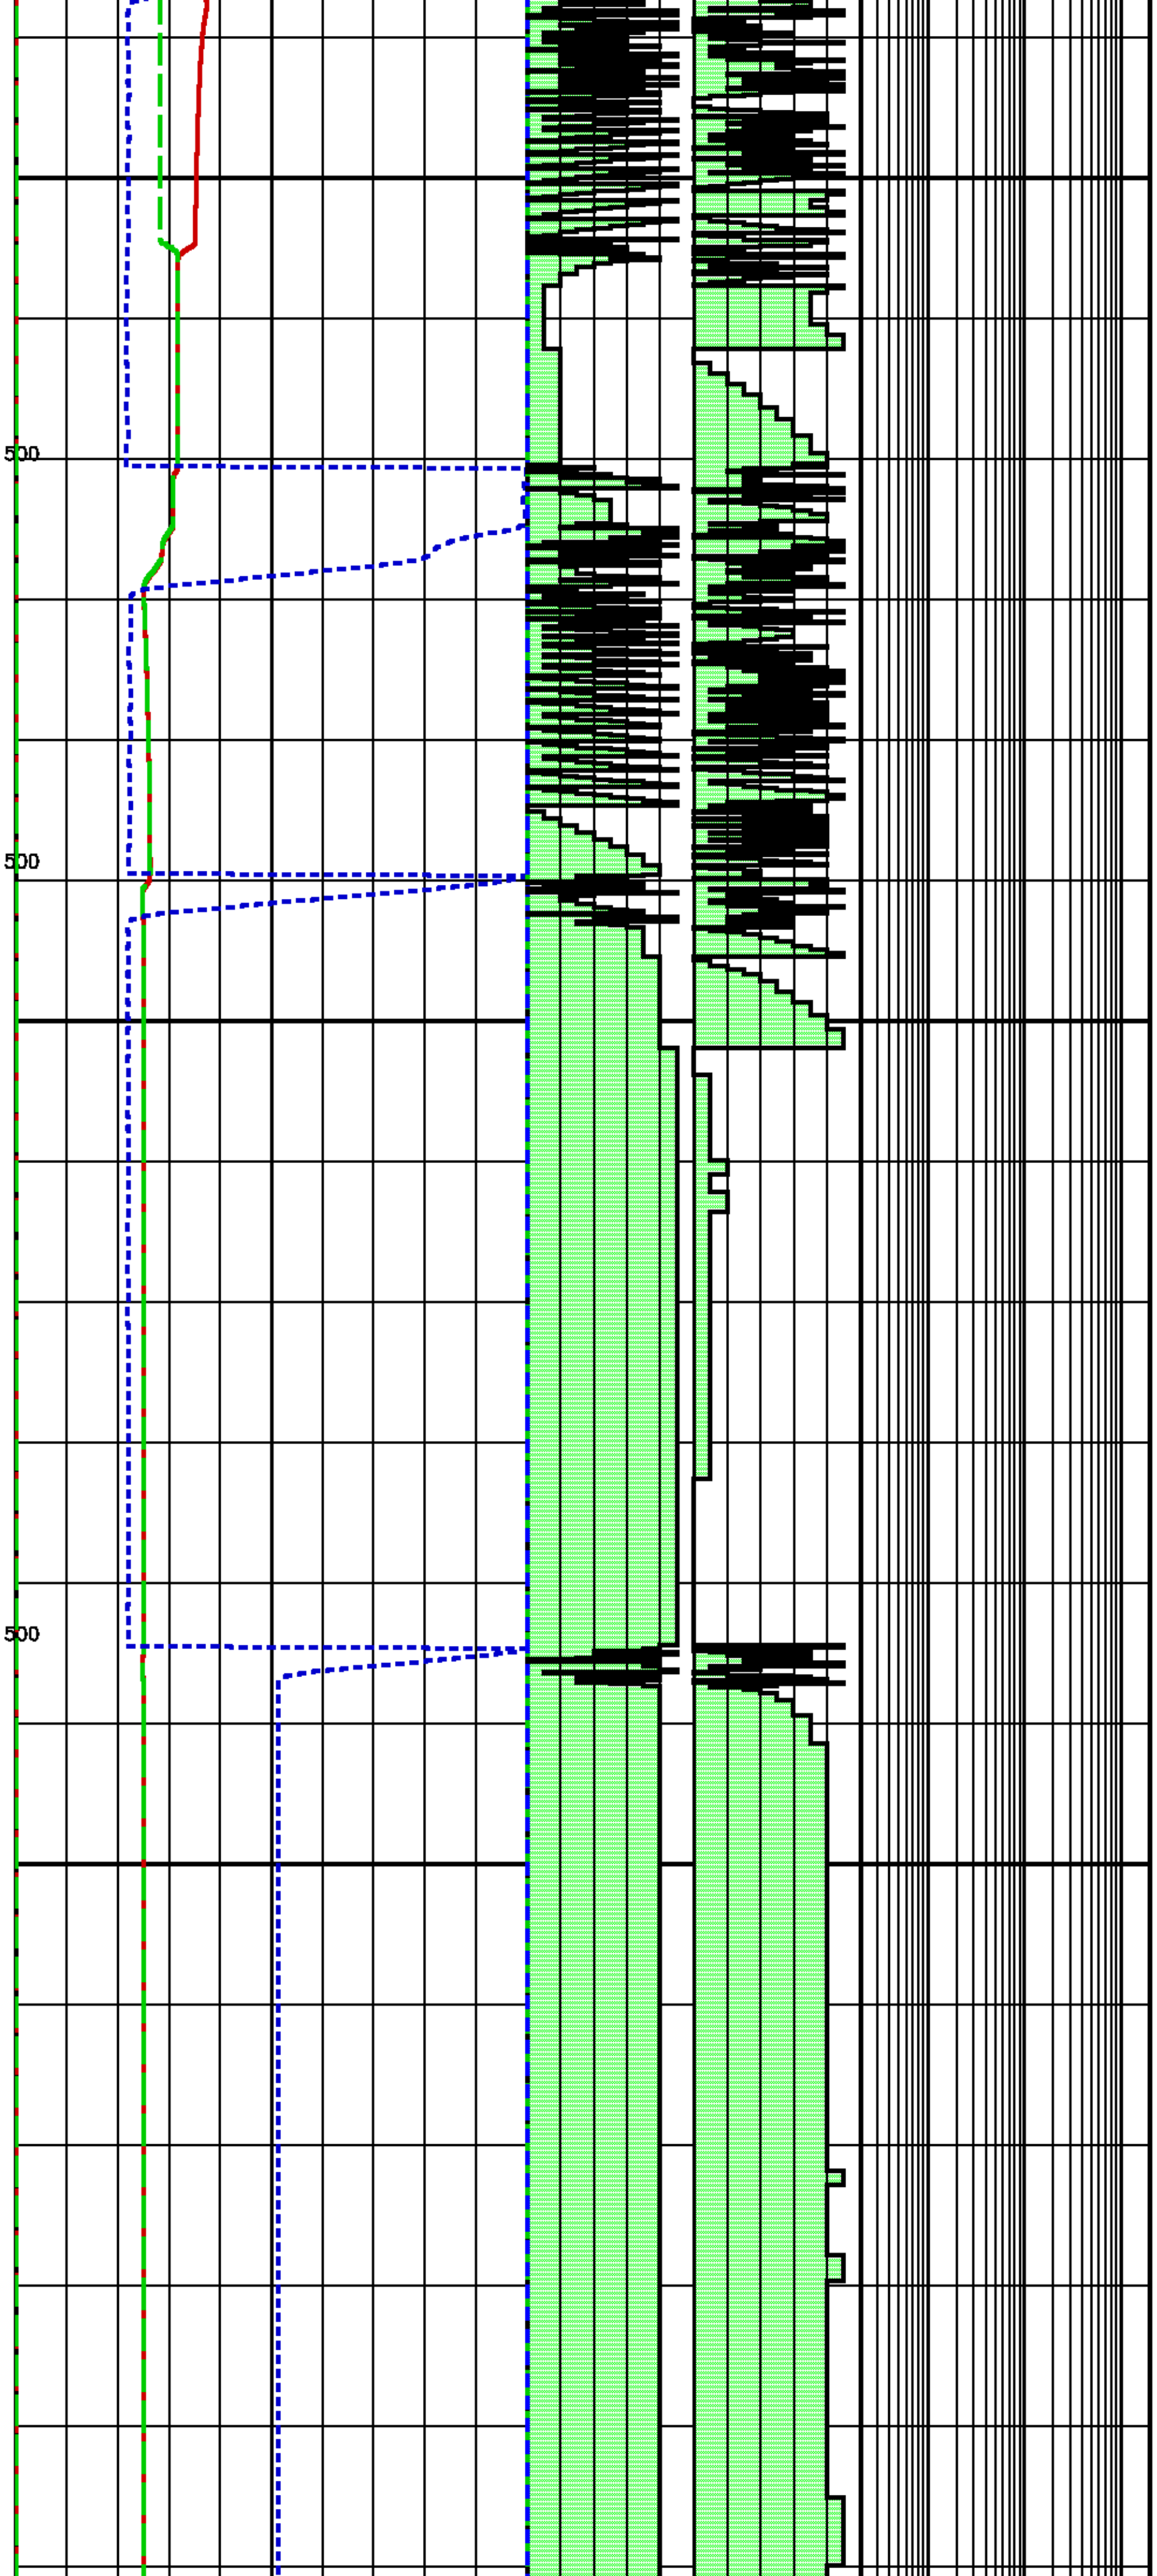

170		5481.2	200.8
		5362.2	200.8
180		5303.7	200.8
	BB[1] ABORT	5086.1	200.8
190		4761.8	200.8
	BB[1] PUMP DIR UP	4762.3	200.8
200	BB[1] DRAWDOWN 10 300 500	4762.8	200.8
		4579.4	200.8
210		3766.7	200.8
		3844.4	200.7
220		3899.0	200.7
		3940.8	200.7
230	BB[1] DRAWDOWN 15 300 500	3916.8	200.7
		3757.8	200.7
240		3758.8	200.7
		3759.1	200.7
250		3759.2	200.7
		3759.2	200.8
260		3759.2	200.8
		3759.1	200.8
270		3759.1	200.8
		3759.1	200.8
280		3759.1	200.8
	BB[1] DRAWDOWN 10 300 500	3749.7	200.8
290		3758.7	200.8
		3758.8	200.8
300		3758.9	200.8
		3758.9	200.8
310		3758.9	200.8
		3758.9	200.8
320		3758.9	200.8
		3758.9	200.8
330		3758.9	200.8
		3758.9	200.8
340		3758.9	200.8
		3758.9	200.8
350		3758.9	200.8

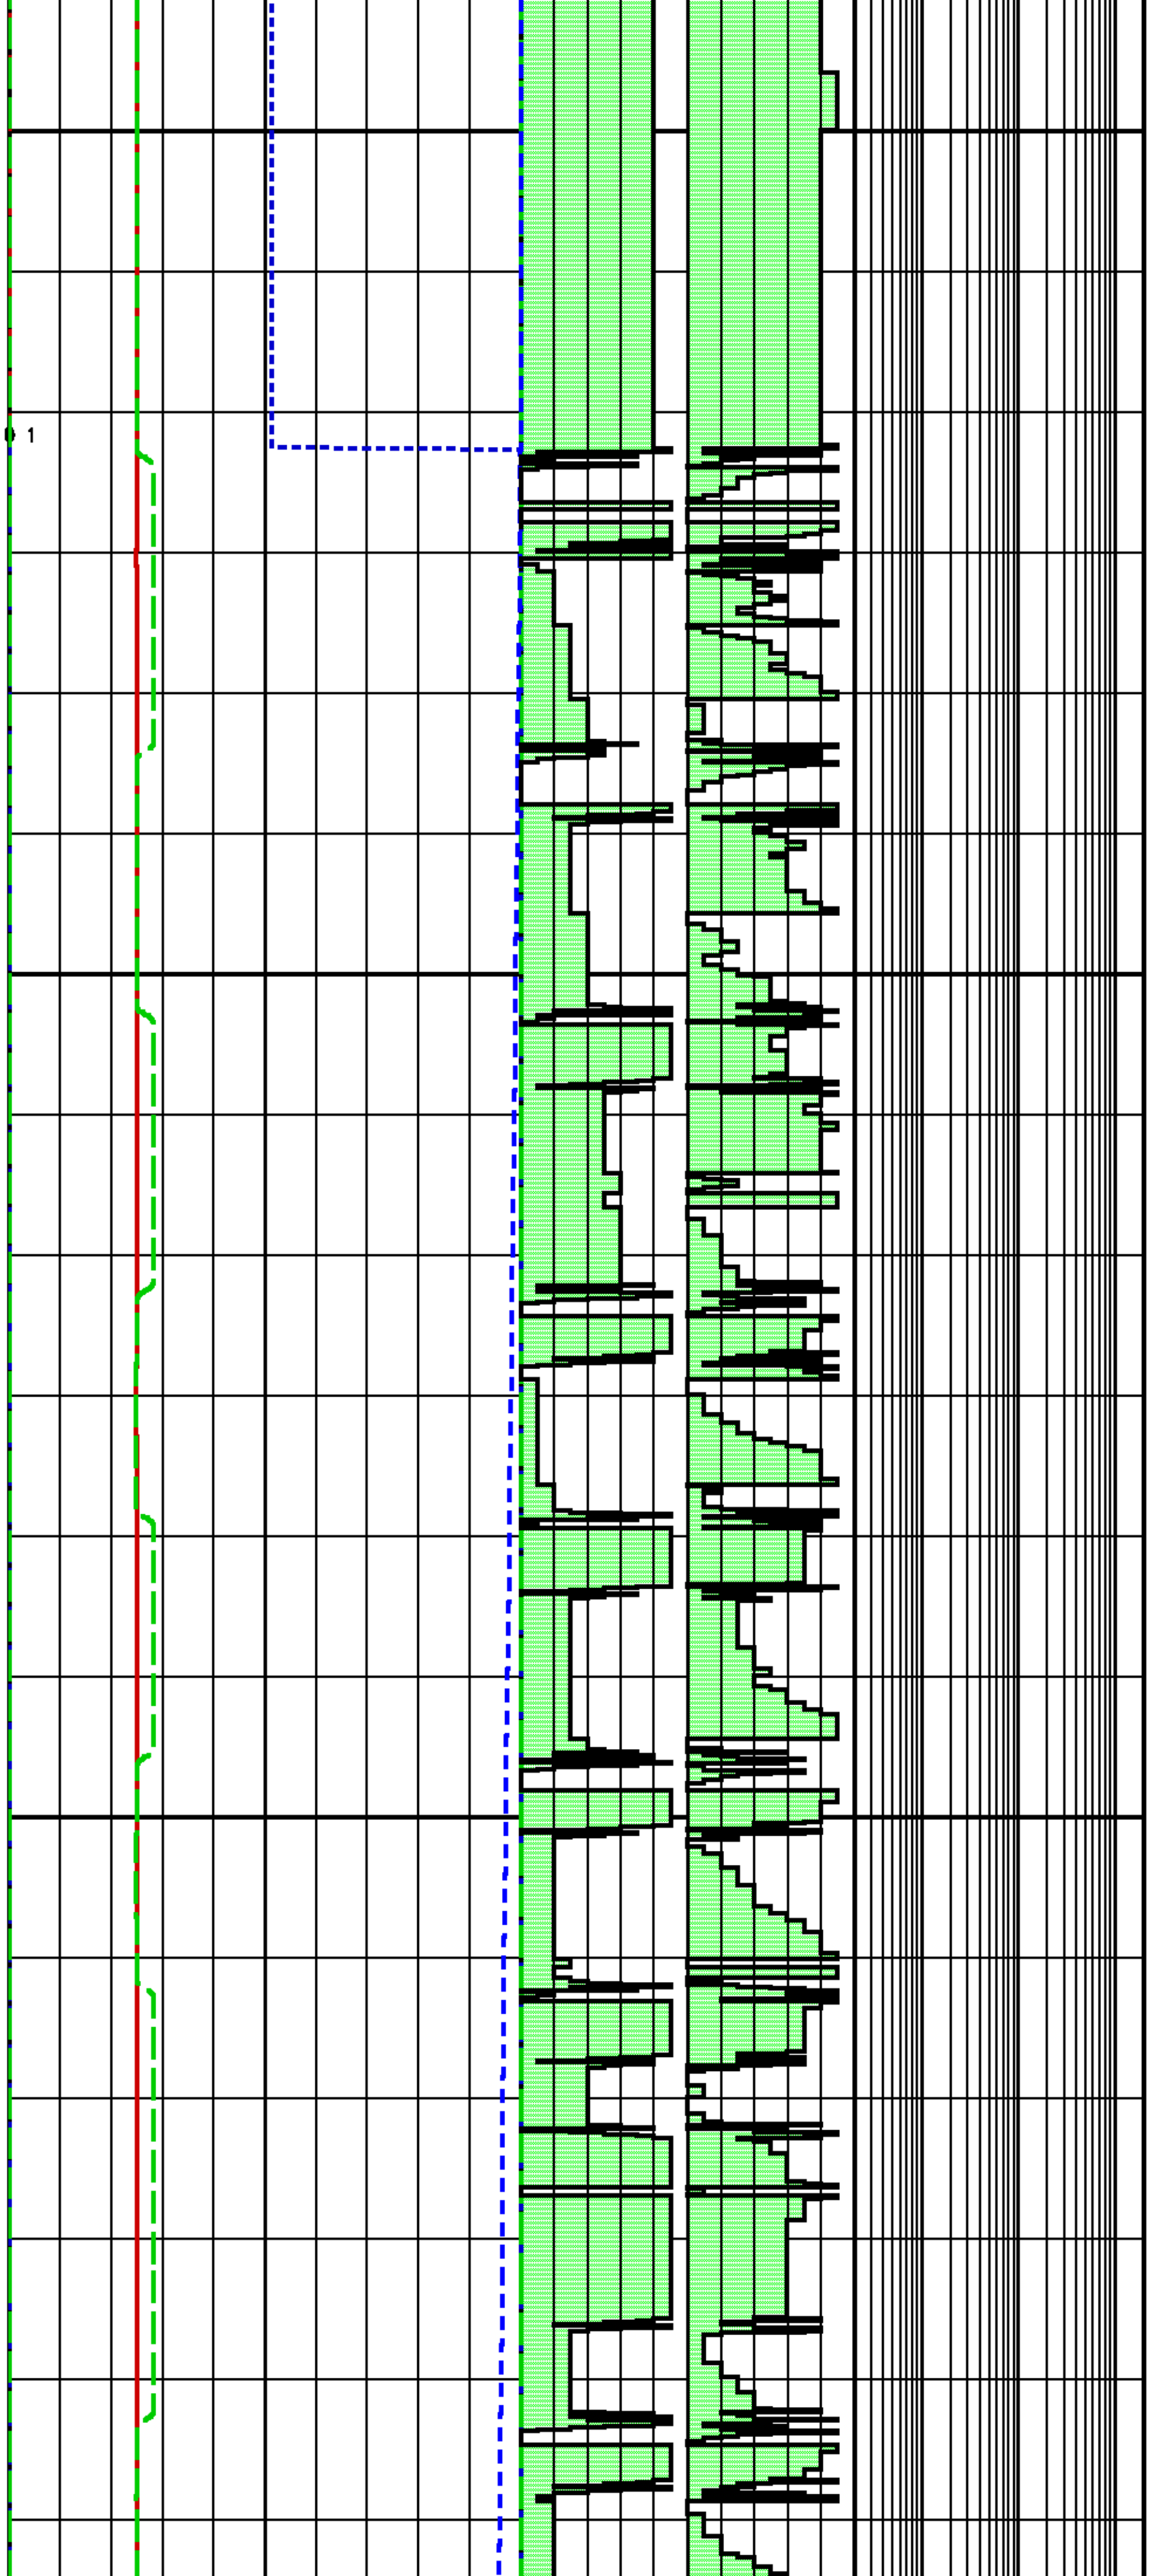

		3758.9	200.8
360		3758.9	200.8
		3758.9	200.8
370		3758.9	200.8
		3758.9	200.8
380		3758.9	200.8
	BB[1] PUMP 100000 0 63 0 1	3760.4	200.8
390		3740.0	200.8
		3742.9	200.8
400		3743.9	200.8
		3760.9	200.8
410		3743.5	200.8
		3743.8	200.8
420		3744.4	200.8
		3759.6	200.8
430		3745.8	200.8
		3746.3	200.8
440		3746.2	200.8
		3759.8	200.8
450		3741.1	200.8
		3741.9	200.8
460		3759.7	200.8
		3743.3	200.8
470		3743.5	200.8
		3744.0	200.8
480		3759.8	200.8
		3742.4	200.8
490		3743.0	200.8
		3759.8	200.8
500	BB[1] STOP OPERATION	3744.1	200.8
	MB[1] RECHARGE 2800	3759.6	200.8
510		3759.7	200.8
	BB[1] RESUME OPERATION	3759.6	200.8
520		3743.4	200.8
		3759.9	200.8
530		3742.1	200.8

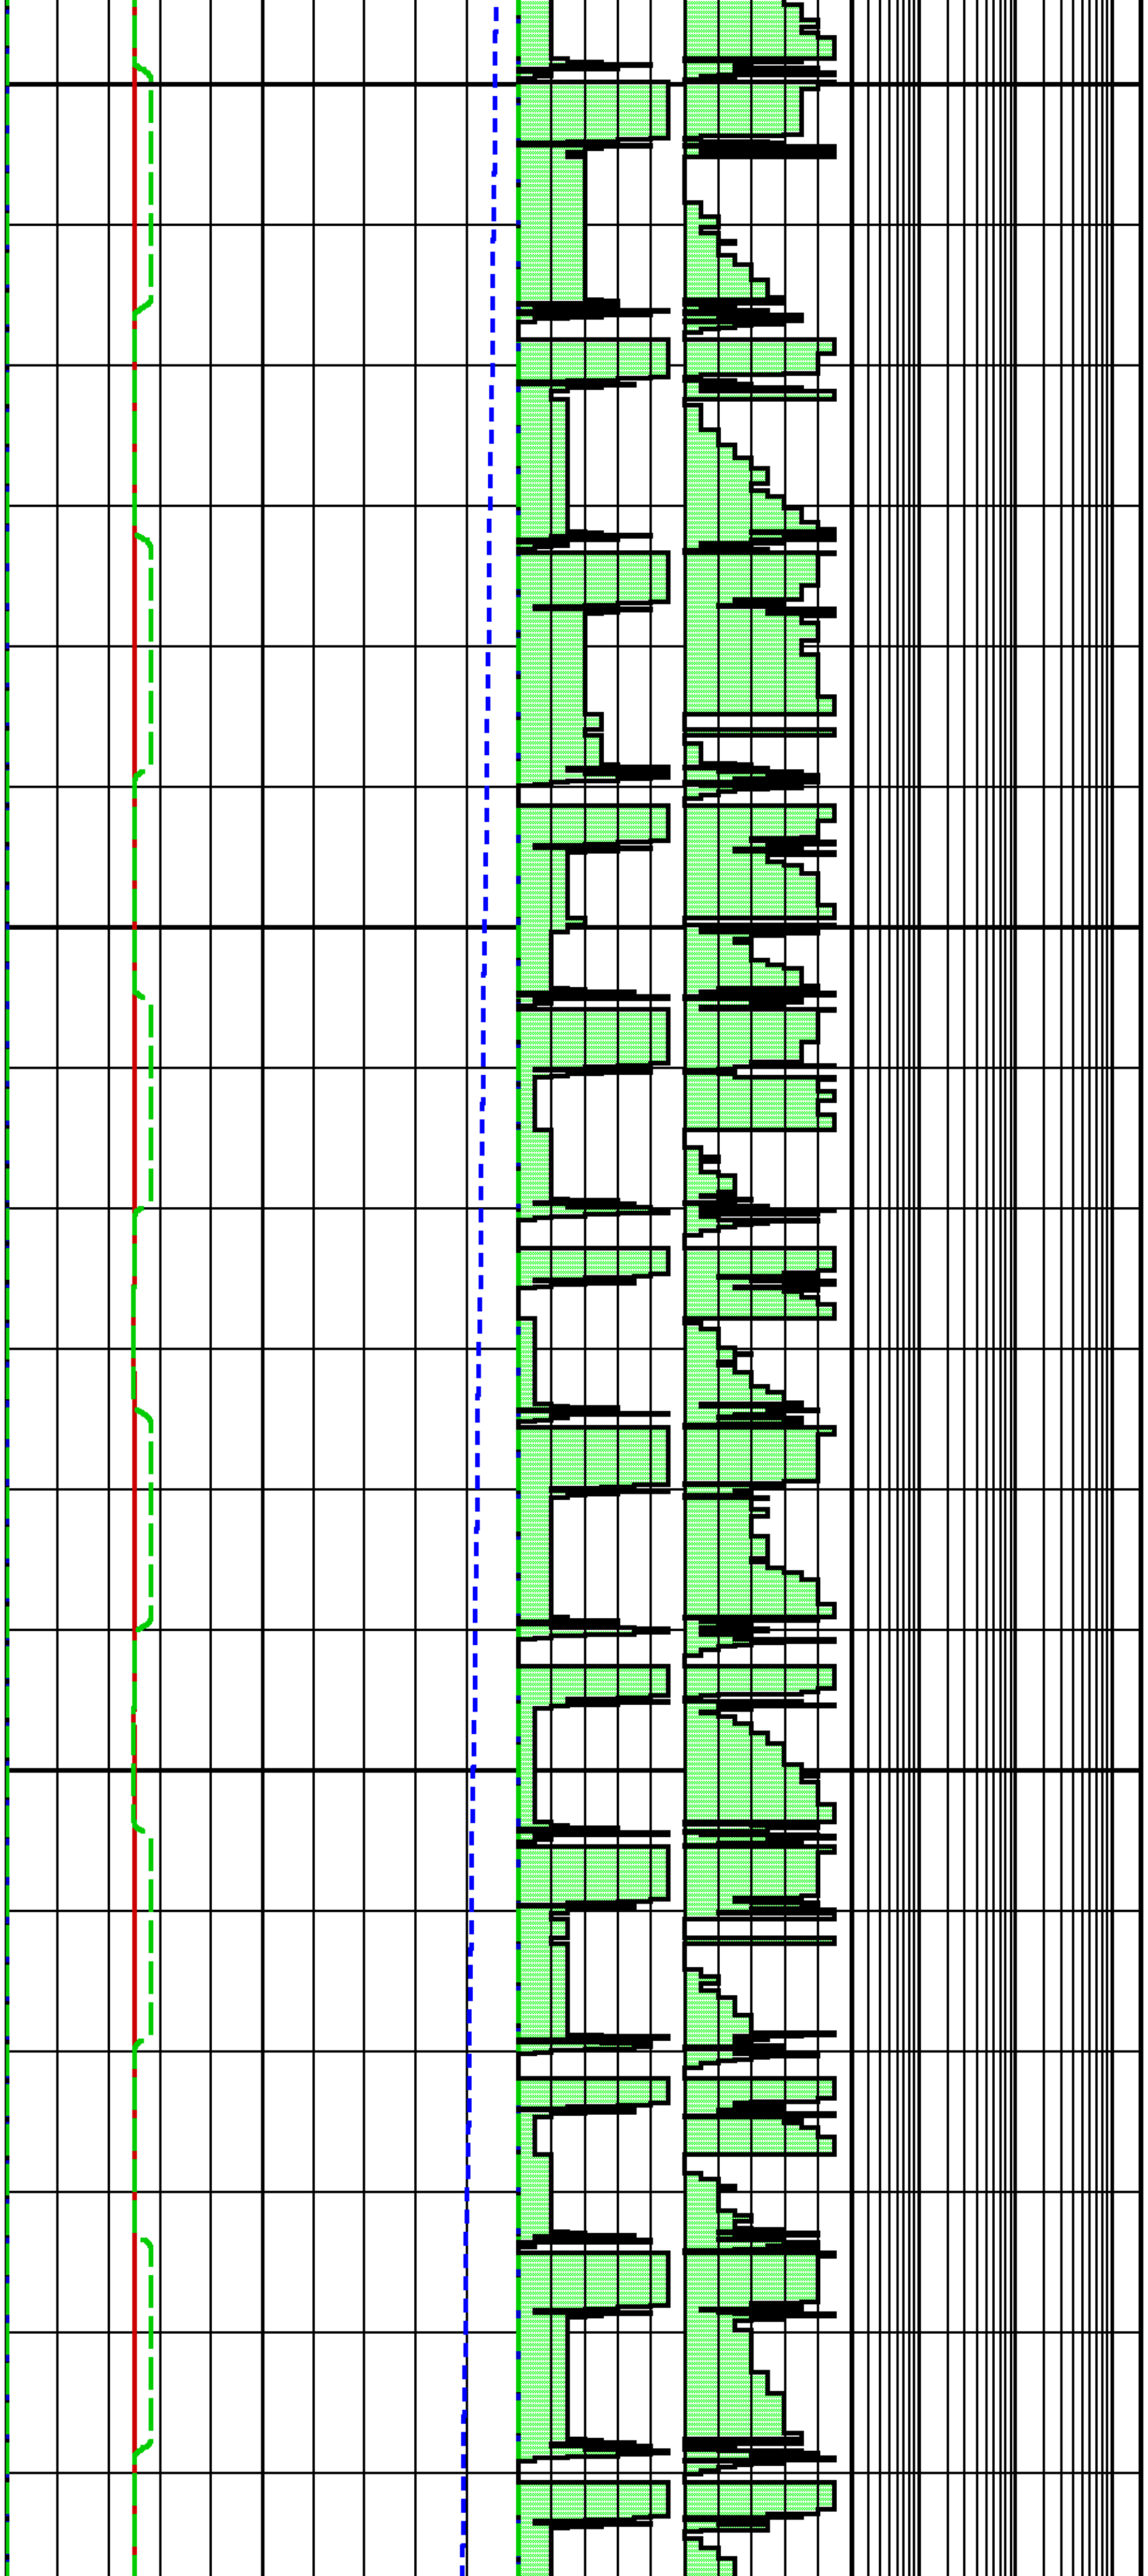

	3742.8	200.8
540	3759.9	200.8
	3744.0	200.8
550	3744.2	200.8
	3744.5	200.8
560	3759.9	200.8
	3743.2	200.8
570	3743.7	200.8
	3759.8	200.8
580	3744.8	200.8
	3745.0	200.9
590	3760.7	200.9
	3743.5	200.9
600	3743.7	200.9
	3759.1	200.9
610	3754.4	200.9
	3742.1	200.9
620	3768.1	200.9
	3754.7	200.9
630	3741.3	200.9
	3762.7	200.9
640	3752.5	200.9
	3742.5	200.9
650	3769.5	200.9
	3753.1	200.9
660	3741.8	200.9
	3761.6	200.9
670	3744.0	200.9
	3743.2	200.9
680	3762.6	200.9
	3741.7	200.9
690	3742.3	200.9
	3759.9	200.9
700	3743.4	200.9
	3743.7	200.9
710	3760.1	200.9
	3742.1	200.9

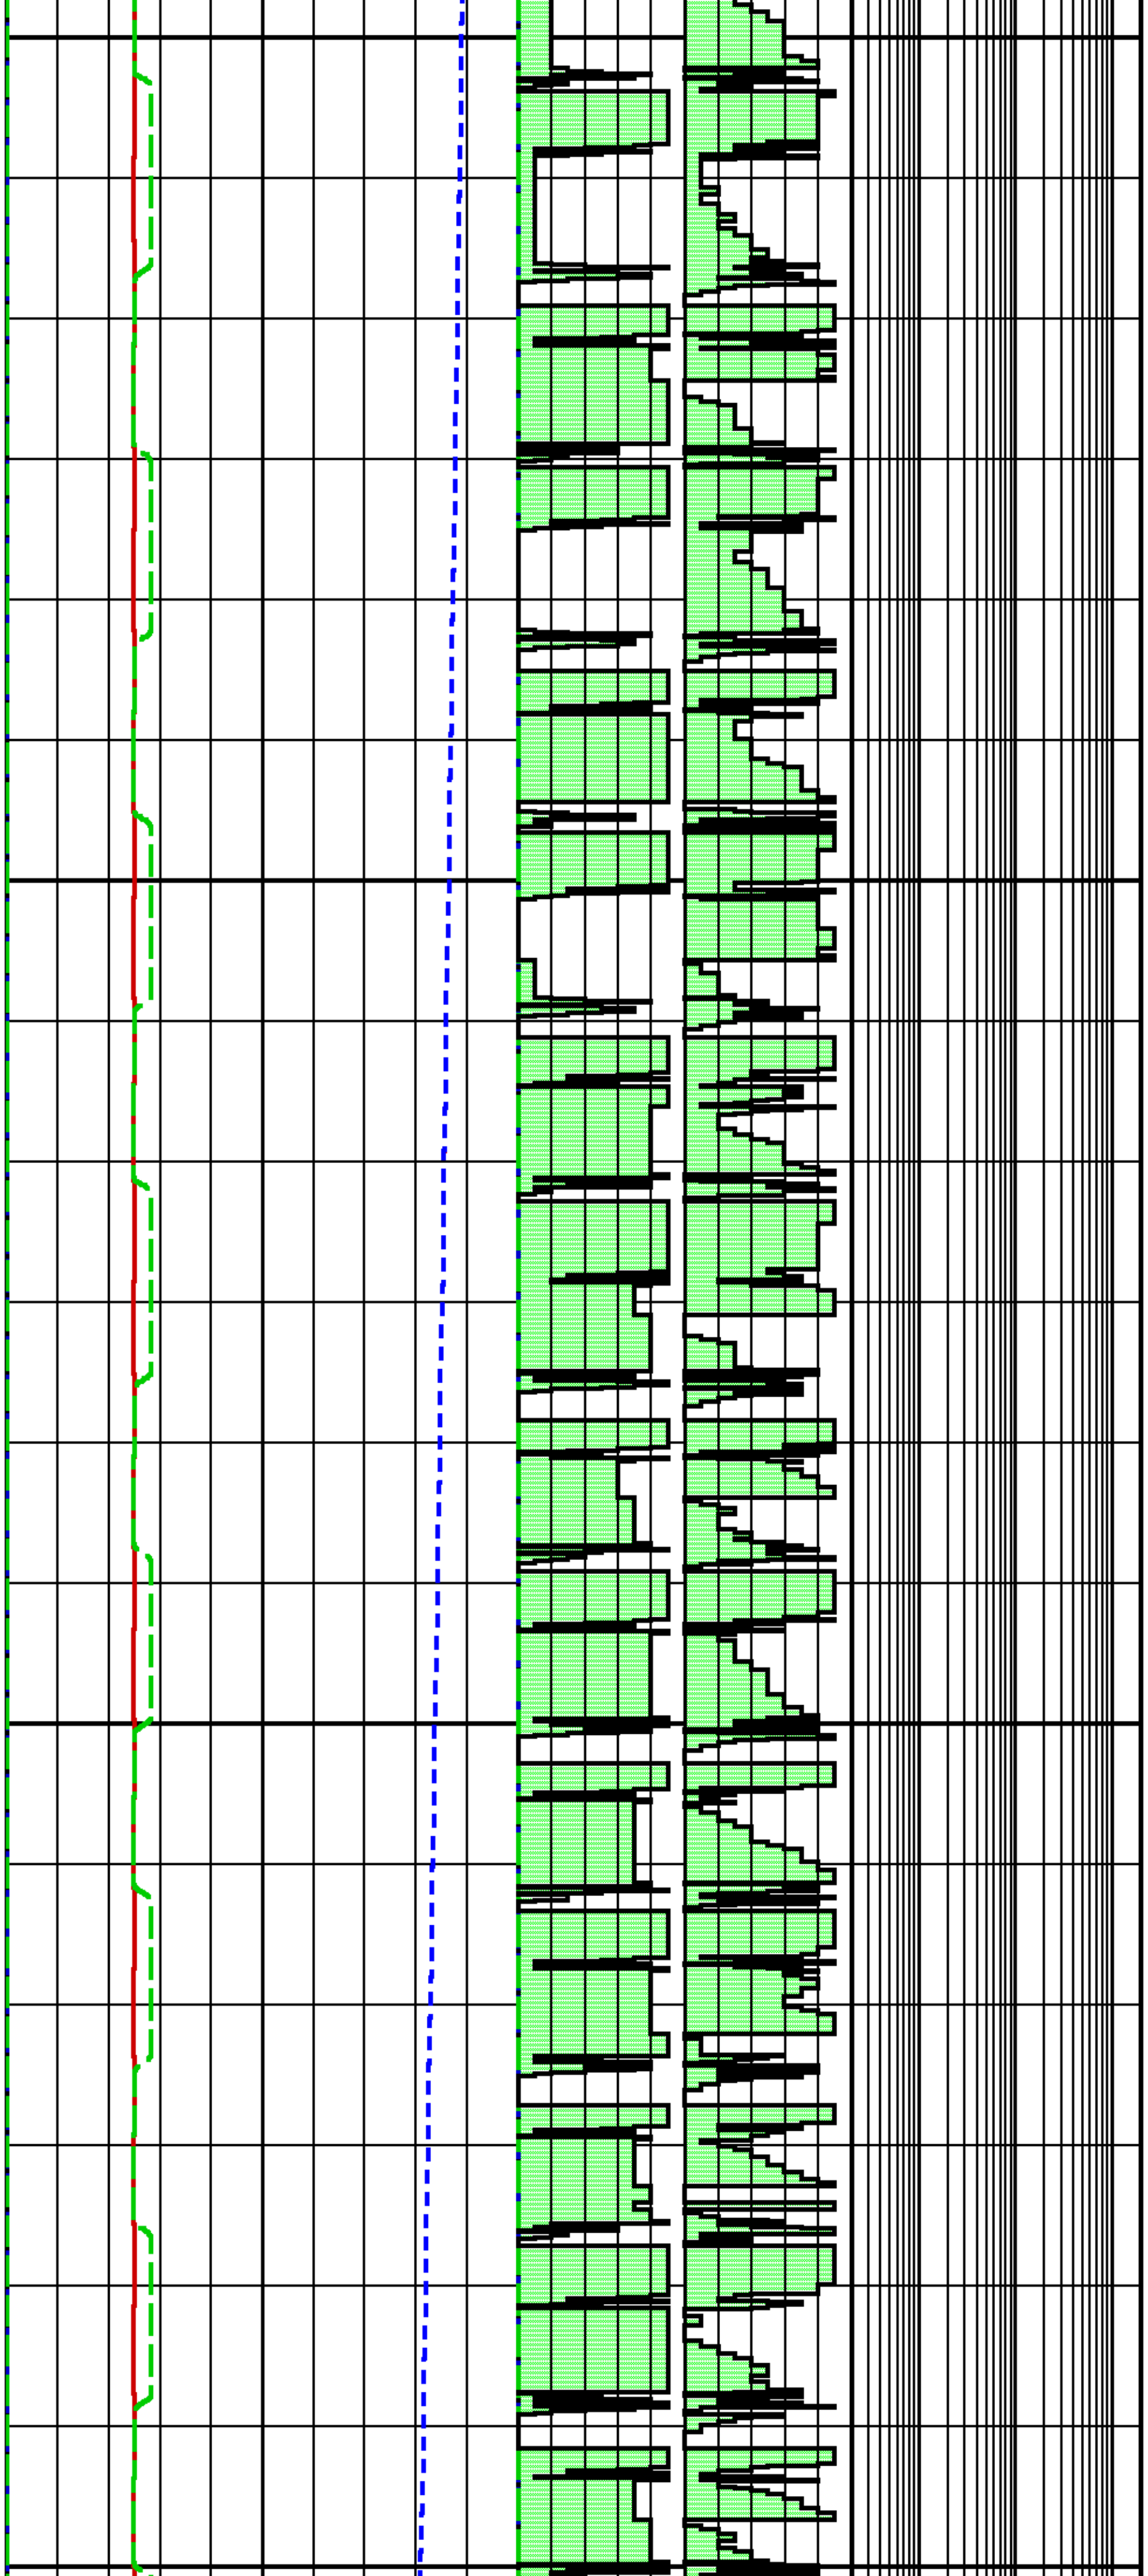

720	3742.6	200.9
	3759.9	200.9
730	3741.1	200.9
	3741.5	200.9
740	3759.9	200.9
	3739.1	200.9
750	3762.8	200.9
	3741.5	200.9
760	3740.6	200.9
	3760.0	200.9
770	3739.4	200.9
	3740.4	200.9
780	3759.9	200.9
	3740.9	200.9
790	3760.4	200.9
	3739.7	200.9
800	3738.7	200.9
	3759.9	200.9
810	3737.9	200.9
	3740.1	200.9
820	3759.9	200.9
	3737.3	200.9
830	3759.9	200.9
	3738.3	200.9
840	3752.6	200.9
	3751.4	200.9
850	3737.8	200.9
	3759.9	200.9
860	3738.7	200.9
	3761.3	200.9
870	3737.3	200.9
	3738.2	200.9
880	3759.9	200.9
	3739.3	200.9
890	3760.2	200.9
	3737.7	200.9
900	3743.9	200.9

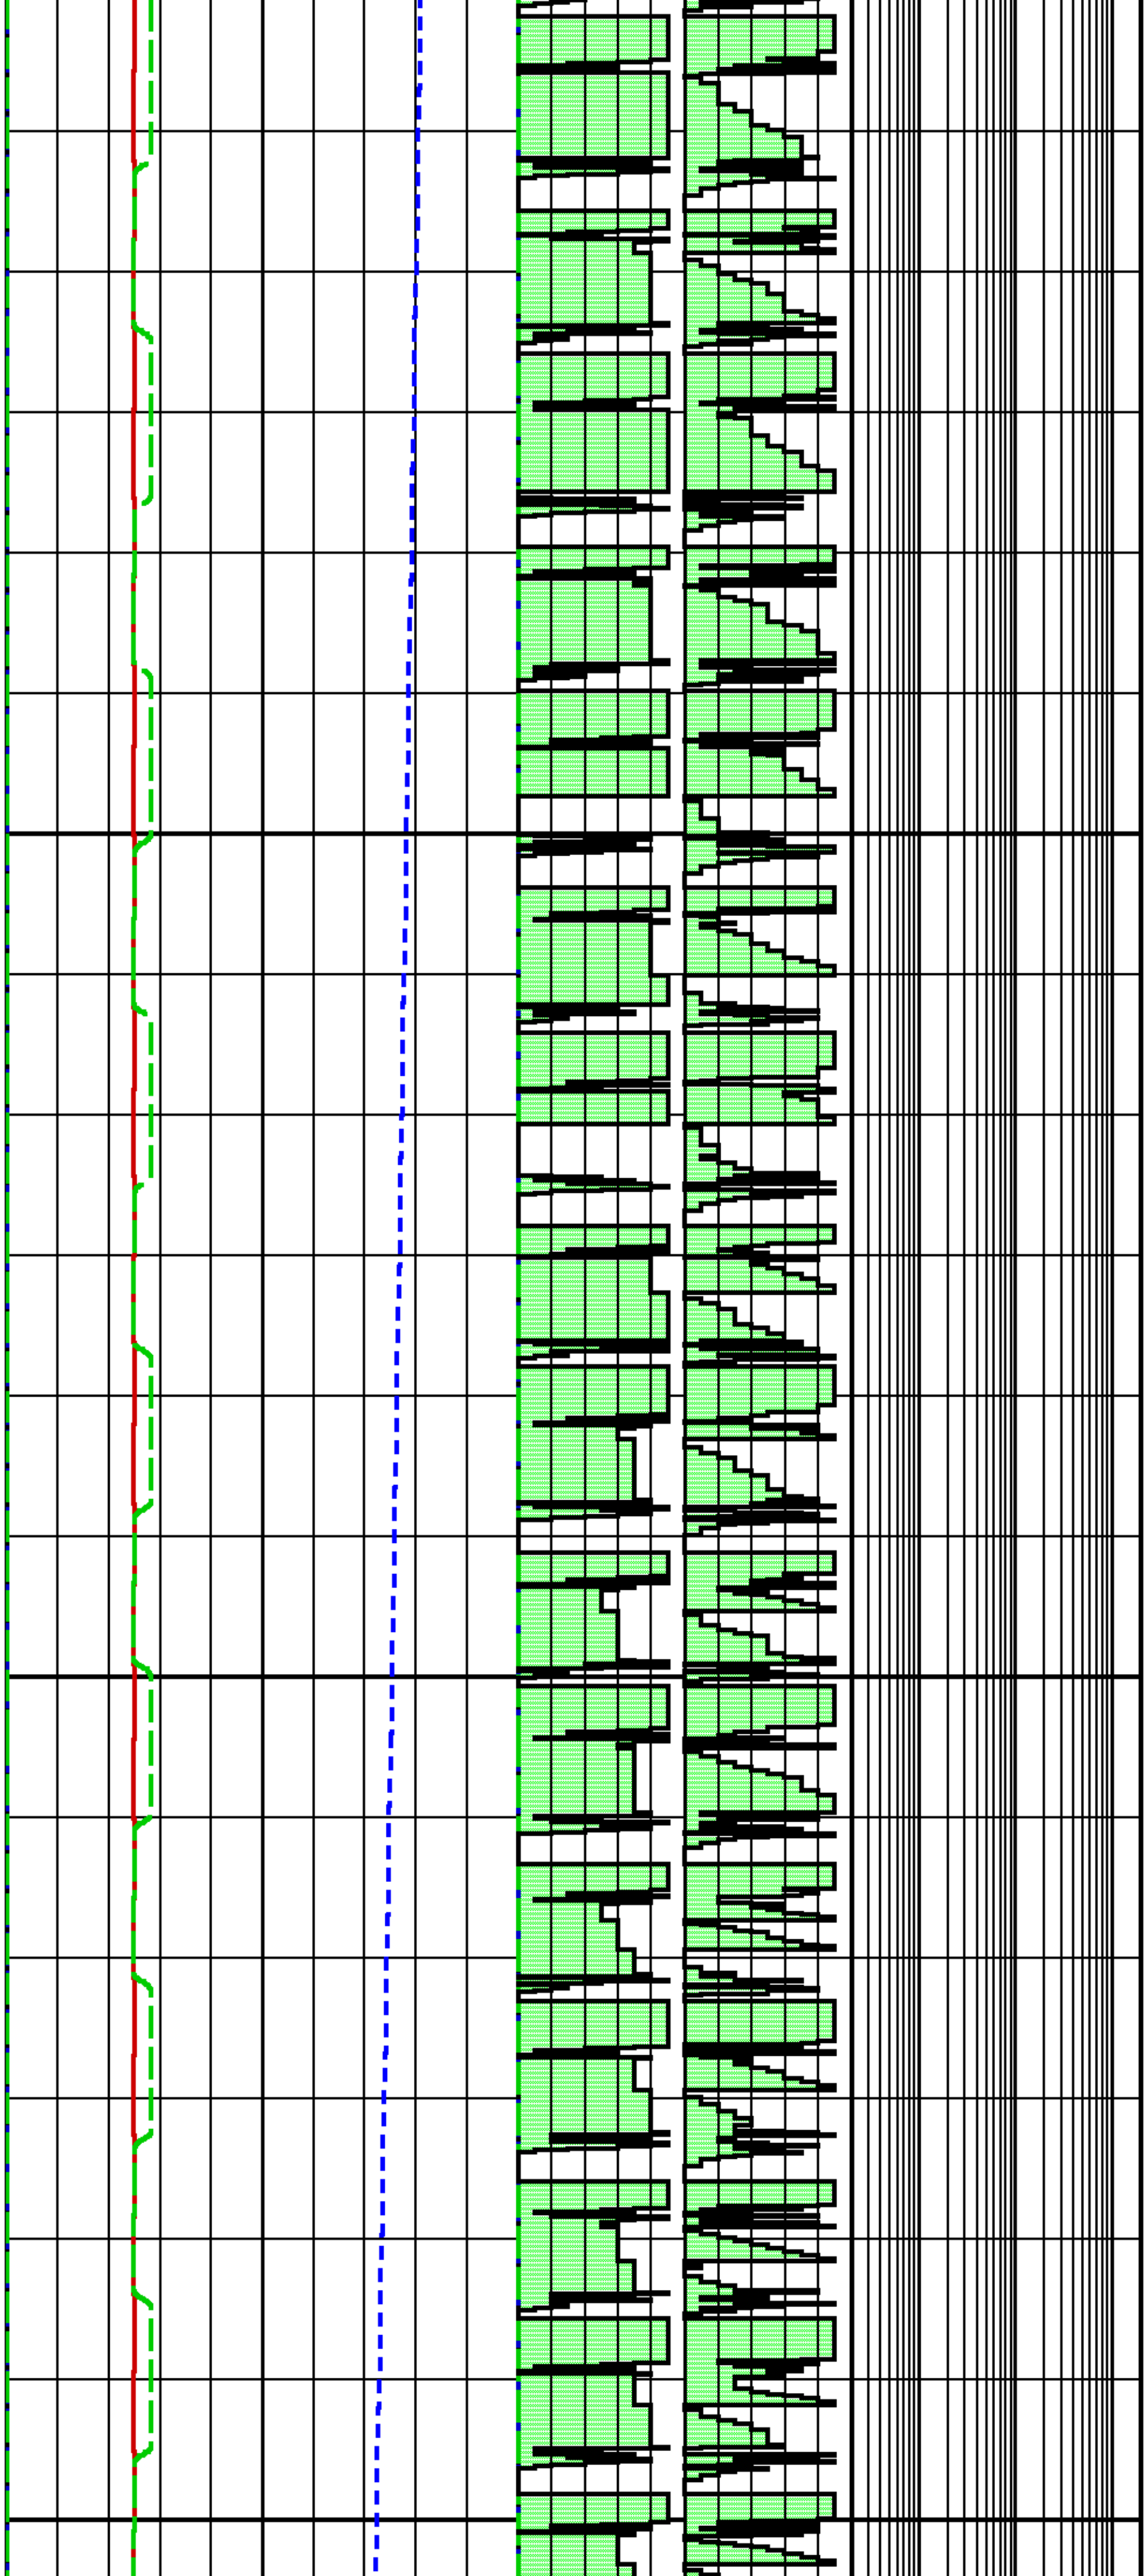

	3758.7	200.9
910	3739.6	200.9
	3760.0	200.9
920	3738.3	200.9
	3761.2	200.9
930	3739.4	200.9
	3740.0	200.9
940	3760.0	200.9
	3738.6	200.9
950	3760.0	200.9
	3739.7	200.9
960	3740.6	200.9
	3759.9	200.9
970	3739.0	200.9
	3759.9	200.9
980	3739.9	200.9
	3768.1	200.9
990	3742.3	200.9
	3739.4	200.9
1000	3759.9	200.9
	3737.4	200.9
1010	3760.1	200.9
	3735.9	201.0
1020	3761.5	201.0
	3737.0	201.0
1030	3741.2	201.0
	3759.9	201.0
1040	3737.0	201.0
	3759.9	201.0
1050	3738.1	201.0
	3760.1	201.0
1060	3736.3	201.0
	3761.2	201.0
1070	3737.3	201.0
	3741.0	201.0
1080	3759.9	201.0

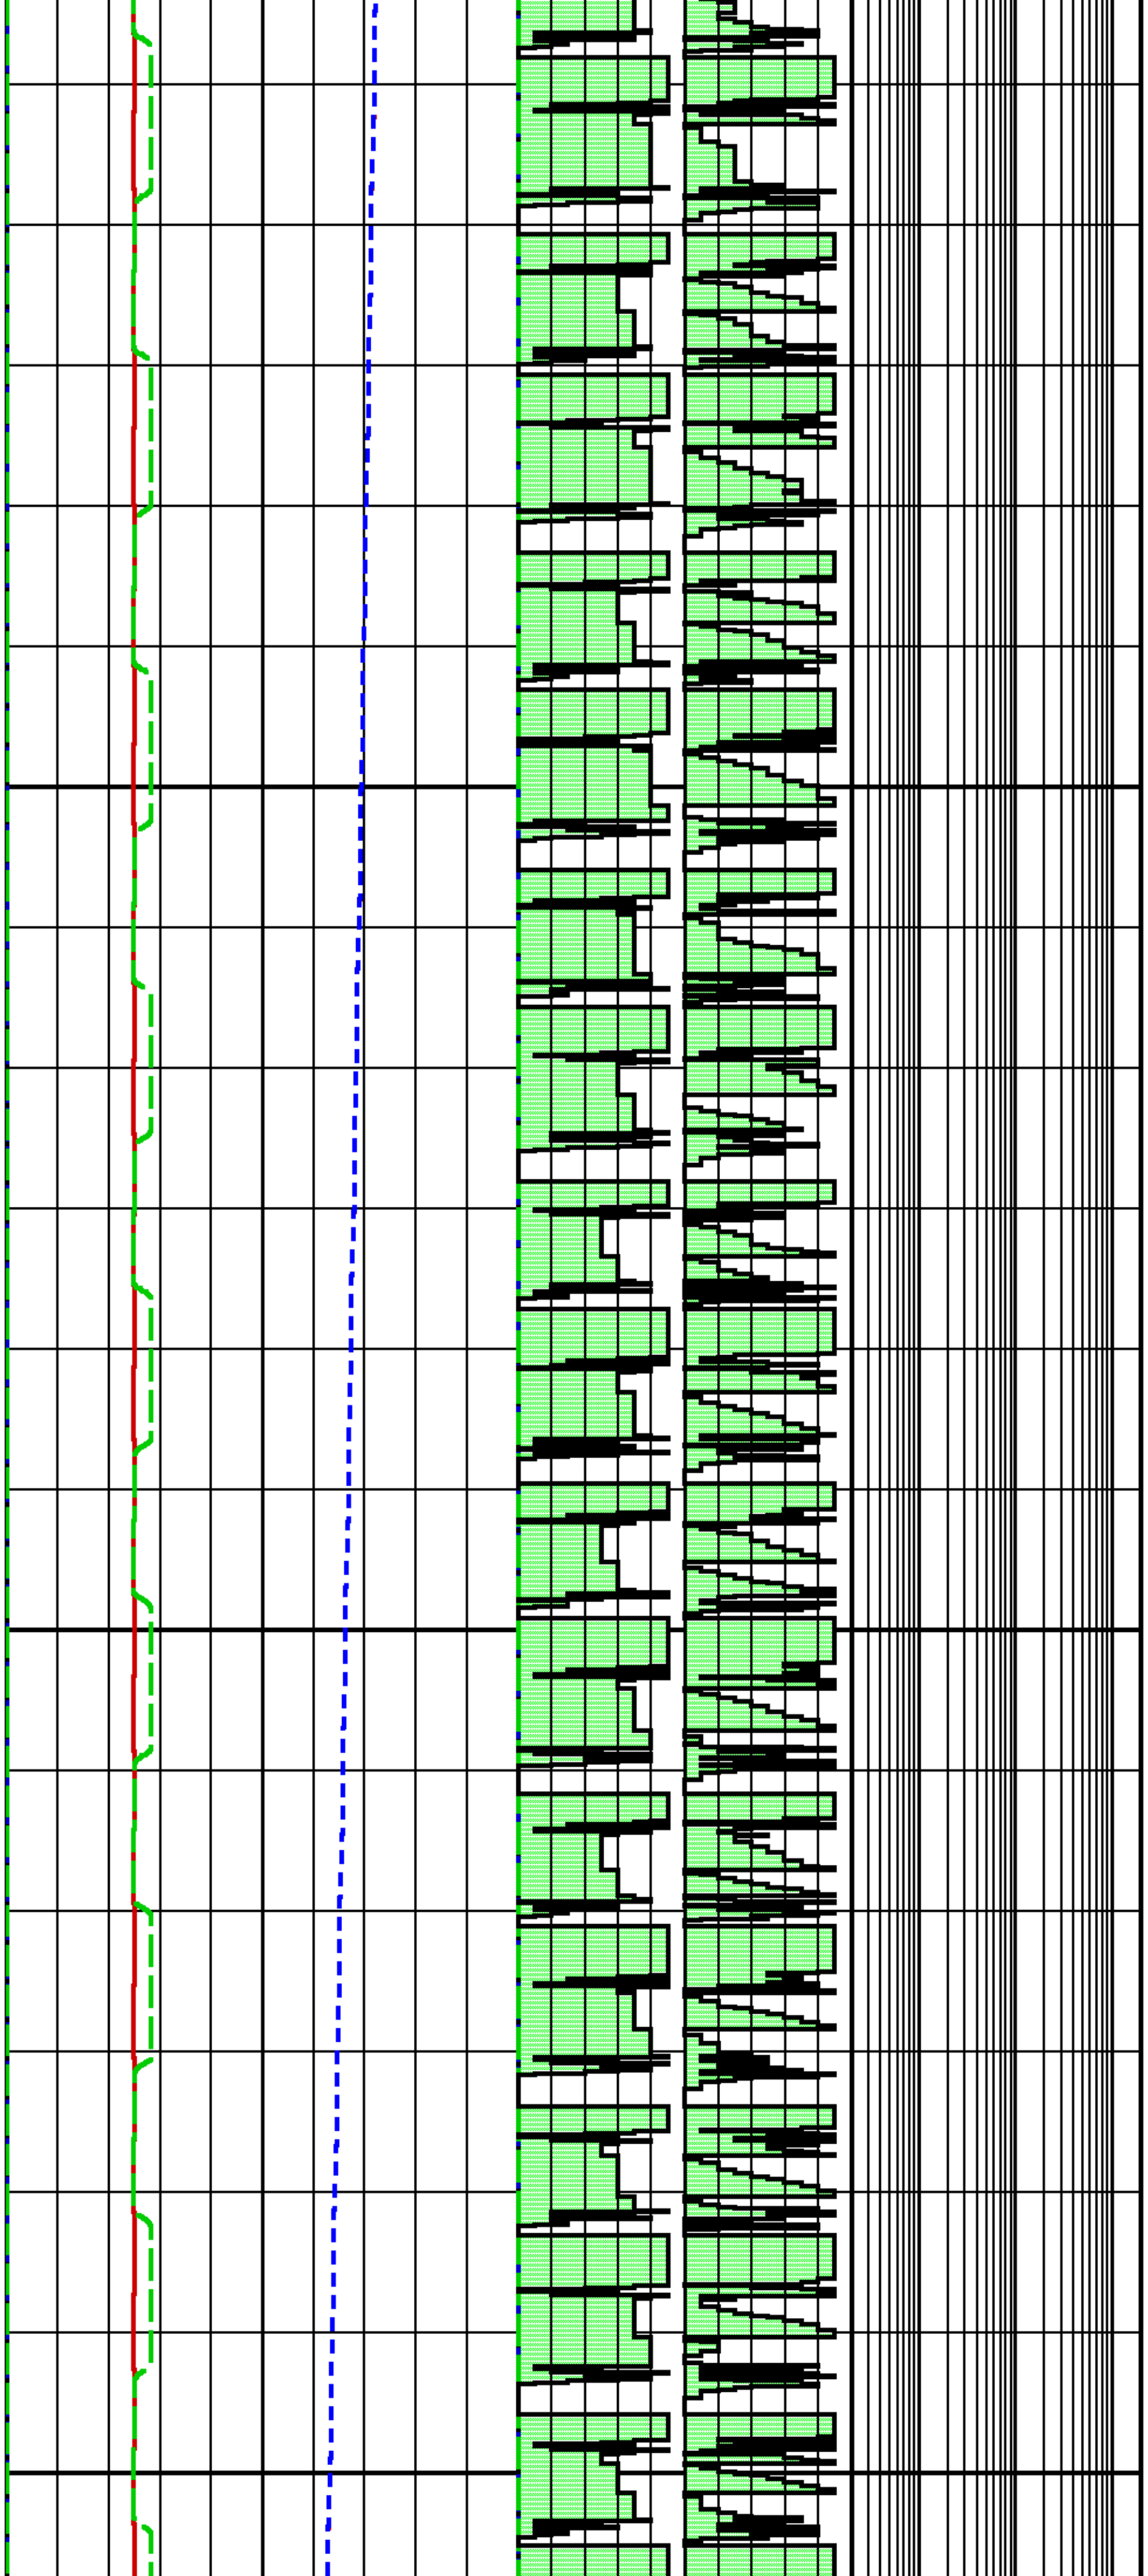

	3737.3	201.0
1090	3759.9	201.0
	3738.4	201.0
1100	3760.1	201.0
	3736.6	201.0
1110	3760.6	201.0
	3737.8	201.0
1120	3742.5	201.0
	3759.9	201.0
1130	3737.7	201.0
	3759.9	201.0
1140	3738.8	201.0
	3760.1	201.0
1150	3737.2	201.0
	3760.9	201.0
1160	3736.6	201.0
	3755.3	201.0
1170	3755.2	201.0
	3736.5	201.0
1180	3759.9	201.0
	3737.6	201.0
1190	3760.0	201.0
	3735.9	201.0
1200	3759.9	201.0
	3737.4	201.0
1210	3760.3	201.0
	3735.4	201.0
1220	3763.7	201.0
	3749.7	201.0
1230	3738.3	201.0
	3760.0	201.0
1240	3736.9	201.0
	3759.9	201.0
1250	3737.9	201.0
	3760.1	201.0
1260	3736.4	201.0
	3760.0	201.0

1270	3737.5	201.0
	3766.8	201.0
1280	3748.1	201.0
	3737.5	201.0
1290	3759.9	201.0
	3738.5	201.0
1300	3760.0	201.0
	3734.4	201.0
1310	3759.9	201.0
	3735.8	201.0
1320	3760.0	201.0
	3734.6	201.0
1330	3760.0	201.0
	3736.1	201.0
1340	3760.4	201.0
	3734.7	201.0
1350	3761.0	201.0
	3736.9	201.0
1360	3765.6	201.0
	3747.8	201.0
1370	3748.7	201.0
	3758.3	201.0
1380	3737.5	201.0
	3759.9	201.0
1390	3735.6	201.0
	3759.9	201.0
1400	3736.6	201.0
	3760.0	201.0
1410	3735.4	201.0
	3759.9	201.0
1420	3736.7	201.0
	3760.0	201.0
1430	3735.6	201.0
	3759.9	201.0
1440	3737.1	201.0
	3760.3	201.0
1450	3735.9	201.0

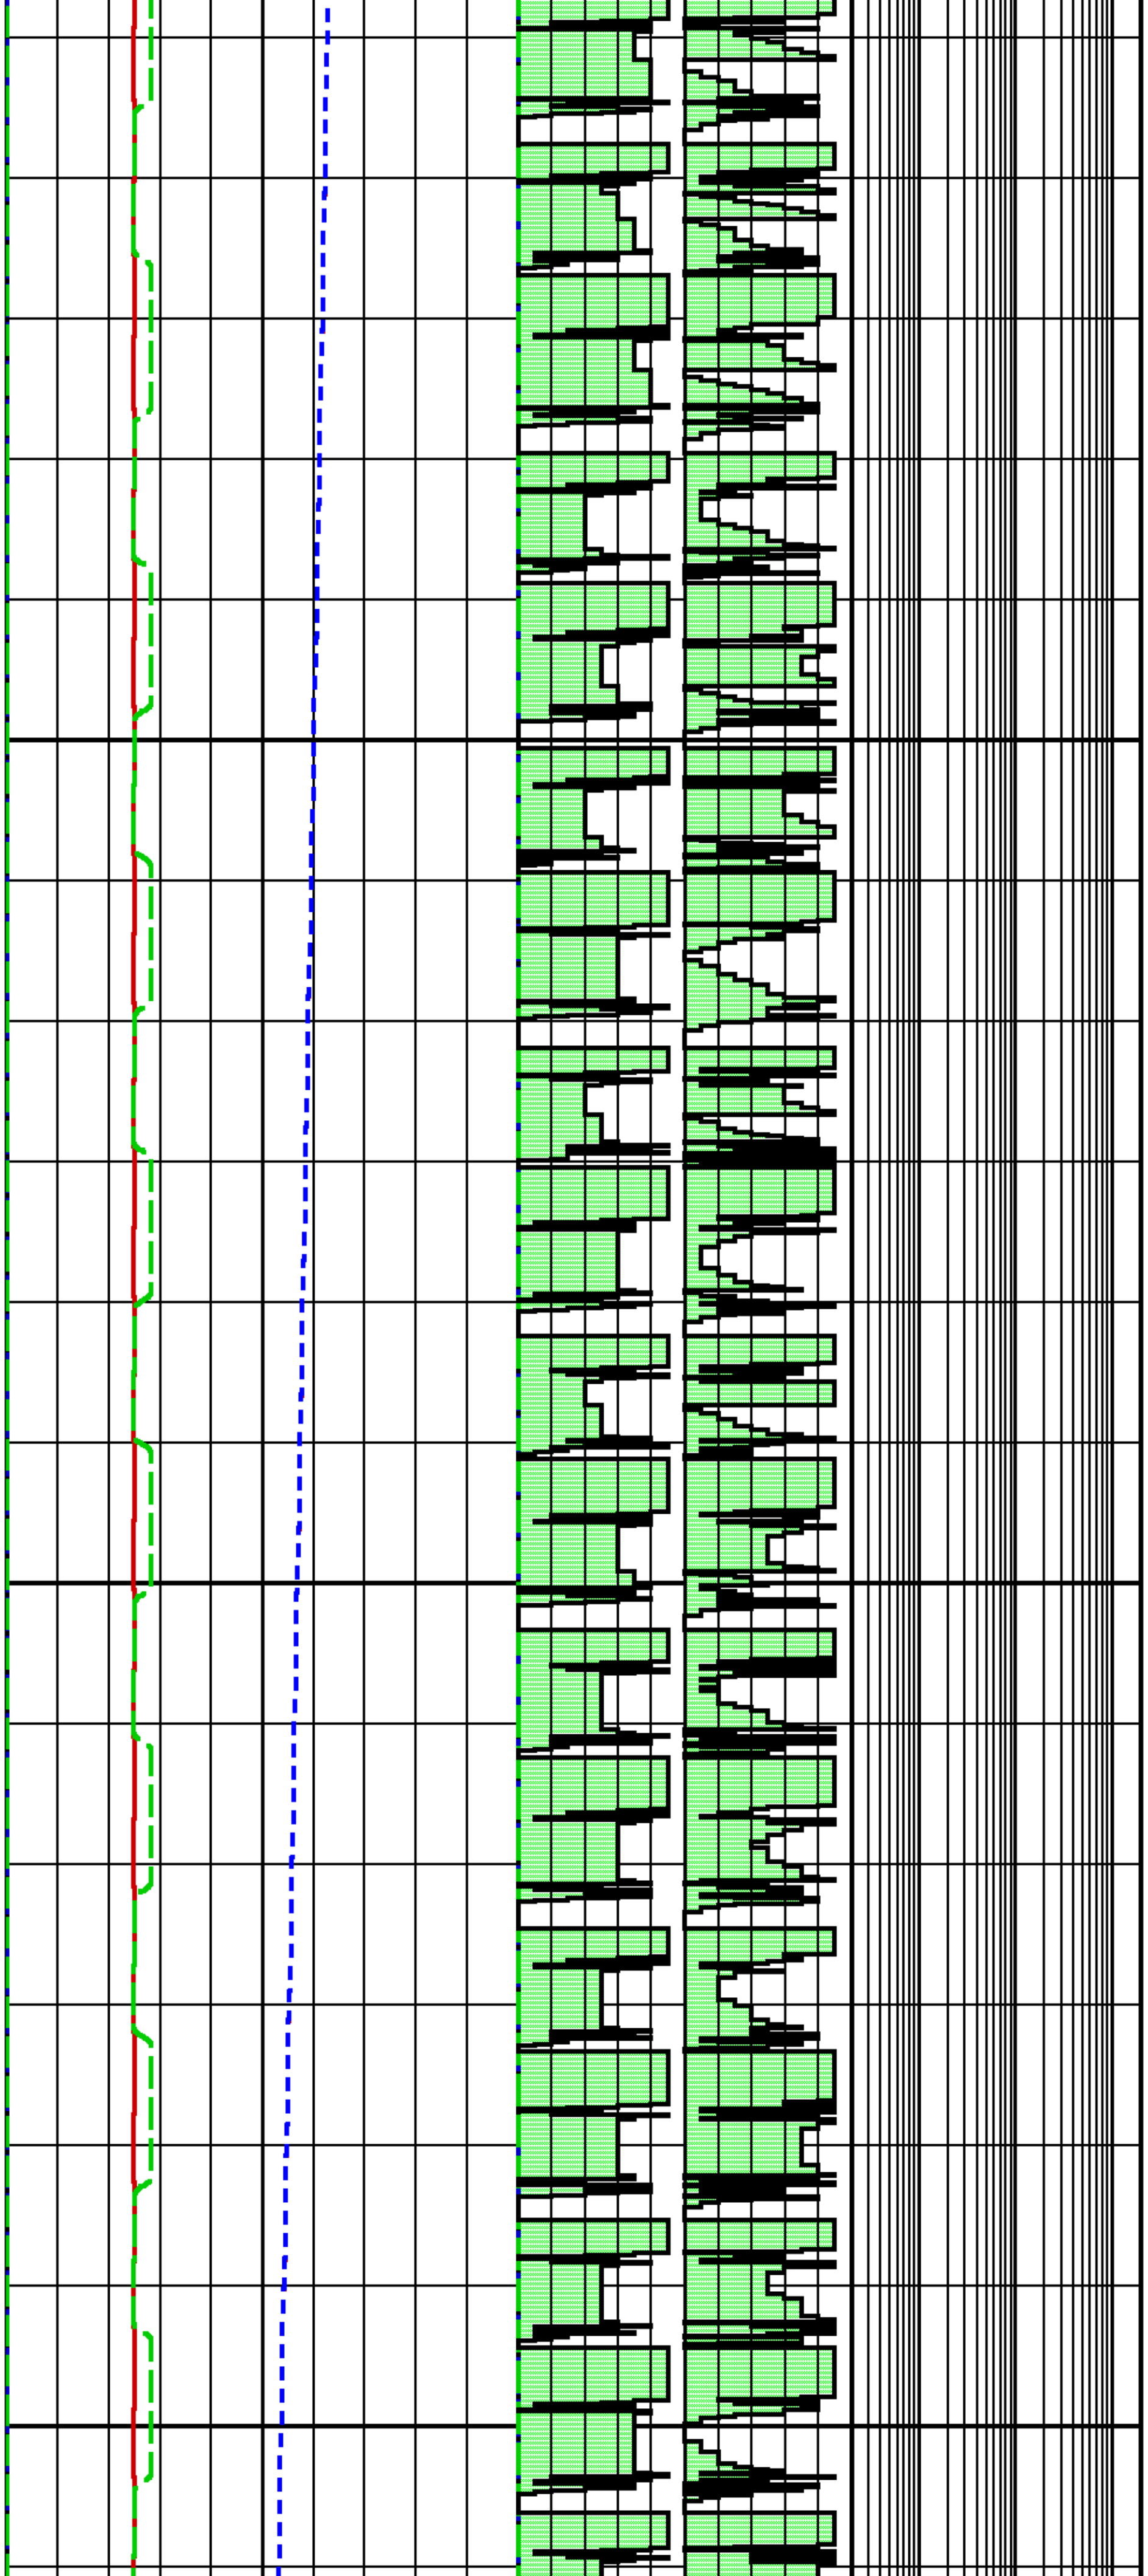

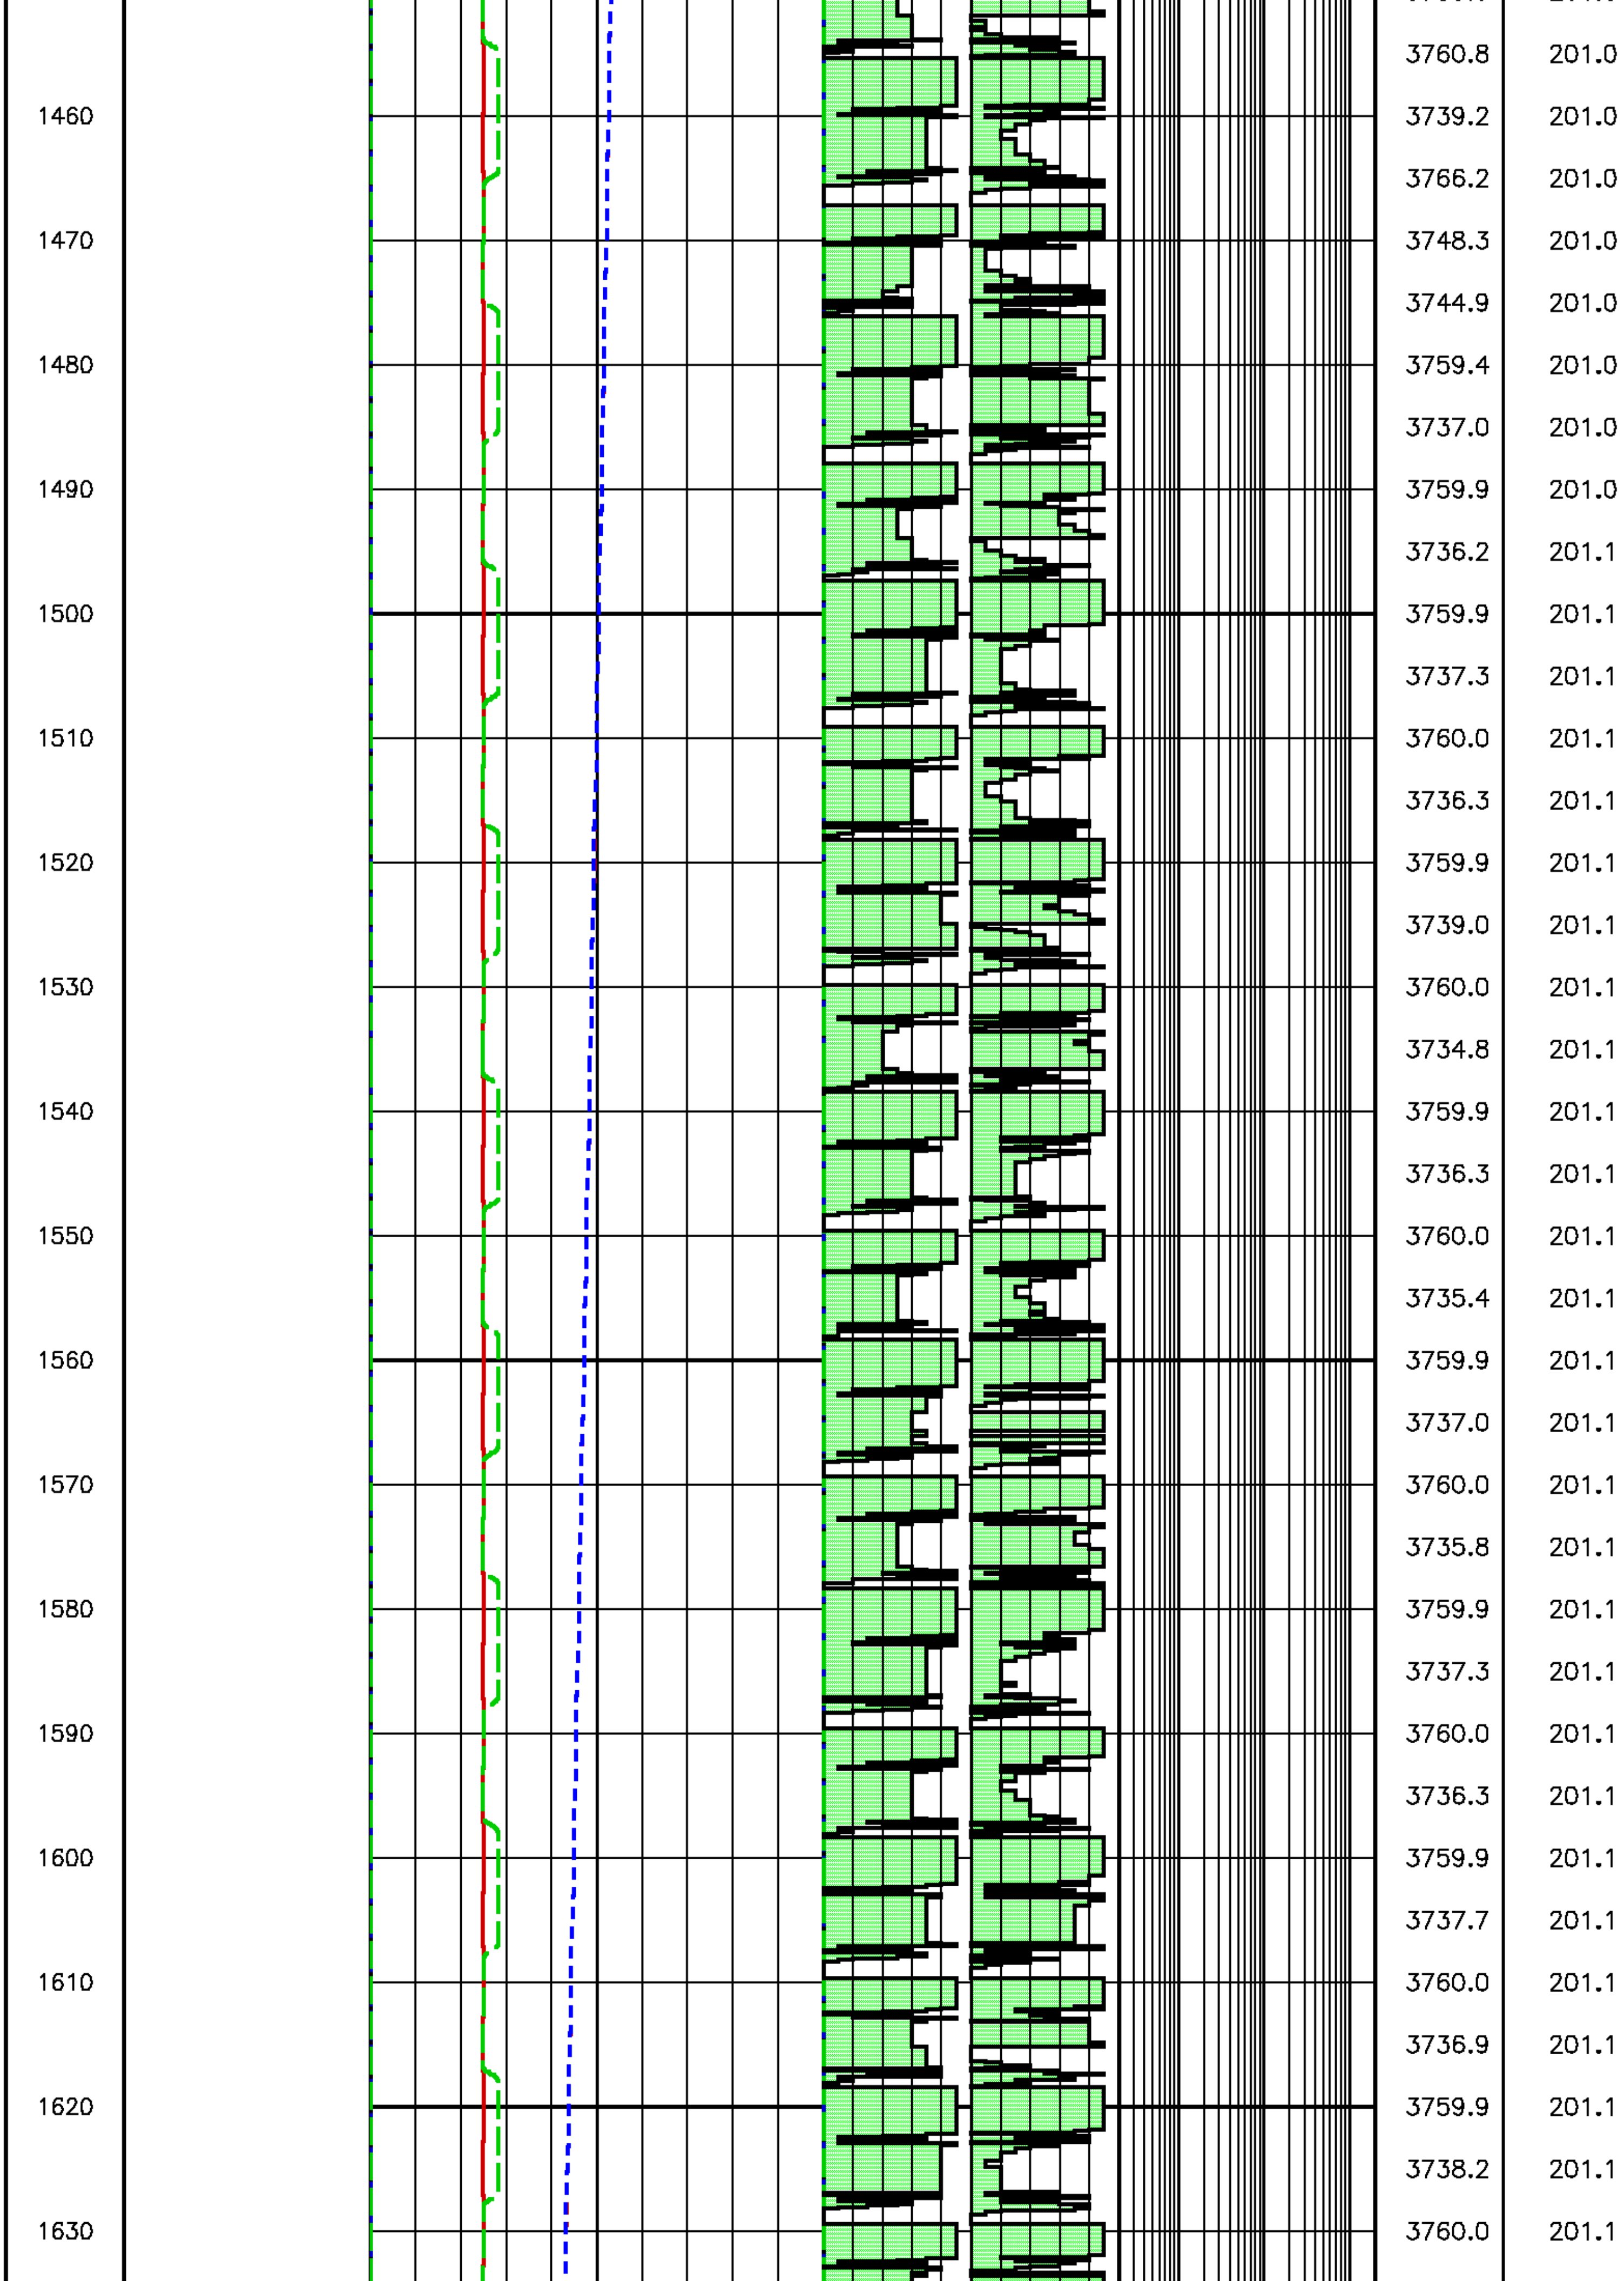

1460
1470
1480
1490
1500
1510
1520
1530
1540
1550
1560
1570
1580
1590
1600
1610
1620
1630
3760.8 201.0
3739.2 201.0
3766.2 201.0
3748.3 201.0
3744.9 201.0
3759.4 201.0
3737.0 201.0
3759.9 201.0
3736.2 201.1
3759.9 201.1
3737.3 201.1
3760.0 201.1
3736.3 201.1
3759.9 201.1
3739.0 201.1
3760.0 201.1
3734.8 201.1
3759.9 201.1
3736.3 201.1
3760.0 201.1
3735.4 201.1
3759.9 201.1
3737.0 201.1
3760.0 201.1
3735.8 201.1
3759.9 201.1
3737.3 201.1
3760.0 201.1
3736.3 201.1
3759.9 201.1
3737.7 201.1
3760.0 201.1
3736.9 201.1
3759.9 201.1
3738.2 201.1
3760.0 201.1

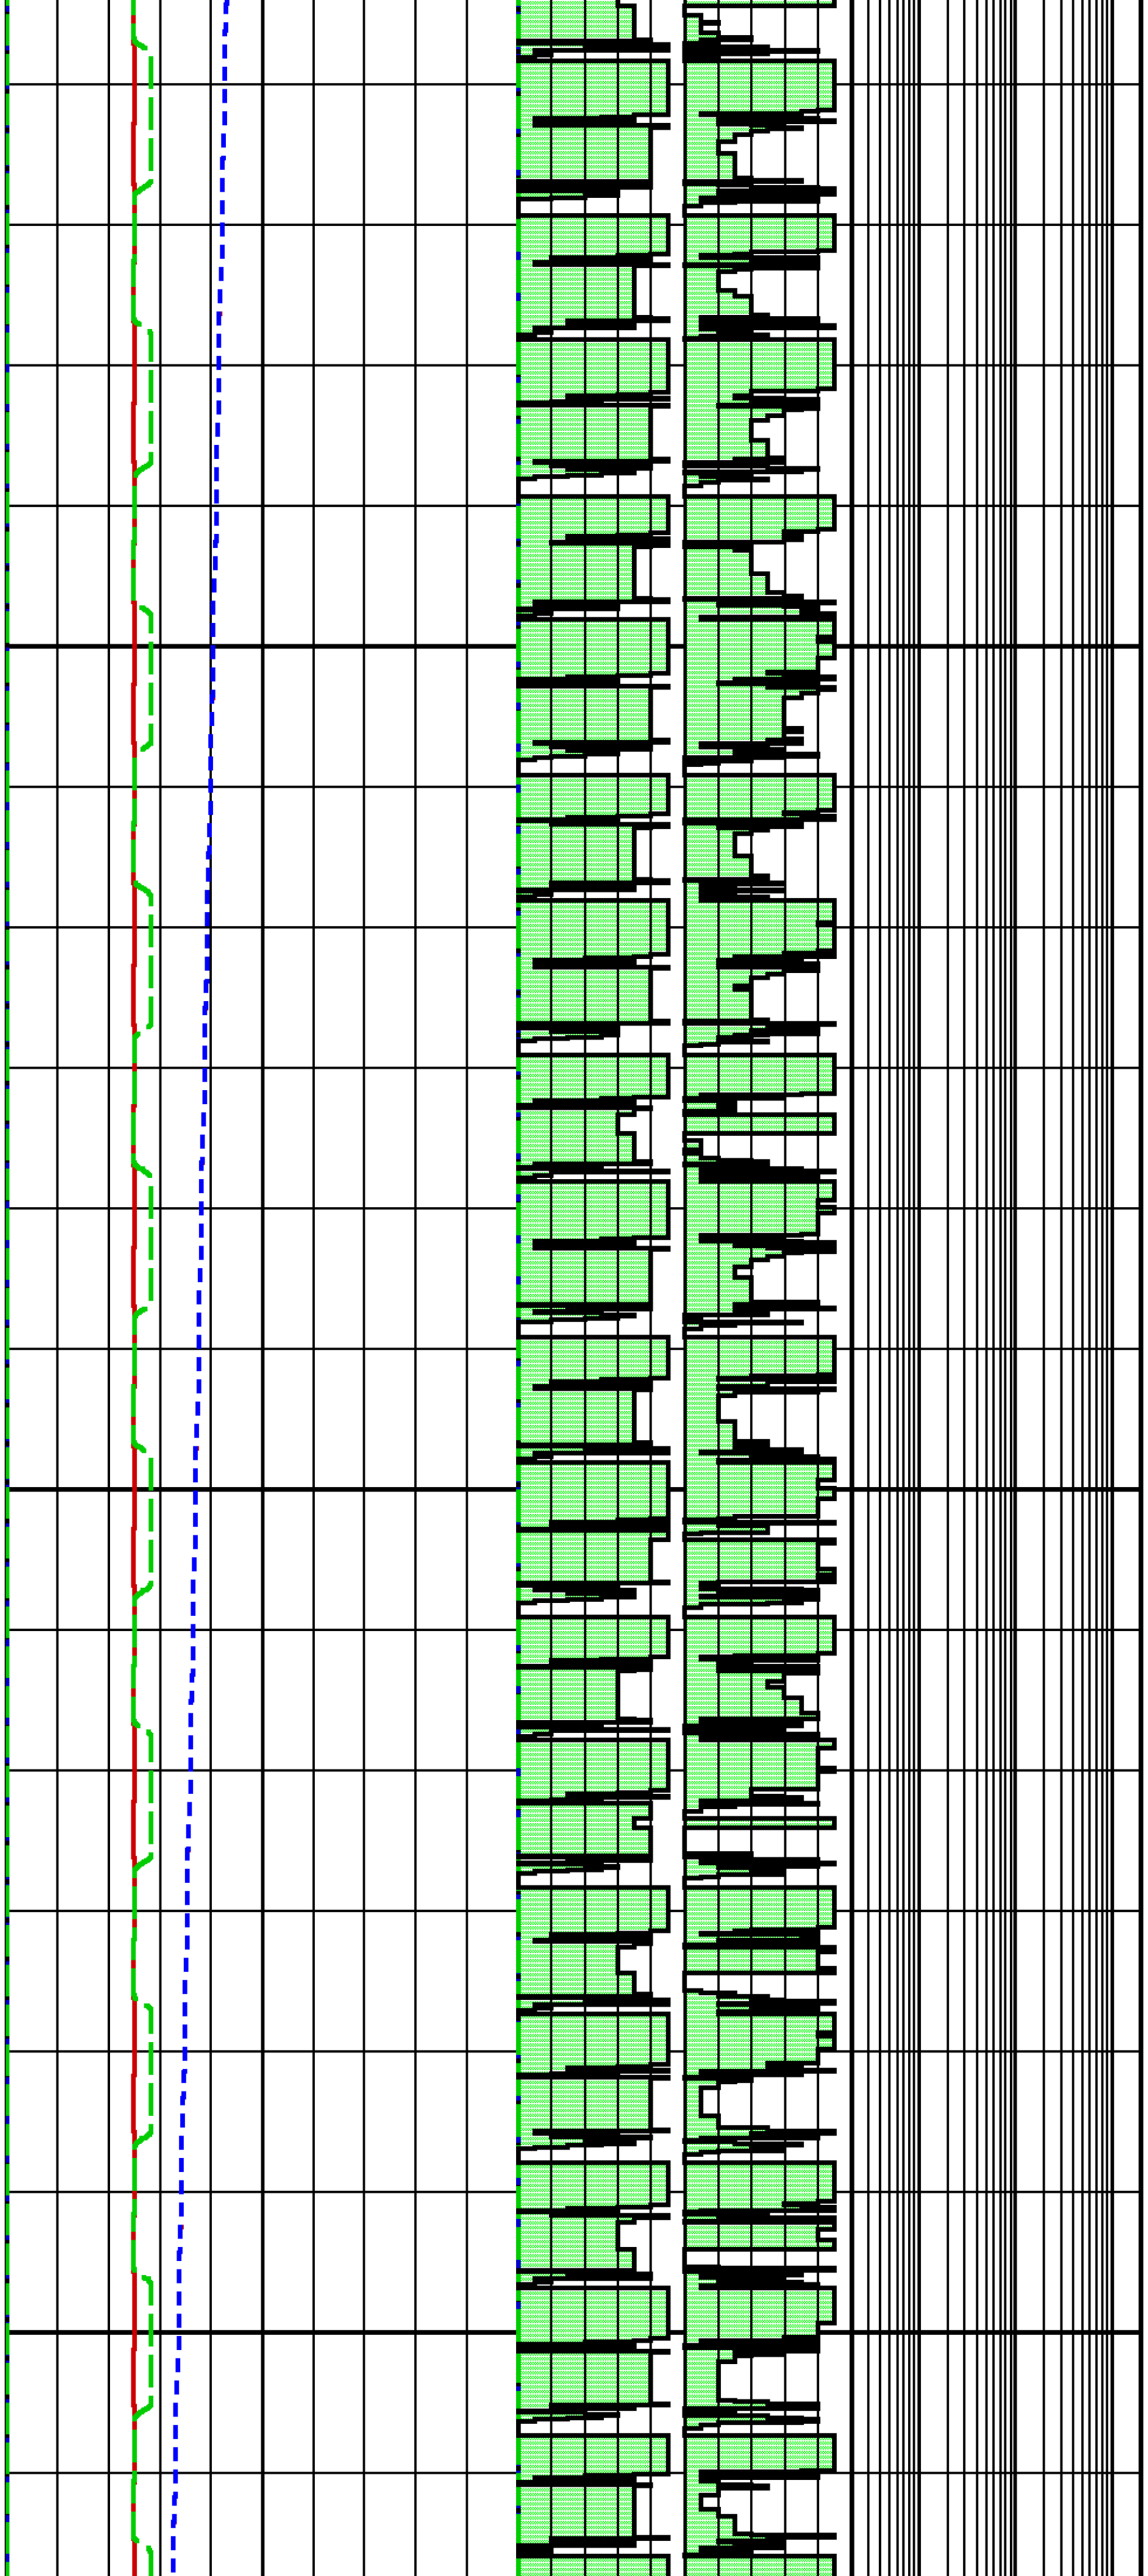

	3737.1	201.1
1640	3759.9	201.1
	3738.3	201.1
1650	3760.0	201.1
	3737.4	201.1
1660	3759.9	201.1
	3738.5	201.1
1670	3760.0	201.1
	3737.5	201.1
1680	3759.9	201.1
	3738.6	201.1
1690	3760.0	201.1
	3737.4	201.1
1700	3759.9	201.1
	3738.4	201.1
1710	3760.0	201.1
	3737.1	201.1
1720	3759.9	201.1
	3738.4	201.1
1730	3760.0	201.1
	3737.3	201.1
1740	3759.9	201.1
	3738.9	201.1
1750	3759.9	201.1
	3736.8	201.1
1760	3759.9	201.1
	3738.1	201.1
1770	3759.9	201.1
	3737.0	201.1
1780	3759.9	201.1
	3738.2	201.1
1790	3759.9	201.1
	3737.0	201.1
1800	3759.9	201.1
	3738.6	201.1
1810	3759.1	201.1
	3752.5	201.1

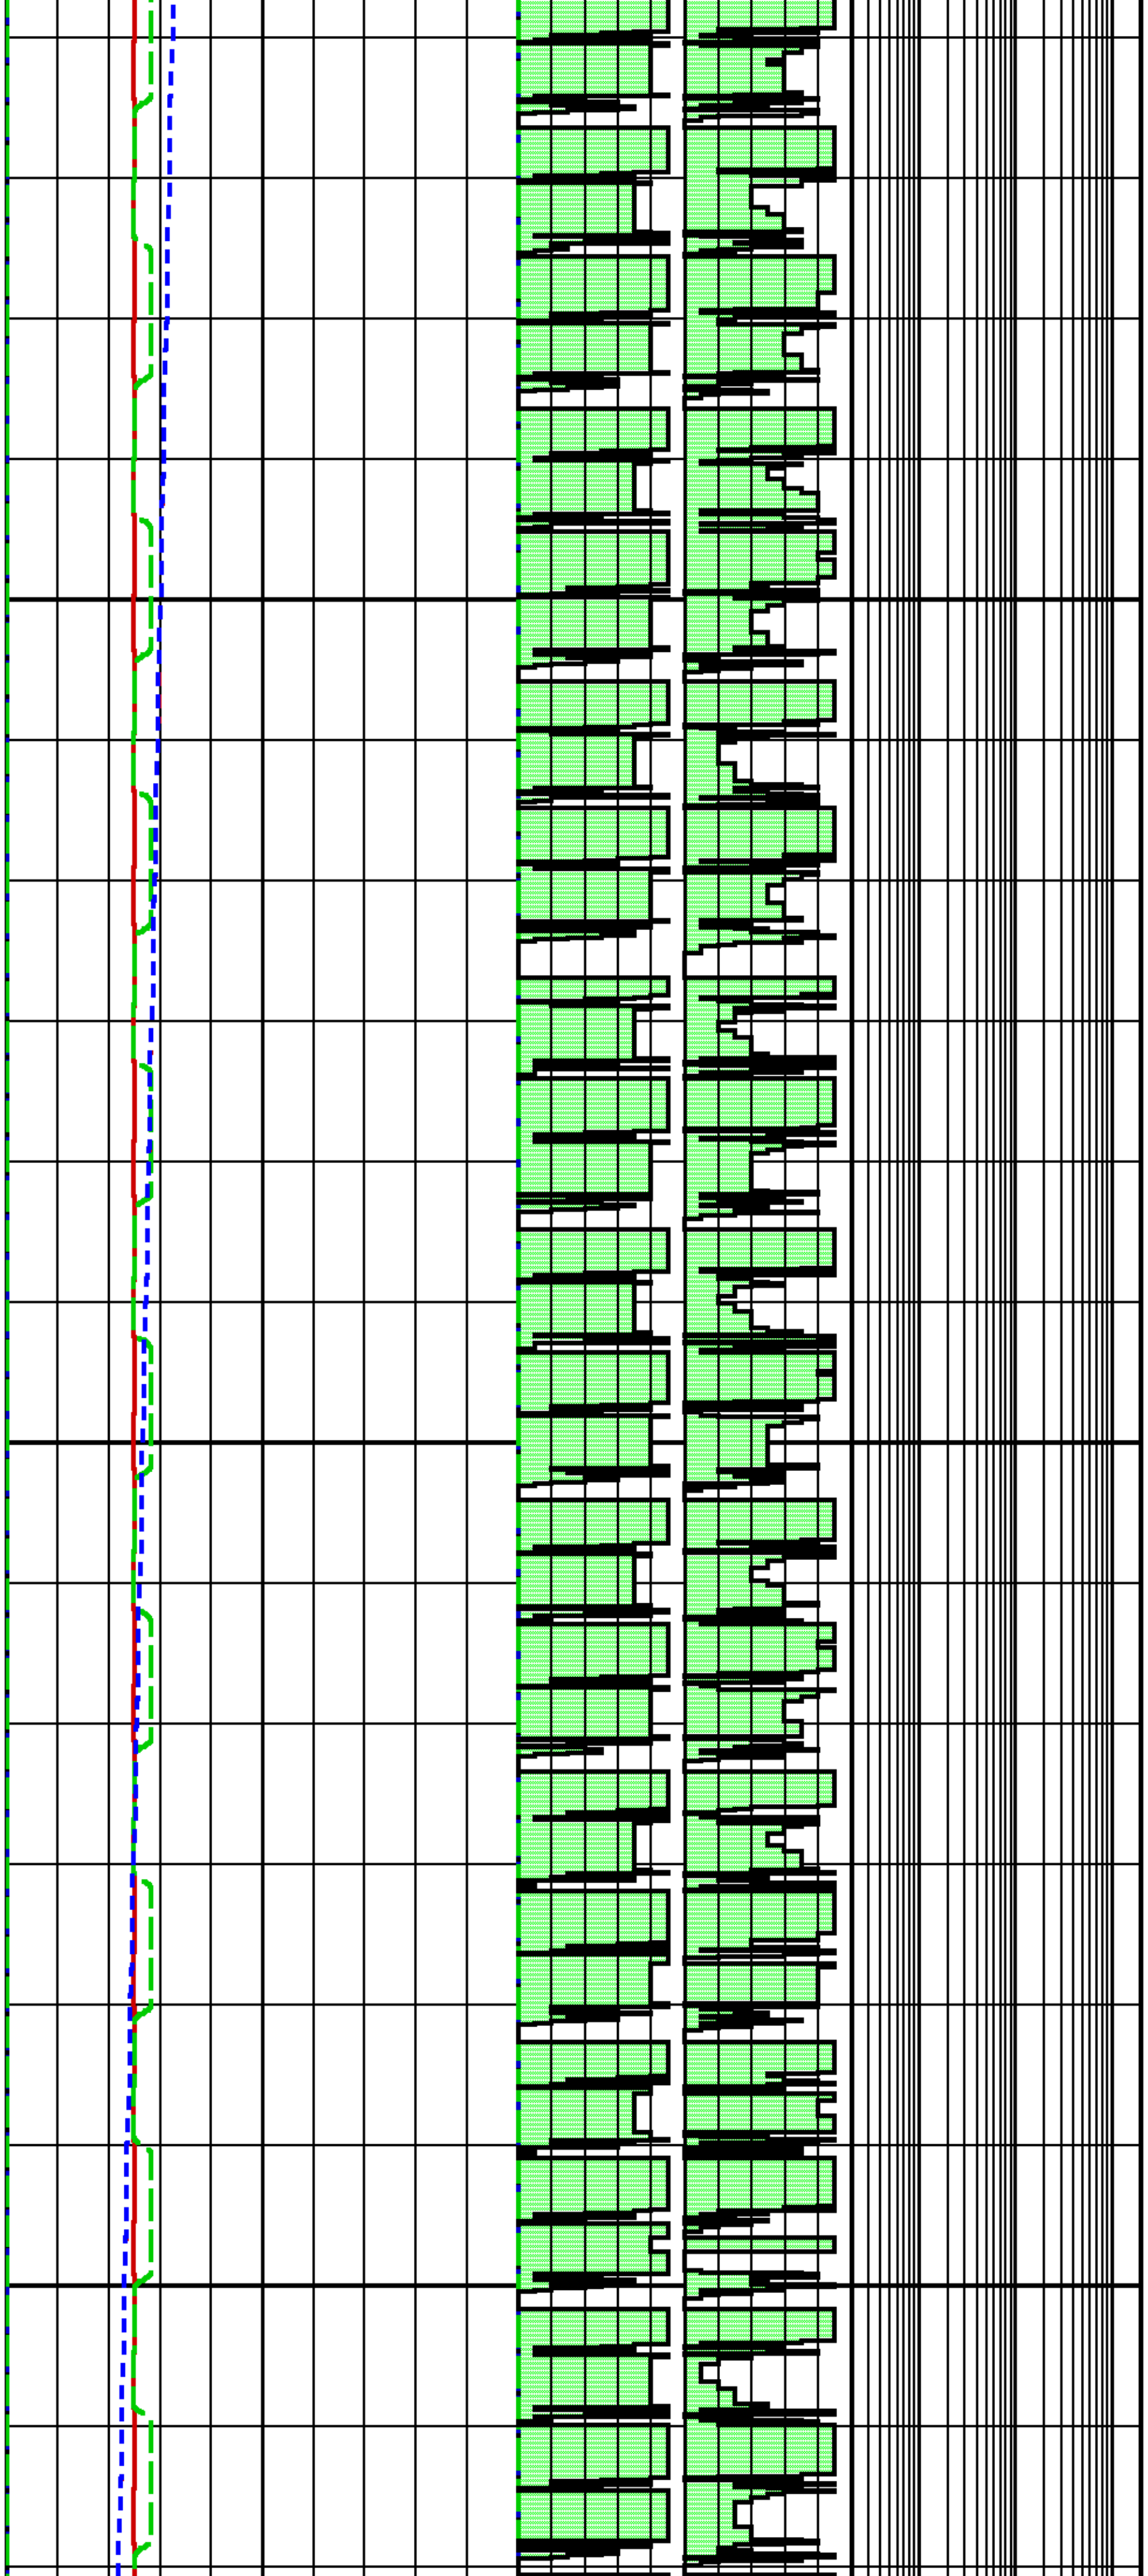

1820	3748.3	201.1
	3767.2	201.1
1830	3747.9	201.1
	3763.4	201.1
1840	3745.3	201.1
	3763.1	201.1
1850	3741.5	201.1
	3760.8	201.1
1860	3738.8	201.1
	3760.2	201.1
1870	3737.4	201.1
	3760.0	201.1
1880	3738.7	201.1
	3760.1	201.1
1890	3737.3	201.1
	3759.9	201.1
1900	3738.4	201.1
	3760.0	201.1
1910	3737.3	201.1
	3759.9	201.1
1920	3738.5	201.1
	3760.0	201.1
1930	3737.5	201.1
	3759.9	201.1
1940	3738.7	201.1
	3759.9	201.1
1950	3737.7	201.1
	3759.9	201.1
1960	3739.0	201.1
	3759.6	201.1
1970	3752.1	201.1
	3751.1	201.1
1980	3765.9	201.1
	3739.3	201.1
1990	3760.0	201.1
	3739.5	201.1
2000	3760.1	201.1

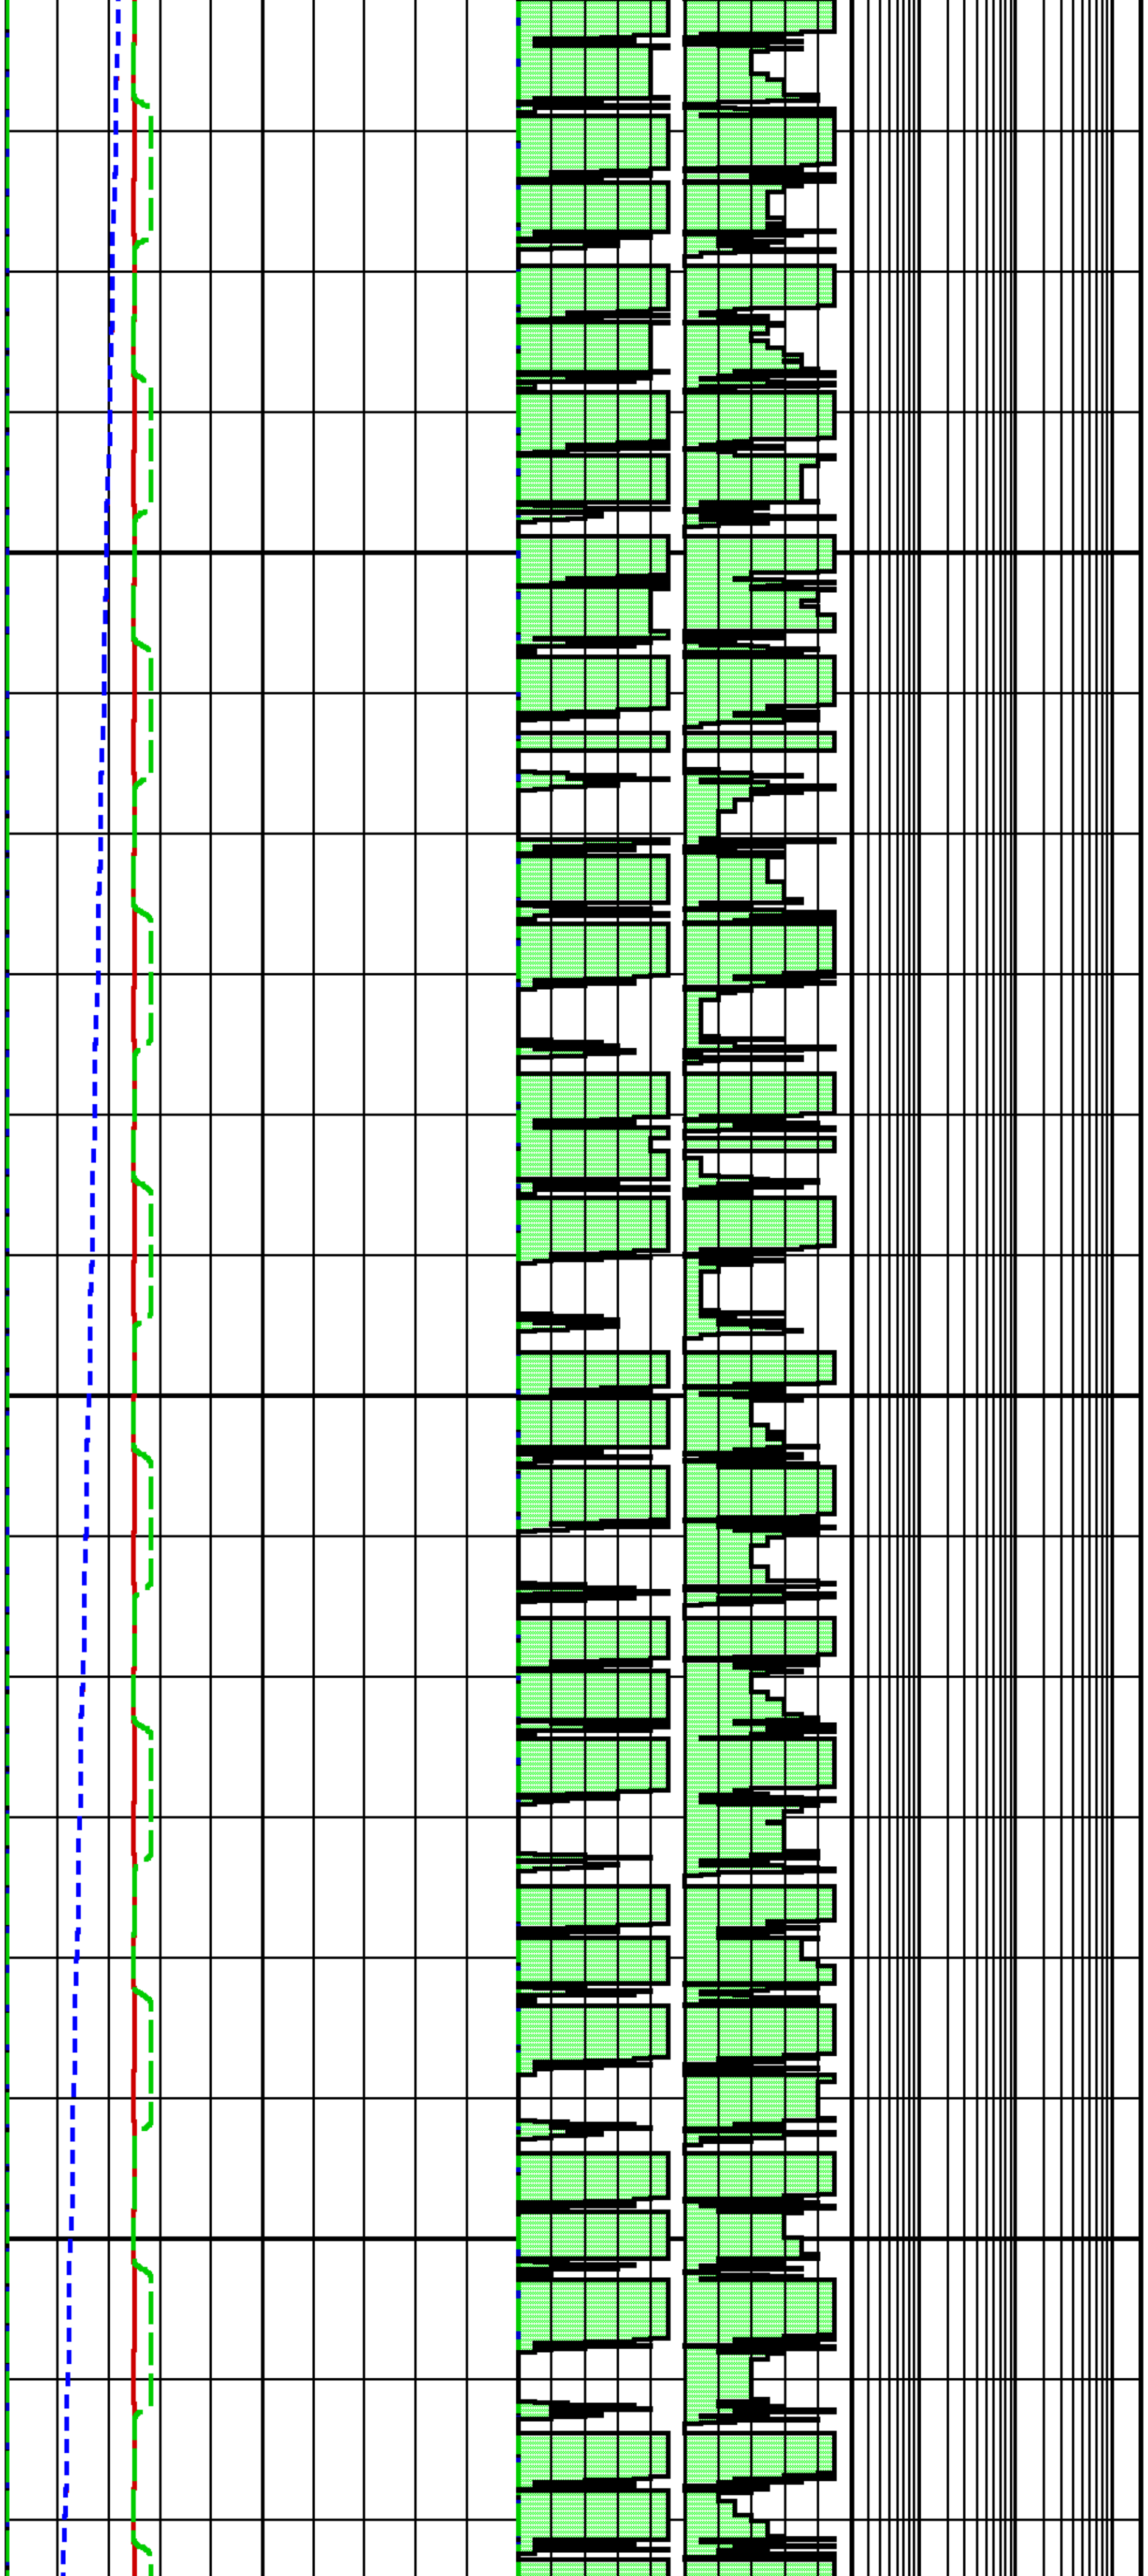

	3738.4	201.1
2010	3759.9	201.1
	3739.5	201.1
2020	3760.0	201.1
	3738.5	201.1
2030	3759.9	201.1
	3739.7	201.1
2040	3760.0	201.1
	3739.0	201.1
2050	3759.9	201.1
	3740.1	201.1
2060	3760.2	201.1
	3740.2	201.1
2070	3759.7	201.1
	3750.3	201.1
2080	3759.7	201.1
	3751.2	201.1
2090	3752.0	201.2
	3766.5	201.2
2100	3742.3	201.2
	3760.2	201.2
2110	3740.6	201.2
	3760.1	201.2
2120	3739.5	201.2
	3759.9	201.2
2130	3740.6	201.2
	3760.0	201.2
2140	3739.8	201.2
	3759.9	201.2
2150	3740.8	201.2
	3760.0	201.2
2160	3739.7	201.2
	3759.9	201.2
2170	3740.4	201.2
	3760.0	201.2
2180	3739.5	201.2

	3759.9	201.2
2190	3740.5	201.2
	3759.9	201.2
2200	3739.5	201.2
	3759.9	201.2
2210	3741.1	201.2
	3759.9	201.2
2220	3743.9	201.2
	3759.8	201.2
2230	3748.1	201.2
	3759.9	201.2
2240	3749.1	201.2
	3754.1	201.2
2250	3766.2	201.2
	3741.7	201.2
2260	3760.1	201.2
	3741.1	201.2
2270	3760.1	201.2
	3740.0	201.2
2280	3759.9	201.2
	3741.2	201.2
2290	3760.0	201.2
	3740.3	201.2
2300	3759.9	201.2
	3741.5	201.2
2310	3760.0	201.2
	3740.8	201.2
2320	3759.9	201.2
	3742.1	201.2
2330	3759.9	201.2
	3741.2	201.2
2340	3759.9	201.2
	3742.3	201.2
2350	3760.0	201.2
	3742.6	201.2
2360	3759.9	201.2
	3740.4	201.2

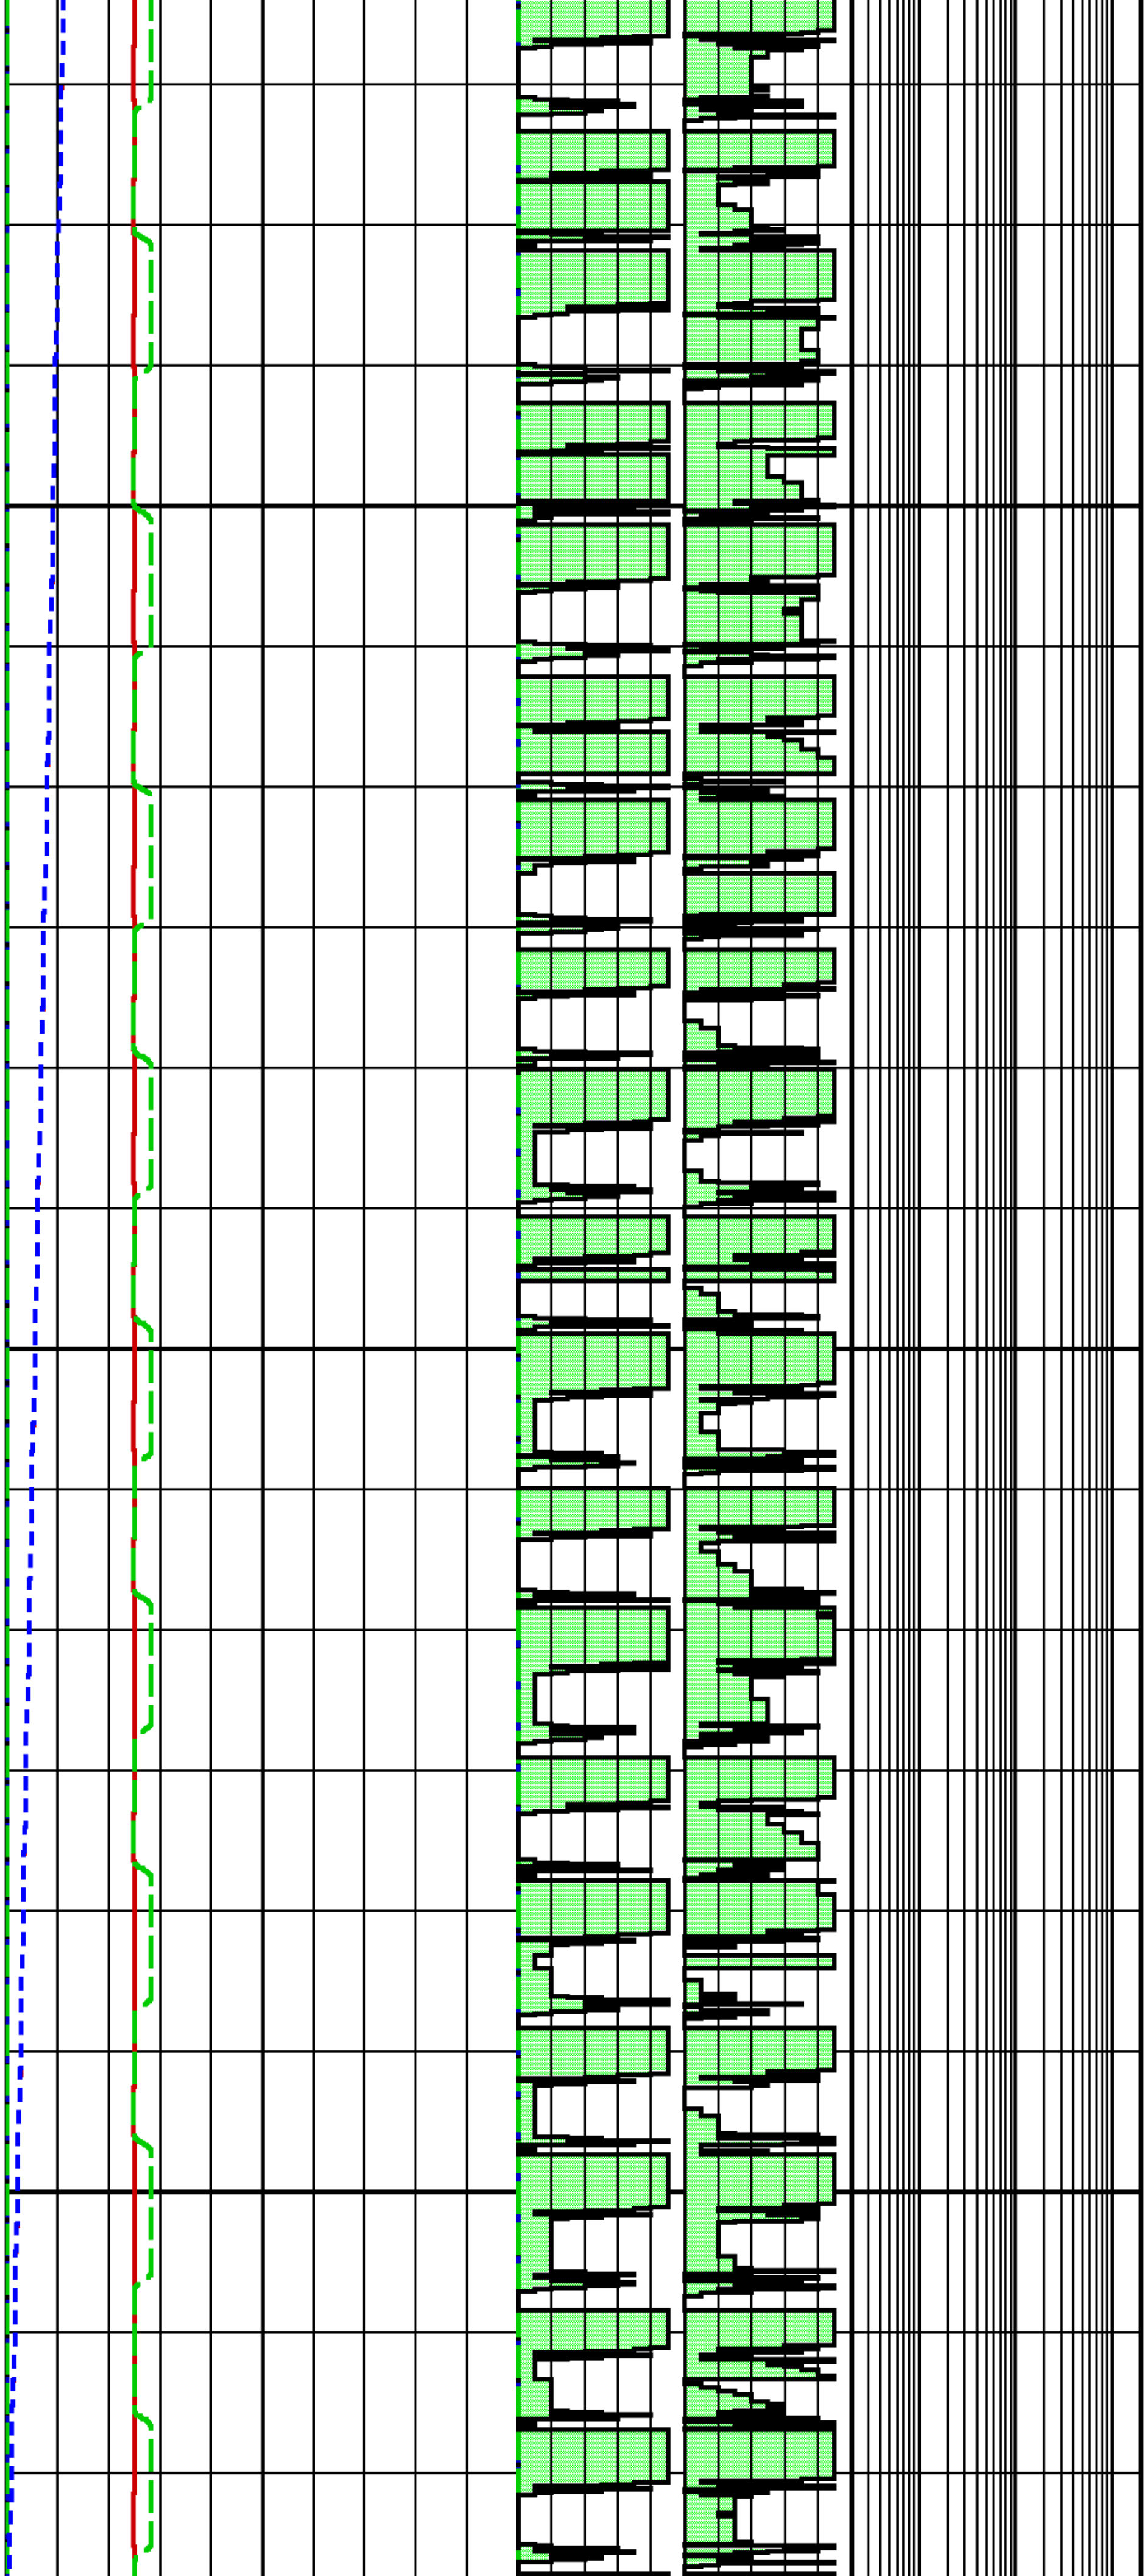

2370	3759.7	201.2
	3750.6	201.2
2380	3751.9	201.2
	3767.3	201.2
2390	3751.5	201.2
	3761.2	201.2
2400	3740.9	201.2
	3760.8	201.2
2410	3738.8	201.2
	3759.9	201.2
2420	3739.7	201.2
	3760.1	201.2
2430	3738.9	201.2
	3759.9	201.2
2440	3739.8	201.2
	3760.0	201.2
2450	3739.0	201.2
	3759.9	201.2
2460	3740.1	201.2
	3760.0	201.2
2470	3739.1	201.2
	3759.9	201.2
2480	3740.2	201.2
	3759.9	201.2
2490	3741.8	201.2
	3759.8	201.2
2500	3749.6	201.2
	3756.3	201.2
2510	3762.2	201.2
	3750.4	201.2
2520	3766.3	201.2
	3741.4	201.2
2530	3759.9	201.2
	3741.1	201.2
2540	3760.1	201.2
	3740.6	201.2
2550	3759.9	201.2

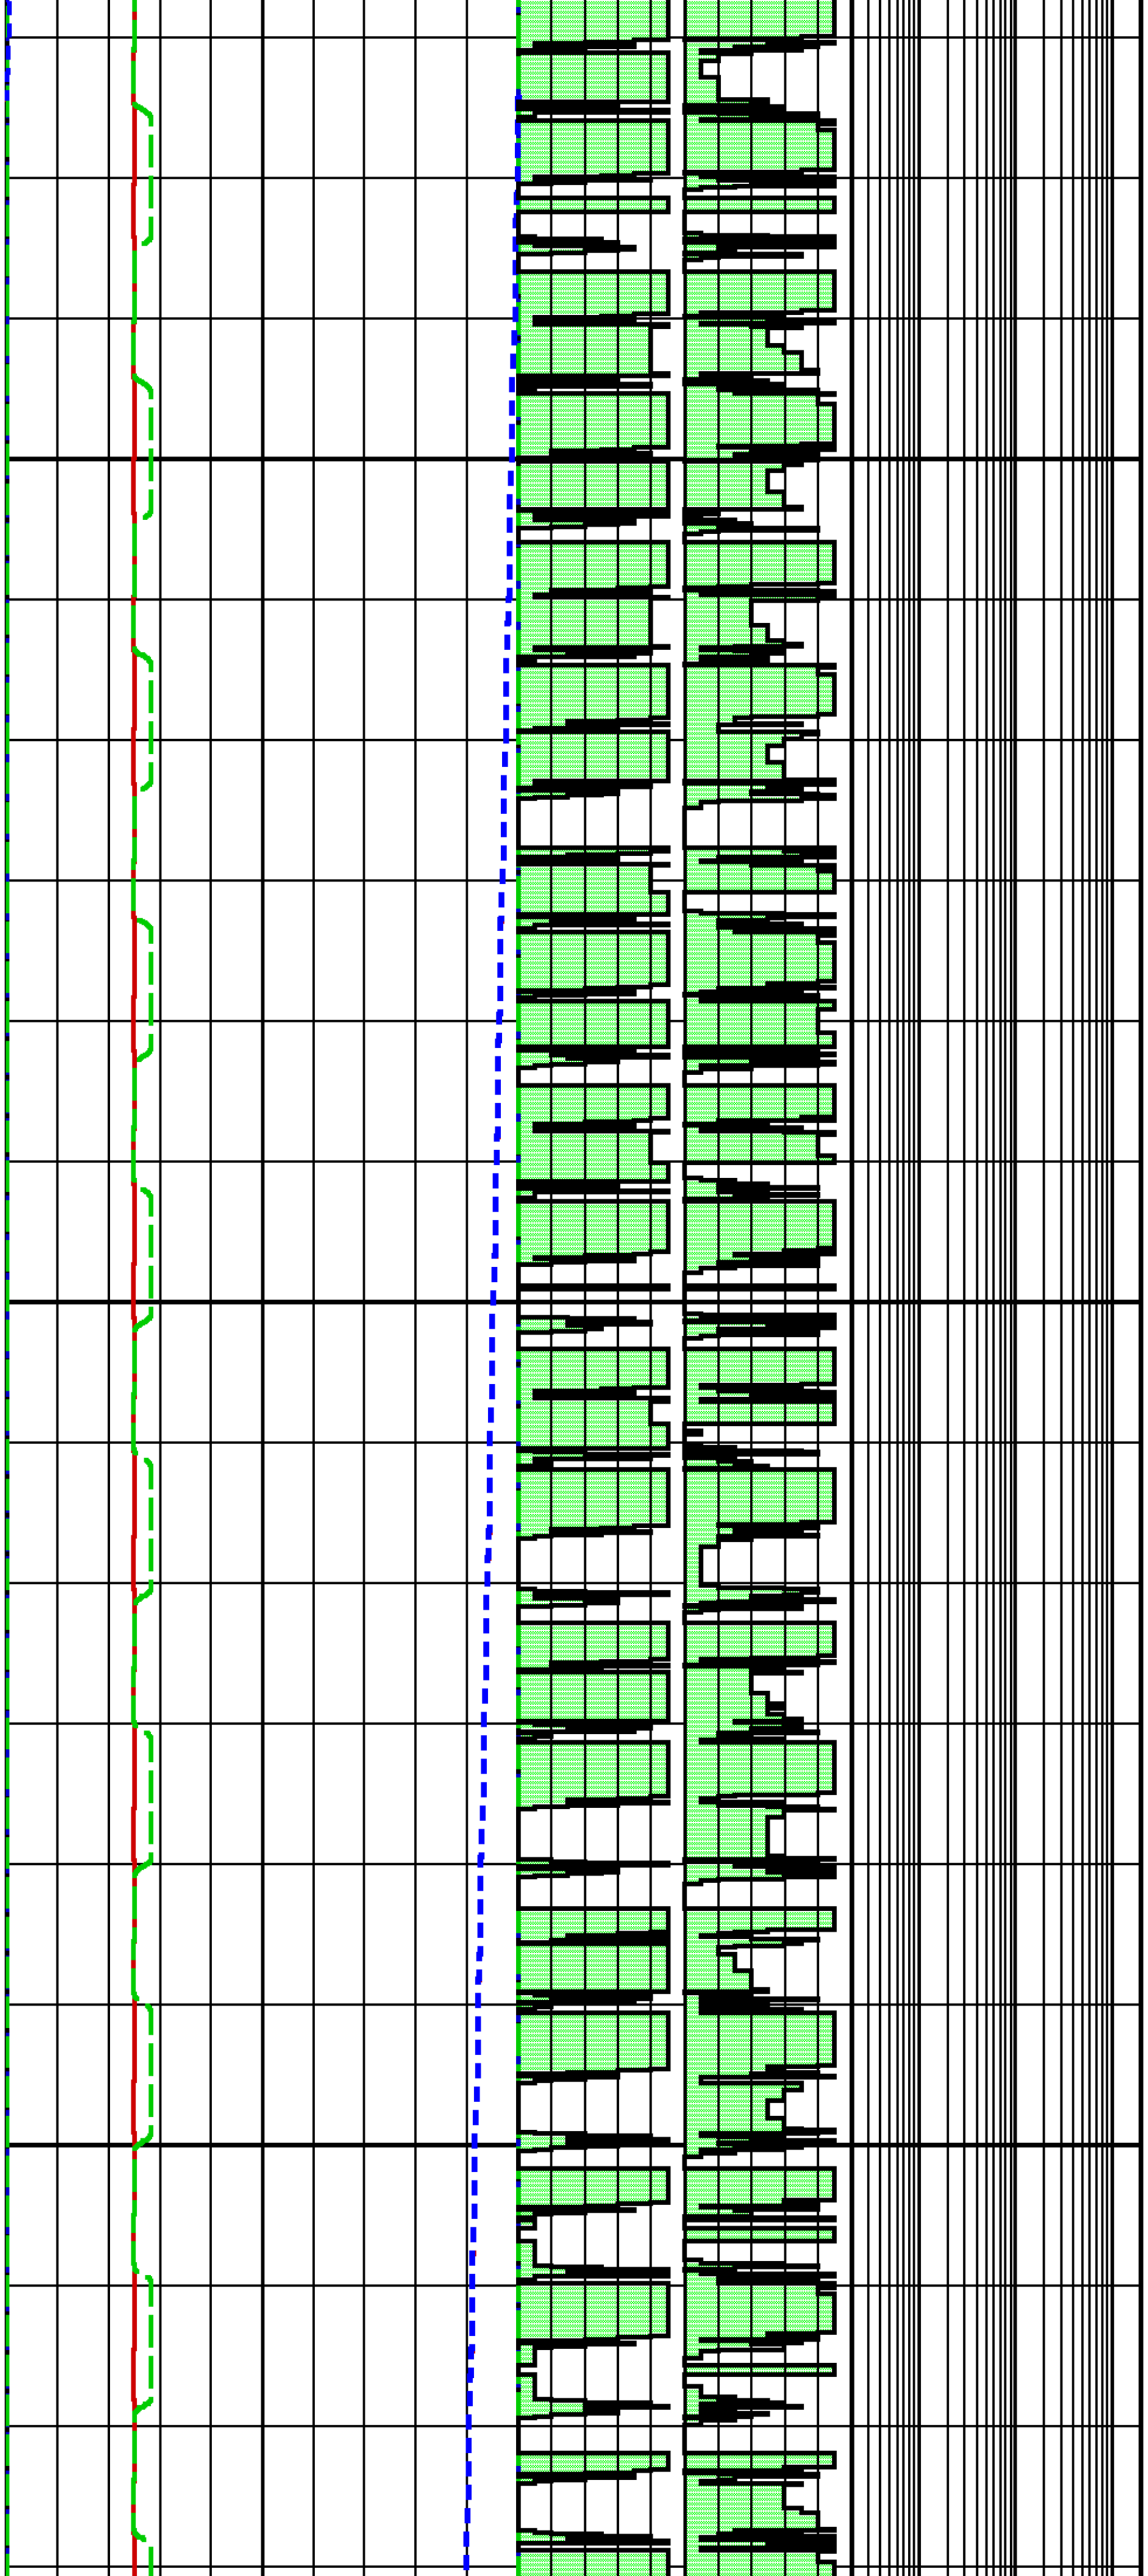

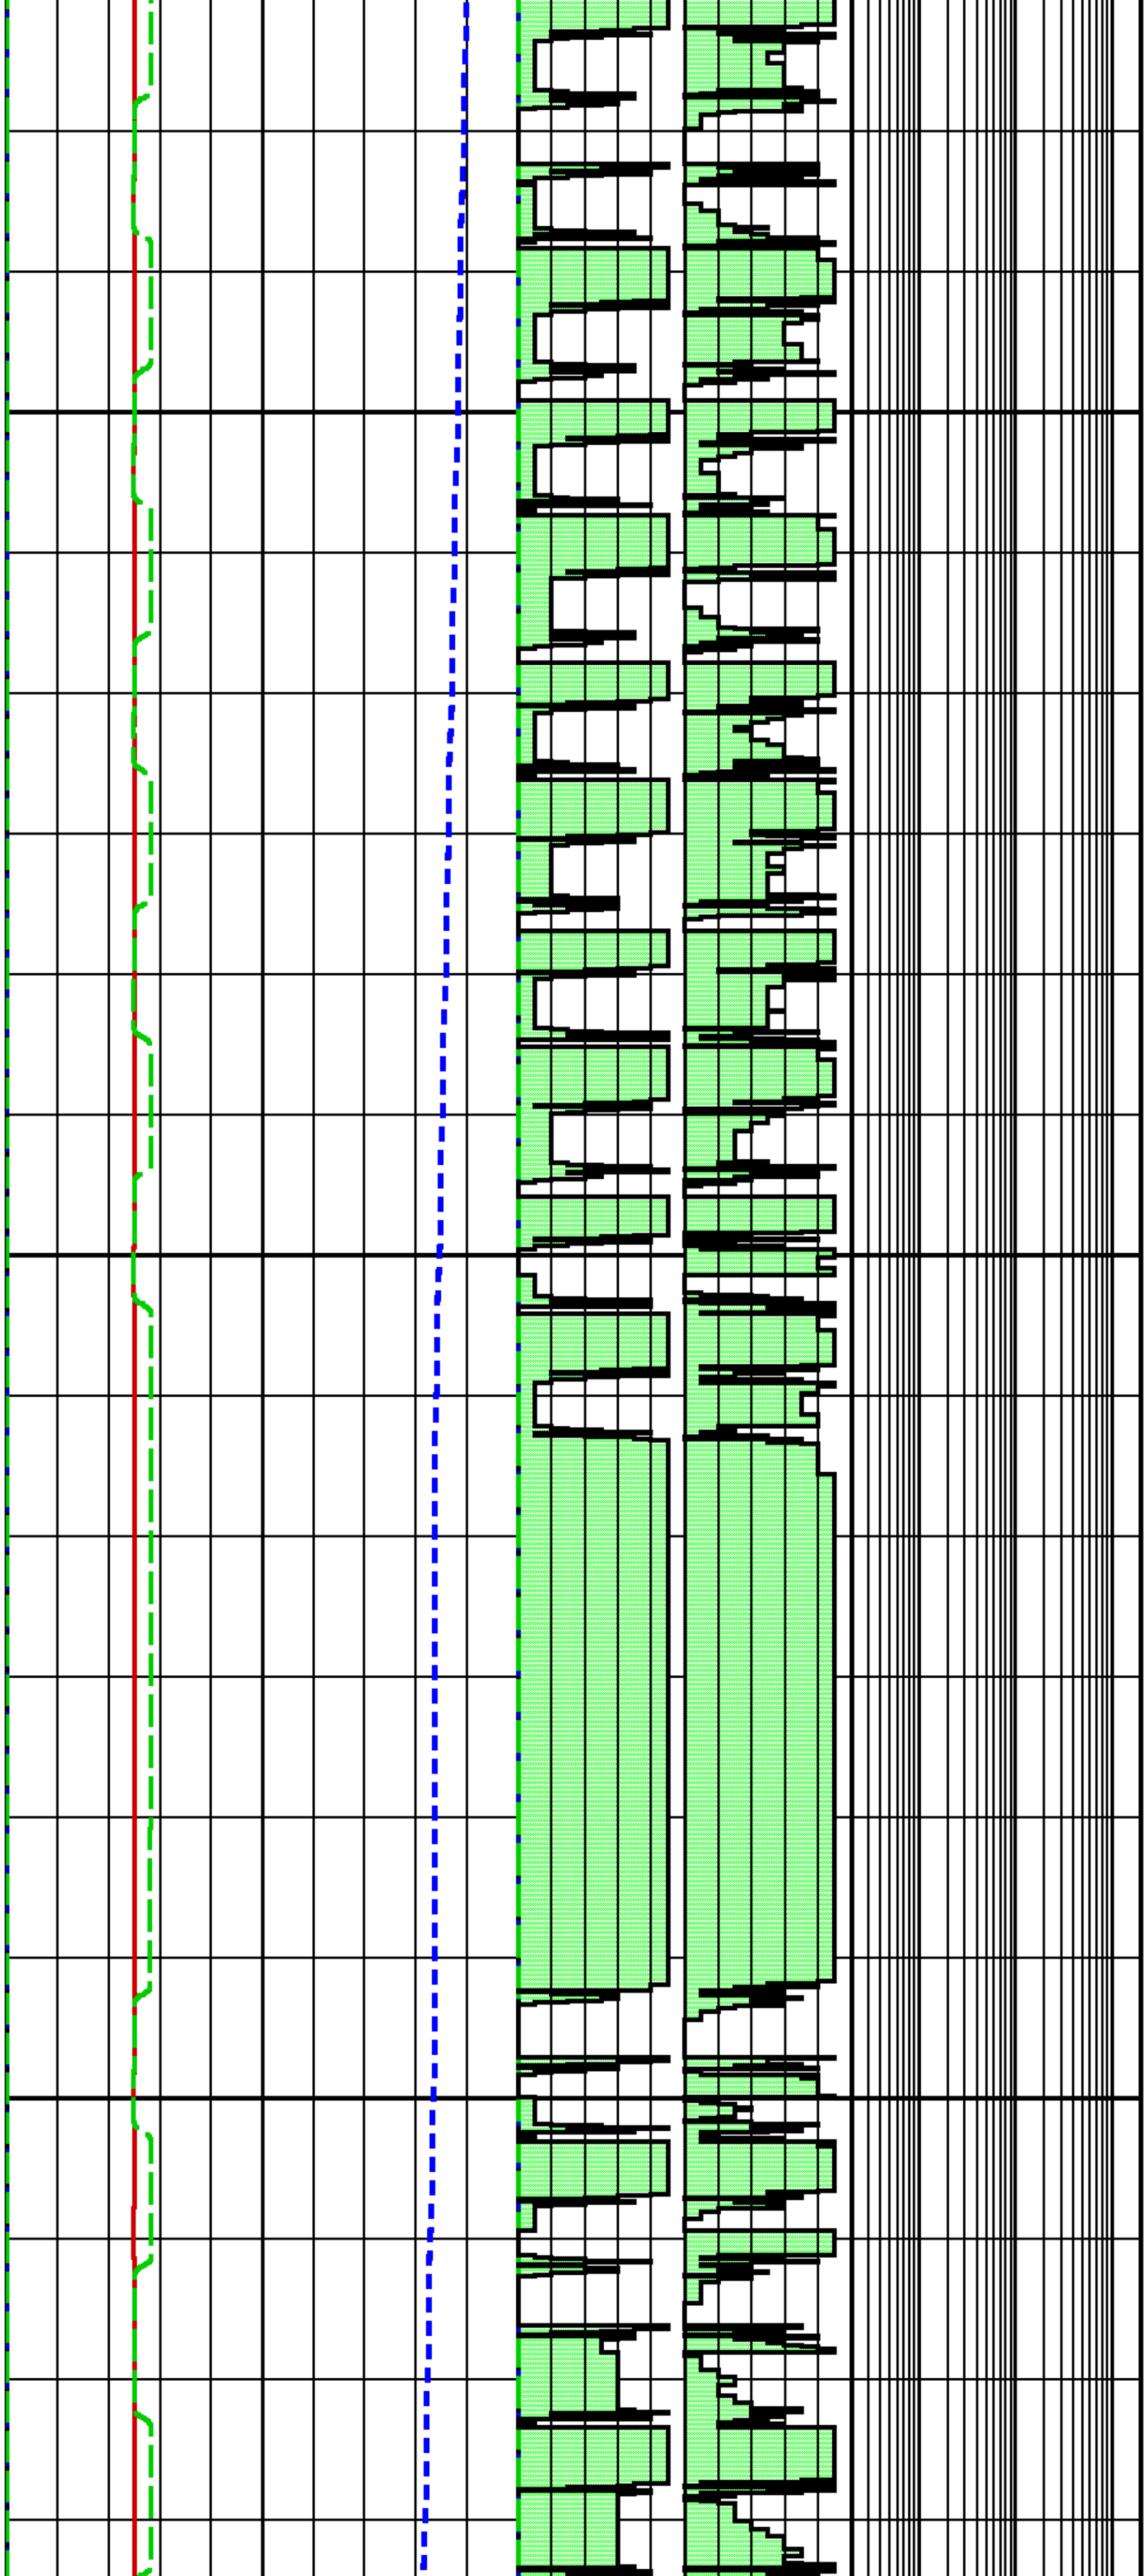

		3741.6	201.2
2560		3760.1	201.2
		3741.1	201.2
2570		3759.9	201.2
		3741.7	201.2
2580		3760.0	201.2
		3741.2	201.2
2590		3759.9	201.2
		3742.2	201.2
2600		3760.0	201.2
		3743.8	201.2
2610		3758.4	201.2
		3761.4	201.2
2620		3747.7	201.2
		3760.5	201.2
2630		3742.7	201.2
		3760.1	201.2
2640		3740.9	201.2
		3759.9	201.2
2650	BB[1] STOP OPERATION	3741.8	201.2
	WA[1] CLOSE EXIT-6TANK	3759.9	201.2
2660		3759.9	201.2
		3759.9	201.2
2670	WA[1] OPEN TANK 4	3759.9	201.2
		3759.9	201.2
2680	WA[1] OPEN TANK 4	3759.9	201.2
		3759.9	201.2
2690	BB[1] RESUME OPERATION	3759.9	201.2
		3760.1	201.2
2700		3741.0	201.2
		3759.9	201.2
2710		3741.0	201.2
		3760.1	201.2
2720		3746.3	201.2
		3759.9	201.2
2730		3746.4	201.2

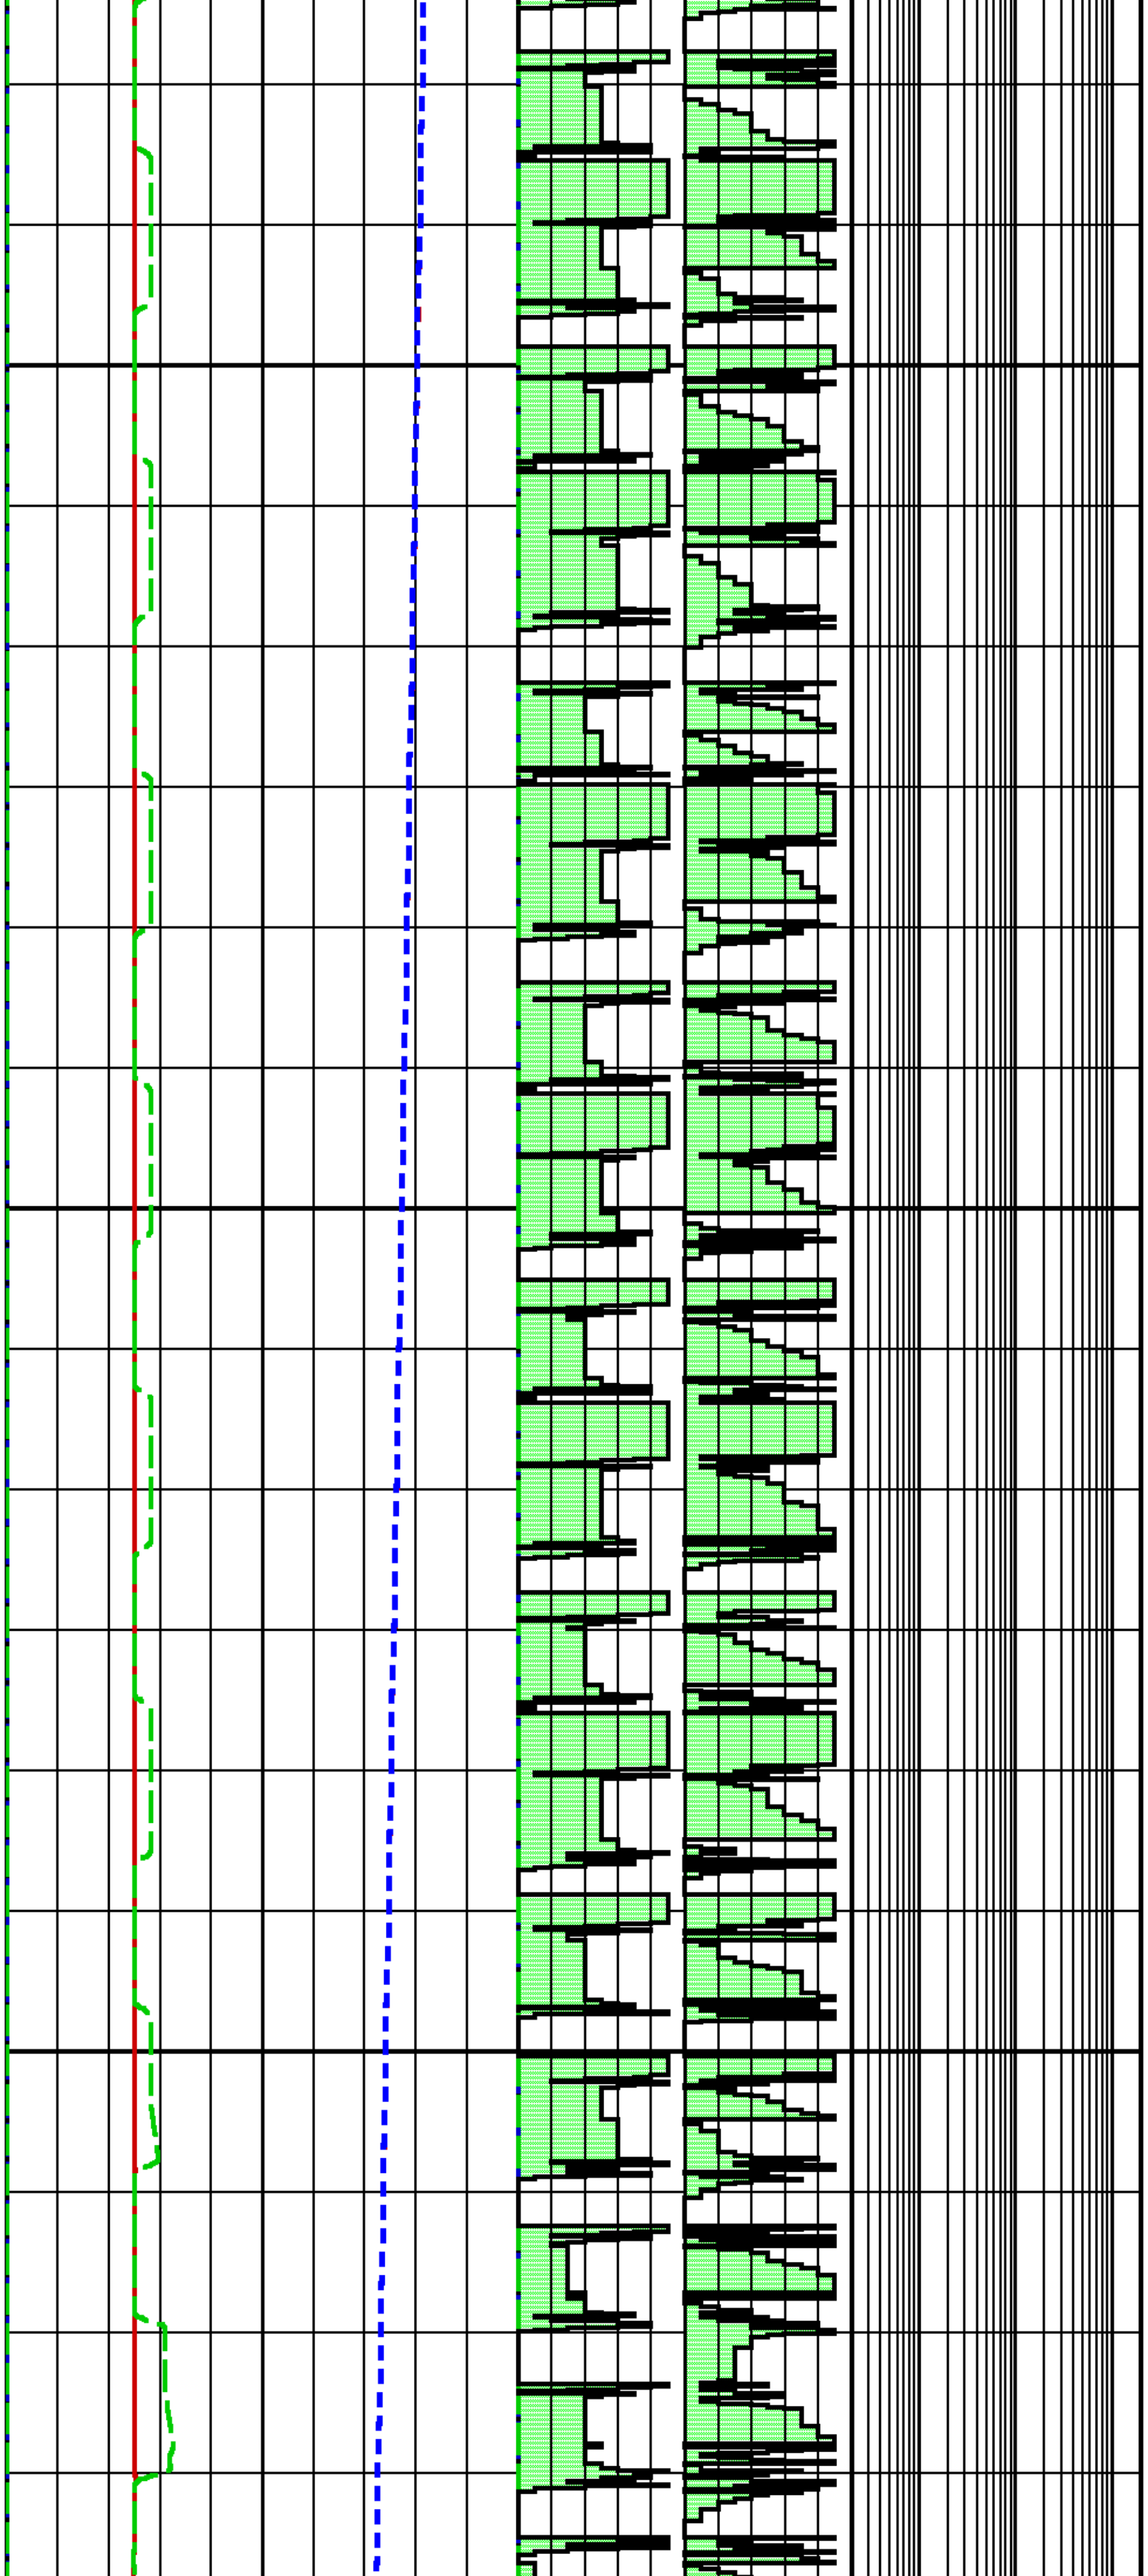

	3760.2	201.2
2740	3744.9	201.2
	3761.1	201.2
2750	3748.9	201.2
	3746.3	201.2
2760	3760.0	201.2
	3745.6	201.2
2770	3759.9	201.2
	3746.3	201.2
2780	3760.1	201.2
	3744.8	201.2
2790	3759.9	201.2
	3745.6	201.2
2800	3756.7	201.2
	3754.9	201.2
2810	3745.1	201.2
	3759.9	201.2
2820	3745.9	201.2
	3760.0	201.2
2830	3744.7	201.2
	3759.9	201.2
2840	3745.7	201.3
	3760.7	201.3
2850	3744.1	201.3
	3754.6	201.3
2860	3756.8	201.3
	3746.0	201.3
2870	3760.0	201.3
	3744.8	201.3
2880	3760.0	201.3
	3746.1	201.3
2890	3760.2	201.3
	3743.6	201.3
2900	3760.9	201.3
	3744.3	201.3
2910	3757.2	201.3
	3756.2	201.3

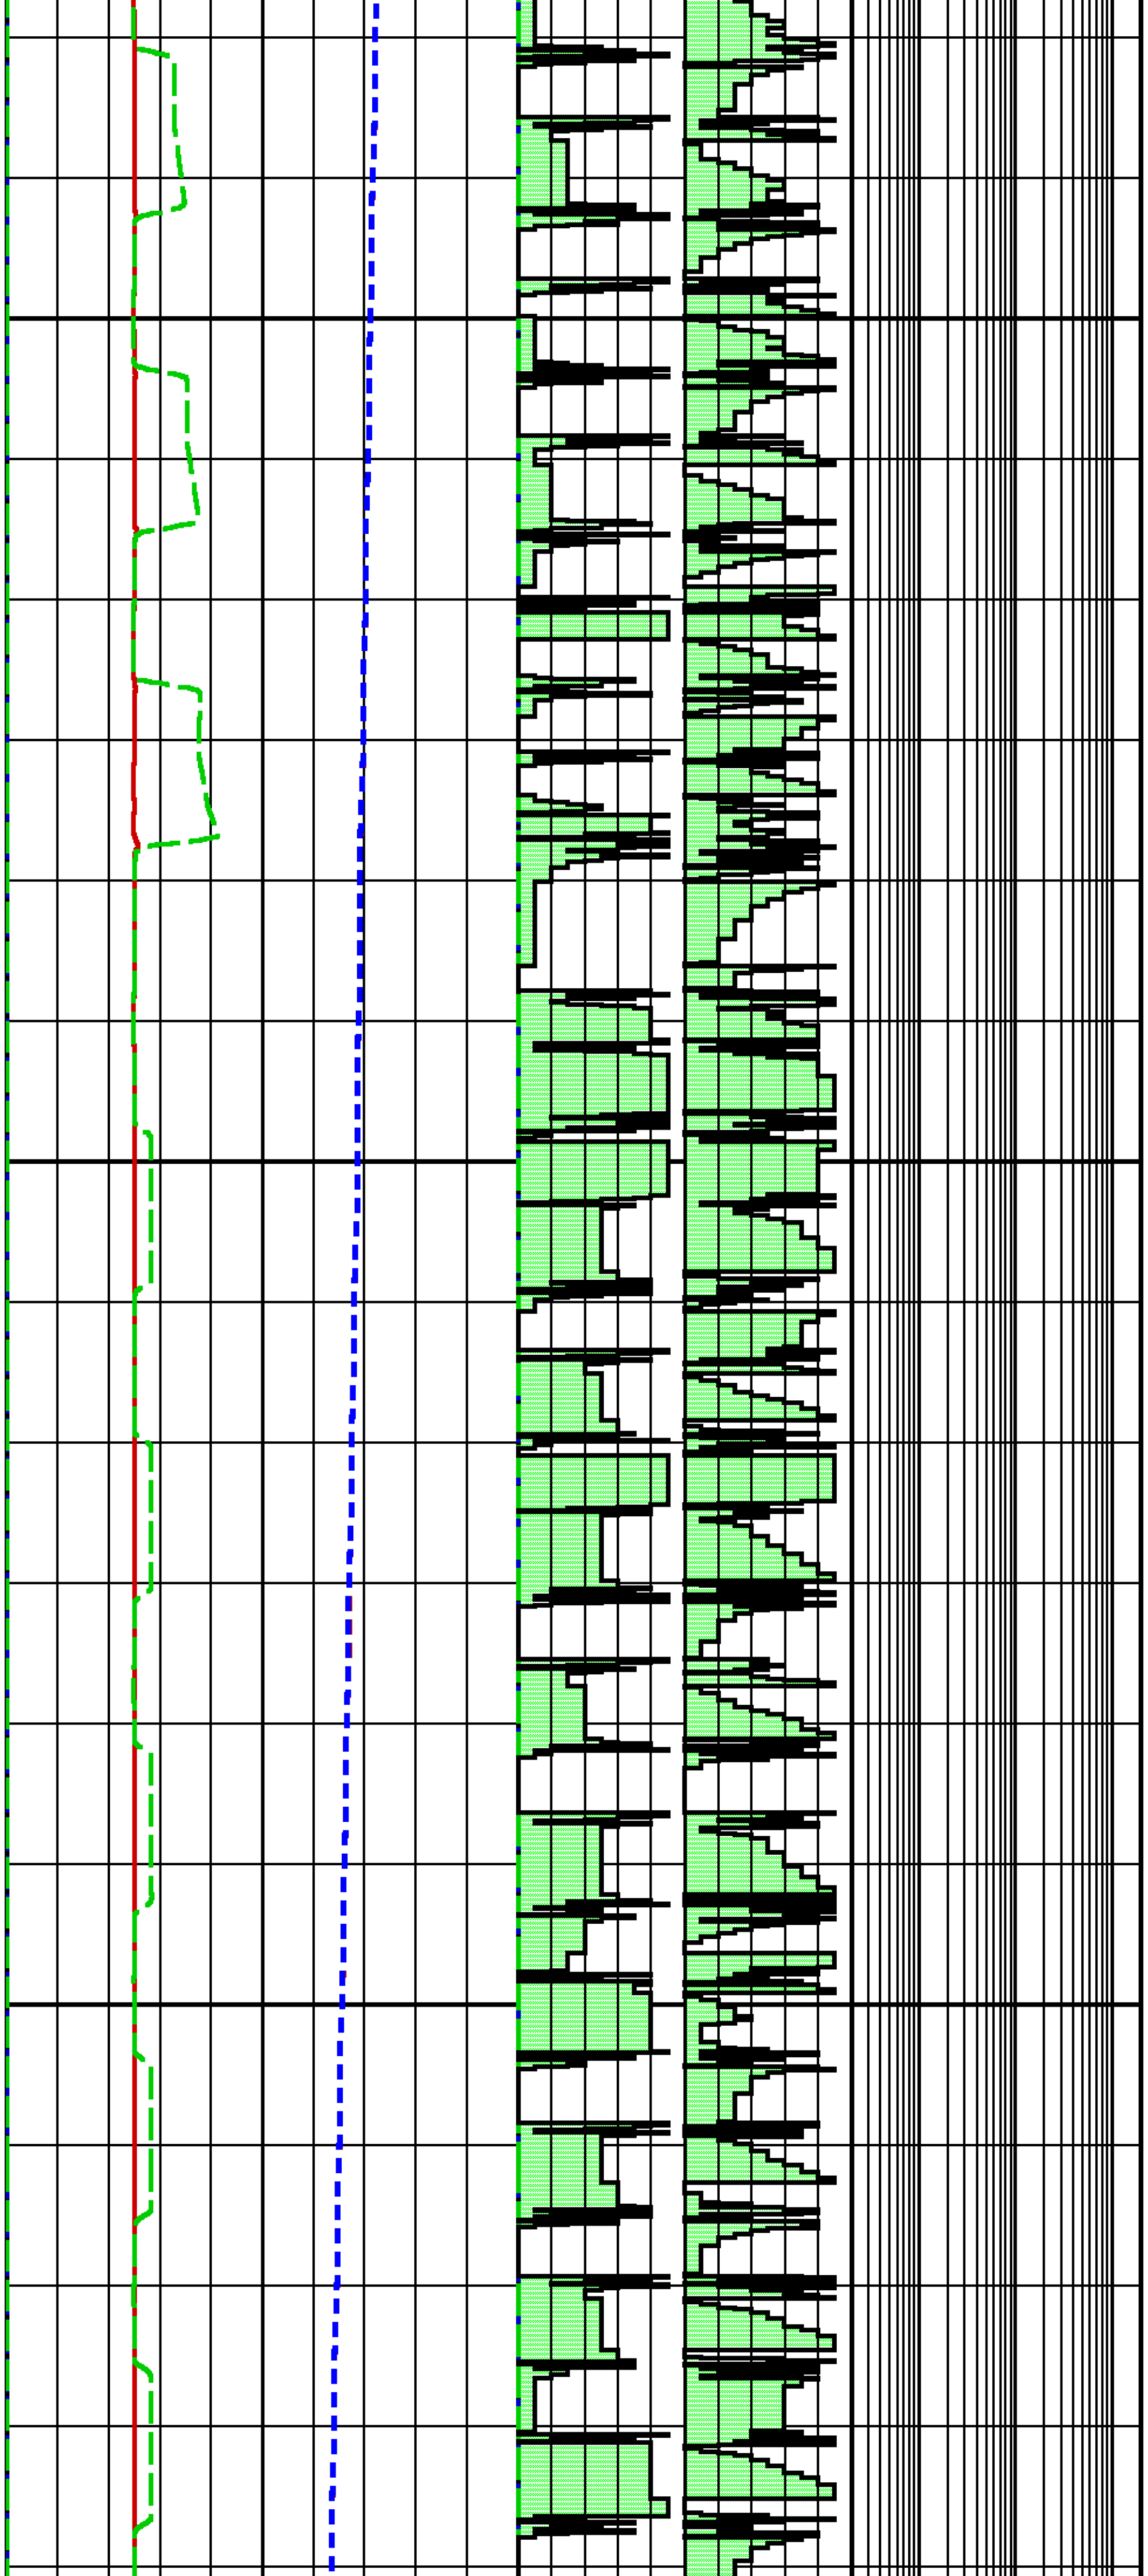

2920		3741.7	201.3
		3760.3	201.3
2930		3743.6	201.3
		3760.3	201.3
2940		3741.1	201.3
		3760.9	201.3
2950		3741.9	201.3
		3812.5	201.3
2960		3757.5	201.3
		3740.7	201.3
2970		3760.7	201.3
	WA[1] CLOSE TANK 4	3744.2	201.3
2980		3762.0	201.3
	WA[1] OPEN TANK 5	3761.3	201.3
2990		3738.6	201.3
	BB[1] RESUME OPERATION	3759.9	201.3
3000		3759.9	201.3
		3745.8	201.3
3010		3761.4	201.3
		3744.9	201.3
3020		3761.6	201.3
		3748.3	201.3
3030		3746.1	201.3
		3760.2	201.3
3040		3744.7	201.3
		3760.1	201.3
3050		3745.7	201.3
		3764.3	201.3
3060		3748.3	201.3
		3760.5	201.3
3070		3745.4	201.3
		3768.1	201.3
3080		3749.3	201.3
		3746.1	201.3
3090		3761.7	201.3
		3749.0	201.3
3100		3760.4	201.3

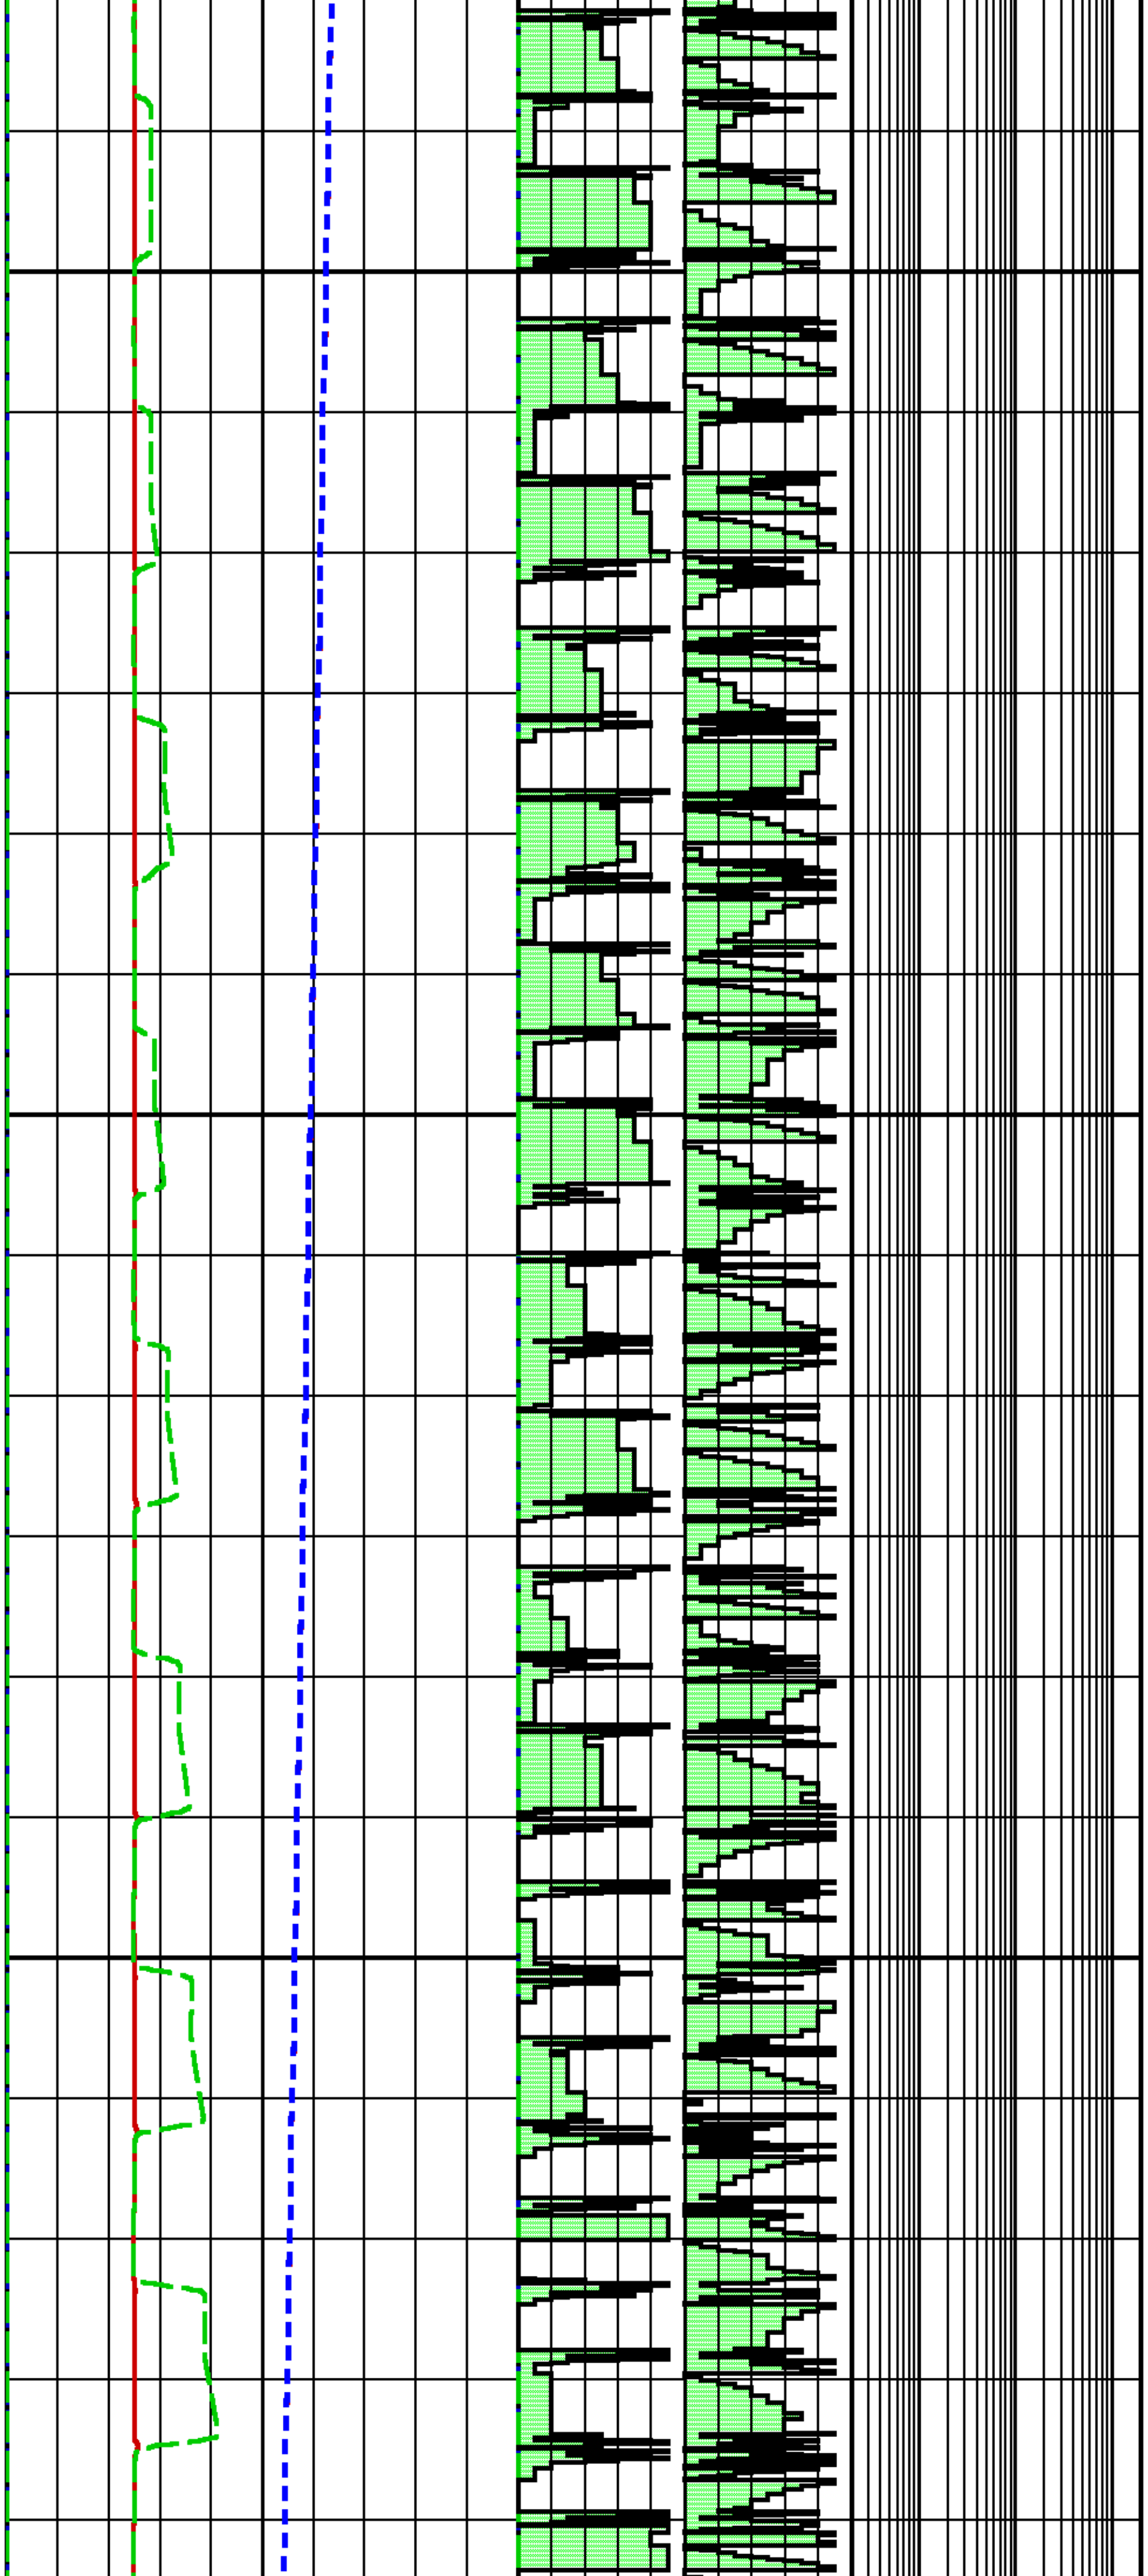

	3746.1	201.3
3110	3761.3	201.3
	3748.0	201.3
3120	3760.6	201.3
	3745.1	201.3
3130	3761.9	201.3
	3752.9	201.3
3140	3749.0	201.3
	3760.0	201.3
3150	3745.4	201.3
	3760.8	201.3
3160	3746.8	201.3
	3761.8	201.3
3170	3745.8	201.3
	3762.0	201.3
3180	3746.9	201.3
	3753.7	201.3
3190	3758.2	201.3
	3744.8	201.3
3200	3762.1	201.3
	3747.6	201.3
3210	3760.3	201.3
	3742.6	201.3
3220	3762.2	201.3
	3745.1	201.3
3230	3820.8	201.3
	3755.8	201.3
3240	3741.7	201.3
	3760.8	201.3
3250	3744.1	201.3
	3760.6	201.3
3260	3740.0	201.3
	3760.9	201.3
3270	3742.2	201.3
	3843.1	201.3
3280	3749.5	201.3

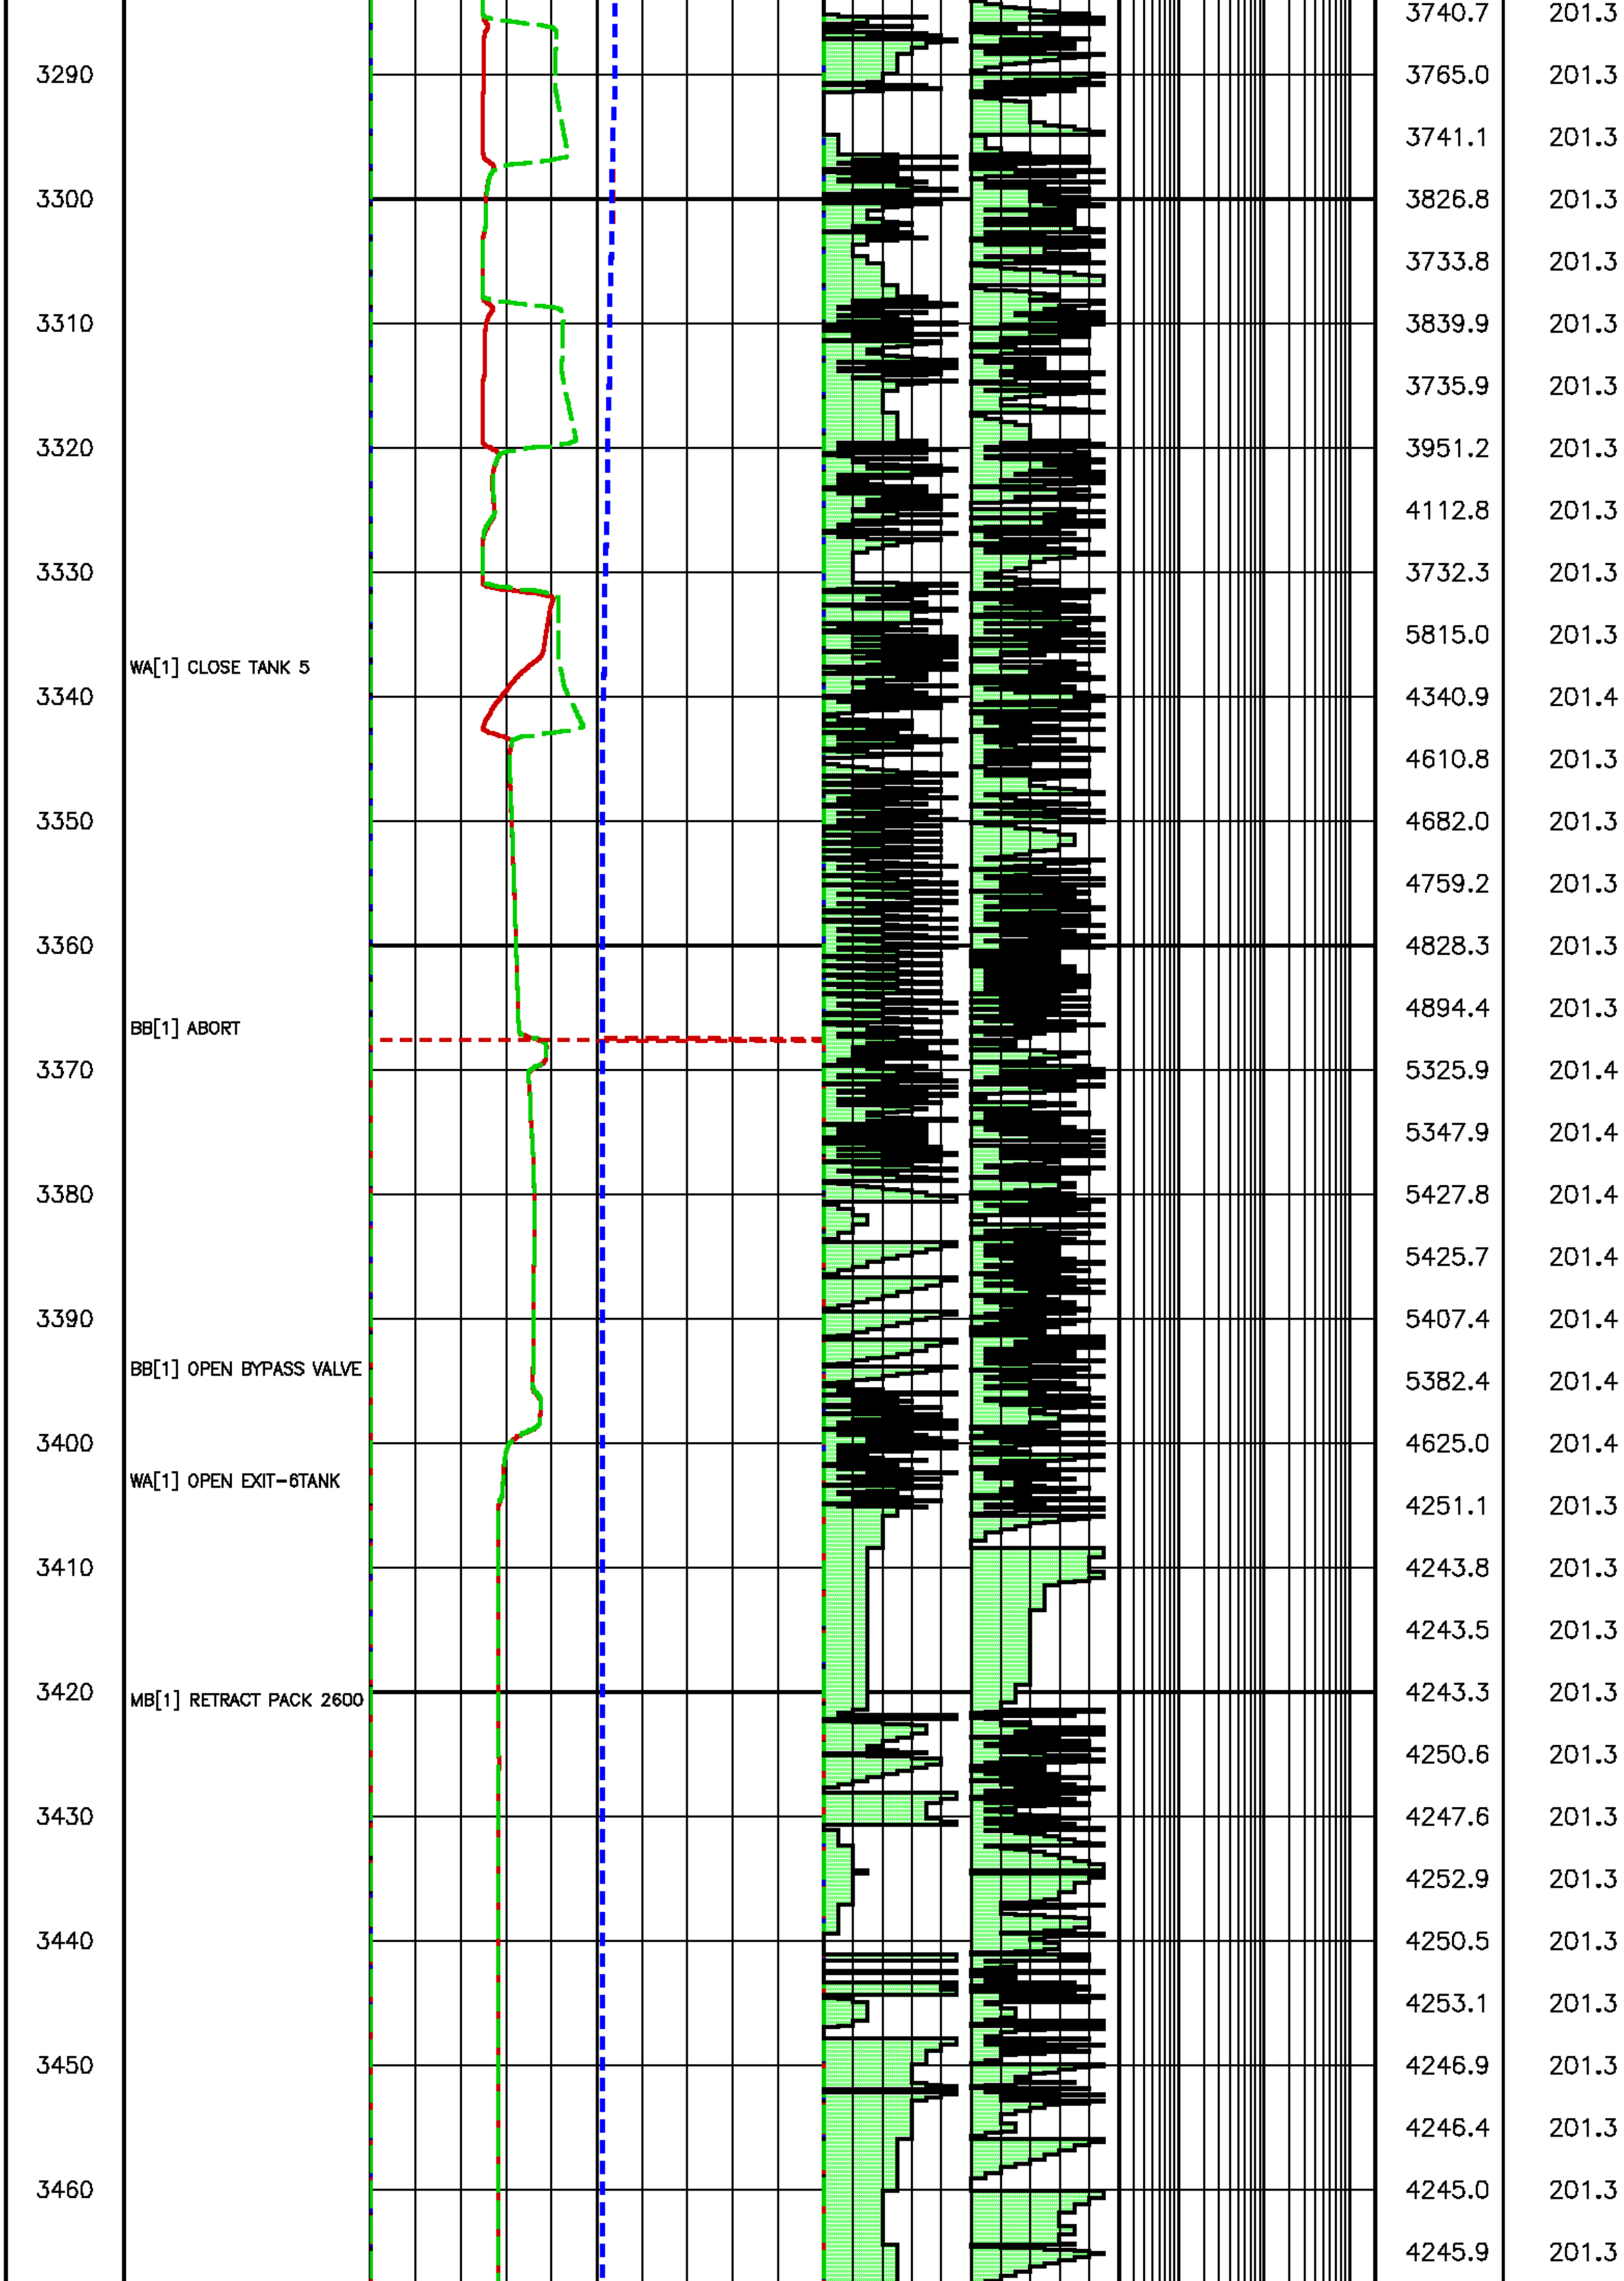

3290
3300
3310
3320
3330
WA[1] CLOSE TANK 5
3340
3350
3360
BB[1] ABORT
3370
3380
3390
BB[1] OPEN BYPASS VALVE
3400
WA[1] OPEN EXIT-6TANK
3410
3420
MB[1] RETRACT PACK 2600
3430
3440
3450
3460
3740.7 201.3
3765.0 201.3
3741.1 201.3
3826.8 201.3
3733.8 201.3
3839.9 201.3
3735.9 201.3
3951.2 201.3
4112.8 201.3
3732.3 201.3
5815.0 201.3
4340.9 201.4
4610.8 201.3
4682.0 201.3
4759.2 201.3
4828.3 201.3
4894.4 201.3
5325.9 201.4
5347.9 201.4
5427.8 201.4
5425.7 201.4
5407.4 201.4
5382.4 201.4
4625.0 201.4
4251.1 201.3
4243.8 201.3
4243.5 201.3
4243.3 201.3
4250.6 201.3
4247.6 201.3
4252.9 201.3
4250.5 201.3
4253.1 201.3
4246.9 201.3
4246.4 201.3
4245.0 201.3
4245.9 201.3

SECONDS		APQL (psi)	RTDQL (degF)
3470	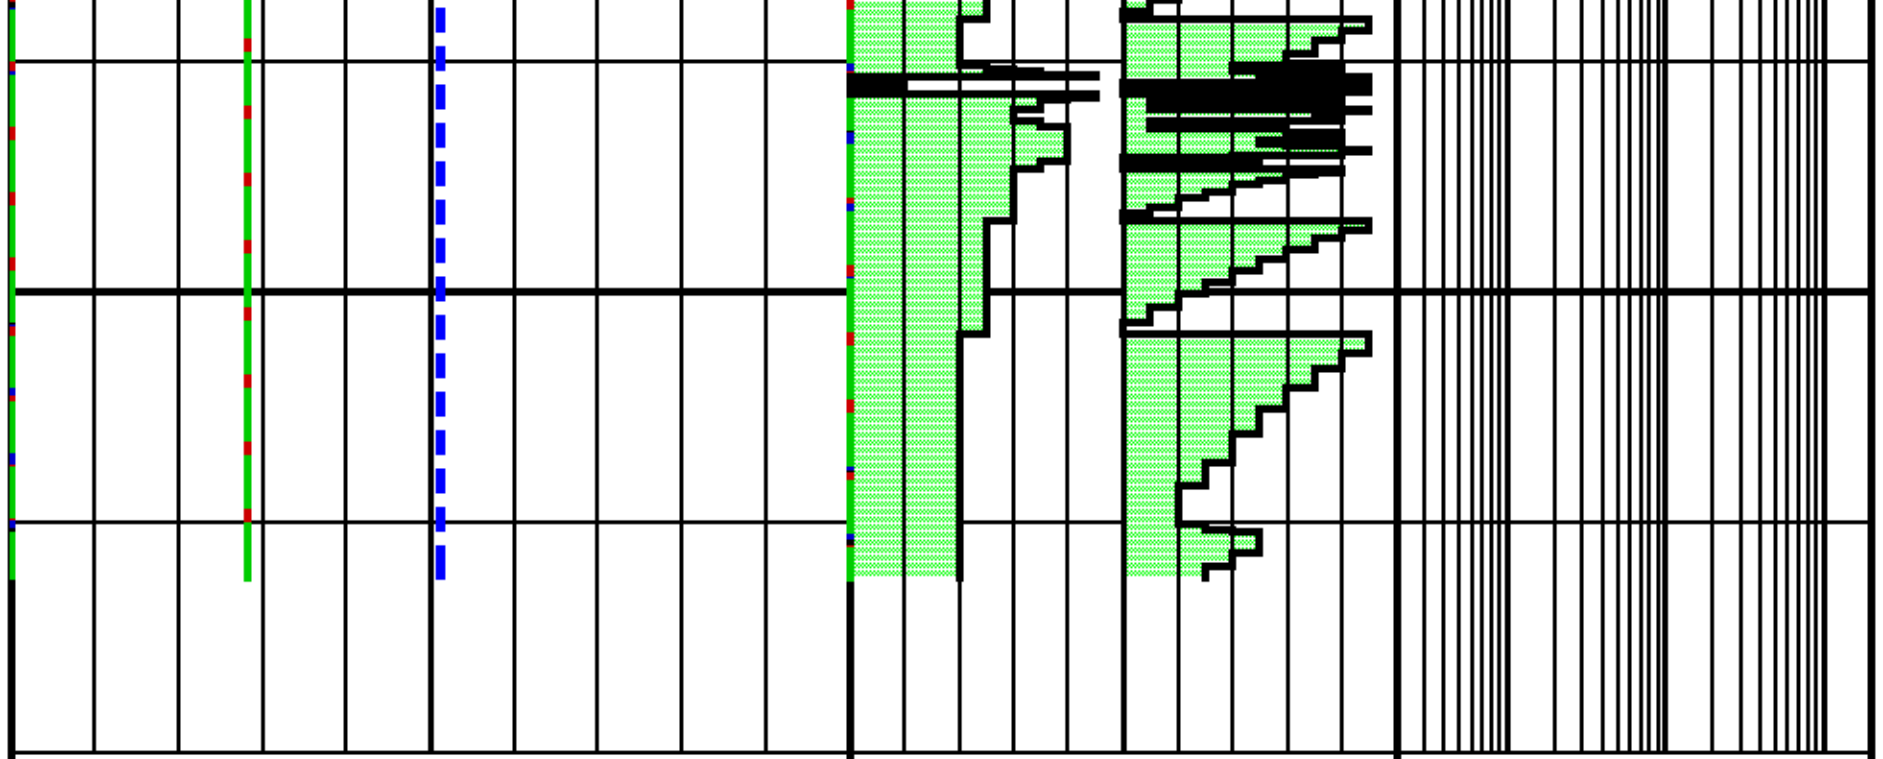	4244.7	201.3
		4246.7	201.3
3480		4245.3	201.3
		4244.6	201.3
3490		4244.3	201.3
3500			

SECONDS

TOOL COMMAND

ANNOTATIONS

Packer Quartz [apql]
0 15000
(psi)

Pump Quartz [apqk]
0 15000
(psi)

DRAW DOWN VOL [ddv]
20 0
(cm3)

PTV VOL [ptv]
10000 0
(cm3)

PVT VOL [pvtv]
100 0
(cm3)

PTVR VOL [ptvr]
10 0
(cm3)

CPTV VOL [cptv]
10000 0
(cm3)

QL ONES
0 10
(psi)

QL DECS
0 10
(psi)

APQL
(psi)

RTDQL
(degF)

Data File : j800g77.aff
Presentation: sampleview_ibsig.log

SECONDS	ABSORPTION		FLUID FRACTION		ULTRA VIOLET	

REFR GAS

REF WATER

REF OIL

CPTV VOL [cptv]
0 10000
(cm3)

Packer Quartz [apql]
0 15000
(psi)

Pump Quartz [apqk]
0 15000
(psi)

OD2QJ [od2.j]
0 4
(1)

OD3QJ [od3.j]
0 4
(1)

OD4QJ [od4.j]
0 4
(1)

REFR.INDEX [refri.j]
1.1 1.6
()

OIL FRAC [oilf.j]
−0.5 2
(1)

WATER FRAC [wtrf.j]
−0.5 2
(1)

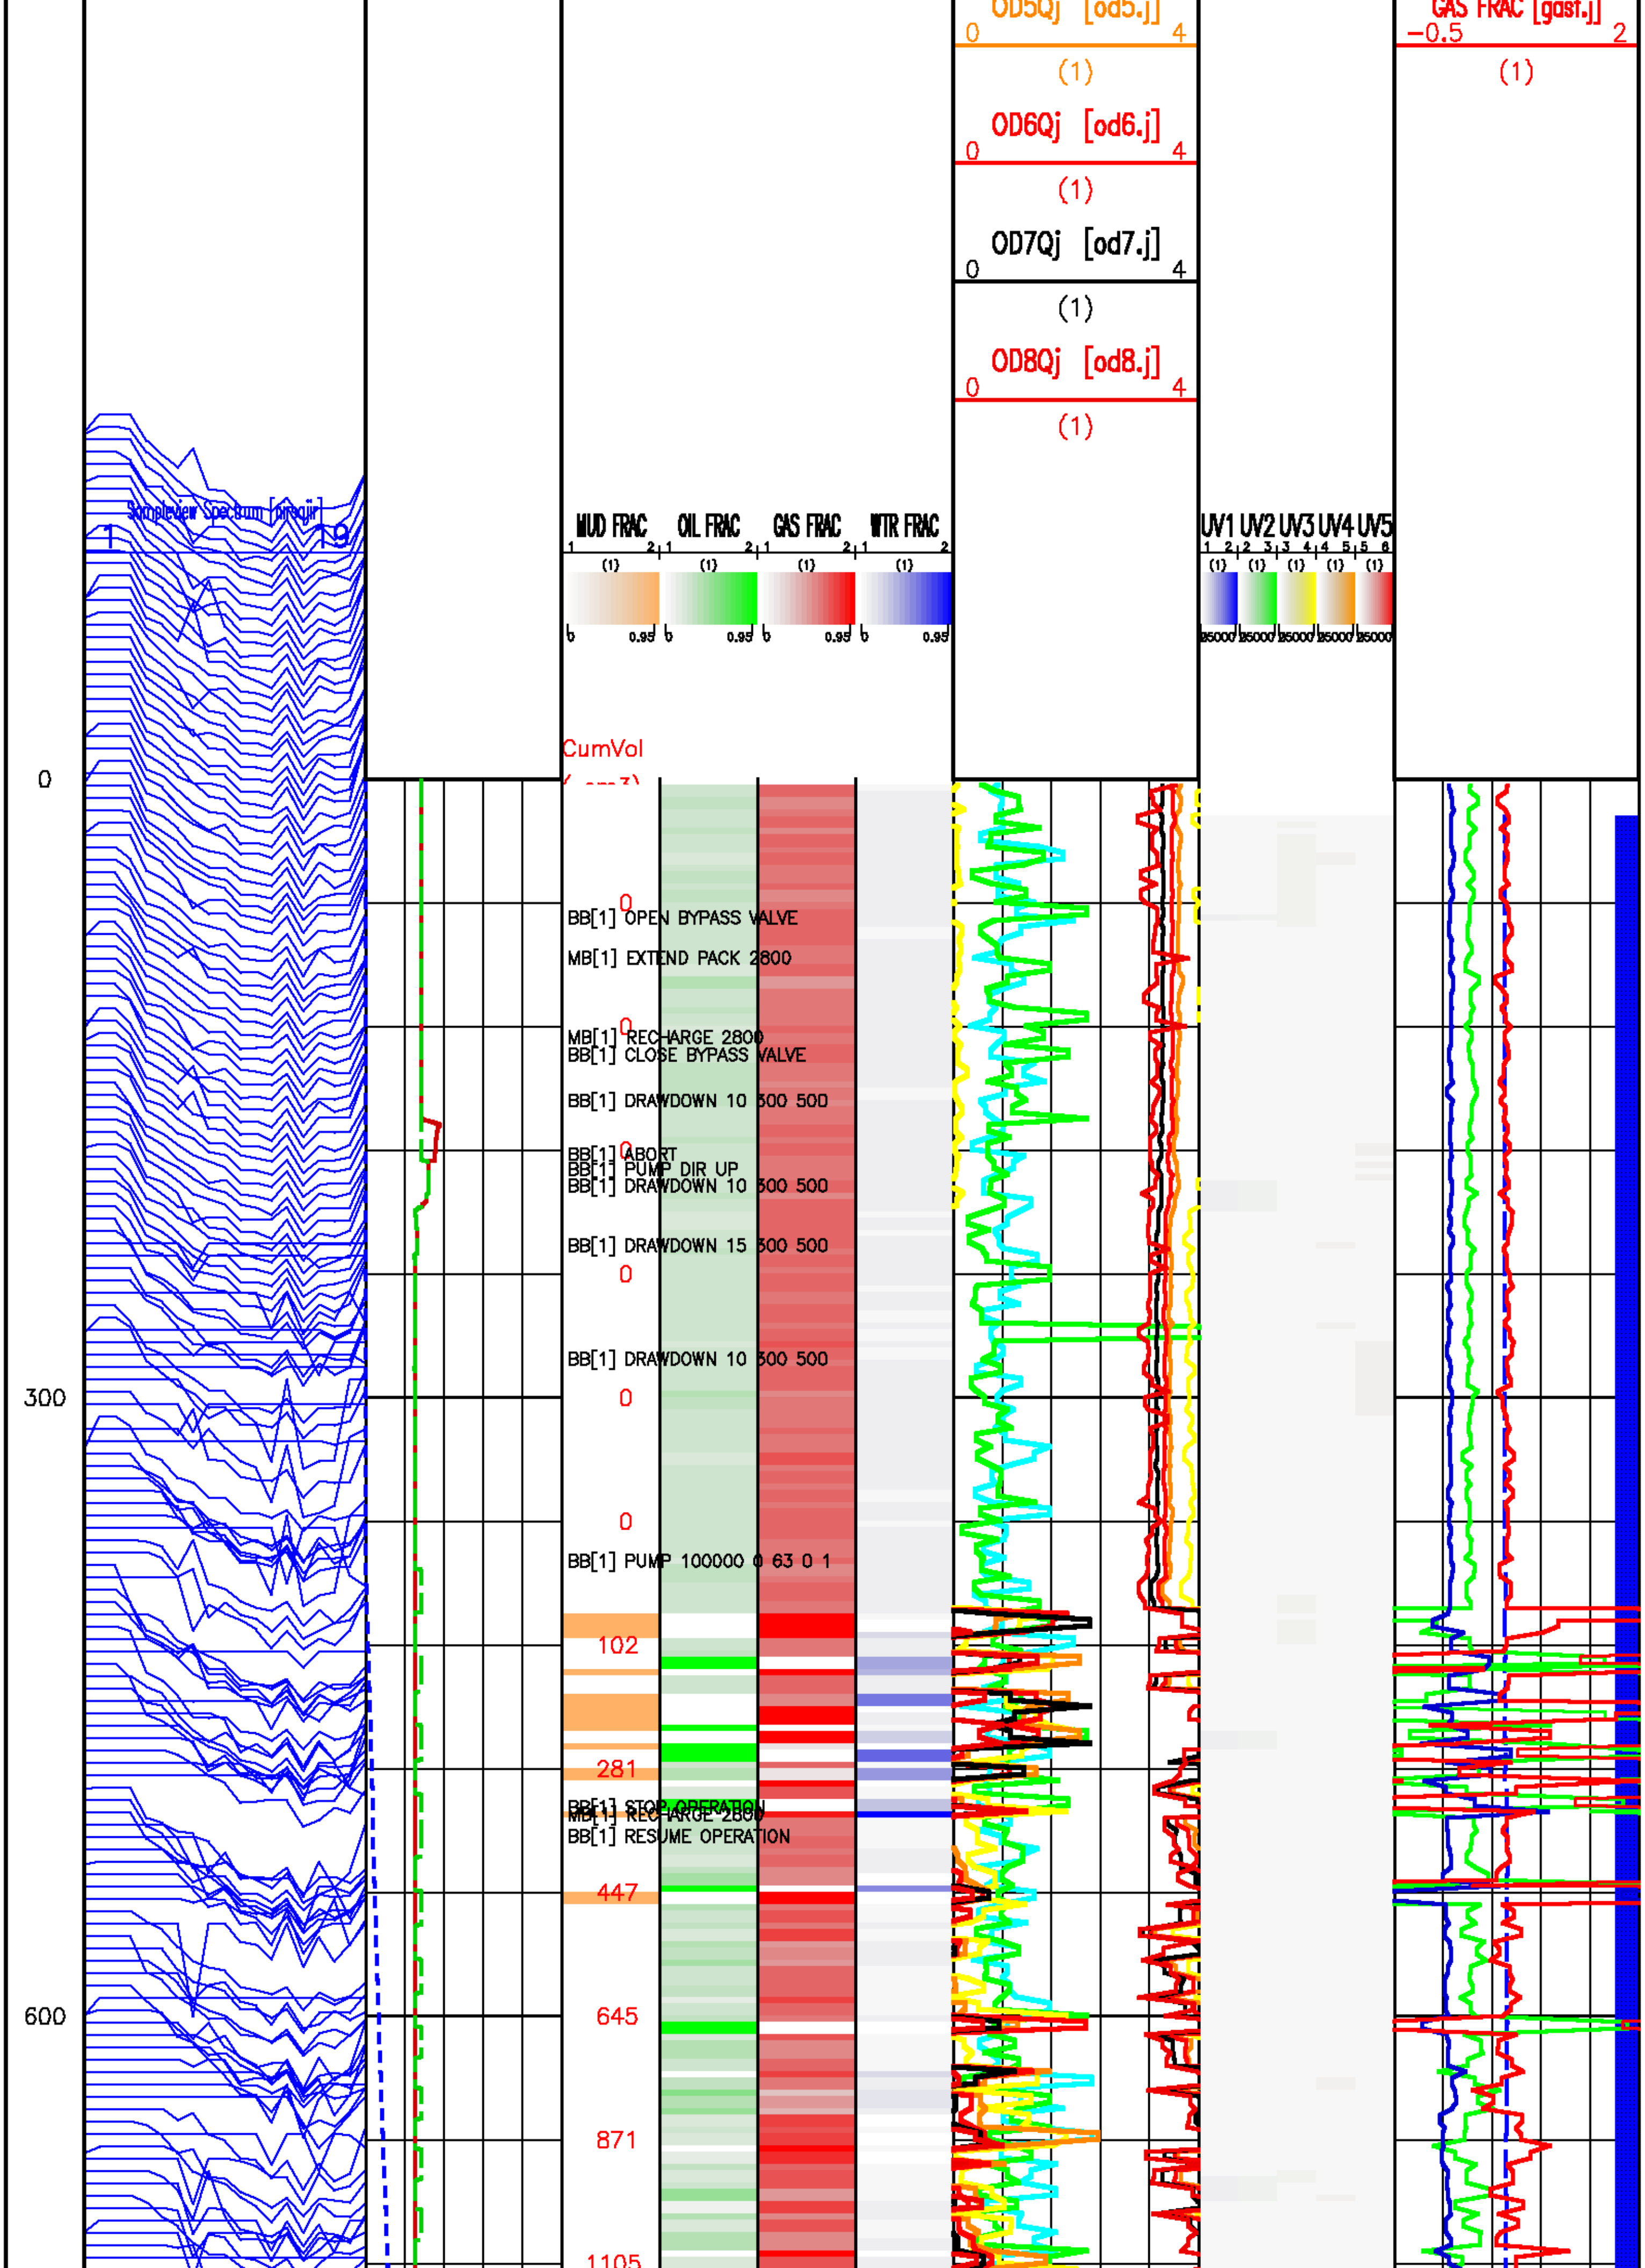

OD5Qj [od5.j]
0
4
(1)
OD6Qj [od6.j]
0
4
(1)
OD7Qj [od7.j]
0
4
(1)
OD8Qj [od8.j]
0
4
(1)
GAS FRAC [gasf.j]
−0.5
2
(1)
Simpleview Spectrum [specjr]
1
19
MUD FRAC
OIL FRAC
GAS FRAC
WTR FRAC
UV1 UV2 UV3 UV4 UV5
CumVol
0
300
600
BB[1] OPEN BYPASS VALVE
MB[1] EXTEND PACK 2800
MB[1] RECHARGE 2800
BB[1] CLOSE BYPASS VALVE
BB[1] DRAWDOWN 10 500 500
BB[1] ABORT
BB[1] PUMP DIR UP
BB[1] DRAWDOWN 10 500 500
BB[1] DRAWDOWN 15 500 500
BB[1] DRAWDOWN 10 500 500
BB[1] PUMP 100000 0 63 0 1
BB[1] STOP OPERATION
MB[1] RECHARGE 2800
BB[1] RESUME OPERATION
0
0
0
0
0
0
102
281
447
645
871
1105

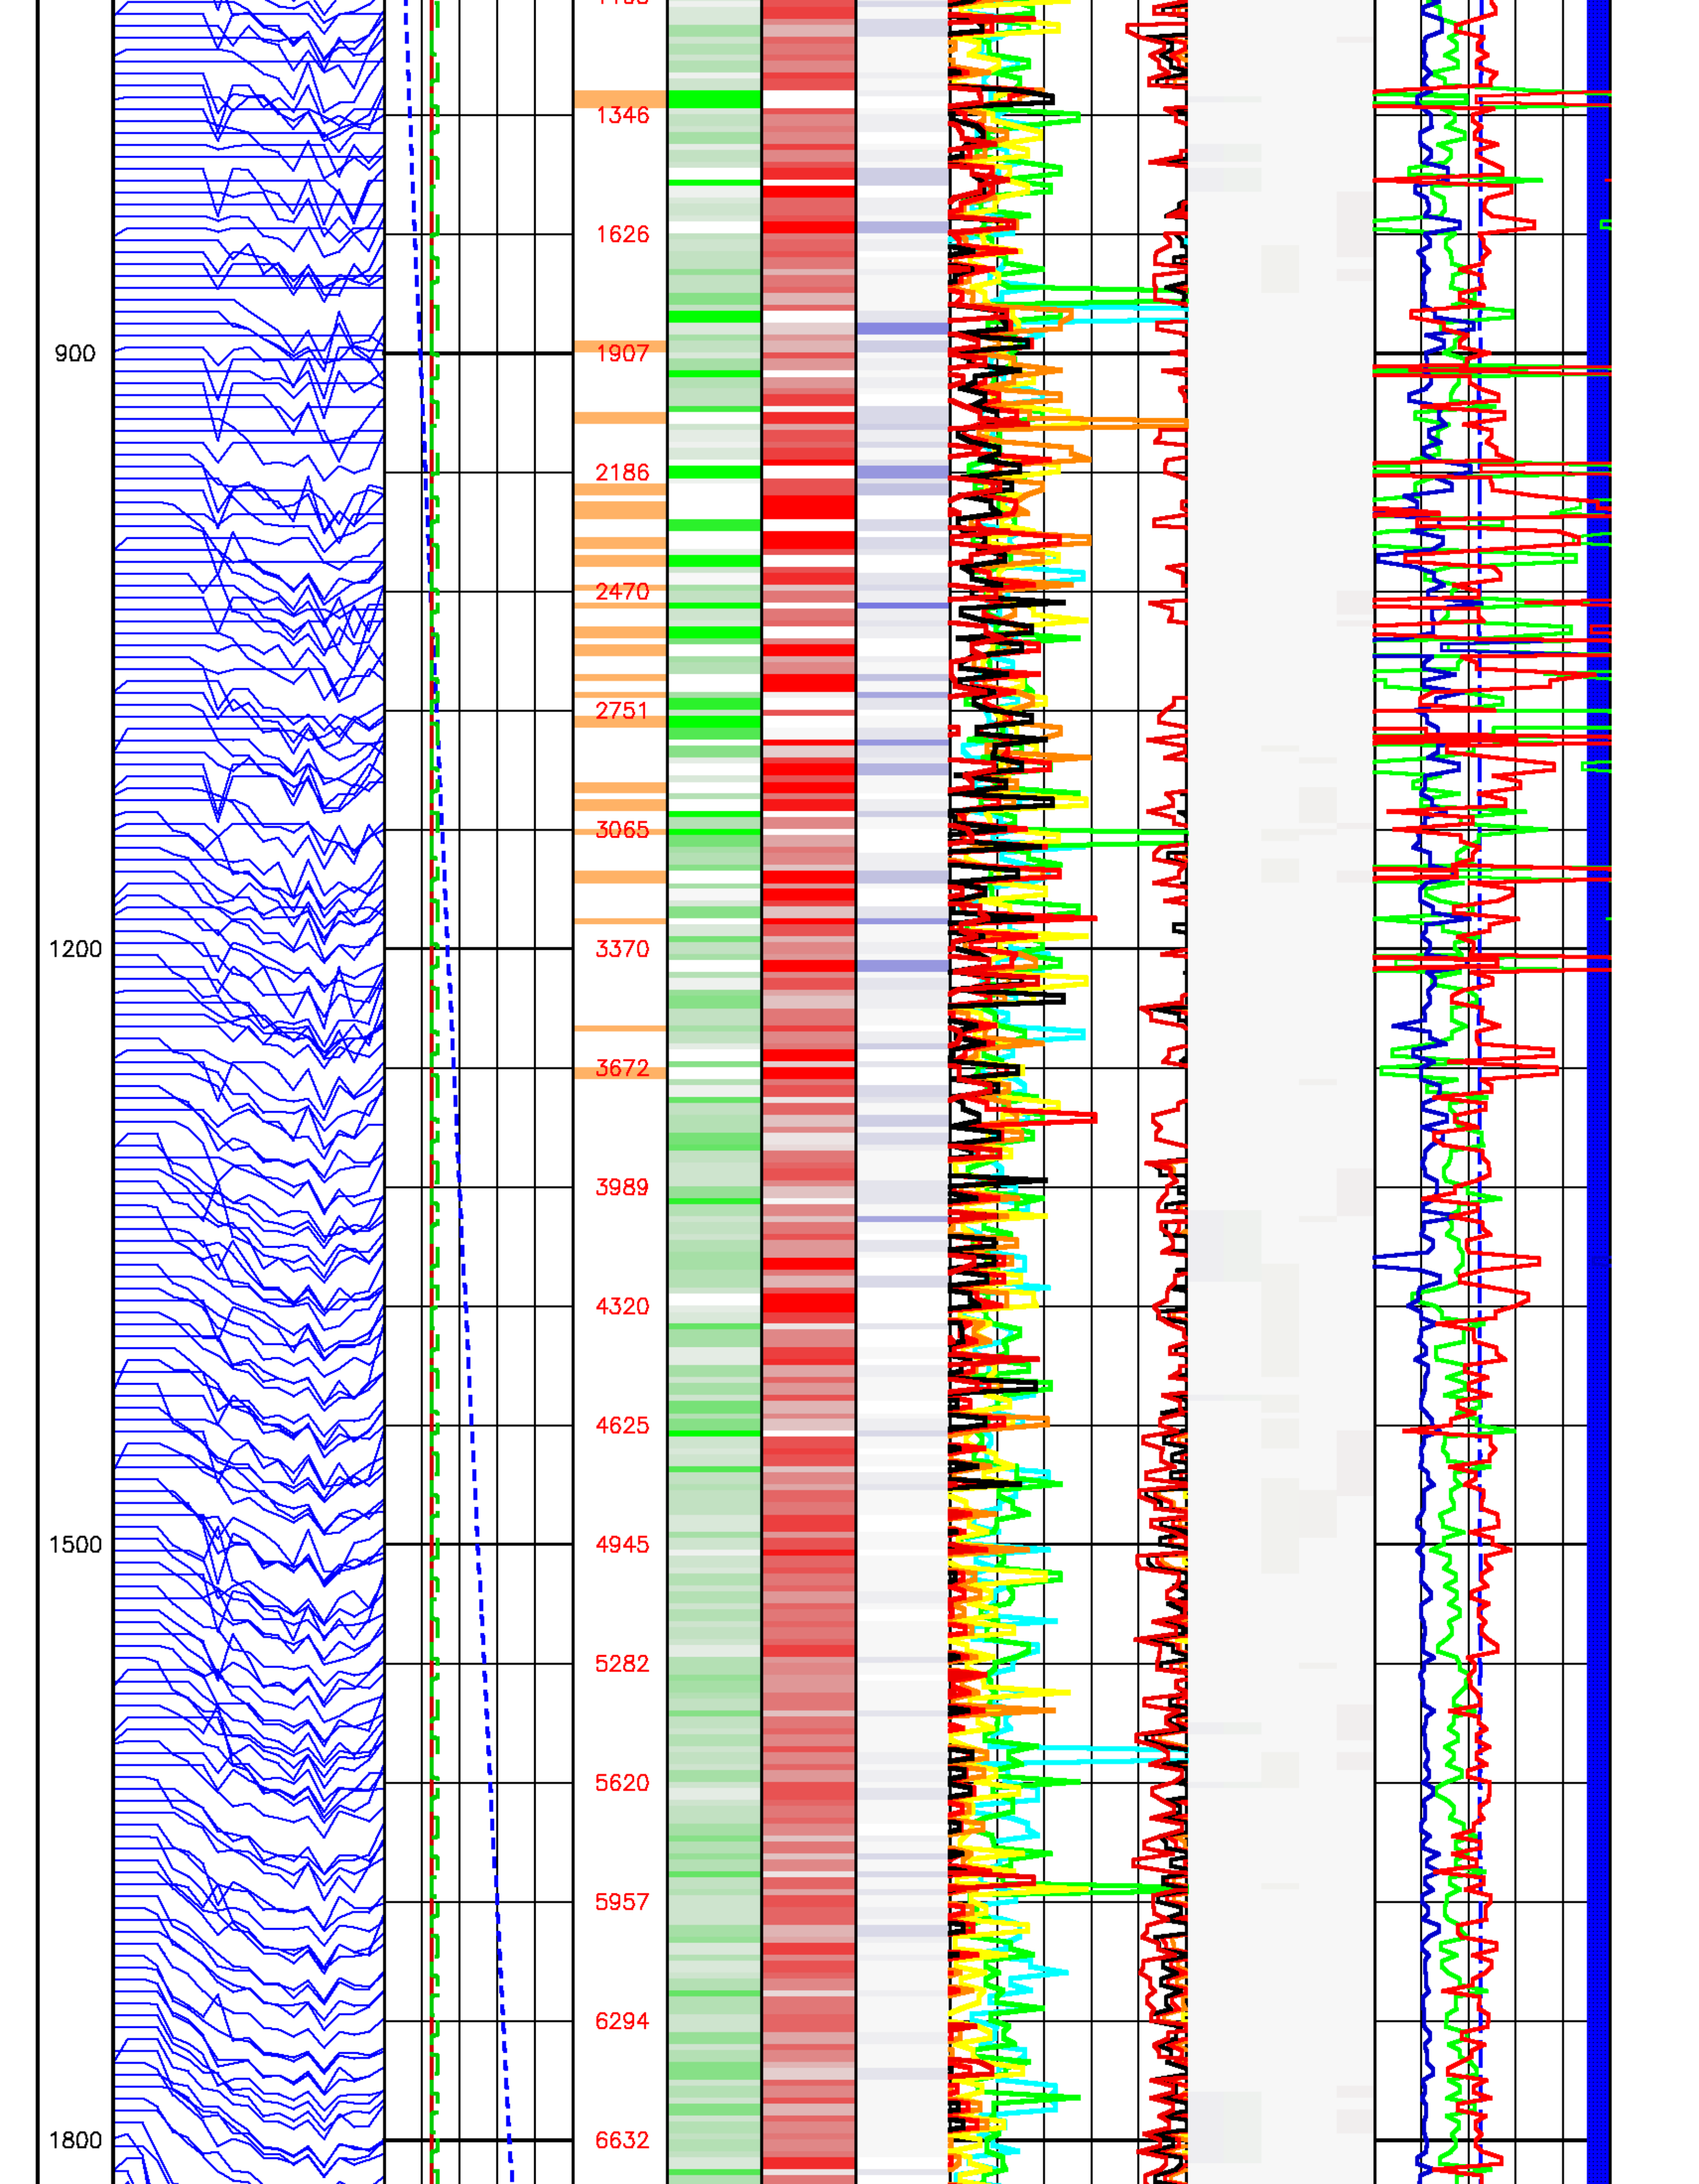
900
1200
1500
1800
1346
1626
1907
2186
2470
2751
3065
3370
3672
3989
4320
4625
4945
5282
5620
5957
6294
6632

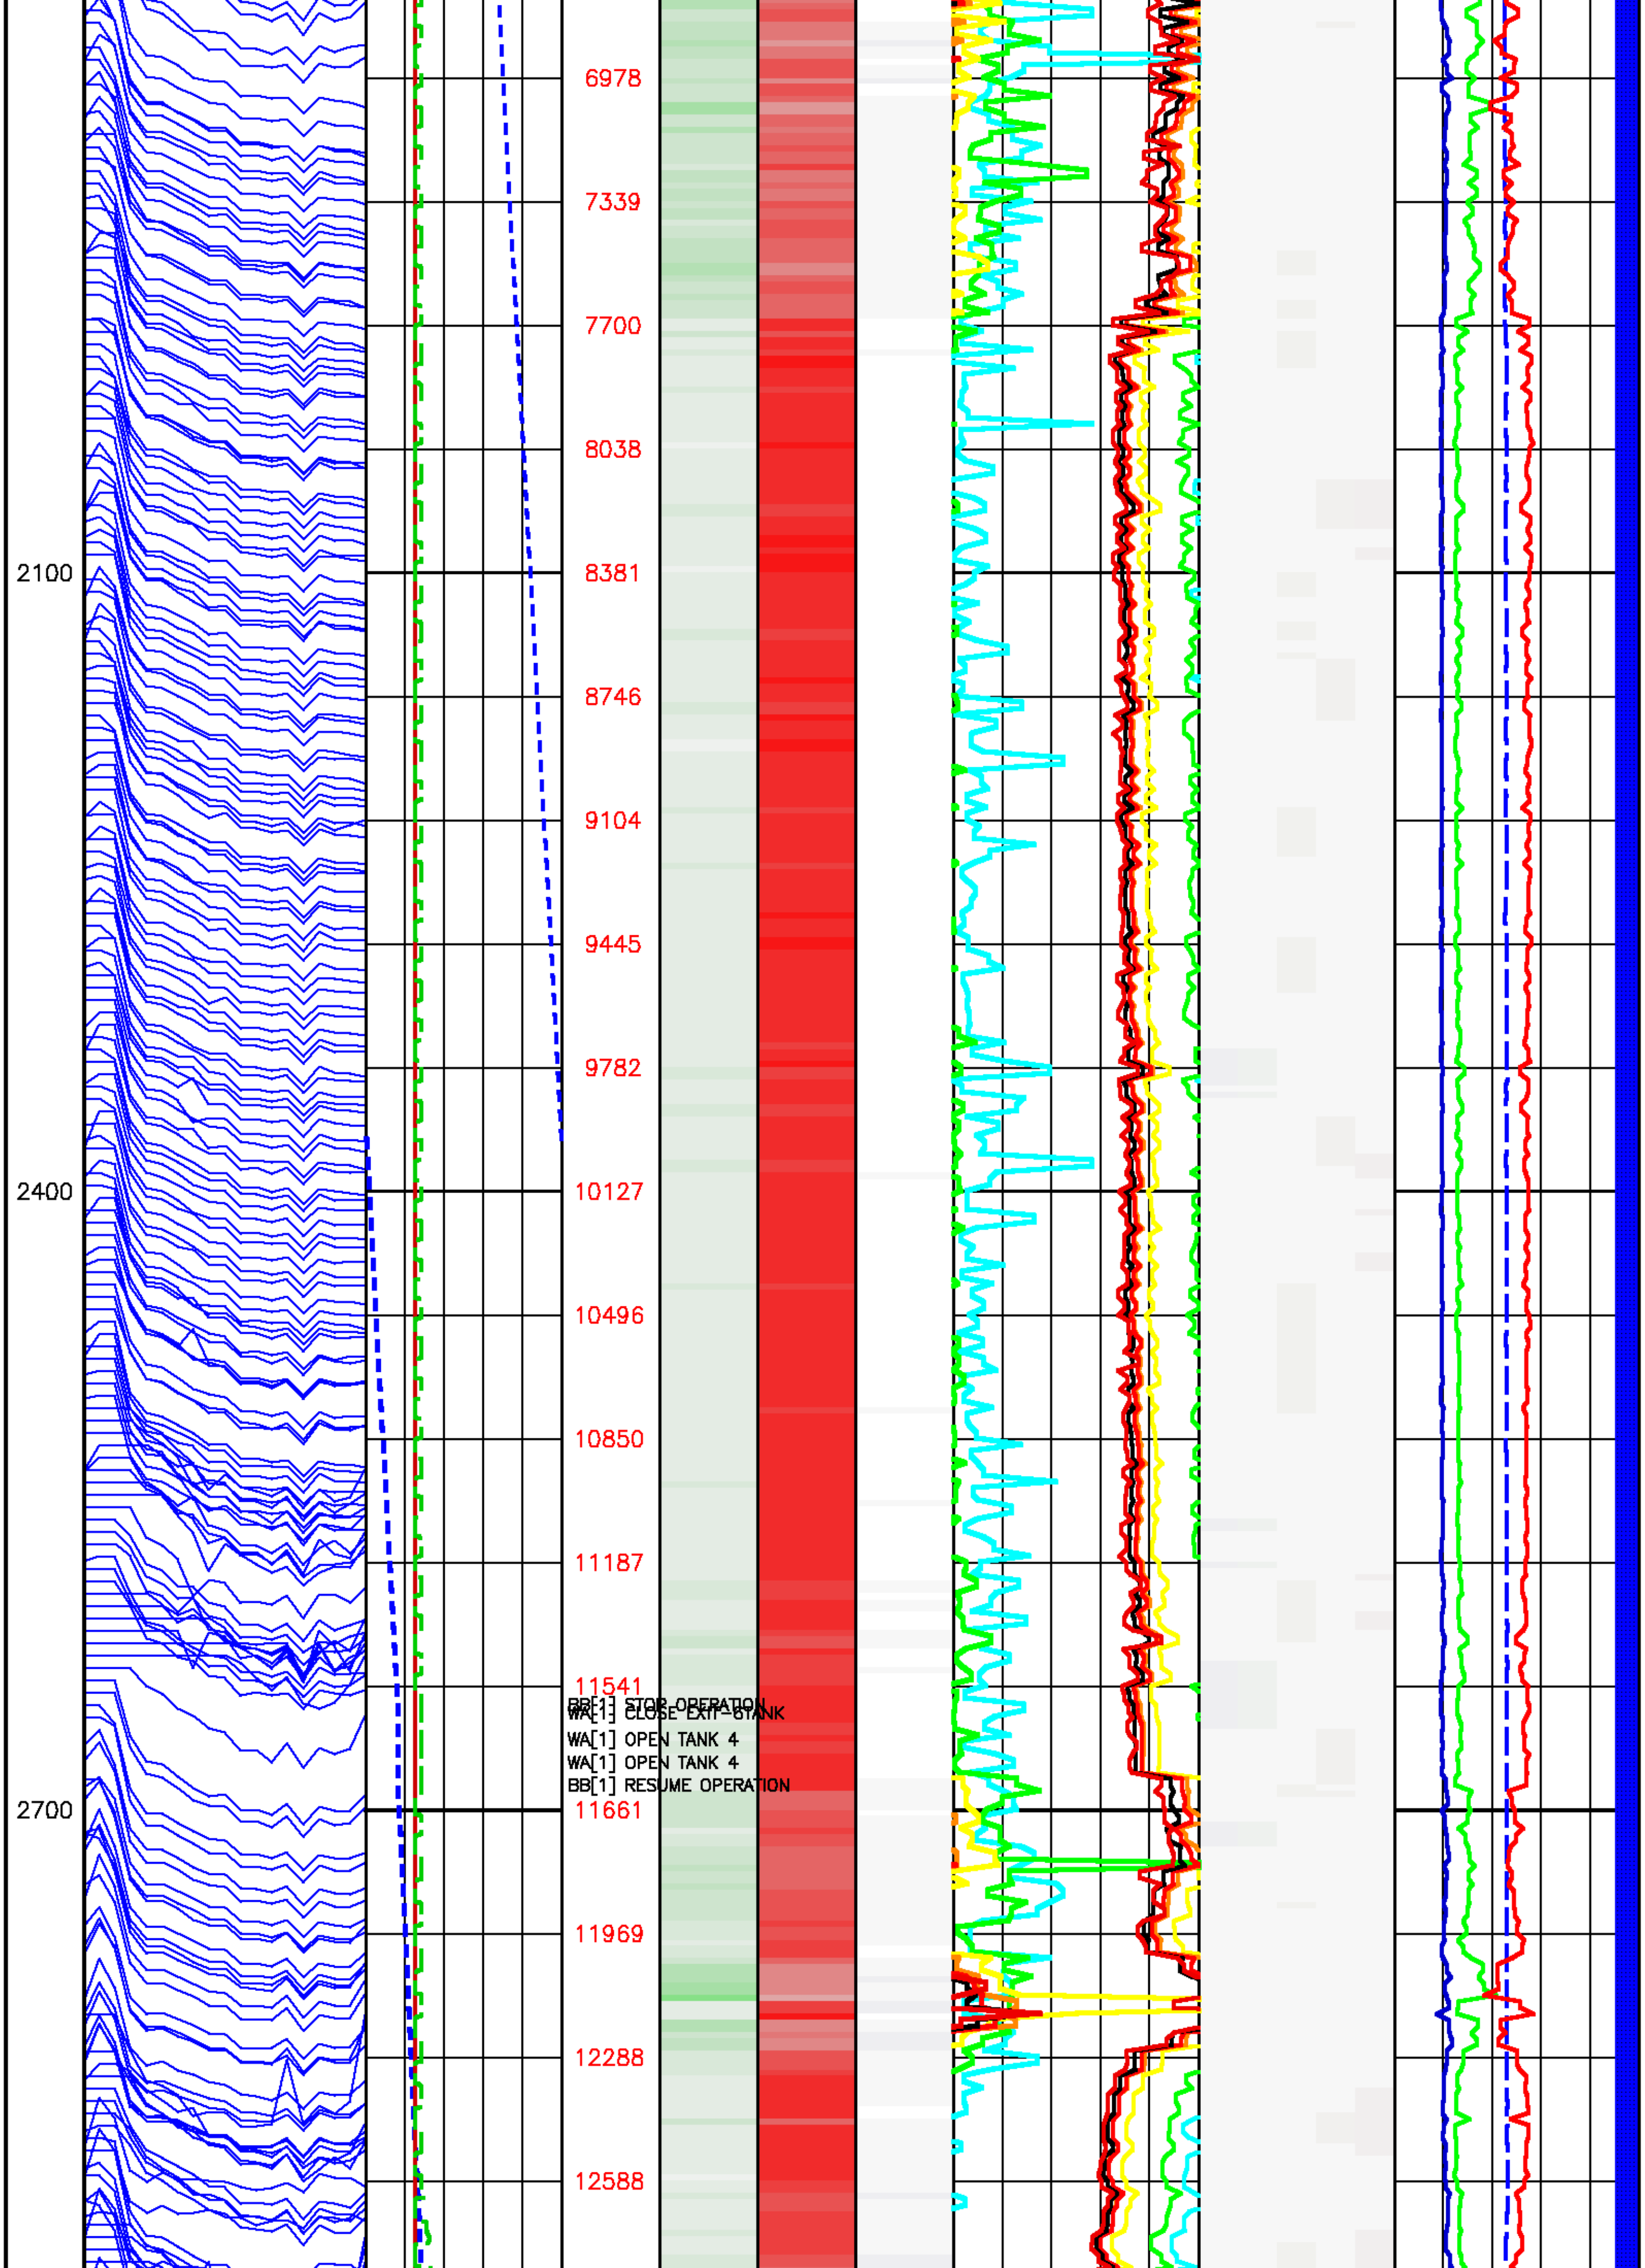

6978
7339
7700
8038
2100
8381
8746
9104
9445
9782
2400
10127
10496
10850
11187
11541
BB[1] STOP OPERATION
WA[1] CLOSE EXIT-6TANK
WA[1] OPEN TANK 4
WA[1] OPEN TANK 4
BB[1] RESUME OPERATION
2700
11661
11969
12288
12588

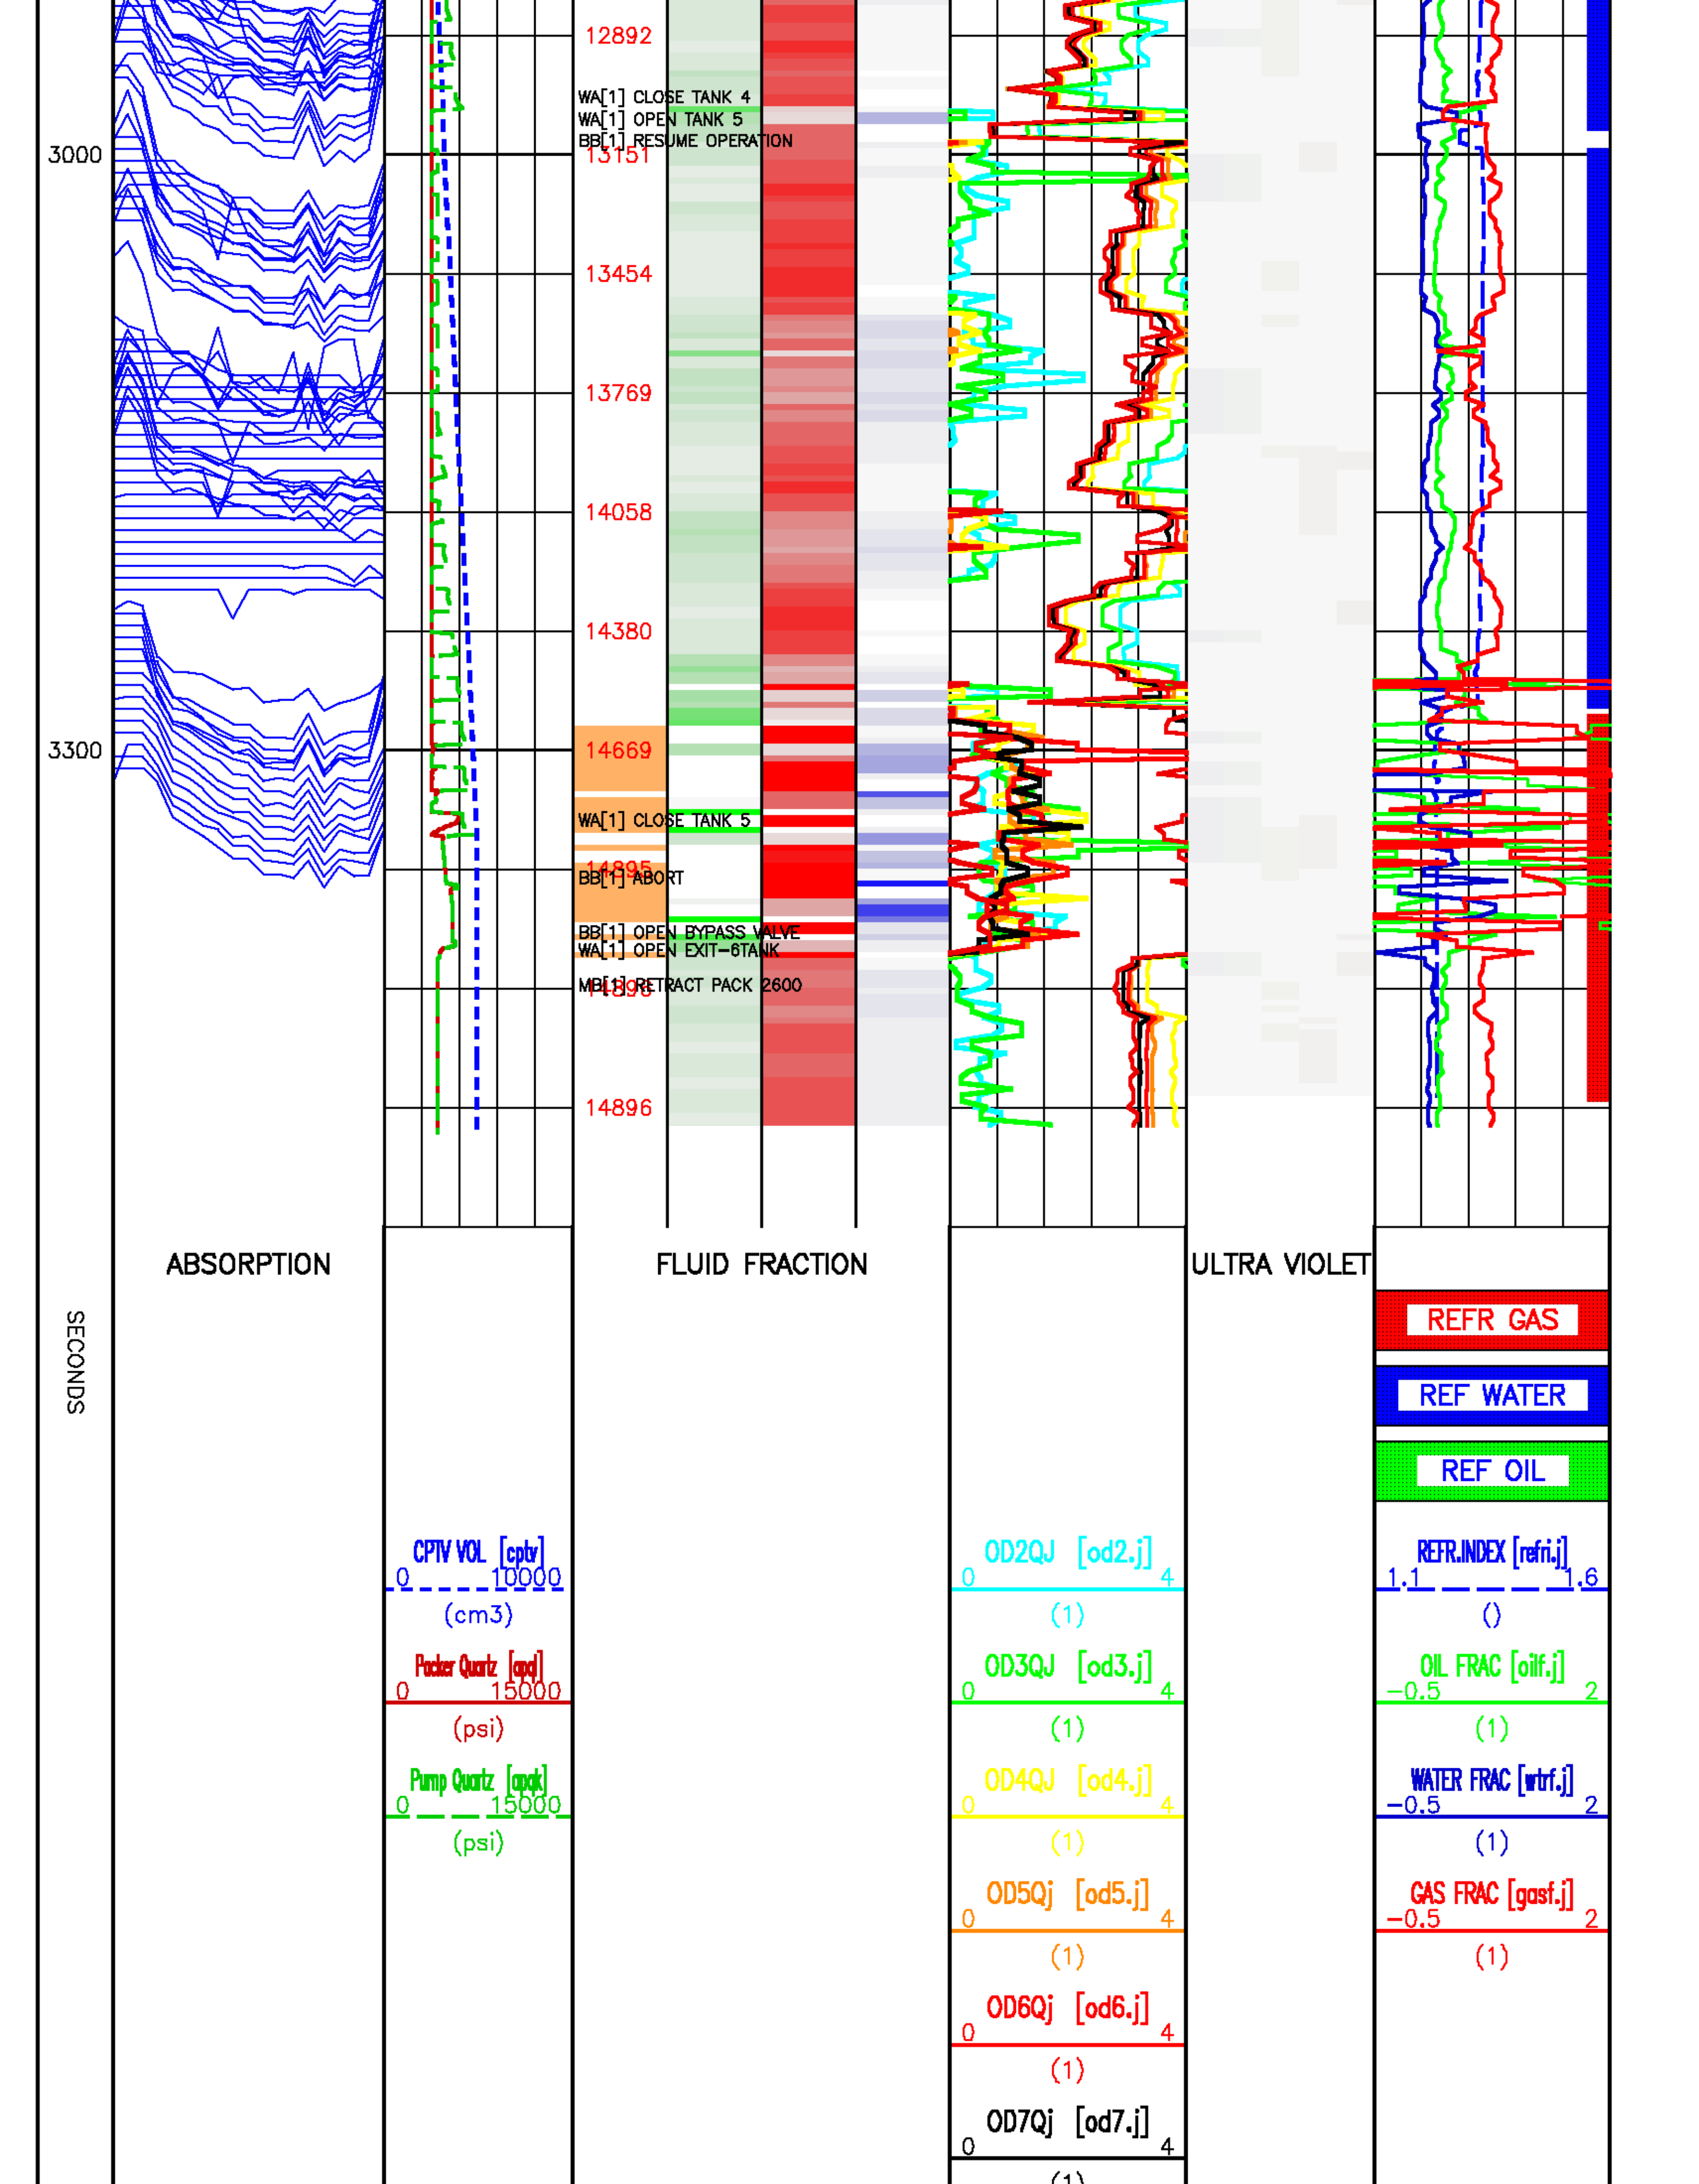

3000
3300
SECONDS
ABSORPTION
12892
13151
13454
13769
14058
14380
14669
14895
14896
WA[1] CLOSE TANK 4
WA[1] OPEN TANK 5
BB[1] RESUME OPERATION
WA[1] CLOSE TANK 5
BB[1] ABORT
BB[1] OPEN BYPASS VALVE
WA[1] OPEN EXIT-6TANK
MB[1] RETRACT PACK 2600
FLUID FRACTION
ULTRA VIOLET
REFR GAS
REF WATER
REF OIL
CPTV VOL [cptv]
0 10000
(cm3)
Packer Quartz [apqt]
0 15000
(psi)
Pump Quartz [apqk]
0 15000
(psi)
OD2QJ [od2.j]
0 4
(1)
OD3QJ [od3.j]
0 4
(1)
OD4QJ [od4.j]
0 4
(1)
OD5Qj [od5.j]
0 4
(1)
OD6Qj [od6.j]
0 4
(1)
OD7Qj [od7.j]
0 4
(1)
REFR.INDEX [refri.j]
1.1 1.6
()
OIL FRAC [oilf.j]
-0.5 2
(1)
WATER FRAC [wtrf.j]
-0.5 2
(1)
GAS FRAC [gasf.j]
-0.5 2
(1)

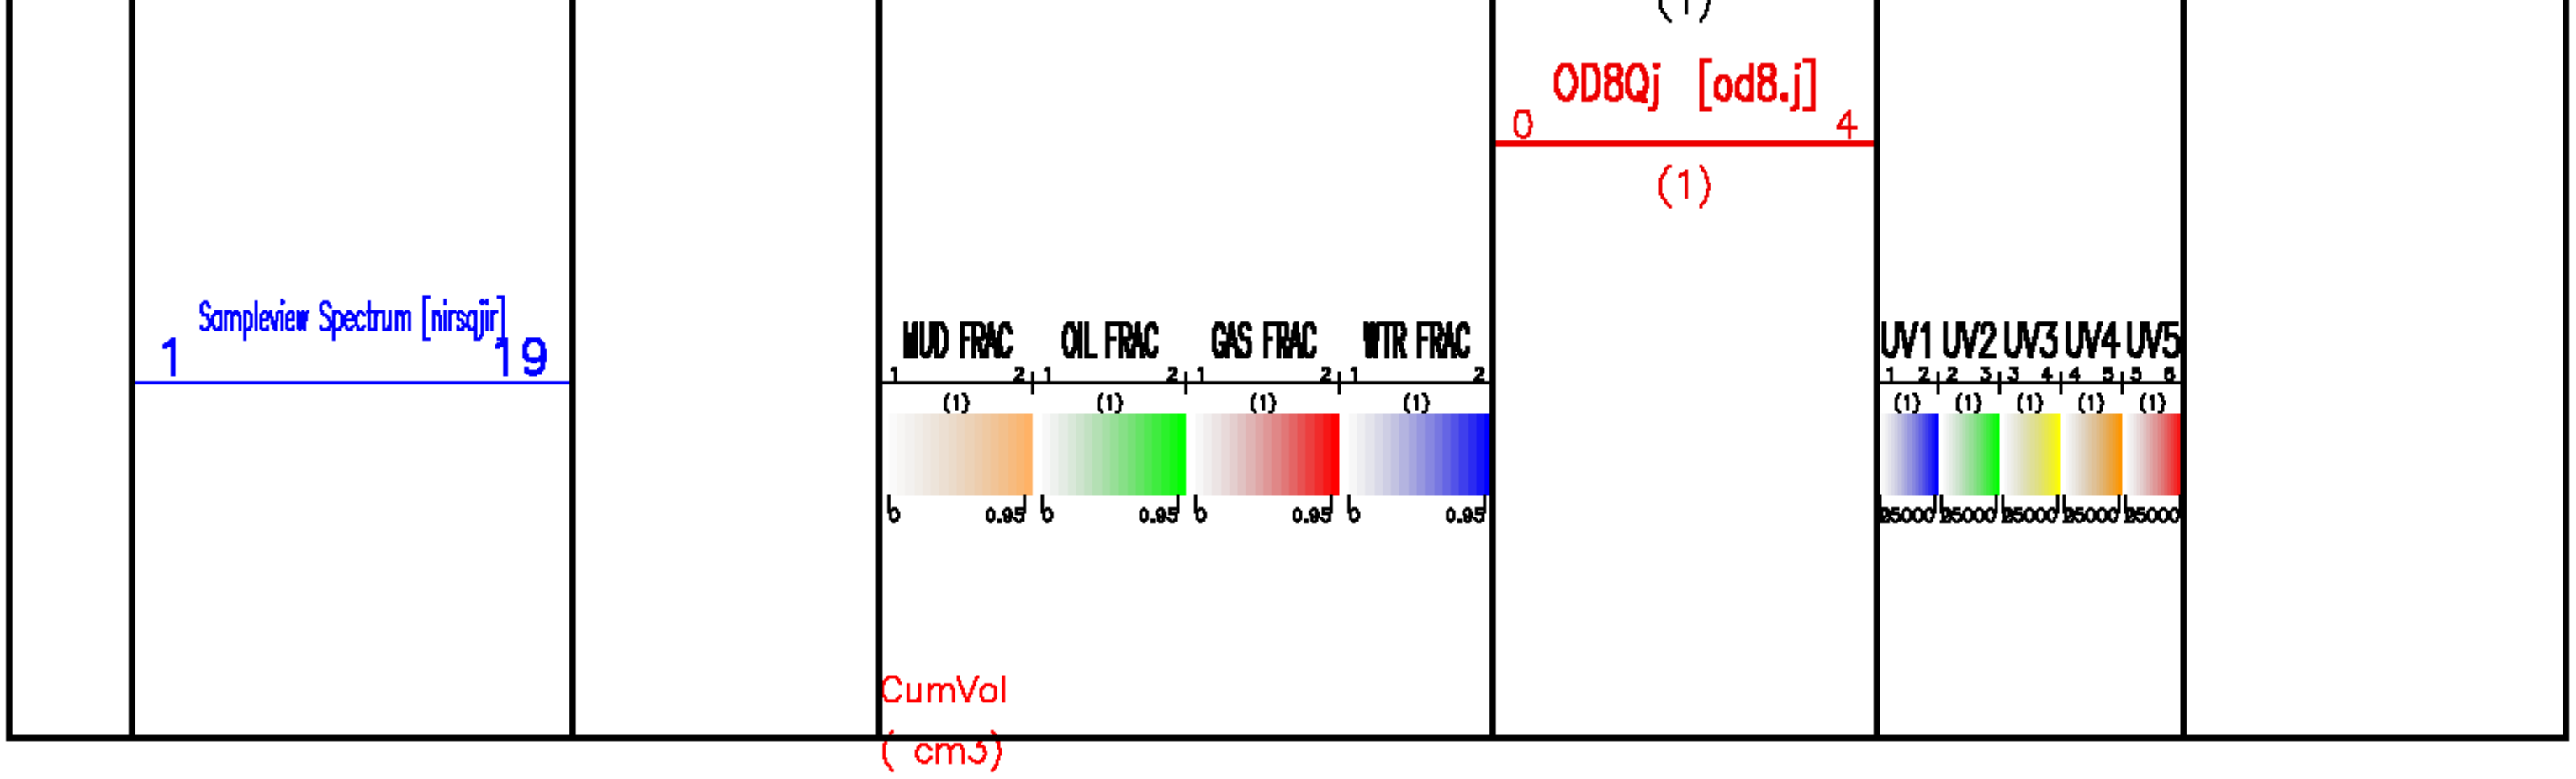

CORRELATION PASS 1

ECLIPS 5.1i Sep 16, 2005 Sun Oct 29 03:59:42 2006
Updates: 1,2,37

Pcrplt /main/61 Cplot 9.18 Pdf_Cpp /main/16 Fileview 5.00

PARAMETER AND FILTER SUMMARY REPORT

FILE: /dat1a/peak/bilabar1_D3/|800g01.prm
LOGGING MODE: DEPTH DIRECTION: UP
TOP DEPTH: 2422.703 m BOTTOM DEPTH: 2446.630 m

SYMMETRIC FILTER

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m) TOP	BOTTOM
CHT	FILTER ()	medium (1)		TOP	BOTTOM
GR	FILTER ()	medium (1)		''	''
SPEED	FILTER ()	medium (1)		''	''
TENSION	FILTER ()	medium (1)		''	''

PARAMETER AND FILTER SUMMARY REPORT

File: /dat1a/peak/bilabar1_D3/|777|03.prm
LOGGING MODE: DEPTH DIRECTION: UP
TOP DEPTH: 807.453 m BOTTOM DEPTH: 2510.028 m

SYMMETRIC FILTER

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m) TOP	BOTTOM
CHT	FILTER ()	medium (1)		TOP	BOTTOM
SPEED	FILTER ()	medium (1)		''	''
TENSION	FILTER ()	medium (1)		''	''
GR	FILTER ()	medium (1)		''	''

CURVE DESCRIPTION REPORT

CURVE NAME	CURVE ALIAS	CREATION DATE	CURVE DESCRIPTION
F1:CHT	CHT	Oct 27 21:41:17 2006	CABLE HEAD TENSION
F1:GR	GR	Oct 27 21:41:17 2006	GAMMA RAY
F1:SPD	SPD	Oct 27 21:41:17 2006	SPEED
F1:TEN	TEN	Oct 27 21:41:17 2006	DIFFERENTIAL TENSION
F1:TTEN	TTEN	Oct 27 21:41:17 2006	TOTAL TENSION

CURVE MEASURE POINT OFFSET

CURVE MEASURE POINT OFFSET

CURVE	OFFSET (m)	CURVE	OFFSET (m)	CURVE	OFFSET (m)	CURVE	OFFSET (m)
CHT	-0.76	SPD	0.00	TTEN	-0.76		
GR	23.85	TEN	-0.76				

Presentation	: sys1:/dat1a/peak/bilabari_D3/CORR1.pdf [1:200 Scale]
Plot Interval	: 2390 - 2425 Meters
Data File 1	: F1 : sys1:/dat1a/peak/bilabari_D3/l800g01.aff
Created On	: Oct 27 21:41:17 2006
Company	: PEAK PETROLEUM
Well	: BILABRI D3
Field	: BILABRI
File Interval	: 2393.75 - 2446.63 Meters
Oct	: l800g
Data File 2	: F2 : sys1:/dat1a/peak/bilabari_D3/slams.xtf
Created On	: Oct 25 23:01:34 2006
Company	: PEAK PETROLEUM
Well	: BILABRI D3
Field	: BILABRI
File Interval	: 769.772 - 2557.88 Meters
Oct	: l777l

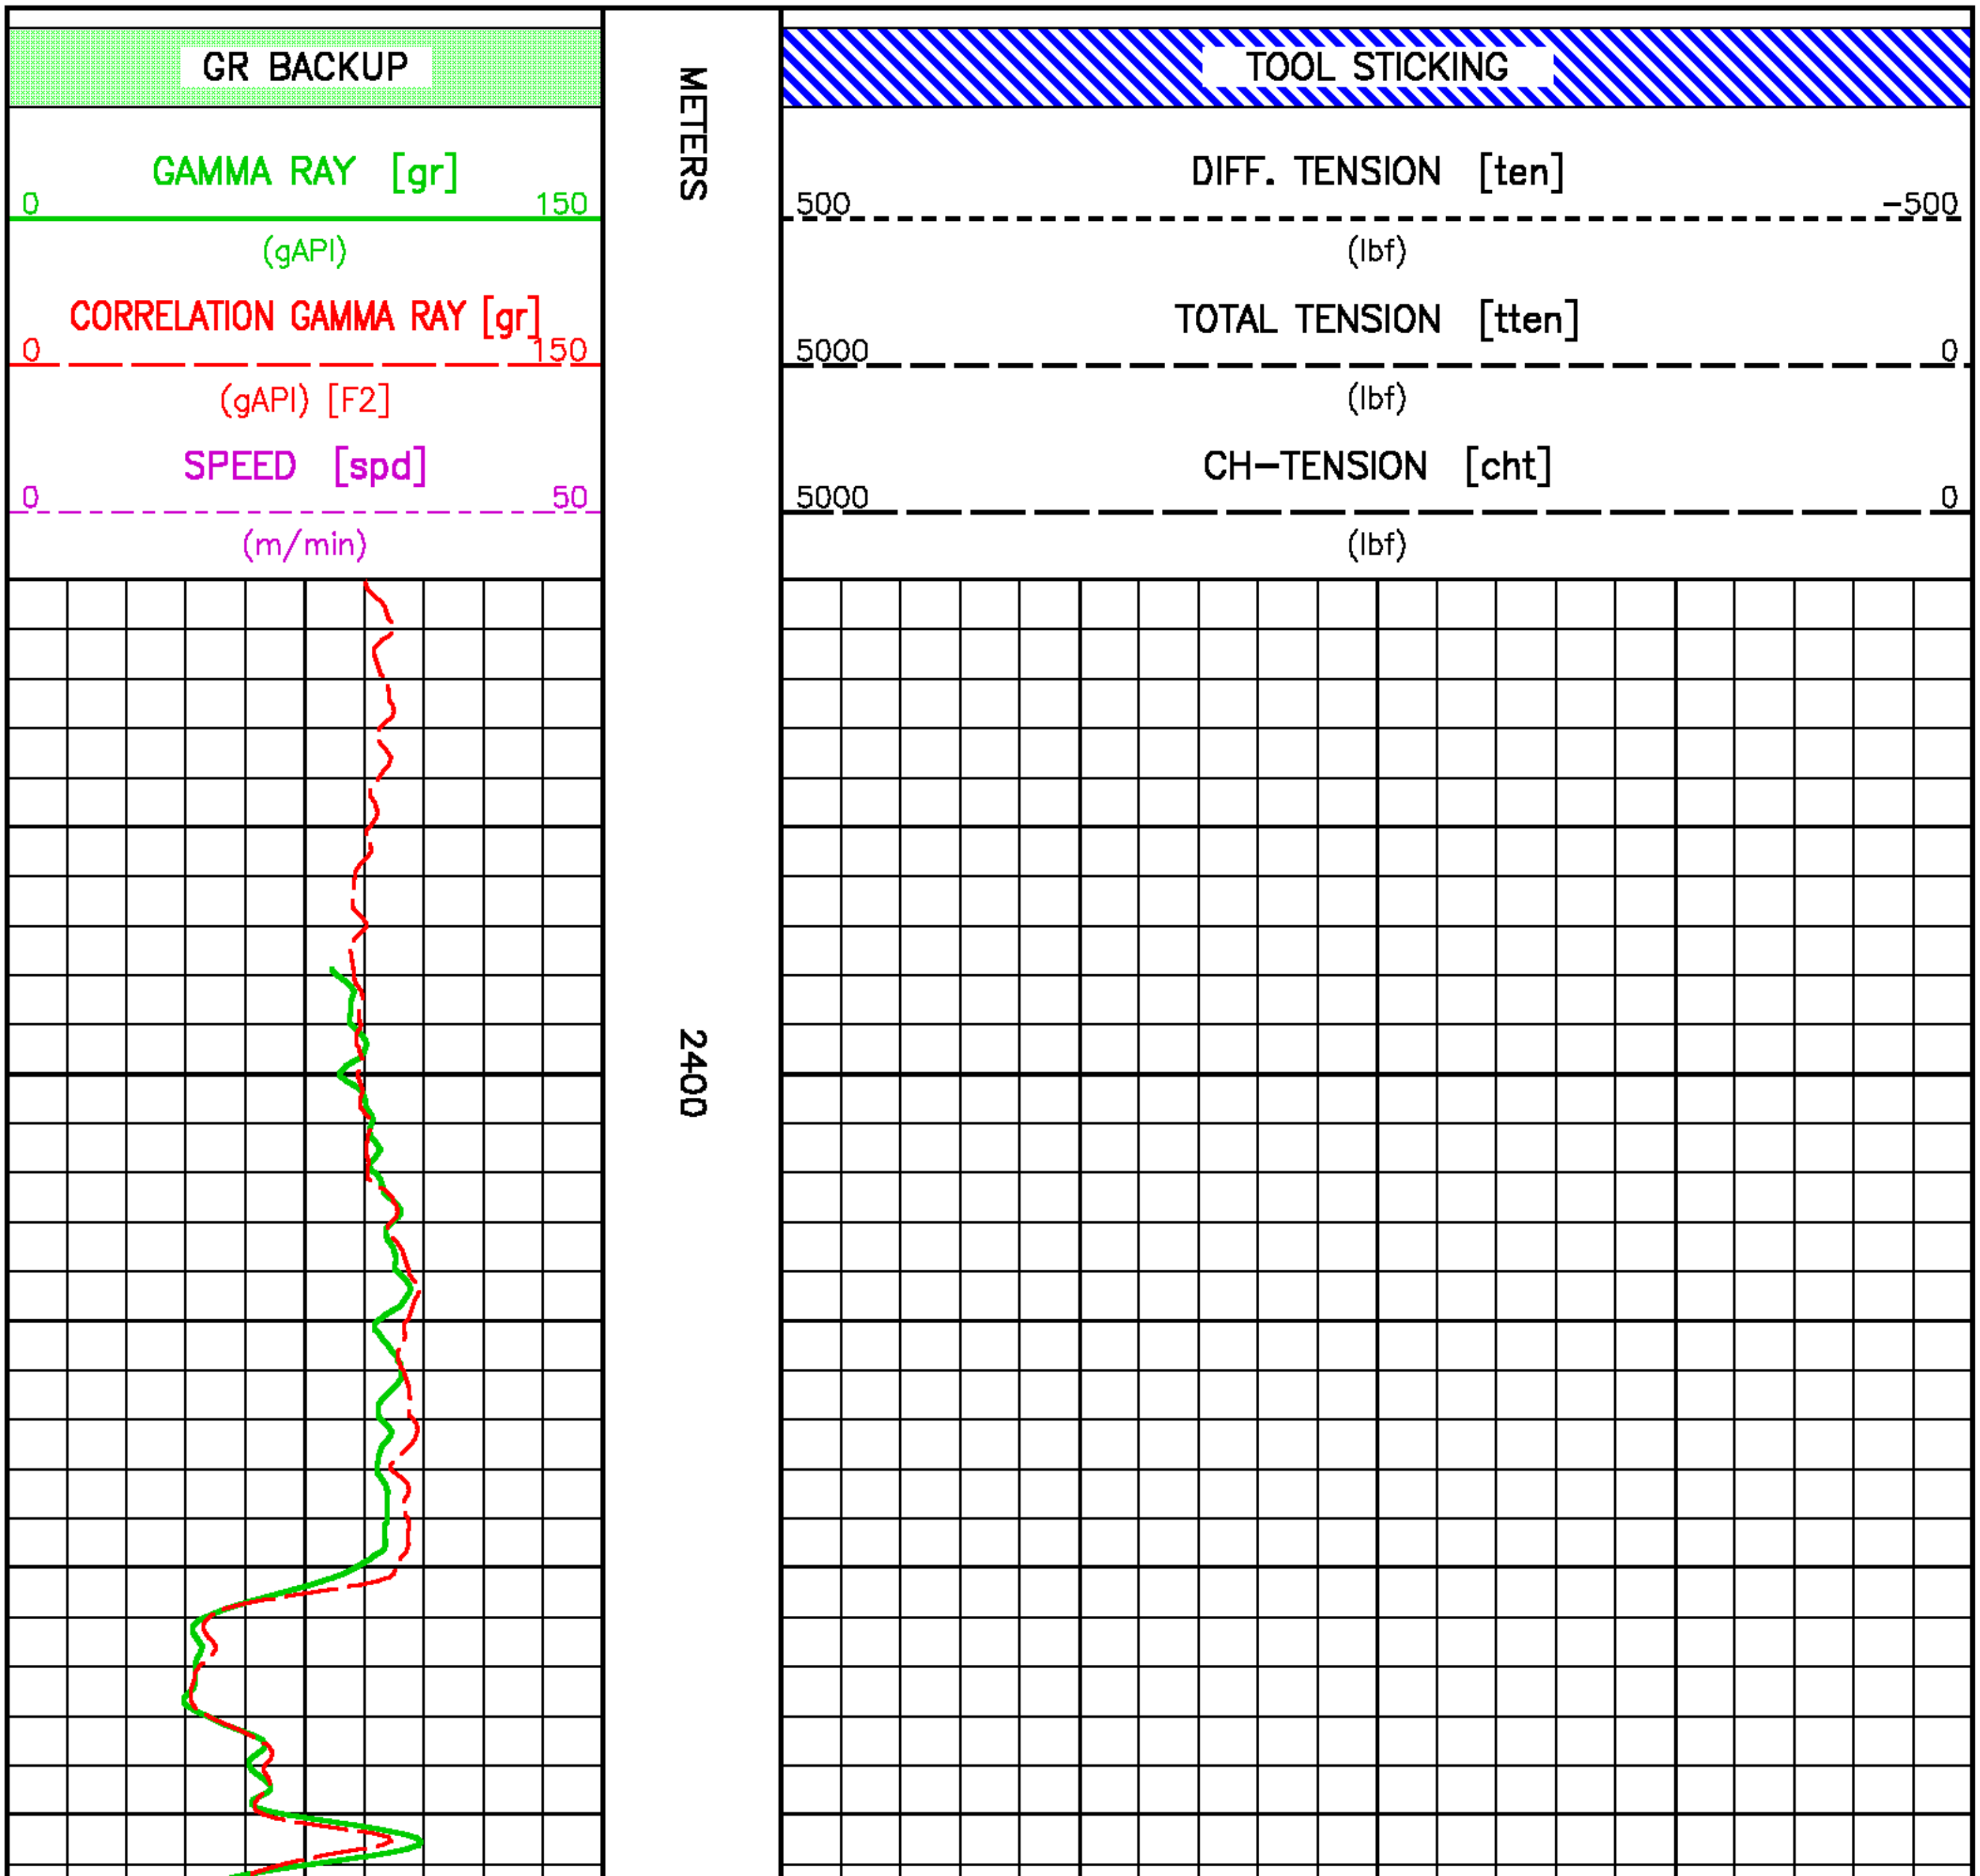

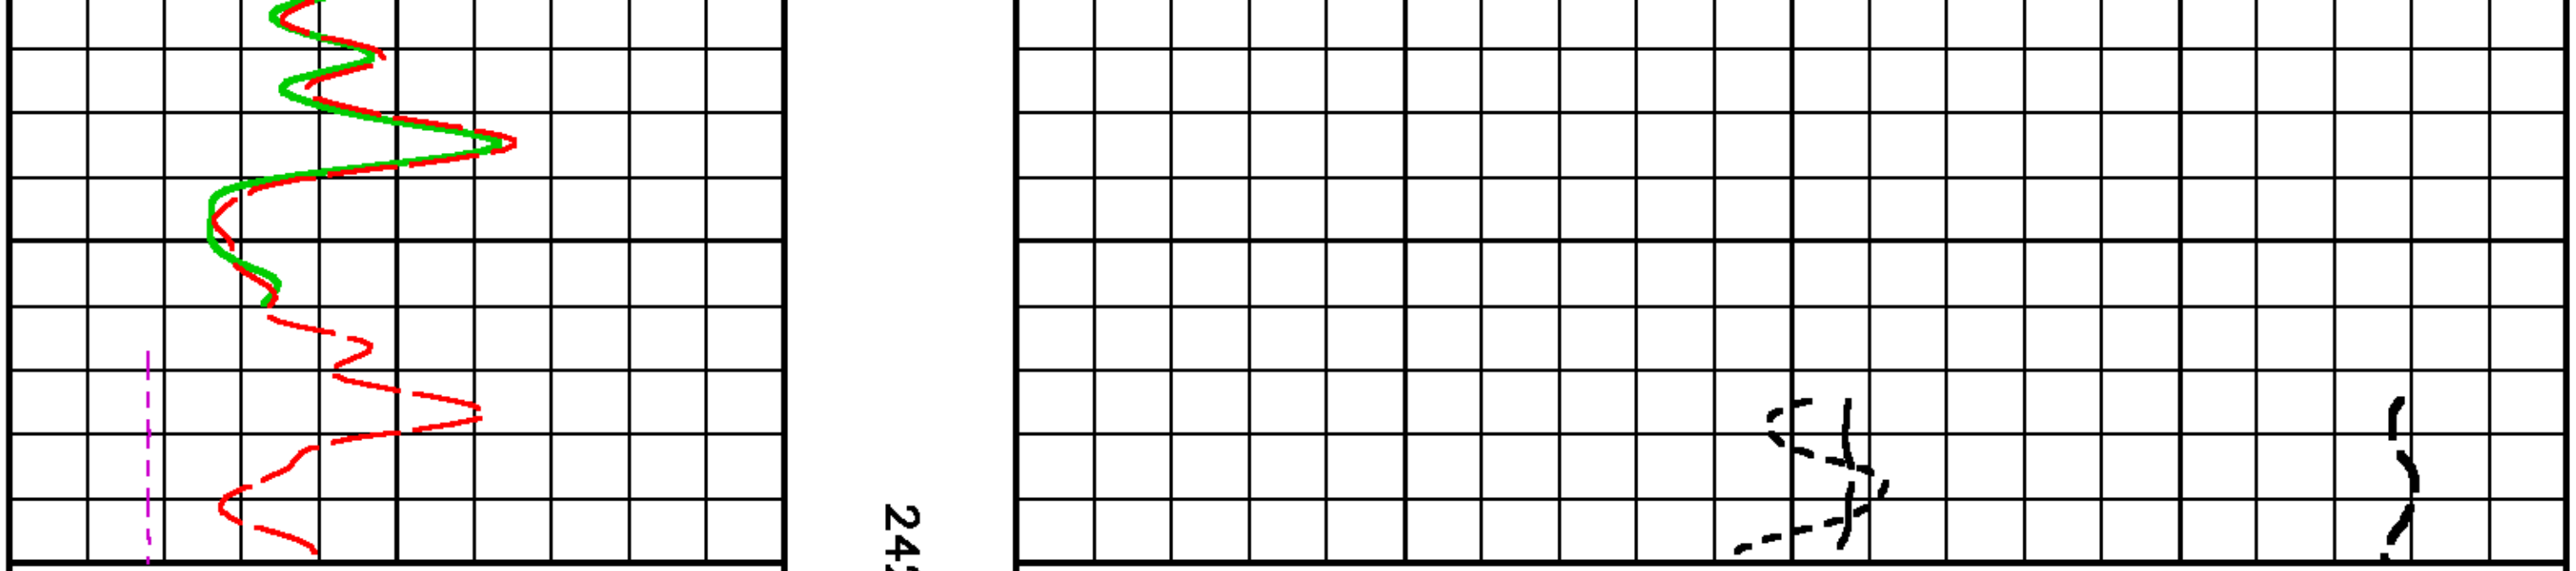

GR BACKUP

GAMMA RAY [gr]
0 150
(gAPI)

CORRELATION GAMMA RAY [gr]
0 150
(gAPI) [F2]

SPEED [spd]
0 50
(m/min)

TOOL STICKING

DIFF. TENSION [ten]
500 -500
(lbf)

TOTAL TENSION [tten]
5000 0
(lbf)

CH-TENSION [cht]
5000 0
(lbf)

CORRELATION PASS 2

ECLIPS 5.1i Sep 16, 2005 Sun Oct 29 04:00:48 2006
Updates: 1,2,37

Pcrplt /main/61 Cplot 9.18 Pdf_Cpp /main/16 Fileview 5.00

PARAMETER AND FILTER SUMMARY REPORT

FILE: /dat1a/peak/bilabari_D3/|800g30.prm
LOGGING MODE: DEPTH DIRECTION: UP
TOP DEPTH: 2422.779 m BOTTOM DEPTH: 2432.304 m

SYMMETRIC FILTER

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
				TOP	BOTTOM
CHT	FILTER ()	medium (1)			
GR	FILTER ()	medium (1)		''	''
SPEED	FILTER ()	medium (1)		''	''
TENSION	FILTER ()	medium (1)		''	''

PARAMETER AND FILTER SUMMARY REPORT

File: /dat1a/peak/bilabari_D3/|777|03.prm
LOGGING MODE: DEPTH DIRECTION: UP
TOP DEPTH: 807.453 m BOTTOM DEPTH: 2510.028 m

SYMMETRIC FILTER

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
				TOP	BOTTOM
CHT	FILTER ()	medium (1)			
SPEED	FILTER ()	medium (1)		''	''
TENSION	FILTER ()	medium (1)		''	''
GR	FILTER ()	medium (1)		''	''

CURVE DESCRIPTION REPORT

CURVE NAME	CURVE ALIAS	CREATION DATE	CURVE DESCRIPTION
F1:CHT	CHT	Oct 28 03:21:38 2006	CABLE HEAD TENSION
F1:GR	GR	Oct 28 03:21:38 2006	GAMMA RAY
F1:SPD	SPD	Oct 28 03:21:38 2006	SPEED
F1:TEN	TEN	Oct 28 03:21:38 2006	DIFFERENTIAL TENSION
F1:TTEN	TTEN	Oct 28 03:21:38 2006	TOTAL TENSION

CURVE MEASURE POINT OFFSET

CURVE	OFFSET (m)	CURVE	OFFSET (m)	CURVE	OFFSET (m)	CURVE	OFFSET (m)
CHT	-0.76	SPD	0.00	TTEN	-0.76		
GR	23.85	TEN	-0.76				

Presentation : sys1:/dat1a/peak/bilabari_D3/CORR2.pdf [1:200 Scale]
Plot Interval : 2400 - 2425 Meters

Data File 1 : F1 : sys1:/dat1a/peak/bilabari_D3/j800g30.aff
Created On : Oct 28 03:21:38 2006
Company : PEAK PETROLEUM
Well : BILABRI D3
Field : BILABRI
File Interval : 2402.66 - 2440.53 Meters
Oct : j800g

Data File 2 : F2 : sys1:/dat1a/peak/bilabari_D3/slams.xtf
Created On : Oct 25 23:01:34 2006
Company : PEAK PETROLEUM
Well : BILABRI D3
Field : BILABRI
File Interval : 769.772 - 2557.88 Meters
Oct : j777j

GR BACKUP

GAMMA RAY [gr]
0 150
(gAPI)

CORRELATION GAMMA RAY [gr]
0 150
(gAPI) [F2]

SPEED [spd]
0 50
(m/min)

METERS

TOOL STICKING

DIFF. TENSION [ten]
500 -500
(lbf)

TOTAL TENSION [tten]
5000 0
(lbf)

CH-TENSION [cht]
5000 0
(lbf)

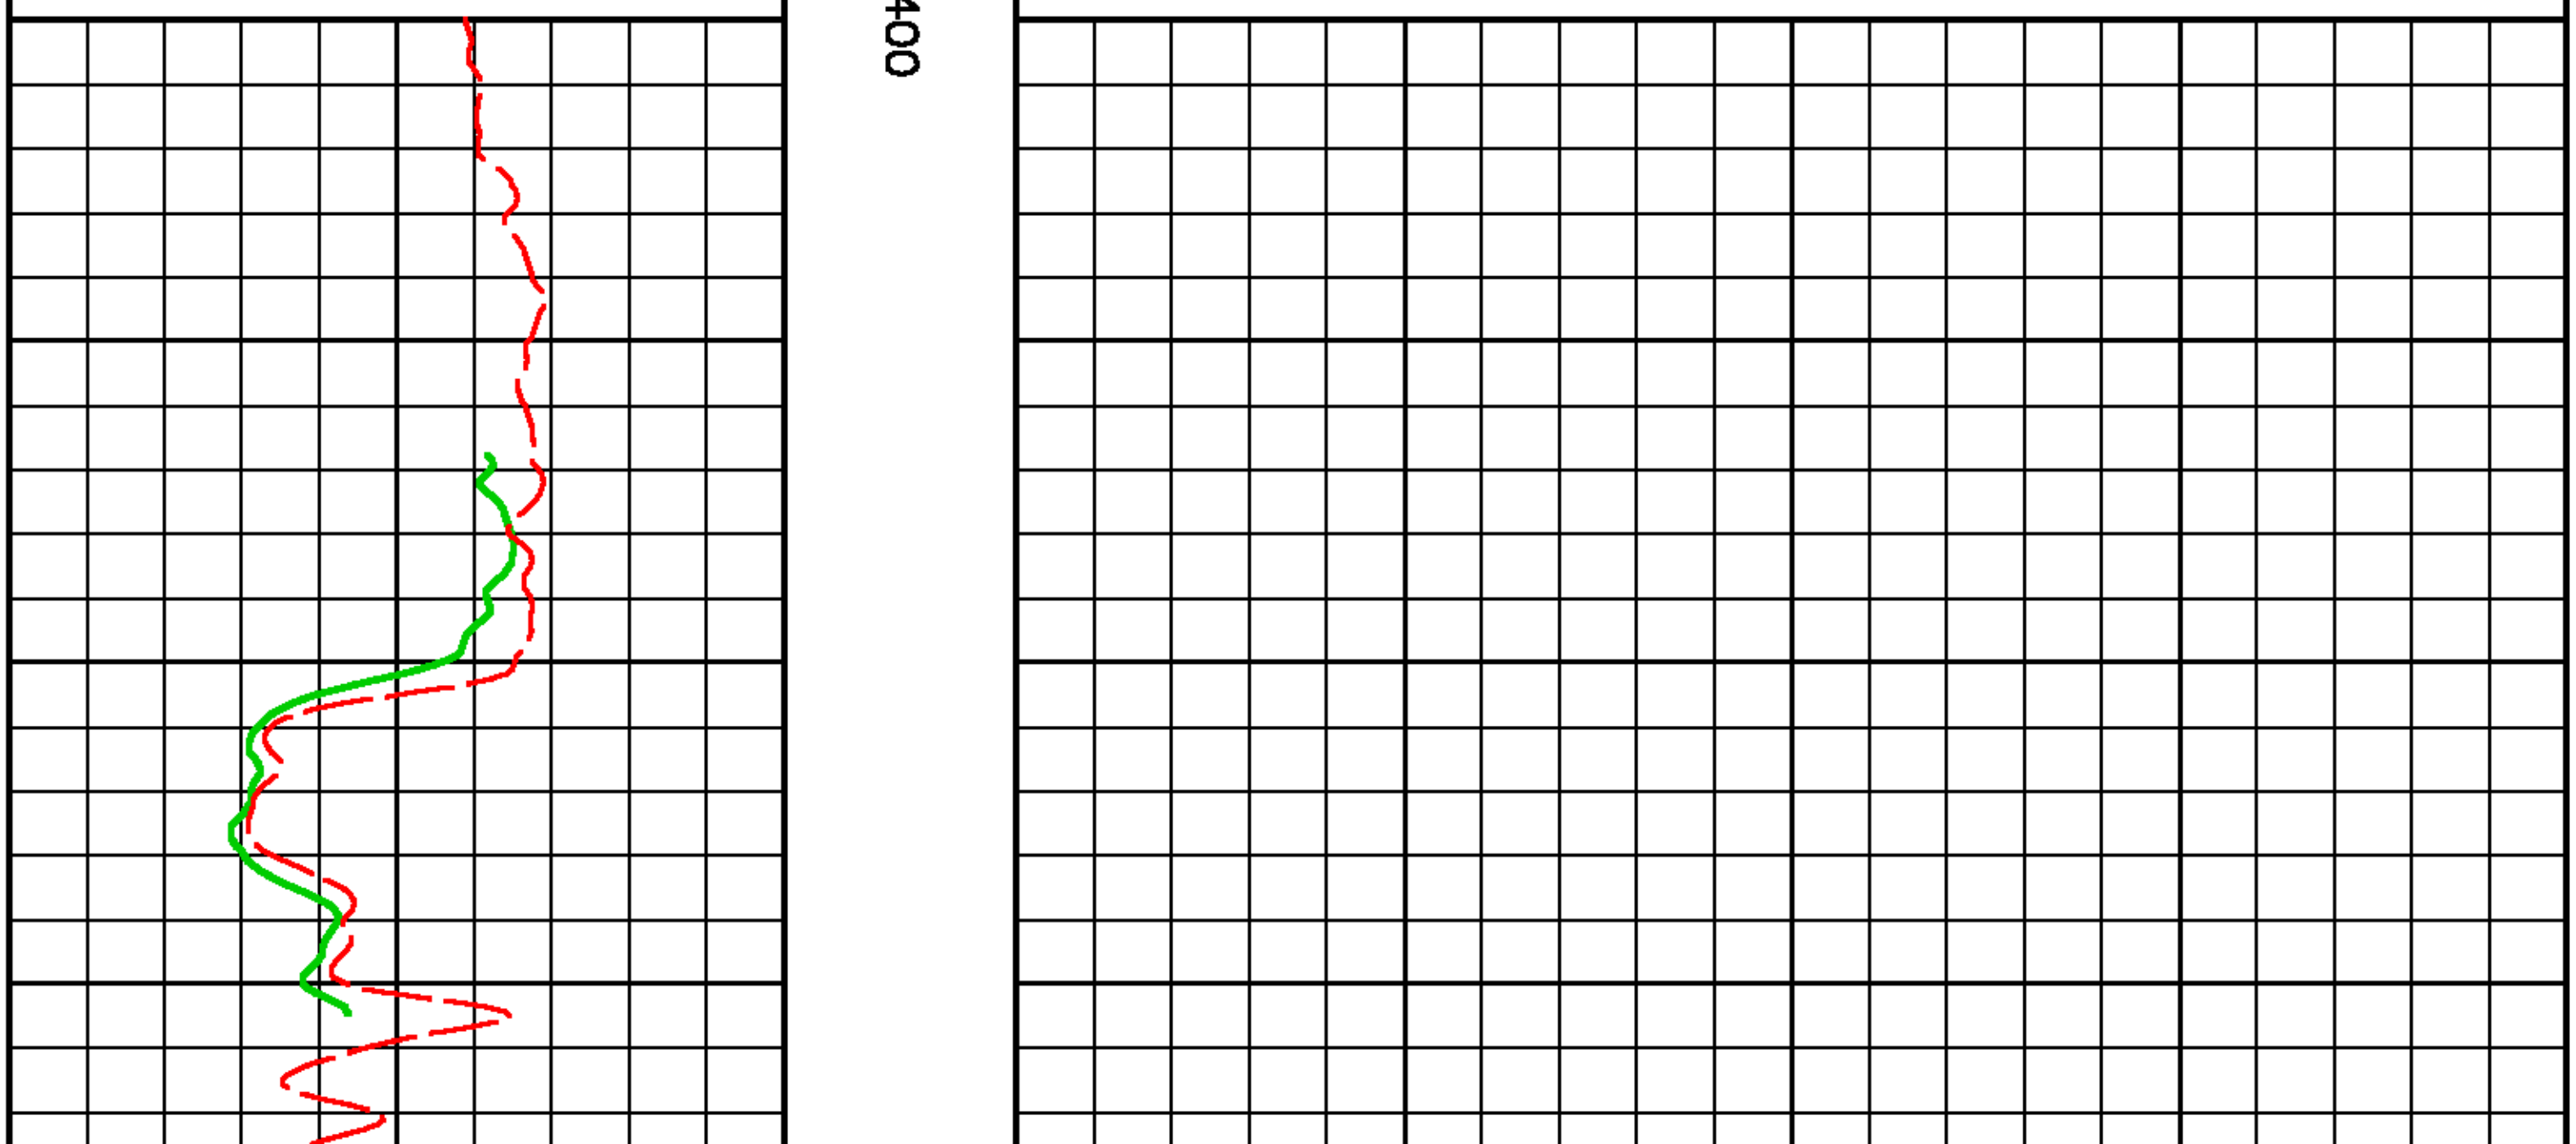

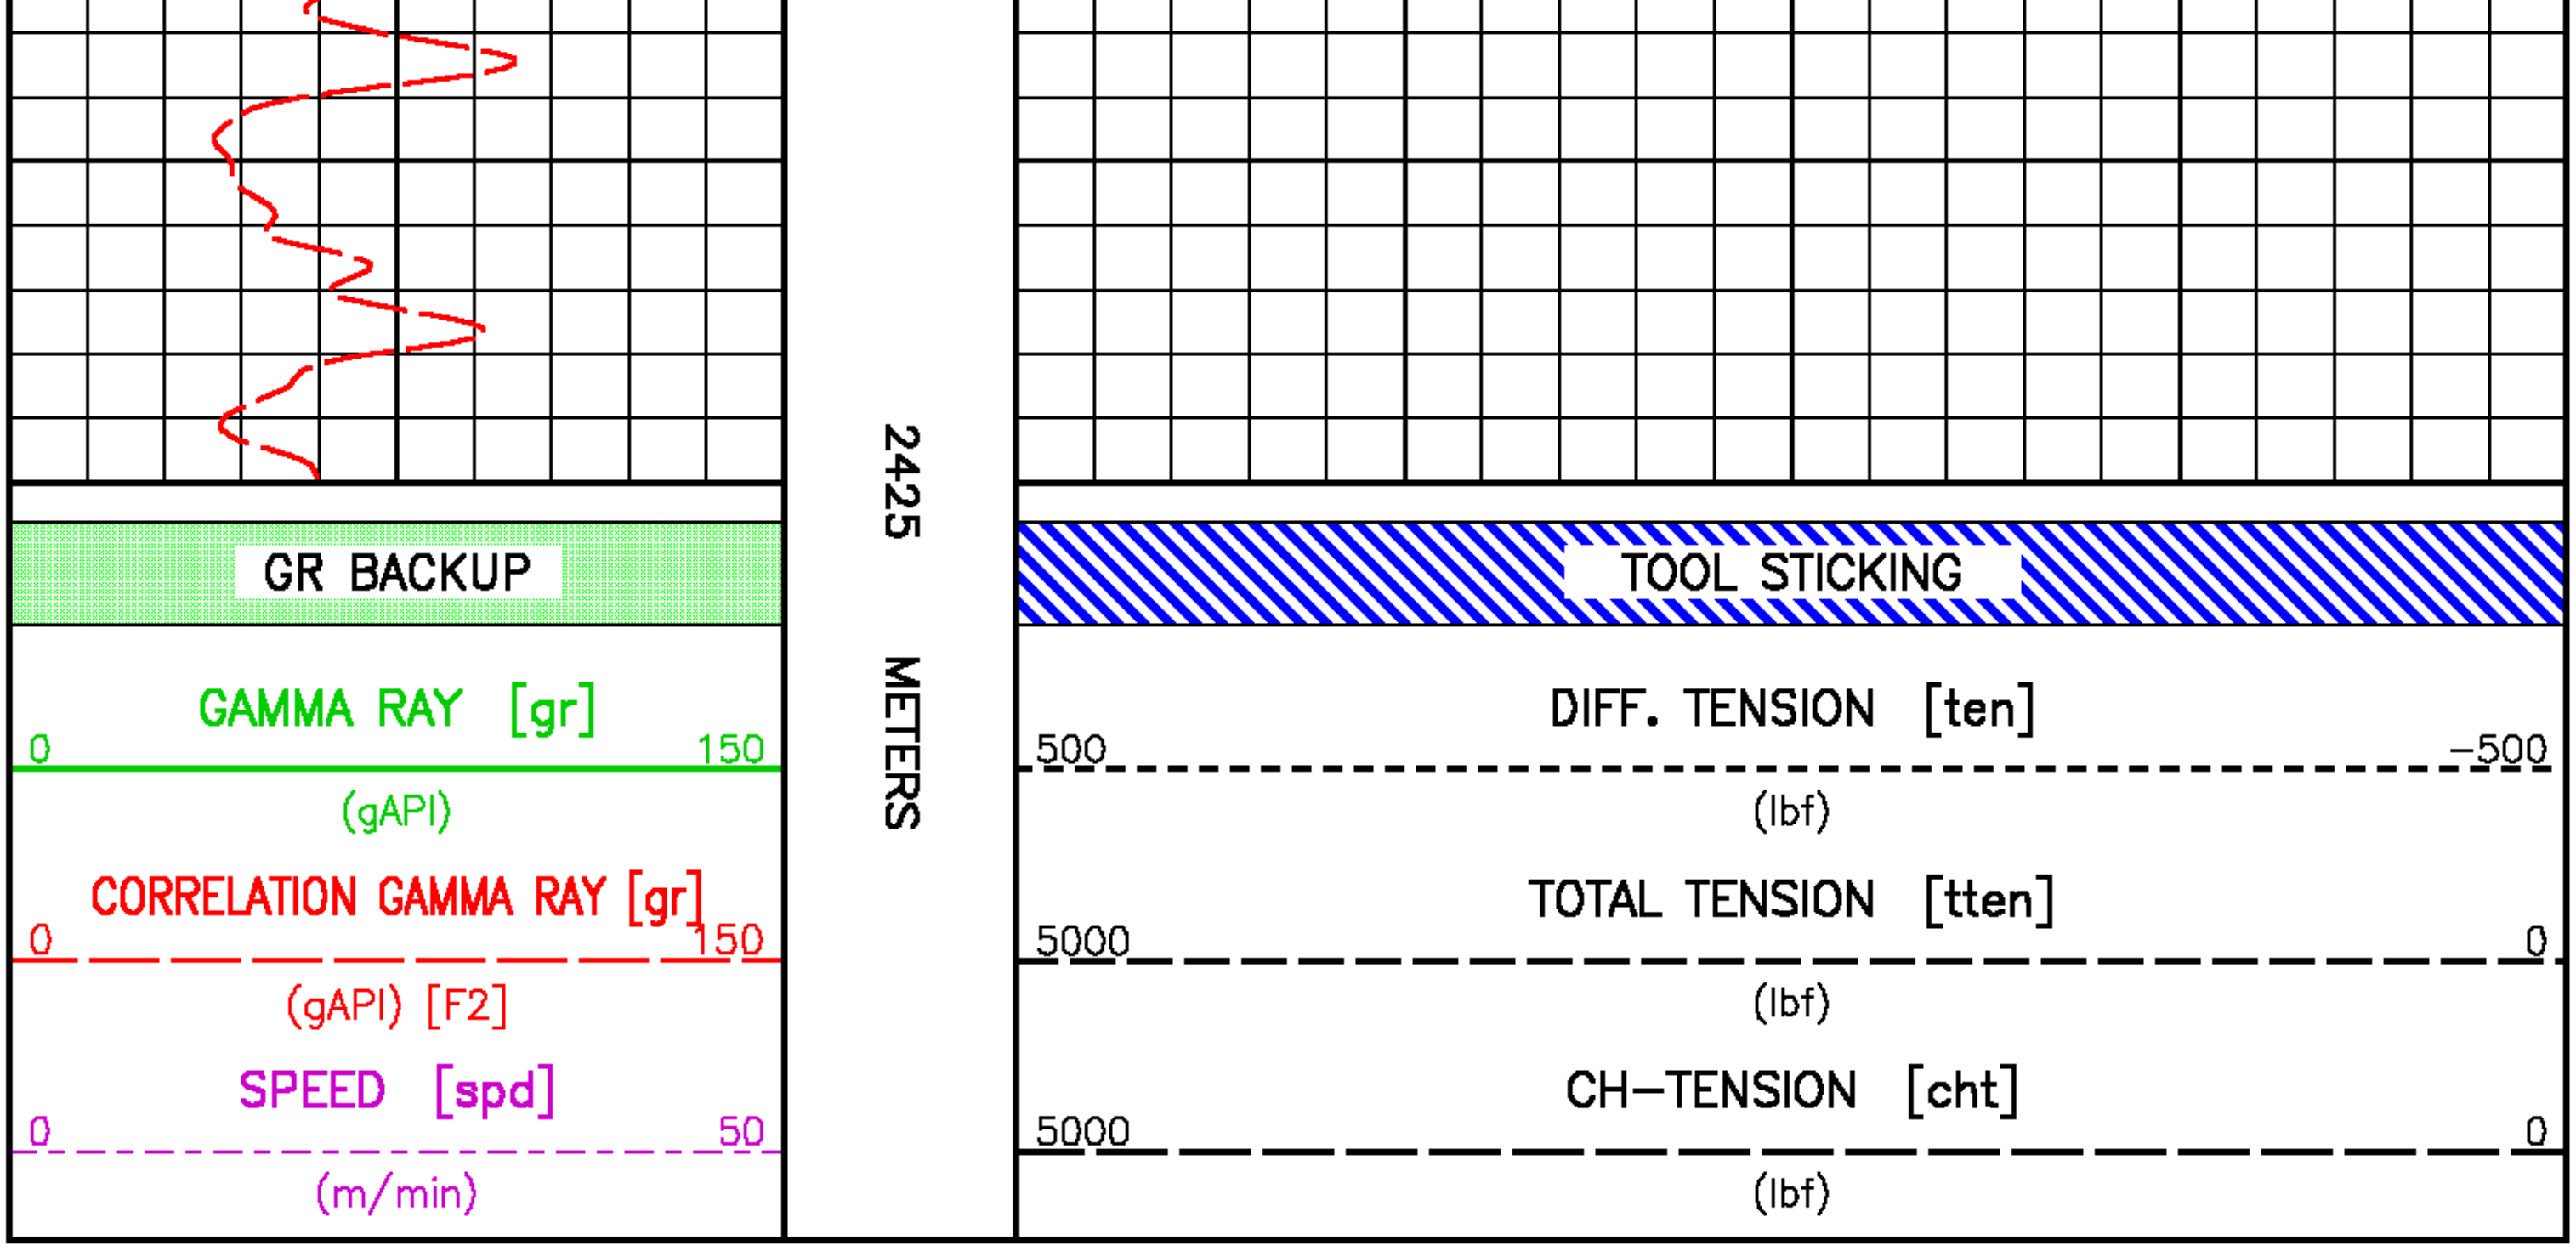

CORRELATION PASS 3

ECLIPS 5.1i Sep 16, 2005 Sun Oct 29 04:09:40 2006
Updates: 1,2,37

Pcrplt /main/61 Cplot 9.18 Pdf_Cpp /main/16 Fileview 5.00

PARAMETER AND FILTER SUMMARY REPORT

FILE: /dat1a/peak/bilabari_D3/j800g69.prm
LOGGING MODE: DEPTH DIRECTION: UP
TOP DEPTH: 2428.875 m BOTTOM DEPTH: 2492.045 m

SYMMETRIC FILTER

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m) TOP	BOTTOM
CHT	FILTER ()	medium (1)		TOP	BOTTOM
GR	FILTER ()	medium (1)		''	''
SPEED	FILTER ()	medium (1)		''	''
TENSION	FILTER ()	medium (1)		''	''

PARAMETER AND FILTER SUMMARY REPORT

File: /dat1a/peak/bilabari_D3/j777j03.prm
LOGGING MODE: DEPTH DIRECTION: UP
TOP DEPTH: 807.453 m BOTTOM DEPTH: 2510.028 m

SYMMETRIC FILTER

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m) TOP	BOTTOM
CHT	FILTER ()	medium (1)		TOP	BOTTOM
SPEED	FILTER ()	medium (1)		''	''
TENSION	FILTER ()	medium (1)		''	''
GR	FILTER ()	medium (1)		''	''

CURVE DESCRIPTION REPORT

CURVE NAME	CURVE ALIAS	CREATION DATE	CURVE DESCRIPTION
F1:CHT	CHT	Oct 28 13:21:25 2006	CABLE HEAD TENSION
F1:GR	GR	Oct 28 13:21:25 2006	GAMMA RAY
F1:SPD	SPD	Oct 28 13:21:25 2006	SPEED
F1:TEN	TEN	Oct 28 13:21:25 2006	DIFFERENTIAL TENSION
F1:TTEN	TTEN	Oct 28 13:21:25 2006	TOTAL TENSION

CURVE MEASURE POINT OFFSET

CURVE	OFFSET (m)	CURVE	OFFSET (m)	CURVE	OFFSET (m)	CURVE	OFFSET (m)
CHT	-0.76	SPD	0.00	TTEN	-0.76		
GR	23.85	TEN	-0.76				

Presentation : sys1:/dat1a/peak/bilabari_D3/CORR3.pdf [1:200 Scale]
Plot Interval : 2400 - 2450 Meters

Data File 1 : F1 : sys1:/dat1a/peak/bilabari_D3/|800g69.aff
Created On : Oct 28 13:21:25 2006
Company : PEAK PETROLEUM
Well : BILABRI D3
Field : BILABRI
File Interval : 2401.44 - 2493.04 Meters
Oct : |800g

Data File 2 : F2 : sys1:/dat1a/peak/bilabari_D3/slams.xtf
Created On : Oct 25 23:01:34 2006
Company : PEAK PETROLEUM
Well : BILABRI D3
Field : BILABRI
File Interval : 769.772 - 2557.88 Meters
Oct : |777|

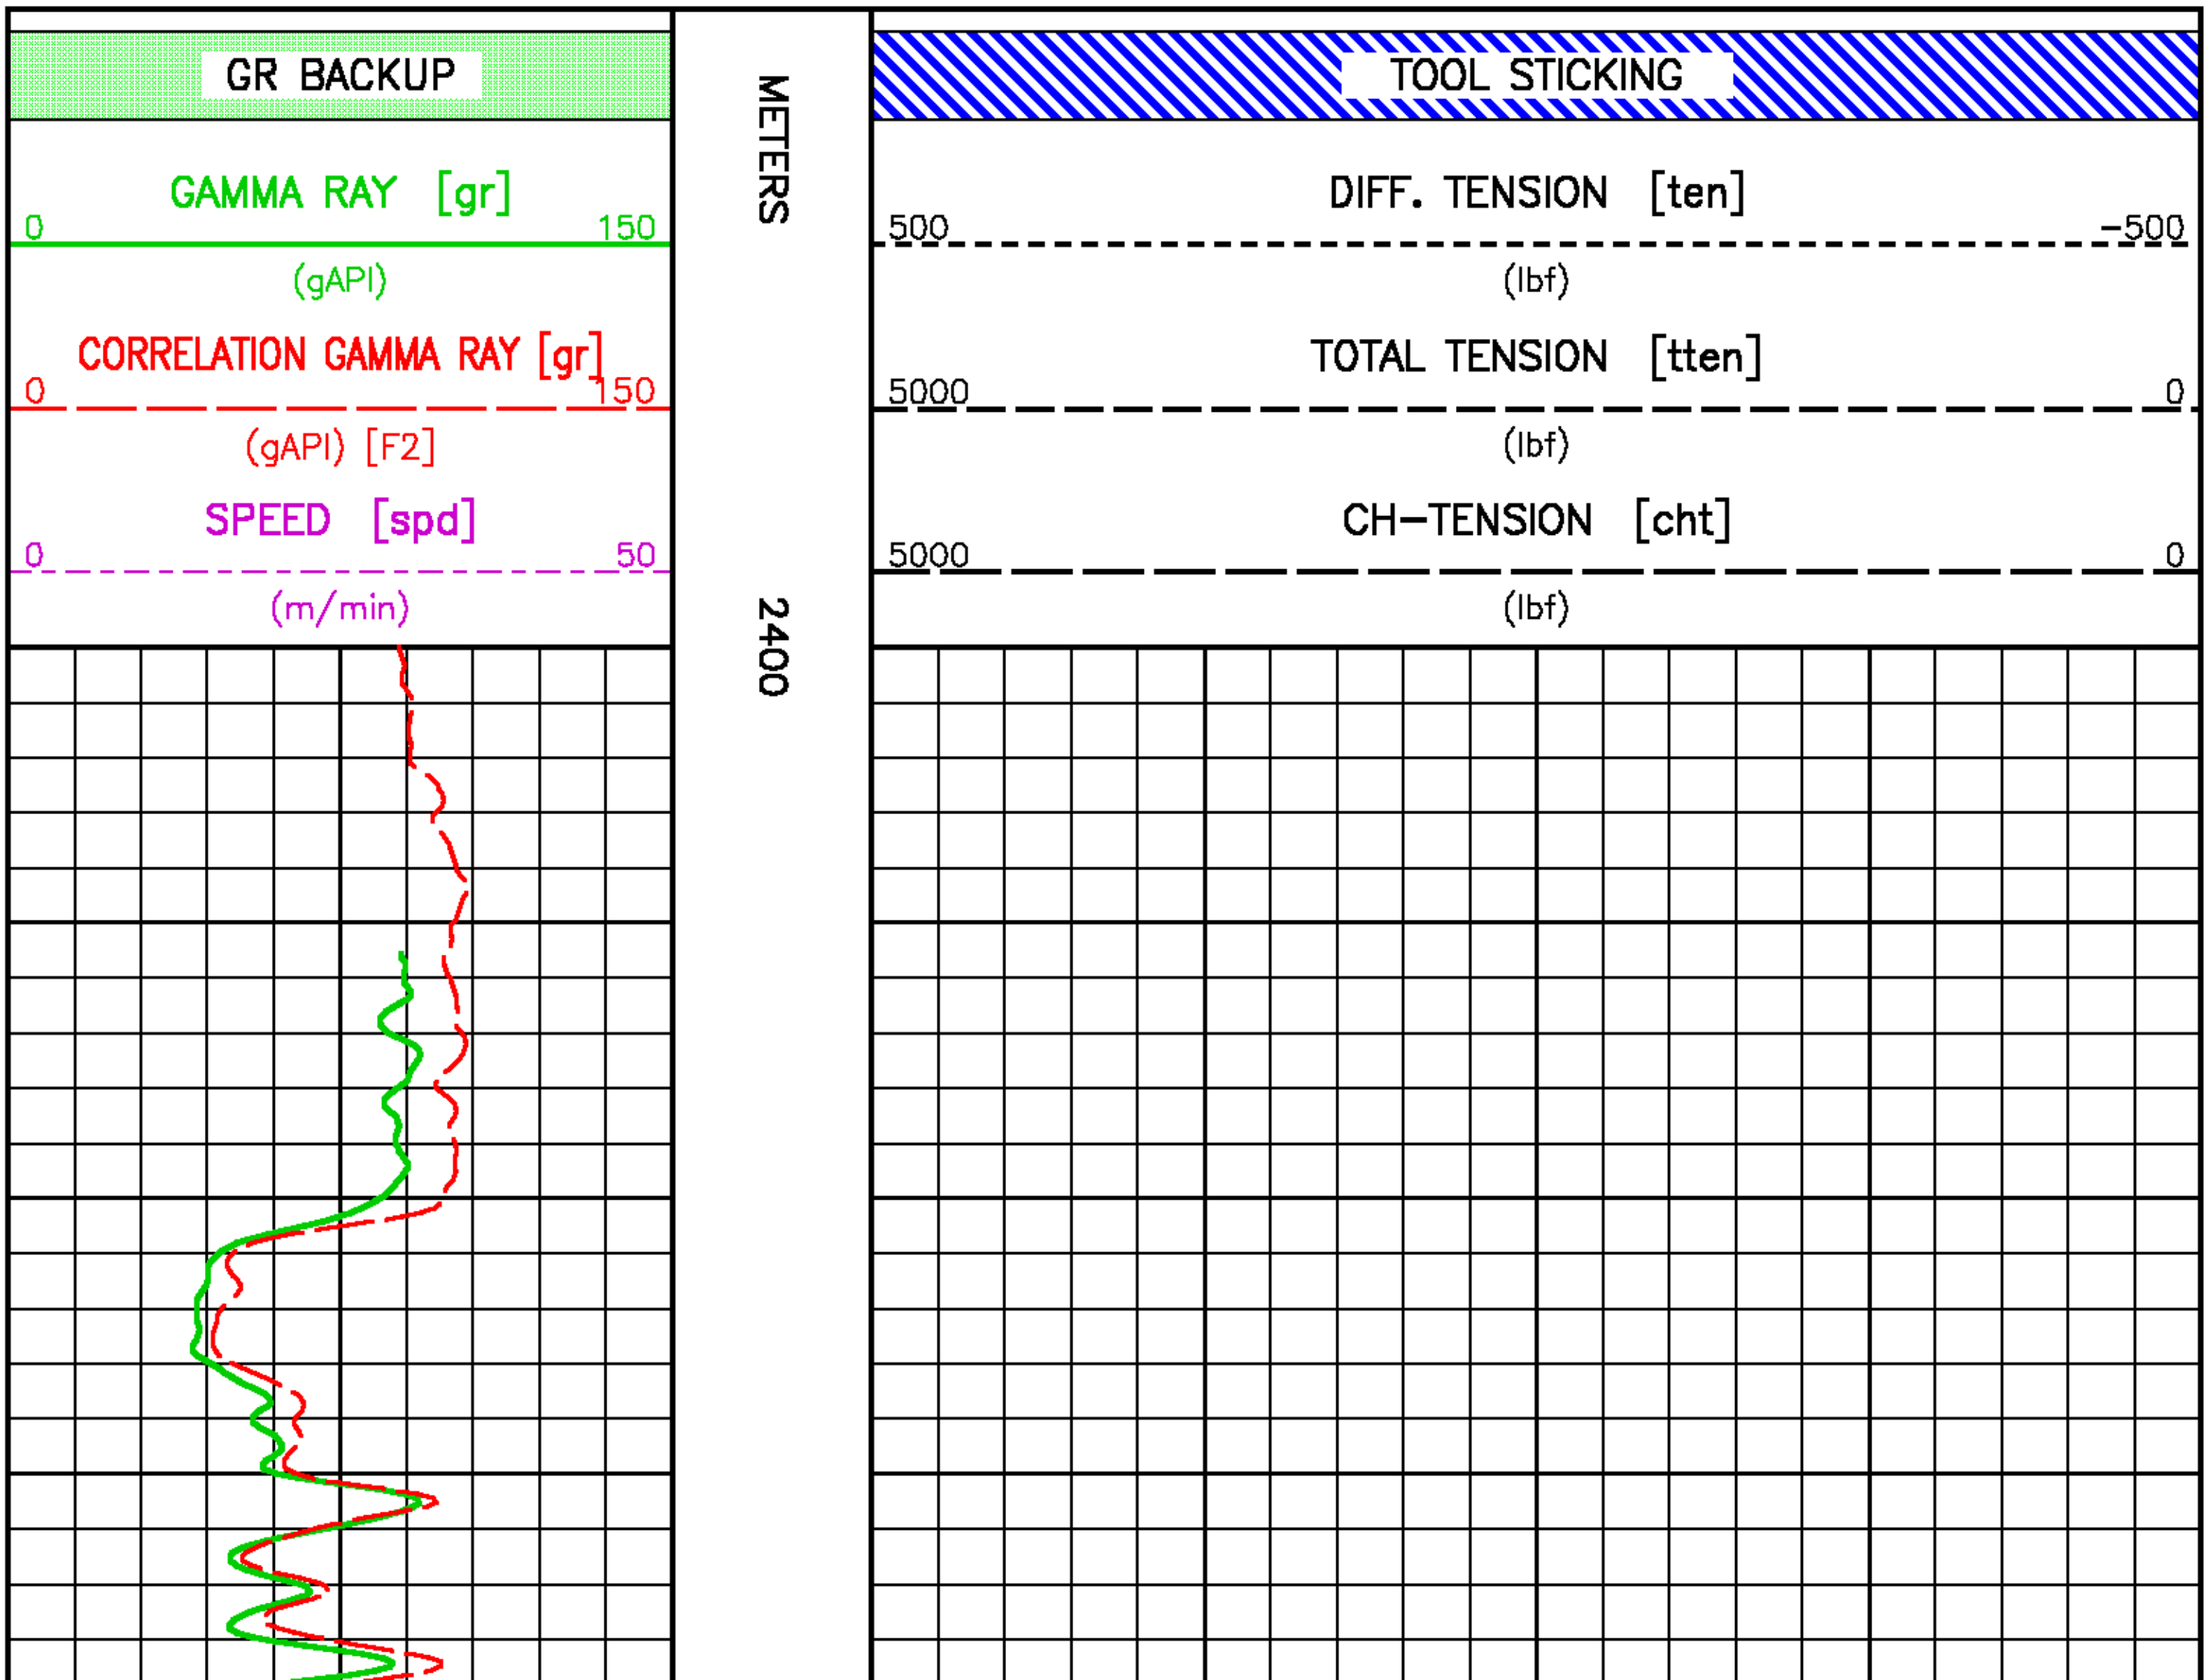

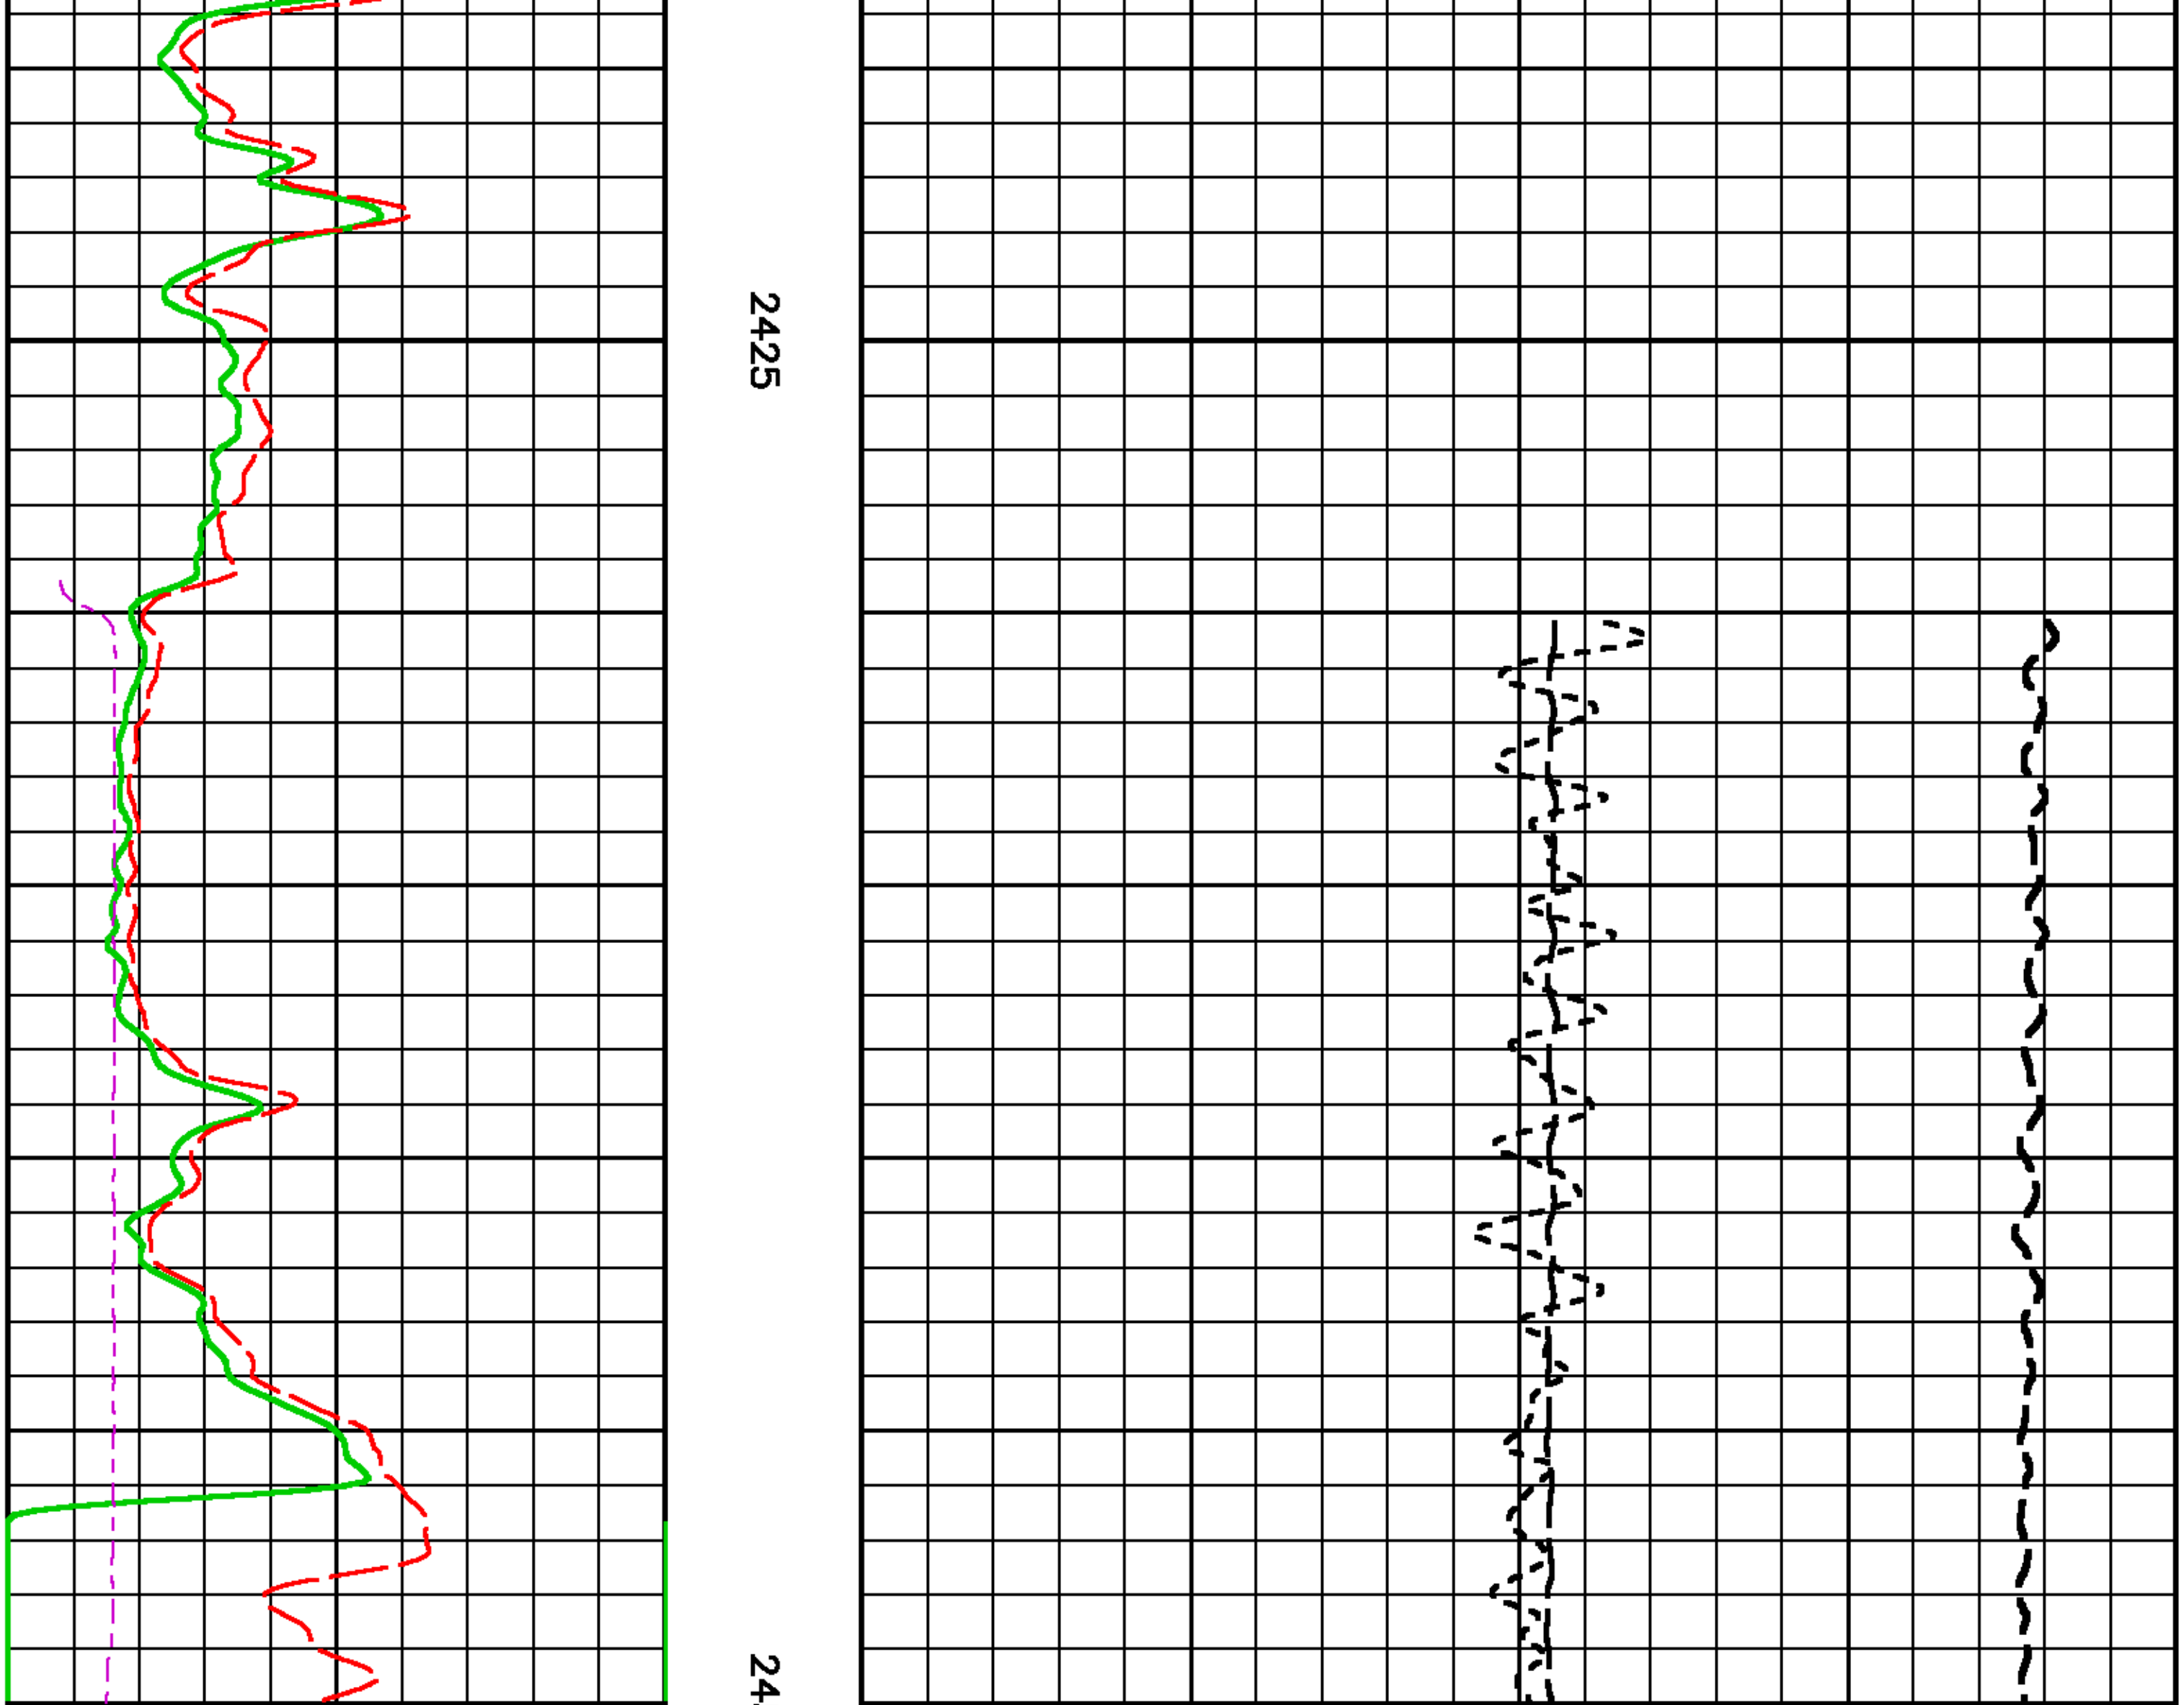

GR BACKUP		TOOL STICKING
GAMMA RAY [gr] 0 – 150 (gAPI)	METERS	DIFF. TENSION [ten] 500 – -500 (lbf)
CORRELATION GAMMA RAY [gr] 0 – 150 (gAPI) [F2]		TOTAL TENSION [tten] 5000 – 0 (lbf)
SPEED [spd] 0 – 50 (m/min)		CH-TENSION [cht] 5000 – 0 (lbf)

CALIBRATION / VERIFICATION SUMMARY

Source File: /dat1a/peak/billabari_D3/l800g.tp1

CHT PRIMARY CALIBRATION SUMMARY

TOOL #: 3981XA 10218739

DATE/TIME PERFORMED: Fri Oct 27 17:51:24 2006

UNIT #: 5753XB 10164949

	Signal Low (raw)	Signal High (raw)	Scale Mult	Scale Add	Engr Low (lbf)	Engr High (lbf)
CHT	70.00	636.98	3.88	-271.61	0.00	2200.00

GR PRIMARY CALIBRATION SUMMARY

TOOL #: 1329XA 10194153

DATE/TIME PERFORMED: Thu Jul 27 13:00:36 2006

UNIT #: 5753XB 10164949 CALB JIG #: 4702NK WA-661

	BACKGROUND (cts/s)	CALBRTR ON (cts/s)	CR DIFF (cts/s)	MULT	BACKGROUND (gAPI)	CALBRTR ON (gAPI)	CALBRTR (gAPI)
GR	346.09	1209.04	863.0 830.0 960.0	0.174	60.16	210.16	150

GR PRIMARY VERIFICATION SUMMARY

TOOL #: 1329XA 10194153

DATE/TIME PERFORMED: Thu Jul 27 13:06:31 2006

UNIT #: 5753XB 10164949 VERI JIG #: 4702NK WA-661

	BACKGROUND (cts/s)	CALBRTR ON (cts/s)	MULT	BACKGROUND (gAPI)	CALBRTR ON (gAPI)	DIFF. (gAPI)
GR	343.84	1222.11	0.174	59.77	212.43	152.66 140.00 160.00

SAMPLEVIEW PRIMARY CALIBRATION SUMMARY

TOOL #: 1970IB 369821

DATE/TIME PERFORMED: Sun Jun 26 09:28:53 2005

UNIT #: 5753XB 10130868

	At Start (degC)	At Finish (degC)
Temp Data		

Bulb 1 nm-chan	Dark uV	Light uV	Diff@25C uV	Diff@50C uV	Diff@75C uV	Diff@100C uV	Diff@125C uV	Diff@150C uV	Diff@175C uV
425-A5	470	-227300	308643	281836	261434	242665	229928	224040	227770
475-A6	-4352	693744	799770	751157	721836	695234	677538	685908	698096

525-A7	-1521	575529	654331	611722	580675	563296	556790	563353	577050
575-A8	-2085	-791234	872022	826707	796417	775947	762945	768326	789149
632-B1	-201	-860437	948142	905882	873127	852984	844017	845703	860236
694-B2	-243	1051908	1194781	1150639	1113628	1085695	1061491	1048455	1052151
757-B3	-32	-460086	773018	727227	677172	623798	555880	494328	460054
819-B4	12165	-537777	819293	776749	733479	686148	632312	573312	549942
882-B5	-85	-459736	543973	524509	507361	492352	477041	463686	459651
944-B6	-3065	-737948	728304	713293	706303	705413	705942	725318	734883
1007-B7	10648	-426784	394211	397416	401221	408957	416494	426143	437432
1069-B8	-2021	-707813	404162	457329	505425	563386	614976	670341	705792
1300-A9	8863	-169245	206844	201492	196551	191590	185442	180254	178108
1420-A1	29682	-315332	515823	485756	452550	417841	385593	357910	345014
1600-A10	-716	-442377	456781	457341	462557	466849	462587	448992	441661
1600R-A11	0	0	56599	53087	49737	46607	44484	43692	0
1670-B9	0	0	117208	116659	116268	114676	111276	107571	0
1682-B10	0	0	115313	113690	112313	110800	108379	104907	0
1740-A2	15280	-287066	333981	329729	326714	323908	317393	308323	302346
1935-A3	3099	-133856	149865	148301	146977	145211	142985	139675	136955
Ref-A12	41428	-678062	839787	799373	769268	740864	720656	710541	719490

Bulb 2 nm-chan	Dark uV	Light uV	Diff@25C uV	Diff@50C uV	Diff@75C uV	Diff@100C uV	Diff@125C uV	Diff@150C uV	Diff@175C uV
425-A5	470	-227300	310126	277853	249832	229662	215641	211189	217818
475-A6	-4352	693744	748257	690776	646518	616940	595965	608076	626046
525-A7	-1521	575529	577513	529913	493915	476070	466711	473051	489499
575-A8	-2085	-791234	777922	725453	689032	666471	650802	658150	683595
632-B1	-201	-860437	959026	903593	860448	834817	821346	826562	849370
694-B2	-243	1051908	963803	914589	874503	845881	821681	814314	825155
757-B3	-32	-460086	786395	732796	676617	620629	552159	493804	464268

819-B4	12165	-537777	740240	693407	648518	602978	554003	504850	488114
882-B5	-85	-459736	483734	460509	440876	425200	410219	400555	400379
944-B6	-3065	-737948	705014	684250	672179	667605	666819	686423	700569
1007-B7	10648	-426784	303274	302094	301836	305412	309577	317162	327547
1069-B8	-2021	-707813	369815	414955	456107	506266	551535	603868	640439
1300-A9	8863	-169245	199473	192648	186866	181603	175449	170475	169311
1420-A1	29682	-315332	460766	431709	399614	367971	339353	316650	307064
1600-A10	-716	-442377	427340	423863	425781	427383	422073	410069	405169
1600R-A11	0	0	3649	3346	3125	2928	2846	2888	0
1670-B9	0	0	106610	105900	105395	103734	100491	97383	0
1682-B10	0	0	103944	101917	100251	98486	96215	93477	0
1740-A2	15280	-287066	320158	314792	311389	307503	300470	292245	288021
1935-A3	3099	-133856	148476	146911	145617	143971	142064	139256	137009
Ref-A12	41428	-678062	732856	691662	659220	631650	610188	606253	623097

Bulb 1 nm-chan	Relative Intensity	MULT@25C uV	MULT@50C uV	MULT@75C uV	MULT@100C uV	MULT@125C uV	MULT@150C uV	MULT@175C uV
475-A6	0.31319	0.46788	0.57943	0.69980	0.86892	1.09378	1.35322	1.83315
525-A7	0.47001	0.85822	1.07271	1.32775	1.62517	1.98860	2.46303	3.29408
575-A8	0.62683	0.85884	1.04391	1.25451	1.52223	1.88242	2.35349	3.13051
632-B1	0.80560	1.01517	1.21490	1.45854	1.76028	2.14941	2.71447	3.68143
694-B2	1.00000	1.00000	1.17787	1.40245	1.69958	2.12560	2.76258	3.84936

Bulb 2 nm-chan	Relative Intensity	MULT@25C uV	MULT@50C uV	MULT@75C uV	MULT@100C uV	MULT@125C uV	MULT@150C uV	MULT@175C uV
475-A6	0.31319	0.40341	0.50952	0.64091	0.80434	1.02383	1.25115	1.67248
525-A7	0.47001	0.78439	1.00285	1.27193	1.56458	1.93368	2.39453	3.16868
575-A8	0.62683	0.77661	0.96126	1.17410	1.43414	1.78649	2.22231	2.91878
632-B1	0.80560	0.80962	0.98170	1.19290	1.44824	1.77710	2.23239	2.99552
694-B2	1.00000	1.00000	1.19539	1.44067	1.75970	2.21511	2.86928	3.95941

RCICAL-K PRIMARY CALIBRATION SUMMARY

GAUGE #: 1970KB 152790 DATE/TIME PERFORMED: Fri Oct 27 17:34:07 2006

UNIT #: 5753XB 10164949

Pres	Coeff	A0	A1	A2	A3
A	-1.107373E+03	1.615444E+01	-1.111506E+00	-2.188939E-02	1.541319E-05
B	6.024635E+01	4.772223E+01	-4.021364E-02	4.665750E-05	-4.950823E-08
C	-2.832575E-02	-1.390049E-02	3.618463E-05	-1.194996E-07	-3.852232E-11
D	2.422198E-05	6.023834E-06	-5.860418E-08	1.475673E-10	2.736995E-13
E	-1.402663E-08	9.308951E-10	7.777293E-11	2.283641E-15	-2.400883E-16

	FP0	FT0	MP	MT
Prescale A&M	18254.0	59293.0	0.01	0.01

	F(pres) (Hz)	F(temp) (Hz)	F(ref) (Hz)	DIFF(pres) (psi)	Pressure (psi)	Temp (degC)
Coeff Test	1.0	1.0	200.0	1.00000	8812.36	126.75

Temp	Coeff	A0	A1	A2	A3
G	1.578620E+02	2.358922E+01	-7.240614E-01	-7.639430E-04	-5.591068E-07
H	-1.603235E-01	-2.794001E-01	-6.697756E-04	-6.670708E-07	5.866682E-11
I	-7.837198E-05	-1.297890E-04	-2.336692E-07	-3.547505E-10	-1.284699E-12
J	-3.446067E-08	-9.886222E-08	-5.324237E-10	-9.168915E-13	7.808786E-16

RCICAL-L PRIMARY CALIBRATION SUMMARY

GAUGE #: 1970LB 164363 DATE/TIME PERFORMED: Fri Oct 27 17:34:30 2006

UNIT #: 5753XB 10164949

Pres	Coeff	A0	A1	A2	A3
A	-7.499580E+02	1.713895E+01	-3.365741E-01	-1.961092E-02	9.581886E-06
B	4.876770E+01	4.320596E+01	-2.042544E-02	3.236452E-05	-3.741103E-08

C	-5.727489E-03	-1.993941E-03	2.541161E-06	-1.130474E-07	-1.505575E-10
D	3.287135E-06	8.048718E-07	3.102160E-08	4.015337E-10	9.139274E-13
E	-1.532930E-09	-2.056761E-10	-4.517717E-11	-5.118708E-13	-1.260496E-15

	FPO	FTO	MP	MT
Prescale A&M	19391.0	55689.0	0.01	0.01

	F(pres) (Hz)	F(temp) (Hz)	F(ref) (Hz)	DIFF(pres) (psi)	Pressure (psi)	Temp (degC)
Coeff Test	1.0	1.0	200.0	1.00000	7204.77	139.08

Temp Coeff	A0	A1	A2	A3
G 1.390597E+02	2.372272E+01	-7.265492E-01	-8.519549E-04	-6.961386E-07
H 3.336269E-04	6.887810E-04	2.632459E-05	2.281583E-07	5.262725E-10
I -1.859941E-06	-3.081034E-06	-1.235305E-07	-1.122955E-09	-2.676851E-12
J 2.847197E-09	3.913331E-09	1.623145E-10	1.545895E-12	3.804180E-15

BAKER HUGHES

Baker Atlas

ECLIPS

COMPANY	PEAK PETROLEUM INDUSTRIES NIGERIA LTD	FILE NO:	
WELL	BILABRI D3	API NO:	
FIELD	BILABRI	SCALE 1:200	
RIG NAME	BULFORD DOLPHIN		

LOCATION:

NORTH: 515,558.23 M
EAST: 731,847.1 M

ELEVATIONS:
KB
DF 25 M
GL -145 M

FIELD PRINT
TIGHT HOLE

DATE 27-OCT-2006

.