WELL: BILABRI DX1

HYDROCARBON WELL LOG

PETROLOG

FIELD : BILABRI

MD
SCALE 1 : 1000

TOTAL DEPTH: m MD/ m TVD

SPUD DATE: 25/11/2005	RIG: BULFORD DOLPHIN	SURFACE COORDIANTES : Lat: 04° 39' 05.3182" N Long: 05° 04' 58.0213" E

LEGEND

Clay/Claystone | Shale | Siltstone | Sandstone | Sand

ENGINEERING SYMBOLS

- CASING/LINER SHOE
- LOST CIRCULATION
- LOSS
- GAIN
- LOST SAMPLE
- BIT
- MDT/RFT
- CORE

TERM ABRIVIATIONS :

MW : MUD WEIGHT	CG : CONNECTION GAS
PV : PLASTIC VISCOSITY	FG : FORMATION GAS
VIS :FUNNEL VISCOSITY	TG : TRIP GAS
MND : MID NIGHT DEPTH	STG : SHORT TRIP GAS
TVD : VERTICAL DEPTH	RPM : ROTARY SPEED
MD : MEASURED DEPTH	WOB : WEIGHT ON BIT
SD : SHALE DENSITY	PP :PUMP PRESSURE
FLT: FILTRATE	LC : LOST CIRCULATION

UNIT PERSONNEL :

DATA ENGR:
Segun Oladipo
MUD LOGGERS:
Layi Ogunjobi
Ali Nuhu
Kamar Akanbi
Amadi Erastus
SAMPLE CATCHER
Seye Akinwale
Eyo Sunday

CASING :

30.0" @ 248.5m
20.0" @ 453.2m
13 3/8" @ 1529m

GEOLOGIST:
Richard Vormelker
Kola Onifade

DRILLING RATE m/Hr

ROP (m/Hr) 500 — 0
GR(API) 0 — 150

DEPTH

LITHOLOGY %

HYDROCARBON ANALYSIS

TOTAL GAS IN AIR

UNITS 1 — 1000
1 10 100 1000

METHANE ETHANE
PROPANE I. BUTANE
N. BUTANE PENTANE

100 PPM 100000

MUD DATA

Lithology

LITHOLOGICAL DESCRIPTION AND REMARKS

COMMENCED LOGGING OF 17-1/2" HOLE SECTION @ 460m ON 09/12/2005

WOB 2-5
RPM 70-80
PP 1100

DEPTH 659.5
INCL 0.32
AZM 205.40
TVD 659.5

WOB 10-15
RPM 90-100
PP 1400

500 550 600 650 700 750 800 850

BIT #3 SMITH XR-ODVC 17.5" 3*22 1*26

BIT #3RR SMITH XR-ODVC 17.5" 3*22 1*26

MW 9.2
FV 42
PV 5
YP 22
GEL 4/7
CL 50K

SD: WH UNCONS TRANSP-TRANSL F-M GRN SA-SR SE-SS MDSRTD NO FLOUR.

CLYST: LTGY-GY SFT STKY SOL

CLYST: LTGY-GY SFT STKY SOL TR FOSS FRAG

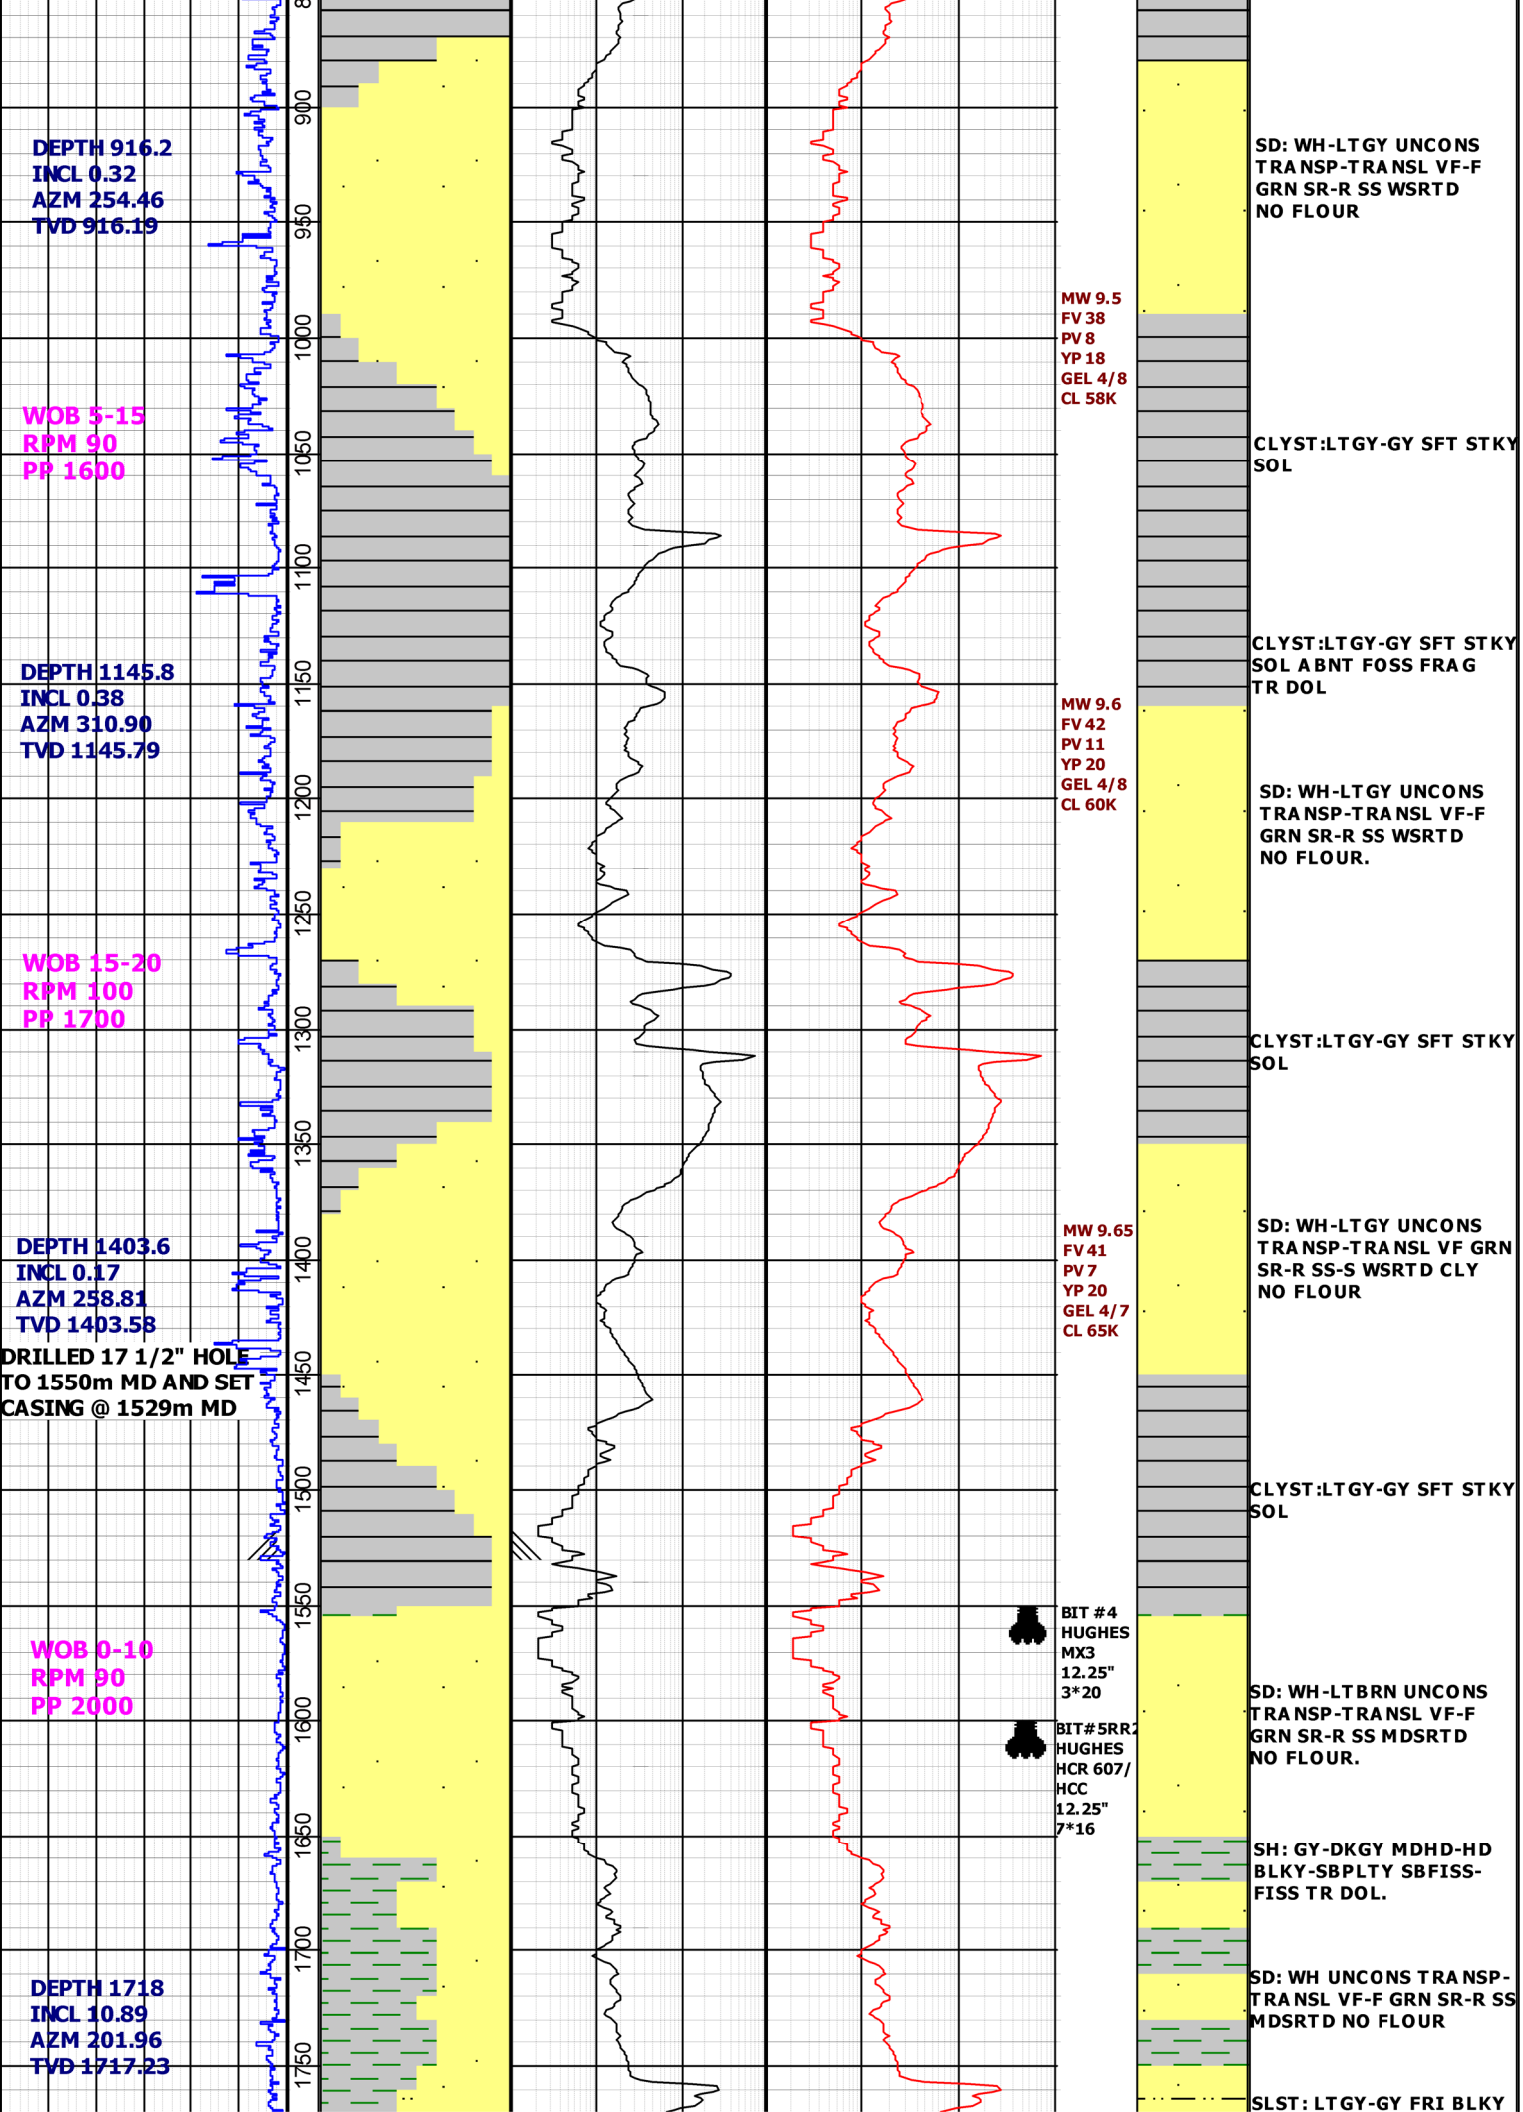
DEPTH 916.2
INCL 0.32
AZM 254.46
TVD 916.19
WOB 5-15
RPM 90
PP 1600
DEPTH 1145.8
INCL 0.38
AZM 310.90
TVD 1145.79
WOB 15-20
RPM 100
PP 1700
DEPTH 1403.6
INCL 0.17
AZM 258.81
TVD 1403.58
DRILLED 17 1/2" HOLE
TO 1550m MD AND SET
CASING @ 1529m MD
WOB 0-10
RPM 90
PP 2000
DEPTH 1718
INCL 10.89
AZM 201.96
TVD 1717.23
900
950
1000
1050
1100
1150
1200
1250
1300
1350
1400
1450
1500
1550
1600
1650
1700
1750
MW 9.5
FV 38
PV 8
YP 18
GEL 4/8
CL 58K
MW 9.6
FV 42
PV 11
YP 20
GEL 4/8
CL 60K
MW 9.65
FV 41
PV 7
YP 20
GEL 4/7
CL 65K
BIT #4
HUGHES
MX3
12.25"
3*20
BIT#5RR2
HUGHES
HCR 607/
HCC
12.25"
7*16
SD: WH-LTGY UNCONS
TRANSP-TRANSL VF-F
GRN SR-R SS WSRTD
NO FLOUR
CLYST:LTGY-GY SFT STKY
SOL
CLYST:LTGY-GY SFT STKY
SOL ABNT FOSS FRAG
TR DOL
SD: WH-LTGY UNCONS
TRANSP-TRANSL VF-F
GRN SR-R SS WSRTD
NO FLOUR.
CLYST:LTGY-GY SFT STKY
SOL
SD: WH-LTGY UNCONS
TRANSP-TRANSL VF GRN
SR-R SS-S WSRTD CLY
NO FLOUR
CLYST:LTGY-GY SFT STKY
SOL
SD: WH-LTBRN UNCONS
TRANSP-TRANSL VF-F
GRN SR-R SS MDSRTD
NO FLOUR.
SH: GY-DKGY MDHD-HD
BLKY-SBPLTY SBFISS-
FISS TR DOL.
SD: WH UNCONS TRANSP-
TRANSL VF-F GRN SR-R SS
MDSRTD NO FLOUR
SLST: LTGY-GY FRI BLKY

WOB 2-10
RPM 100
PP 2550
1800
1850
MW 10
FV 80
PV 36
YP 25
GEL10/19
CL 46K
SDY
SD: WH UNCONS TRANSP-
TRANSL VF-F GRN SR-R SS
WSRTD NO FLOUR.
SH: GY-DKGY MDHD-HD
BLKY-SBPLTY SBFISS