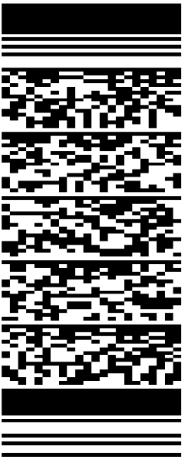


Company: Equinor		Well: 31/5-7	Field: Eos	Rig Name: West Hercules	Country: Norway	
VISION Resistivity Dual Frequency Recorded Mode, Composite Schlumberger						
Company: Equinor		Well: 31/5-7				
Field: Eos		Rig Name: West Hercules				
Country: Norway		Latitude: 60° 34' 35.14" N				
Longitude: 3° 26' 36.13" E		UWID:		Rig Name: West Hercules		
Block: 31/5		Rig Type:		Semi-Submersible		
FL: Norwegian North Sea		FL1: Section: 8 1/2 in.				
FL2: Job no.: 19SCA0085						
Log Measured From: - Drill Floor: 31.00 m Permanent Datum: - Mean Sea Level Ground Level: 307.00 m Other Services: Direction & Inclination (Surveys) Annular Pressure While Drilling geoVISION Bit Resistivity						
Acquisition Dates: 29-Dec-2019 -- 15-Jan-2020		Log Interval: 2544.00(m) -- 2916.00(m)				
Index Types: Measured Depth		Index Scales: 1:500				
Depth Source: Driller's Depth		Depth Sensor: 3rd Party Depth				
Print Type: Final		Spud Date: 02-Dec-2019				
						


Disclaimer

THE USE OF AND RELIANCE UPON THIS RECORDED-DATA BY THE HEREIN NAMED COMPANY (AND ANY OF ITS AFFILIATES, PARTNERS, REPRESENTATIVES, AGENTS, CONSULTANTS AND EMPLOYEES) IS SUBJECT TO THE TERMS AND CONDITIONS AGREED UPON BETWEEN SCHLUMBERGER AND THE COMPANY, INCLUDING: (a) RESTRICTIONS ON USE OF THE RECORDED-DATA; (b) DISCLAIMERS AND WAIVERS OF WARRANTIES AND REPRESENTATIONS REGARDING COMPANY'S USE AND RELIANCE UPON THE RECORDED-DATA; AND (c) CUSTOMER'S FULL AND SOLE RESPONSIBILITY FOR ANY INFERENCE DRAWN OR DECISION MADE IN CONNECTION WITH THE USE OF THIS RECORDED-DATA.

Contents


1. Header	
2. Disclaimer	
3. Contents	
4. Well Sketch	
5. Borehole Size/Casing/Tubing Record	
6. Operational Run Summary	
7. Borehole Fluids	
8. Remarks and Equipment Summary	
9. 8.5 in. Section Composite VISION Resistivity - Dual Frequency	
9.1 Integration Summary	
9.2 Software Version	
9.3 Composite Summary	
9.4 Log (Resistivity - Dual Frequency)	
9.5 Parameter Listing	
10. Calibration Report	
11. Tail	

Well Sketch

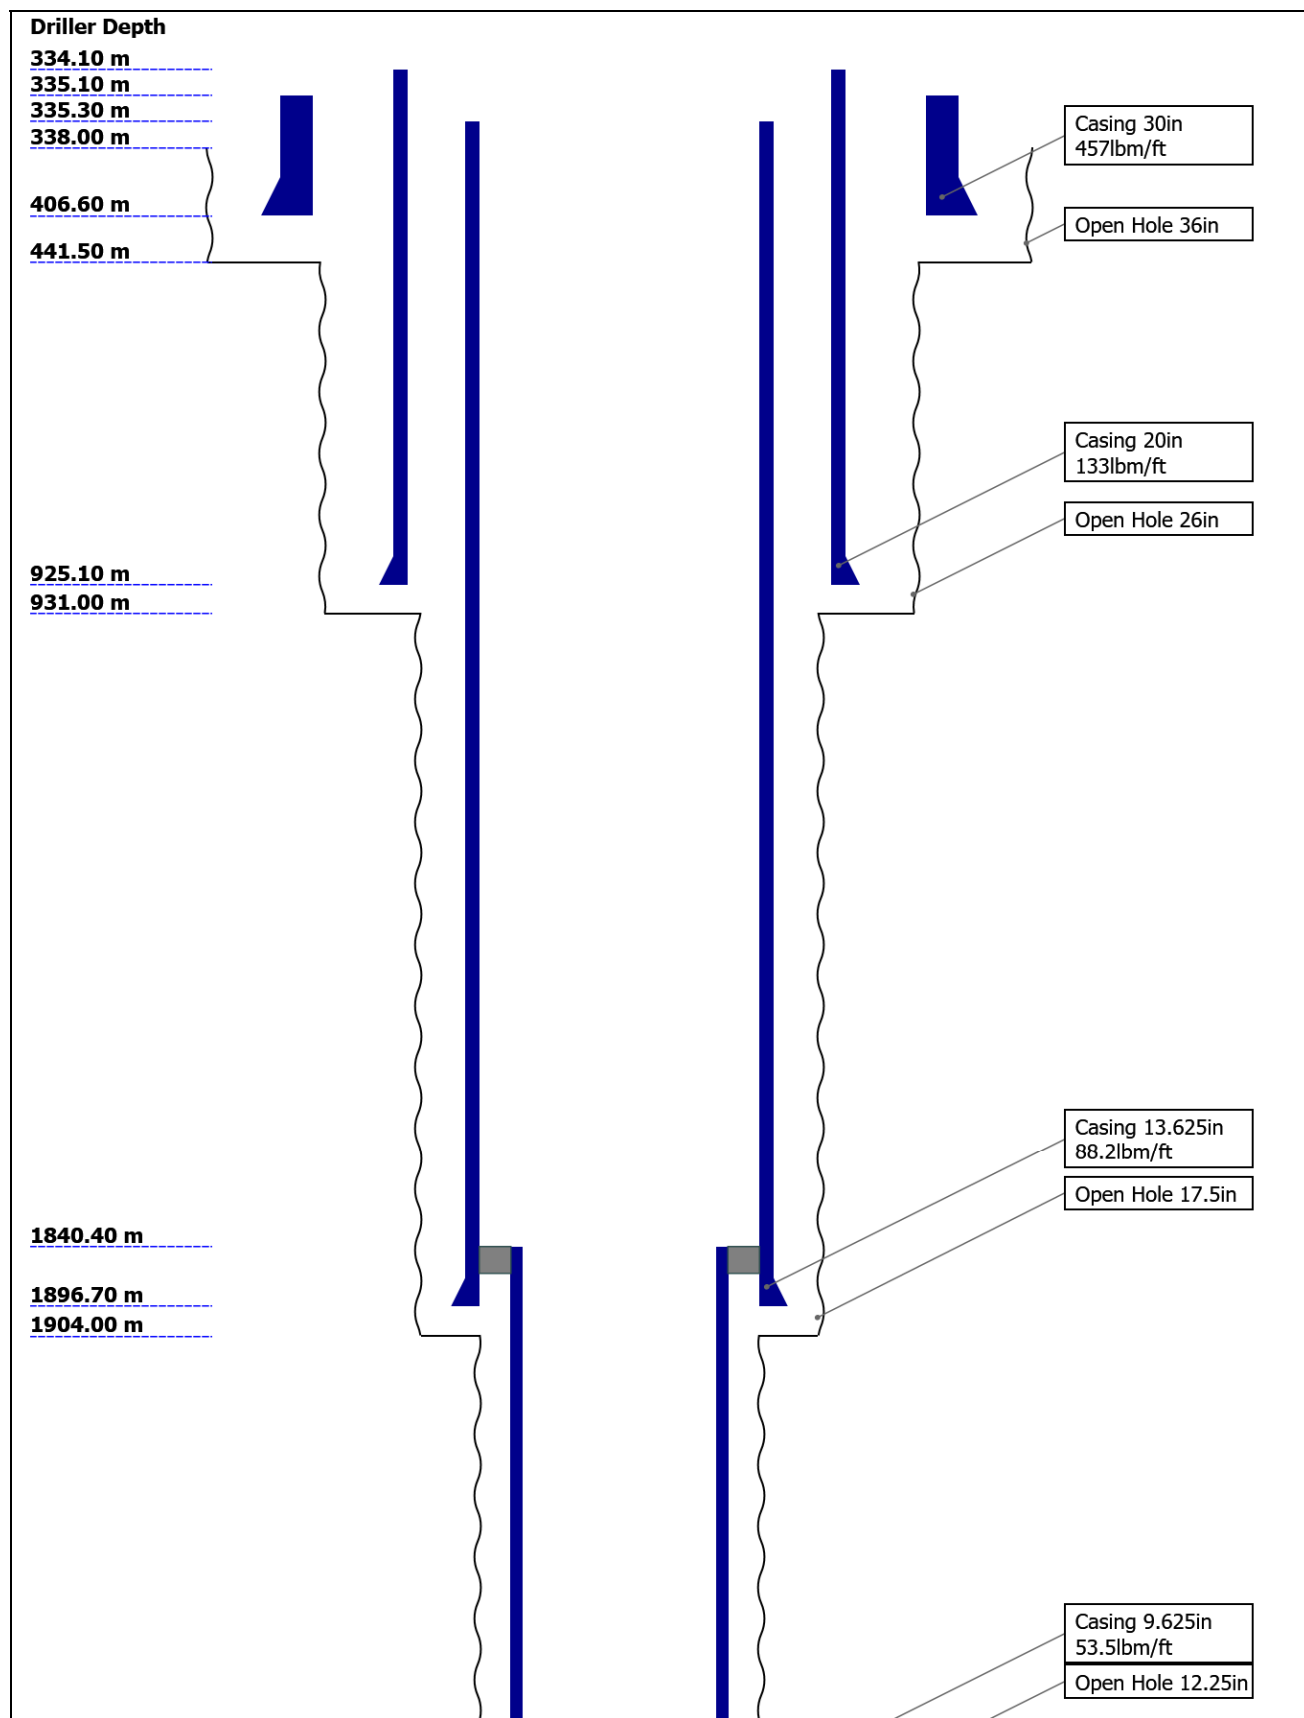

2583.00 m
2584.00 m

2915.00 m

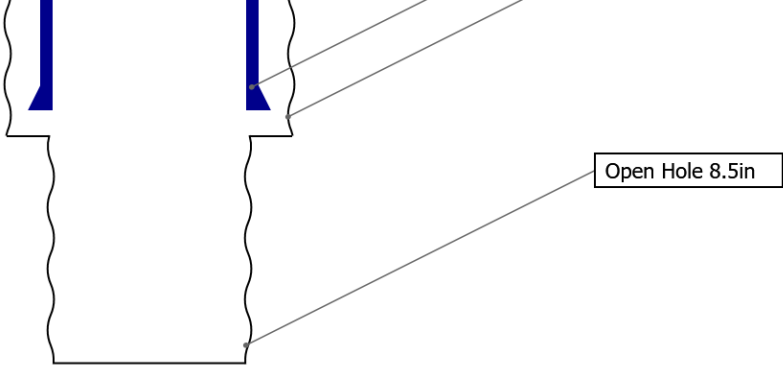

Borehole Size/Casing Record

Bit						
Bit Size (in)	36	26	17.5	12.25	8.5	
Top Driller (m)	338	441.5	931	1904	2584	
Bottom Driller (m)	441.5	931	1904	2584	2915	
Casing						
Size (in)	30	20	13.625	9.625		
Weight (lbm/ft)	457	133	88.2	53.5		
Inner Diameter (in)	27.067	18.73	12.375	8.535		
Grade	X56	N80	P110	P110		
Top Driller (m)	335.1	334.1	335.3	1840.4		
Bottom Driller (m)	406.6	925.1	1896.7	2583		

Operational Run Summary

Parameter (unit)	Run 9	Run 10	Run 12	Run 13		
Date Log Started	29-Dec-2019	31-Dec-2019	07-Jan-2020	13-Jan-2020		
Time Log Started	06:12:03	17:32:56	04:05:33	19:44:45		
Date Log Finished	30-Dec-2019	01-Jan-2020	07-Jan-2020	15-Jan-2020		
Time Log Finished	05:04:18	07:38:34	17:16:13	10:55:25		
Bit Size (in)	8.500	8.500	8.500	8.500		
Bit Start Depth (m)	2584.00	2596.00	2697.00	2784.00		
Bit Stop Depth (m)	2592.00	2643.00	2710.00	2915.00		
Top Log Interval (m)	2584.70	2584.90	2630.90	2699.00		
Bottom Log Interval (m)	2591.22	2642.28	2709.03	2914.28		
Max Hole Deviation (deg)	1.10	1.12	1.12	1.12		
Azimuth of Max Deviation (deg)	133.27	120.28	120.28	120.28		
Logging Unit Number	A615	A615	A615	A615		
Logging Unit Location	Service Office	Service Office	Service Office	Service Office		
Recorded By	S.Kroevel	S.Kroevel	M.Martter	M.Bergenkull		
Witnessed By	J.Eikenes	J.Eikenes	R.Nordstokke	R.Nordstokke		
Service Order Number	19SCA0085	19SCA0085	19SCA0085	19SCA0085		

Borehole Fluids

Parameter(unit)	Run 9	Run 10	Run 12	Run 13		
Fluid Type	Water	Water	Water	Water		
Fluid Name	Glydril	Glydril	Glydril	Glydril		
Max Recorded Temperatures (degC)	38	43	44	51		
Source of Sample	Active Tank	Active Tank	Active Tank	Active Tank		
Salinity (ppm)	93984	93984	97140	79402		
Density (g/cm3)	1.15	1.15	1.15	1.15		
Funnel Viscosity (s)						
Fluid Loss (cm3)						
PH						
Source RMF						
RMC	Pressed	Pressed	Pressed	Pressed		
RM @ Meas Temp (ohm.m@degC)	0.07 @ 18	0.07 @ 15	0.08 @ 14.8	0.09 @ 18.9		
RMF @ Meas Temp (ohm.m@degC)	0.06 @ 18	0.06 @ 20	0.07 @ 14.8	0.07 @ 17.9		
RMC @ Meas Temp (ohm.m@degC)	0.1 @ 20	0.09 @ 15	0.09 @ 20	0.1 @ 20		
RM @ BHT (ohm.m@degC)	0.05 @ 38	0.04 @ 43	0.04 @ 44	0.05 @ 51		
RMF @ BHT (ohm.m@degC)	0.04 @ 38	0.04 @ 43	0.04 @ 44	0.04 @ 51		
RMC @ BHT (ohm.m@degC)	0.07 @ 38	0.05 @ 43	0.06 @ 44	0.06 @ 51		
Total Solid (%)						
High Gravity Solids (%)						

All depths referenced to driller's depth. See EOWR for depth tracking details.




Gamma Ray measurement is environmentally corrected for mud weight, bit size, collar thickness and Potassium content.

Run 9: Remarks	Run 10: Remarks	Run 12: Remarks
Run 9 POOH at 2592 m to perform coring.	Data acquired while reaming down over cored interval from 2592 to 2596 m bit depth.	Data acquired while reaming down over cored interval from 2643 to 2697 m bit depth.
	Run 10 POOH at 2643 m to perform coring.	Run 12 POOH at 2710 m to perform coring.

Run 9: Toolstring			
Equip name	Length	MP name	Offset
TELE675:E4388	18.34	TeleScope	
MSSU675:30848			
Upper Extender			
MDC675:E4388			
MMA:2507			
MDI:3666			
PMVC:236			
PMEA:803			
MTA:2162			
MTK675:004			
MSSD675:1005482-1			
Lower Extender, Long			
		D&I	14.11
		Vibration	13.11

Run 10: Toolstring			
Equip name	Length	MP name	Offset
TELE675:E4388	18.37	TeleScope	
MSSU675:30848			
Upper Extender			
MDC675:E4388			
MMA:2507			
MDI:3666			
PMVC:236			
PMEA:803			
MTA:2162			
MTK675:004			
MSSD675:1005482-1			
Lower Extender, Long			
		D&I	14.14
		Vibration	13.14

Run 12: Toolstring			
Equip name	Length	MP name	Offset
TELE675:E4388	18.37	TeleScope	
MSSU675:30848			
Upper Extender			
MDC675:E4388			
MMA:2507			
MDI:3666			
PMVC:236			
PMEA:803			
MTA:2162			
MTK675:004			
MSSD675:1005482-1			
Lower Extender, Long			
		D&I	14.14
		Vibration	13.14

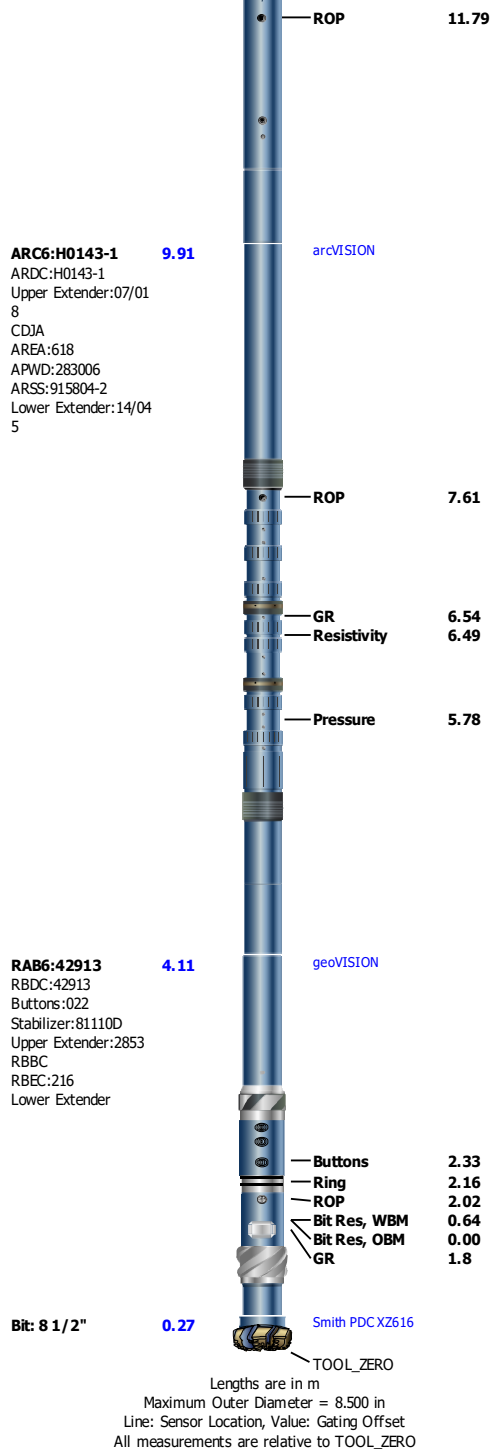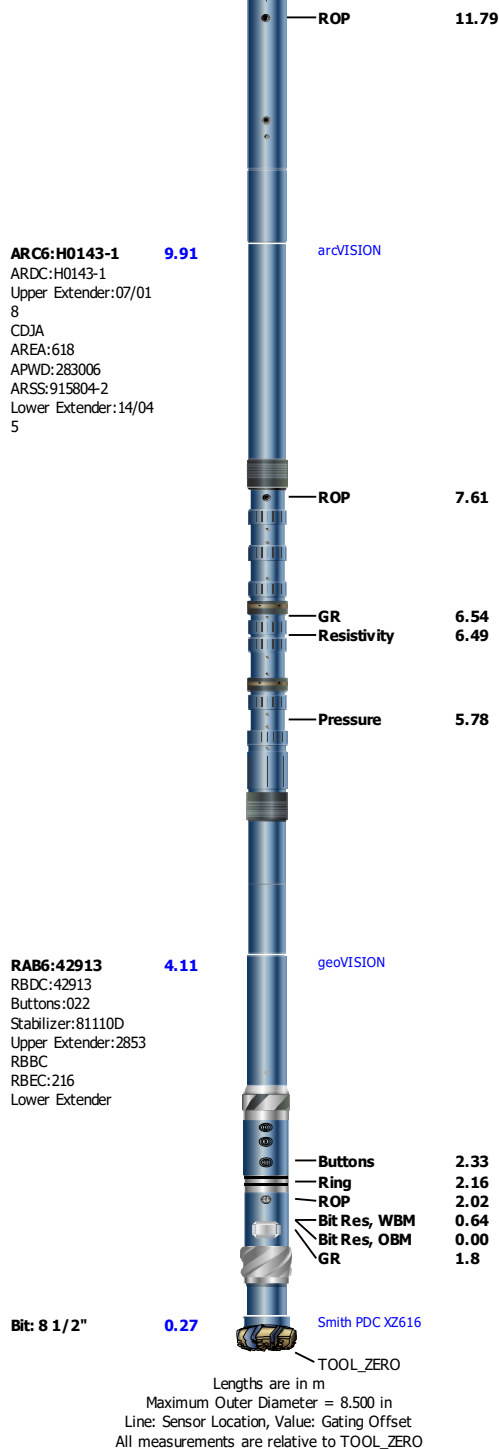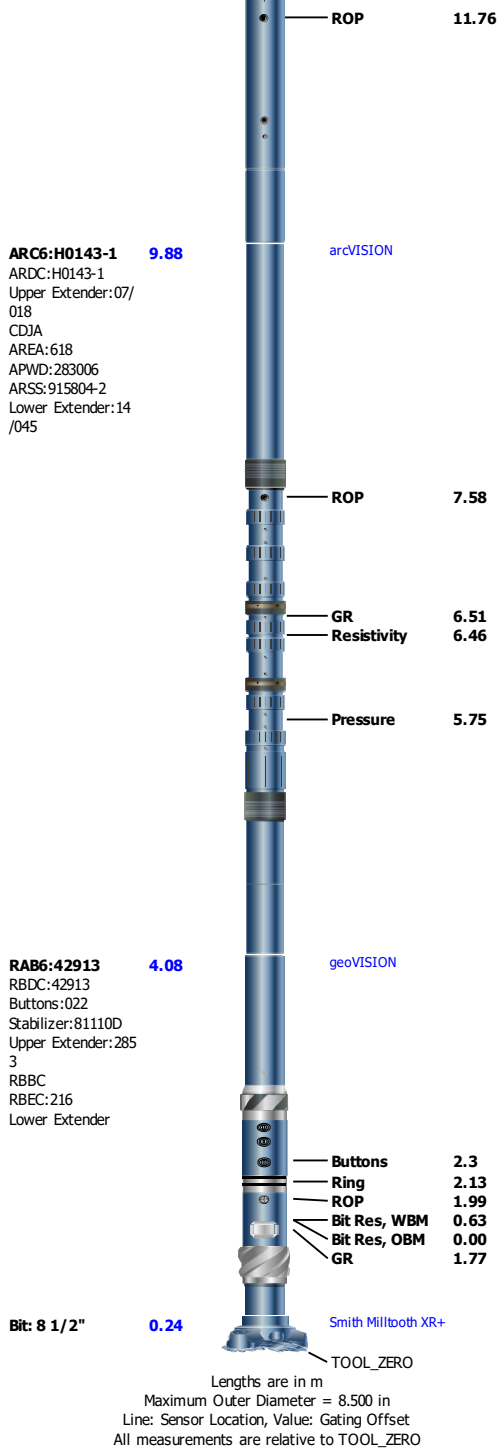


Run 13: Remarks

Data acquired while reaming down over cored interval from 2710 to 2784 m bit depth.

Run 13, 8 1/2 in. section and well TD at 2915 m.

Run 13: Toolstring			
Equip name	Length	MP name	Offset
TELE675:E4388	18.37	TeleScope	
MSSU675:30848			
Upper Extender			
MDC675:E4388			
MMA:2507			
MDI:3666			
PMVC:236			
PMEA:803			
MTA:2162			
MTK675:004			
MSSD675:1005482-1			
Lower Extender, Long			

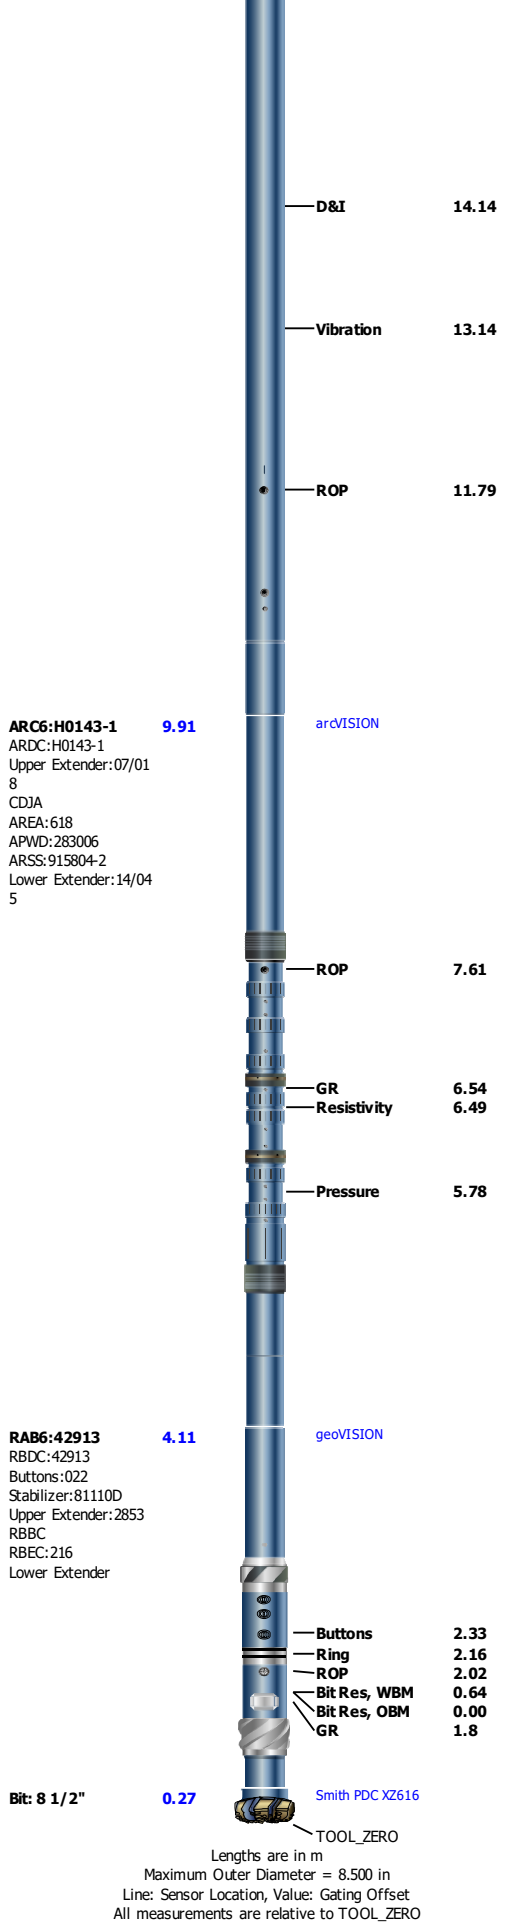

8.5 in. Section Composite

VISION Resistivity - Dual Frequency

Acquisition System			Version	
Maxwell 2019.2			9.2.113335.3100	
Application Patch			DnM_TestKit-XceedCPU41-2019.2_9.2.114181	
Computation	Description			Version
ARCResistivity	ARC Resistivity Computation Package for ARC Tool Family			9.2.113335.3100
ARC6GammaRay	ARC6 Gamma Ray Computation Package for both Real-time and Recorded Mode			9.2.113335.3100
GVRRes	GVR Resistivity Computation Package for both Real-time and Recorded Mode			9.2.113335.3100
Tool Interface	System Version		Loaded Version	
HSPM	2019.0c.001		9.2.113335.3100	
Tool Elements	Description		Software Version	Firmware Version
RBEC	Electronics Chassis Assembly for RAB6-C		9.2.113335.3100	V8.8B
DRILLING_SURFACE	DRILLING_SURFACE		9.2.113335.3100	
ARDC	ARC 6.75 Inch Tool Drill Collar		9.2.113335.3100	V9.7B

Composite Summary

Run Name	Pass Objective	Direction	Top	Bottom	Start	Stop	Include Parallel Data
Run 9	Drilling	Down	720.04 m	2591.89 m	29-Dec-2019 6:12:03 AM	30-Dec-2019 5:04:18 AM	Yes
Run 10	Drilling	Down	236.78 m	2642.97 m	31-Dec-2019 5:32:56 PM	01-Jan-2020 7:38:34 AM	Yes
Run 12	Drilling	Down	298.98 m	2709.75 m	07-Jan-2020 4:05:33 AM	07-Jan-2020 5:16:13 PM	Yes
Run 13	Drilling	Down	181.74 m	2914.93 m	13-Jan-2020 7:44:45 PM	15-Jan-2020 10:55:25 AM	Yes

All depths are referenced to toolstring zero


Log



Company: Equinor Well: 31/5-7


8.5 in. Section Composite: S021

Description: Format: Log (Resistivity - Dual Frequency) Index Scale: 1:500 Index Unit: m Index Type: Measured Depth Creation Date: 20-Jan-2020 10:42:01

Phase Shift Resistivity 40 inch Spacing at 2 MHz, Environmentally Corrected. (P40H) ARC[1] RM 0.2 ohm.m 200			Attenuation Resistivity 40 inch Spacing at 2 MHz, Environmentally Corrected. (A40H) ARC[1] RM 0.2 ohm.m 200			Attenuation Resistivity 40 inch Spacing at 400 KHz, Environmentally Corrected (A40L) ARC[1] RM 0.2 ohm.m 200
			Phase Shift Resistivity 34 inch Spacing at 2 MHz, Environmentally Corrected. (P34H) ARC[1] RM 0.2 ohm.m 200			Phase Shift Resistivity 34 inch Spacing at 400 KHz, Environmentally Corrected. (P34L) ARC[1] RM 0.2 ohm.m 200
Phase Shift Resistivity 28 inch Spacing at 2 MHz, Environmentally Corrected. (P28H) ARC[1] RM 0.2 ohm.m 200			Attenuation Resistivity 34 inch Spacing at 2 MHz, Environmentally Corrected (A34H) ARC[1] RM 0.2 ohm.m 200			Phase Shift Resistivity 28 inch Spacing at 400 KHz, Environmentally Corrected. (P28L) ARC[1] RM 0.2 ohm.m 200
			Phase Shift Resistivity 22 inch Spacing at 2 MHz, Environmentally Corrected. (P22H) ARC[1] RM 0.2 ohm.m 200			Attenuation Resistivity 28 inch Spacing at 2 MHz, Environmentally Corrected (A28H) ARC[1] RM 0.2 ohm.m 200
Resistivity Time After Bit (ARTM) ARC[1] 0 h 10			Attenuation Resistivity 22 inch Spacing at 2 MHz, Environmentally Corrected (A22H) ARC[1] RM 0.2 ohm.m 200			Phase Shift Resistivity 22 inch Spacing at 400 KHz, Environmentally Corrected. (P22L) ARC[1] RM 0.2 ohm.m 200
			Phase Shift Resistivity 16 inch Spacing at 2 MHz, Environmentally Corrected. (P16H) ARC[1] RM 0.2 ohm.m 200			Phase Shift Resistivity 16 inch Spacing at 2 MHz, Environmentally Corrected. (P16L) ARC[1] RM 0.2 ohm.m 200
Rate of penetration averaged over the last 5 ft (1.5 m) (ROP5) RT 200 m/h 0						Phase Shift Resistivity 16 inch Spacing at 2 MHz, Environmentally Corrected. (P16L) ARC[1] RM 0.2 ohm.m 200

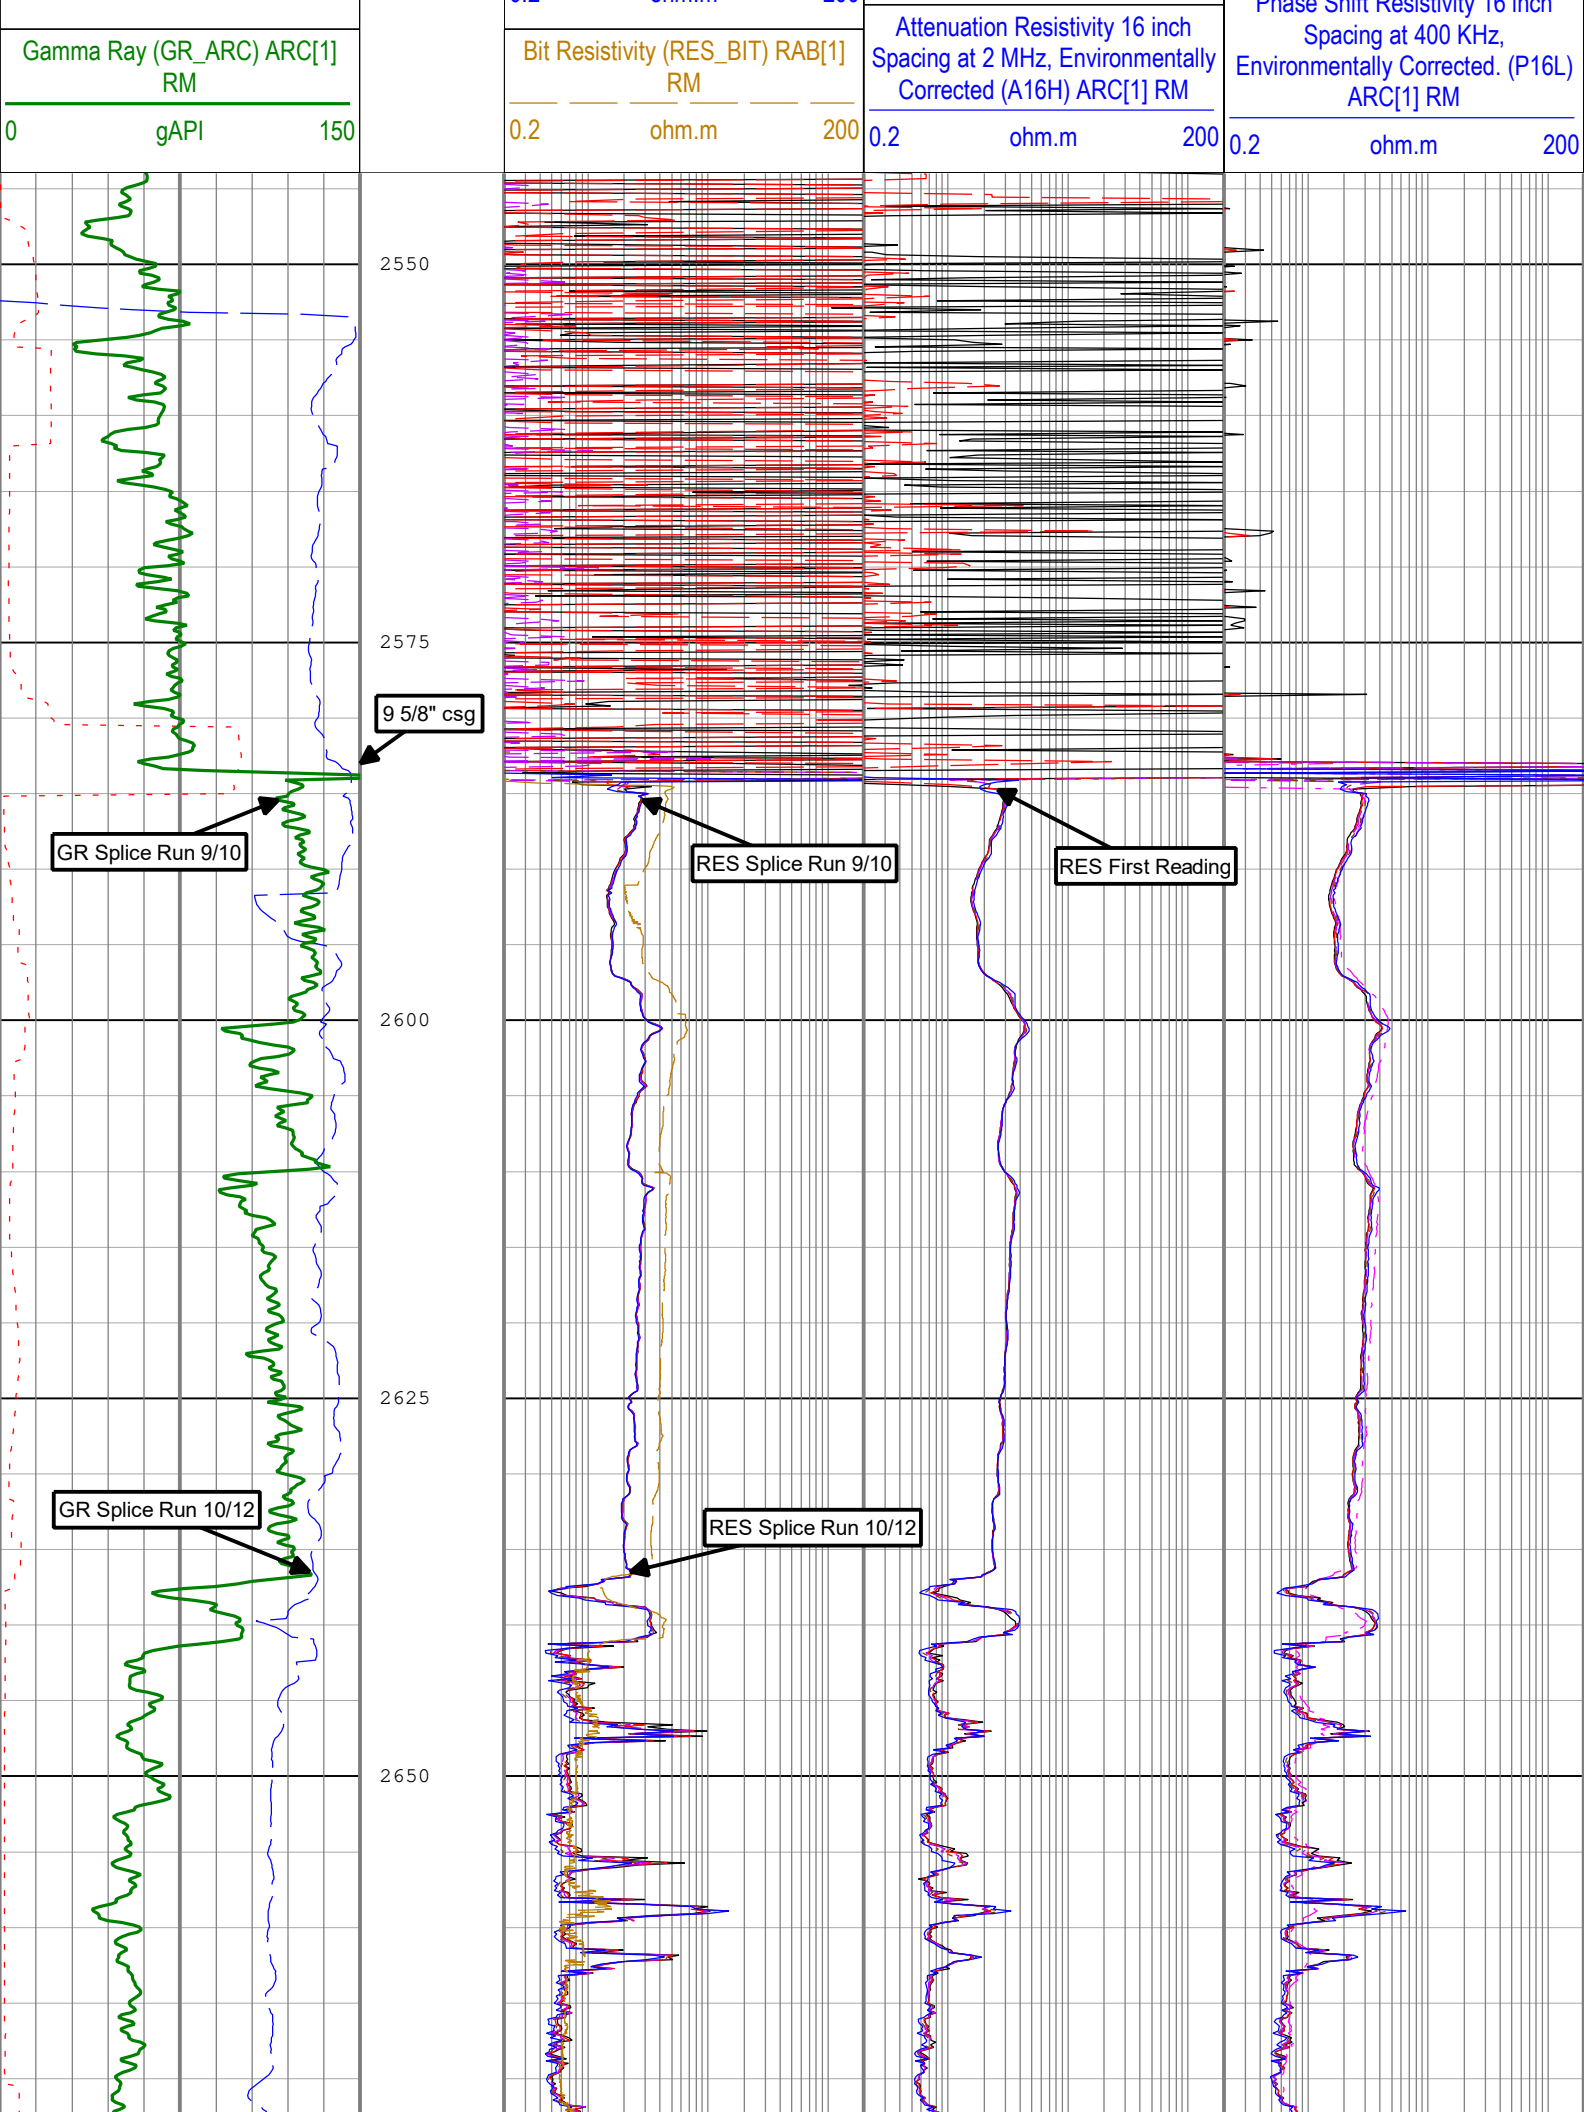

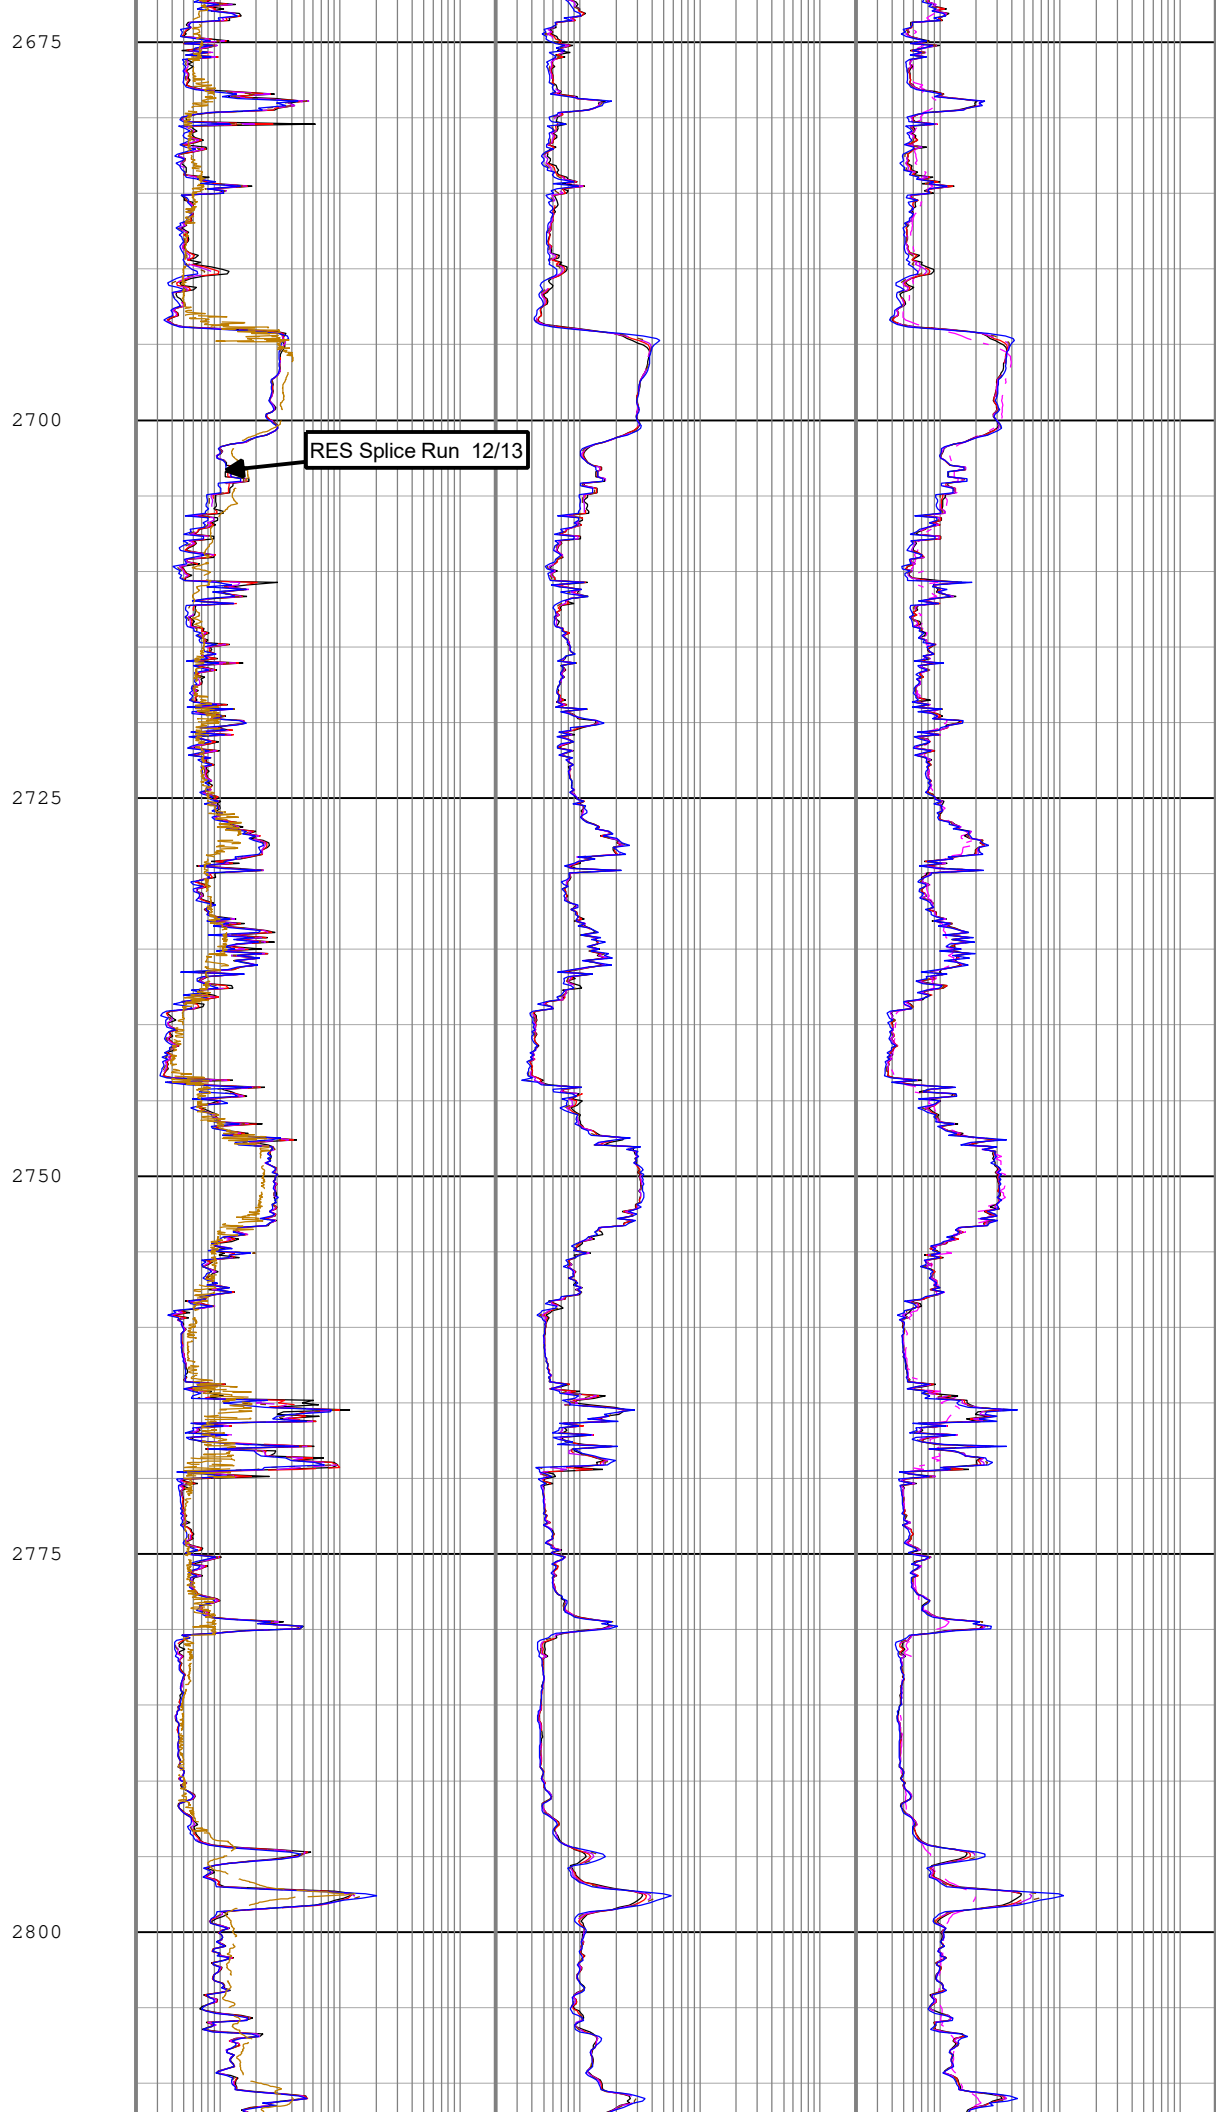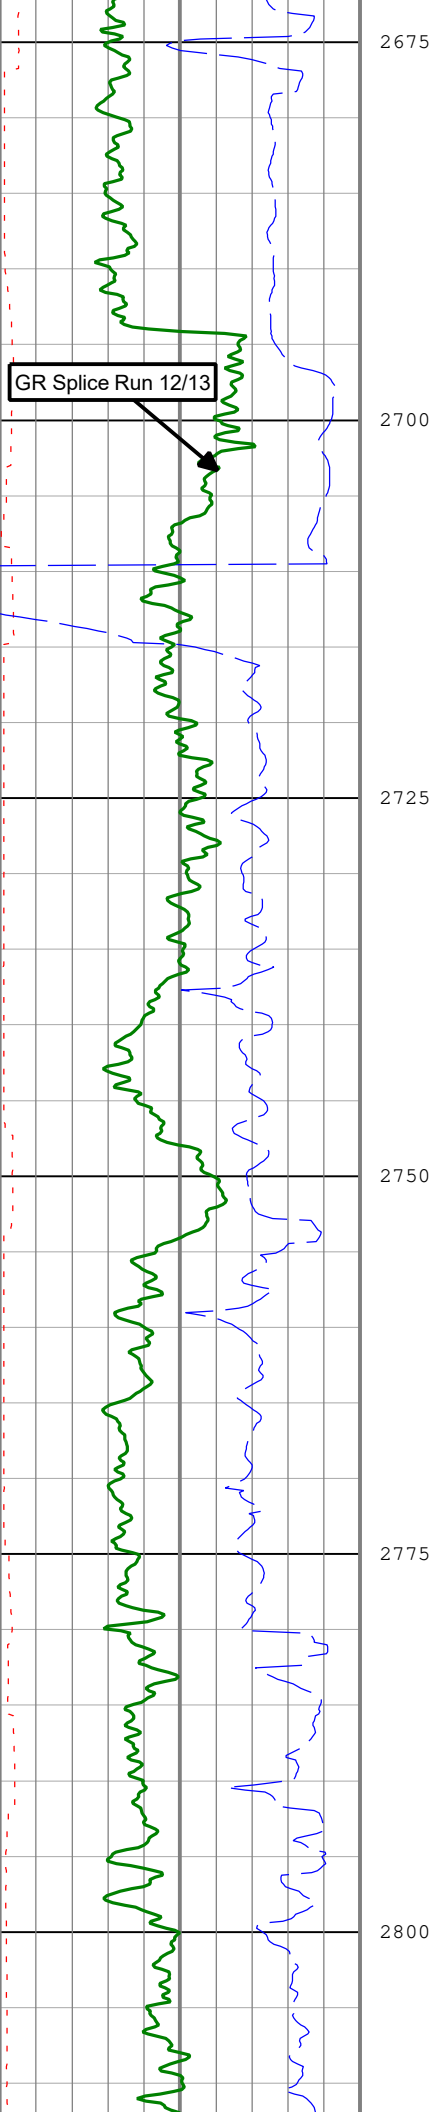

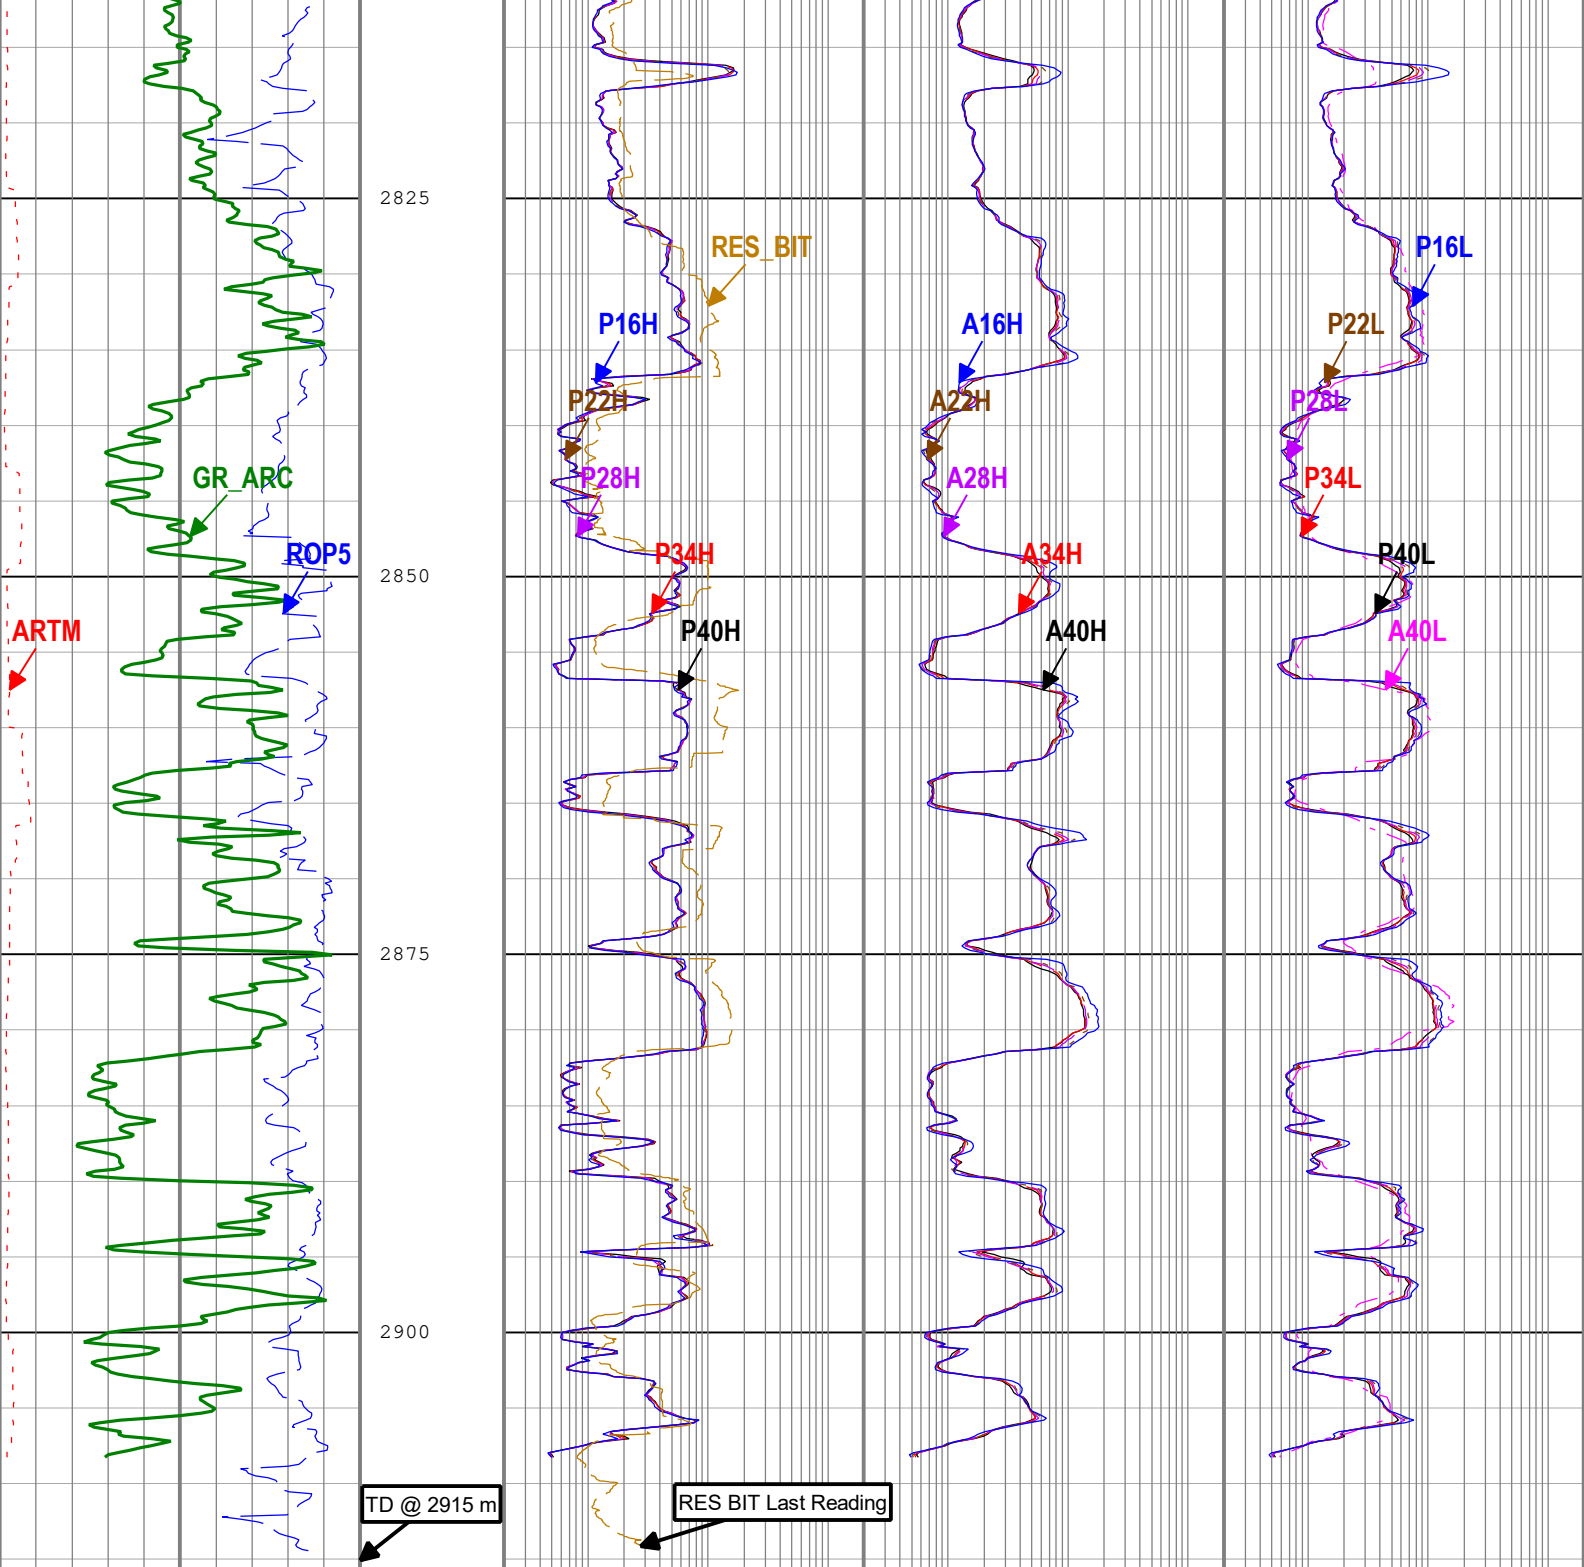

Resistivity Time After Bit (ARTM) ARC[1] 0h10	Phase Shift Resistivity 40 inch Spacing at 2 MHz, Environmentally Corrected. (P40H) ARC[1] RM 0.2ohm.m200	Attenuation Resistivity 40 inch Spacing at 2 MHz, Environmentally Corrected. (A40H) ARC[1] RM 0.2ohm.m200	Attenuation Resistivity 40 inch Spacing at 400 KHz, Environmentally Corrected (A40L) ARC[1] RM 0.2ohm.m200
Rate of penetration averaged over the last 5 ft (1.5 m) (ROP5) RT 200m/h0	Phase Shift Resistivity 34 inch Spacing at 2 MHz, Environmentally Corrected. (P34H) ARC[1] RM 0.2ohm.m200	Attenuation Resistivity 34 inch Spacing at 2 MHz, Environmentally Corrected (A34H) ARC[1] RM 0.2ohm.m200	Phase Shift Resistivity 40 inch Spacing at 400 KHz, Environmentally Corrected. (P40L) ARC[1] RM 0.2ohm.m200
Gamma Ray (GR_ARC) ARC[1] RM 0gAPI150	Phase Shift Resistivity 28 inch Spacing at 2 MHz, Environmentally Corrected. (P28H) ARC[1] RM 0.2ohm.m200	Attenuation Resistivity 28 inch Spacing at 2 MHz, Environmentally Corrected (A28H) ARC[1] RM 0.2ohm.m200	Phase Shift Resistivity 34 inch Spacing at 400 KHz, Environmentally Corrected. (P34L) ARC[1] RM 0.2ohm.m200
	Phase Shift Resistivity 22 inch Spacing at 2 MHz, Environmentally Corrected. (P22H) ARC[1] RM 0.2ohm.m200	Attenuation Resistivity 22 inch Spacing at 2 MHz, Environmentally Corrected (A22H) ARC[1] RM 0.2ohm.m200	Phase Shift Resistivity 28 inch Spacing at 400 KHz, Environmentally Corrected. (P28L) ARC[1] RM 0.2ohm.m200

	Spacing at 2 MHz, Environmentally Corrected. (P22H) ARC[1] RM	Spacing at 2 MHz, Environmentally Corrected (A22H) ARC[1] RM	0.2 ohm.m 200	0.2 ohm.m 200	Phase Shift Resistivity 28 inch Spacing at 400 KHz, Environmentally Corrected. (P28L) ARC[1] RM	0.2 ohm.m 200
	Phase Shift Resistivity 16 inch Spacing at 2 MHz, Environmentally Corrected. (P16H) ARC[1] RM	Attenuation Resistivity 16 inch Spacing at 2 MHz, Environmentally Corrected (A16H) ARC[1] RM	0.2 ohm.m 200	0.2 ohm.m 200	Phase Shift Resistivity 22 inch Spacing at 400 KHz, Environmentally Corrected. (P22L) ARC[1] RM	0.2 ohm.m 200
	Bit Resistivity (RES_BIT) RAB[1] RM		0.2 ohm.m 200		Phase Shift Resistivity 16 inch Spacing at 400 KHz, Environmentally Corrected. (P16L) ARC[1] RM	0.2 ohm.m 200

Description:
Format: Log (Resistivity - Dual Frequency)
Index Scale: 1:500
Index Unit: m
Index Type: Measured Depth
Creation Date: 20-Jan-2020 10:42:01

Channel Processing Parameters				
Run 9: Parameters				
Parameter	Description	Tool	Value	Unit
ABNT	Abnormal Transmitter Indicator	ARC6	NO_TX_FAILED	
BH_COMPUTE	Borehole Effect Computation Option	ARC6	No	
BHK	Drilling Fluid Potassium Concentration	Borehole	6.7	%
BHT	Bottom Hole Temperature	Borehole	38	degC
BS	Bit Size	DNMSESSION	Depth Zoned	in
DEPTH_SEL	Depth Selection Parameter	DNMSESSION	Driller's Depth	
DFD	Drilling Fluid Density	Borehole	1.15	g/cm3
DFT_CATEGORY	Drilling Fluid Type	Borehole	Water	
ERRCT	Percentage Error Cutoff	ARC6	4.5	%
GRSE_RM	Generalized Mud Resistivity Selection for Recorded Mode	Borehole	REMS(RM)	
GRSH	Gamma Ray Shale	ARC6	1000	gAPI
GTSE_RM	Generalized Temperature Selection for Recorded Mode	Borehole	DHAT(RM)	
HIGH_BLEND	High Resistivity Threshold for Blending	ARC6	2	ohm.m
INVAS_COMPUTE	Invasion Computation Option	ARC6	No	
LOW_BLEND	Low Resistivity Threshold for Blending	ARC6	1	ohm.m
MST	Mud Sample Temperature	Borehole	18	degC
MSWS	ARCWizard Model Switch Window Size	ARC6	152.4	cm
MULTIEFFECT_COMPUTE	Multi-effect Computation Option	ARC6	No	
PRTD	ARCWizard Preferred Resistivity Log for Rt Display while Multi-Effects	ARC6	P34B	
RMS	Resistivity of Mud Sample	Borehole	0.07	ohm.m
T1WM	ARCWizard Weight Multiplier to Measurements for Transmitter 1	ARC6	1	
T2WM	ARCWizard Weight Multiplier to Measurements for Transmitter 2	ARC6	1	
T3WM	ARCWizard Weight Multiplier to Measurements for Transmitter 3	ARC6	1	
T4WM	ARCWizard Weight Multiplier to Measurements for Transmitter 4	ARC6	1	
T5WM	ARCWizard Weight Multiplier to Measurements for Transmitter 5	ARC6	1	
ATMP_ARC	ARC Temperature Selection	ARC6	Annular	
TEMP_SEL_RAB	RAB Temperature Selection	RAB6	Tool	
UNIFORM_COMPUTE	Uniform Rock Computation Option	ARC6	No	
Run 9 Depth Zoned Parameters				

Run 9Depth Zoned Parameters

Parameter	Value	Start (m)	Stop (m)
BS	12.25	2544	2584
BS	8.5	2584	2591.89

All depth are actual.

Run 10: Parameters

Parameter	Description	Tool	Value	Unit
ABNT	Abnormal Transmitter Indicator	ARC6	NO_TX_FAILED	
BH_COMPUTE	Borehole Effect Computation Option	ARC6	No	
BHK	Drilling Fluid Potassium Concentration	Borehole	6.3	%
BHT	Bottom Hole Temperature	Borehole	43	degC
BS	Bit Size	DNMSESSION	Depth Zoned	in
DEPTH_SEL	Depth Selection Parameter	DNMSESSION	Driller's Depth	
DFD	Drilling Fluid Density	Borehole	1.15	g/cm3
DFT_CATEGORY	Drilling Fluid Type	Borehole	Water	
ERRCT	Percentage Error Cutoff	ARC6	4.5	%
GRSE_RM	Generalized Mud Resistivity Selection for Recorded Mode	Borehole	REMS(RM)	
GRSH	Gamma Ray Shale	ARC6	1000	gAPI
GTSE_RM	Generalized Temperature Selection for Recorded Mode	Borehole	DHAT(RM)	
HIGH_BLEND	High Resistivity Threshold for Blending	ARC6	2	ohm.m
INVAS_COMPUTE	Invasion Computation Option	ARC6	No	
LOW_BLEND	Low Resistivity Threshold for Blending	ARC6	1	ohm.m
MST	Mud Sample Temperature	Borehole	15	degC
MSWS	ARCWizard Model Switch Window Size	ARC6	152.4	cm
MULTIEFFECT_COMPUTE	Multi-effect Computation Option	ARC6	No	
PRTD	ARCWizard Preferred Resistivity Log for Rt Display while Multi-Effects	ARC6	P34B	
RMS	Resistivity of Mud Sample	Borehole	0.07	ohm.m
T1WM	ARCWizard Weight Multiplier to Measurements for Transmitter 1	ARC6	1	
T2WM	ARCWizard Weight Multiplier to Measurements for Transmitter 2	ARC6	1	
T3WM	ARCWizard Weight Multiplier to Measurements for Transmitter 3	ARC6	1	
T4WM	ARCWizard Weight Multiplier to Measurements for Transmitter 4	ARC6	1	
T5WM	ARCWizard Weight Multiplier to Measurements for Transmitter 5	ARC6	1	
ATMP_ARC	ARC Temperature Selection	ARC6	Annular	
TEMP_SEL_RAB	RAB Temperature Selection	RAB6	Tool	
UNIFORM_COMPUTE	Uniform Rock Computation Option	ARC6	No	

Run 10Depth Zoned Parameters

Parameter	Value	Start (m)	Stop (m)
BS	12.25	2544	2584
BS	8.5	2584	2642.97

All depth are actual.

Run 12: Parameters

Parameter	Description	Tool	Value	Unit
ABNT	Abnormal Transmitter Indicator	ARC6	NO_TX_FAILED	
BHK	Drilling Fluid Potassium Concentration	Borehole	6	%
BHT	Bottom Hole Temperature	Borehole	44	degC
BS	Bit Size	DNMSESSION	Depth Zoned	in
DFD	Drilling Fluid Density	Borehole	1.15	g/cm3
DFT_CATEGORY	Drilling Fluid Type	Borehole	Water	

DFT_CATEGORY	Drilling Fluid Type	Borehole	Water	
GRSE_RM	Generalized Mud Resistivity Selection for Recorded Mode	Borehole	REMS(RM)	
GTSE_RM	Generalized Temperature Selection for Recorded Mode	Borehole	DHAT(RM)	
HIGH_BLEND	High Resistivity Threshold for Blending	ARC6	2	ohm.m
LOW_BLEND	Low Resistivity Threshold for Blending	ARC6	1	ohm.m
MST	Mud Sample Temperature	Borehole	14.8	degC
RMS	Resistivity of Mud Sample	Borehole	0.08	ohm.m
TEMP_SEL_RAB	RAB Temperature Selection	RAB6	Tool	

Run 12Depth Zoned Parameters				
Parameter	Value	Start (m)	Stop (m)	
BS	12.25	2544	2584	
BS	8.5	2584	2709.75	
All depth are actual.				

Run 13: Parameters				
Parameter	Description	Tool	Value	Unit
ABNT	Abnormal Transmitter Indicator	ARC6	NO_TX_FAILED	
BHK	Drilling Fluid Potassium Concentration	Borehole	6	%
BHT	Bottom Hole Temperature	Borehole	51	degC
BS	Bit Size	DNMSESSION	Depth Zoned	in
DFD	Drilling Fluid Density	Borehole	1.15	g/cm3
DFT_CATEGORY	Drilling Fluid Type	Borehole	Water	
GRSE_RM	Generalized Mud Resistivity Selection for Recorded Mode	Borehole	REMS(RM)	
GTSE_RM	Generalized Temperature Selection for Recorded Mode	Borehole	DHAT(RM)	
HIGH_BLEND	High Resistivity Threshold for Blending	ARC6	2	ohm.m
LOW_BLEND	Low Resistivity Threshold for Blending	ARC6	1	ohm.m
MST	Mud Sample Temperature	Borehole	18.9	degC
RMS	Resistivity of Mud Sample	Borehole	0.09	ohm.m
TEMP_SEL_RAB	RAB Temperature Selection	RAB6	Tool	

Run 13Depth Zoned Parameters				
Parameter	Value	Start (m)	Stop (m)	
BS	12.25	2544	2584	
BS	8.5	2584	2914.93	
All depth are actual.				

Tool Control Parameters	
-------------------------	--

Run 9: Parameters				
Parameter	Description	Tool	Value	Unit
OFFBTM_TH	Threshold for deciding whether the bit is off bottom	DNMSESSION	0	m

Run 10: Parameters				
Parameter	Description	Tool	Value	Unit
OFFBTM_TH	Threshold for deciding whether the bit is off bottom	DNMSESSION	0	m

Calibration Report			
RAB6 (GeoVision Resistivity 675) Calibration - Run 9			
Primary Equipment :			
Electronics Chassis	RBEC	216	
M21V - Resistivity			

Measurement	Unit	Phase	Nominal	Low Limit	Actual	High Limit	

Monitor 2 at T1 Calibration Coefficient		Master	1.0000	0.9750	1.0000	1.0250	
---	--	--------	--------	--------	--------	--------	---

M22V - Resistivity

Master (Time Frame File): 16:32:26 08-Aug-2019

Measurement	Unit	Phase	Nominal	Low Limit	Actual	High Limit		
Monitor 2 at T2 Calibration Coefficient		Master	1.0000	0.9750	1.0020	1.0250		

M01V - Resistivity

Master (Time Frame File): 16:32:26 08-Aug-2019

Measurement	Unit	Phase	Nominal	Low Limit	Actual	High Limit		
Monitor 0 at T1 Calibration Coefficient		Master	1.0000	0.9750	0.9950	1.0250		

M02V - Resistivity

Master (Time Frame File): 16:32:26 08-Aug-2019

Measurement	Unit	Phase	Nominal	Low Limit	Actual	High Limit		
Monitor 0 at T2 Calibration Coefficient		Master	1.0000	0.9750	0.9980	1.0250		

R1V - Resistivity

Master (Time Frame File): 16:32:26 08-Aug-2019

Measurement	Unit	Phase	Nominal	Low Limit	Actual	High Limit		
Ring at T1 Calibration Coefficient		Master	1.0000	0.9750	1.0000	1.0250		

R2V - Resistivity

Master (Time Frame File): 16:32:26 08-Aug-2019

Measurement	Unit	Phase	Nominal	Low Limit	Actual	High Limit		
Ring at T2 Calibration Coefficient		Master	1.0000	0.9750	1.0030	1.0250		

BDM1 - Resistivity

Master (Time Frame File): 16:32:26 08-Aug-2019

Measurement	Unit	Phase	Nominal	Low Limit	Actual	High Limit		
Button Deep at T1 Calibration Coefficient		Master	1.0000	0.9750	1.0070	1.0250		

BDM2 - Resistivity

Master (Time Frame File): 16:32:26 08-Aug-2019

Measurement	Unit	Phase	Nominal	Low Limit	Actual	High Limit		
Button Deep at T2 Calibration Coefficient		Master	1.0000	0.9750	1.0100	1.0250		

BMM1 - Resistivity

Master (Time Frame File): 16:32:26 08-Aug-2019

Measurement	Unit	Phase	Nominal	Low Limit	Actual	High Limit		
Button Medium at T1 Calibration Coefficient		Master	1.0000	0.9750	0.9990	1.0250		

BMM2 - Resistivity

Master (Time Frame File): 16:32:26 08-Aug-2019

Measurement	Unit	Phase	Nominal	Low Limit	Actual	High Limit		
Button Medium at T2 Calibration Coefficient		Master	1.0000	0.9750	1.0020	1.0250		

BSM1 - Resistivity

Master (Time Frame File): 16:32:26 08-Aug-2019

Measurement	Unit	Phase	Nominal	Low Limit	Actual	High Limit		
Button Shallow at T1 Calibration Coefficient		Master	1.0000	0.9750	1.0000	1.0250		

BSM2 - Resistivity

Master (Time Frame File): 16:32:26 08-Aug-2019

Measurement	Unit	Phase	Nominal	Low Limit	Actual	High Limit		
Button Shallow at T2 Calibration Coefficient		Master	1.0000	0.9750	1.0030	1.0250		

PGR - Gamma Ray: Blanket

Master (Time Frame File): 14:06:21 18-Dec-2019

Measurement	Unit	Phase	Nominal	Low Limit	Actual	High Limit		
Gamma Ray Calibration Gain		Master	1.0000	0.7500	0.9838	1.2500		

ARC6 (Array Resistivity Compensated 675) Calibration - Run 9

Primary Equipment :

Elec. Chassis HP w/o AIM Receiver

AREA

618

RESAIBCAI Resistivity: Air

RESAIRCAL - Resistivity. All

Master (Time Frame File): 15:26:50 07-Dec-2019

Measurement	Unit	Phase	Nominal	Low Limit	Actual	High Limit	
Attenuation T1 at 2 MHz	dB	Master	8.500	6.500	7.951	10.500	
Attenuation T2 at 2 MHz	dB	Master	6.500	4.500	6.997	8.500	
Attenuation T3 at 2 MHz	dB	Master	4.500	2.500	4.584	6.500	
Attenuation T4 at 2 MHz	dB	Master	4.600	2.600	4.904	6.600	
Attenuation T5 at 2 MHz	dB	Master	3.600	1.600	3.142	5.600	
Phase Shift T1 at 2 MHz	deg	Master	0.100	-3.900	1.927	4.100	
Phase Shift T2 at 2 MHz	deg	Master	0.100	-3.900	-1.871	4.100	
Phase Shift T3 at 2 MHz	deg	Master	0.100	-3.900	1.878	4.100	
Phase Shift T4 at 2 MHz	deg	Master	0.100	-3.900	-1.879	4.100	
Phase Shift T5 at 2 MHz	deg	Master	0.100	-3.900	1.856	4.100	
Attenuation T1 at 400 KHz	dB	Master	8.500	6.500	7.970	10.500	
Attenuation T2 at 400 KHz	dB	Master	6.500	4.500	6.989	8.500	
Attenuation T3 at 400 KHz	dB	Master	4.500	2.500	4.593	6.500	
Attenuation T4 at 400 KHz	dB	Master	4.600	2.600	4.889	6.600	
Attenuation T5 at 400 KHz	dB	Master	3.600	1.600	3.160	5.600	
Phase Shift T1 at 400 KHz	deg	Master	0.100	-3.900	-0.666	4.100	
Phase Shift T2 at 400 KHz	deg	Master	0.100	-3.900	0.584	4.100	
Phase Shift T3 at 400 KHz	deg	Master	0.100	-3.900	-0.629	4.100	
Phase Shift T4 at 400 KHz	deg	Master	0.100	-3.900	0.582	4.100	
Phase Shift T5 at 400 KHz	deg	Master	0.100	-3.900	-0.643	4.100	
GRGAIN - Gamma Ray: Blanket							
Master (Time Frame File): 10:23:30 06-Jun-2019							
Measurement	Unit	Phase	Nominal	Low Limit	Actual	High Limit	
Gamma Ray Calibration Gain		Master	1.000	0.580	1.100	1.250	

Company: Equinor

Well: 31/5-7

Field: Eos

Rig Name: West Hercules

Country: Norway



VISION Resistivity
Dual Frequency
Recorded Mode, Composite