

Drilling Mechanics - APWD
Time Based



Real Time, Recorded Mode

Company: Equinor

Well: 31/5-7

Field: Eos

Rig Name: West Hercules

Country: Norway

Latitude: 60° 34' 35.14" N

UWID:

Longitude: 3° 26' 36.13" E

Rig Name:

West Hercules

Block: 31/5

Rig Type:


Semi-Submersible

FL: Norwegian North Sea

FL1: Section: 12 1/4 in.

FL2: Job no.: 19SCA0085

Log Measured From: - Drill Floor: 31.00 m
Permanent Datum: - Mean Sea Level



Ground Level: 307.00 m

Acquisition Dates: 23-Dec-2019 -- 25-Dec-2019

Other Services:

Log Interval: 23-Dec-19 10:00:00 AM -- 25-Dec-19 4:30:00 PM

Direction & Inclination (Surveys)

Index Types: Time

Directional Drilling

Index Scales: 5 cm / 3600 secs

VISION Resistivity

Depth Source: Driller's Depth

Depth Sensor: 3rd Party Depth

Print Type: Final

Spud Date: 02-Dec-2019




Disclaimer


THE USE OF AND RELIANCE UPON THIS RECORDED-DATA BY THE HEREIN NAMED COMPANY (AND ANY OF ITS AFFILIATES, PARTNERS, REPRESENTATIVES, AGENTS, CONSULTANTS AND EMPLOYEES) IS SUBJECT TO THE TERMS AND CONDITIONS AGREED UPON BETWEEN SCHLUMBERGER AND THE COMPANY, INCLUDING: (a) RESTRICTIONS ON USE OF THE RECORDED-DATA; (b) DISCLAIMERS AND WAIVERS OF WARRANTIES AND REPRESENTATIONS REGARDING COMPANY'S USE AND RELIANCE UPON THE RECORDED-DATA; AND (c) CUSTOMER'S FULL AND SOLE RESPONSIBILITY FOR ANY INFERENCE DRAWN OR DECISION MADE IN CONNECTION WITH THE USE OF THIS RECORDED-DATA.

Contents

1. Header
2. Disclaimer
3. Contents
4. Well Sketch
5. Borehole Size/Casing/Tubing Record
6. Operational Run Summary
7. Borehole Fluids
8. Remarks and Equipment Summary
9. Run 8 Drilling Mechanics - APWD - Time Based
 - 9.1 Integration Summary
 - 9.2 Composite Summary
 - 9.3 Log (Drilling Mechanics Light)
10. Tail

Well Sketch

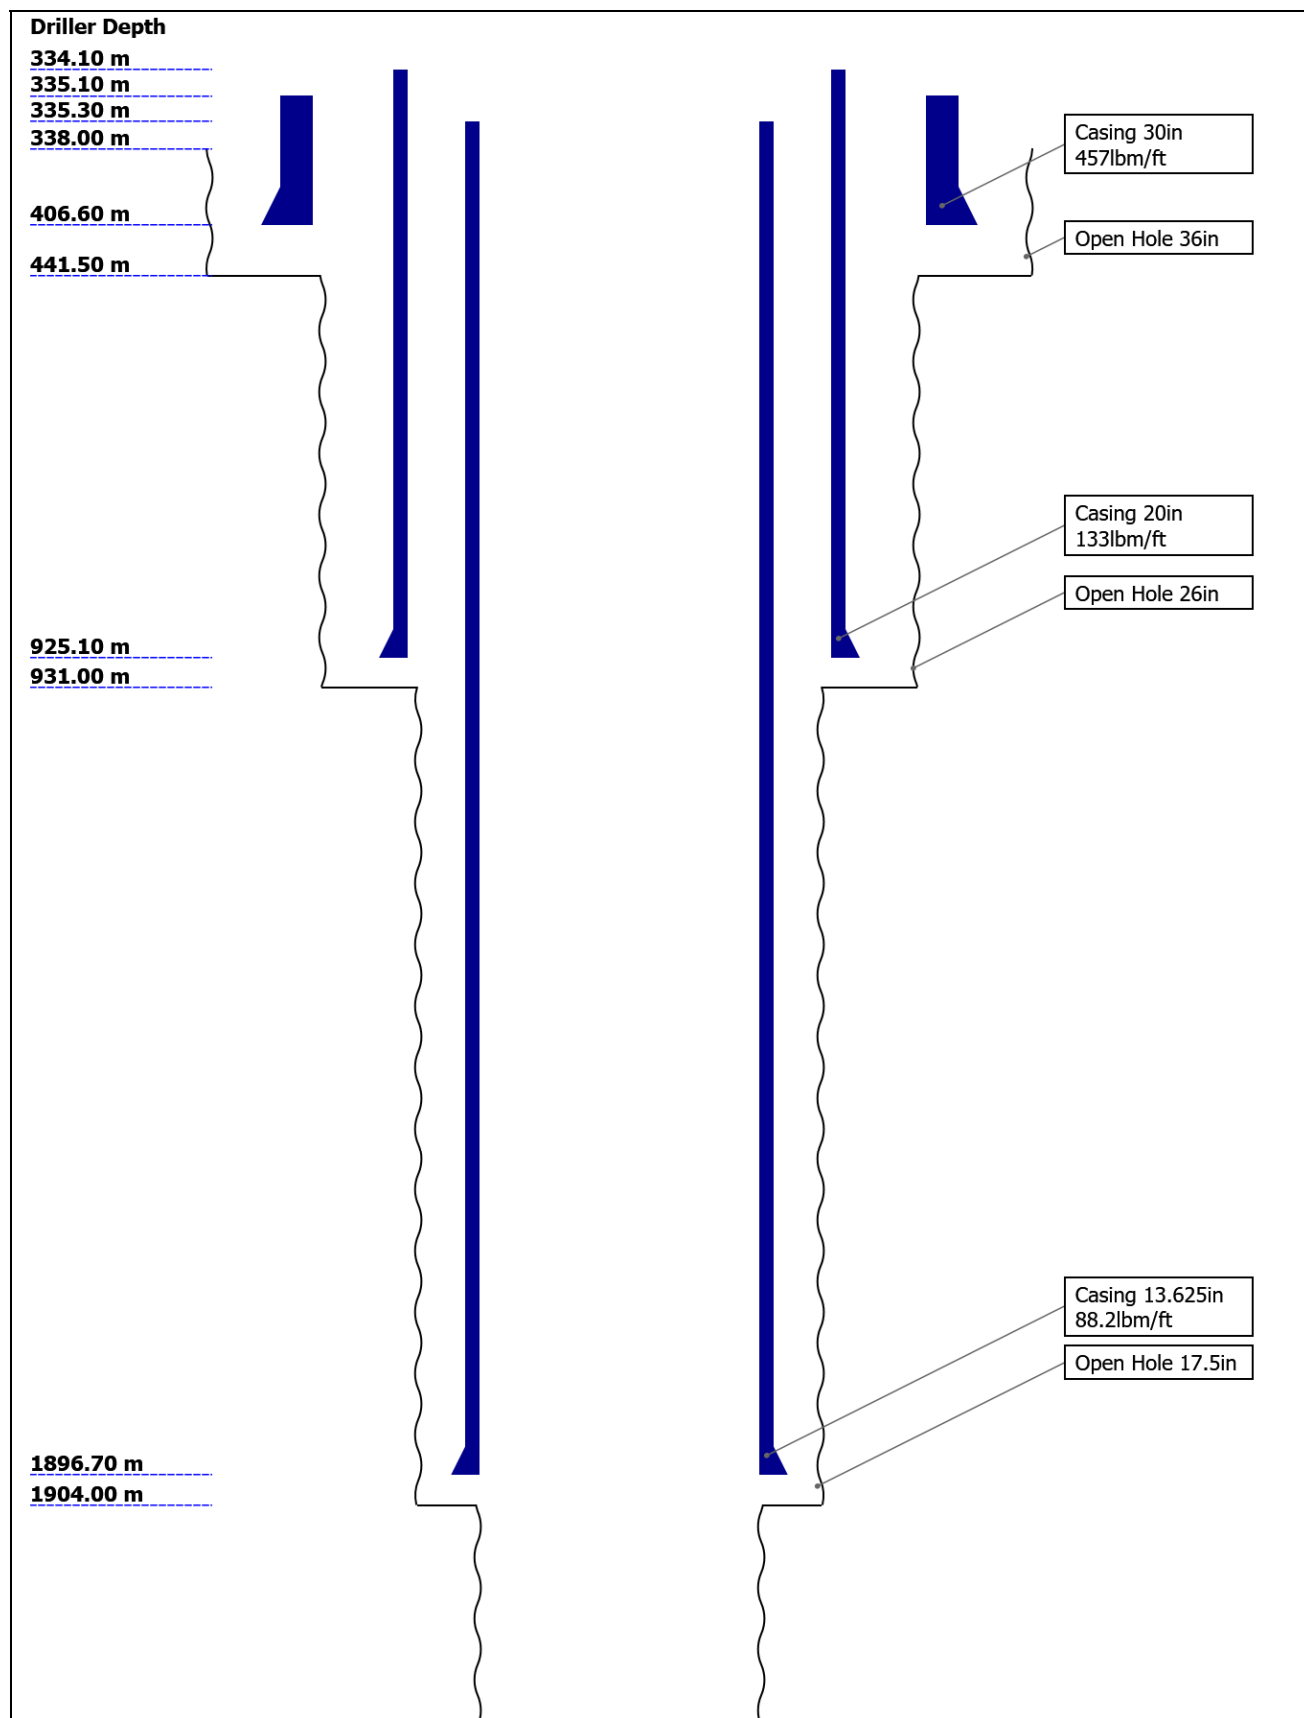

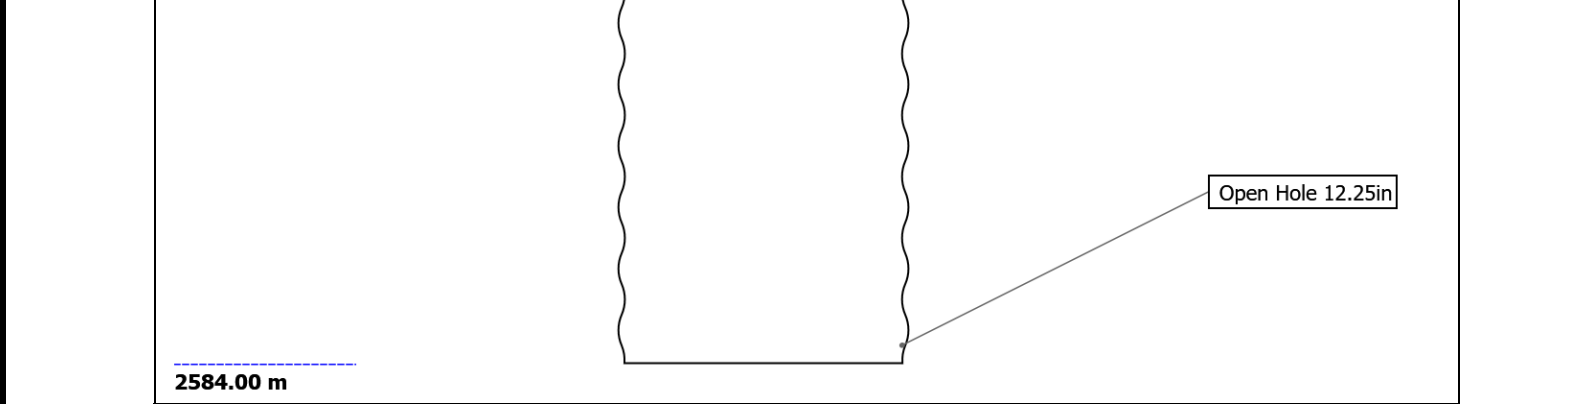

Borehole Size/Casing Record

Bit						
Bit Size (in)	36	26	17.5	12.25		
Top Driller (m)	338	441.5	931	1904		
Bottom Driller (m)	441.5	931	1904	2584		
Casing						
Size (in)	30	20	13.625			
Weight (lbm/ft)	457	133	88.2			
Inner Diameter (in)	27.067	18.73	12.375			
Grade	X56	N80	P110			
Top Driller (m)	335.1	334.1	335.3			
Bottom Driller (m)	406.6	925.1	1896.7			

Operational Run Summary

Parameter (unit)	Run 8					
Date Log Started	23-Dec-2019					
Time Log Started	06:55:46					
Date Log Finished	25-Dec-2019					
Time Log Finished	18:27:07					
Bit Size (in)	12.250					
Bit Start Depth (m)	1904.00					
Bit Stop Depth (m)	2584.00					
Top Log Interval (m)	1900.20					
Bottom Log Interval (m)	2574.80					
Max Hole Deviation (deg)	0.26					
Azimuth of Max Deviation (deg)	22.82					
Logging Unit Number	A615					
Logging Unit Location	Service Office					
Recorded By	G.Boyd					
Witnessed By	J.Eikenes					
Service Order Number	19SCA0085					

Borehole Fluids

Parameter(unit)	Run 8					
Fluid Type	Water					
Fluid Name	Glydril					
Max Recorded Temperatures (degC)	45					
Source of Sample	Active Tank					
Salinity (ppm)	130260.8					
Density (g/cm3)	Zoned					
Funnel Viscosity (s)						
Fluid Loss (cm3)						
PH						
Source RMF						
RMC	Pressed					
RM @ Meas Temp (ohm.m@degC)	0.07 @ 17.1					
RMF @ Meas Temp (ohm.m@degC)	0.06 @ 18.06					
RMC @ Meas Temp (ohm.m@degC)	0.1 @ 20					
RM @ BHT (ohm.m@degC)	0.04 @ 45					
RMF @ BHT (ohm.m@degC)	0.04 @ 45					
RMC @ BHT (ohm.m@degC)	0.06 @ 45					
Total Solid (%)						
High Gravity Solids (%)						

Run 8

Remarks and Equipment Summary

Run 8: Toolstring		Run 8: Remarks	
Equip name NM Stab: 9 1/2":M WS 3732	Length 24.15	MP name 12 1/8 in. Non-Mag Stab	Offset
		All depths referenced to driller's depth. See EOWR for depth tracking details.	
		APWD data is from tool memory. All other data is Real Time.	
		Gamma Ray measurement is environmentally corrected for mud weight, bit size, collar thickness and Potassium content.	
		Run 8 and 12 1/4 in. section TD at 2584 m.	

Equip name	Length	MP name	Offset
NM Stab: 9 1/2":M	24.15	12 1/8 in. Non-Mag Stab	
WS 3732			

X/O: 9 1/2":XOS- 21.65
947

TELE900:E9186-I 20.82

MSSU900:74066
 Upper Extender:02-0
 6-19
 MDC900:E9186-IW
 MMA:7002
 MDI:3770
 PMVC:43
 PME:A:3792
 MTA:3757
 MTK900:S-298895-7
 775
 MSSD900:888081-1
 Lower Extender, Lon
 g:10708-9

MP name	Offset
12 1/8 in. Non-Mag Stab	

X-Over

TeleScope


Run 8: Remarks

All depths referenced to driller's depth. See EOWR for depth tracking details.

APWD data is from tool memory. All other data is Real Time.

Gamma Ray measurement is environmentally corrected for mud weight, bit size, collar thickness and Potassium content.

Run 8 and 12 1/4 in. section TD at 2584 m.

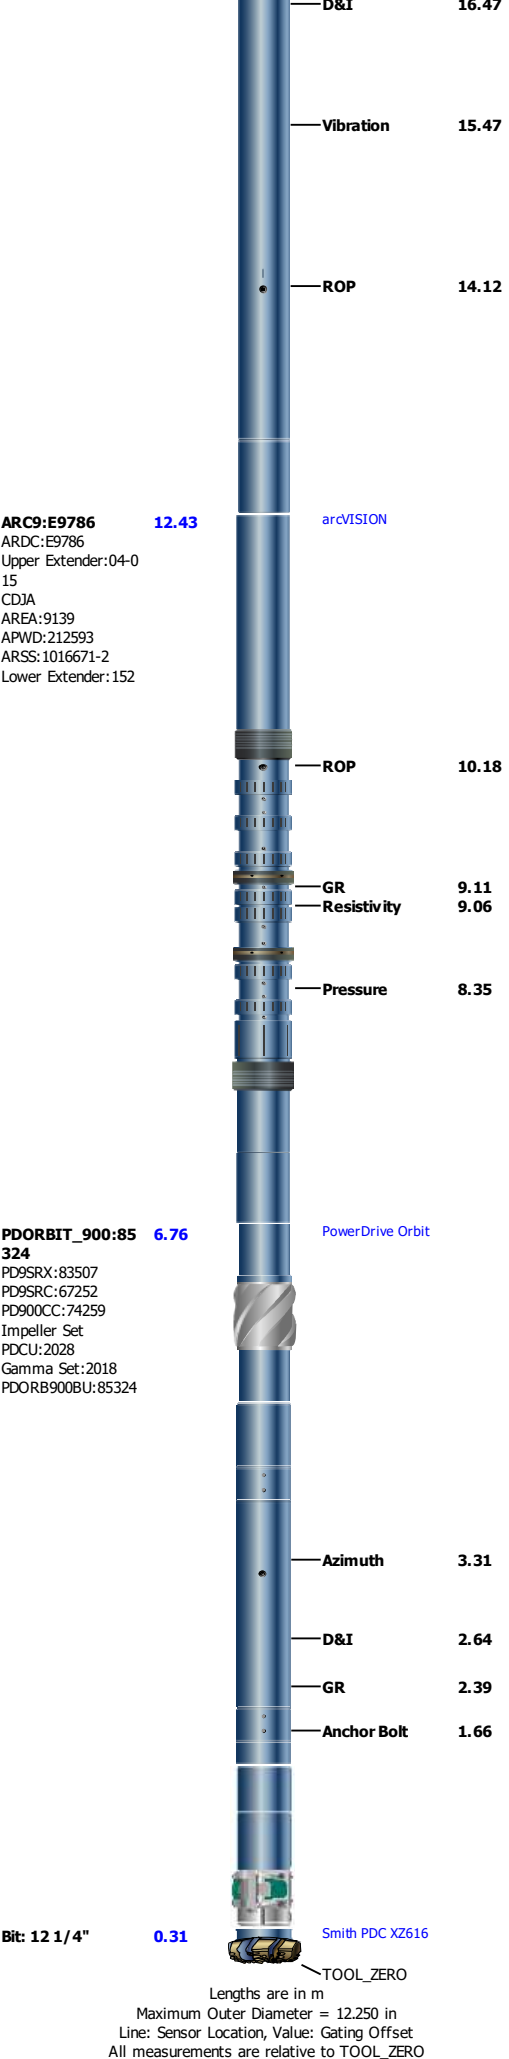

Drilling Mechanics - APWD - Time Based

Pass Summary


Run Name	Pass Objective	Direction	Start	Stop	Include Parallel Data
Run 8	TimeLogicalAcq	Down	23-Dec-2019 6:55:46 AM	25-Dec-2019 6:27:07 PM	Yes


Log


Company: Equinor Well: 31/5-7



Run 8: TimeLogicalAcq:S046


Description: Format: Log (Drilling Mechanics Light) Index Scale: 5 cm per 3600 s Index Type: Time Creation Date: 30-Dec-2019 11:06:20

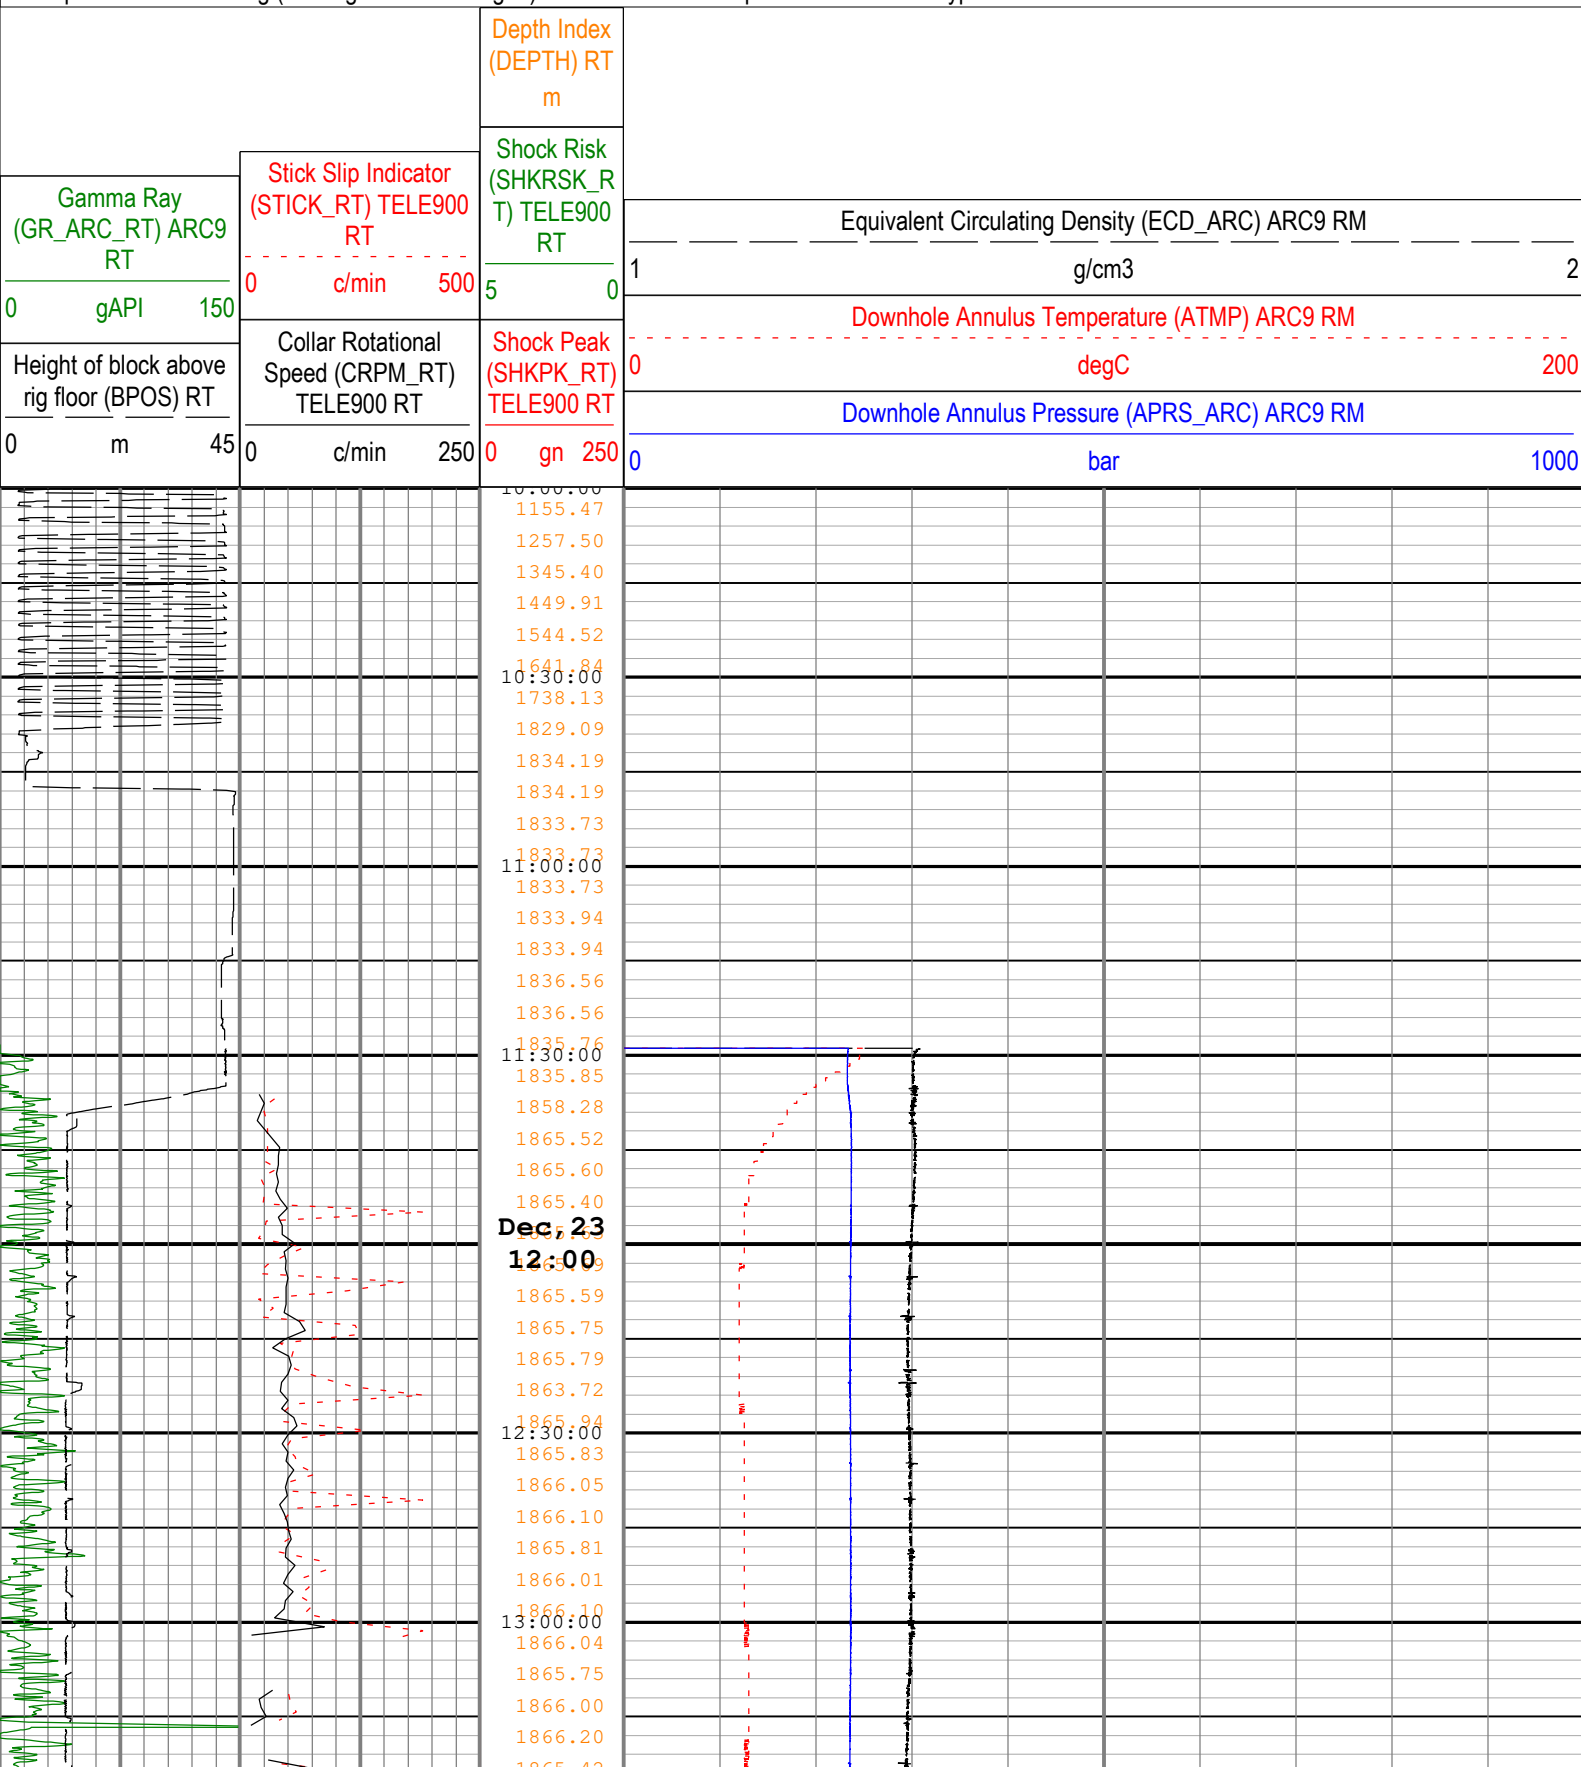


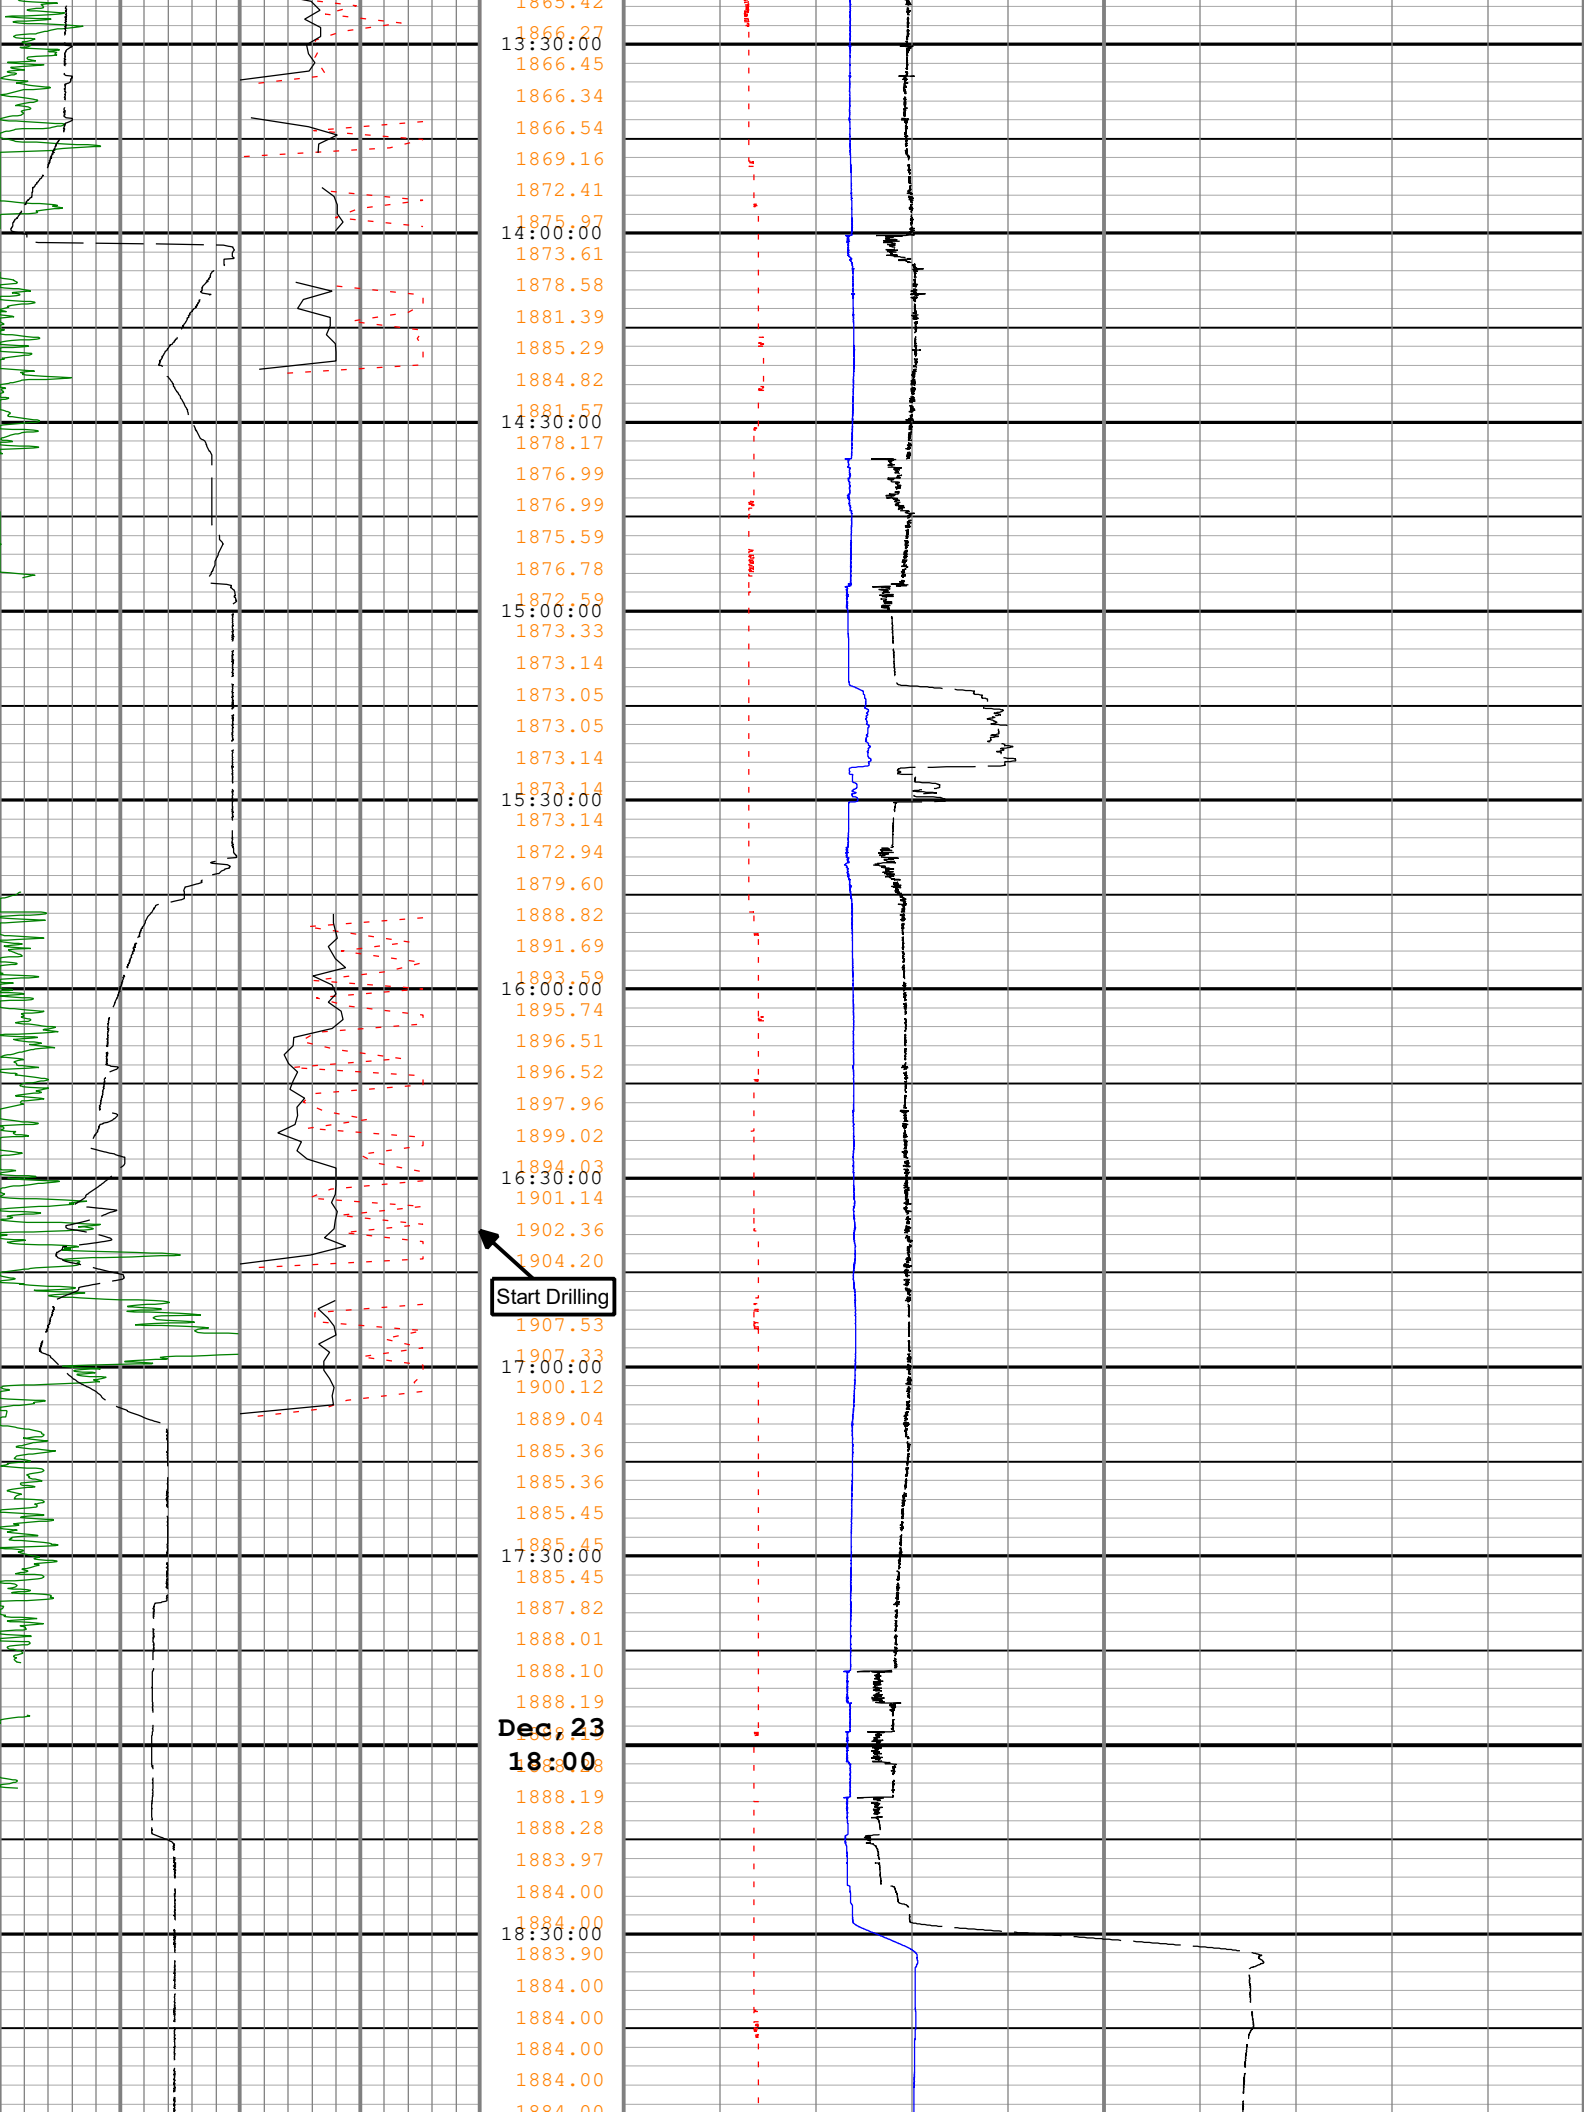


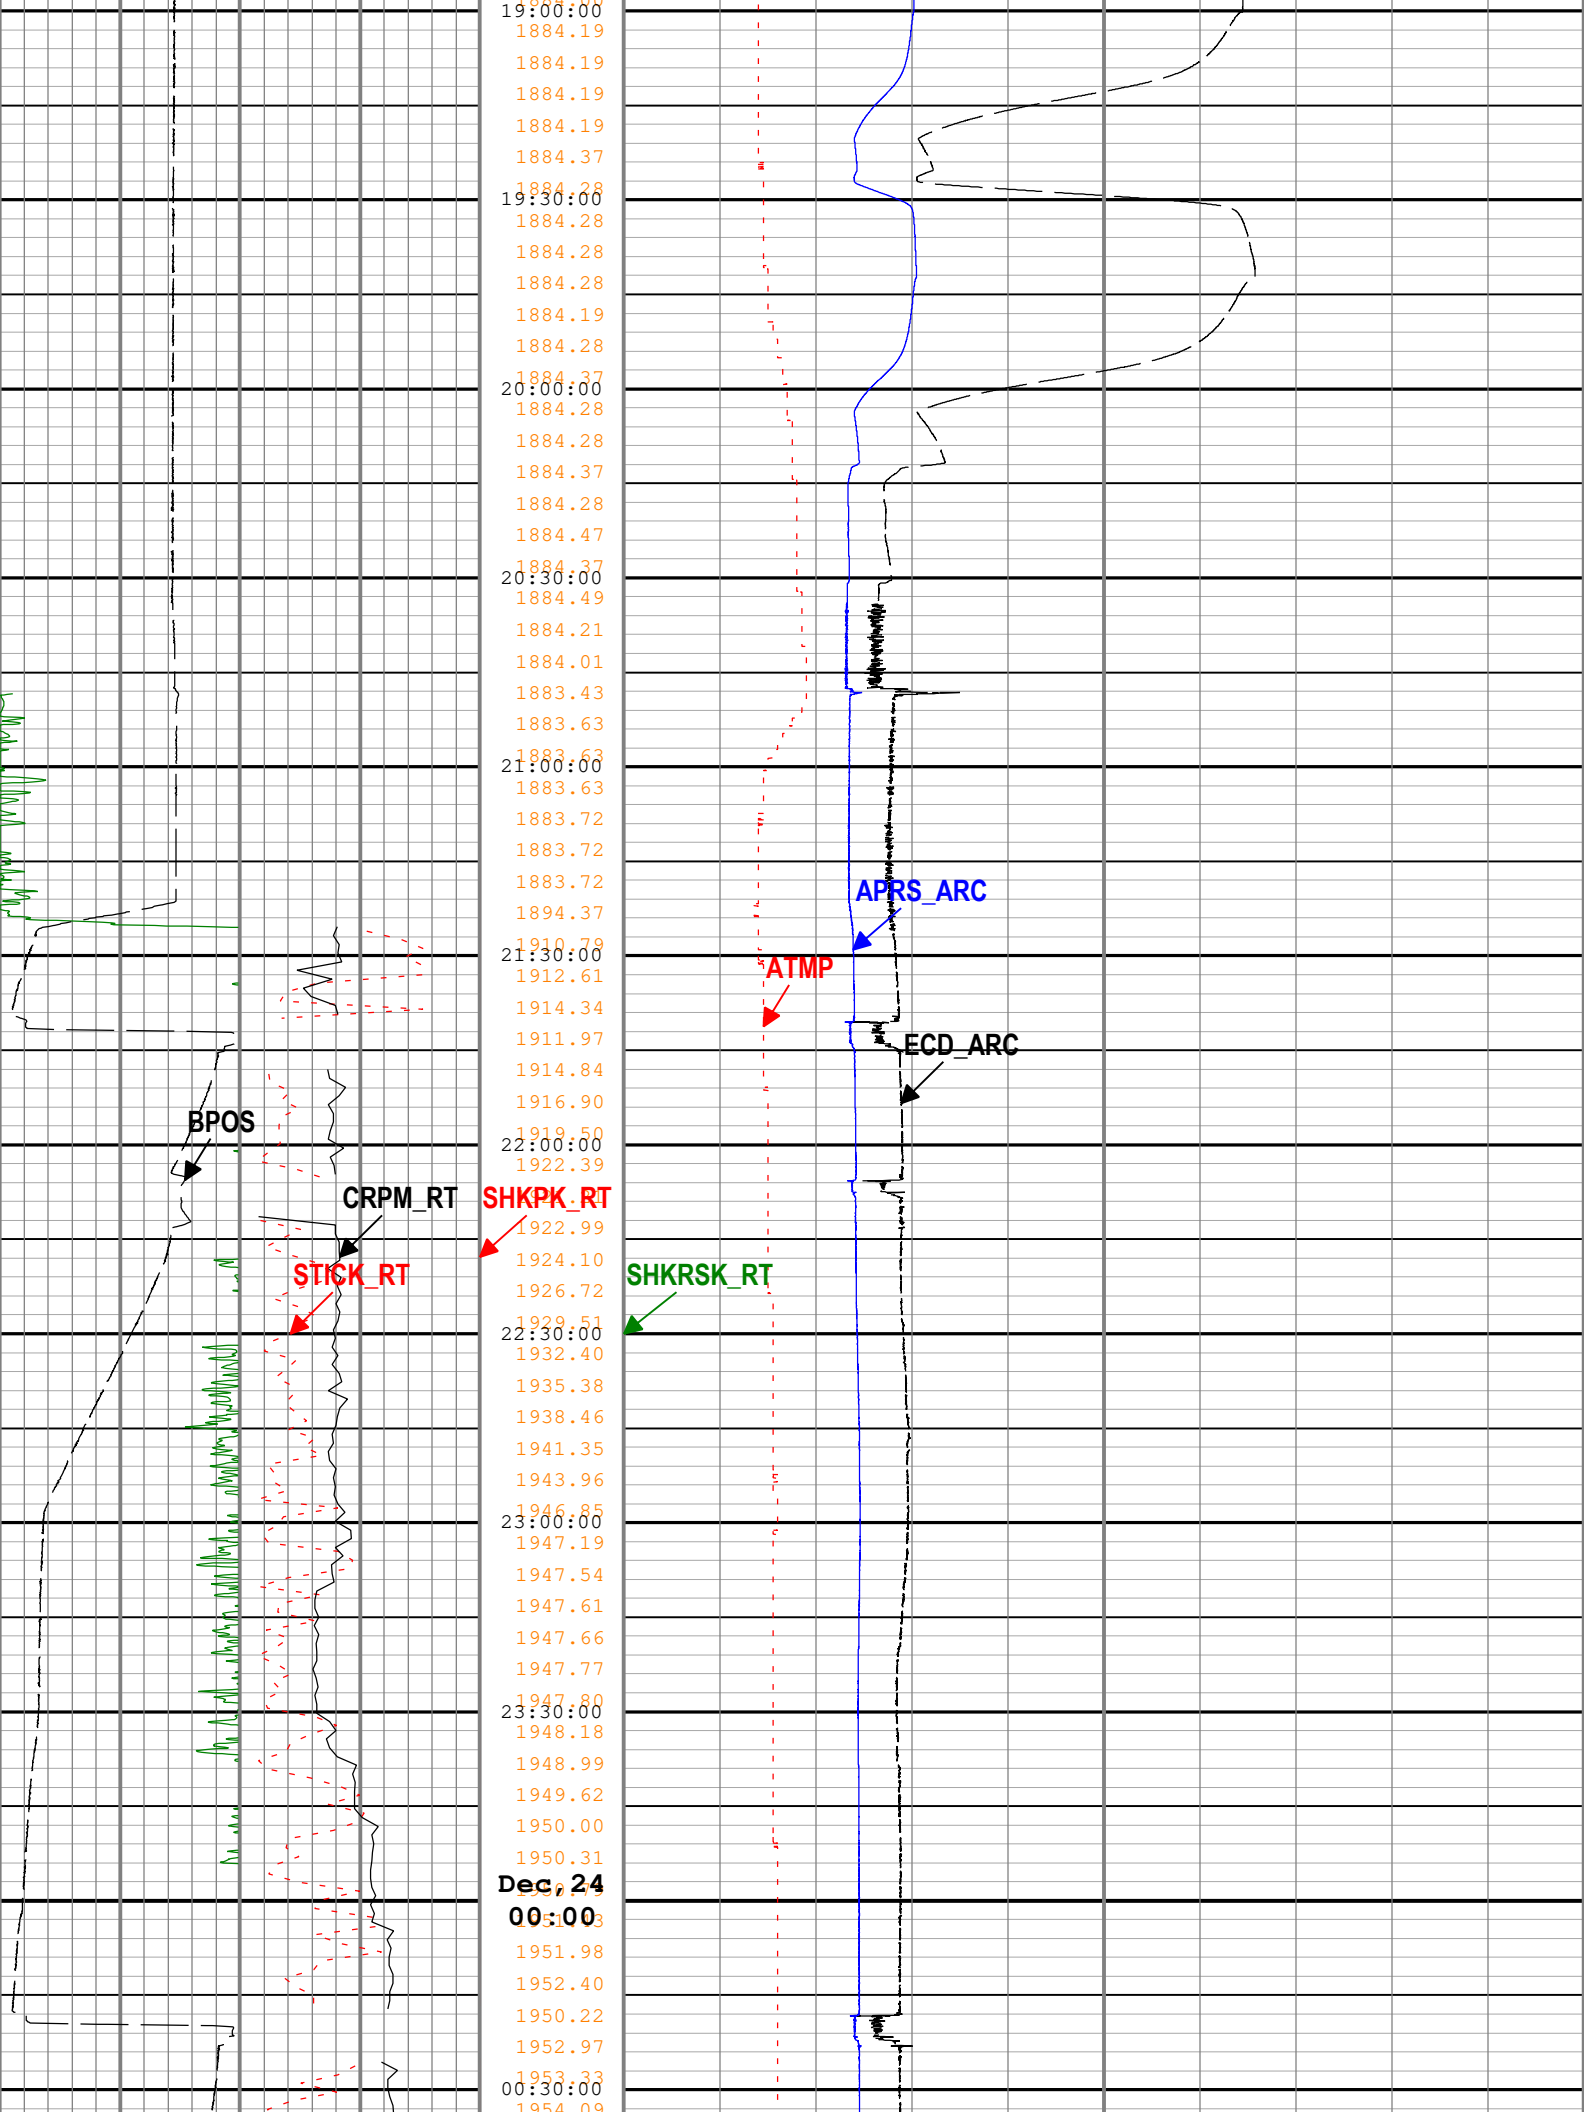

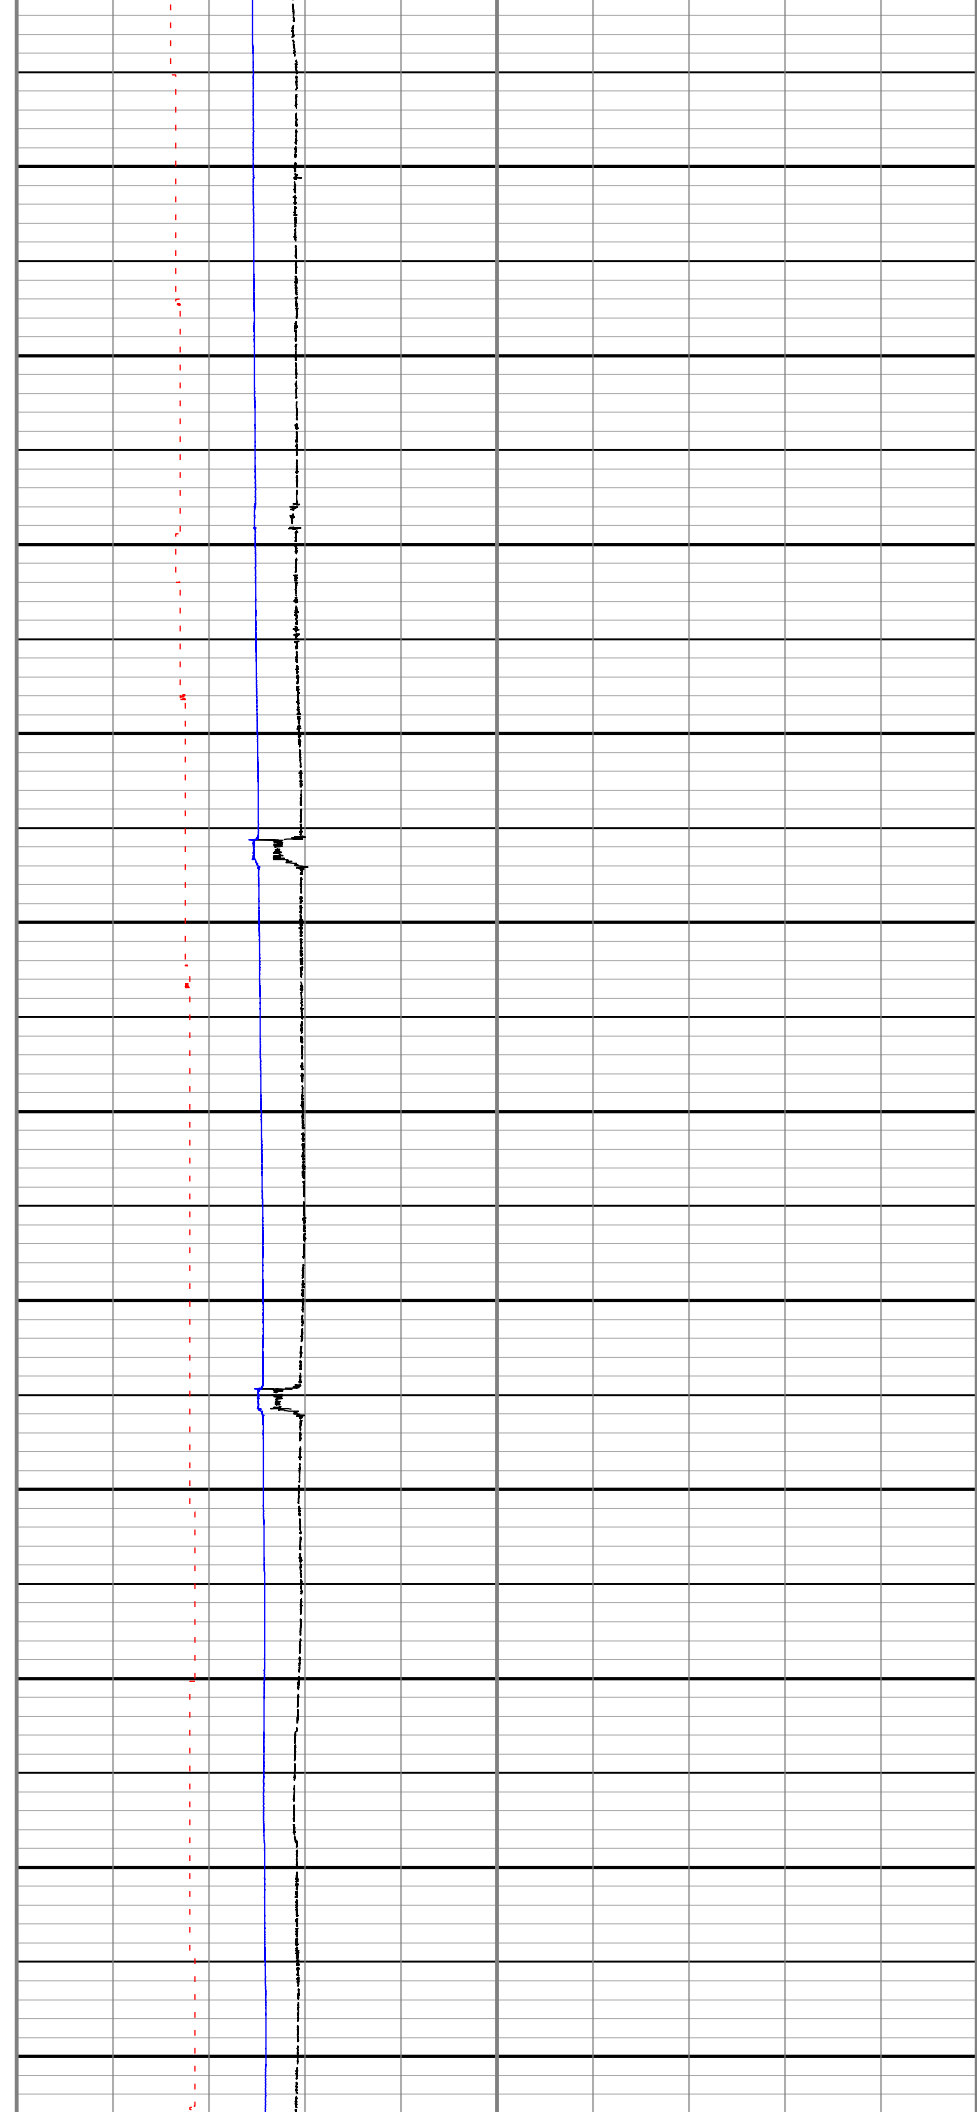
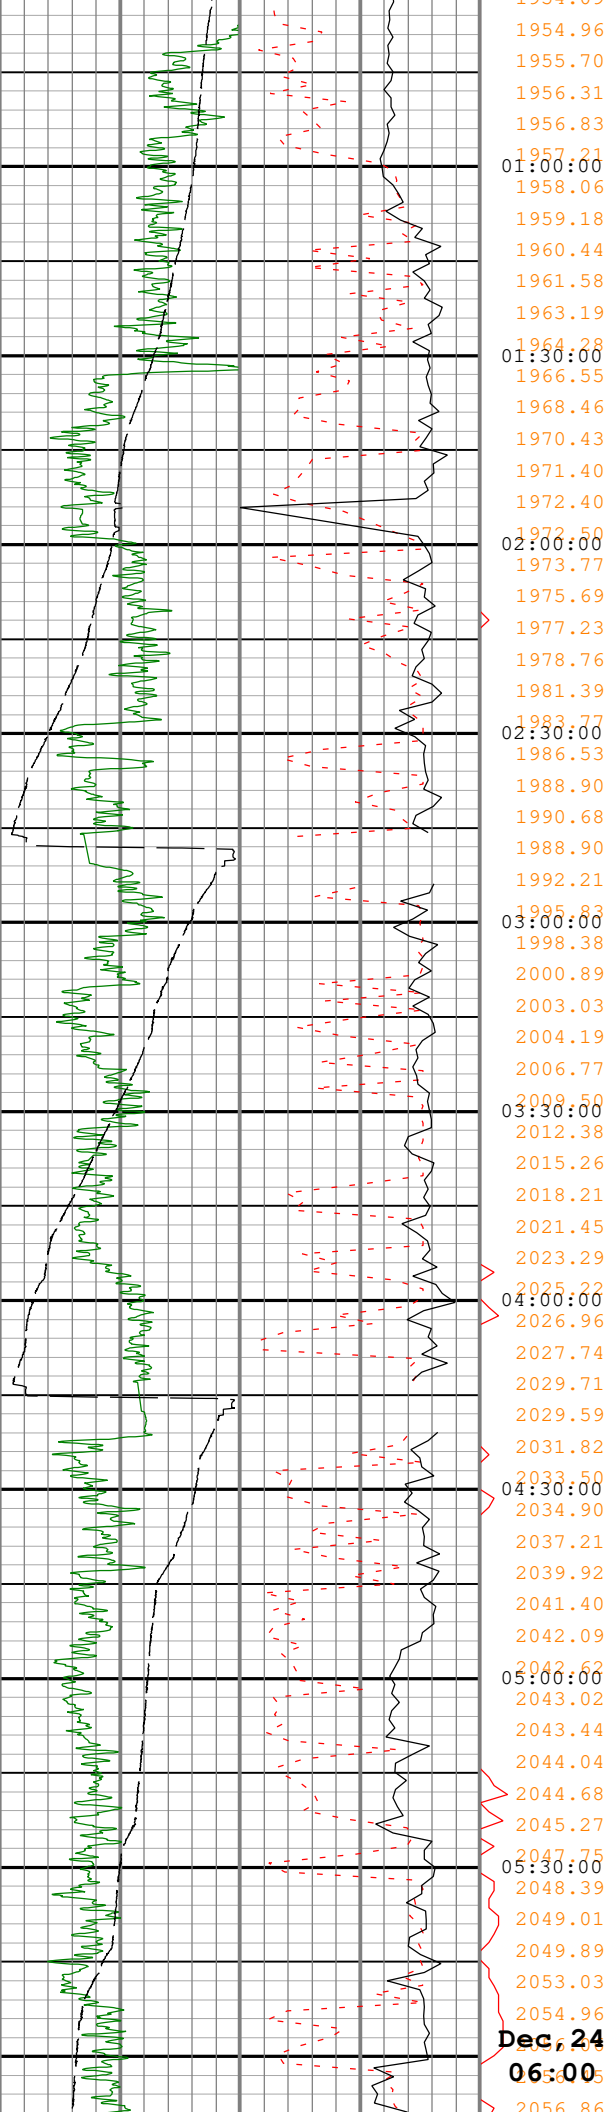


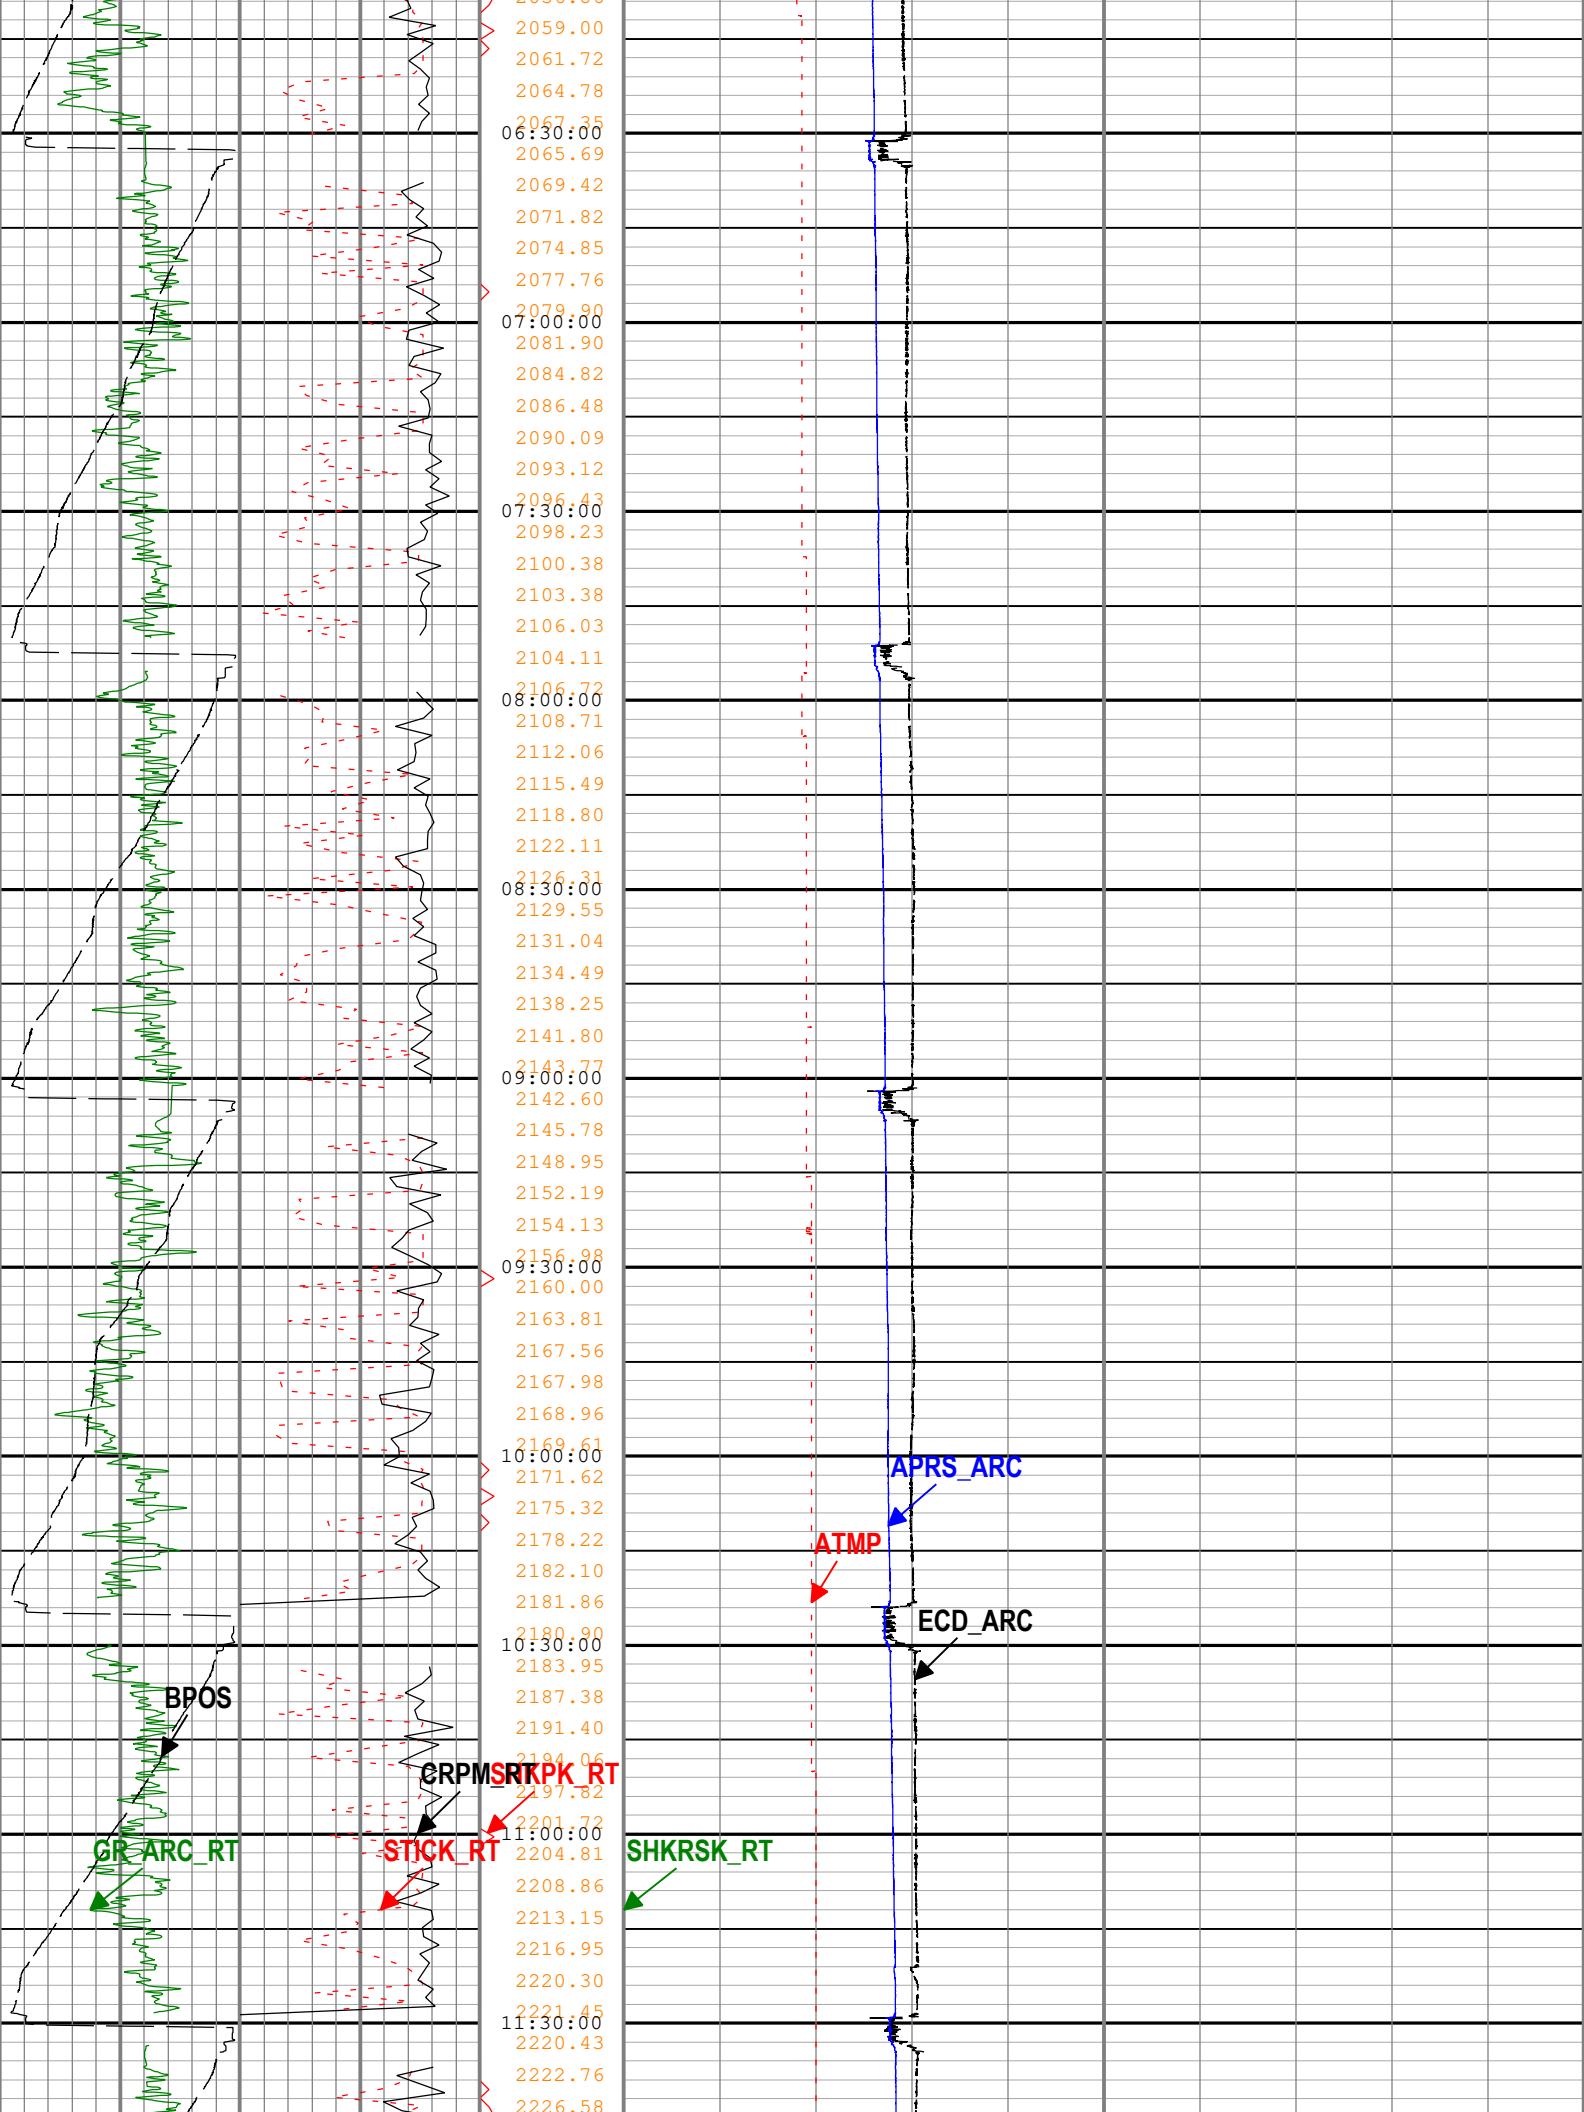


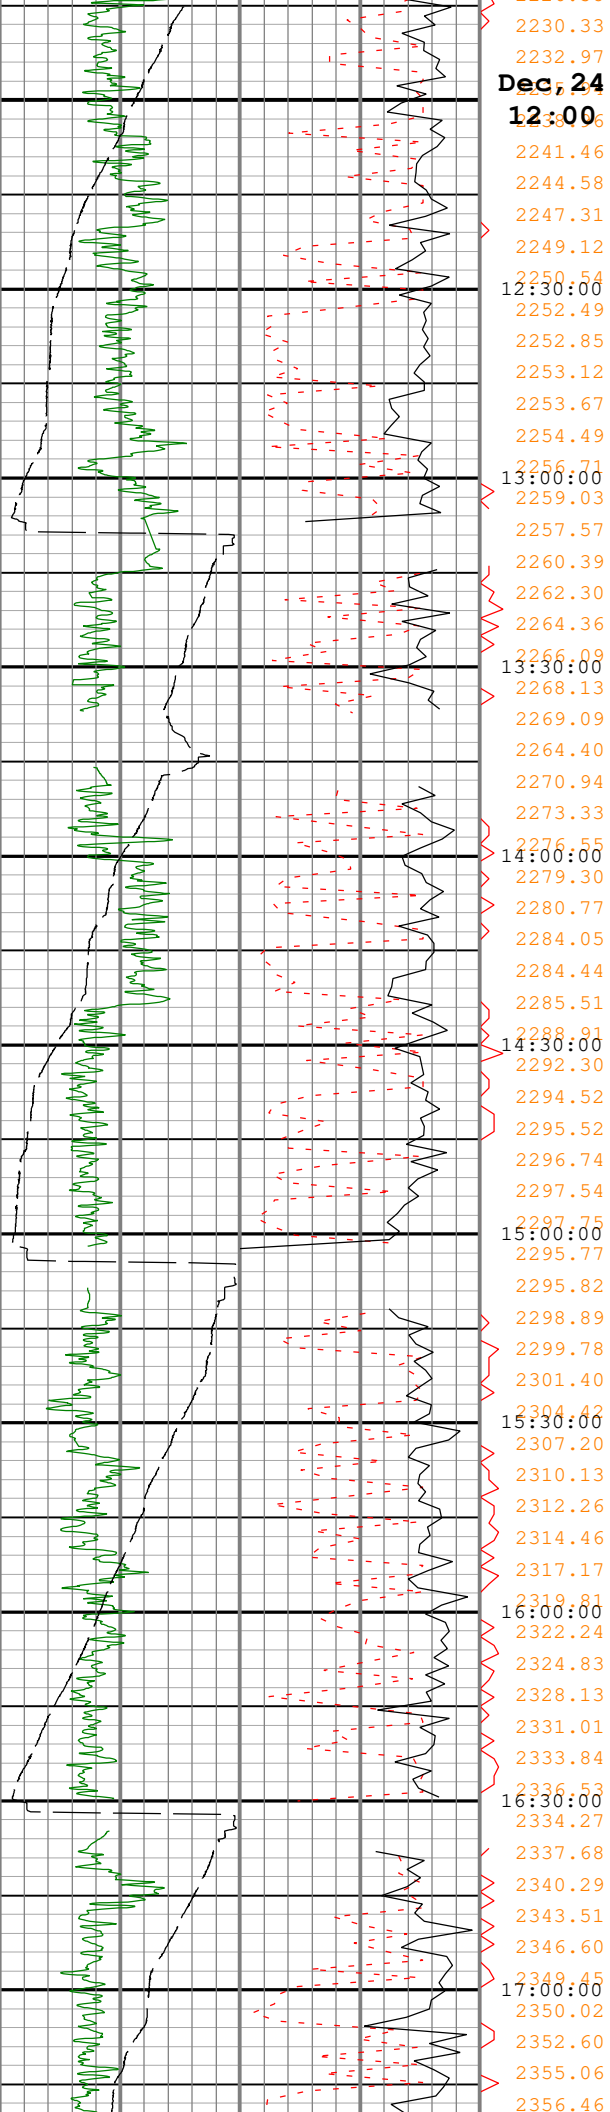

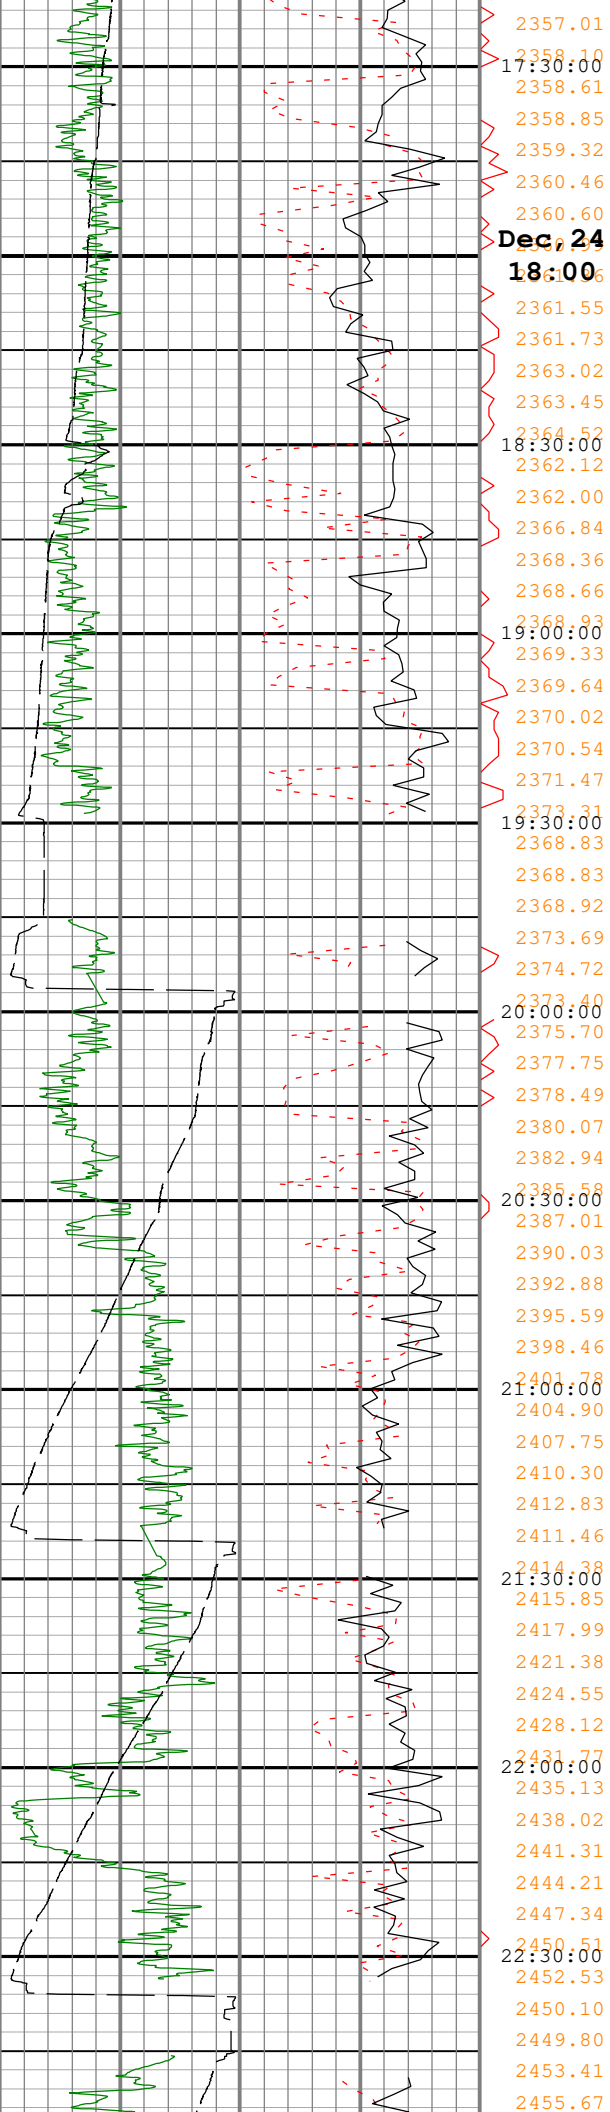




APRS_ARC

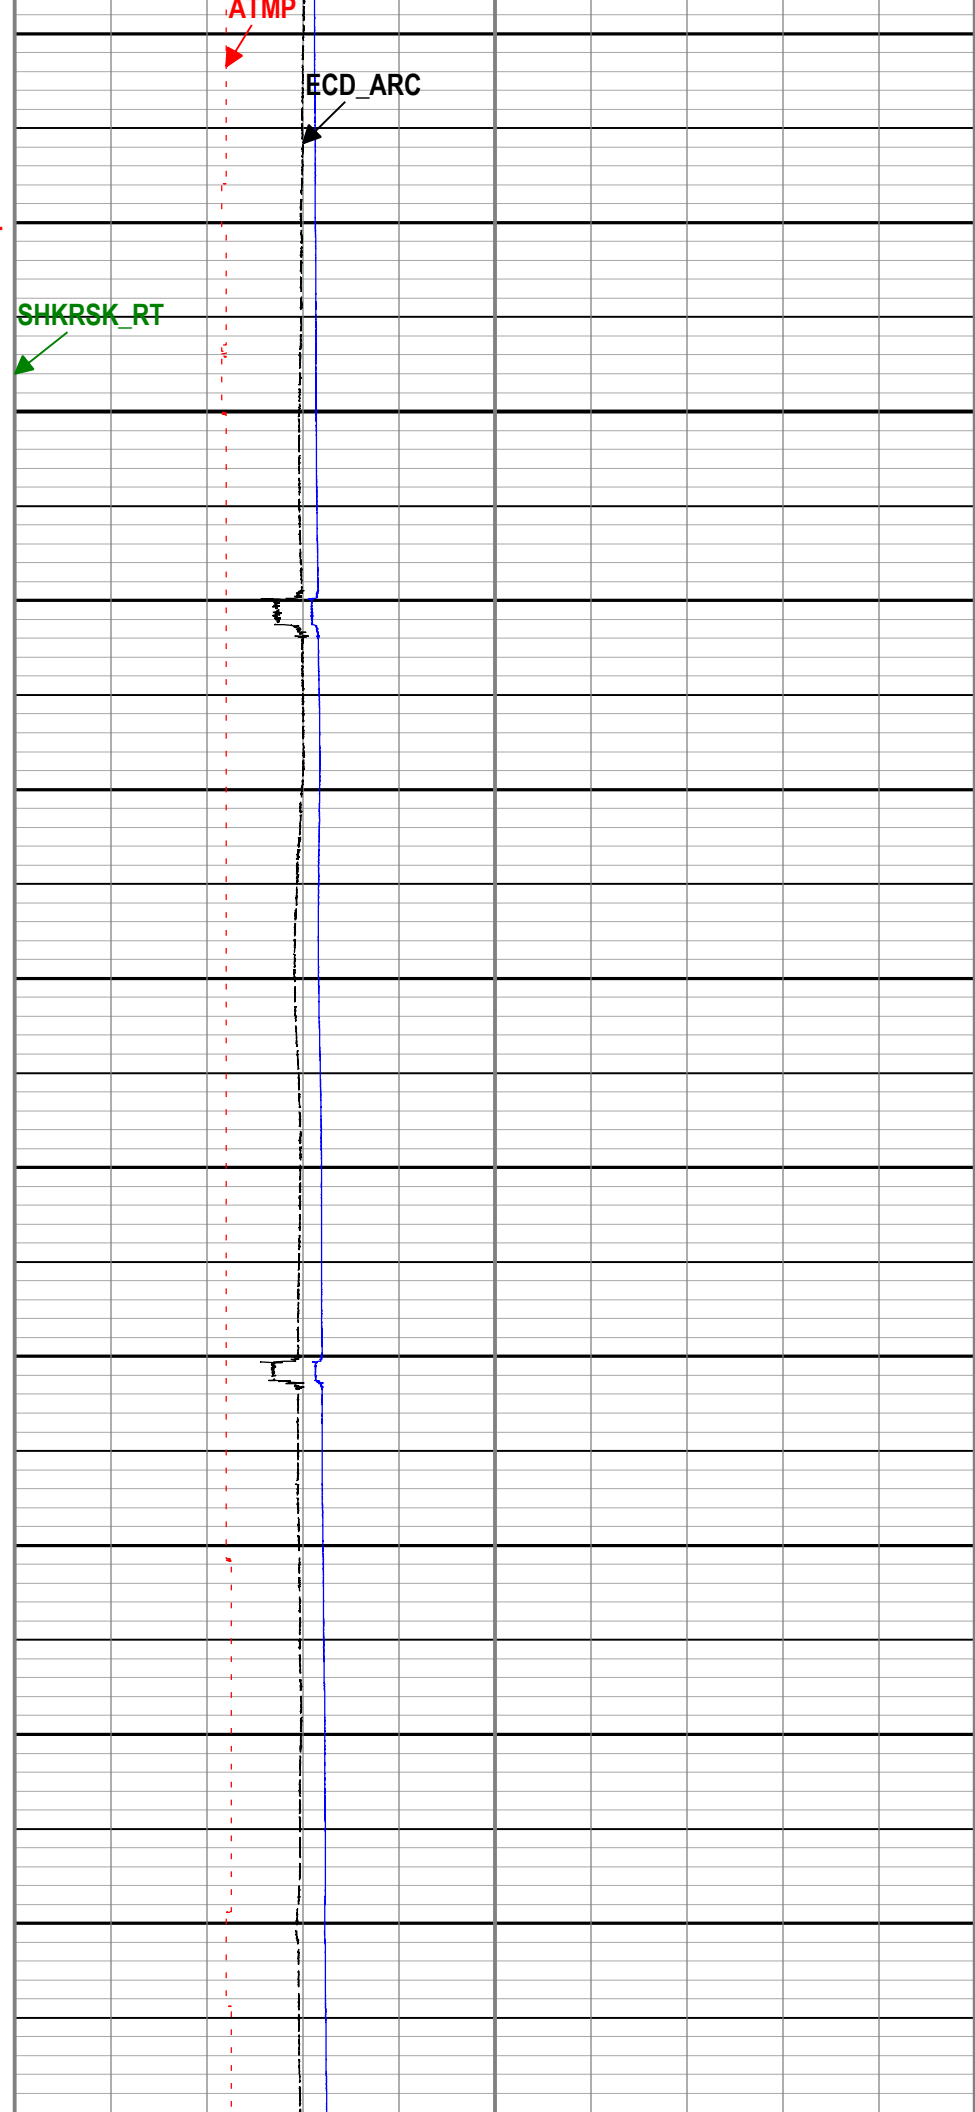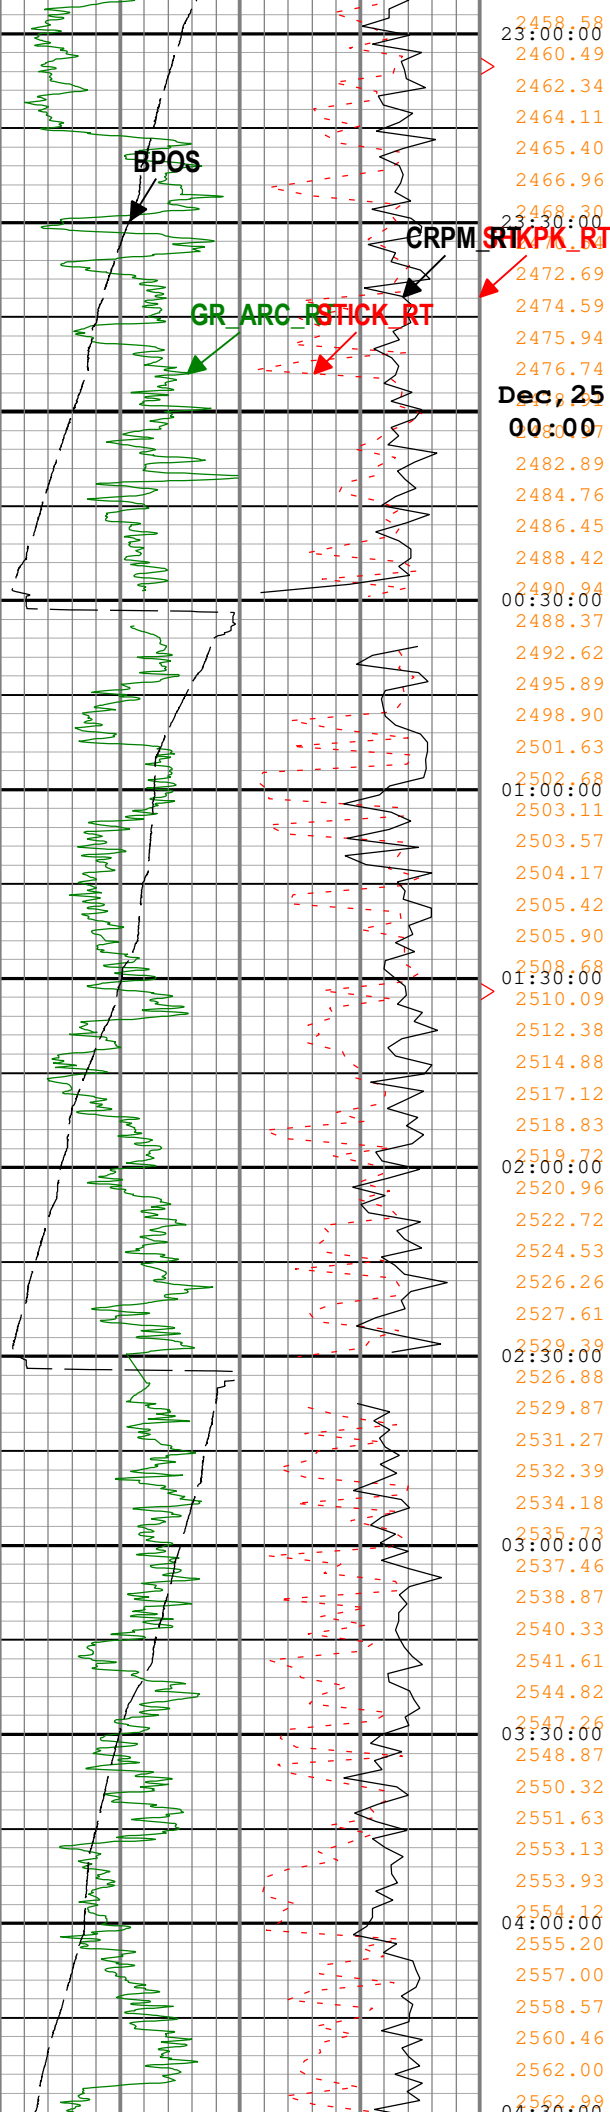


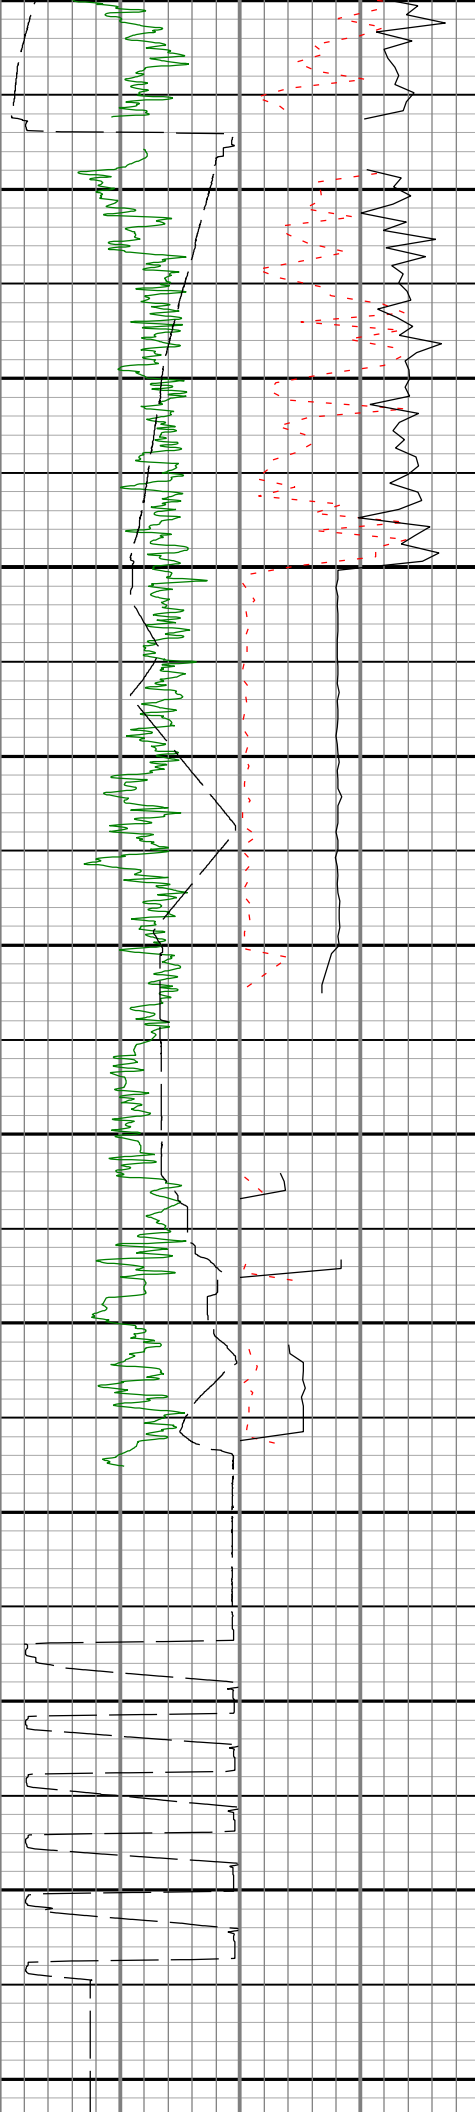

04:30:00
2564.64
2566.29
2567.20
2568.02
2565.92
2568.74
05:00:00
2570.23
2571.82
2573.30
2574.94
2576.45
2577.97
05:30:00
2578.55
2579.55
2580.49
Stop Drilling
2582.35
Dec 25
06:30:00
2583.33
2581.83
2578.78
2582.14
2581.39
2576.58
06:30:00
2571.78
2566.99
2565.66
2570.55
2575.44
2578.53
07:00:00
2578.50
2578.50
2578.51
2578.33
2578.24
2578.24
07:30:00
2578.14
2576.56
2573.37
2571.93
2567.78
2569.59
08:00:00
2566.47
2566.98
2572.54
2573.48
2564.87
2564.96
08:30:00
2564.96
2565.05
2565.05
2564.96
2562.77
2525.73
09:00:00
2525.83
2486.57
2486.06
2447.41
2446.44
2408.33
09:30:00
2405.06
2369.06
2368.11
2356.78
2356.78
2356.78
10:00:00
2356.78

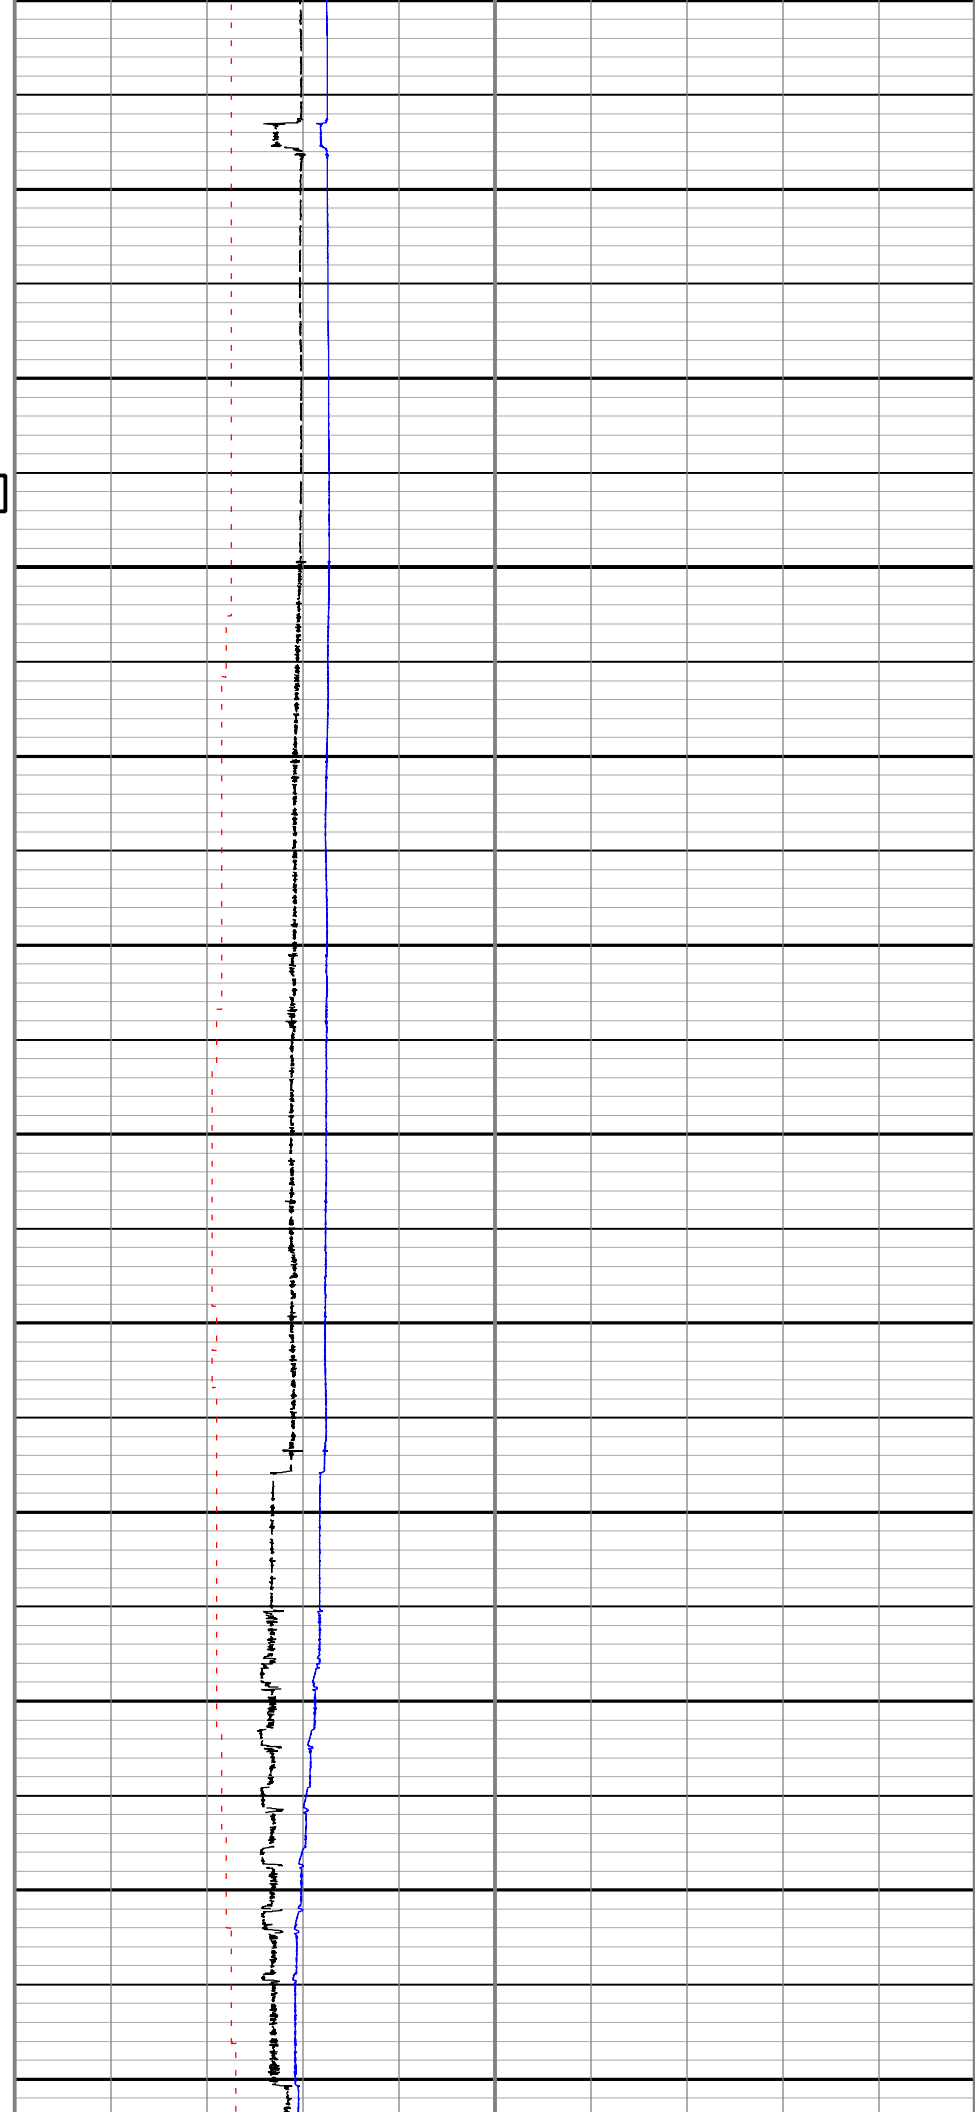

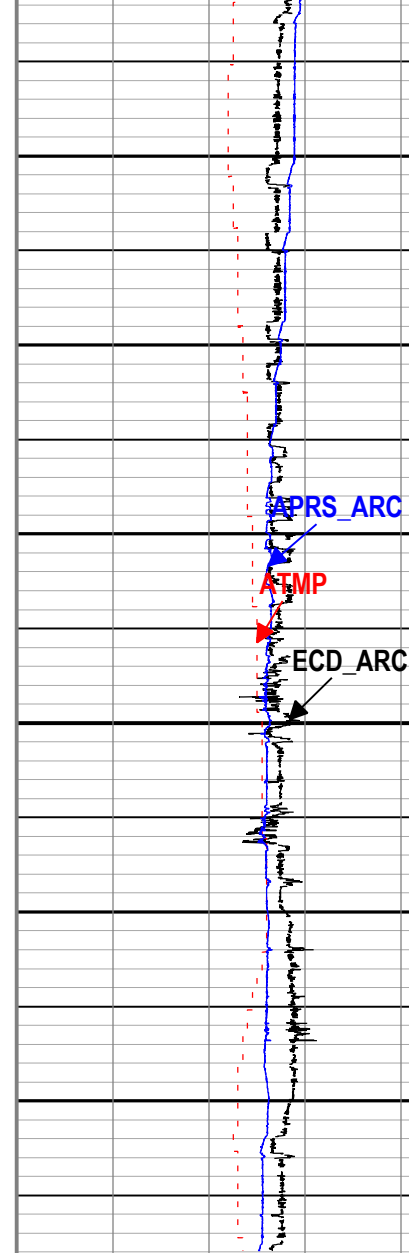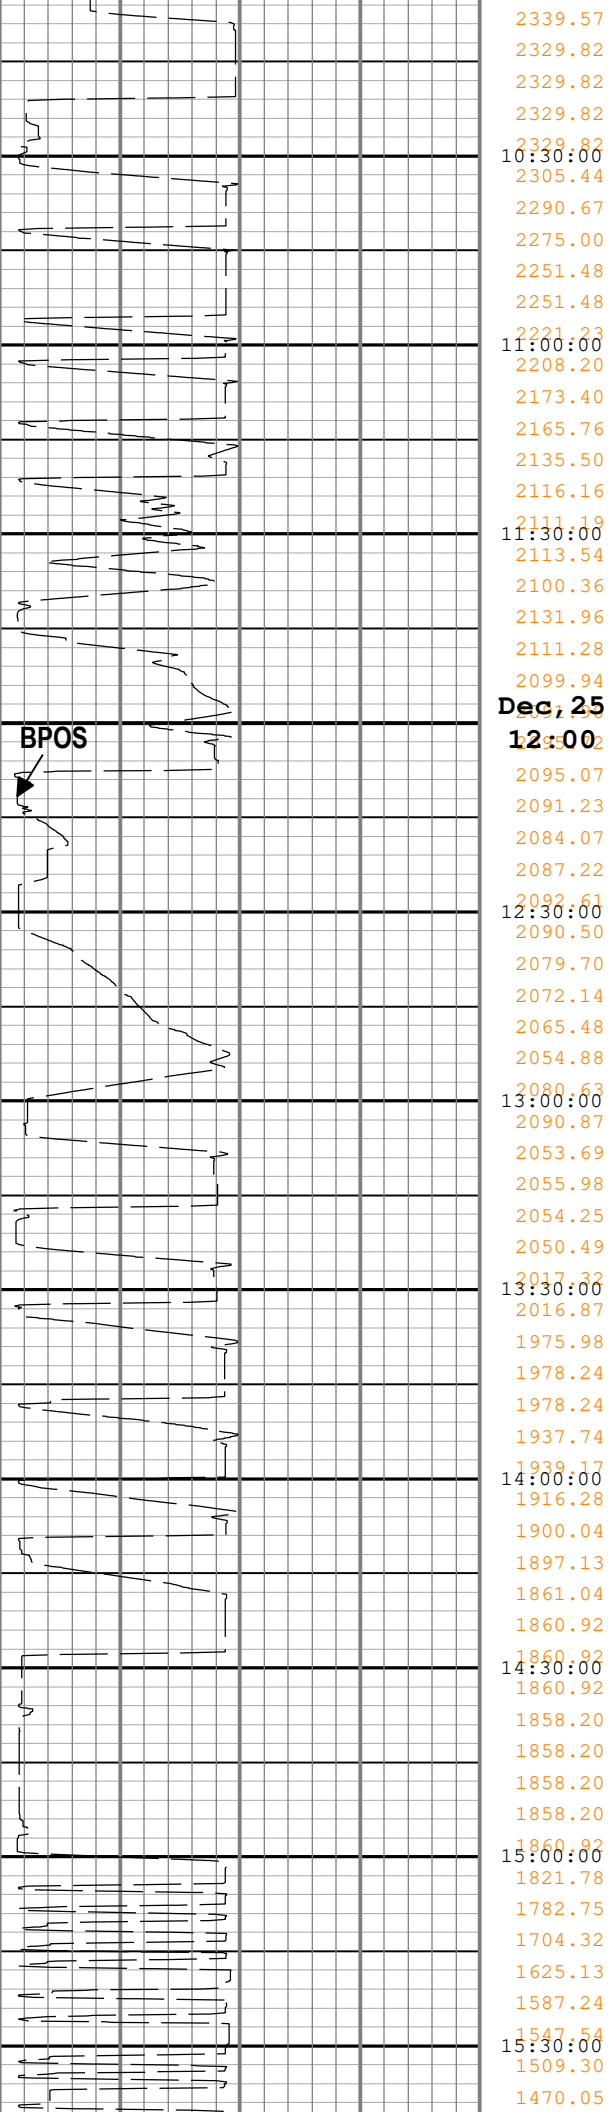

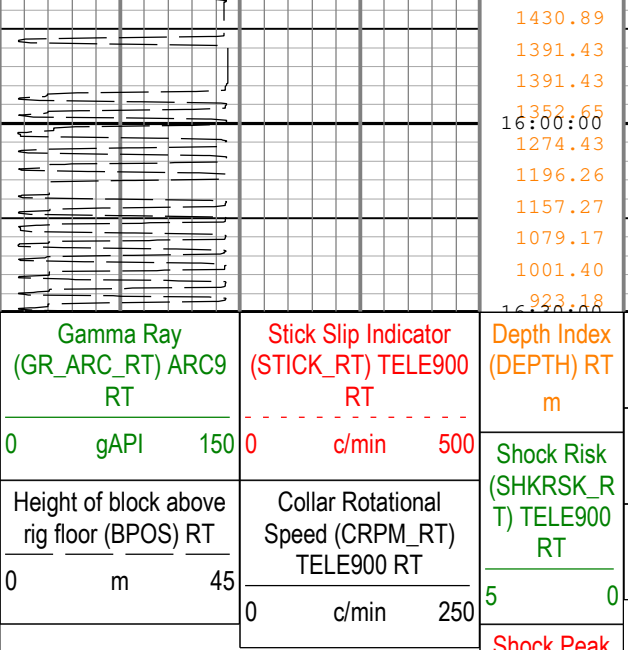	
Gamma Ray (GR_ARC_RT) ARC9 RT 0 gAPI 150	Stick Slip Indicator (STICK_RT) TELE900 RT 0 c/min 500
Height of block above rig floor (BPOS) RT 0 m 45	Collar Rotational Speed (CRPM_RT) TELE900 RT 0 c/min 250
	Shock Risk (SHKRSK_R T) TELE900 RT 5 0
	Shock Peak (SHKPK_RT) TELE900 RT 0 gn 250
	Equivalent Circulating Density (ECD_ARC) ARC9 RM 1 g/cm3 2
	Downhole Annulus Temperature (ATMP) ARC9 RM 0 degC 200
	Downhole Annulus Pressure (APRS_ARC) ARC9 RM 0 bar 1000

Description: Format: Log (Drilling Mechanics Light) Index Scale: 5 cm per 3600 s Index Type: Time Creation Date: 30-Dec-2019 11:06:20