

Drilling Mechanics - APWD

Time Based

Real Time, Recorded Mode, Run 13



Company: Equinor

Well: 31/5-7

Field: Eos

Rig Name: West Hercules

Country: Norway

Latitude: 60° 34' 35.14" N

UWID:

Longitude: 3° 26' 36.13" E

Rig Name:

West Hercules

Block: 31/5

Rig Type:


Semi-Submersible

FL: Norwegian North Sea

FL1: Section: 8 1/2 in.

FL2: Job no.: 19SCA0085

Log Measured From: - Drill Floor: 31.00 m
Permanent Datum: - Mean Sea Level



Ground Level: 307.00 m

Acquisition Dates: 13-Jan-2020 -- 15-Jan-2020

Other Services:

Log Interval: 1/14/2020 9:30:00 AM -- 1/15/2020 4:00:00 AM

Direction & Inclination (Surveys)

Index Types: Time

Directional Drilling

Index Scales: 5 cm / 3600 secs

geoVISION Bit Resistivity

Depth Source: Driller's Depth

VISION Resistivity

Depth Sensor: 3rd Party Depth

Print Type: Final

Spud Date: 02-Dec-2019




Disclaimer

THE USE OF AND RELIANCE UPON THIS RECORDED-DATA BY THE HEREIN NAMED COMPANY (AND ANY OF ITS AFFILIATES, PARTNERS, REPRESENTATIVES, AGENTS, CONSULTANTS AND EMPLOYEES) IS SUBJECT TO THE TERMS AND CONDITIONS AGREED UPON BETWEEN SCHLUMBERGER AND THE COMPANY, INCLUDING: (a) RESTRICTIONS ON USE OF THE RECORDED-DATA; (b) DISCLAIMERS AND WAIVERS OF WARRANTIES AND REPRESENTATIONS REGARDING COMPANY'S USE AND RELIANCE UPON THE RECORDED-DATA; AND (c) CUSTOMER'S FULL AND SOLE RESPONSIBILITY FOR ANY INFERENCE DRAWN OR DECISION MADE IN CONNECTION WITH THE USE OF THIS RECORDED-DATA.

Contents

- Header
- Disclaimer
- Contents
- Well Sketch
- Borehole Size/Casing/Tubing Record
- Operational Run Summary
- Borehole Fluids
- Remarks and Equipment Summary
- Run 13 Drilling Mechanics - APWD - Time Based
 - Integration Summary
 - Composite Summary
 - Log (Drilling Mechanics Light)
- Tail

Well Sketch

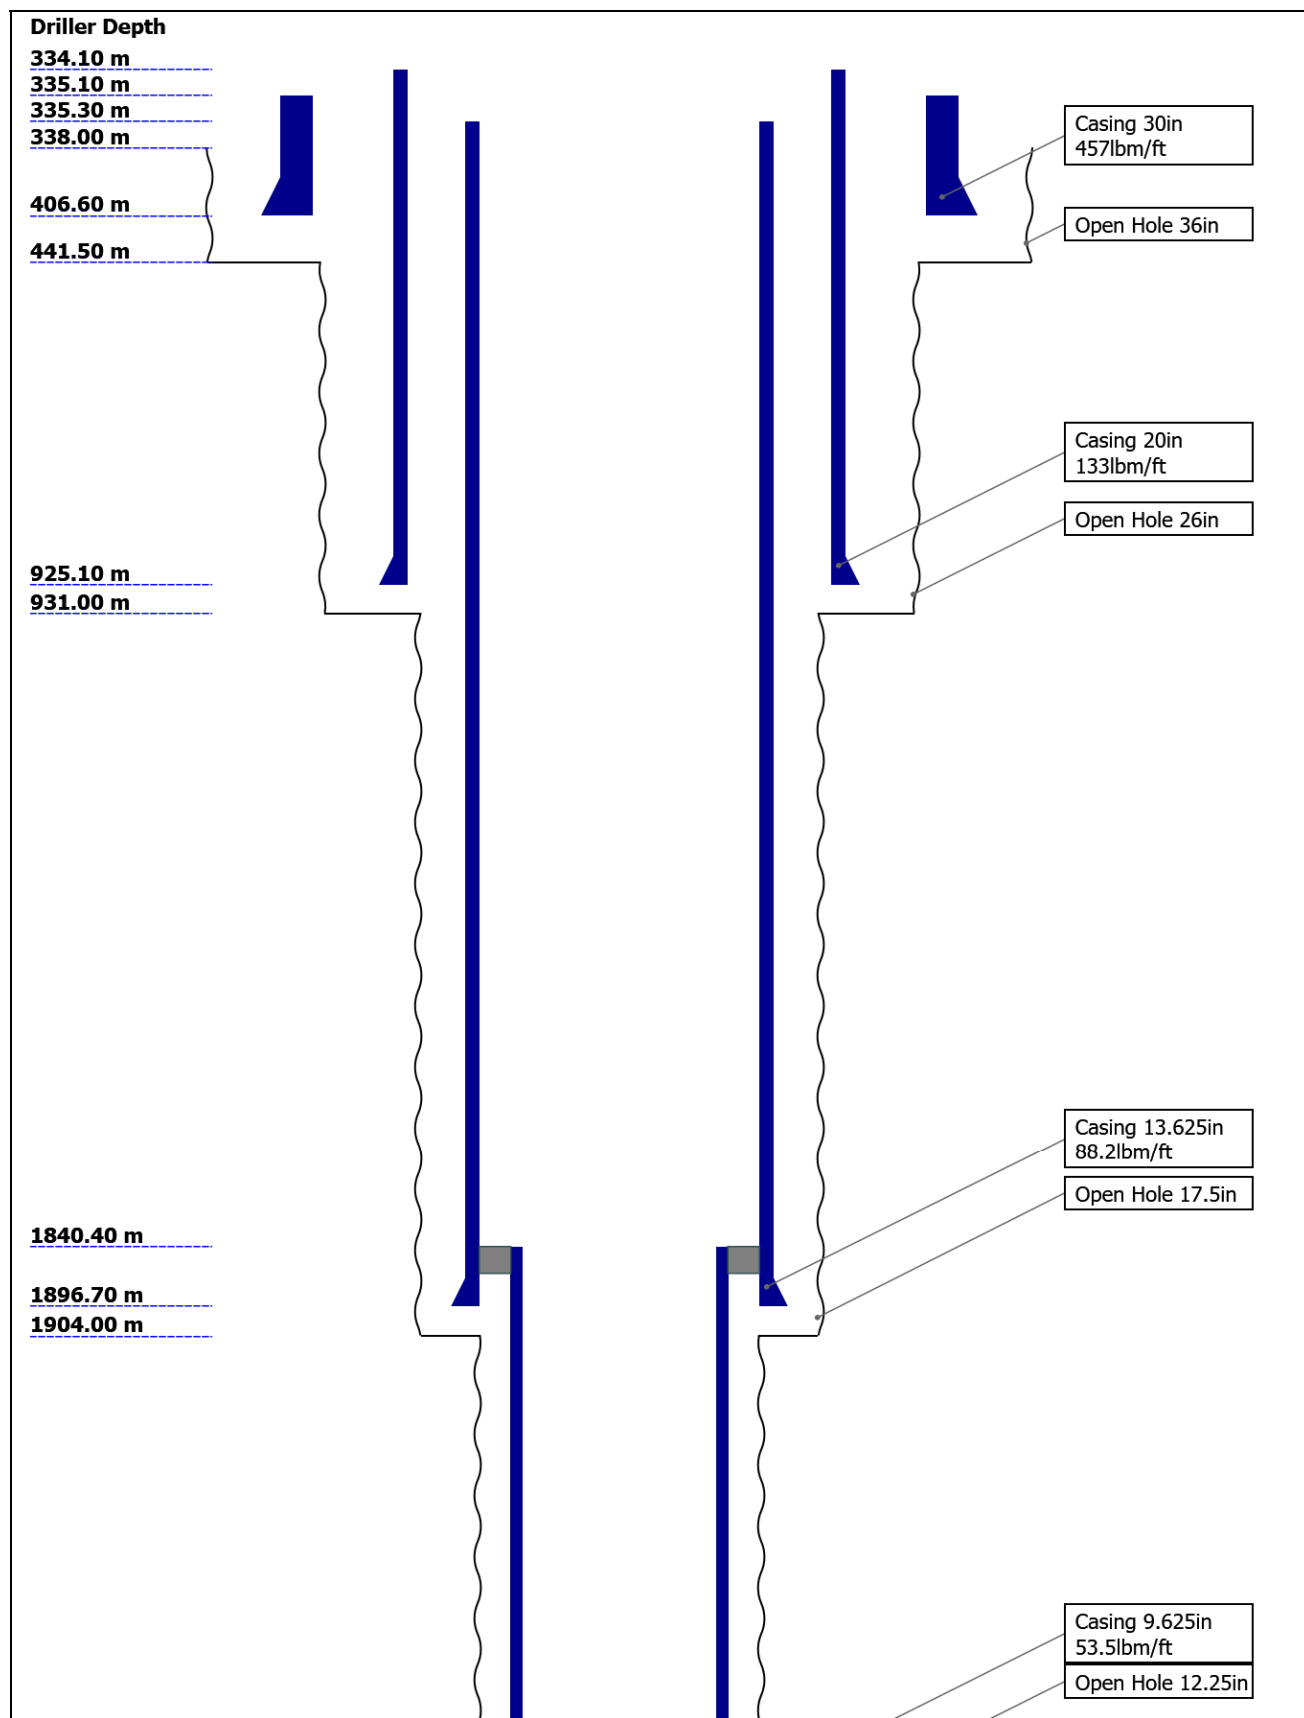

2583.00 m
2584.00 m

2915.00 m

Open Hole 8.5in

Borehole Size/Casing Record

Bit						
Bit Size (in)	36	26	17.5	12.25	8.5	
Top Driller (m)	338	441.5	931	1904	2584	
Bottom Driller (m)	441.5	931	1904	2584	2915	
Casing						
Size (in)	30	20	13.625	9.625		
Weight (lbm/ft)	457	133	88.2	53.5		
Inner Diameter (in)	27.067	18.73	12.375	8.535		
Grade	X56	N80	P110	P110		
Top Driller (m)	335.1	334.1	335.3	1840.4		
Bottom Driller (m)	406.6	925.1	1896.7	2583		

Operational Run Summary


Parameter (unit)	Run 13					
Date Log Started	13-Jan-2020					
Time Log Started	19:44:45					
Date Log Finished	15-Jan-2020					
Time Log Finished	10:55:23					
Bit Size (in)	8.500					
Bit Start Depth (m)	2784.00					
Bit Stop Depth (m)	2915.00					
Top Log Interval (m)	2699.00					
Bottom Log Interval (m)	2914.28					
Max Hole Deviation (deg)	1.12					
Azimuth of Max Deviation (deg)	120.28					
Logging Unit Number	A615					
Logging Unit Location	Service Office					
Recorded By	M.Bergenkull					
Witnessed By	R.Nordstokke					
Service Order Number	19SCA0085					

Borehole Fluids

Parameter(unit)	Run 13					
Fluid Type	Water					
Fluid Name	Glydril					
Max Recorded Temperatures (degC)	51					
Source of Sample	Active Tank					
Salinity (ppm)	79402					
Density (g/cm3)	1.15					
Funnel Viscosity (s)						
Fluid Loss (cm3)						
PH						
Source RMF						
RMC	Pressed					
RM @ Meas Temp (ohm.m@degC)	0.09 @ 18.9					
RMF @ Meas Temp (ohm.m@degC)	0.07 @ 17.9					
RMC @ Meas Temp (ohm.m@degC)	0.1 @ 20					
RM @ BHT (ohm.m@degC)	0.05 @ 51					
RMF @ BHT (ohm.m@degC)	0.04 @ 51					
RMC @ BHT (ohm.m@degC)	0.06 @ 51					
Total Solid (%)						
High Gravity Solids (%)						

[illegible]

ARDC:H0143-1
Upper Extender:07/01
8
CDJA
AREA:618
APWD:283006
ARSS:915804-2
Lower Extender:14/04
5

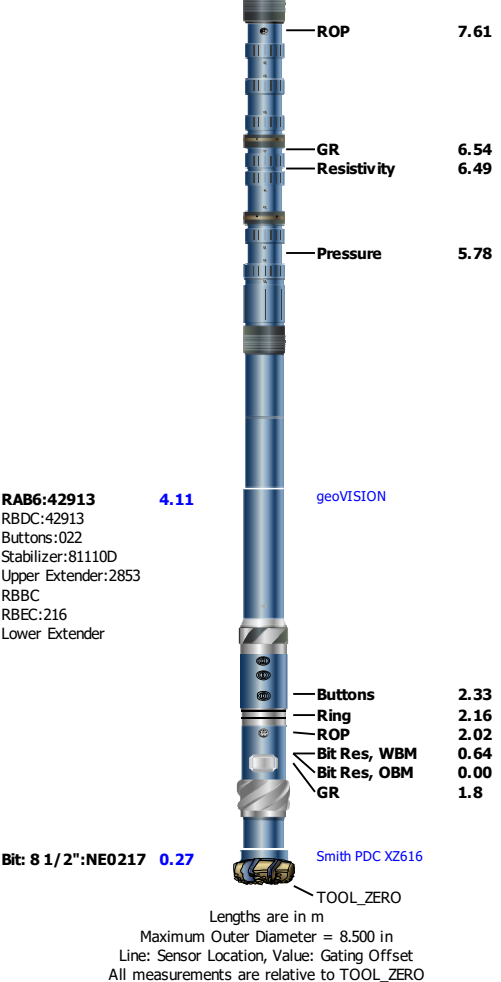

Run 13

Drilling Mechanics - APWD - Time Based

Pass Summary


Run Name	Pass Objective	Direction	Start	Stop	Include Parallel Data
Run 13	TimeLogicalAcq	Down	13-Jan-2020 7:44:45 PM	15-Jan-2020 10:55:23 AM	Yes


Log

Company:Equinor Well:31/5-7
Run 13: TimeLogicalAcq:S054

Description: Format: Log (Drilling Mechanics Light) Index Scale: 5 cm per 3600 s Index Type: Time Creation Date: 21-Jan-2020 12:20:59

		Depth Index (DEPTH) RT m		
Gamma Ray (GR_ARC_RT) ARC6 RT 0 gAPI 150	Stick Slip Indicator (STICK_RT) TELE675 RT 0 c/min 500	Shock Risk (SHKRSK_R T) TELE675 RT 5 0	Equivalent Circulating Density (ECD_ARC) ARC6 RM	
			1	g/cm3 2
Height of block above rig floor (BPOS) RT 0 m 45	Collar Rotational Speed (CRPM_RT) TELE675 RT 0 c/min 250	Shock Peak (SHKPK_RT) TELE675 RT 0 gn 250	Downhole Annulus Temperature (ATMP) ARC6 RM	
			0	degC 200
			Downhole Annulus Pressure (APRS_ARC) ARC6 RM	
			0	bar 1000

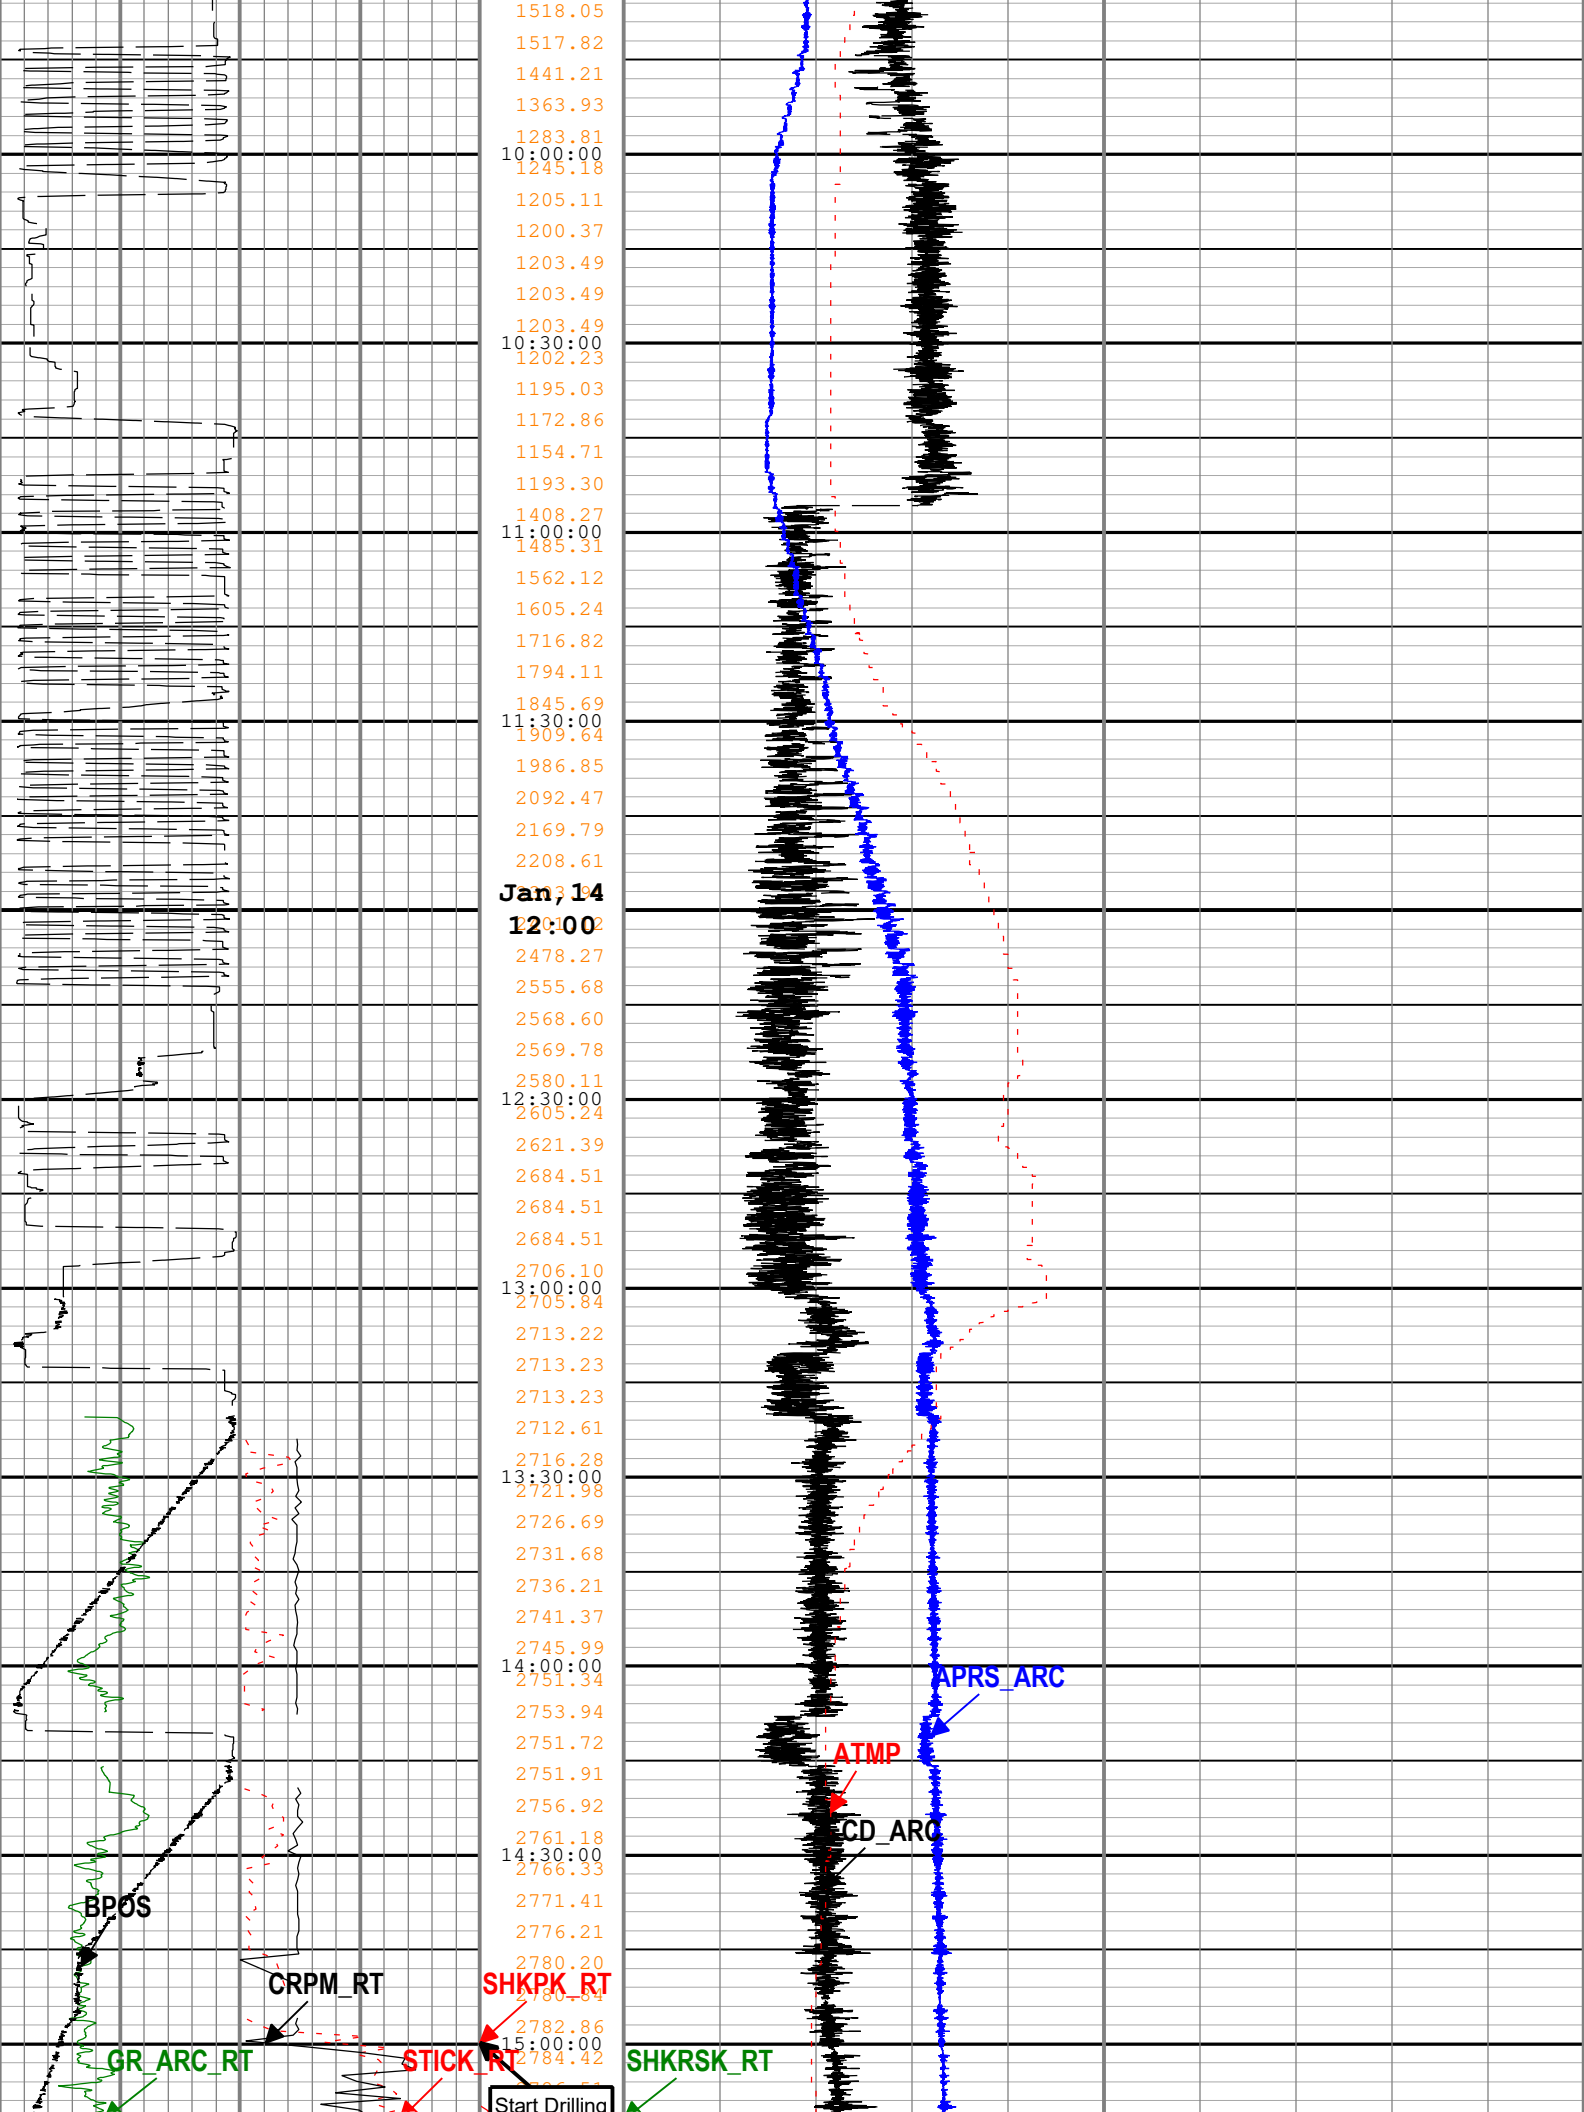

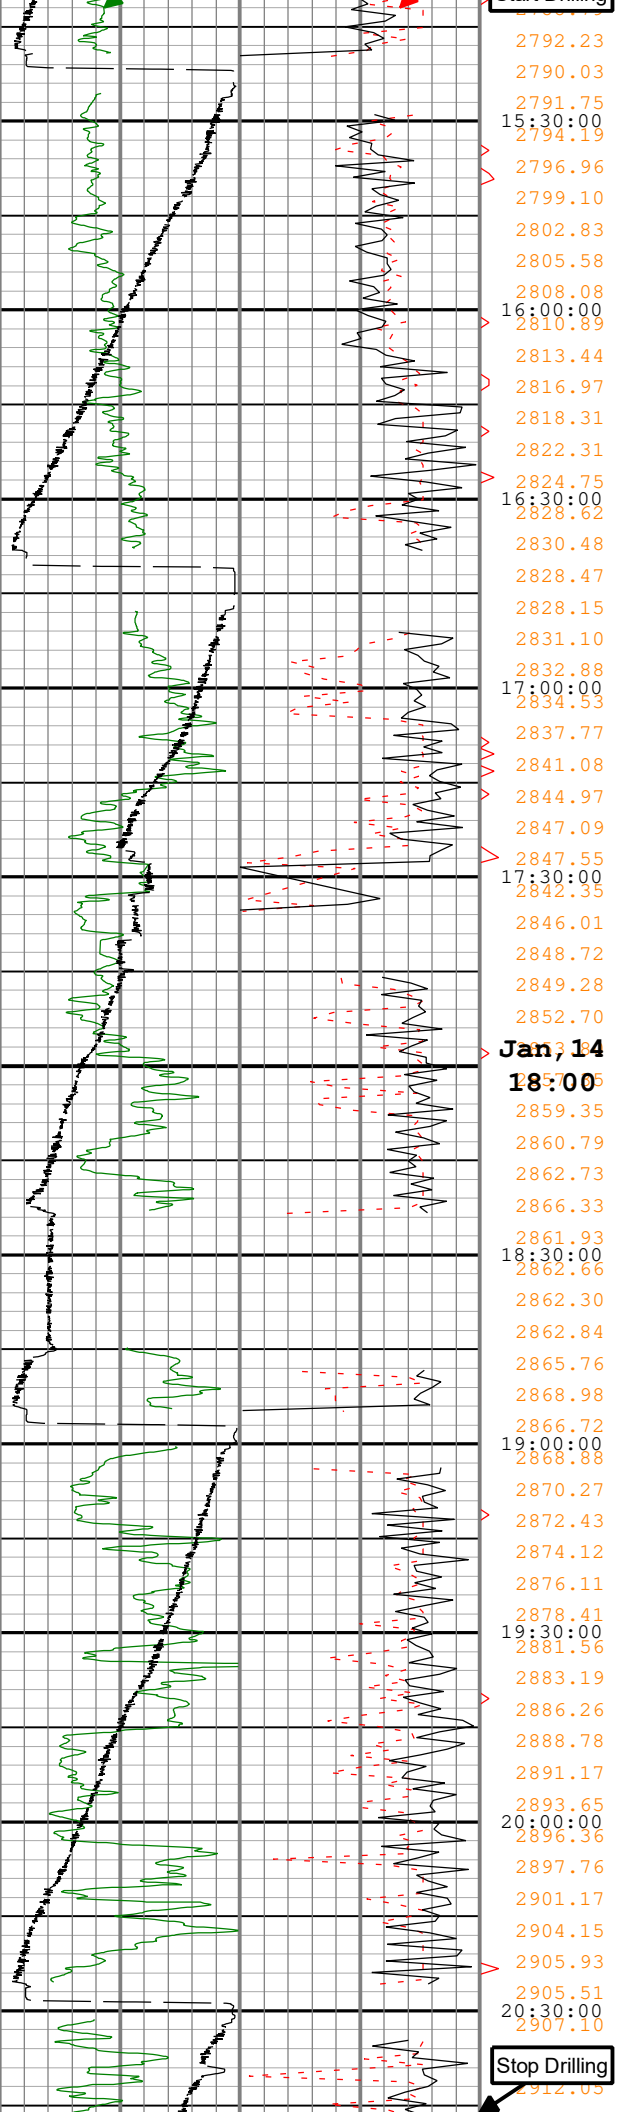

2792.23
2790.03
2791.75
15:30:00
2794.19
2796.96
2799.10
2802.83
2805.58
2808.08
16:00:00
2810.89
2813.44
2816.97
2818.31
2822.31
2824.75
16:30:00
2828.62
2830.48
2828.47
2828.15
2831.10
2832.88
17:00:00
2834.93
2837.77
2841.08
2844.97
2847.09
2847.55
17:30:00
2842.35
2846.01
2848.72
2849.28
2852.70
2853.14
2859.35
2860.79
2862.73
2866.33
2861.93
18:30:00
2862.66
2862.30
2862.84
2865.76
2868.98
2866.72
19:00:00
2868.88
2870.27
2872.43
2874.12
2876.11
2878.41
19:30:00
2881.96
2883.19
2886.26
2888.78
2891.17
2893.65
20:00:00
2896.36
2897.76
2901.17
2904.15
2905.93
2905.51
20:30:00
2907.10
2912.03

Stop Drilling

