



Baker Atlas

FILE NO: COMPANY PEAK PETROLEUM INDUSTRIES NIGERIA LTD

API NO: WELL BILABRI D3

SCALE 1:200 FIELD BILABRI

Ver. 3.87 LOCATION: RIG NAME BULFORD DOLPHIN

FIELD PRINT NORTH: 515,558.23 M

TIGHT HOLE EAST: 731,847.1 M

PERMANENT DATUM MSL ELEVATION 0 M

LOG MEASURED FROM DF 25 M ABOVE P.D.

DRILL MEAS. FROM DF

OTHER SERVICES
SPECTRALOG
HDIL/ZDL/CN/GR
RCI/SAMPLEVIEW/GR
SMC

ELEVATIONS:

KB
DF 25 M
GL -145 M

DATE 26-OCT-2006 27-OCT-2006

RUN 1 TRIP 1

SERVICE ORDER NG543428

DEPTH DRILLER 2555 M

DEPTH LOGGER N/A

BOTTOM LOGGED INTERVAL 2505.0 M

TOP LOGGED INTERVAL 829.0 M

CASING DRILLER 13.375 IN

CASING LOGGER 829.0 M

BIT SIZE 12.25 IN

TYPE OF FLUID IN HOLE OBM

DENSITY 10.1 LB/G

PH 63 S

SOURCE OF SAMPLE N/A

RM AT MEAS. TEMP. N/A

RMF AT MEAS. TEMP. N/A

RMC AT MEAS. TEMP. N/A

SOURCE OF RMF N/A

RM AT BHT N/A

TIME SINCE CIRCULATION 46 HOURS

MAX. RECORDED TEMP. 196.9 DEG F

EQUIP. NO. LOCATION HSL-8706 PH

RECORDED BY T. OGILVIE / A. GREEFF

WITNESSED BY CHARLES OGBONE

IN MAKING INTERPRETATIONS OF LOGS OUR EMPLOYEES WILL GIVE CUSTOMER THE BENEFIT OF THEIR BEST JUDGEMENT. BUT SINCE ALL INTERPRETATIONS ARE OPINIONS BASED ON INFERENCES FROM ELECTRICAL OR OTHER MEASUREMENTS, WE CANNOT, AND WE DO NOT GUARANTEE THE ACCURACY OR CORRECTNESS OF ANY INTERPRETATION. WE SHALL NOT BE LIABLE OR RESPONSIBLE FOR ANY LOSS, COST, DAMAGES, OR EXPENSES WHATSOEVER INCURRED OR SUSTAINED BY THE CUSTOMER RESULTING FROM ANY INTERPRETATION MADE BY ANY OF OUR EMPLOYEES.

BOREHOLE RECORD

BIT SIZE	FROM	TO
12.25 IN	840 M	2555.0 M

CASING RECORD

SIZE	WEIGHT	GRADE	FROM	TO
13.375 IN	68 LB/F	K-55	0 M	829 M

REMARKS

RUN 1 TRIP 1:

1. ALL TOOLS WERE CONVEYED ON WIRELINE.
2. DEPTH CORRECTED TO MAGNETIC MARKS AND ADJUSTED FOR STRETCH.
3. TOP OF FISH LOCATED AT APPROXIMATELY 2542M.
4. SIGNIFICANT WASHOUT AFFECTED ACOUSTIC LOG RESPONSE OVER INTERVAL 945 - 950M, ACROSS SAND INTERVALS AND IMMEDIATELY BELOW CSG SHOE.
5. ADAPTIVE BOREHOLE CORRECTIONS (STANDOFF) APPLIED TO HDIL.
6. HDIL IS CALIPER CORRECTED.

RUN 2 TRIP 1:


1. ALL TOOLS USED WERE THE SAME AS PER RUN 1.
2. LOG TIED INTO RUN 1.
3. ADAPTIVE BOREHOLE CORRECTIONS (STANDOFF) APPLIED TO HDIL.
4. HDIL IS CALIPER CORRECTED.

EQUIPMENT DATA

RUN	TRIP	TOOL	SERIES NO.	SERIAL NO.	POSITION
1	1	SWVL	3944XA	112591	FREE
1	1	DHPA	4430XA	10003917	FREE
1	1	TTRM	3981XA	186331	FREE
1	1	COMR	3514XA	10203475	FREE
1	1	DSL	1329XA	167531	FREE
1	1	CN	2446XA	153117	DECENTRALIZED
1	1	ZDL EA	2228EA	167879	DECENTRALIZED
1	1	ZDL MA	2228MA	114428	PAD DEVICE
1	1	KNJT	3939XA	183765	FREE
1	1	ORIT	4401XA	10089606	FREE
1	1	XMAC EA	1677EA	369972	CENTRALIZED
1	1	XMAC MB	1678MB	189692	CENTRALIZED
1	1	XMAC PA	1678PA	190325	CENTRALIZED
1	1	XMAC BA	1678BA	1179582	CENTRALIZED
1	1	XMAC FA	1678FA	189314	CENTRALIZED
1	1	KNJT	3939XA	176925	FREE
1	1	HDIL EA	1515EA	10179438	1.5" STANDOFF
1	1	HDIL MA	1515MA	179516	1.5" STANDOFF

INSTRUMENT CONFIGURATION

Source File: /dat1a/peak/bilabari_D3/gslam-tdg

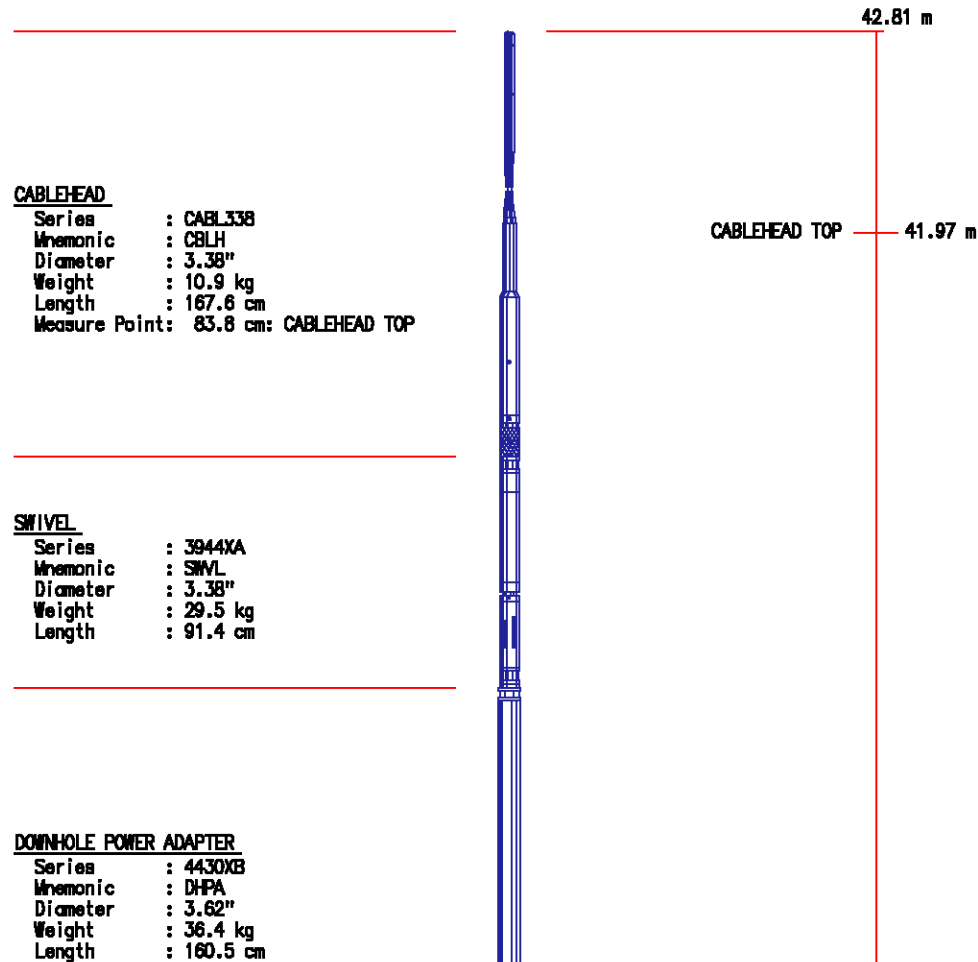

TTRM SUB

Series : 3981XA
Mnemonic : TTRM
Diameter : 3.63"
Weight : 36.4 kg
Length : 116.8 cm
Measure Point: 42.2 cm: TEMP MP
Measure Point: 34.5 cm: RM MP

TEMP MP — 37.86 m
RM MP — 37.79 m

WTS COMMON REMOTE

Series : 3514XB
Mnemonic : WTS
Diameter : 3.63"
Weight : 65.5 kg
Length : 189.5 cm

DIGITAL SPECTRALOG

Series : 1329XA
Mnemonic : DSL
Diameter : 3.63"
Weight : 84.5 kg
Length : 222.8 cm
Measure Point: 48.8 cm: GR MP

GR MP — 33.81 m

COMPENSATED NEUTRON

Series : 2446XA
Mnemonic : CN
Diameter : 3.63"
Weight : 88.2 kg
Length : 231.4 cm
Measure Point: 80.3 cm: LSN MP
Measure Point: 68.2 cm: SSN MP

LSN MP — 31.81 m
SSN MP — 31.69 m

Z-DENSLOG

Series : 2228XA
Mnemonic : ZDL
Diameter : 4.88"
Weight : 213.6 kg
Length : 564.6 cm
Measure Point: 107.7 cm: SSD MP
Measure Point: 97.3 cm: CAL / ZSPEC MP

SSD MP — 26.44 m
CAL / ZSPEC MP — 26.33 m

KNUCKLE JOINT (DOUBLE)

Series : 3939XA
Mnemonic : KNJT
Diameter : 3.38"
Weight : 22.7 kg
Length : 141.8 cm

DIGITAL ORIENTATION

Series : 4401XB
Mnemonic : ORIT
Diameter : 3.38"
Weight : 57.6 kg

Weight : 53.6 kg
Length : 329.4 cm
Measure Point: 0.0 cm: ORIENT MP

ORIENT MP 20.65 m

ARRAY ACOUSTILOG ELECTRONICS, 8 CHANNEL

Series : 1677EA
Mnemonic : XMAC
Diameter : 3.38"
Weight : 61.8 kg
Length : 238.3 cm

CROSS MULTIPOLE ARRAY ACOUSTILOG

Series : 1678MB
Mnemonic : XMAC
Diameter : 3.68"
Weight : 68.2 kg
Length : 332.4 cm
Measure Point: 187.6 cm: R8
Measure Point: 152.4 cm: R7
Measure Point: 137.2 cm: R6
Measure Point: 121.9 cm: R5
Measure Point: 106.7 cm: R4
Measure Point: 91.4 cm: R3
Measure Point: 76.2 cm: R2
Measure Point: 61.0 cm: R1

R8 16.62 m
R7 16.46 m
R6 16.31 m
R5 16.16 m
R4 16.01 m
R3 15.85 m
R2 15.70 m
R1 15.55 m

MULTI-POLE ARRAY ACOUSTIC

Series : 1678PA
Mnemonic : MAC
Diameter : 3.63"
Weight : 45.5 kg
Length : 152.4 cm

MULTI-POLE ARRAY ACOUSTIC

Series : 1678BA
Mnemonic : XMAC
Diameter : 3.88"
Weight : 79.5 kg
Length : 241.3 cm
Measure Point: 195.6 cm: QUADRUPOLE T5
Measure Point: 195.6 cm: MONOPOLE T2
Measure Point: 142.2 cm: Y-DIPOLE T4
Measure Point: 142.2 cm: X-DIPOLE T3
Measure Point: 88.9 cm: MONOPOLE T1

MONOPOLE T2 12.96 m
QUADRUPOLE T5 12.96 m

X-DIPOLE T3 12.43 m
Y-DIPOLE T4 12.43 m

MONOPOLE T1 11.89 m

MULTI-POLE ARRAY ACOUSTIC

Series : 1678FA
Mnemonic : MAC
Diameter : 3.38"
Weight : 34.1 kg
Length : 131.6 cm

KNUCKLE JOINT (DOUBLE)

Series : 3939XA
Mnemonic : KNJT
Diameter : 3.38"
Weight : 22.7 kg
Length : 141.8 cm

HIGH DEFINITION INDUCTION TOOL

Series : 1515XA
Mnemonic : HDIL
Diameter : 3.62"
Weight : 200.5 kg
Length : 827.0 cm
Measure Point: 423.9 cm: SP MP
Measure Point: 226.8 cm: XMTR MP

SP MP 4.24 m

XMTR MP 2.27 m

BULL PLUG 3 1/8

0.00 m

TOTAL LENGTH: 42.87 m
TOTAL WEIGHT: 1131.4 kg
MAX DIAMETER: 0'4.88"

MAIN LOG 1:1000 SCALE

ECLIPS 5.1i Sep 16, 2005
Updates: 1,2,37

Sun Oct 29 12:42:43 2006

Pcrplt /main/61

Cplot 9.18

Pdf_Cpp /main/16

Fileview 5.00

PARAMETER AND FILTER SUMMARY REPORT

File: /data/peak/blabar1_D3/1777103.prm
LOGGING MODE: DEPTH DIRECTION: UP
TOP DEPTH: 807.453 m BOTTOM DEPTH: 2510.028 m

SYMMETRIC FILTER

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
CHT	FILTER ()	medium (1)		TOP	BOTTOM
Y AXIS CALIPER	FILTER ()	medium (1)		''	''
SPEED	FILTER ()	medium (1)		''	''
TENSION	FILTER ()	medium (1)		''	''
GR	FILTER ()	medium (1)		''	''
X AXIS CALIPER	FILTER ()	medium (1)		''	''
	FILTER (.h)	medium (1)		''	''
	FILTER (.l)	medium (1)		''	''
DT24	FILTER ()	light (2)		''	''

BOREHOLE & CEMENT

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
BIT SIZE	BIT SIZE	12.250	In	TOP	BOTTOM
BOREHOLE CORR DIAMETER SOURCE	CALIPER/FIXED DIA. (mbh*)	USE CALIPER		''	''
BOREHOLE CORR DIAMETER	FIXED DIAMETER (mbh*)	12.250	In	''	''
MUD VALUES SOURCE	RMUD SOURCE (HDIL)	OIL BASE MUD		''	''
MUD VALUES	MUD SAMPLE TEMP	75.0	degF	''	''
	MUD SAMPLE RES	1.000	ohm.m	''	''
	MUD REFERENCE TEMP	75.0	degF	''	''
	TEMP GRADIENT	1.200	0.01 degF/ft	''	''

ACOUSTIC POROSITY

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
DELTA T CURVE SELECTION	DT24 SOURCE	FIRST ARRIVAL DT24		TOP	BOTTOM

ACOUSTIC PICK CONTROL

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
DELTA-T REJECTION RANGE	REJECTION DTmin	40	us/ft	TOP	BOTTOM
	REJECTION DTmax	180	us/ft	''	''
FIRST ARRIVAL PICK	SEARCH START OFFSET (sfan1*)	87	us	''	''
	SEARCH START OFFSET (sfan2*)	87	us	''	''
	SEARCH START OFFSET (sfan3*)	87	us	''	''
	SEARCH START OFFSET (sfan4*)	87	us	''	''
	SEARCH WINDOW LENGTH	1529	us	TOP	835.685
		1245	us	835.685	1453.363
		1045	us	1453.363	BOTTOM
	THRESHOLD FACTOR	0.30		TOP	1264.234
		0.33		1264.234	1264.996
		0.36		1264.996	1265.606
		0.40		1265.606	1999.717
		0.34		1999.717	2001.545
		0.30		2001.545	BOTTOM
	THRESHOLD MINIMUM (sfan1*)	2.0	pct	TOP	880.948
		1.6	pct	880.948	1352.626
		2.0	pct	1352.626	2117.979
		1.7	pct	2117.979	2118.131
	THRESHOLD MINIMUM (sfan2*)	1.8	pct	2118.131	BOTTOM
		1.6	pct	TOP	1352.474
		2.0	pct	1352.474	2117.827
		1.7	pct	2117.827	2117.979
	THRESHOLD MINIMUM (sfan3*)	1.8	pct	2117.979	BOTTOM
		1.6	pct	TOP	1352.321
		2.0	pct	1352.321	2117.674
		1.7	pct	2117.674	2117.827
	THRESHOLD MINIMUM (sfan4*)	1.8	pct	2117.827	BOTTOM
		1.6	pct	TOP	1352.169
		2.0	pct	1352.169	2117.522
		1.7	pct	2117.522	2117.674
	E3 THRESHOLD	1.8	pct	2117.674	BOTTOM
		OFF		TOP	BOTTOM

ACOUSTIC QUALITY CONTROL

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
CYCLE SKIP LIMIT	CYCLE SKIP LIMIT	100	us	TOP	BOTTOM

ACOUSTIC WAVEFORM FILTER

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
------------------	-----------	-------	-------	--------------	--

WAVEFORM FILTER - DELTA T	SURFACE WAVE FILTER	ON			TOP	BOTTOM
	LOW FREQ CUTOFF	4000	Hz		''	''
	HIGH FREQ CUTOFF	15000	Hz	TOP	2144.649	2144.649
		20000	Hz	BOTTOM		

HDIL PROCESSING

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
HDIL TEMPERATURE CORRECTION	TEMP CORR SOURCE	USE RXTEMP		TOP	BOTTOM
ADAPTIVE BOREHOLE CORRECTION	ABC PROCESSING	ON		''	''
	ABC to CALCULATE	STANDOFF		''	''
	STANDOFF	1.50	In	''	''
	TOOL POSITION	ECCENTERED		''	''
	Rmud MULTIPLIER	1.000		''	''

CURVE DESCRIPTION REPORT


CURVE NAME	CURVE ALIAS	CREATION DATE	CURVE DESCRIPTION
F1:CALX	CAL	Oct 25 23:01:34 2006	CALIPER FROM X AXIS OF X-Y CALIPER(S)
F1:CHT	CHT	Oct 25 23:01:34 2006	CABLE HEAD TENSION
F1:DT24QI	DT24	Oct 25 23:01:34 2006	INTERVAL TRANSIT TIME OVER 24 INCH INTERVAL
F1:GR	GR	Oct 25 23:01:34 2006	GAMMA RAY
F1:M2R1	MOR1	Oct 25 23:01:34 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 10 INCH
F1:M2R2	MOR2	Oct 25 23:01:34 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 20 INCH
F1:M2R3	MOR3	Oct 25 23:01:34 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 30 INCH
F1:M2R6	MOR6	Oct 25 23:01:34 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 60 INCH
F1:M2R9	MOR9	Oct 25 23:01:34 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 90 INCH
F1:M2RX	MORX	Oct 25 23:01:34 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 120 INCH
F1:SPD	SPD	Oct 25 23:01:34 2006	SPEED
F1:TEN	TEN	Oct 25 23:01:34 2006	TOTAL TENSION



CURVE MEASURE POINT OFFSET



CURVE	OFFSET (m)	CURVE	OFFSET (m)	CURVE	OFFSET (m)	CURVE	OFFSET (m)
CALX	26.37	GR	33.83	M2R3	2.44	M2RX	2.44
CHT	0.00	M2R1	2.44	M2R6	2.44	SPD	0.00
DT24QI	13.56	M2R2	2.44	M2R9	2.44	TEN	0.00



Presentation : sys1:/dat1a/peak/bilabari_D3/hdilac_main_1000.pdf [1:1000 Scale]
Plot Interval : 769.772 - 2557.88 Meters



Data File 1 : F1 : sys1:/dat1a/peak/bilabari_D3/slams.xff
Created On : Oct 25 23:01:34 2006
Company : PEAK PETROLEUM
Well : BILABRI D3
Field : BILABRI
File Interval : 769.772 - 2557.88 Meters
Oct : [777]

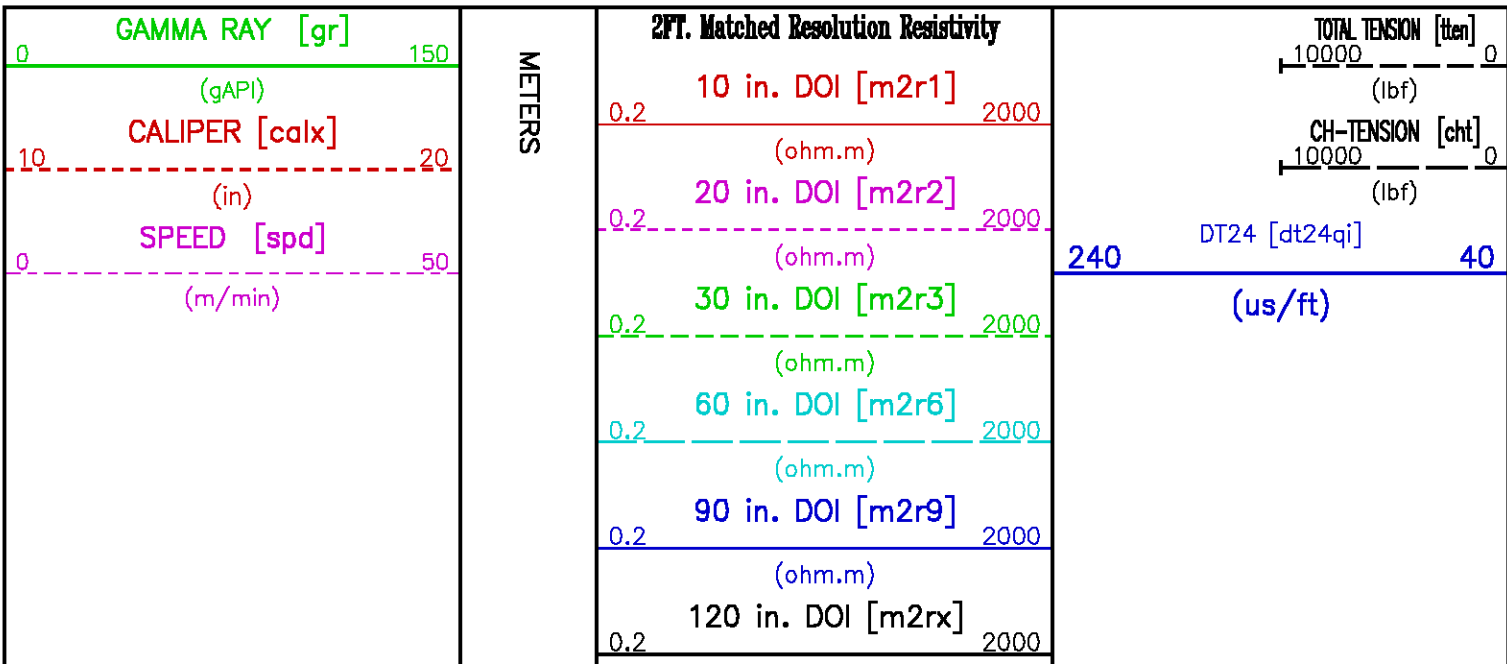


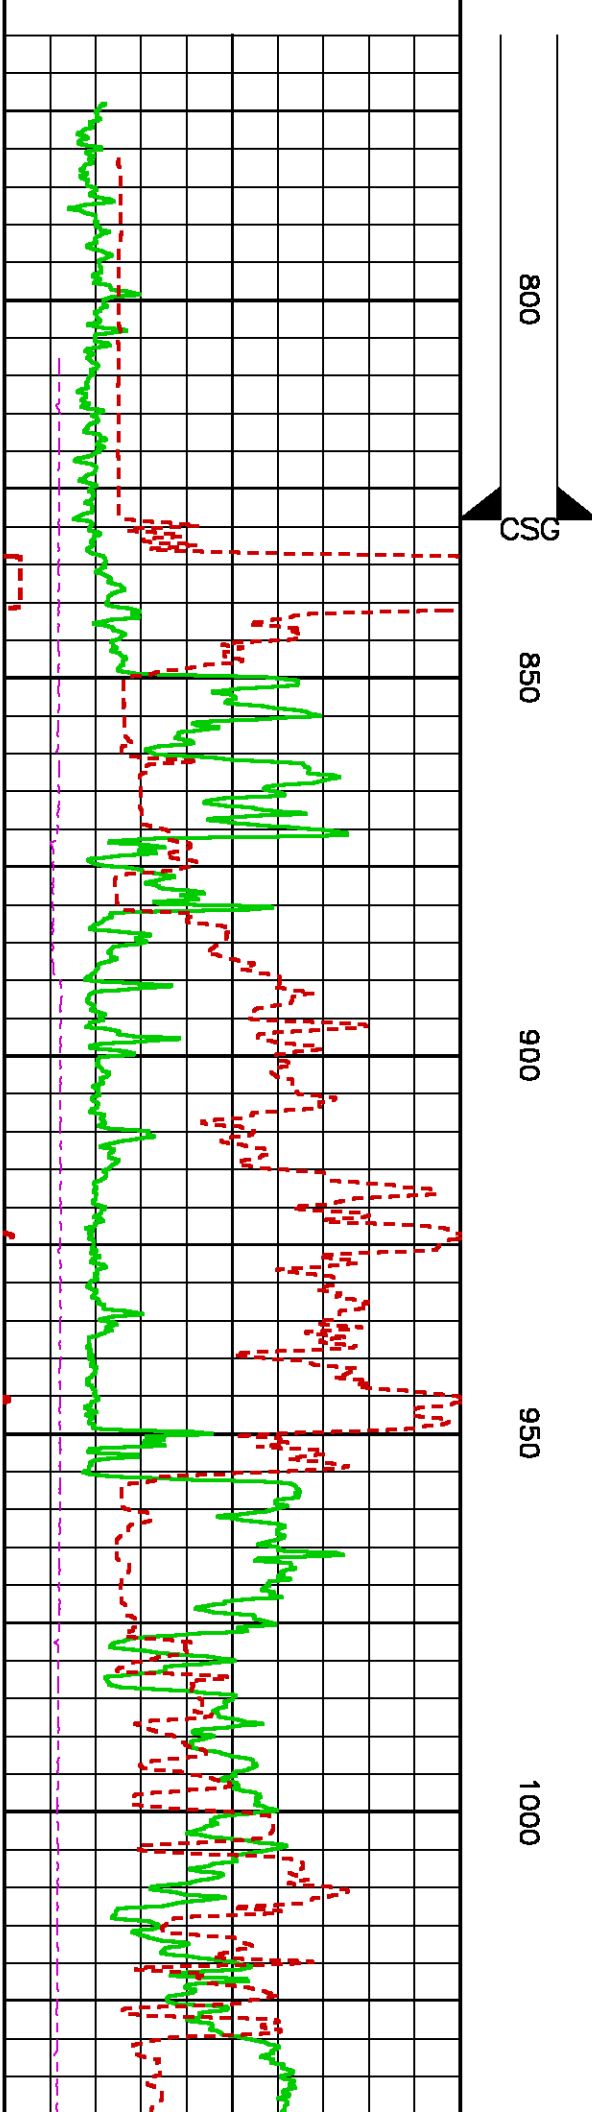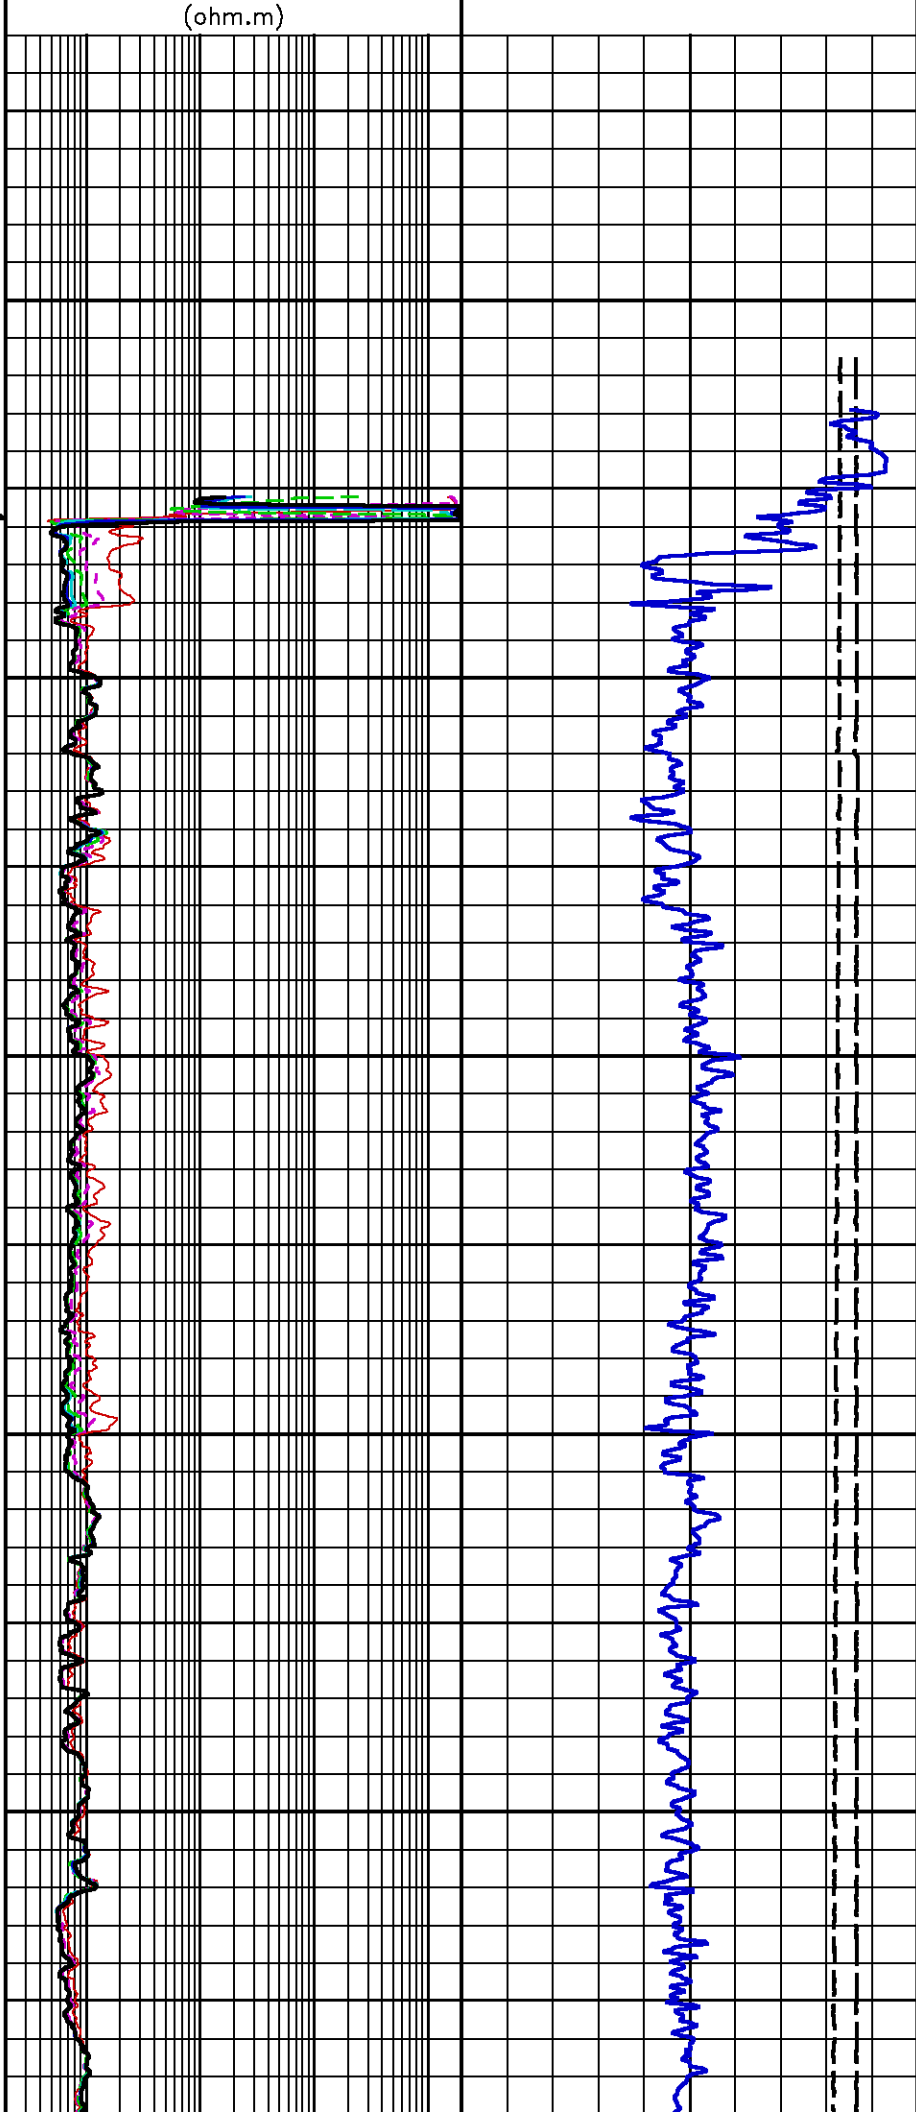

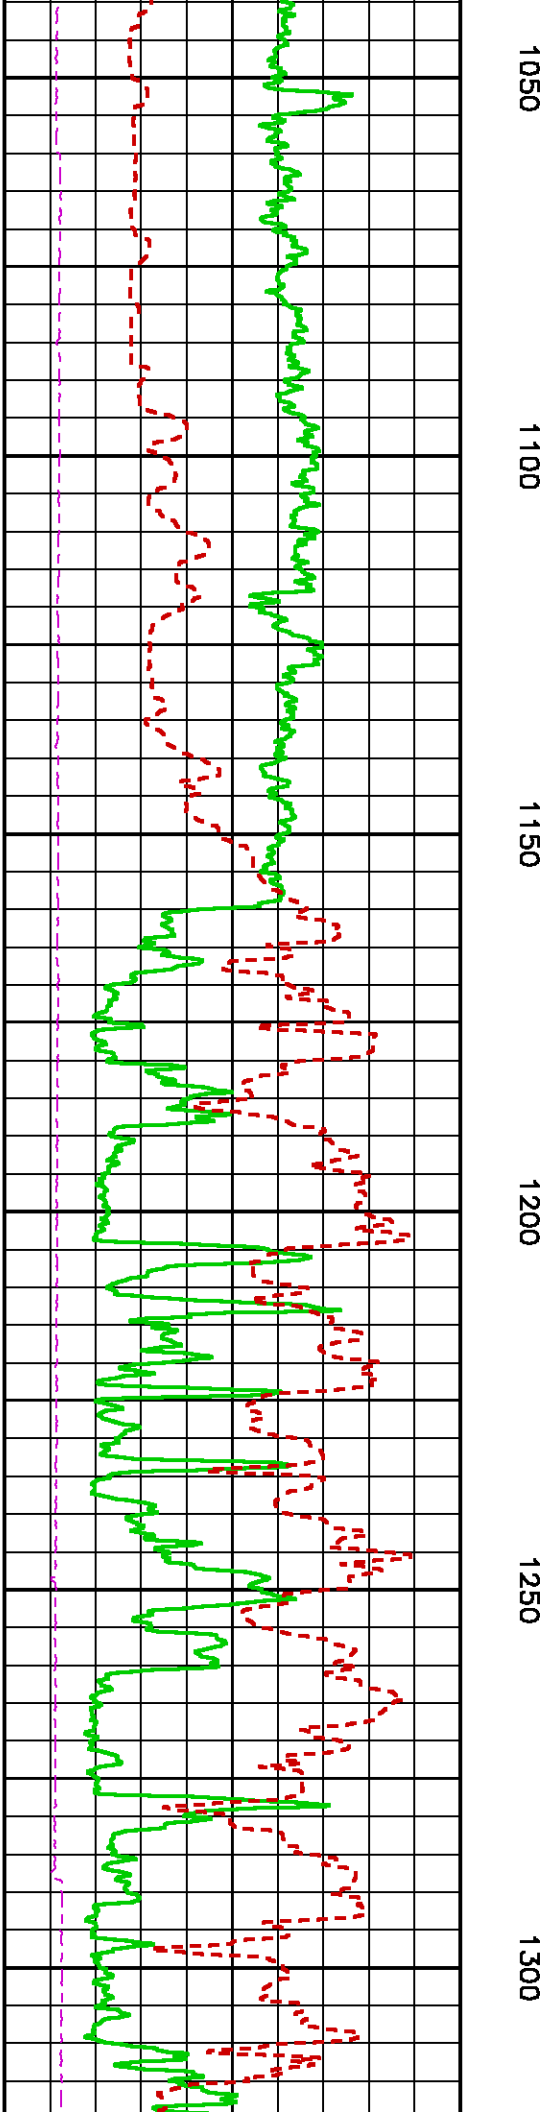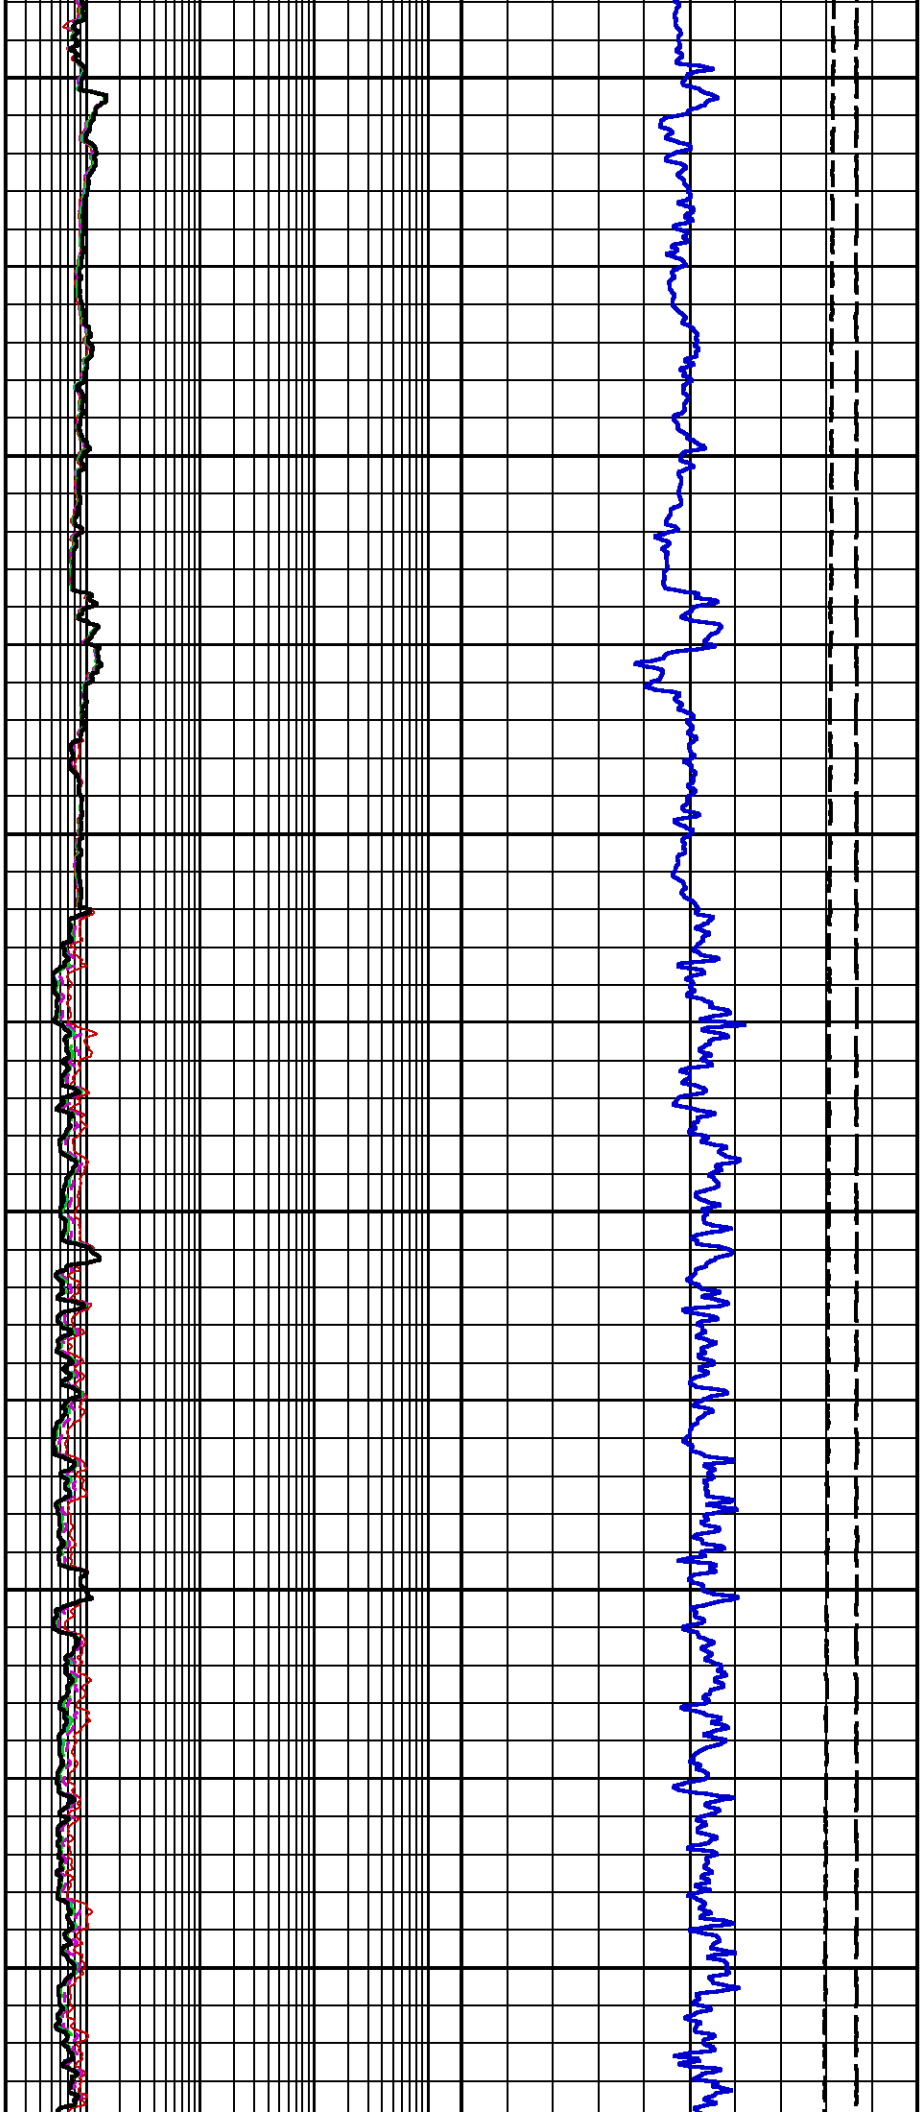


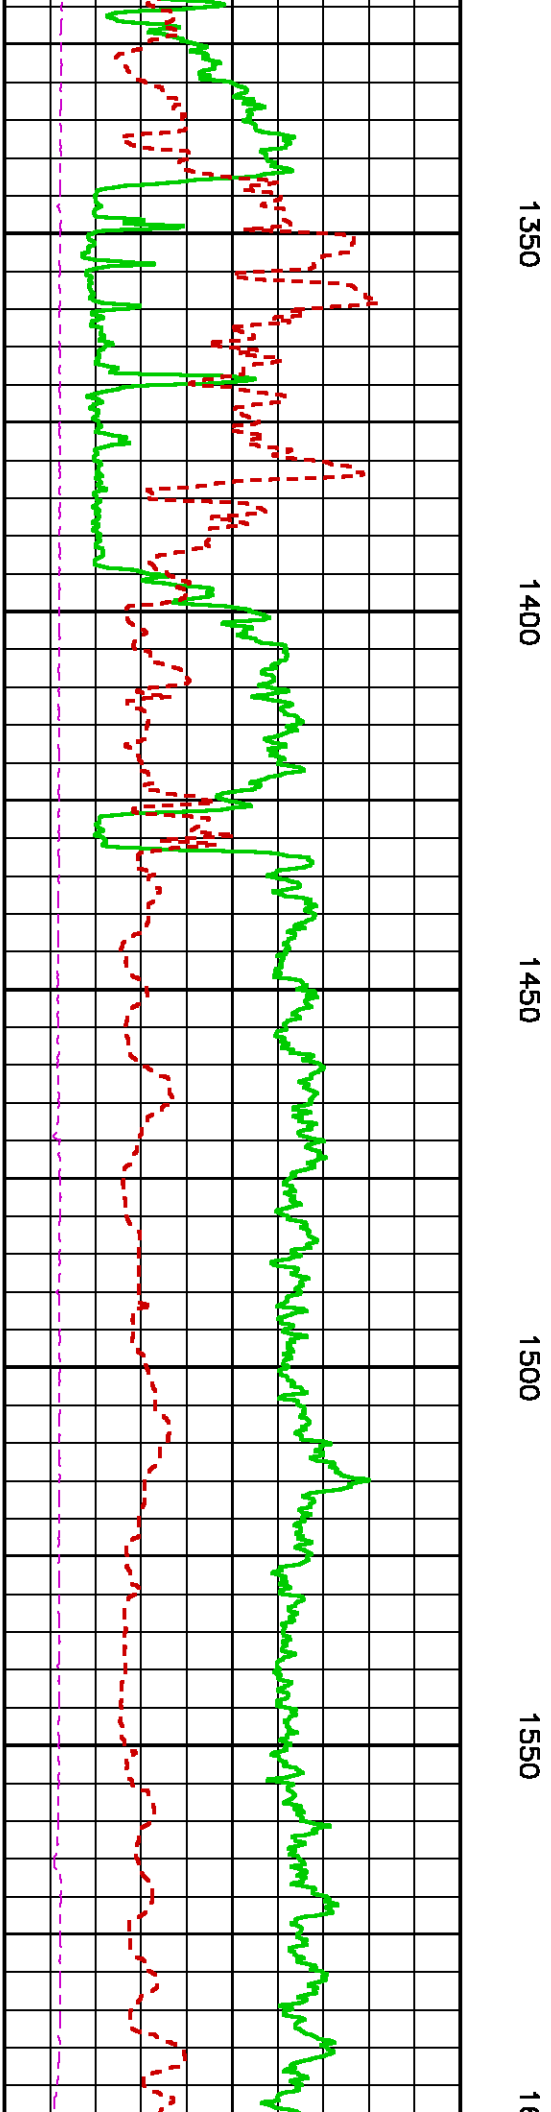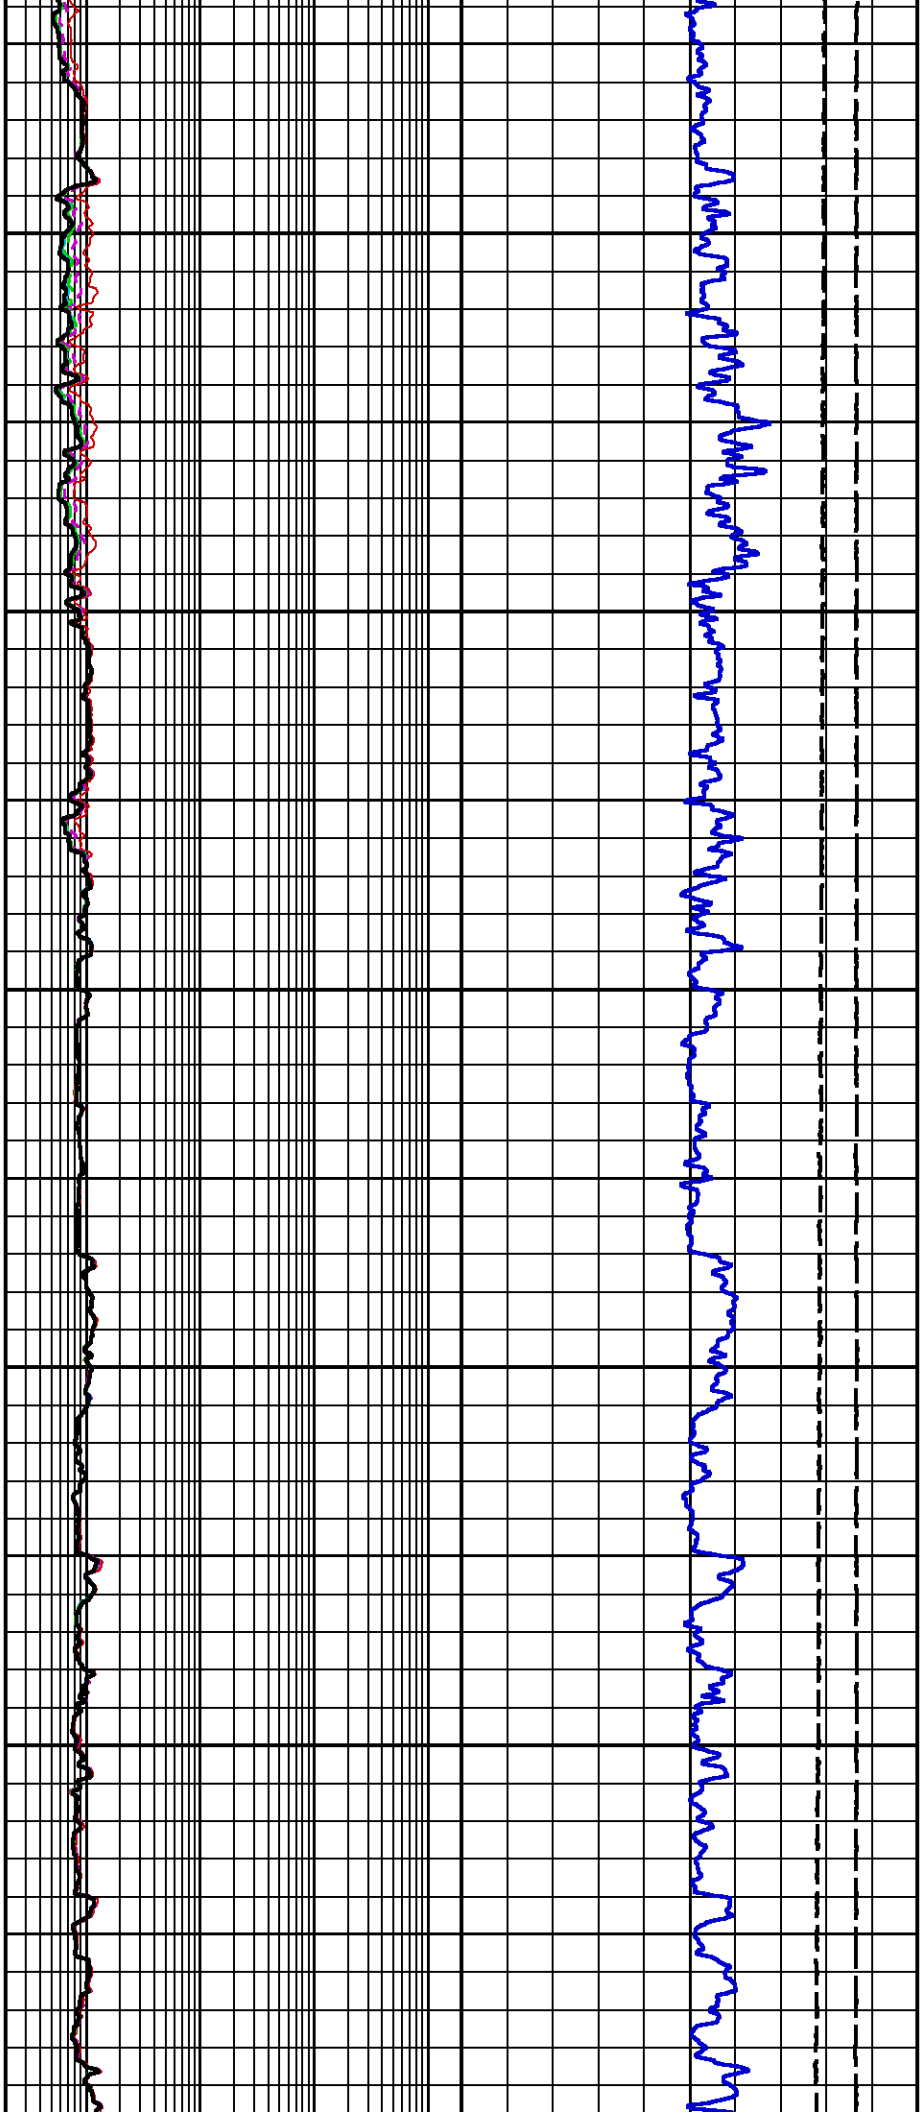


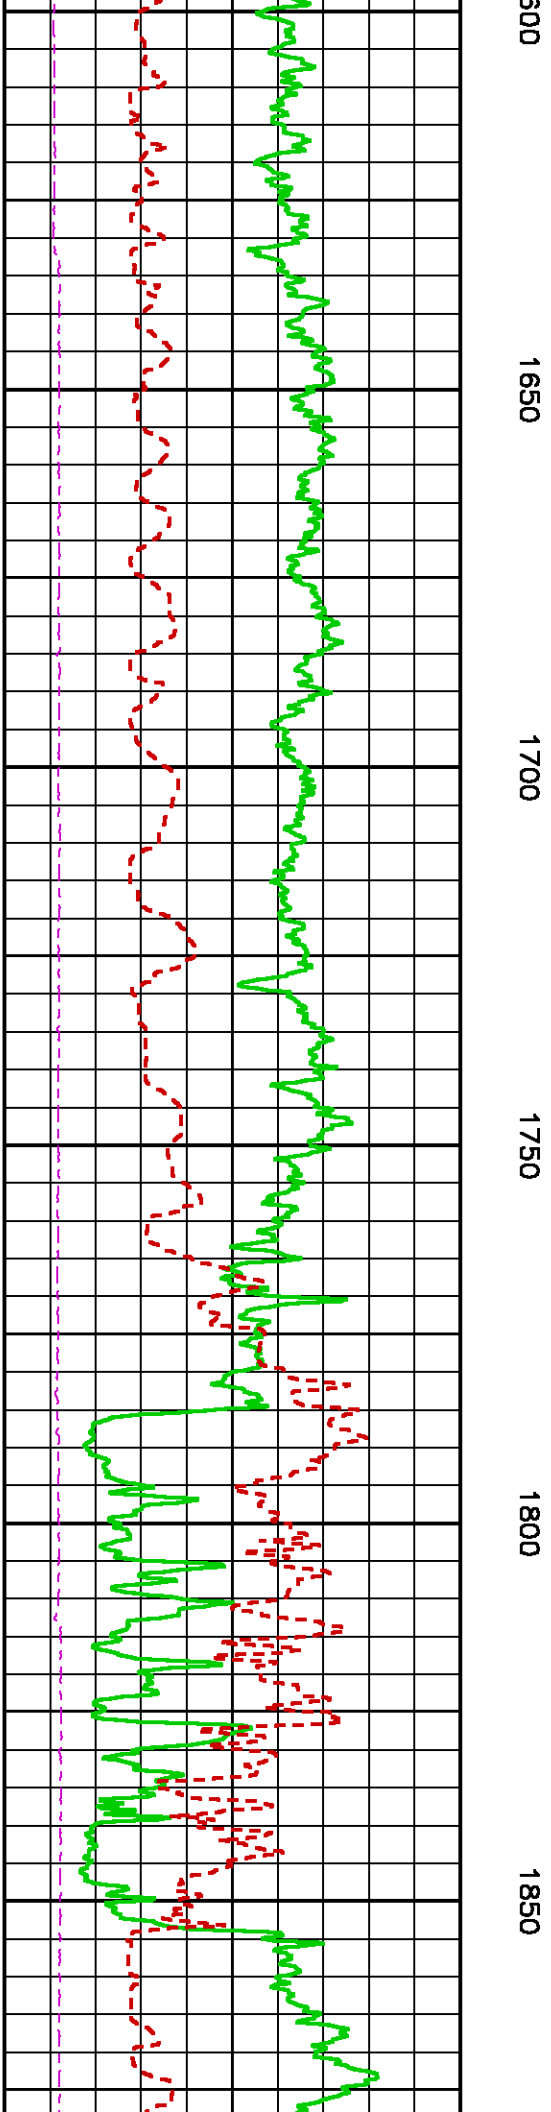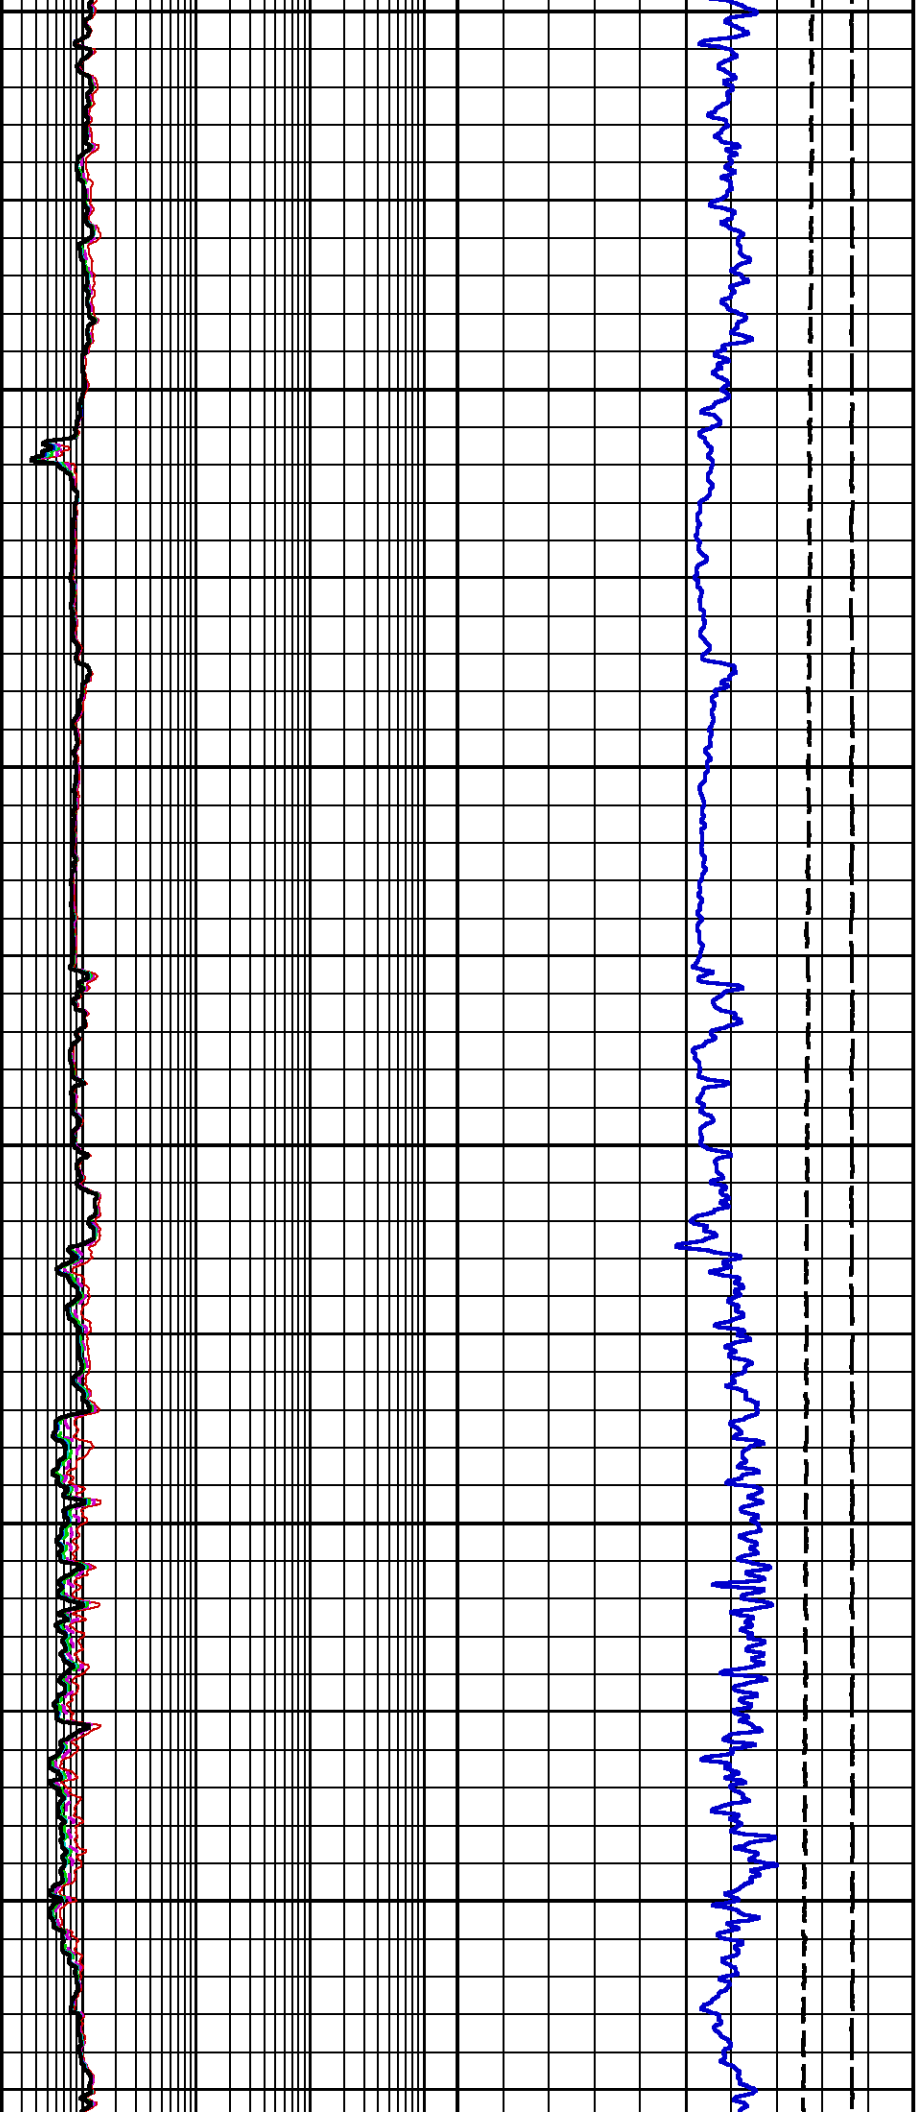

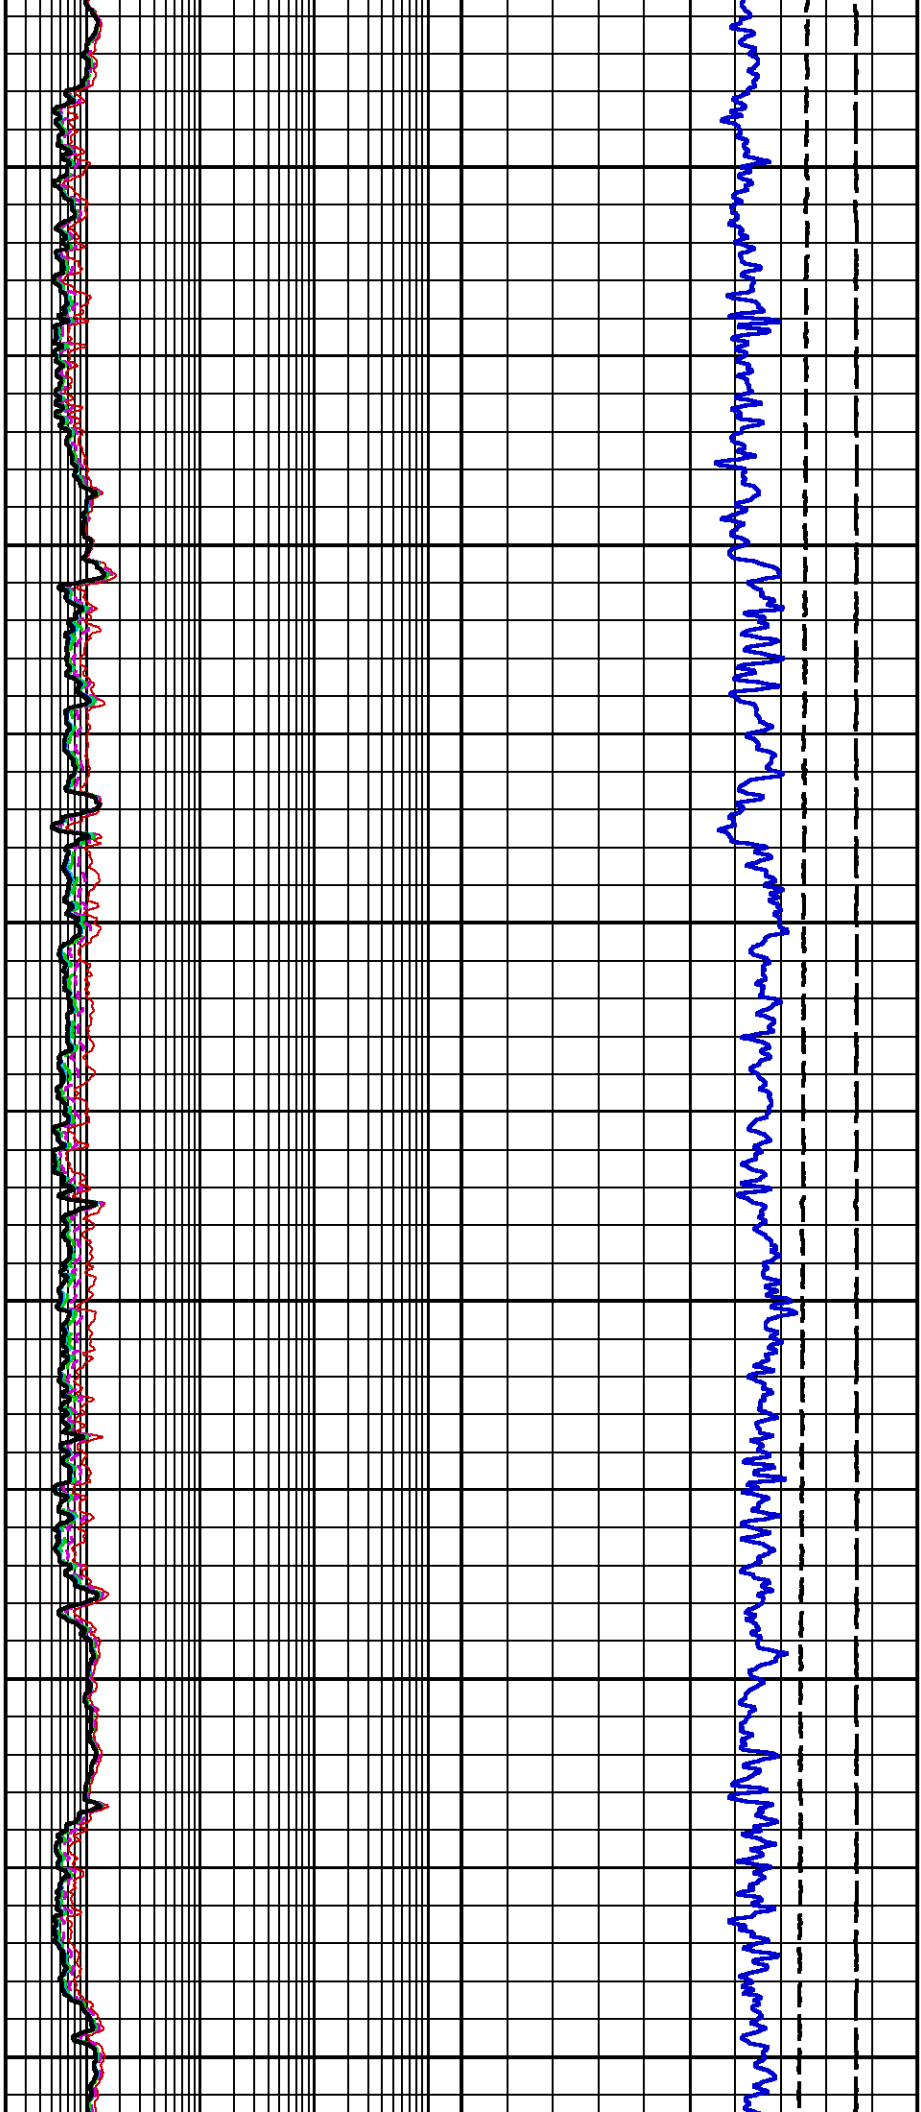

1900 1950 2000 2050 2100 2150

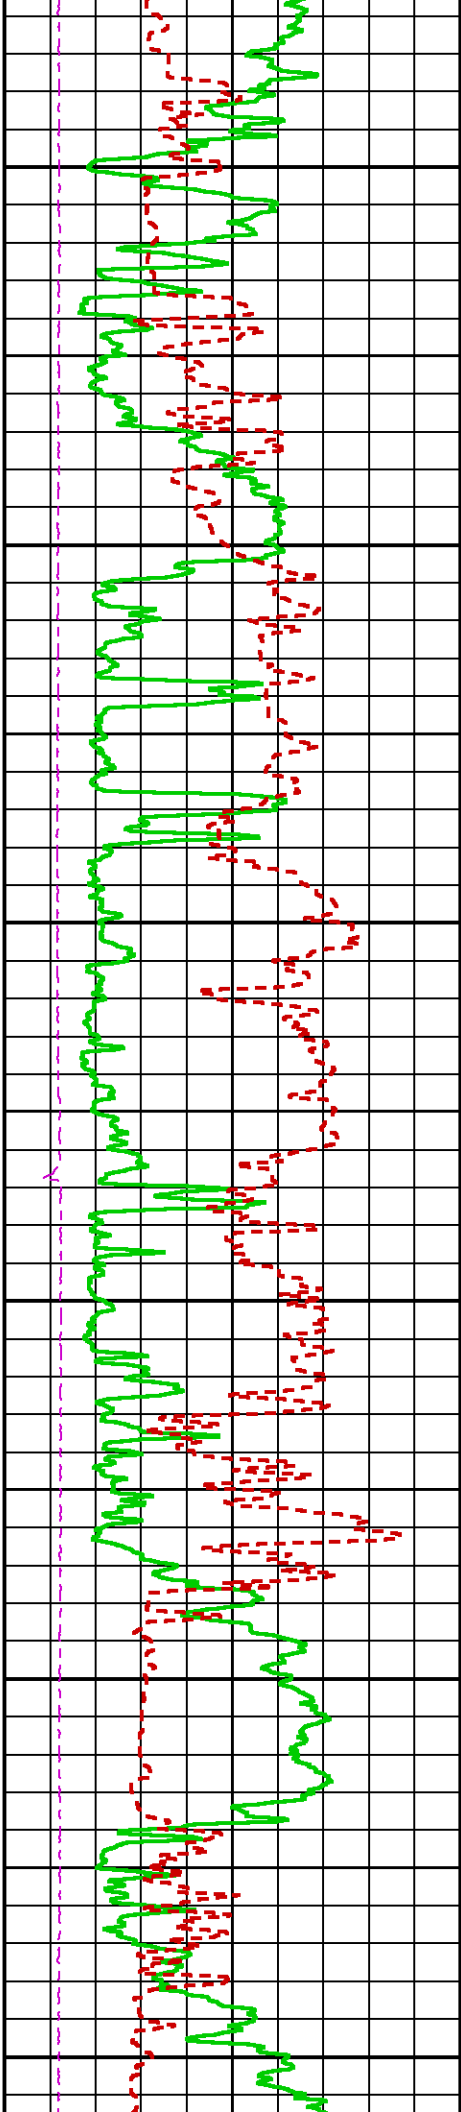

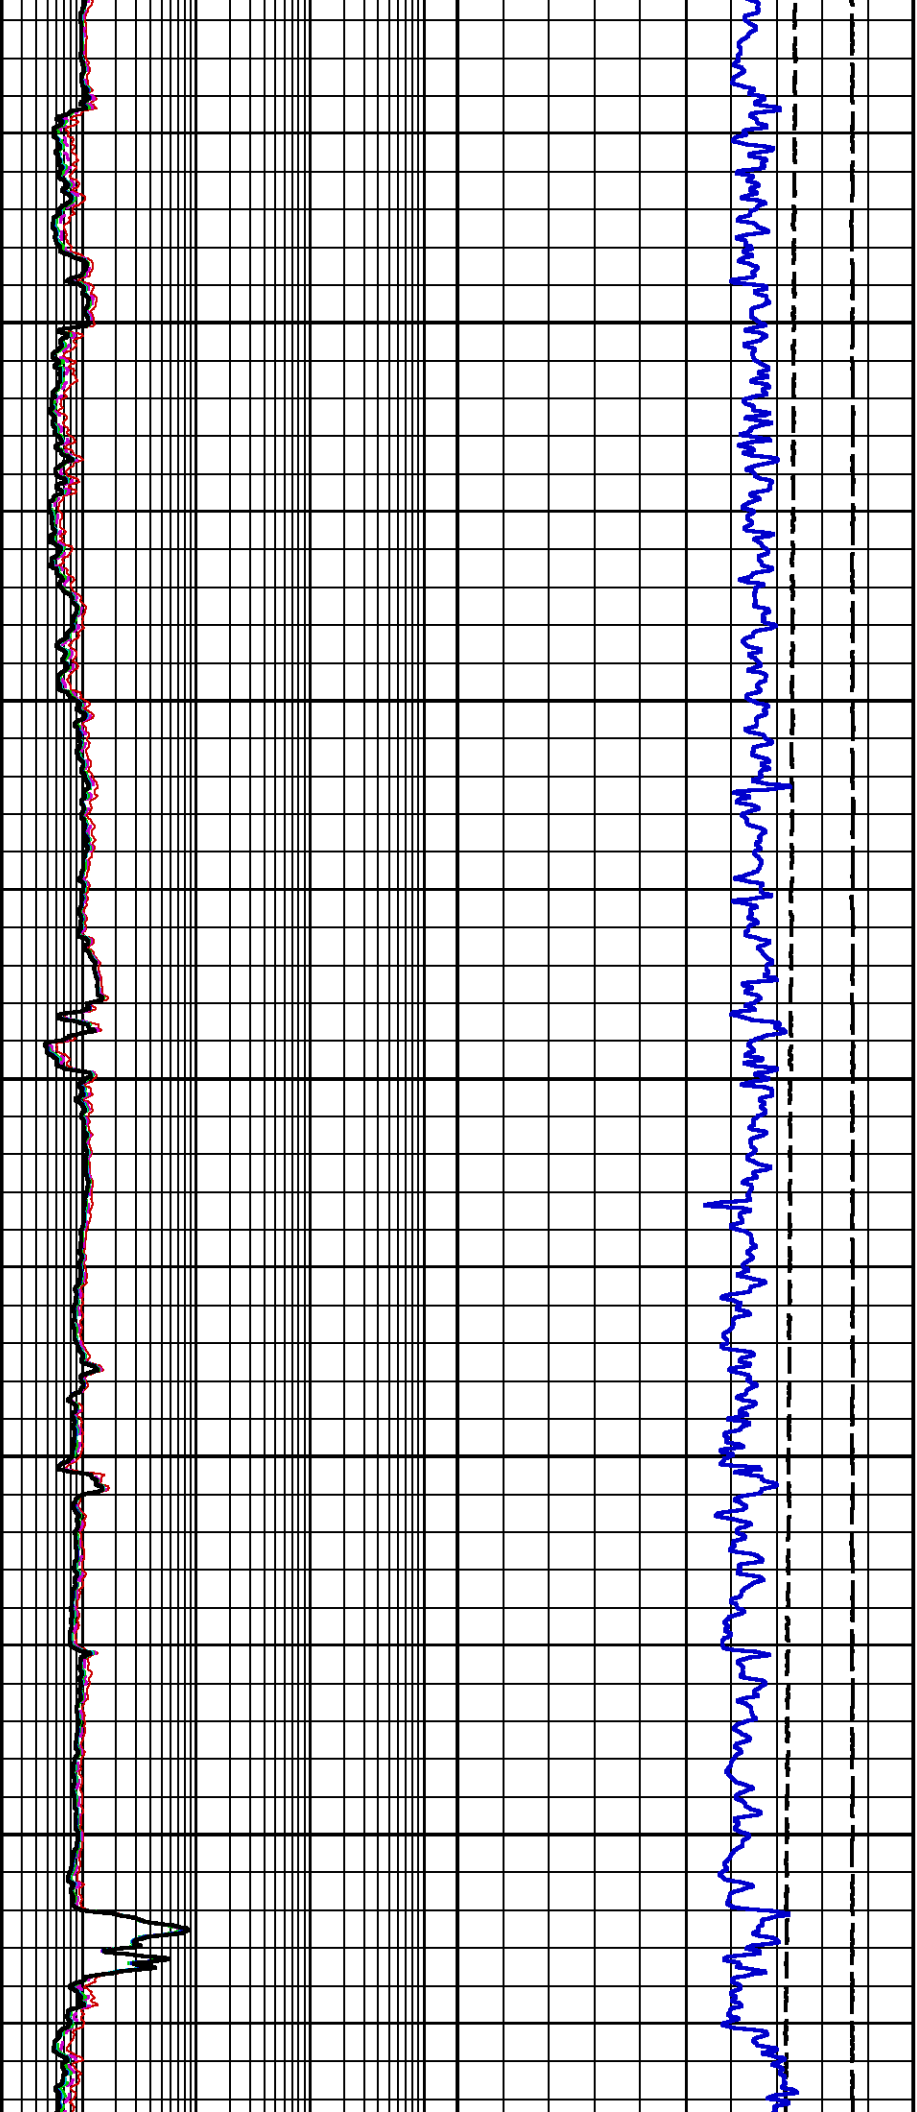


2200


2250

2300

2350

2400

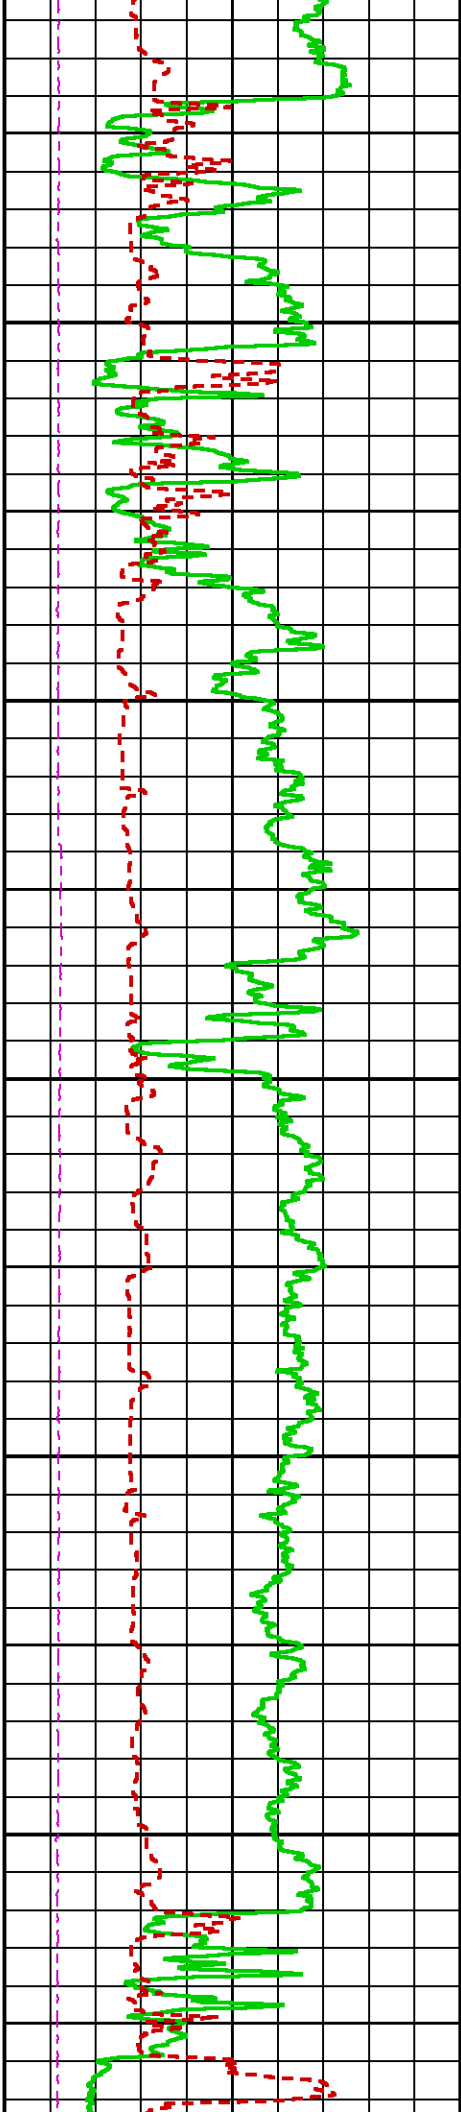

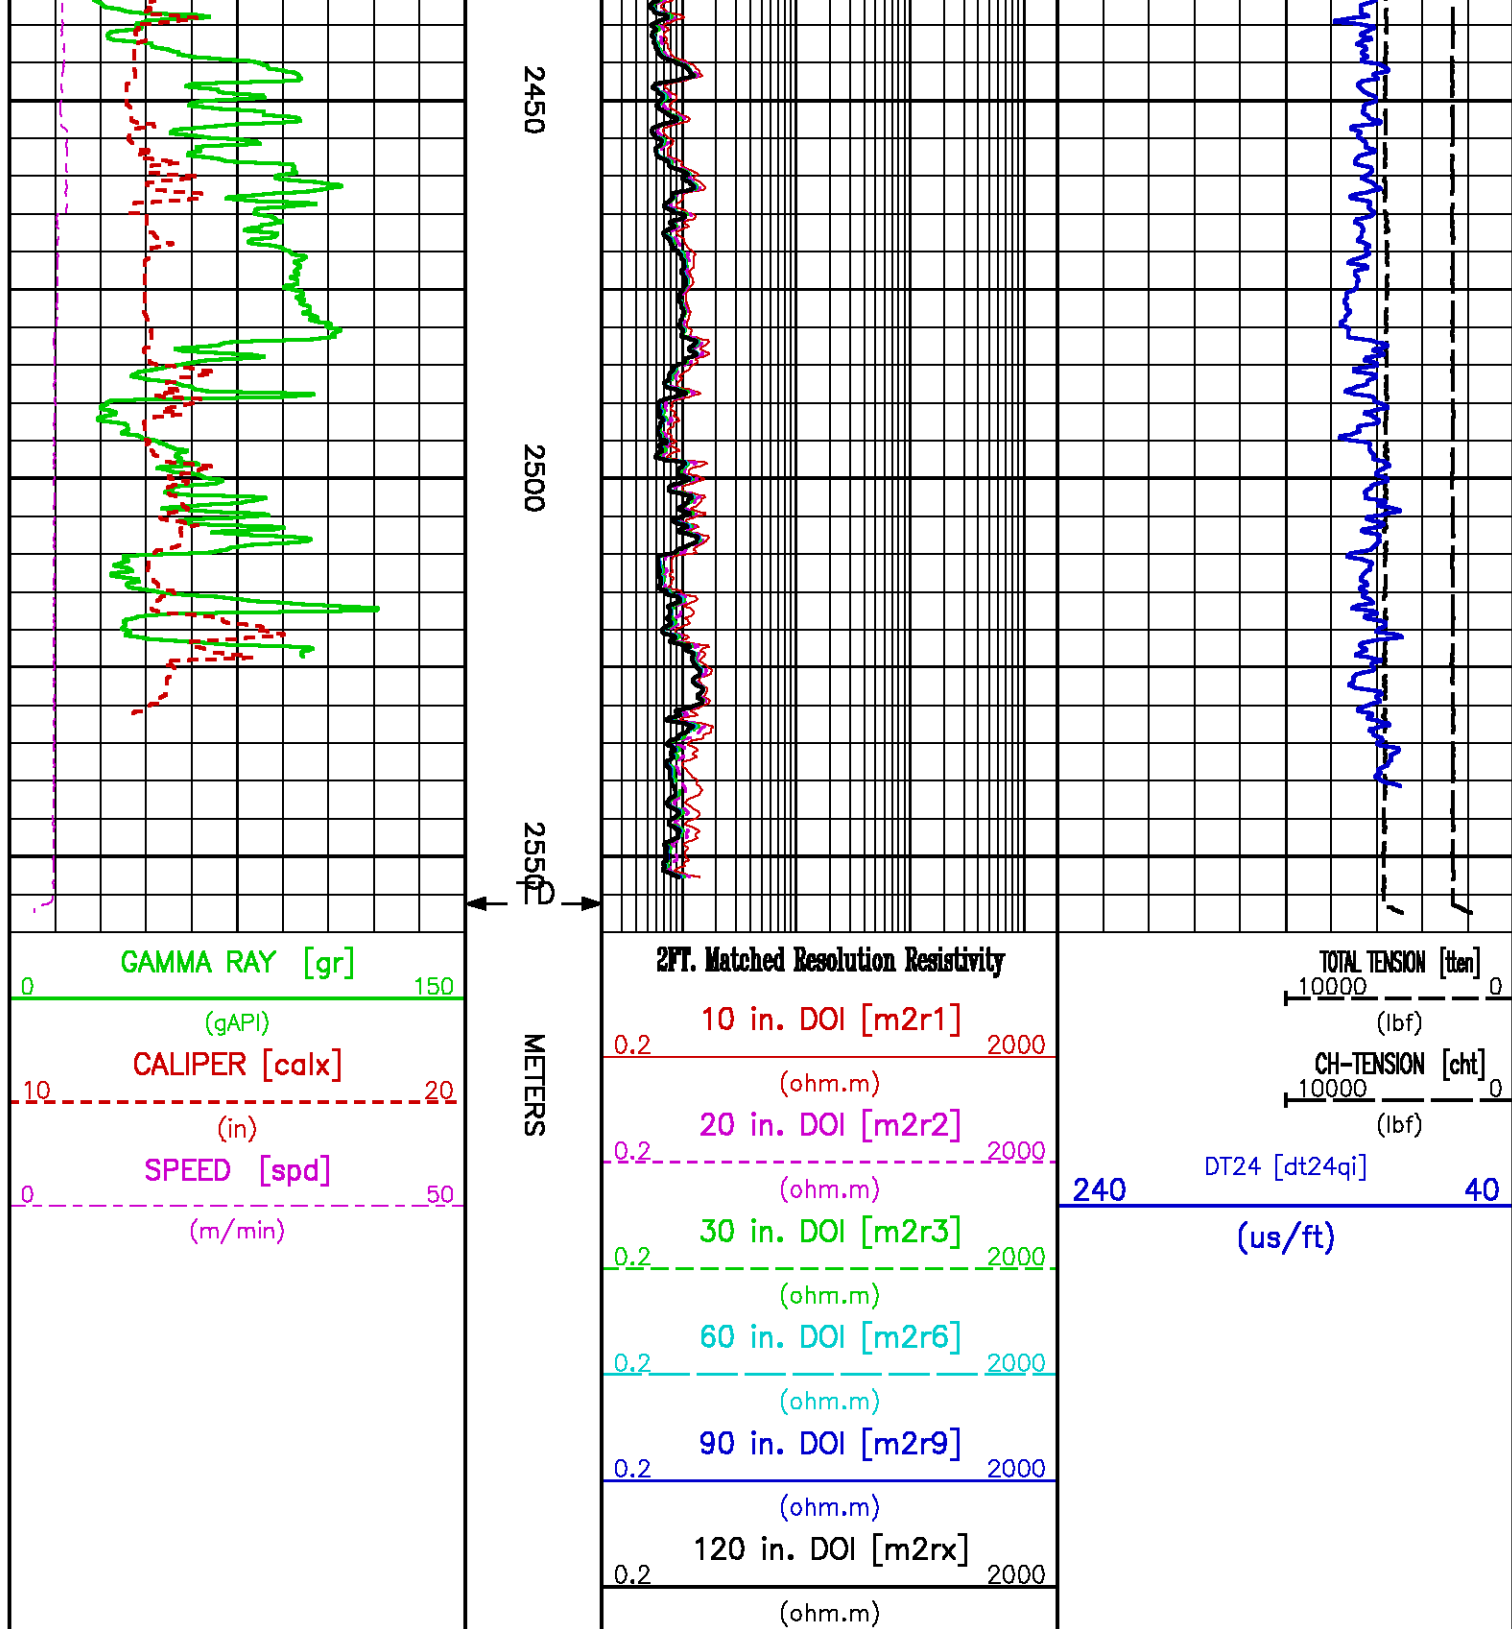

MAIN LOG 1:200 SCALE

PARAMETER AND FILTER SUMMARY REPORT

File: /data/peak/bilabar1_D3/177103.prm
LOGGING MODE: DEPTH DIRECTION: UP
TOP DEPTH: 807.453 m BOTTOM DEPTH: 2510.028 m

SYMMETRIC FILTER

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
CHT	FILTER ()	medium (1)		TOP	BOTTOM
Y AXIS CALIPER	FILTER ()	medium (1)		''	''
SPEED	FILTER ()	medium (1)		''	''
TENSION	FILTER ()	medium (1)		''	''
GR	FILTER ()	medium (1)		''	''
X AXIS CALIPER	FILTER ()	medium (1)		''	''
	FILTER (.h)	medium (1)		''	''
	FILTER (.l)	medium (1)		''	''
DT24	FILTER ()	light (2)		''	''

BOREHOLE & CEMENT

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
BIT SIZE	BIT SIZE	12.250	in	TOP	BOTTOM
BOREHOLE CORR DIAMETER SOURCE	CALIPER/FIXED DIA. (mbh*)	USE CALIPER		''	''
BOREHOLE CORR DIAMETER	FIXED DIAMETER (mbh*)	12.250	in	''	''
MUD VALUES SOURCE	RMUD SOURCE (HDIL)	OIL BASE MUD		''	''
MUD VALUES	MUD SAMPLE TEMP	75.0	degF	''	''
	MUD SAMPLE RES	1.000	ohm.m	''	''
	MUD REFERENCE TEMP	75.0	degF	''	''
	TEMP GRADIENT	1.200	0.01 degF/ft	''	''

ACOUSTIC POROSITY

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
DELTA T CURVE SELECTION	DT24 SOURCE	FIRST ARRIVAL DT24		TOP	BOTTOM

ACOUSTIC PICK CONTROL

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
DELTA-T REJECTION RANGE	REJECTION DTmin	40	us/ft	TOP	BOTTOM
	REJECTION DTmax	180	us/ft	''	''
FIRST ARRIVAL PICK	SEARCH START OFFSET {sfan1*}	87	us	''	''
	SEARCH START OFFSET {sfan2*}	87	us	''	''
	SEARCH START OFFSET {sfan3*}	87	us	''	''
	SEARCH START OFFSET {sfan4*}	87	us	''	''
	SEARCH WINDOW LENGTH	1529	us	TOP	835.685
		1245	us	835.685	1453.363
		1045	us	1453.363	BOTTOM
	THRESHOLD FACTOR	0.30		TOP	1264.234
		0.33		1264.234	1264.996
		0.36		1264.996	1265.606
		0.40		1265.606	1999.717
		0.34		1999.717	2001.545
		0.30		2001.545	BOTTOM
	THRESHOLD MINIMUM (sfan1*)	2.0	pct	TOP	880.948
		1.6	pct	880.948	1352.626
		2.0	pct	1352.626	2117.979
THRESHOLD MINIMUM (sfan2*)		1.7	pct	2117.979	2118.131
		1.8	pct	2118.131	BOTTOM
	THRESHOLD MINIMUM (sfan2*)	1.6	pct	TOP	1352.474
		2.0	pct	1352.474	2117.827
		1.7	pct	2117.827	2117.979
		1.8	pct	2117.979	BOTTOM
	THRESHOLD MINIMUM (sfan3*)	1.6	pct	TOP	1352.321
		2.0	pct	1352.321	2117.674
		1.7	pct	2117.674	2117.827
		1.8	pct	2117.827	BOTTOM
	THRESHOLD MINIMUM (sfan4*)	1.6	pct	TOP	1352.169
		2.0	pct	1352.169	2117.522
		1.7	pct	2117.522	2117.674
		1.8	pct	2117.674	BOTTOM
	E3 THRESHOLD	OFF		TOP	BOTTOM

ACOUSTIC QUALITY CONTROL

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
CYCLE SKIP LIMIT	CYCLE SKIP LIMIT	100	us	TOP	BOTTOM

ACOUSTIC WAVEFORM FILTER

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
WAVEFORM FILTER - DELTA T	SURFACE WAVE FILTER	ON		TOP	BOTTOM
	LOW FREQ CUTOFF	4000	Hz	''	''
	HIGH FREQ CUTOFF	15000	Hz	TOP	2144.649
		20000	Hz	2144.649	BOTTOM

HDIL PROCESSING

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
HDIL TEMPERATURE CORRECTION	TEMP CORR SOURCE	USE RXTEMP		TOP	BOTTOM
ADAPTIVE BOREHOLE CORRECTION	ABC PROCESSING	ON		''	''
	ABC to CALCULATE	STANDOFF		''	''
	STANDOFF	1.50	In	''	''
	TOOL POSITION	ECCENTERED		''	''
	Rmud MULTIPLIER	1.000		''	''


CURVE DESCRIPTION REPORT

CURVE NAME	CURVE ALIAS	CREATION DATE	CURVE DESCRIPTION
F1:CALX	CAL	Oct 25 23:01:34 2006	CALIPER FROM X AXIS OF X-Y CALIPER(S)
F1:CHT	CHT	Oct 25 23:01:34 2006	CABLE HEAD TENSION
F1:DT24QI	DT24	Oct 25 23:01:34 2006	INTERVAL TRANSIT TIME OVER 24 INCH INTERVAL
F1:GR	GR	Oct 25 23:01:34 2006	GAMMA RAY
F1:M2R1	MOR1	Oct 25 23:01:34 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 10 INCH
F1:M2R2	MOR2	Oct 25 23:01:34 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 20 INCH
F1:M2R3	MOR3	Oct 25 23:01:34 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 30 INCH
F1:M2R6	MOR6	Oct 25 23:01:34 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 60 INCH
F1:M2R9	MOR9	Oct 25 23:01:34 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 90 INCH
F1:M2RX	MORX	Oct 25 23:01:34 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 120 INCH
F1:SPD	SPD	Oct 25 23:01:34 2006	SPEED
F1:TEN	TEN	Oct 25 23:01:34 2006	TOTAL TENSION
F1:TQI	TT	Oct 25 23:01:34 2006	INTEGRATED TRAVEL TIME FROM ACOUSTIC DELTA-T

CURVE MEASURE POINT OFFSET

CURVE	OFFSET (m)	CURVE	OFFSET (m)	CURVE	OFFSET (m)	CURVE	OFFSET (m)
CALX	26.37	GR	33.83	M2R3	2.44	M2RX	2.44
CHT	0.00	M2R1	2.44	M2R6	2.44	SPD	0.00
DT24QI	13.56	M2R2	2.44	M2R9	2.44	TEN	0.00

Presentation	: sys1:/dat1a/peak/bilabar_LD3/hdlac_splice_200.pdf [1:200 Scale]
Plot Interval	: 769.772 - 2557.88 Meters
Data File 1	: F1 : sys1:/dat1a/peak/bilabar_LD3/slams.xtf
Created On	: Oct 25 23:01:34 2006
Company	: PEAK PETROLEUM
Well	: BILABRI D3
Field	: BILABRI
File Interval	: 769.772 - 2557.88 Meters
Oct	: [777]

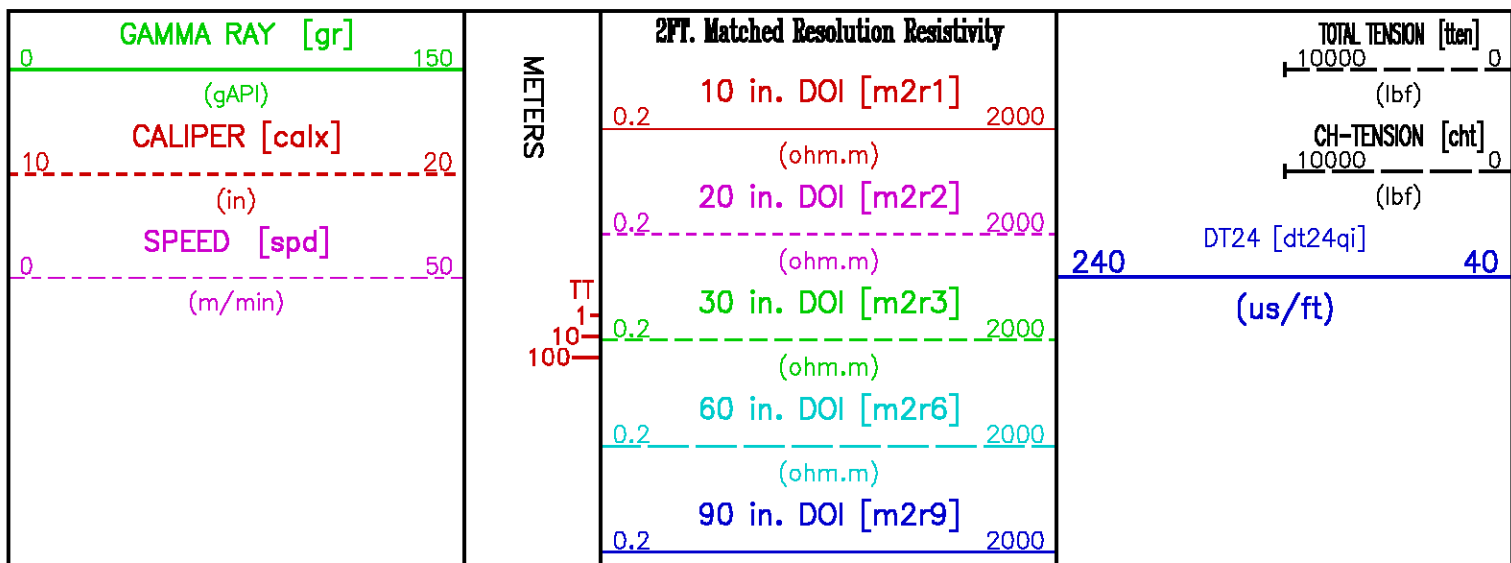



(ohm.m)
120 in. DOI [m2rx]
0.2 2000


(ohm.m)



775



800



DT24QI

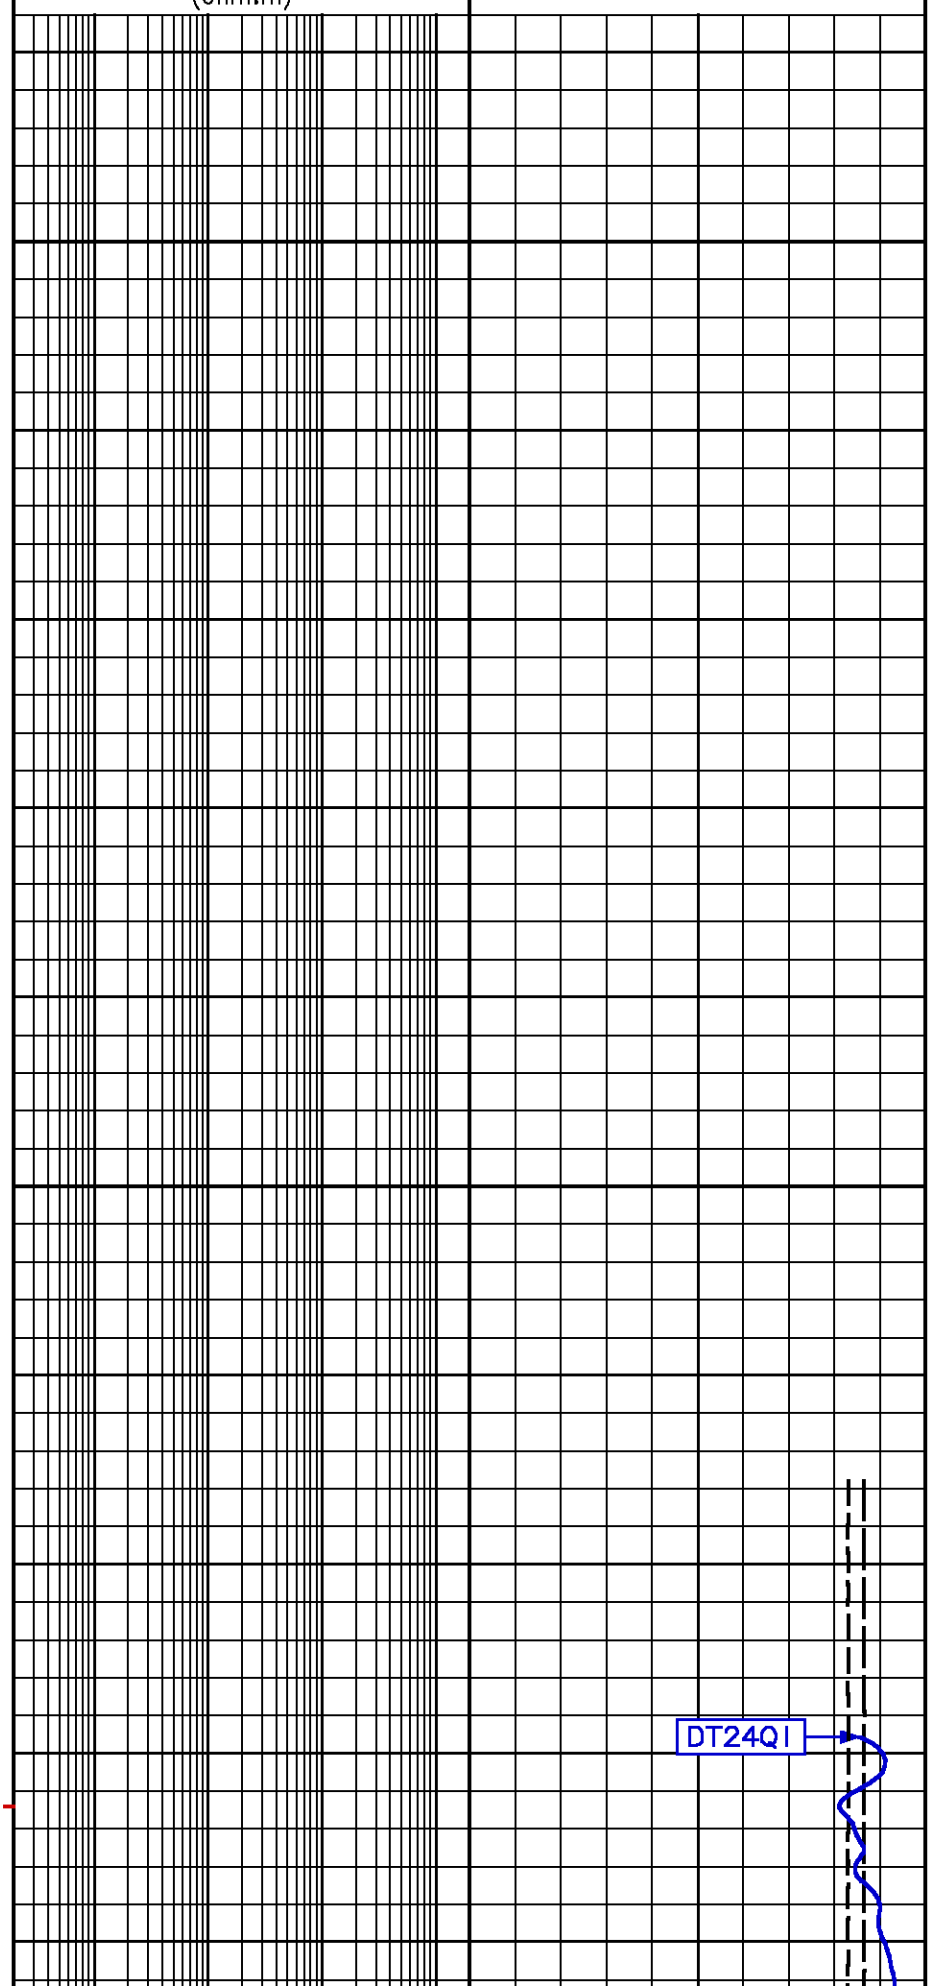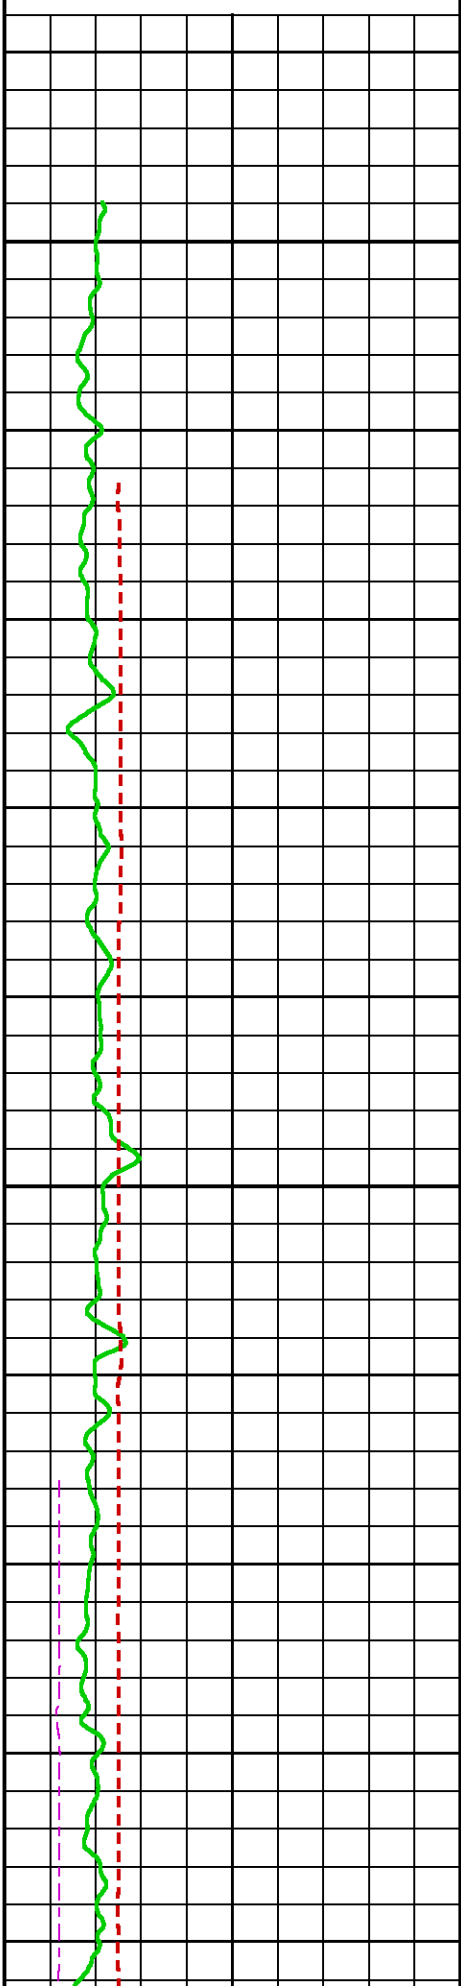

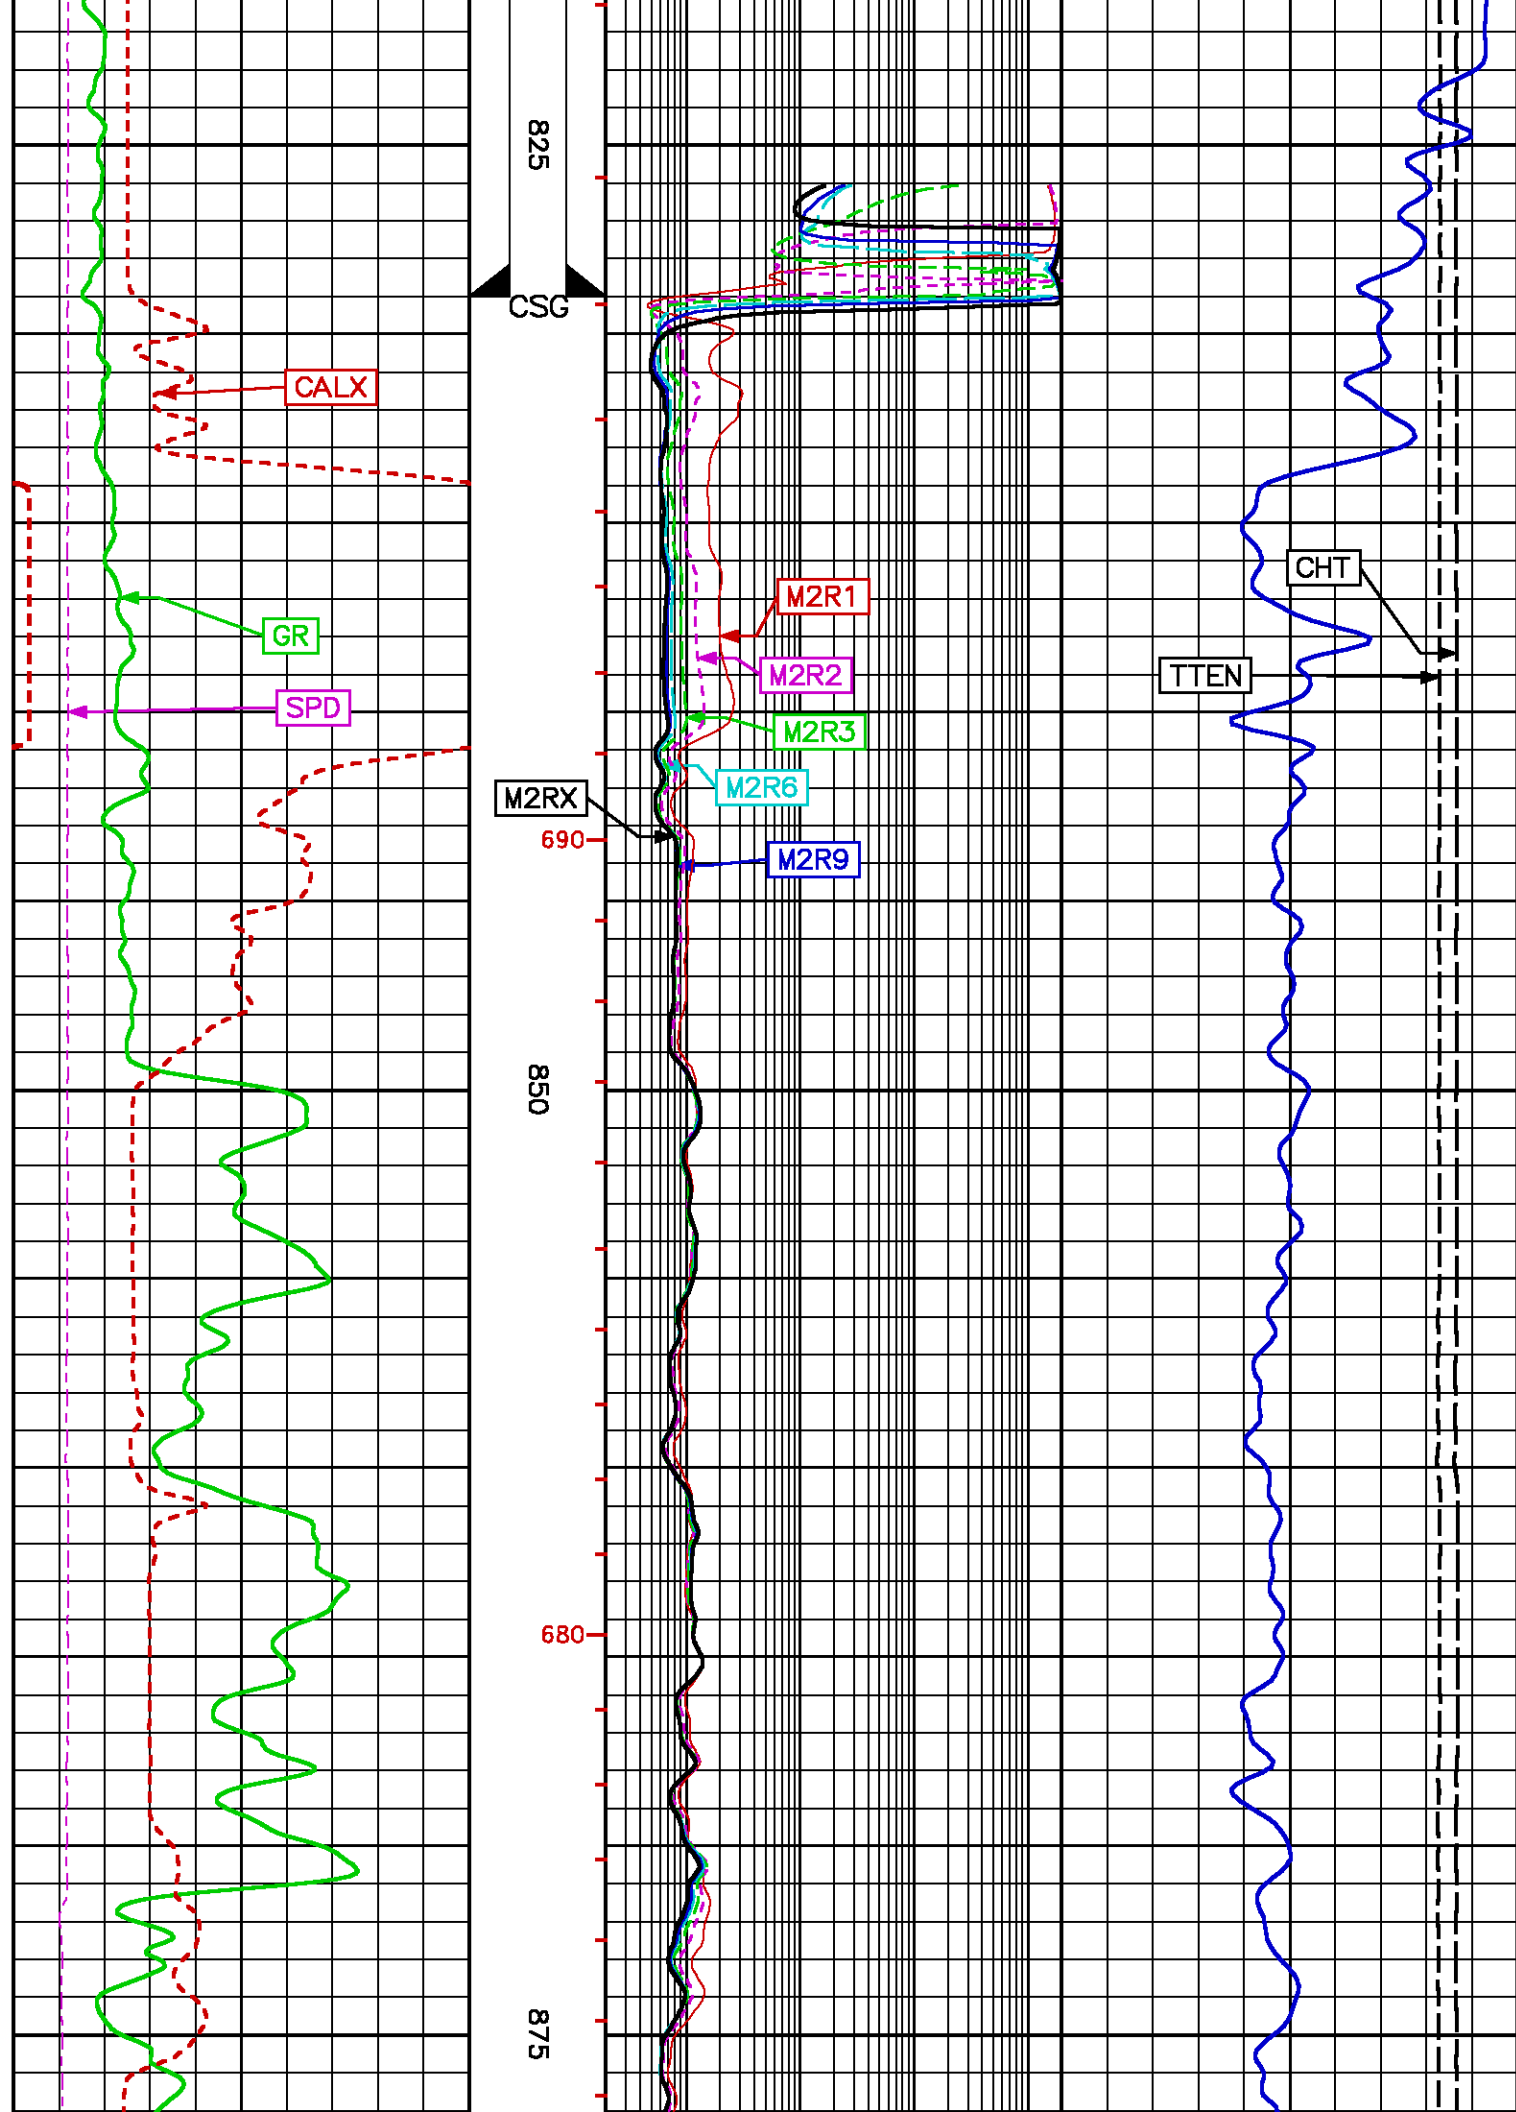

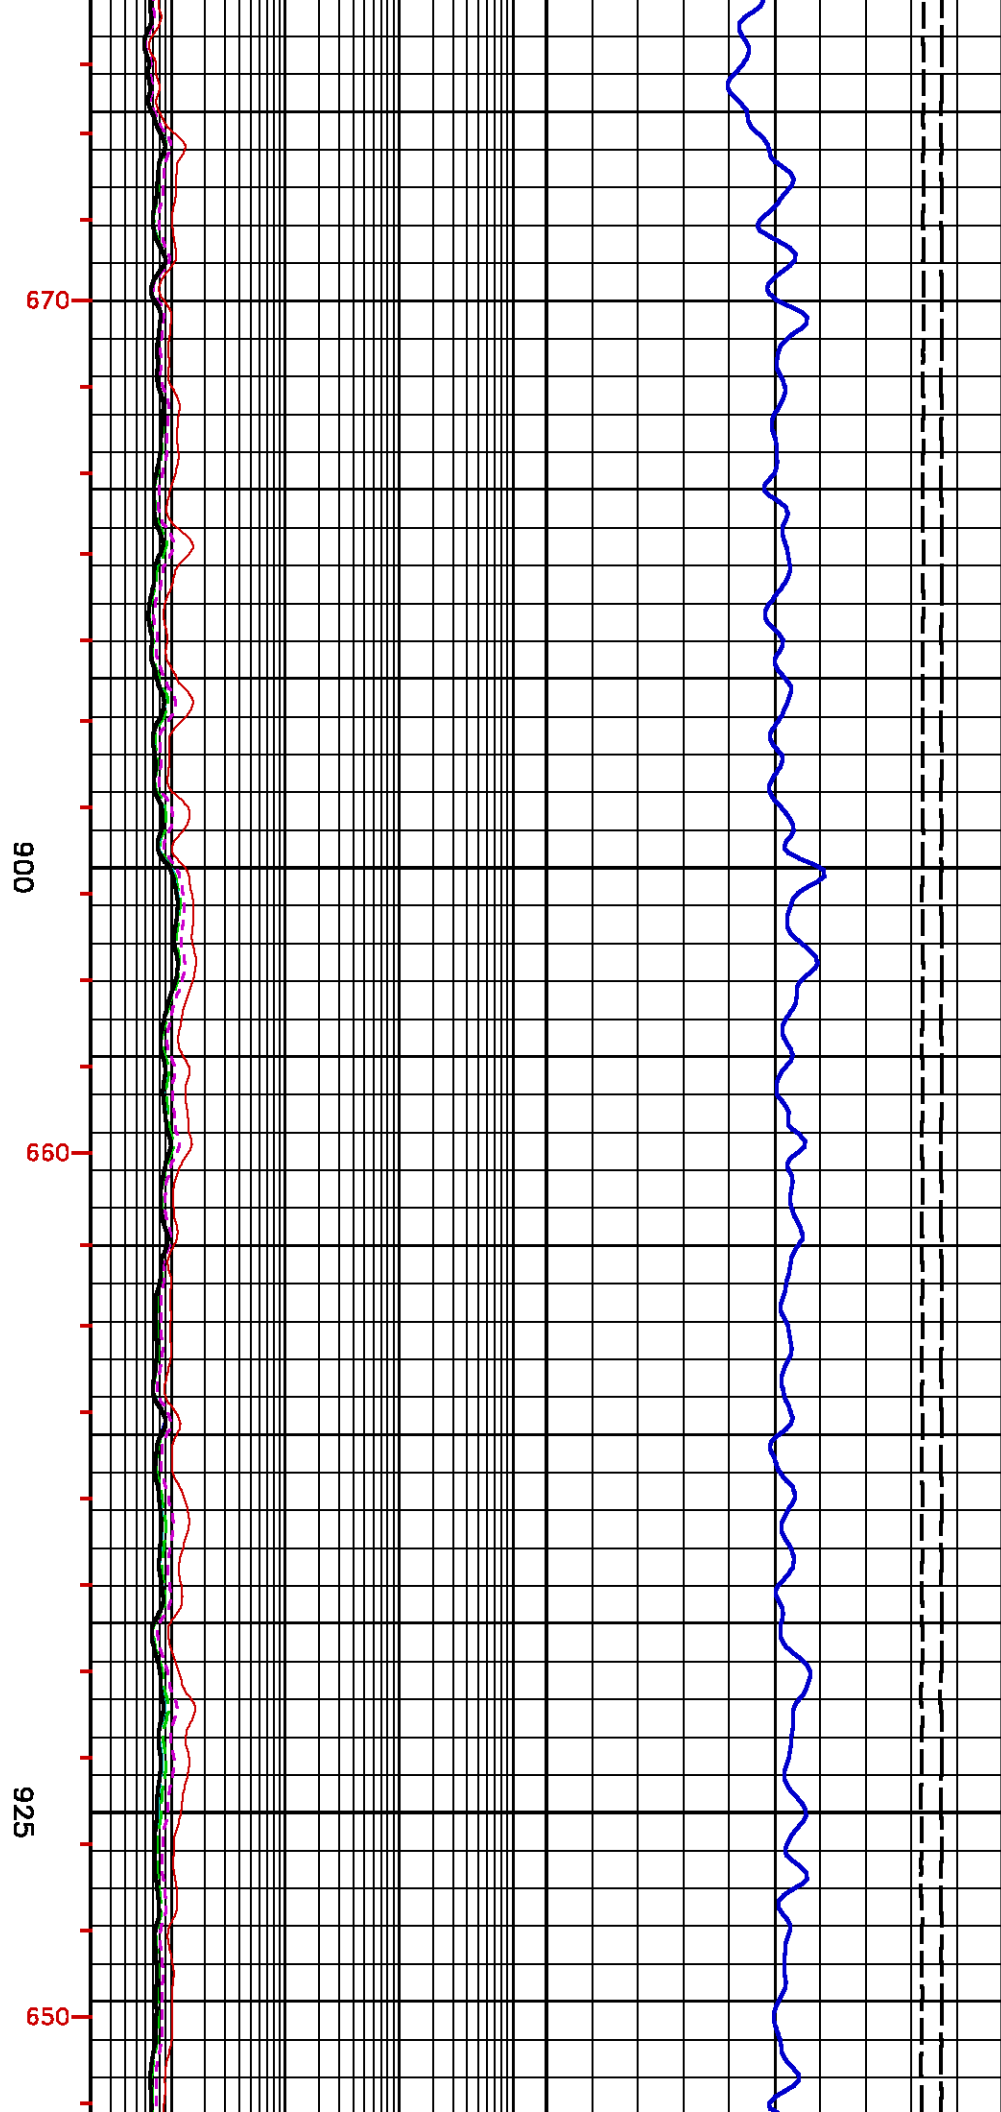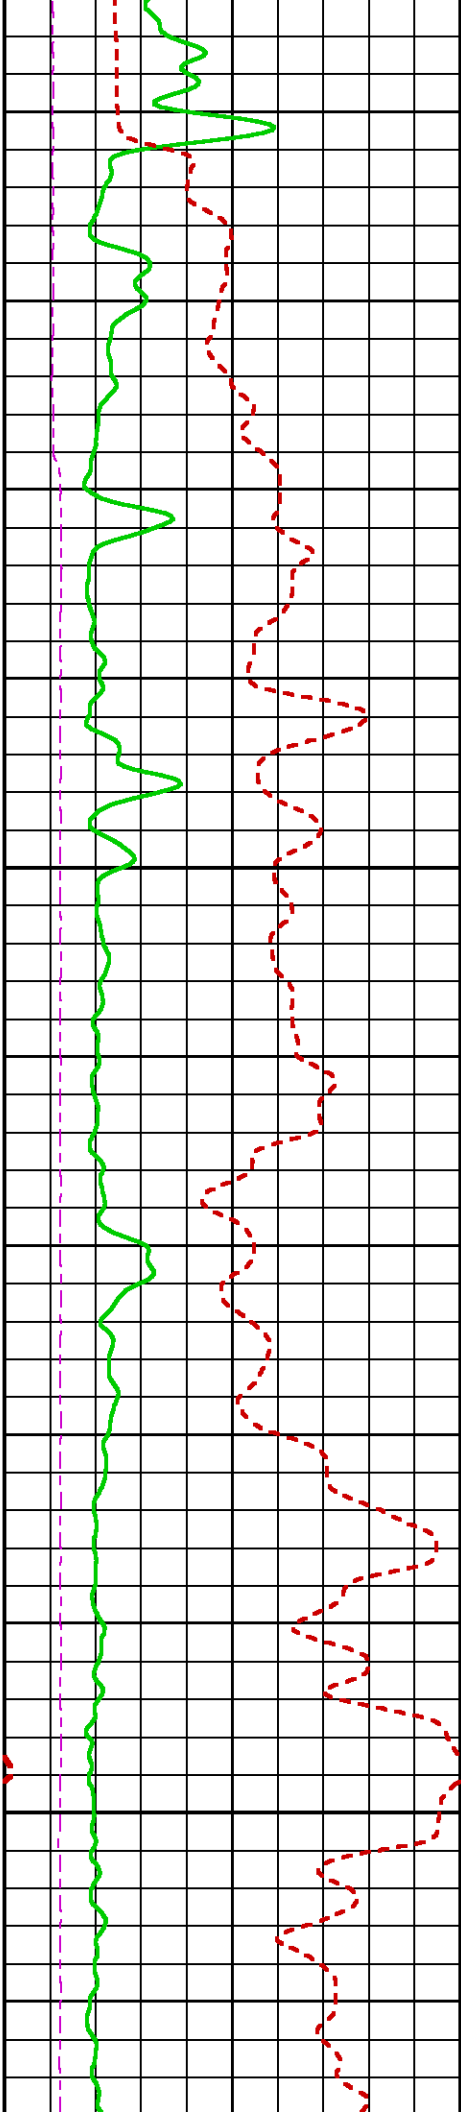

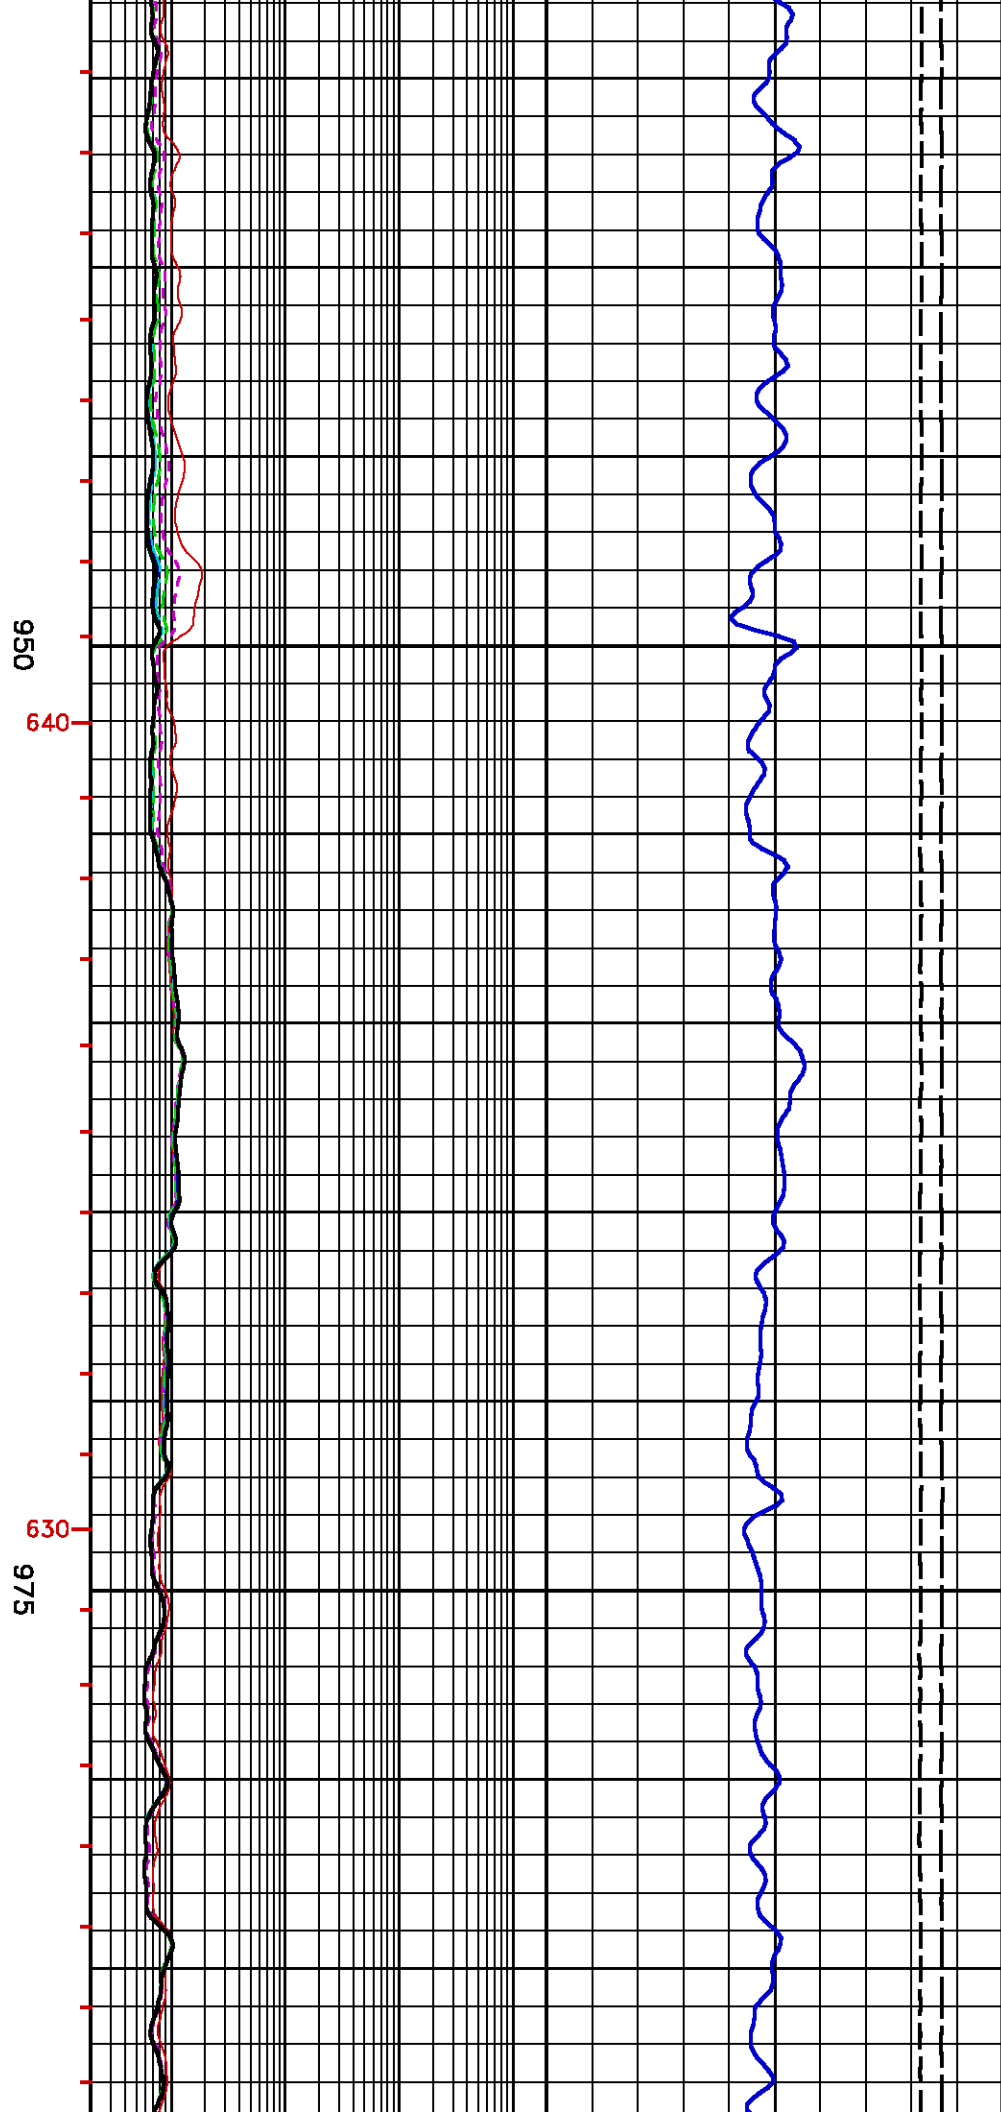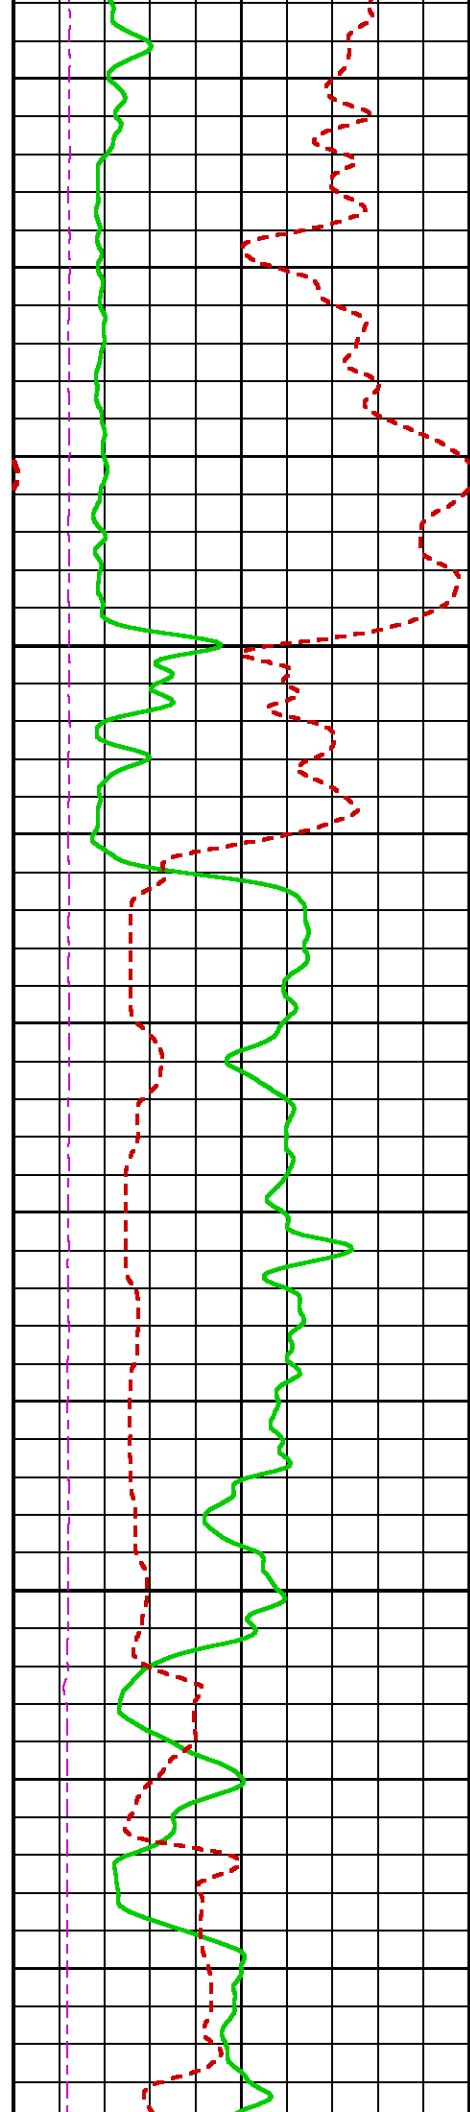

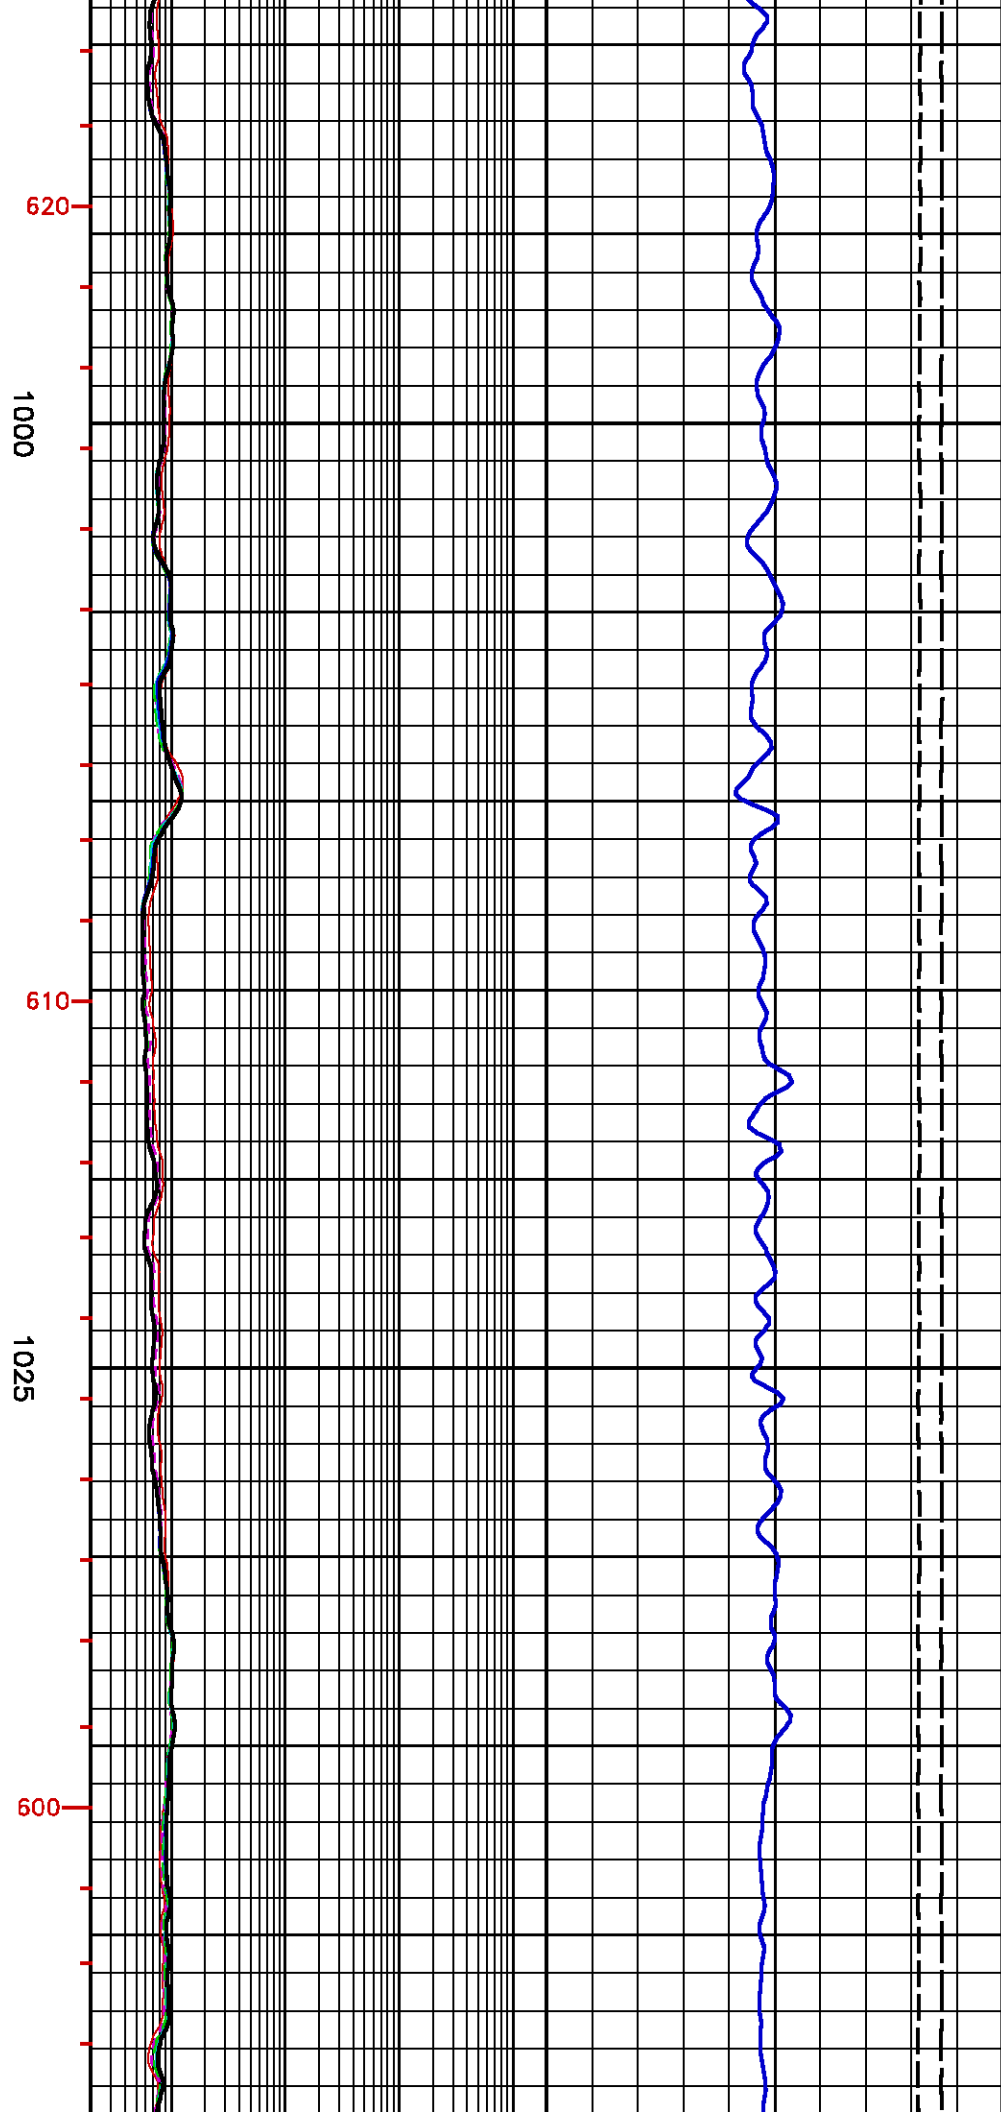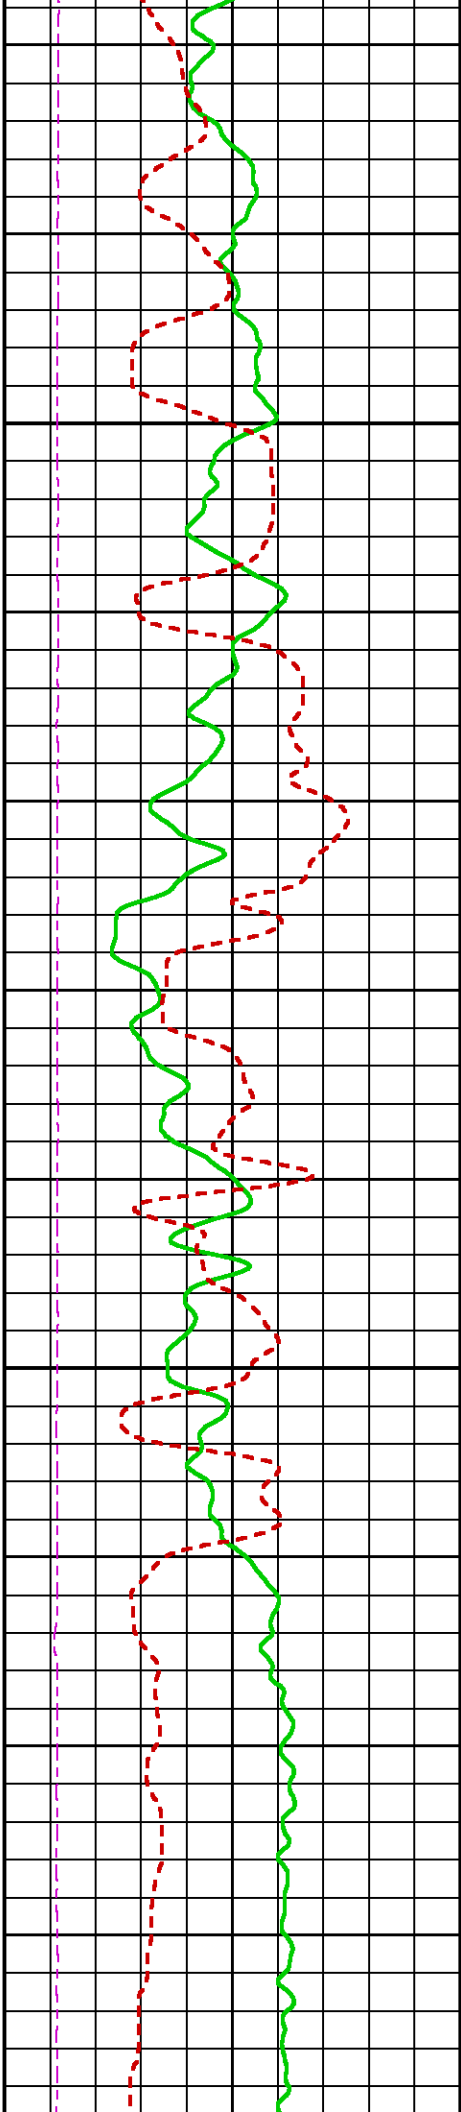


1050



590

1075

580

1100
570

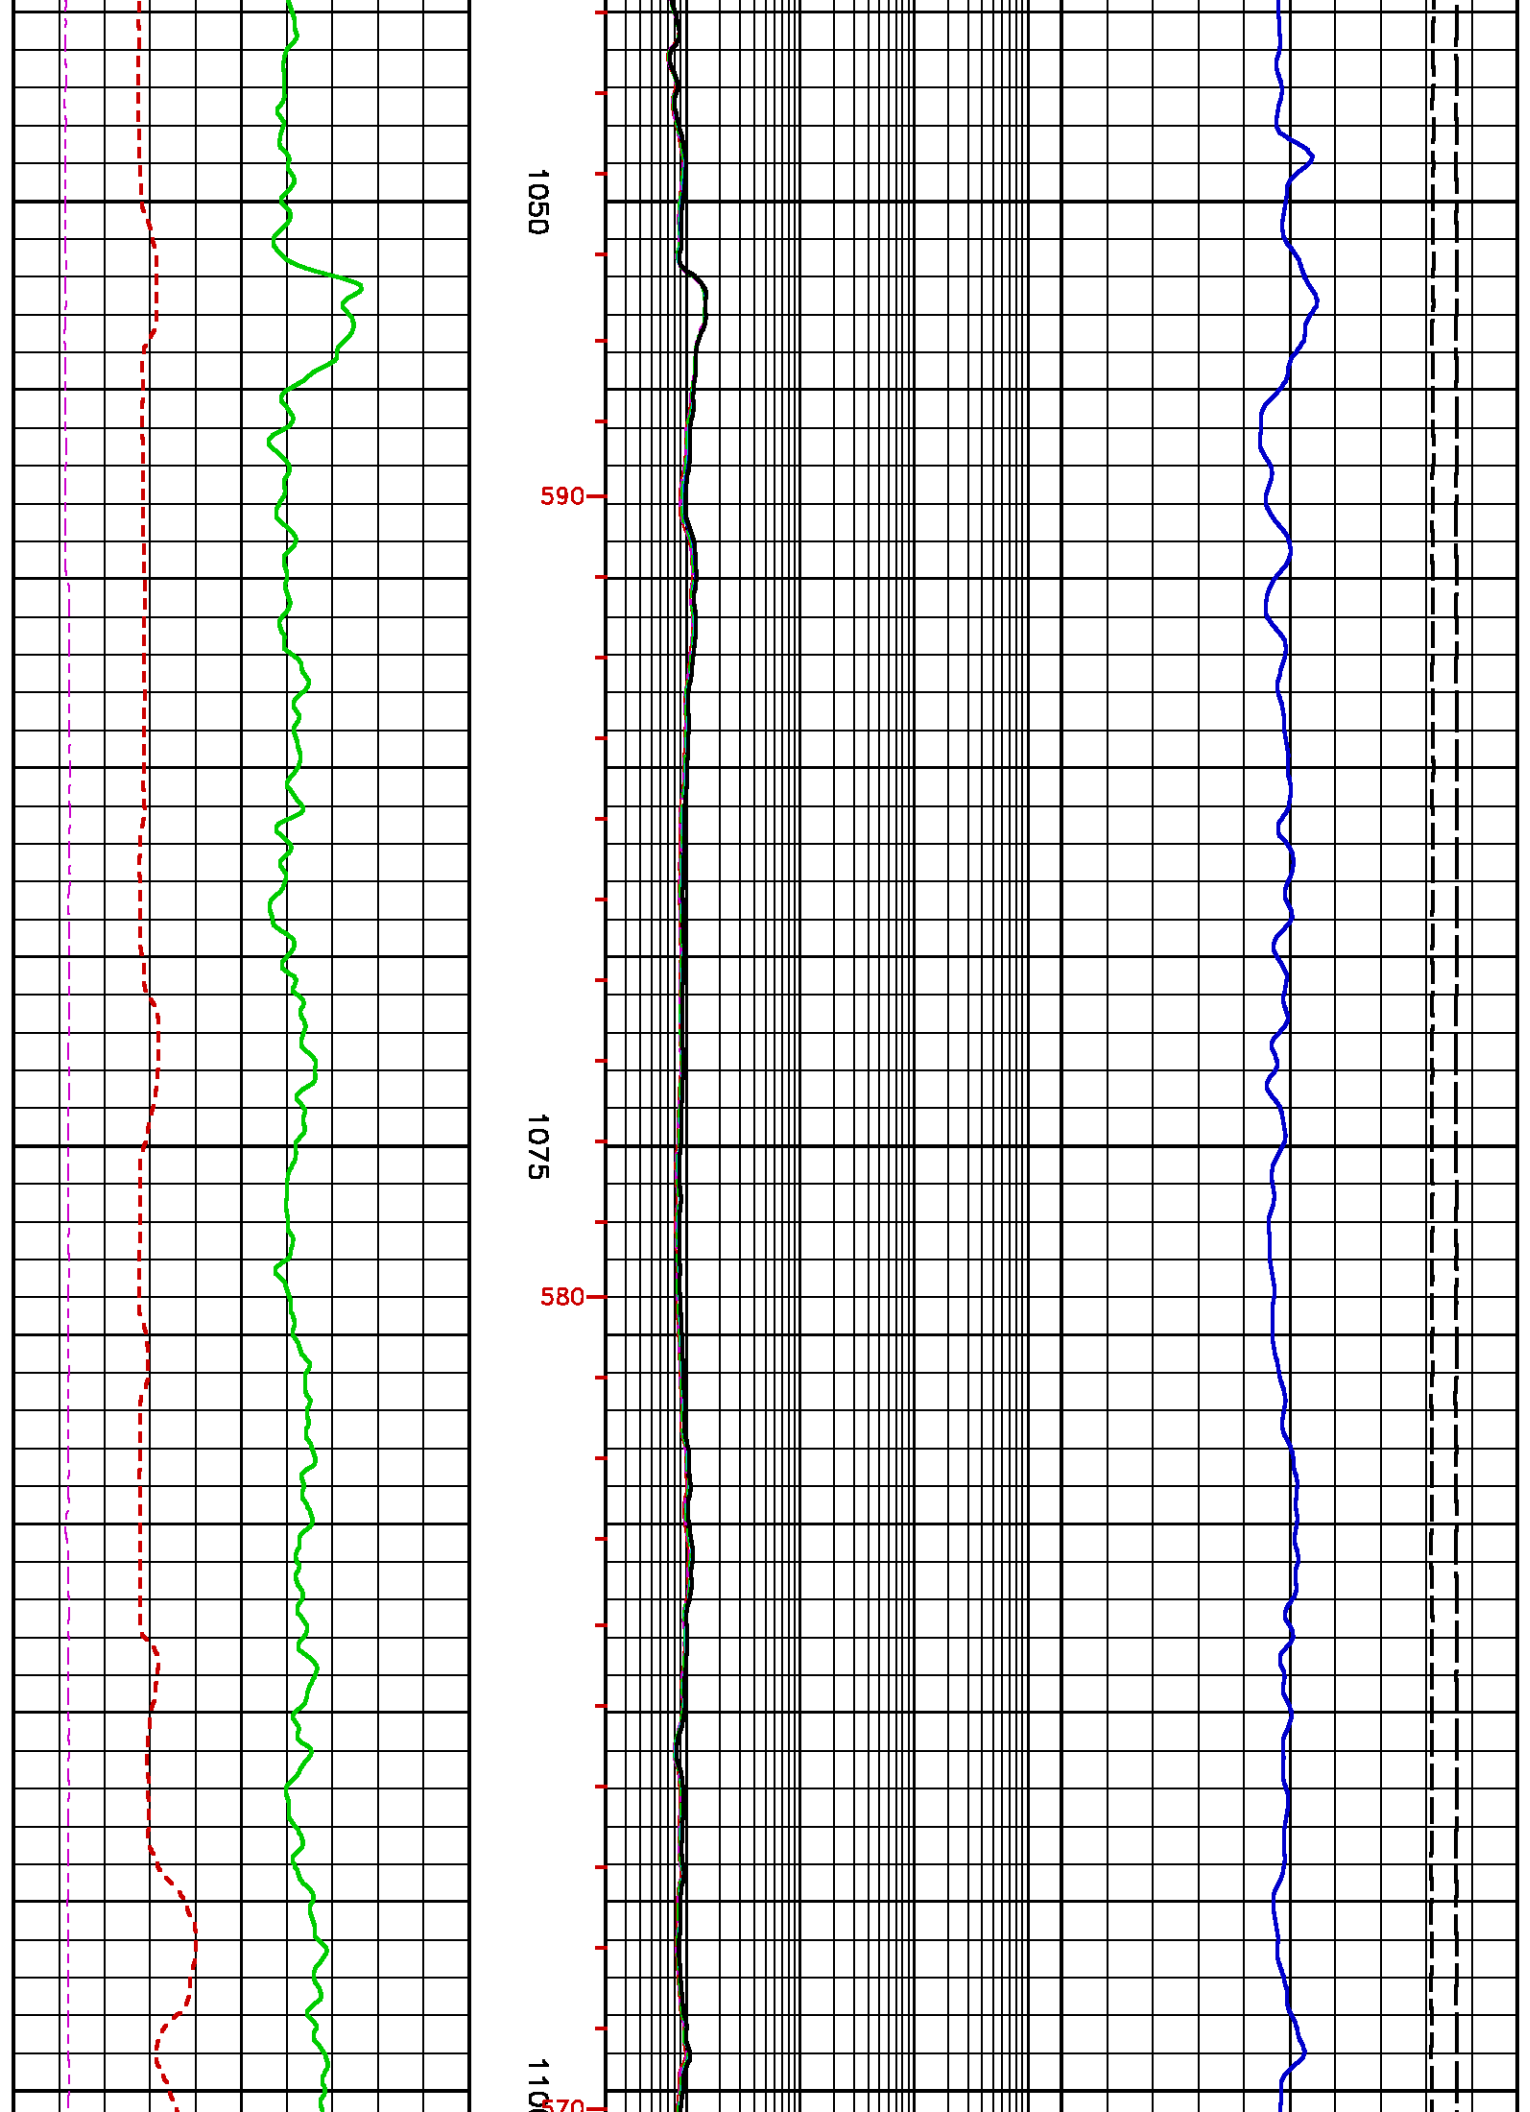

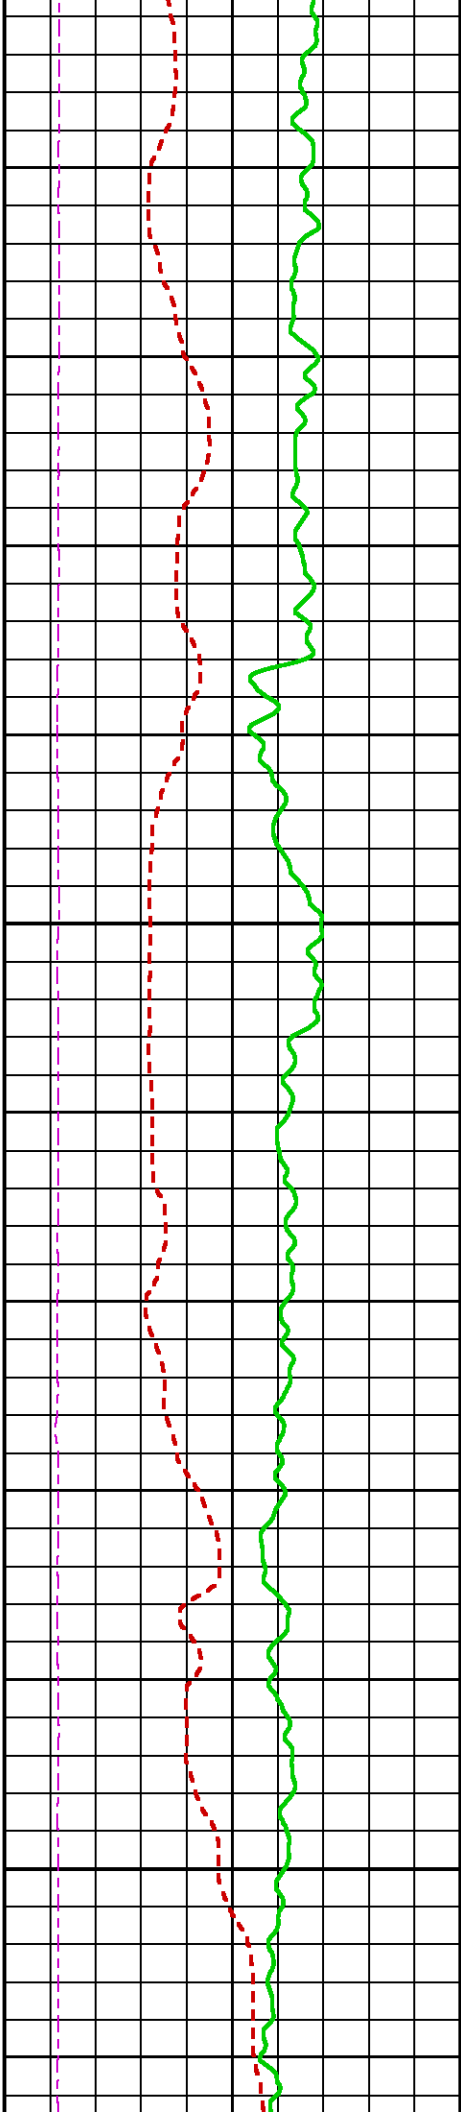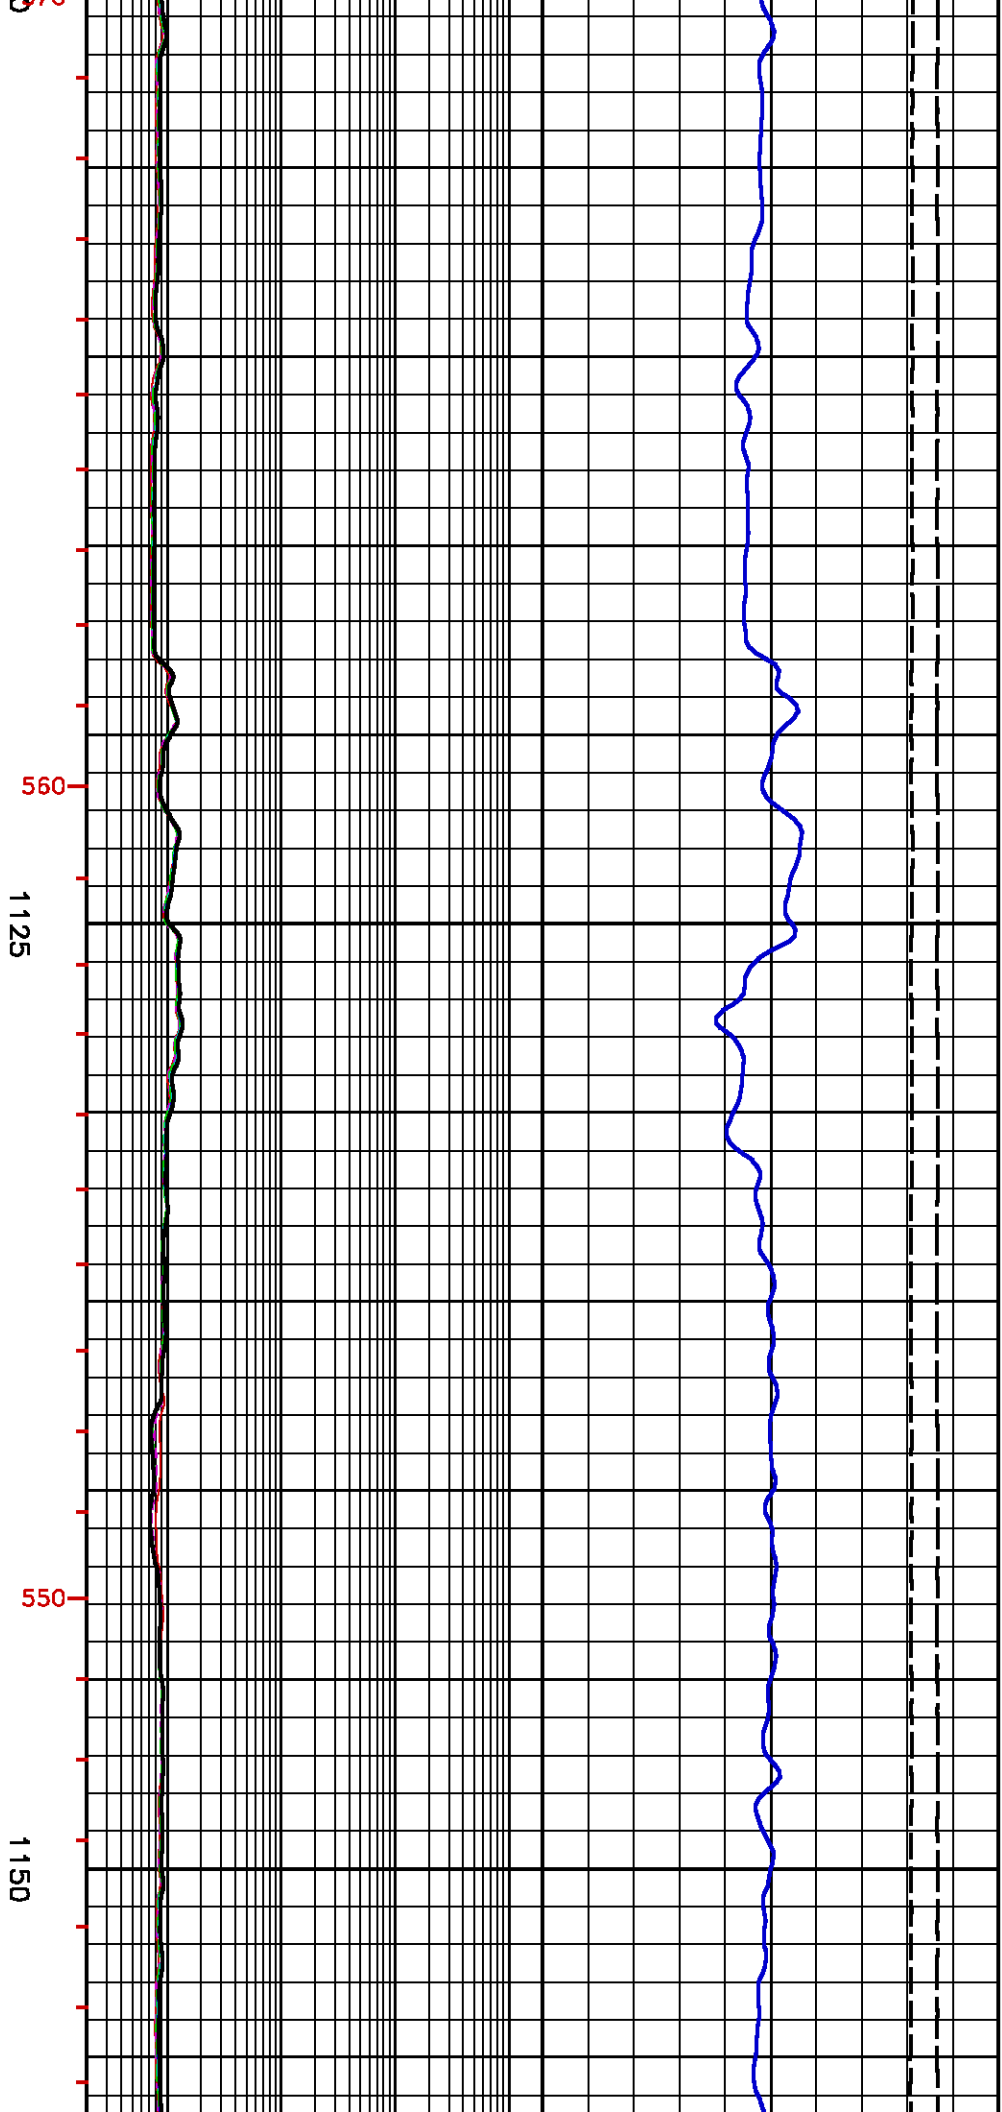


540



1175



530


1200

520

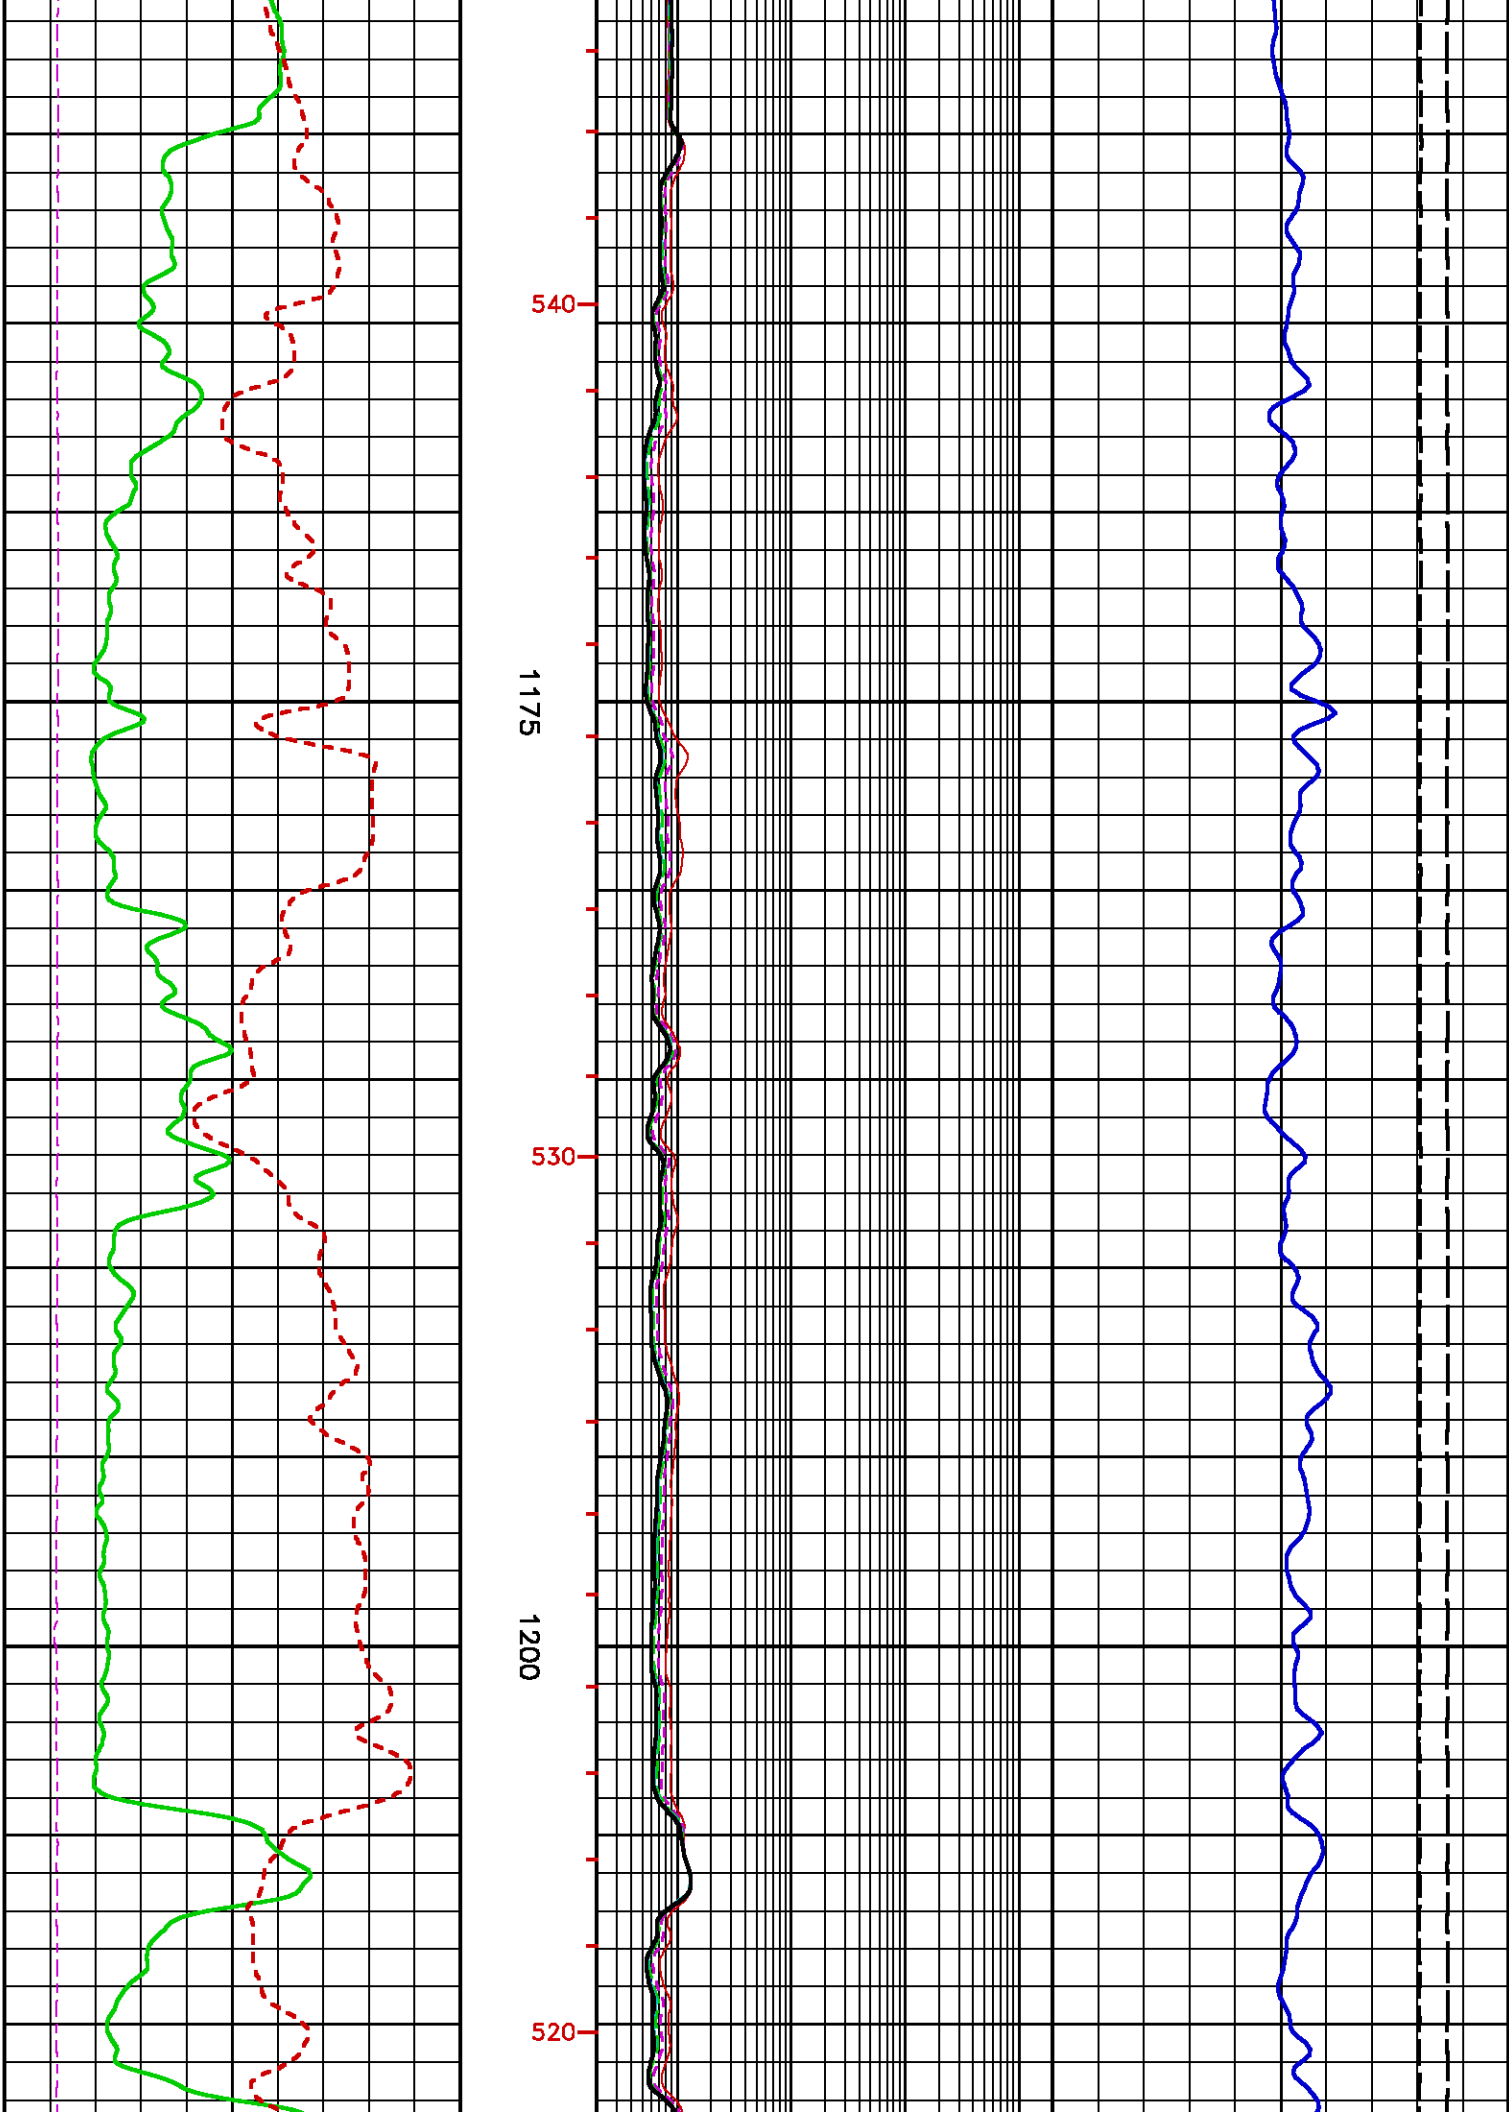


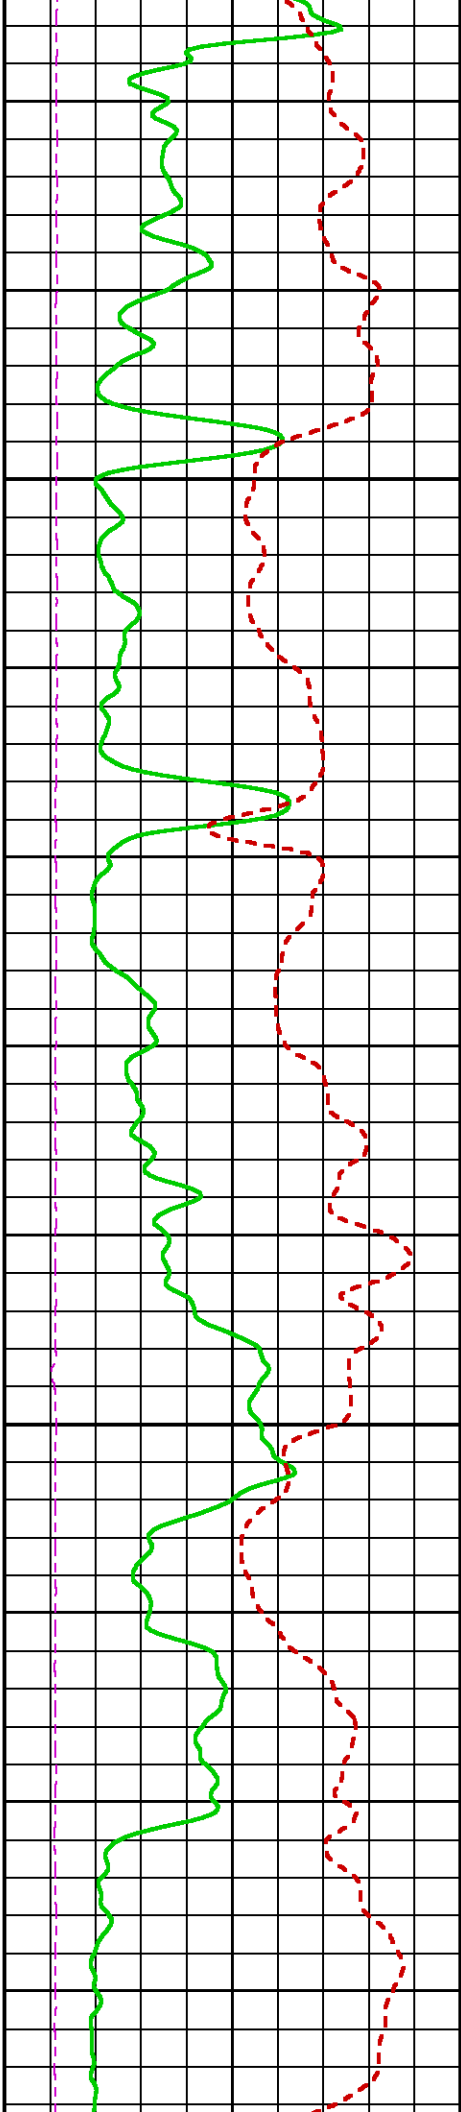
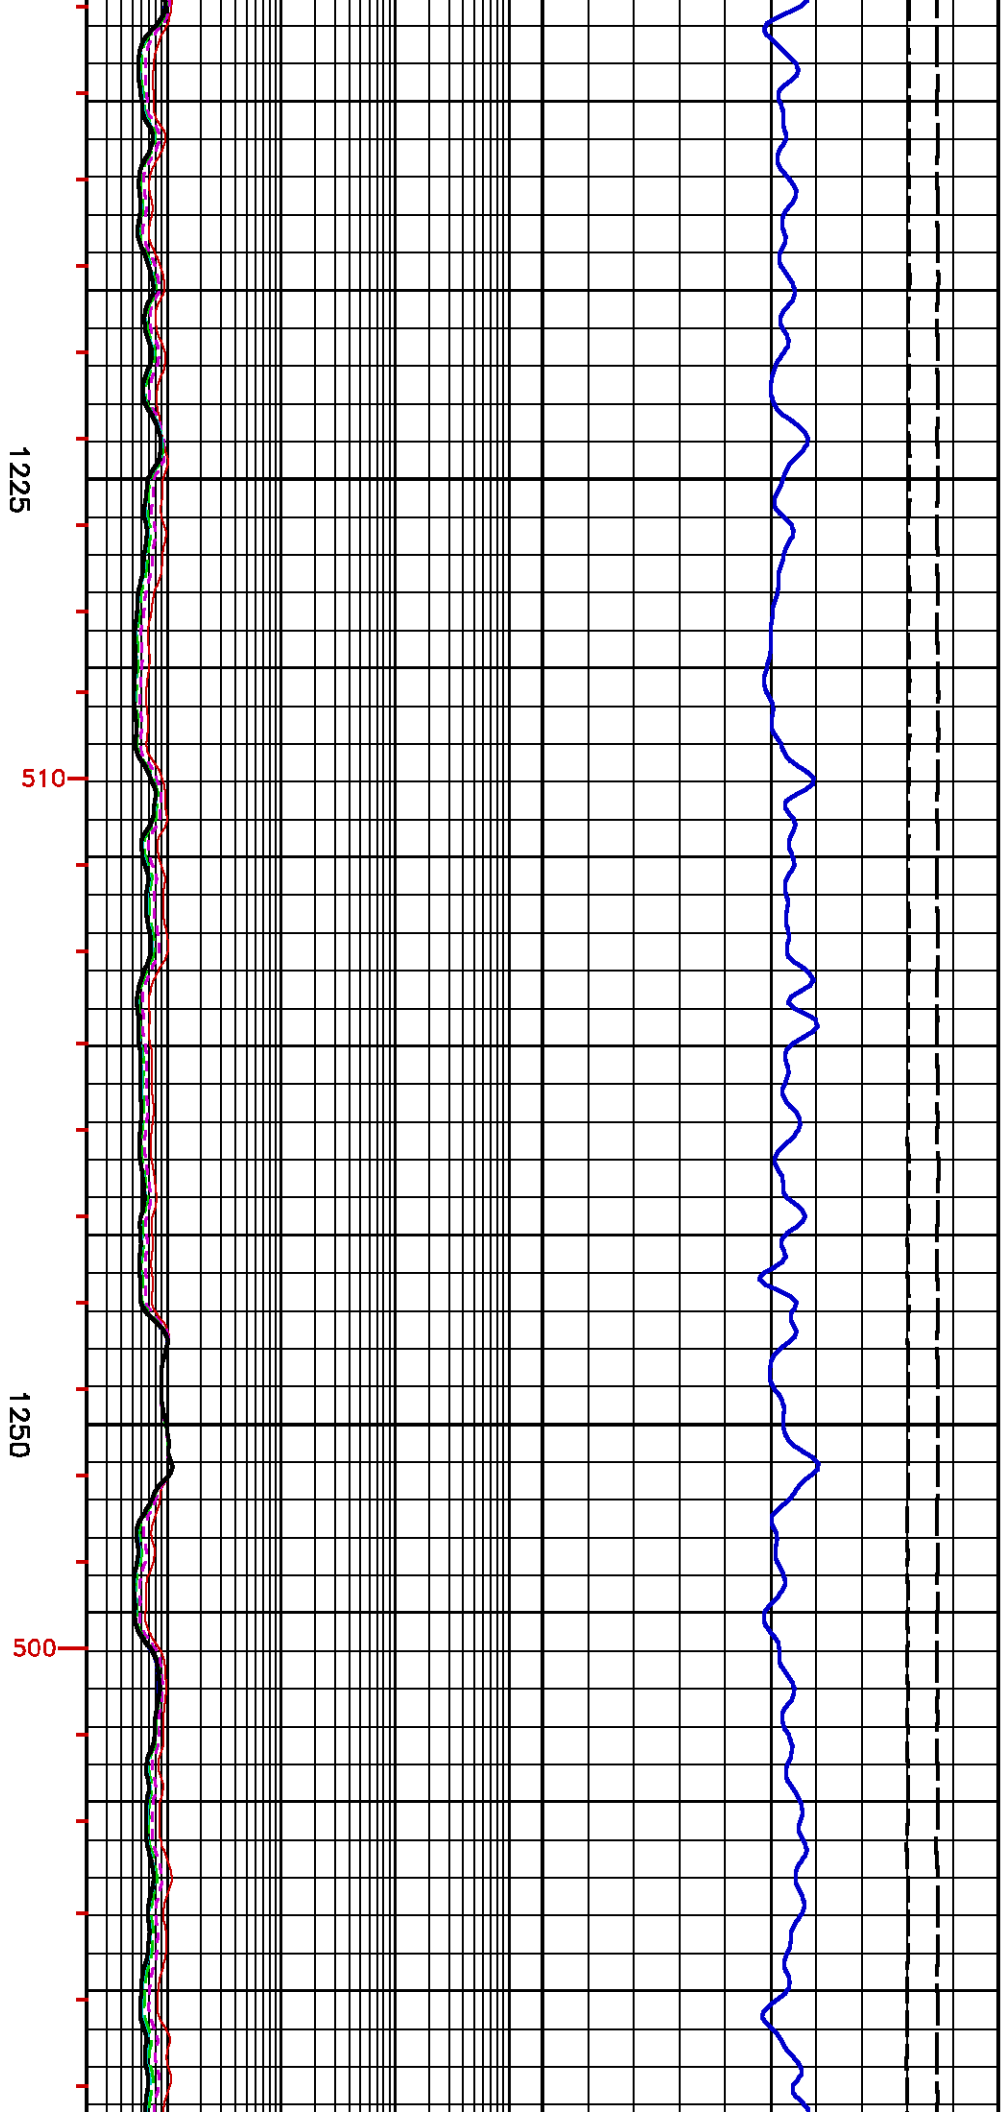


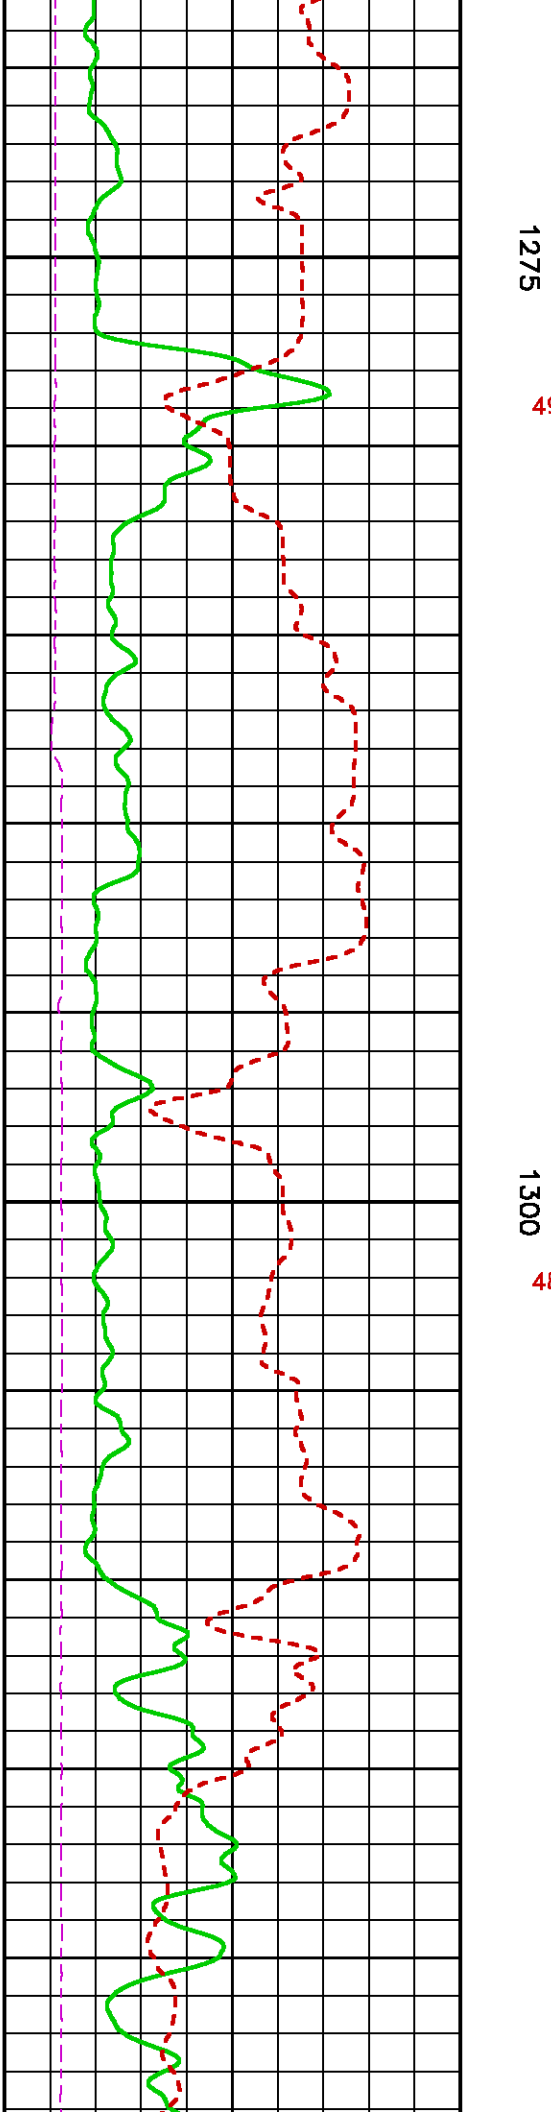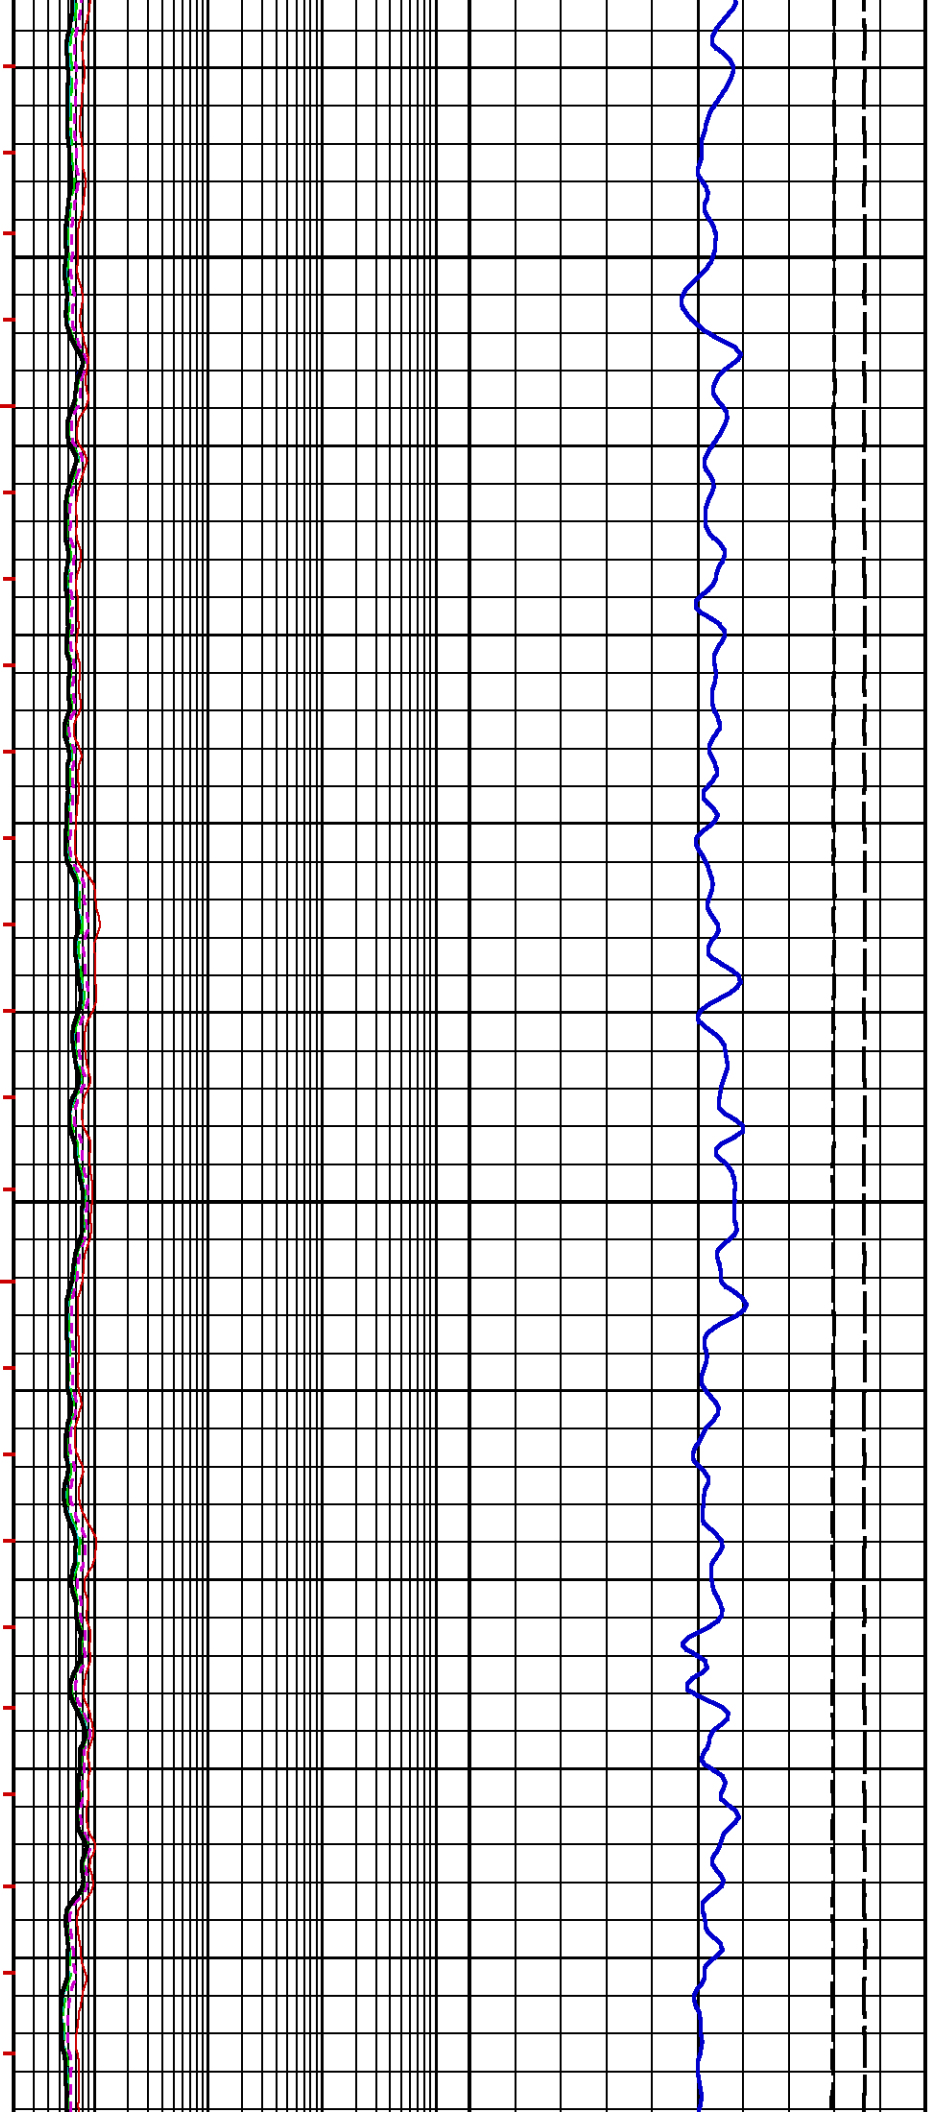

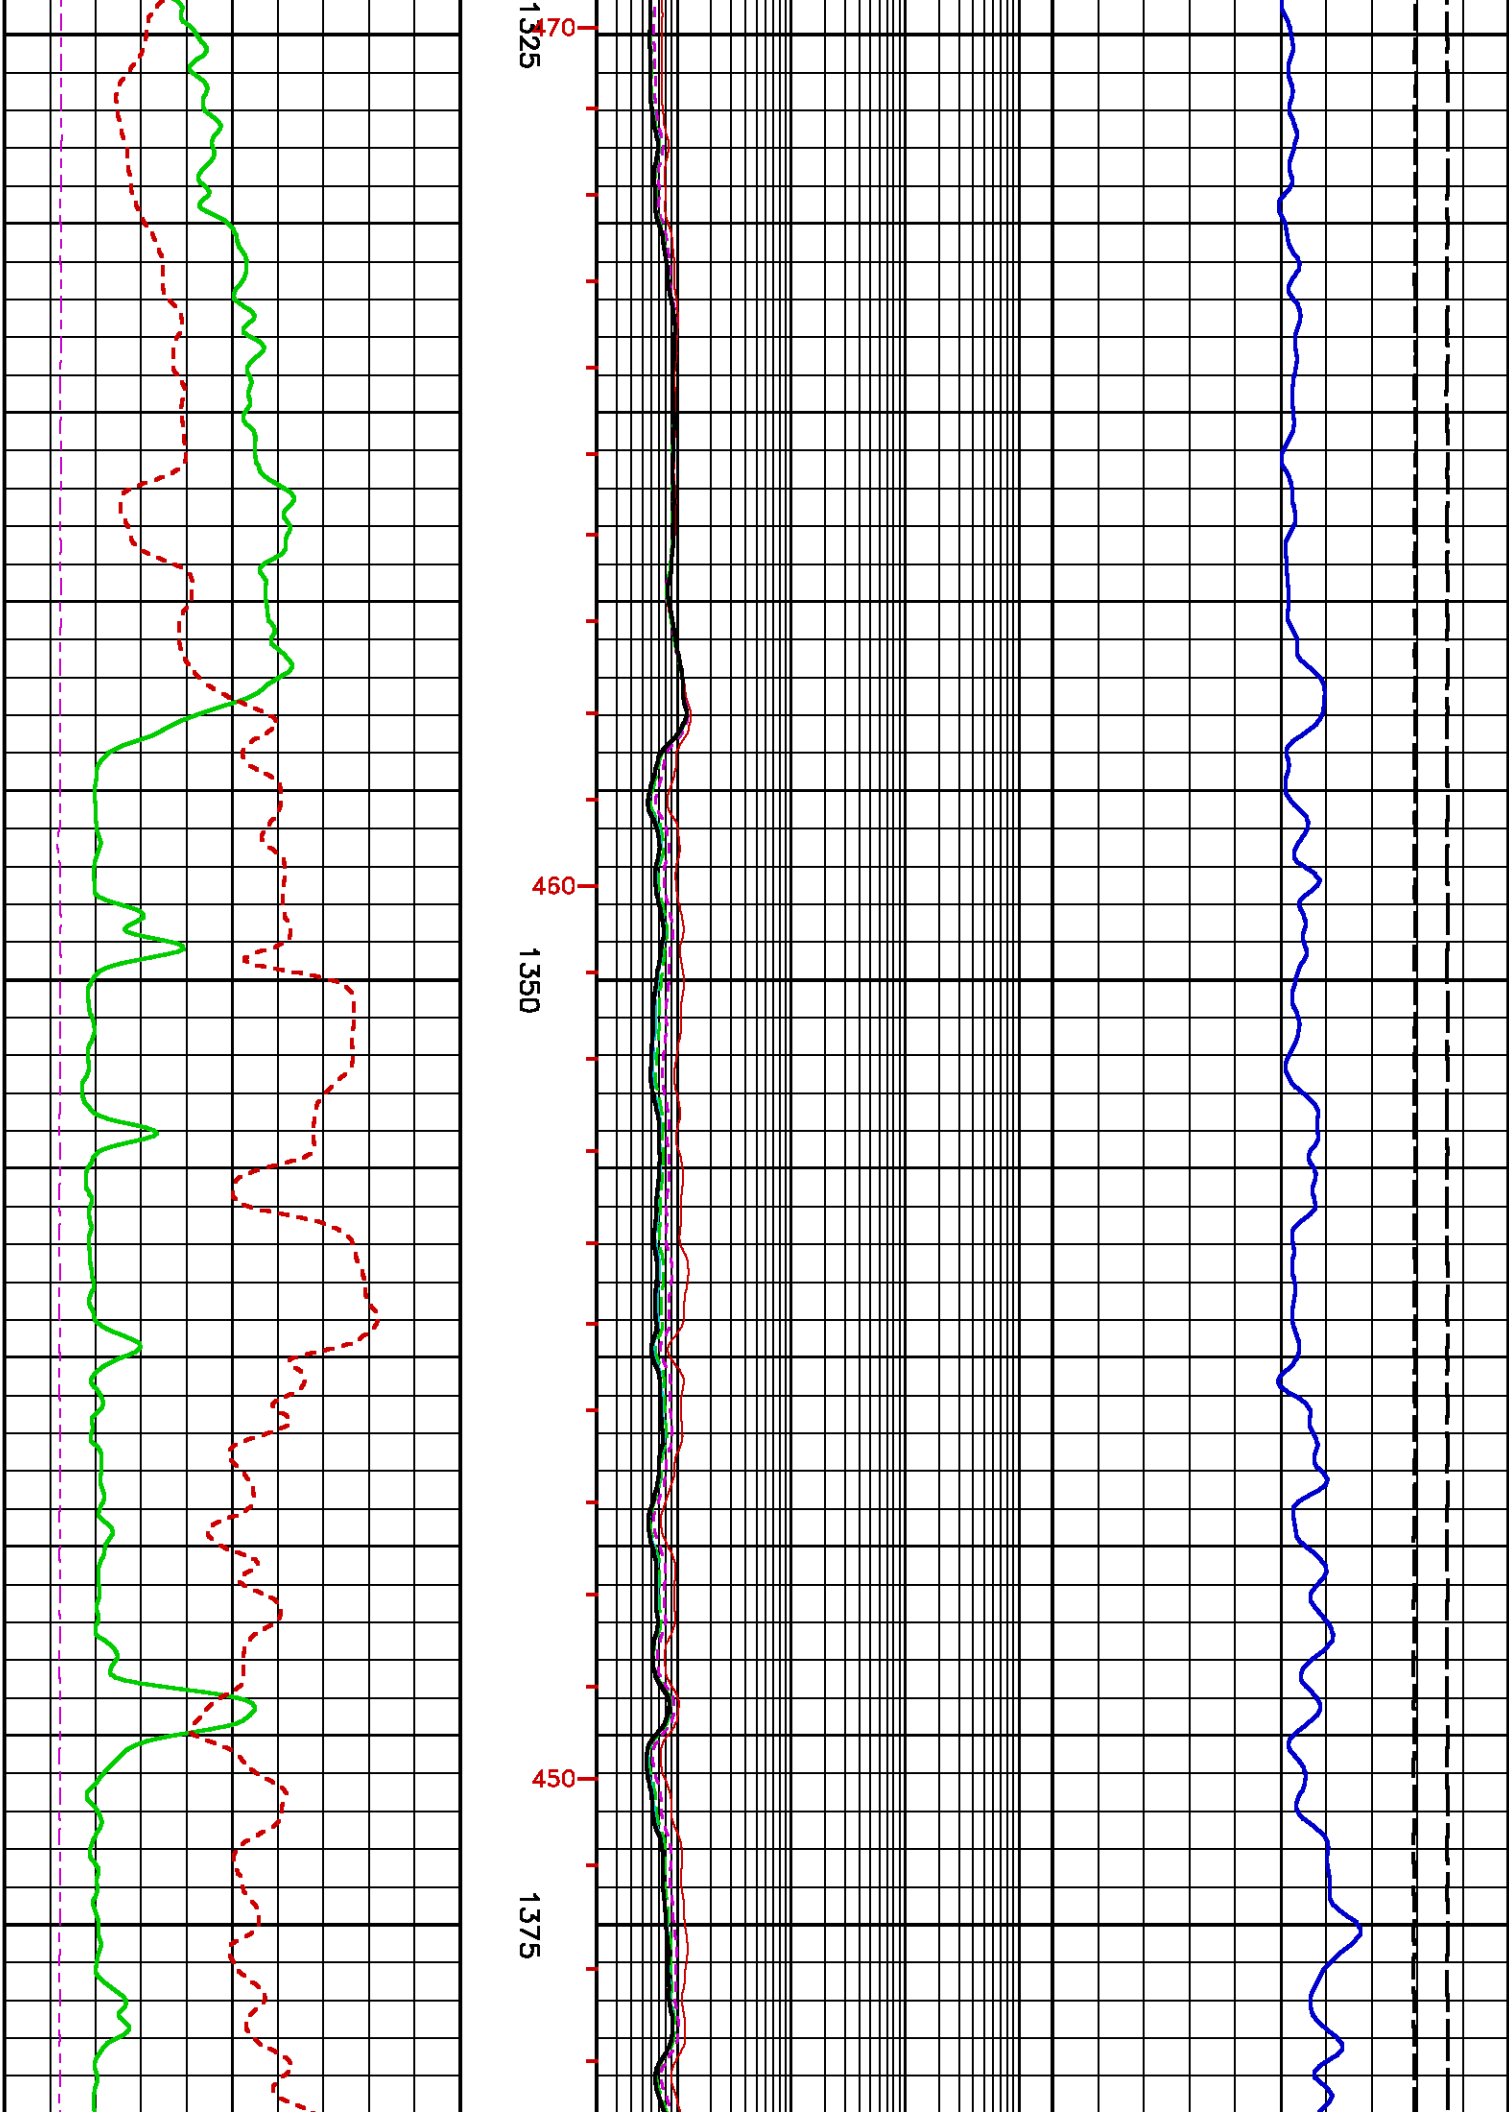

440 1400 430 1425

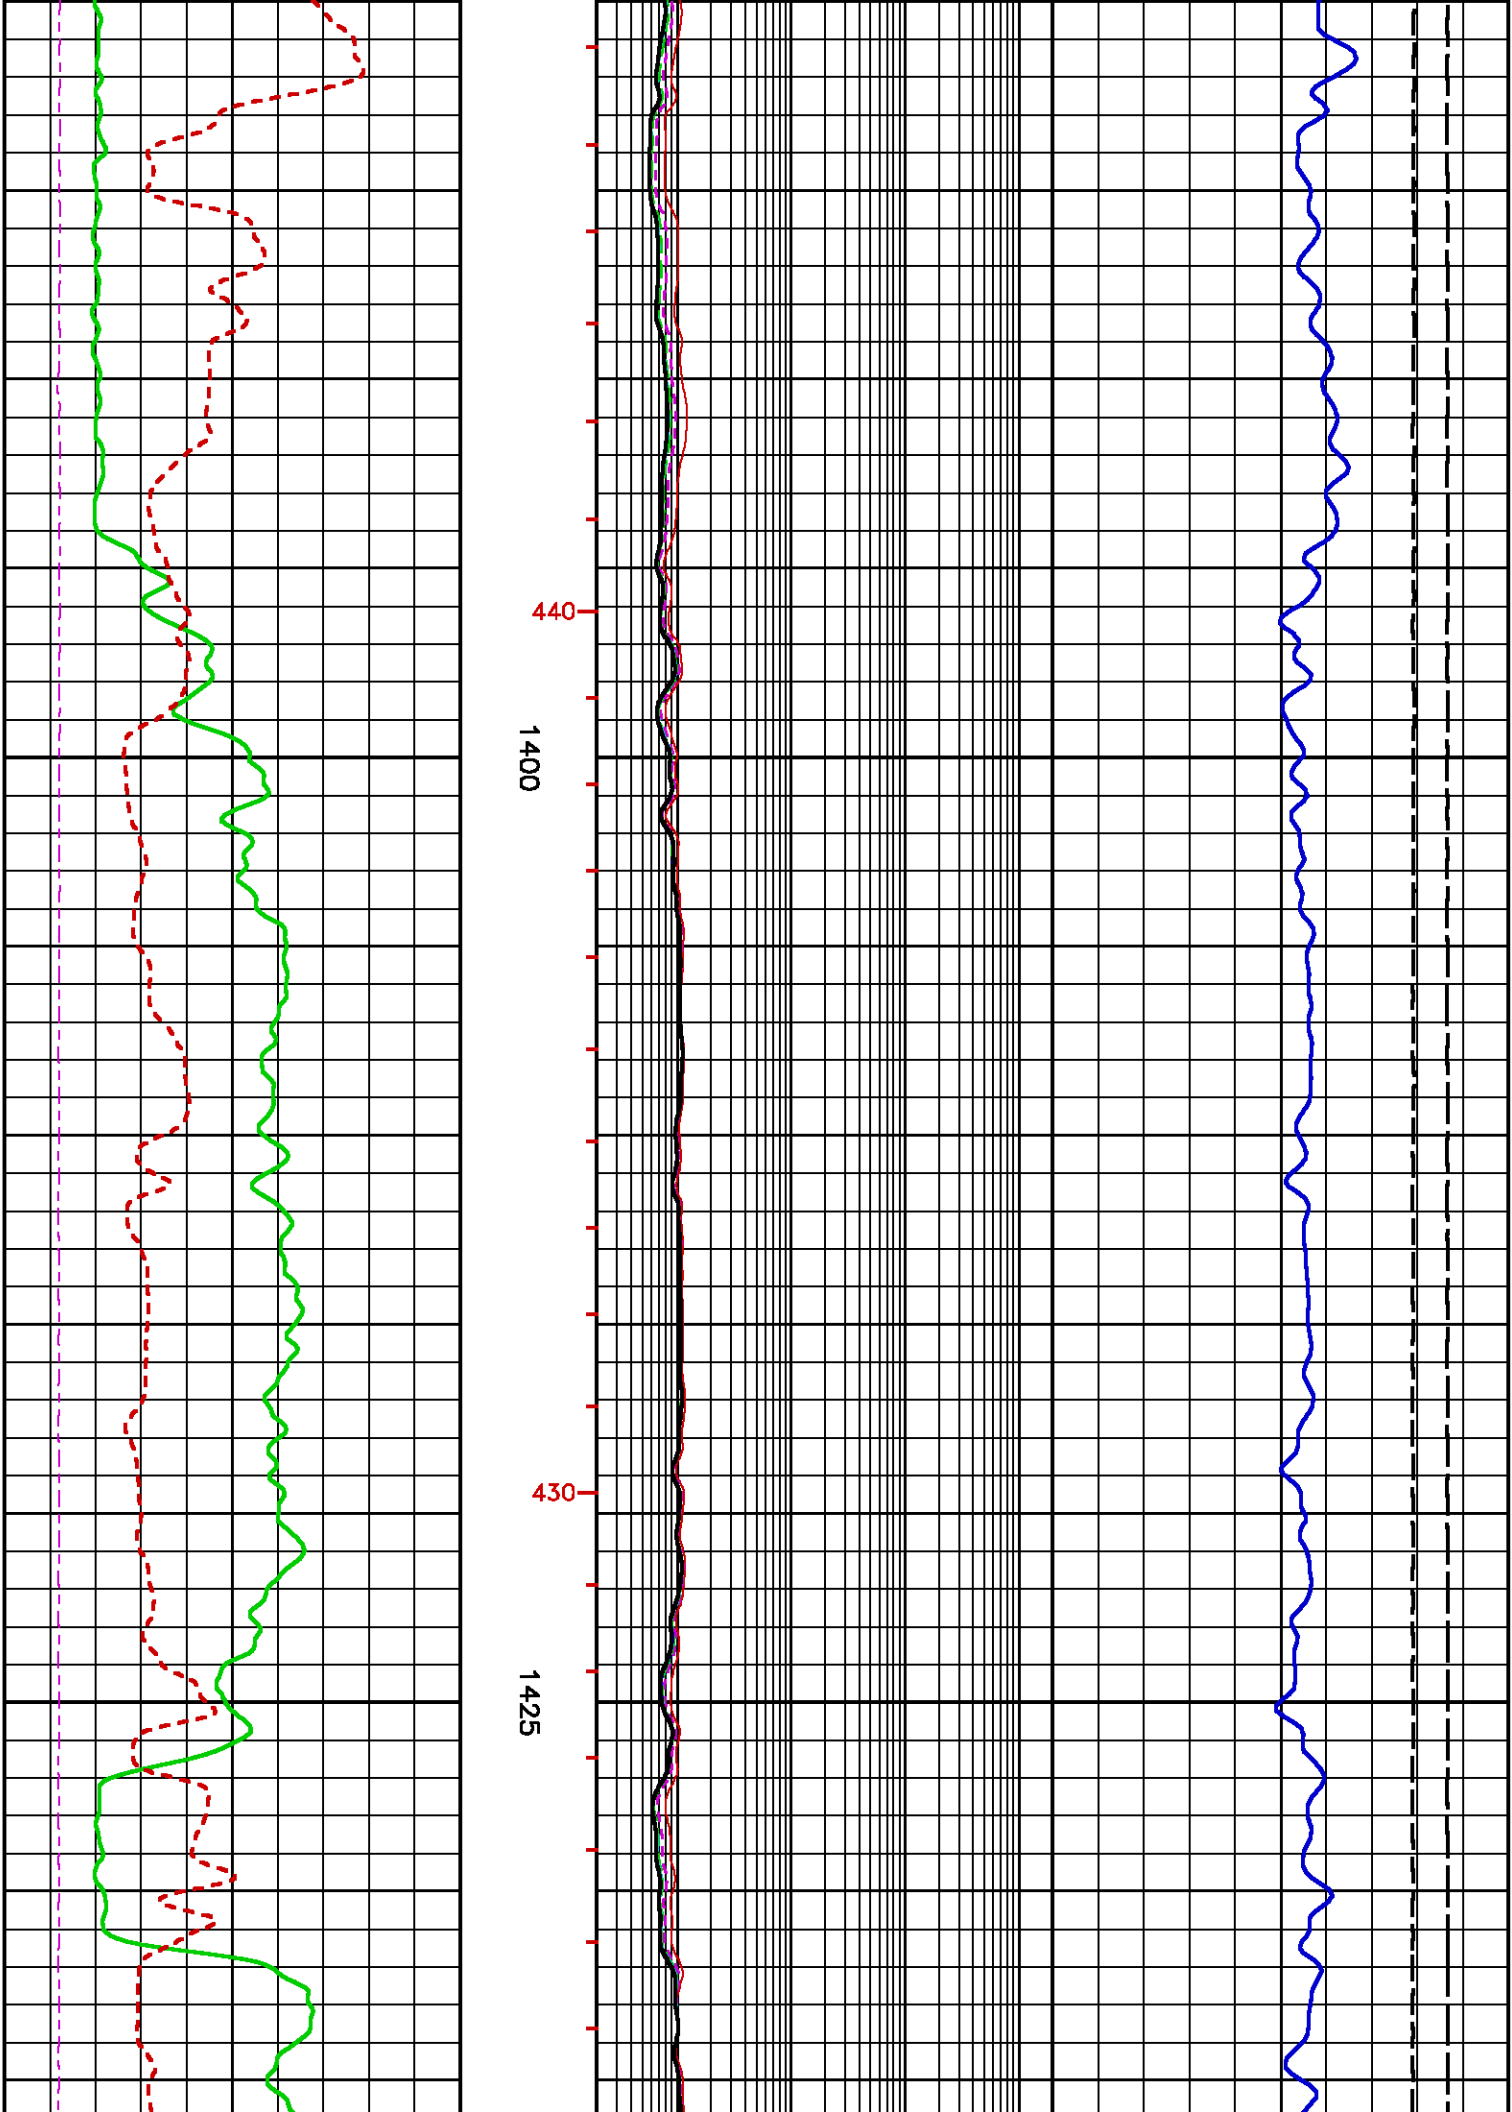

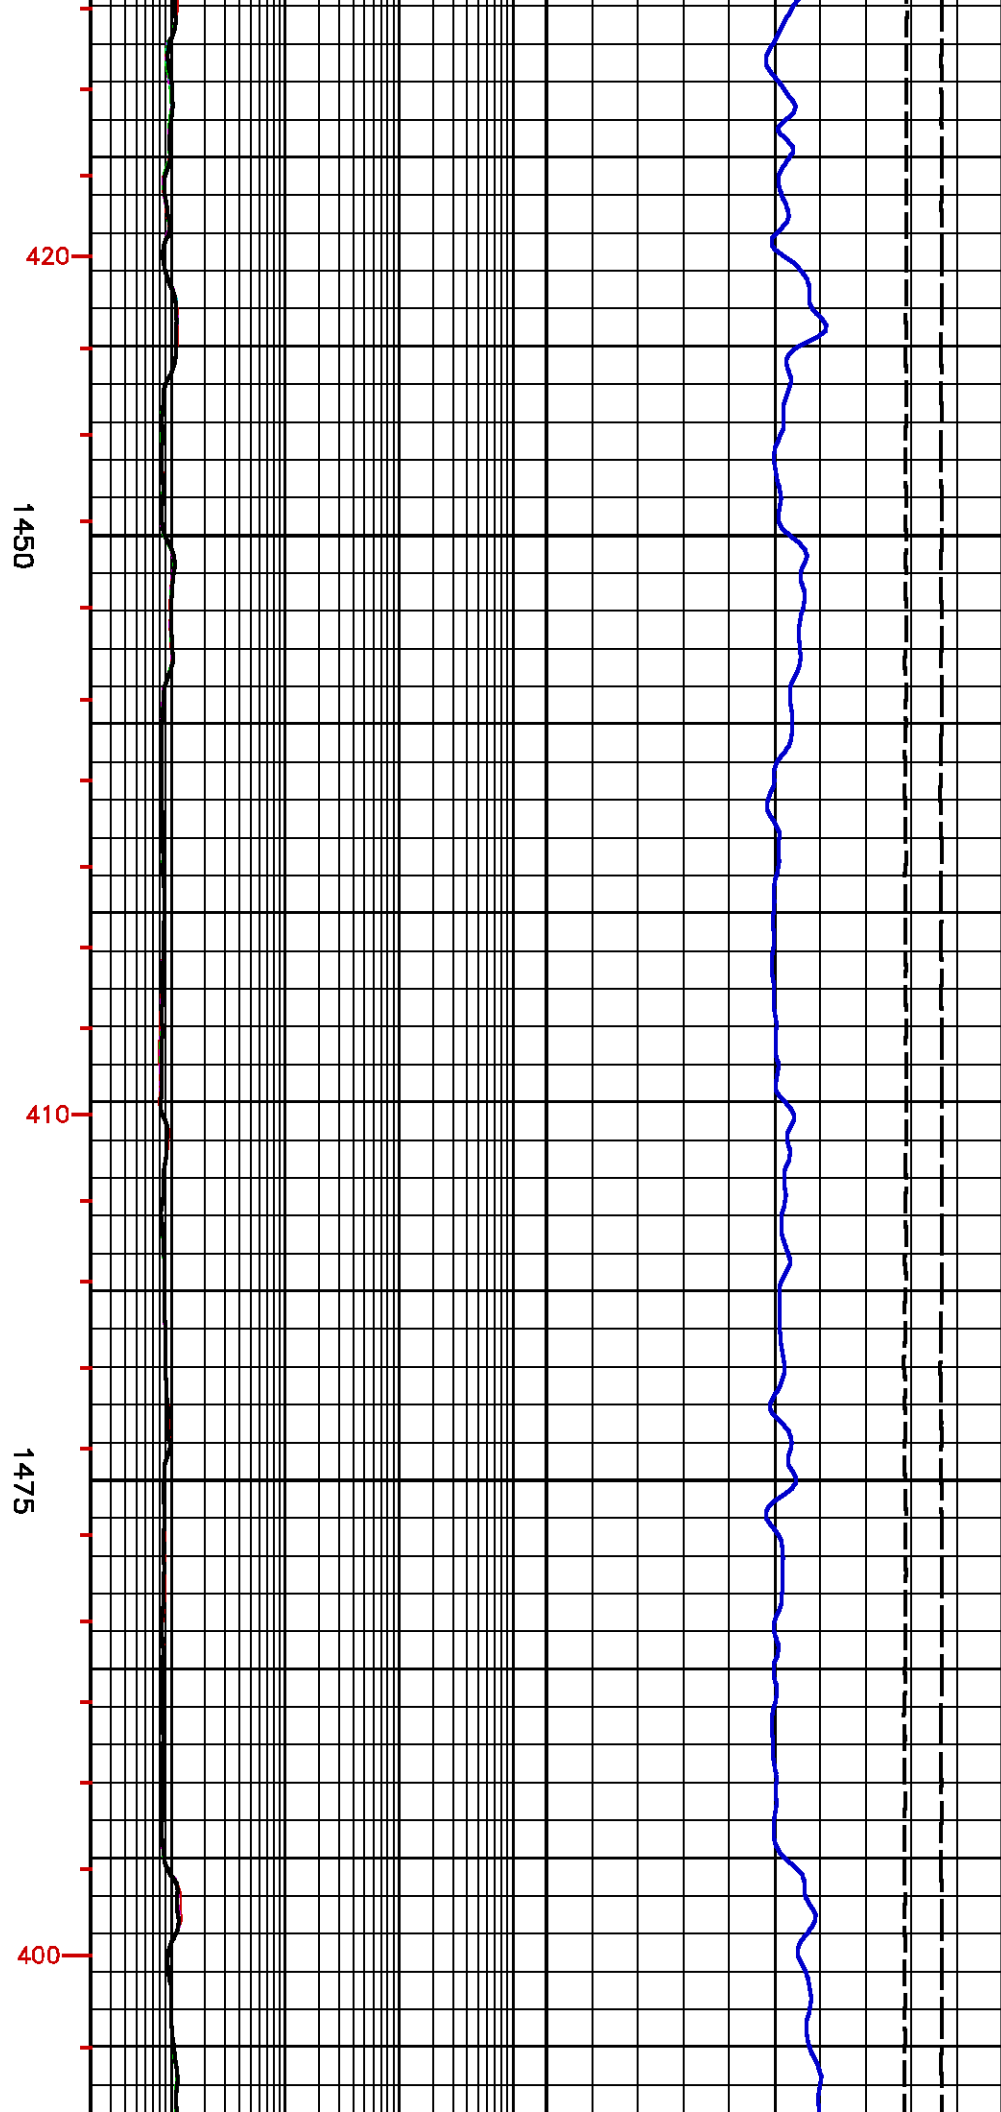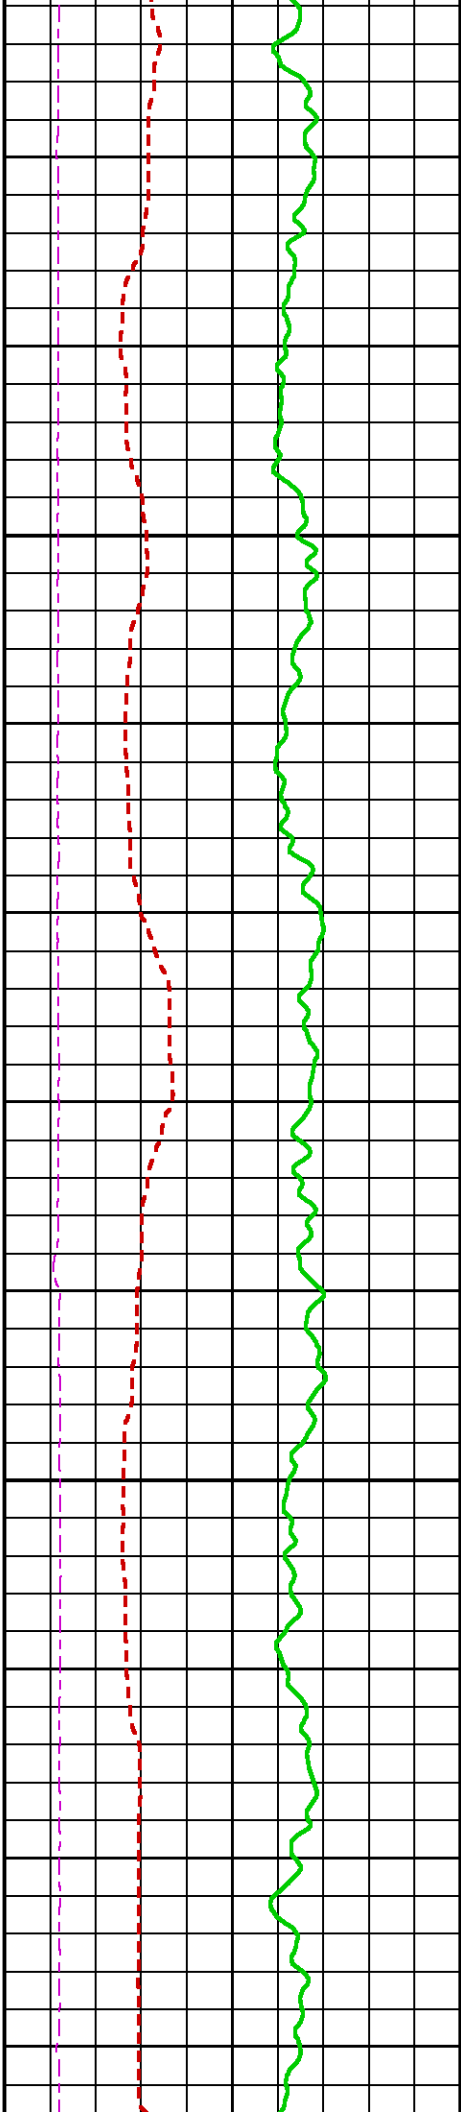



1500


1525

390

380

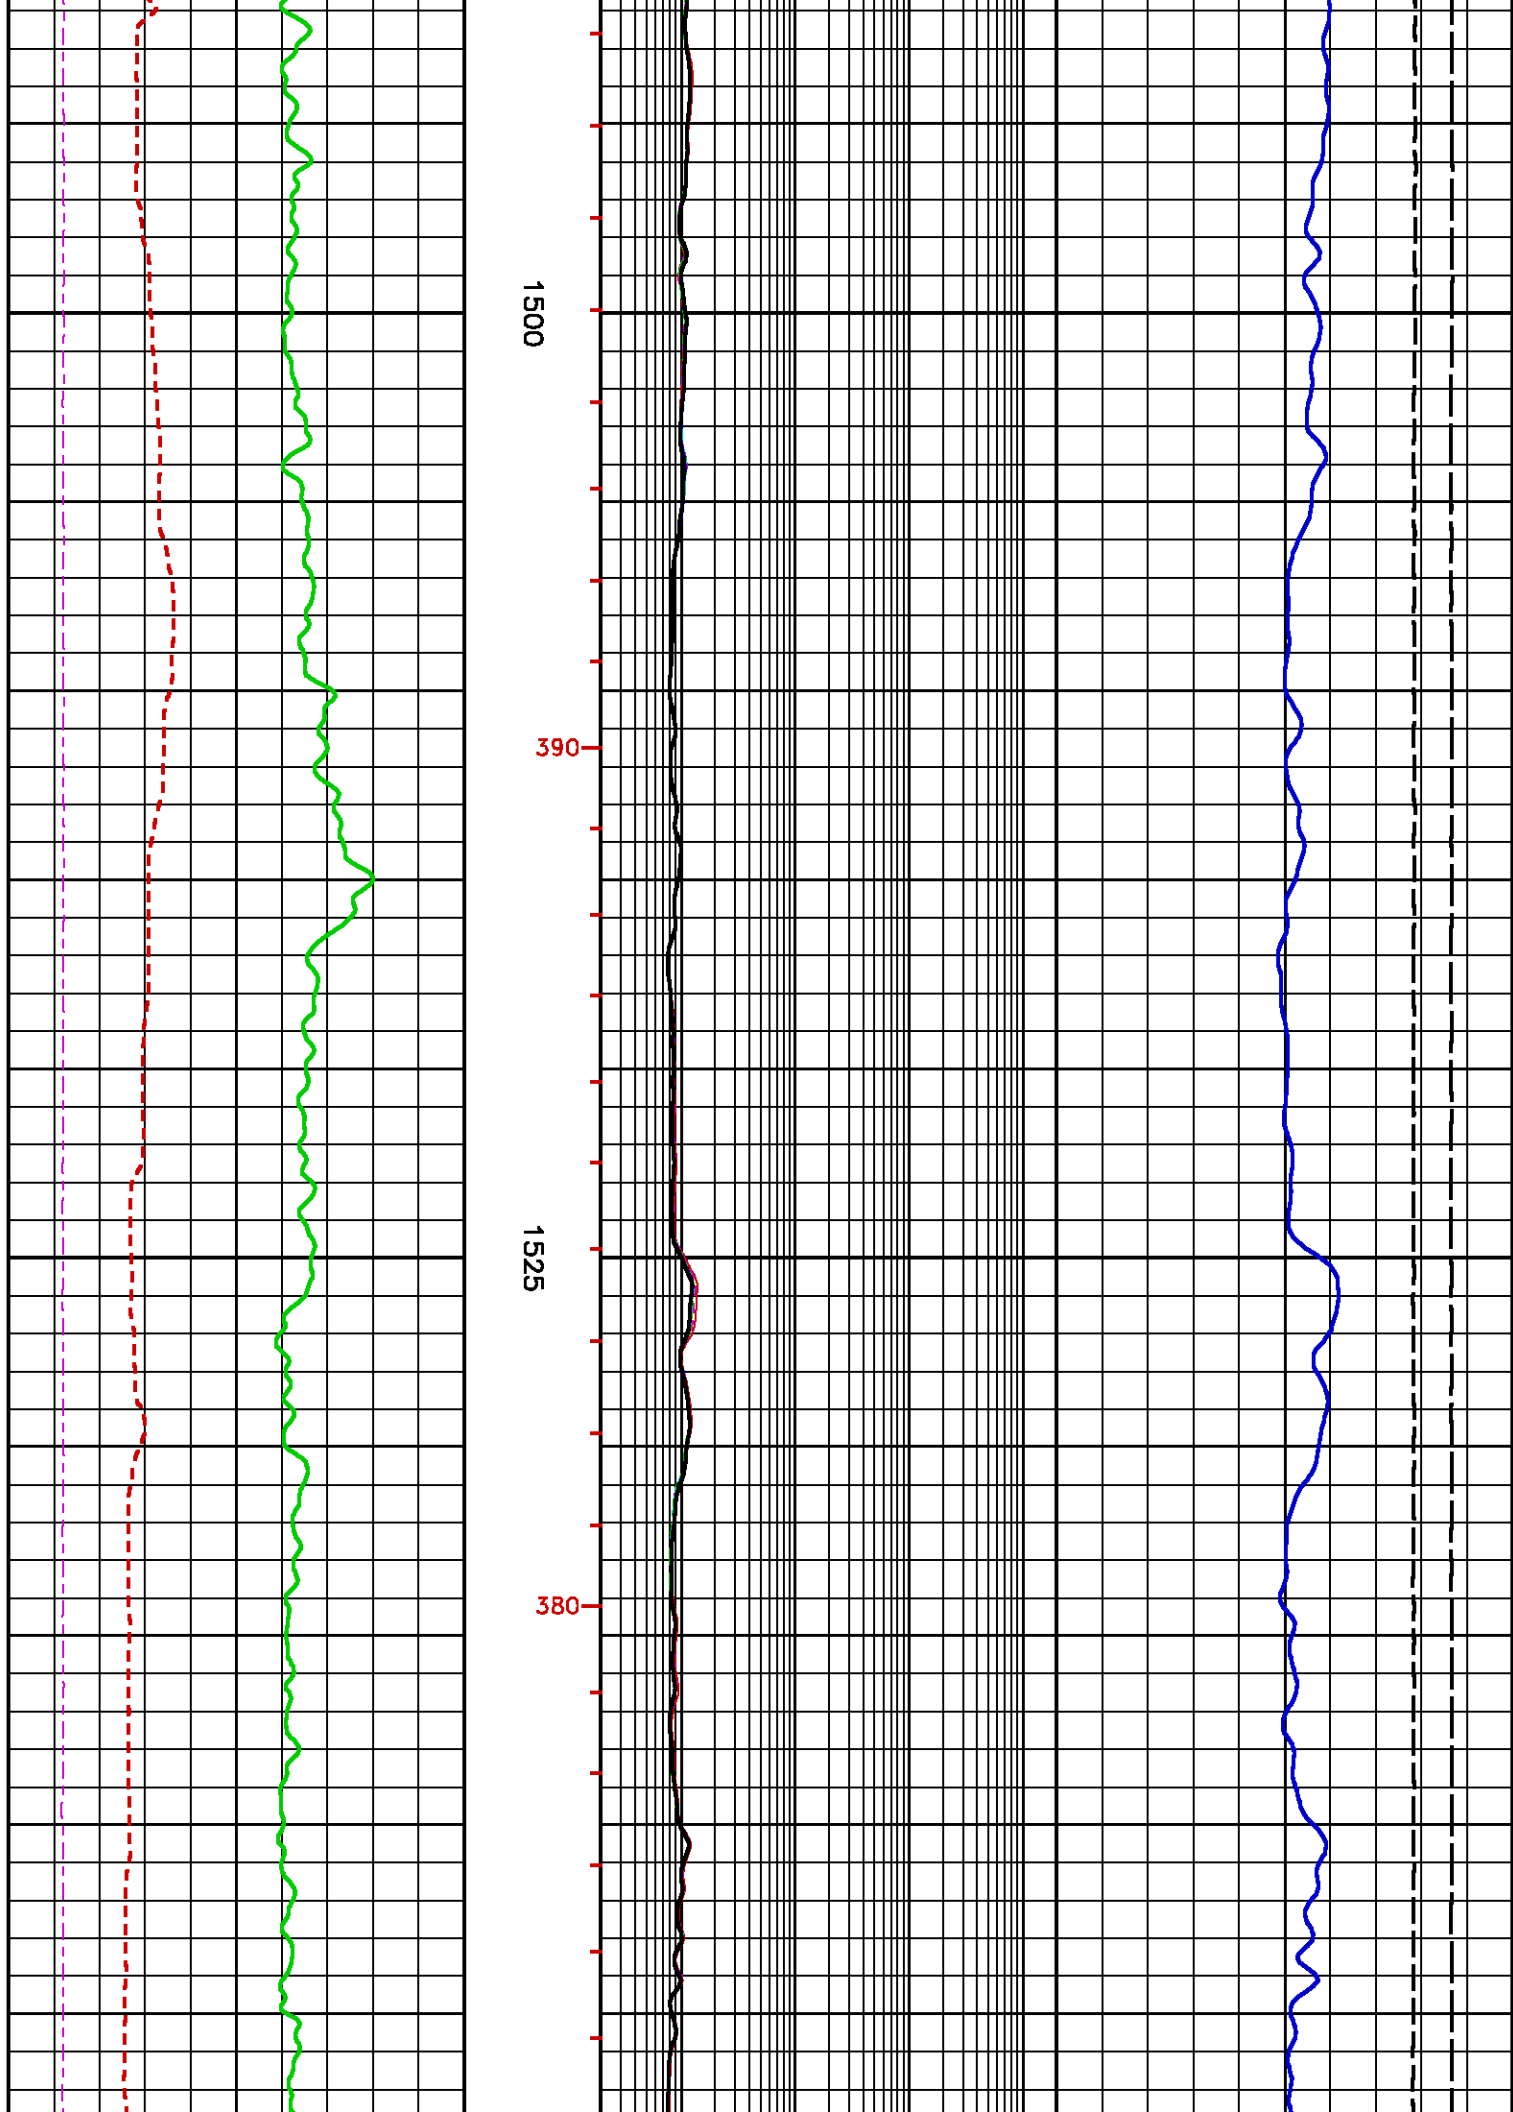

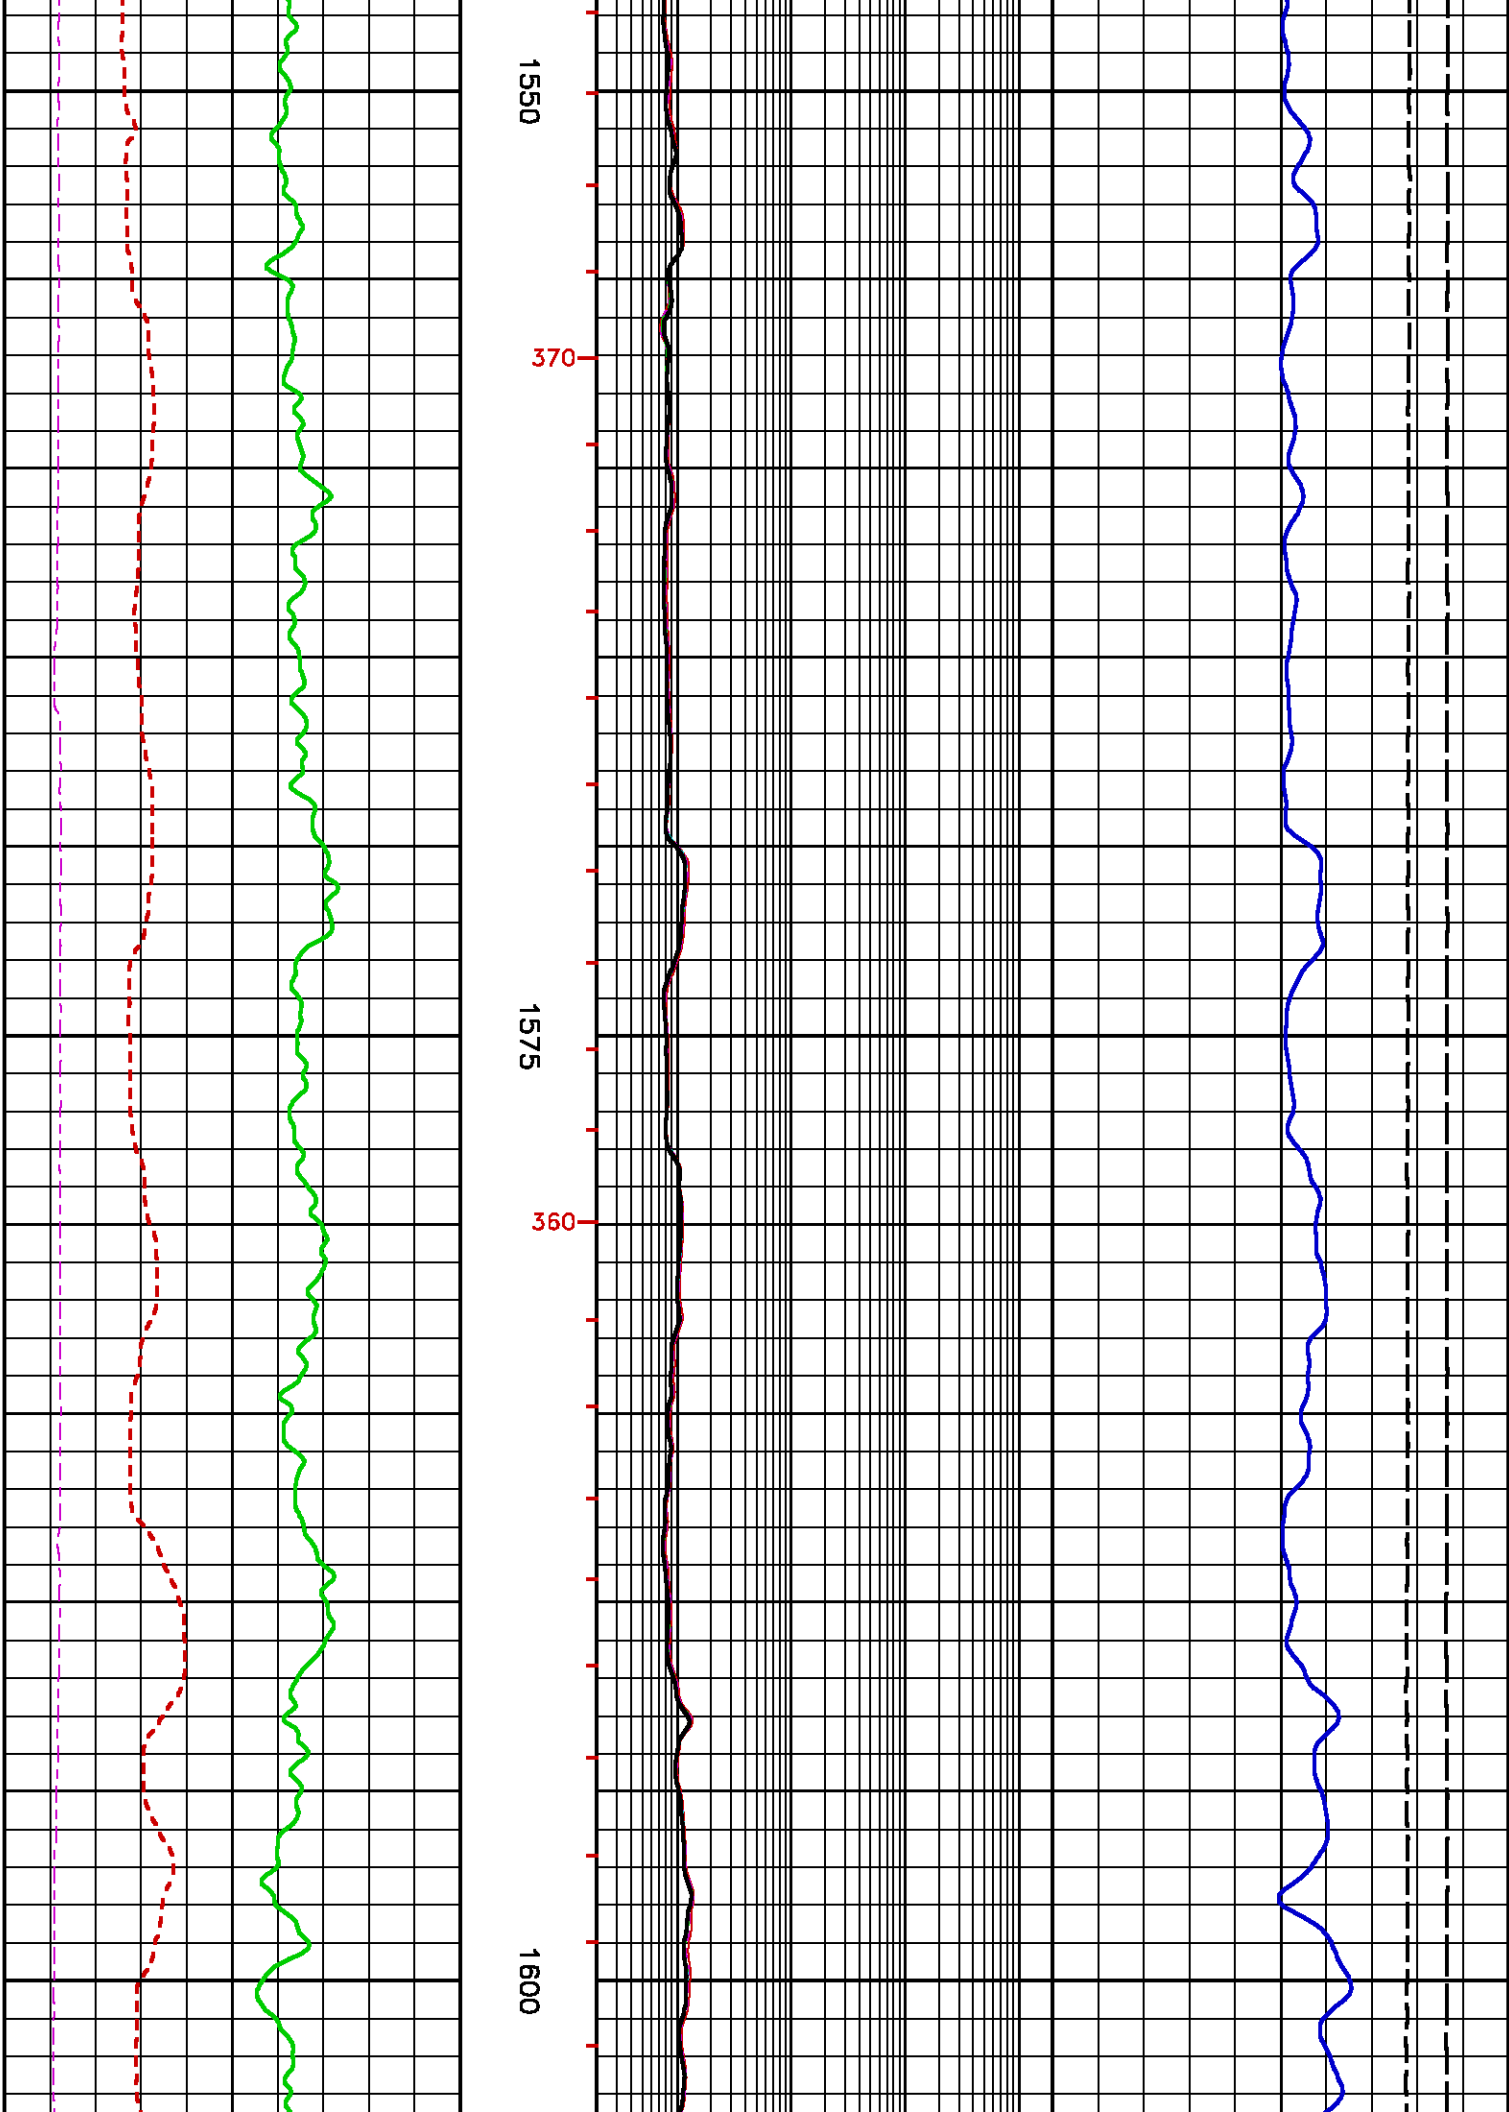

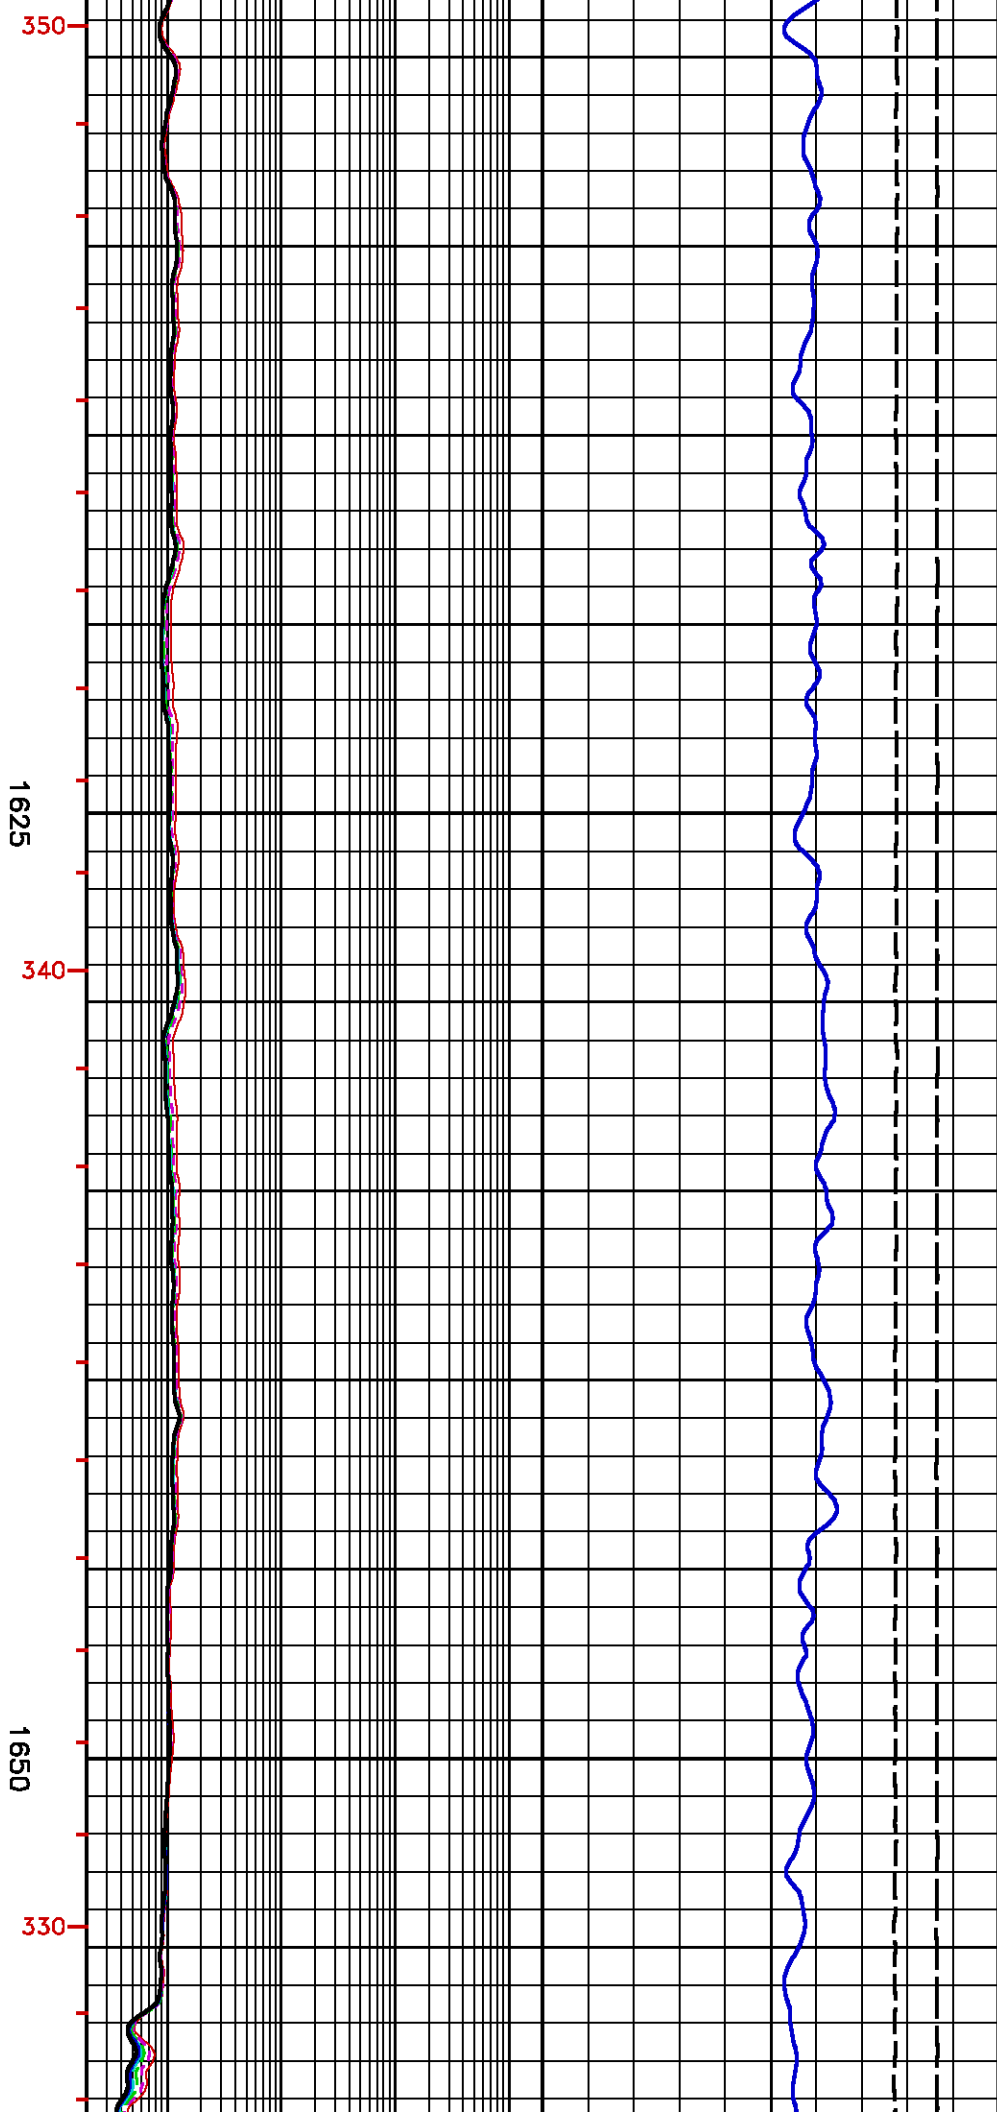


350

1625

340

1650

330

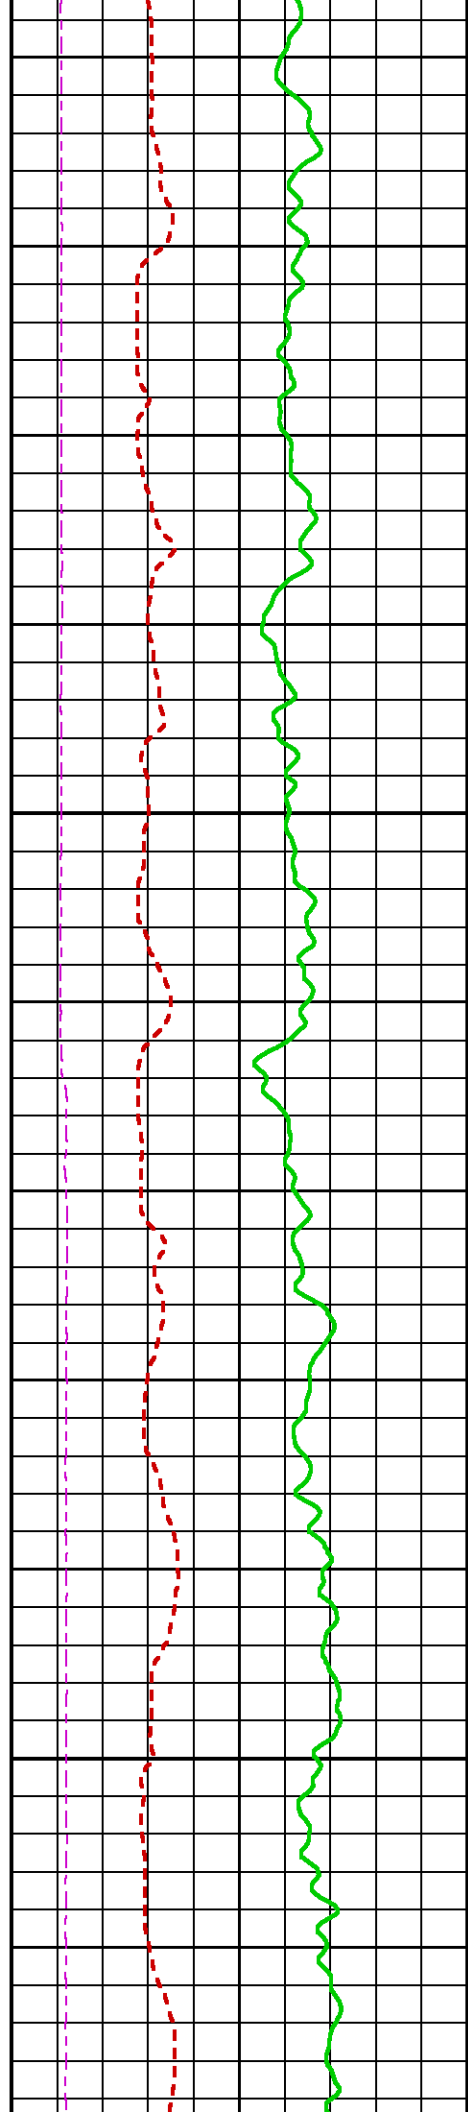


1675

320

1700


310


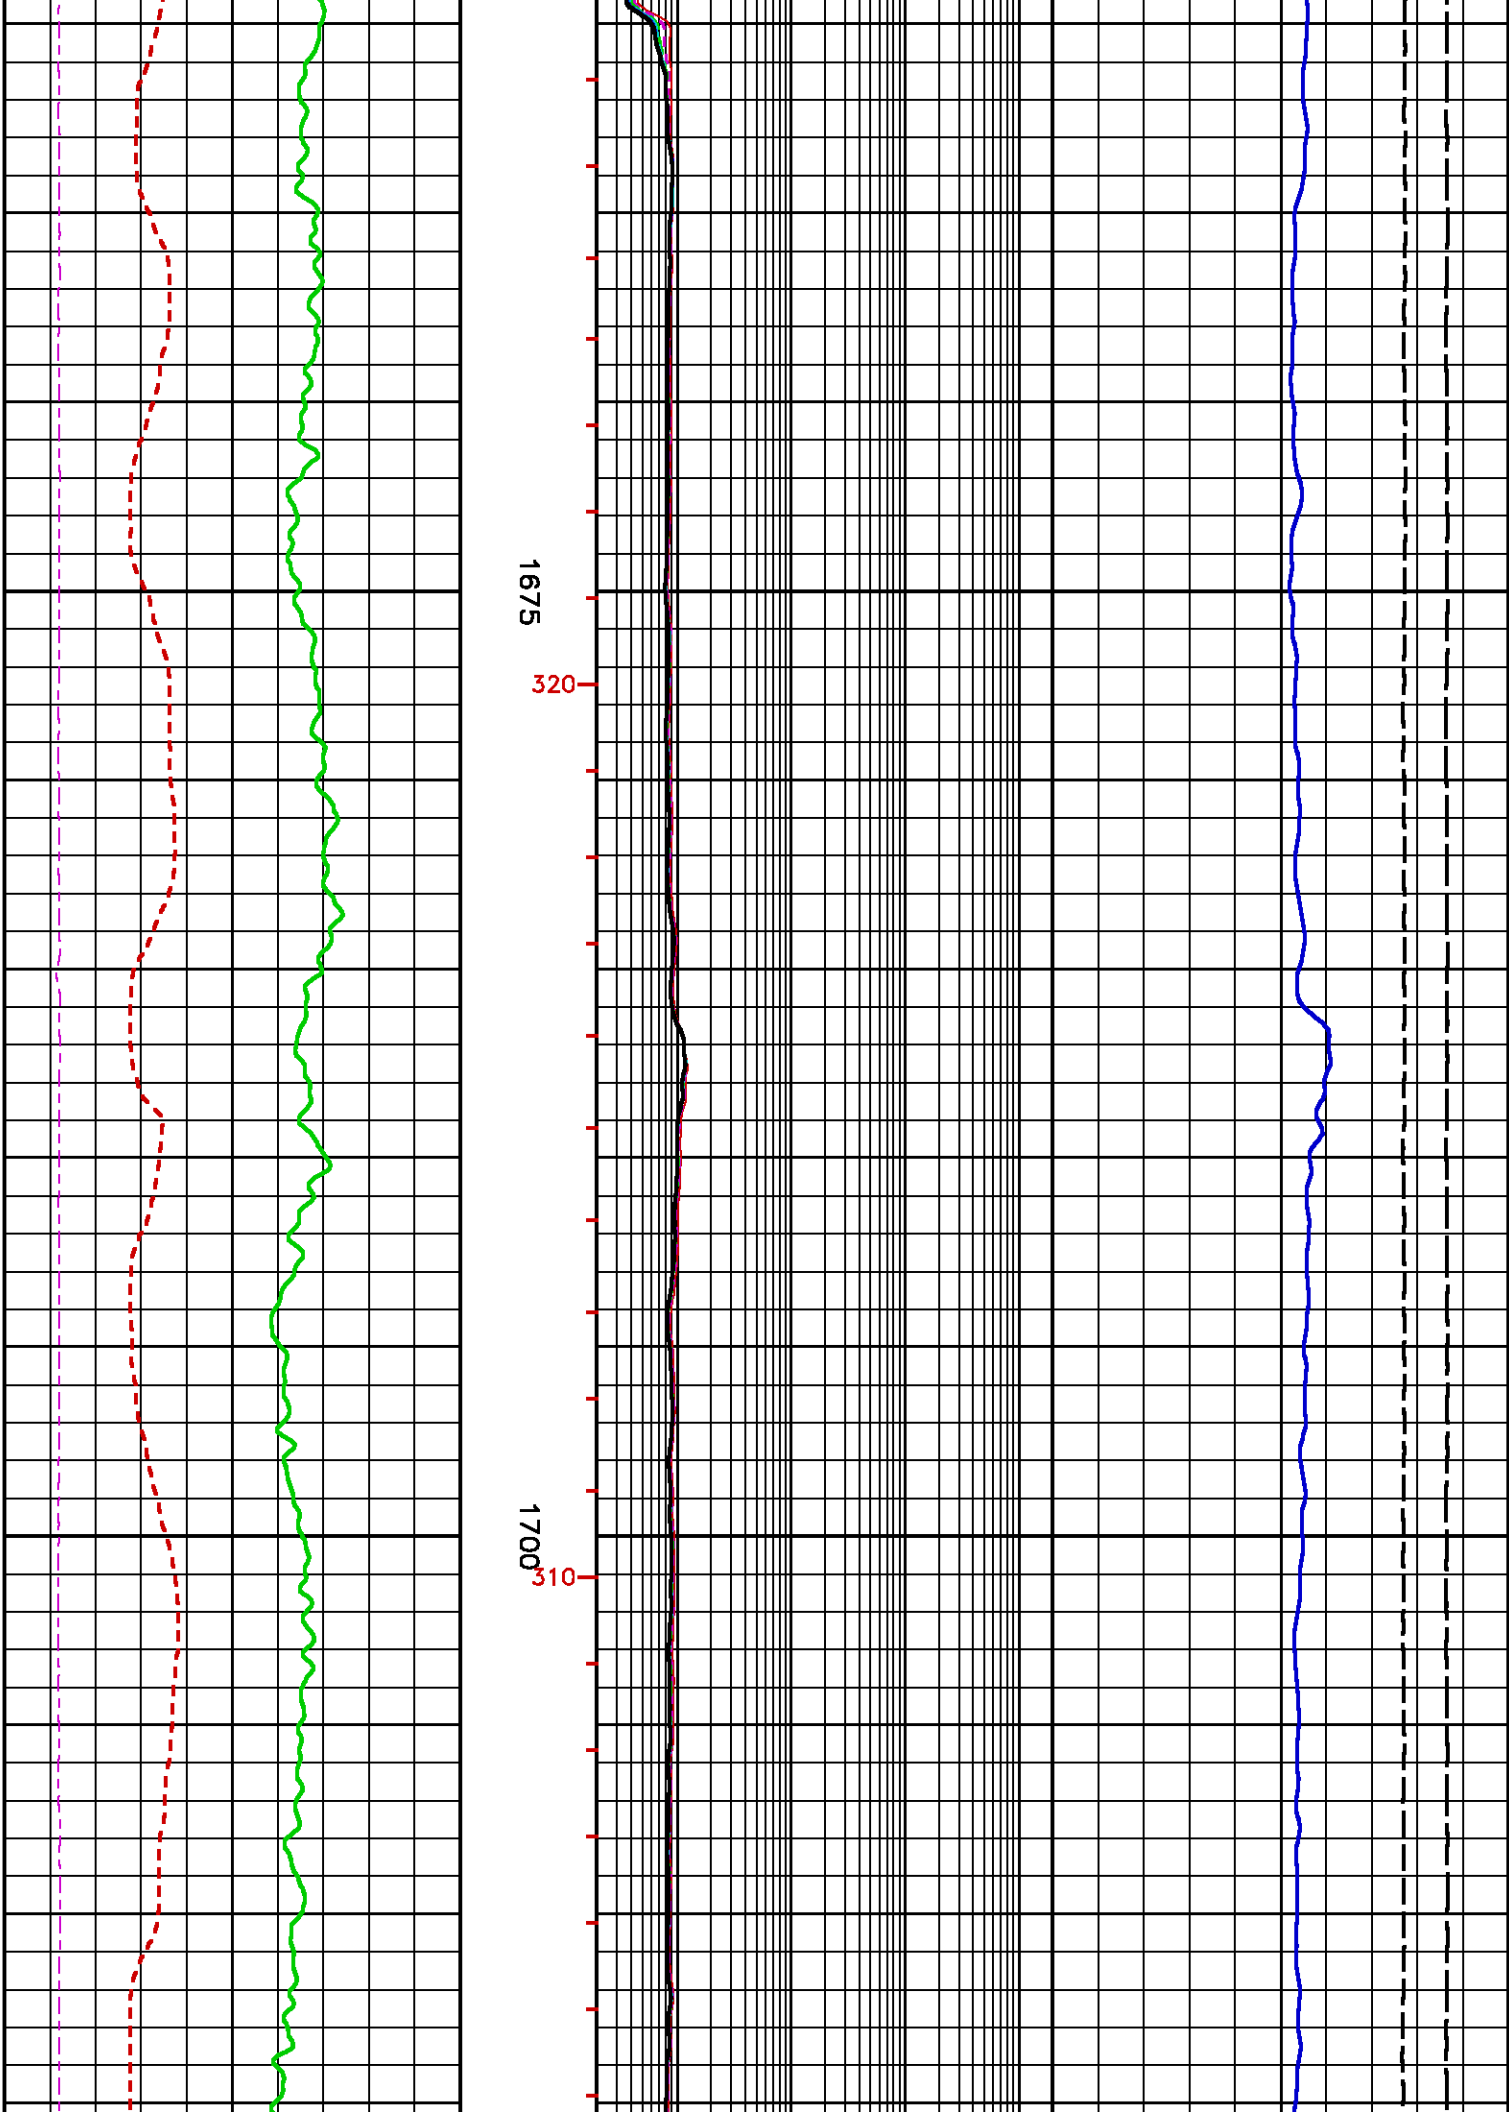


300
1725

290

1750

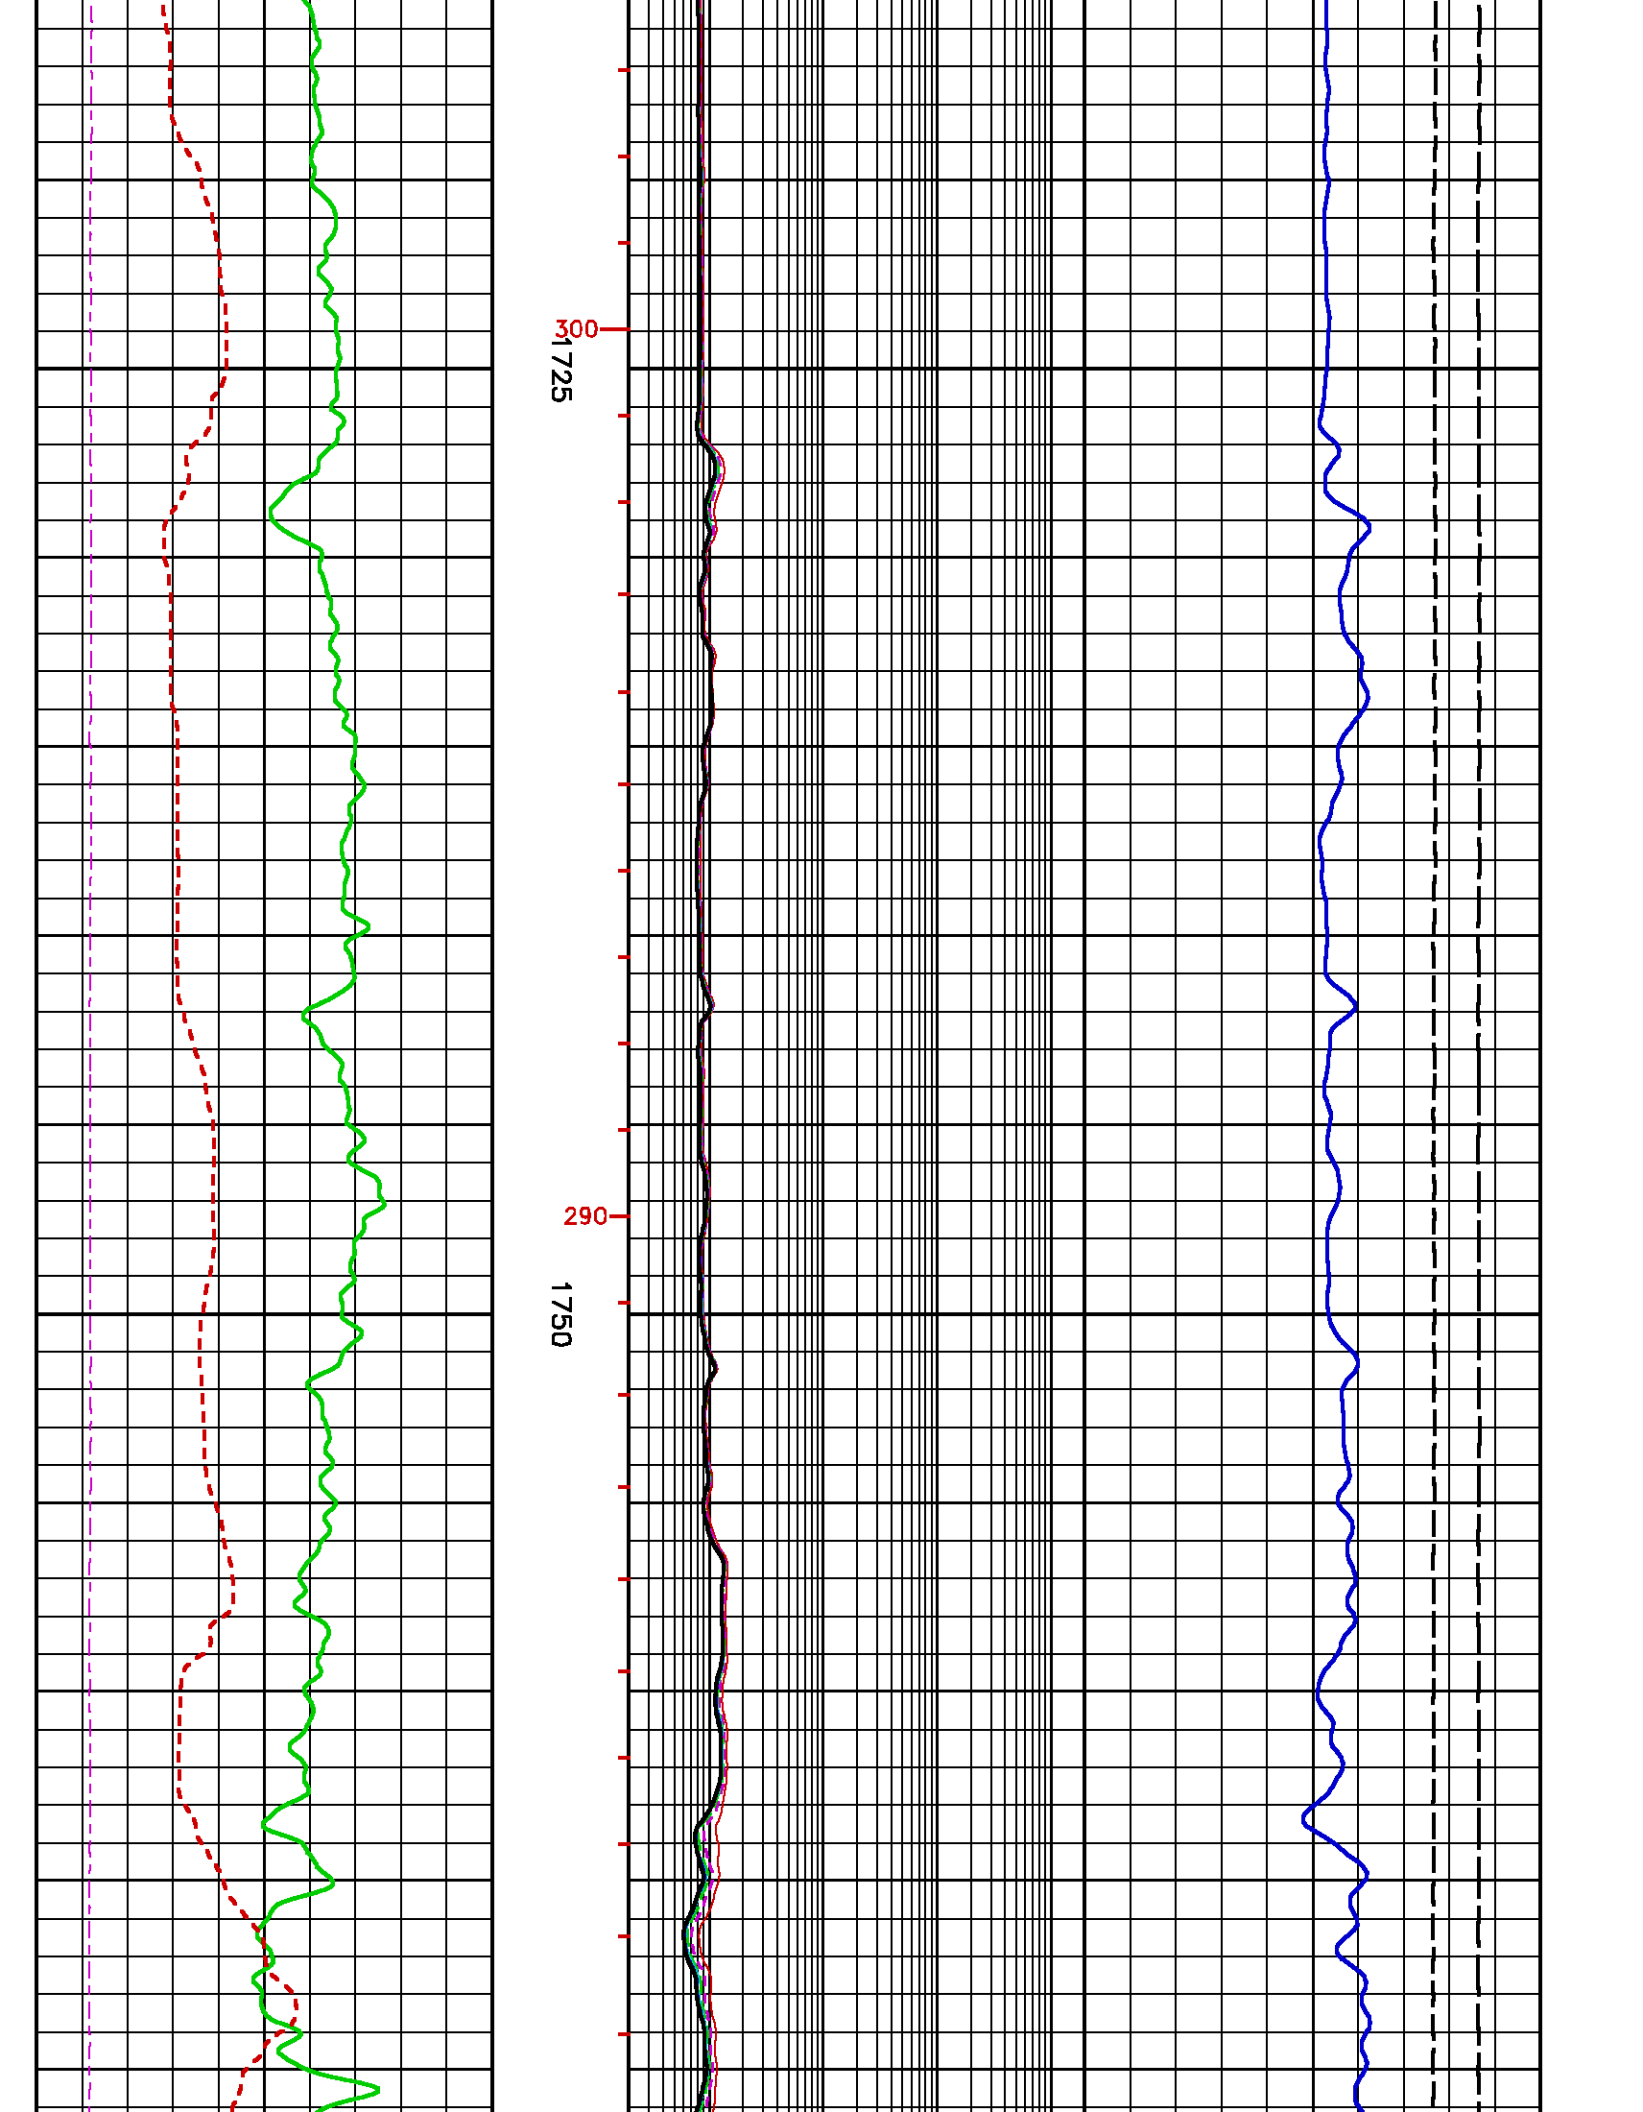





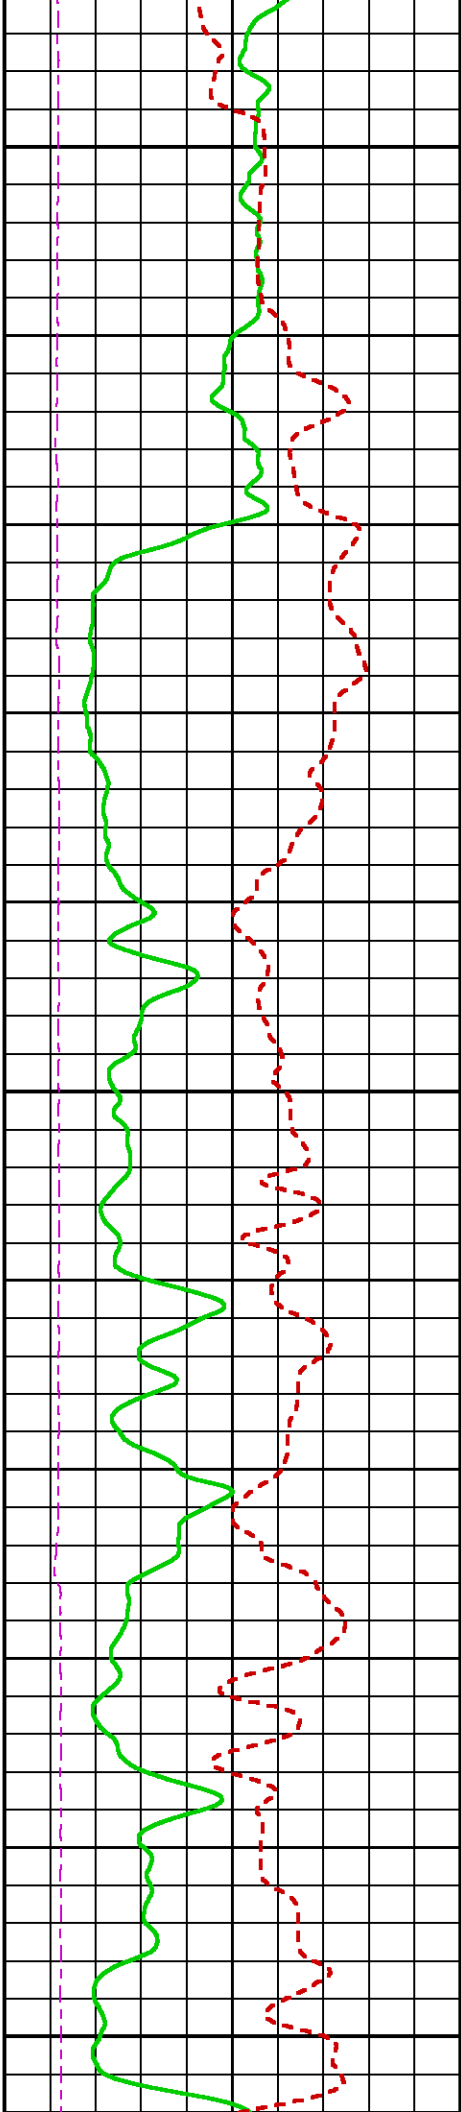
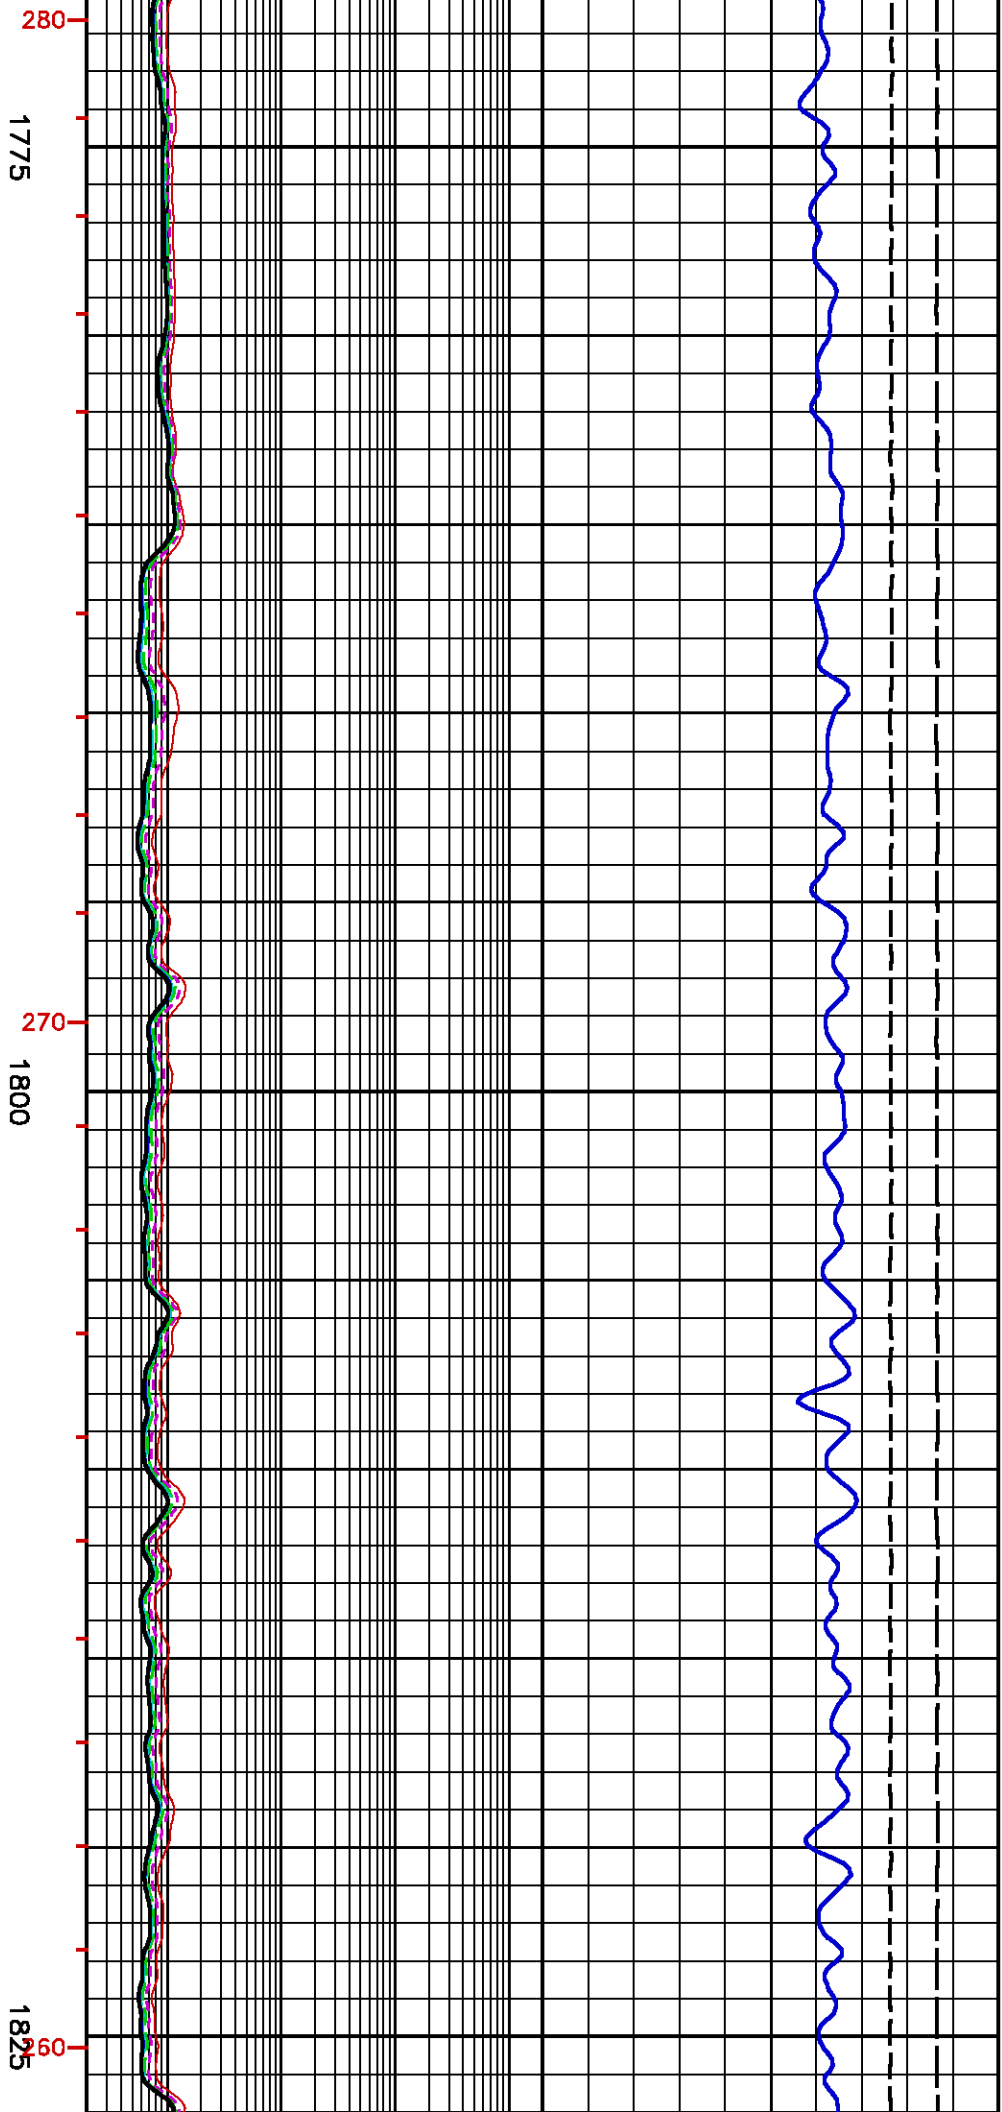


1850

250

1875

240

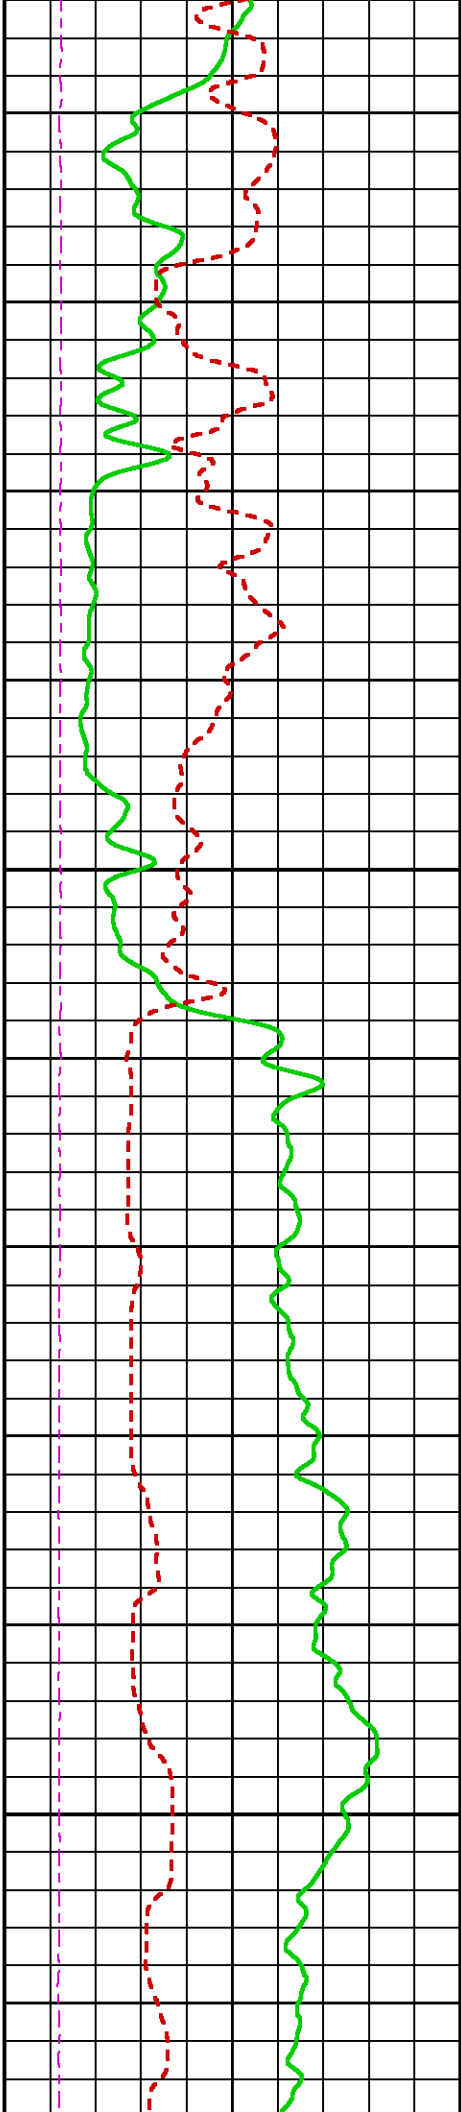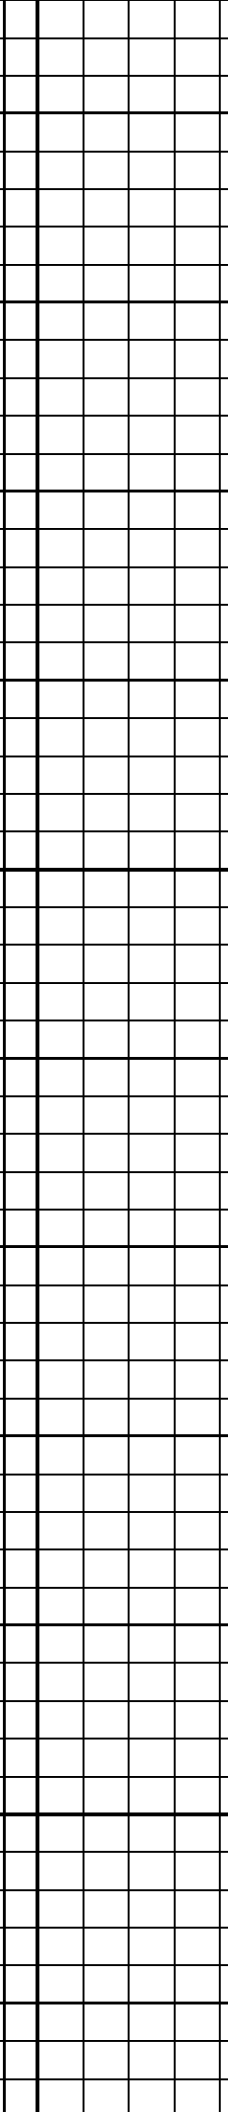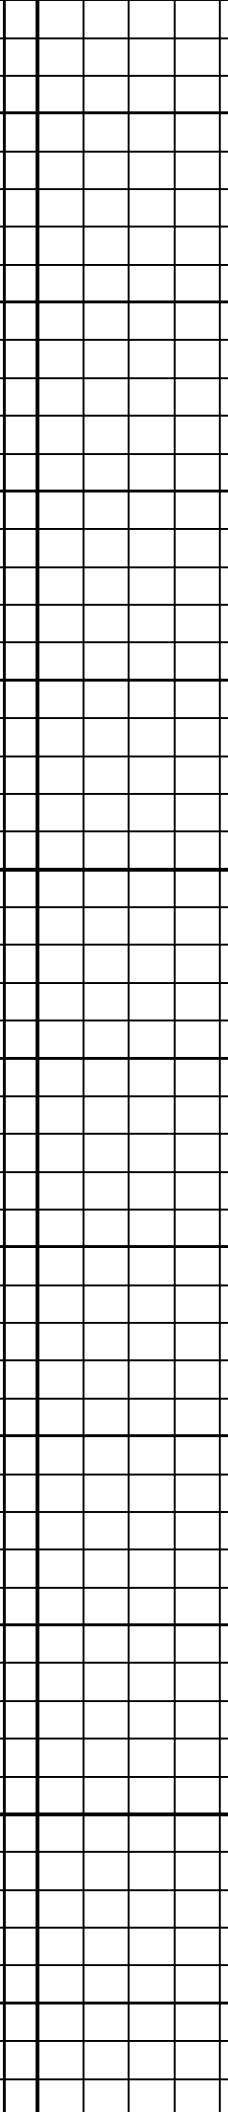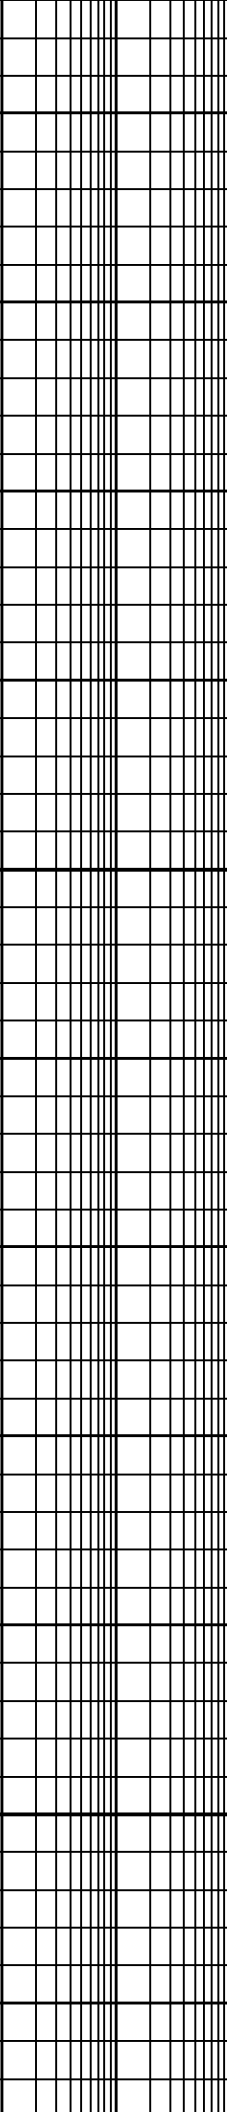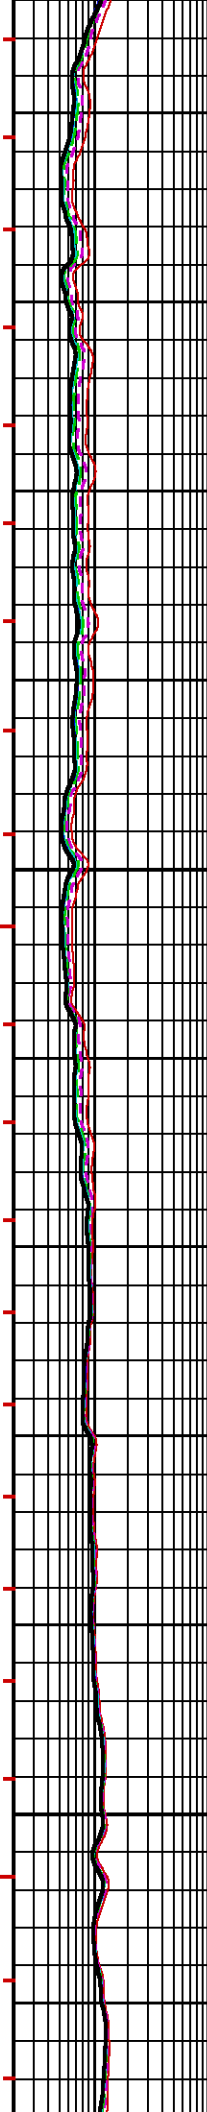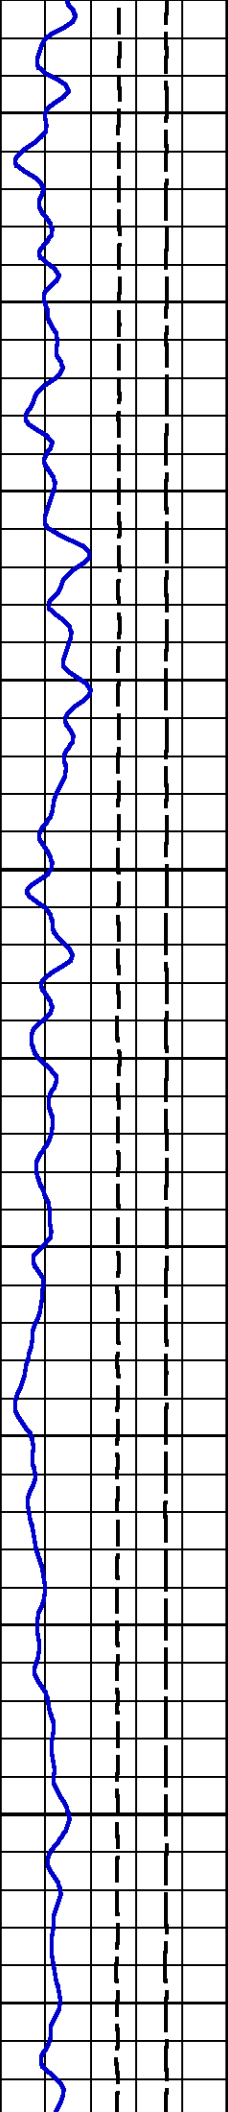


1900

1925

230

220

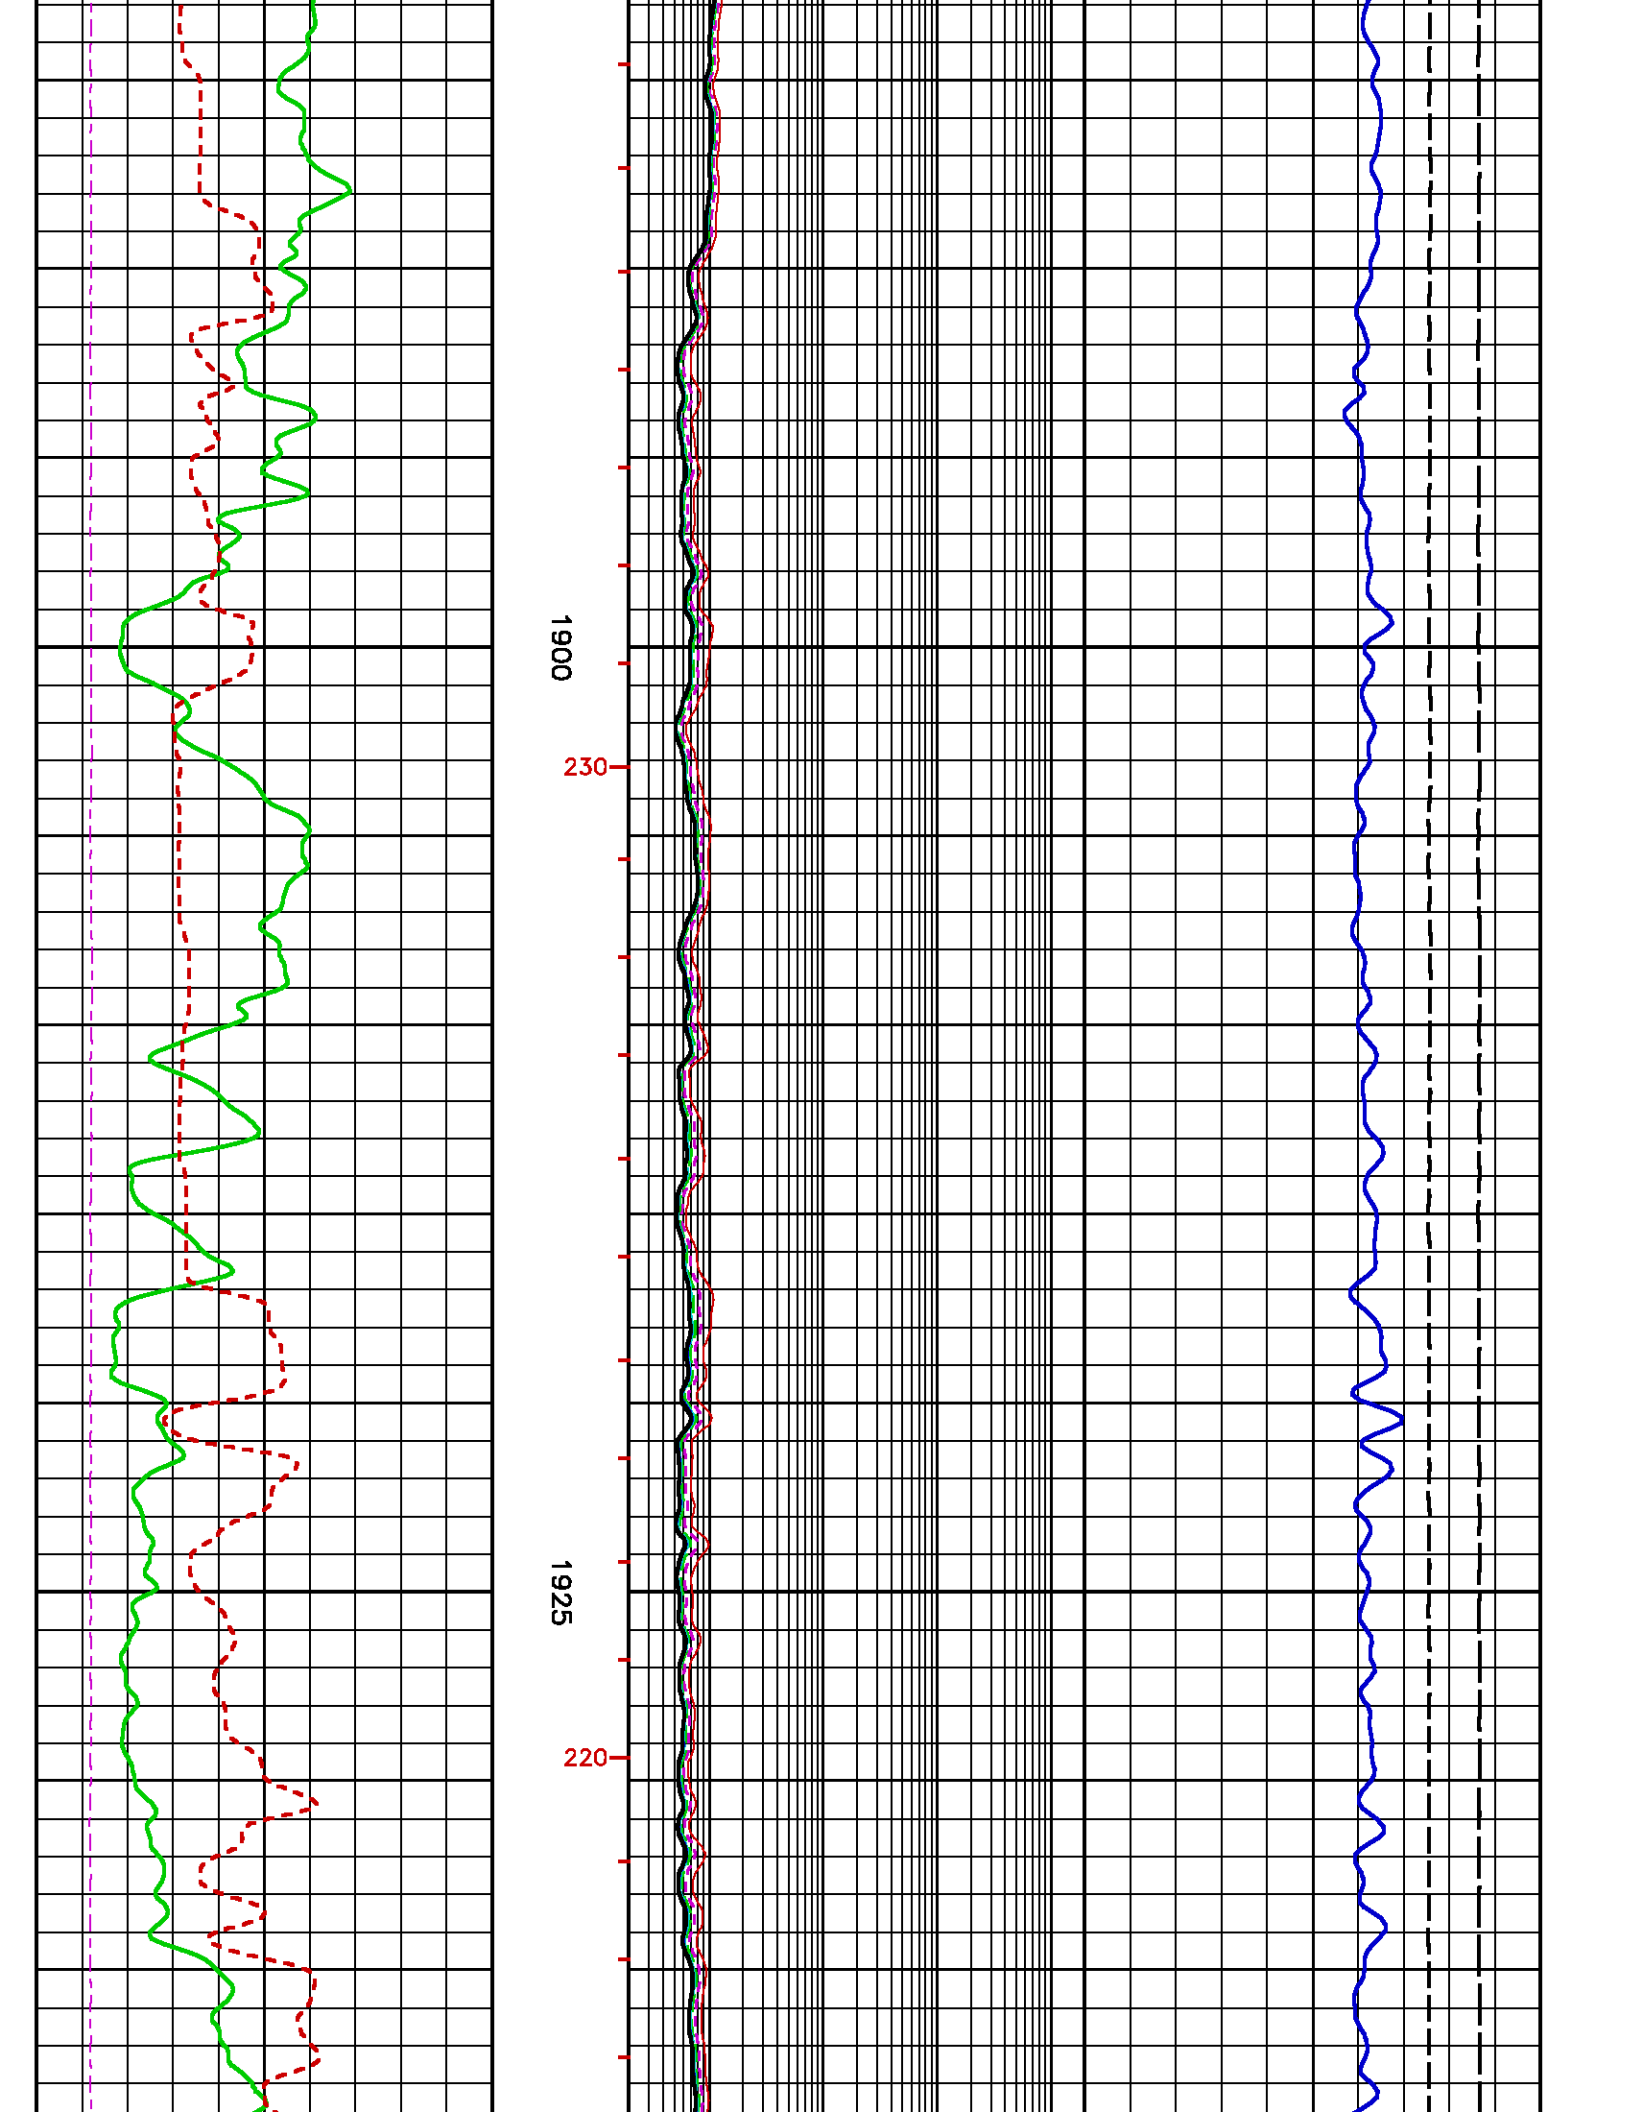


1950

1975

200

210

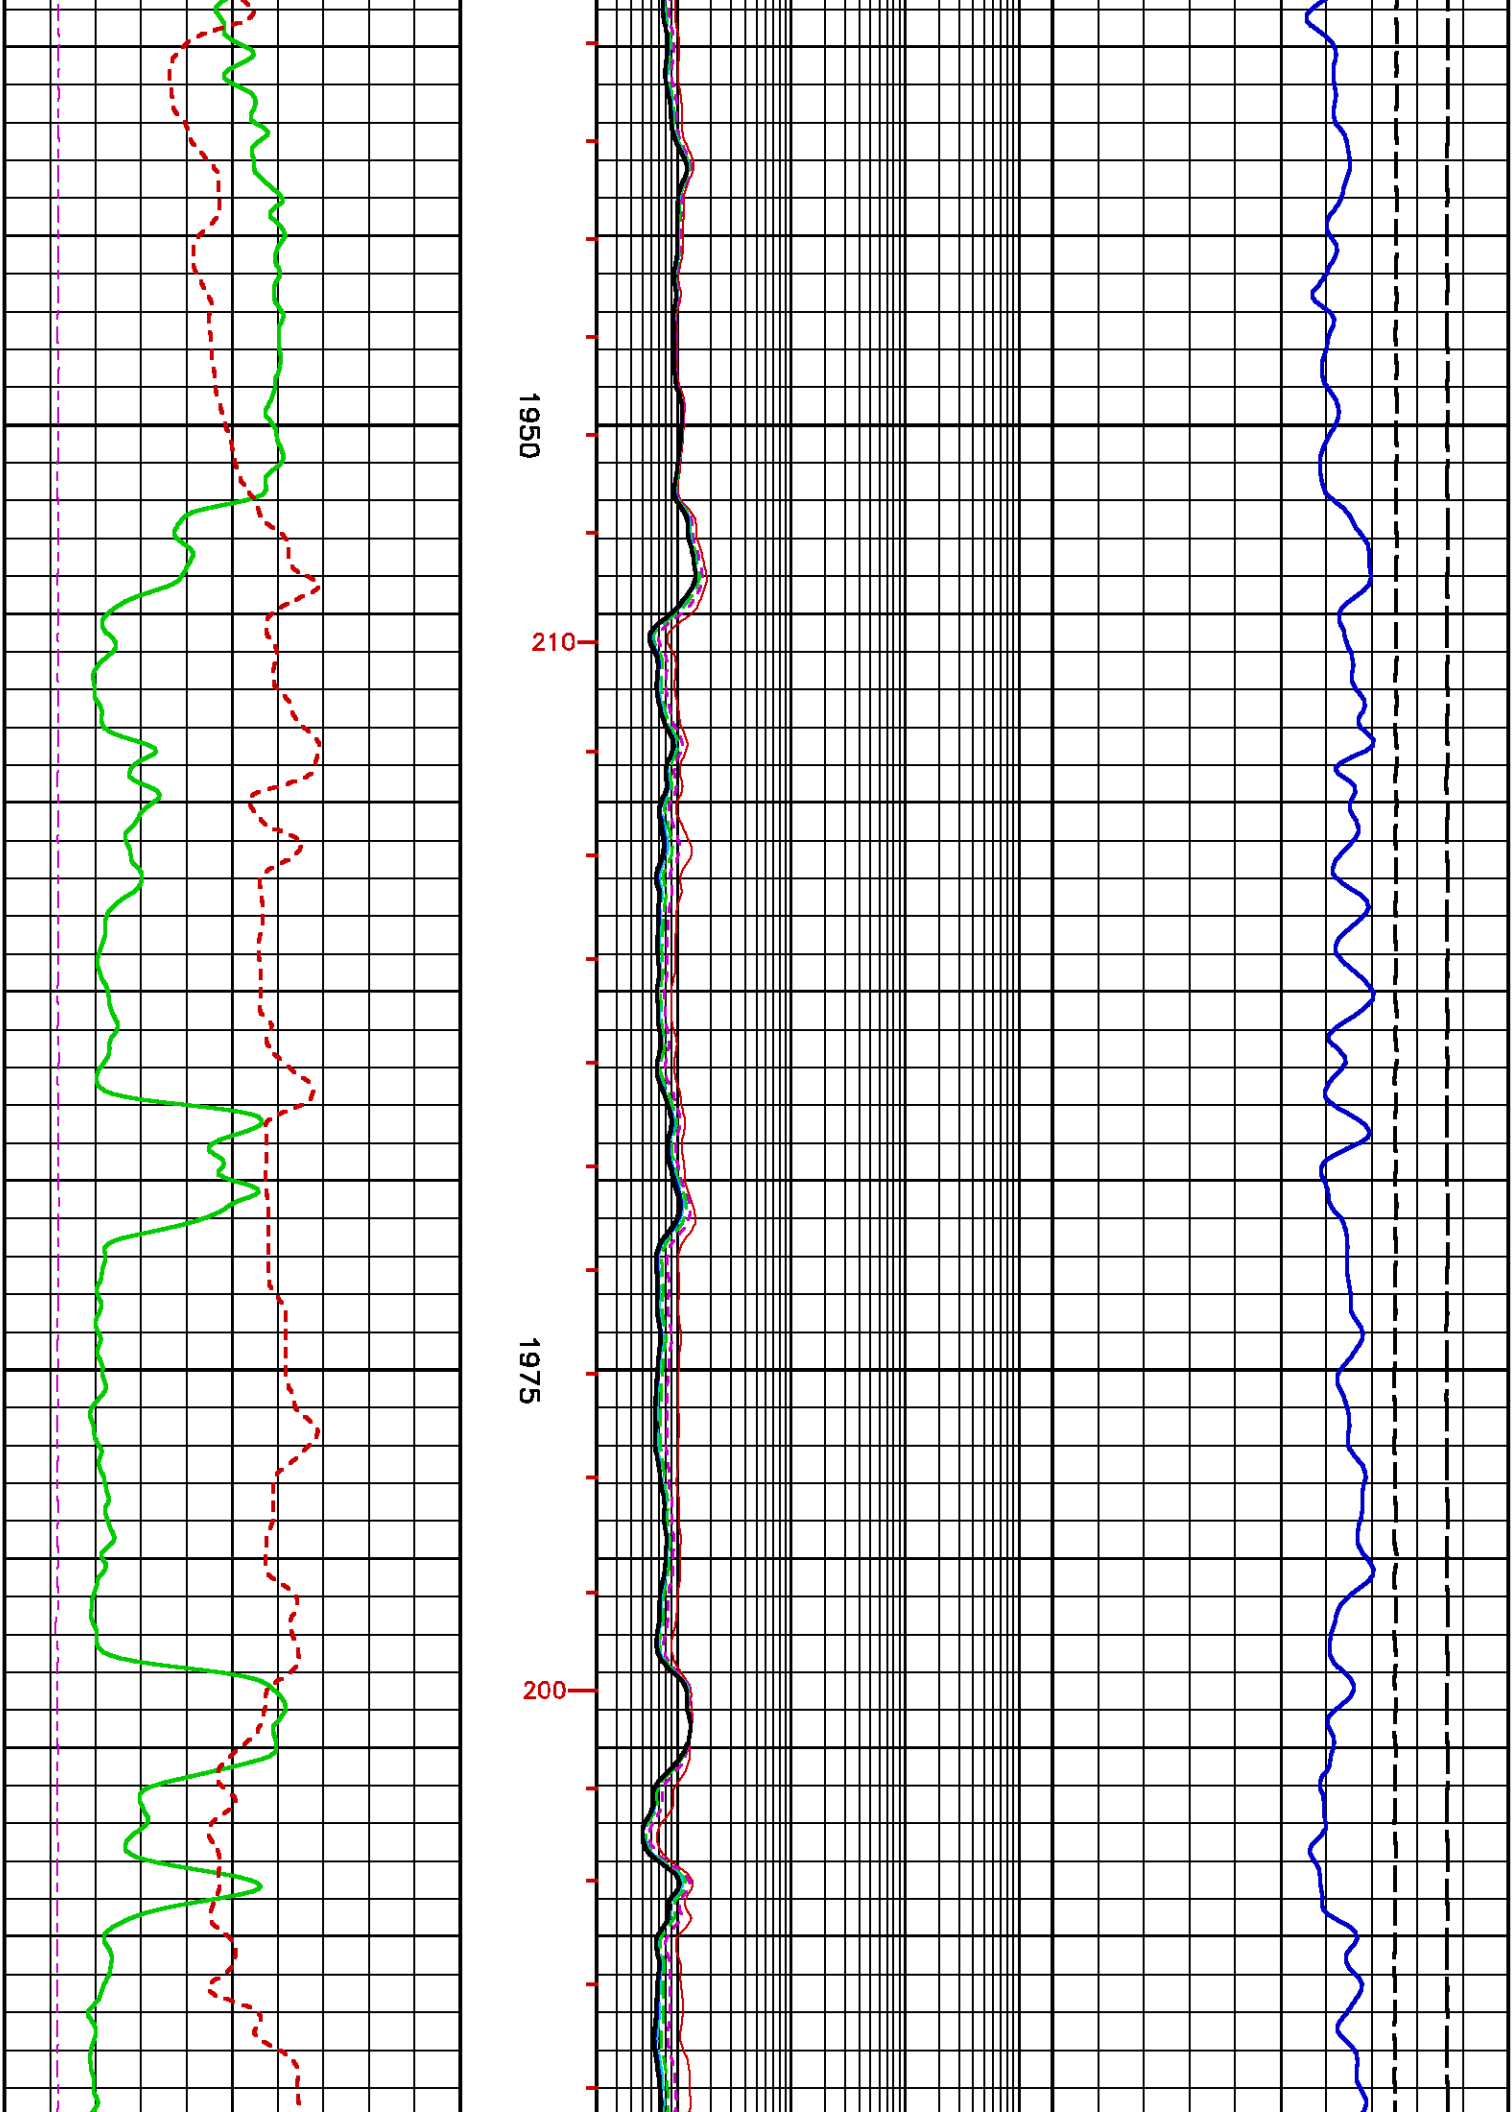


2000



190

2025

180


205

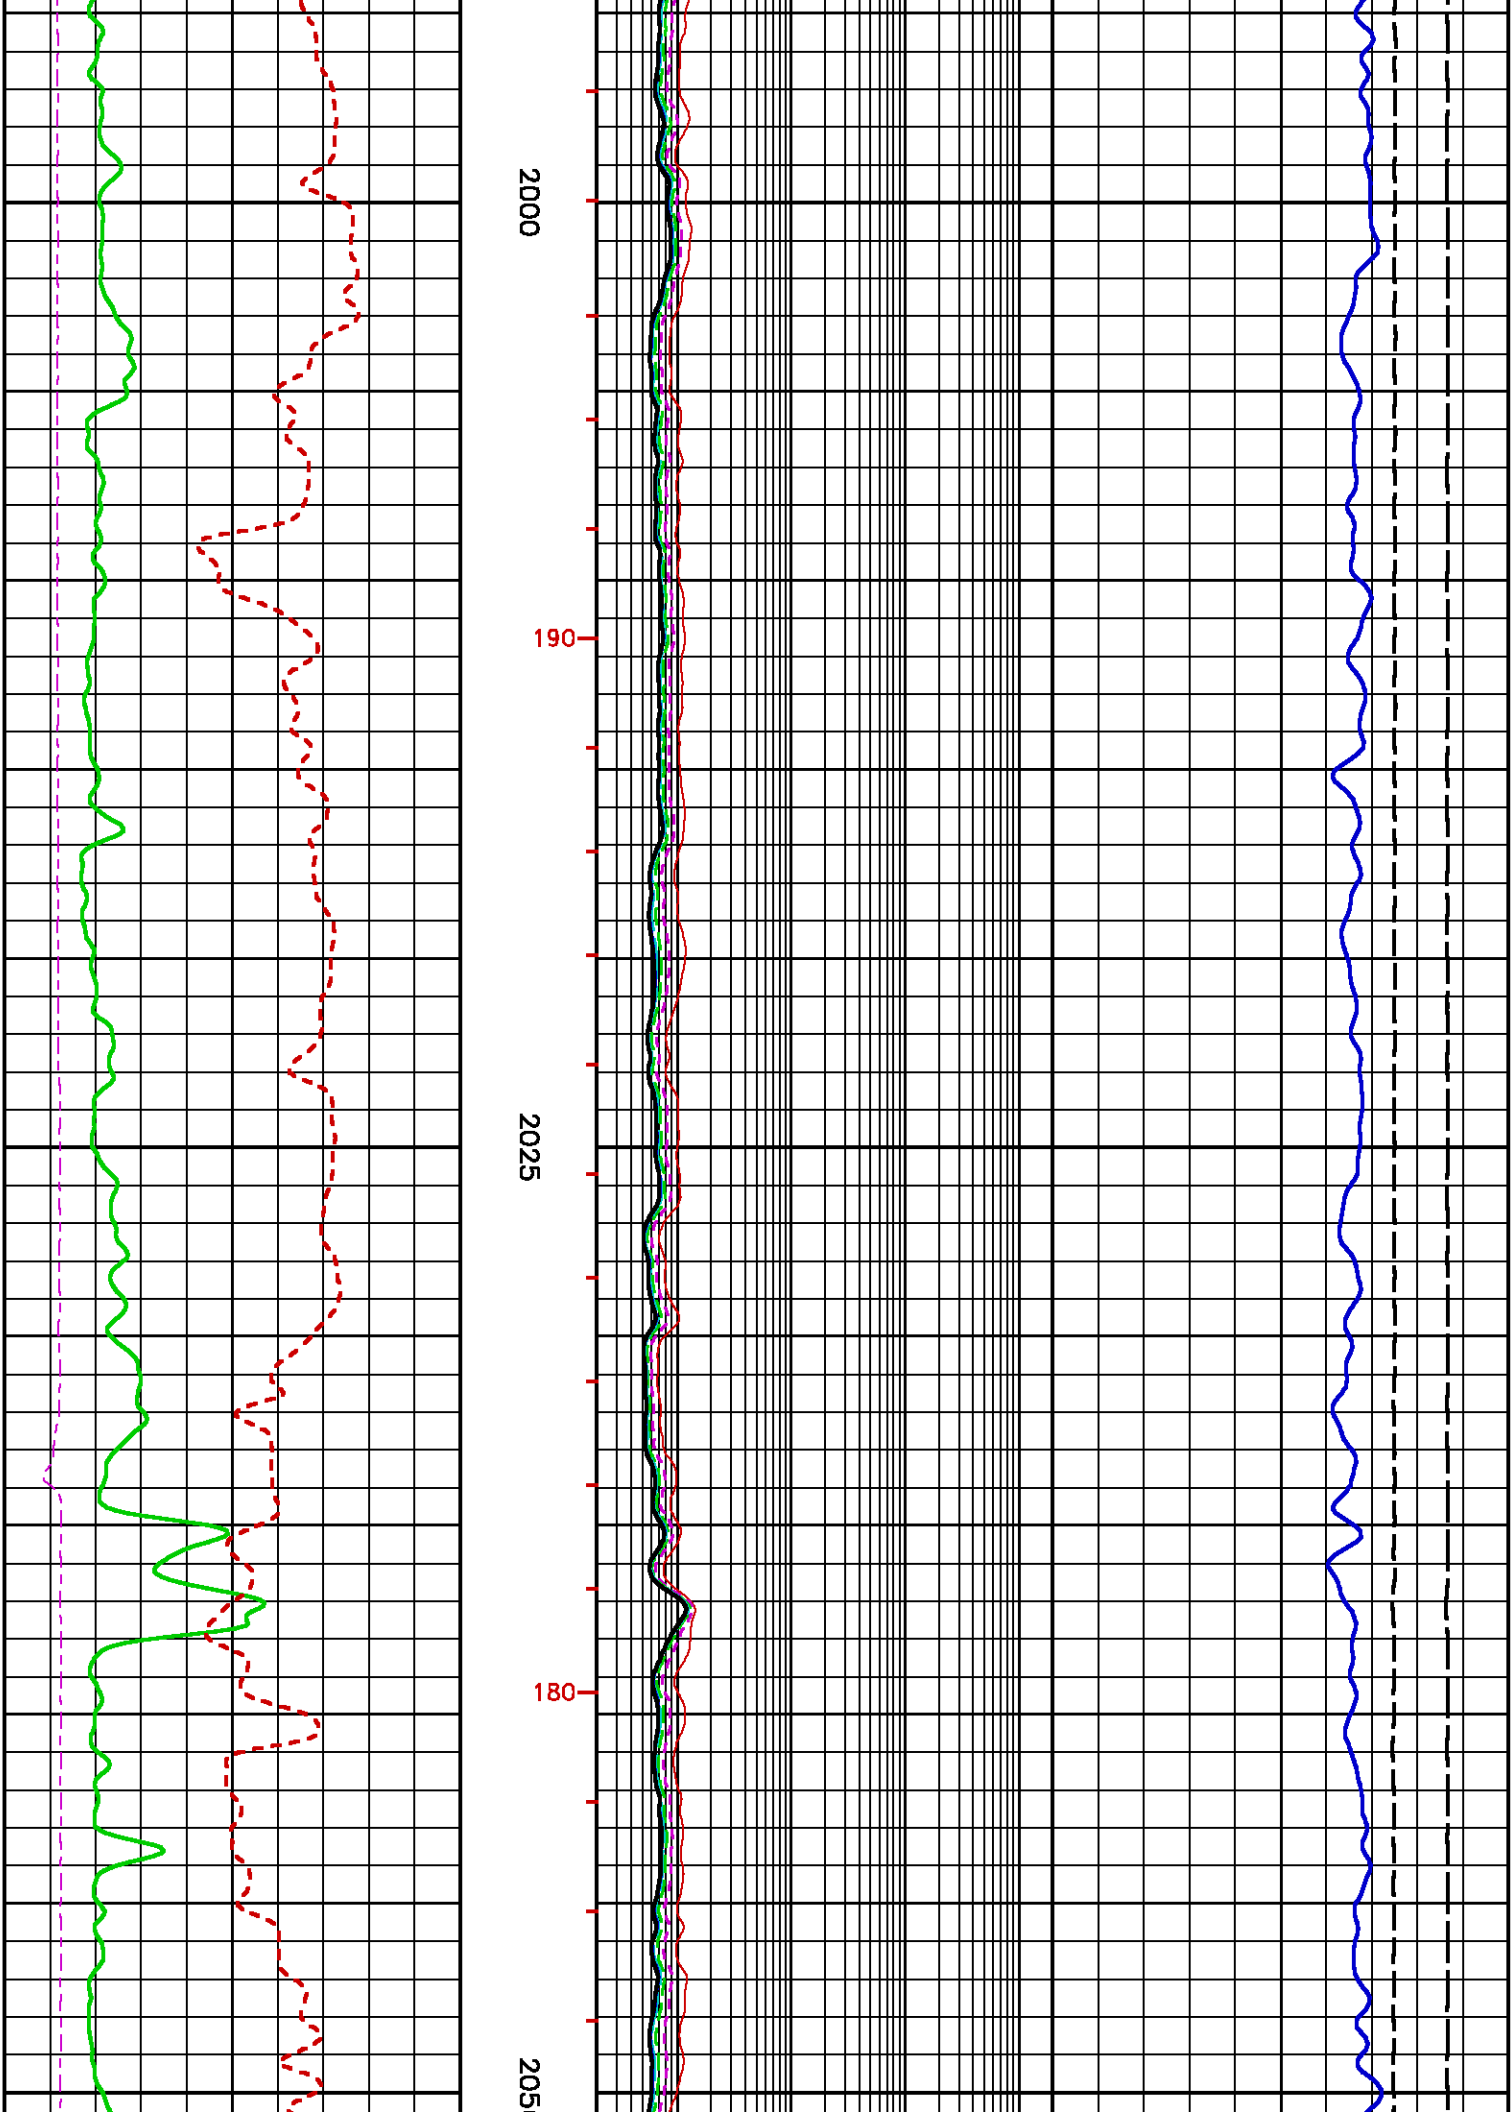

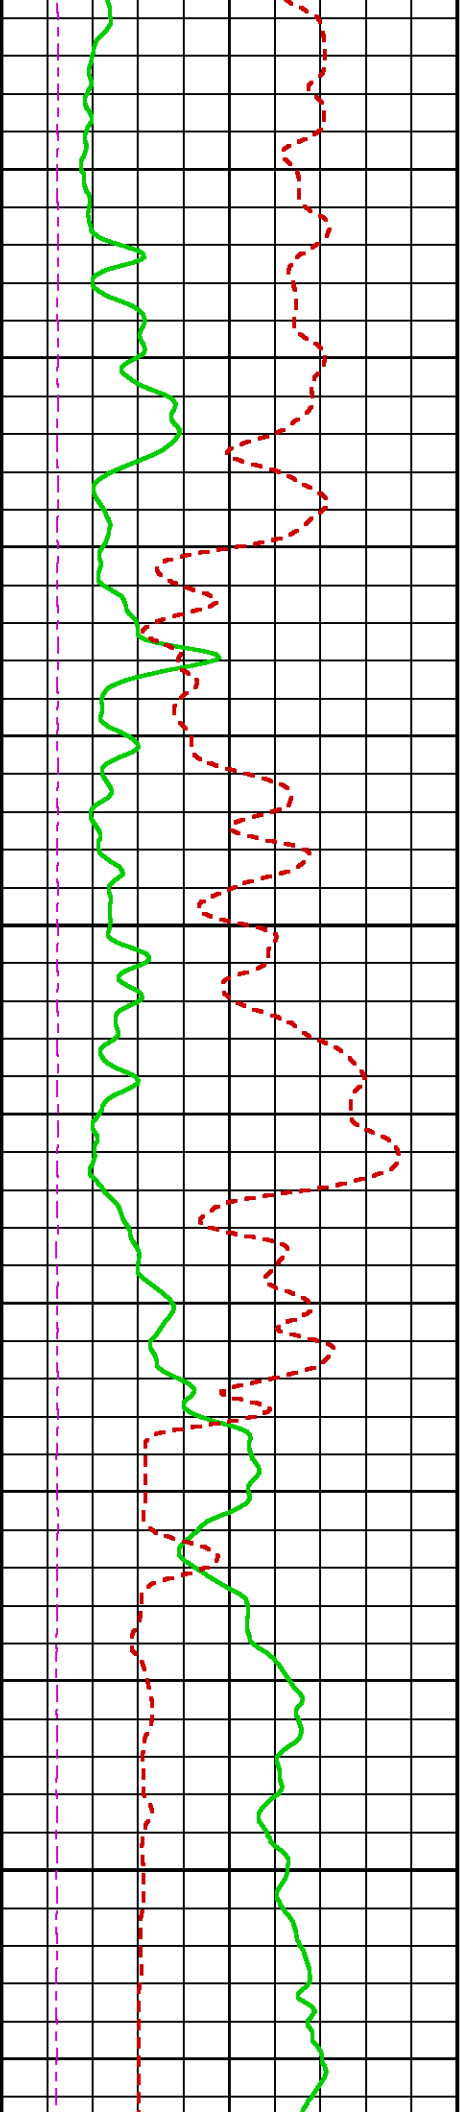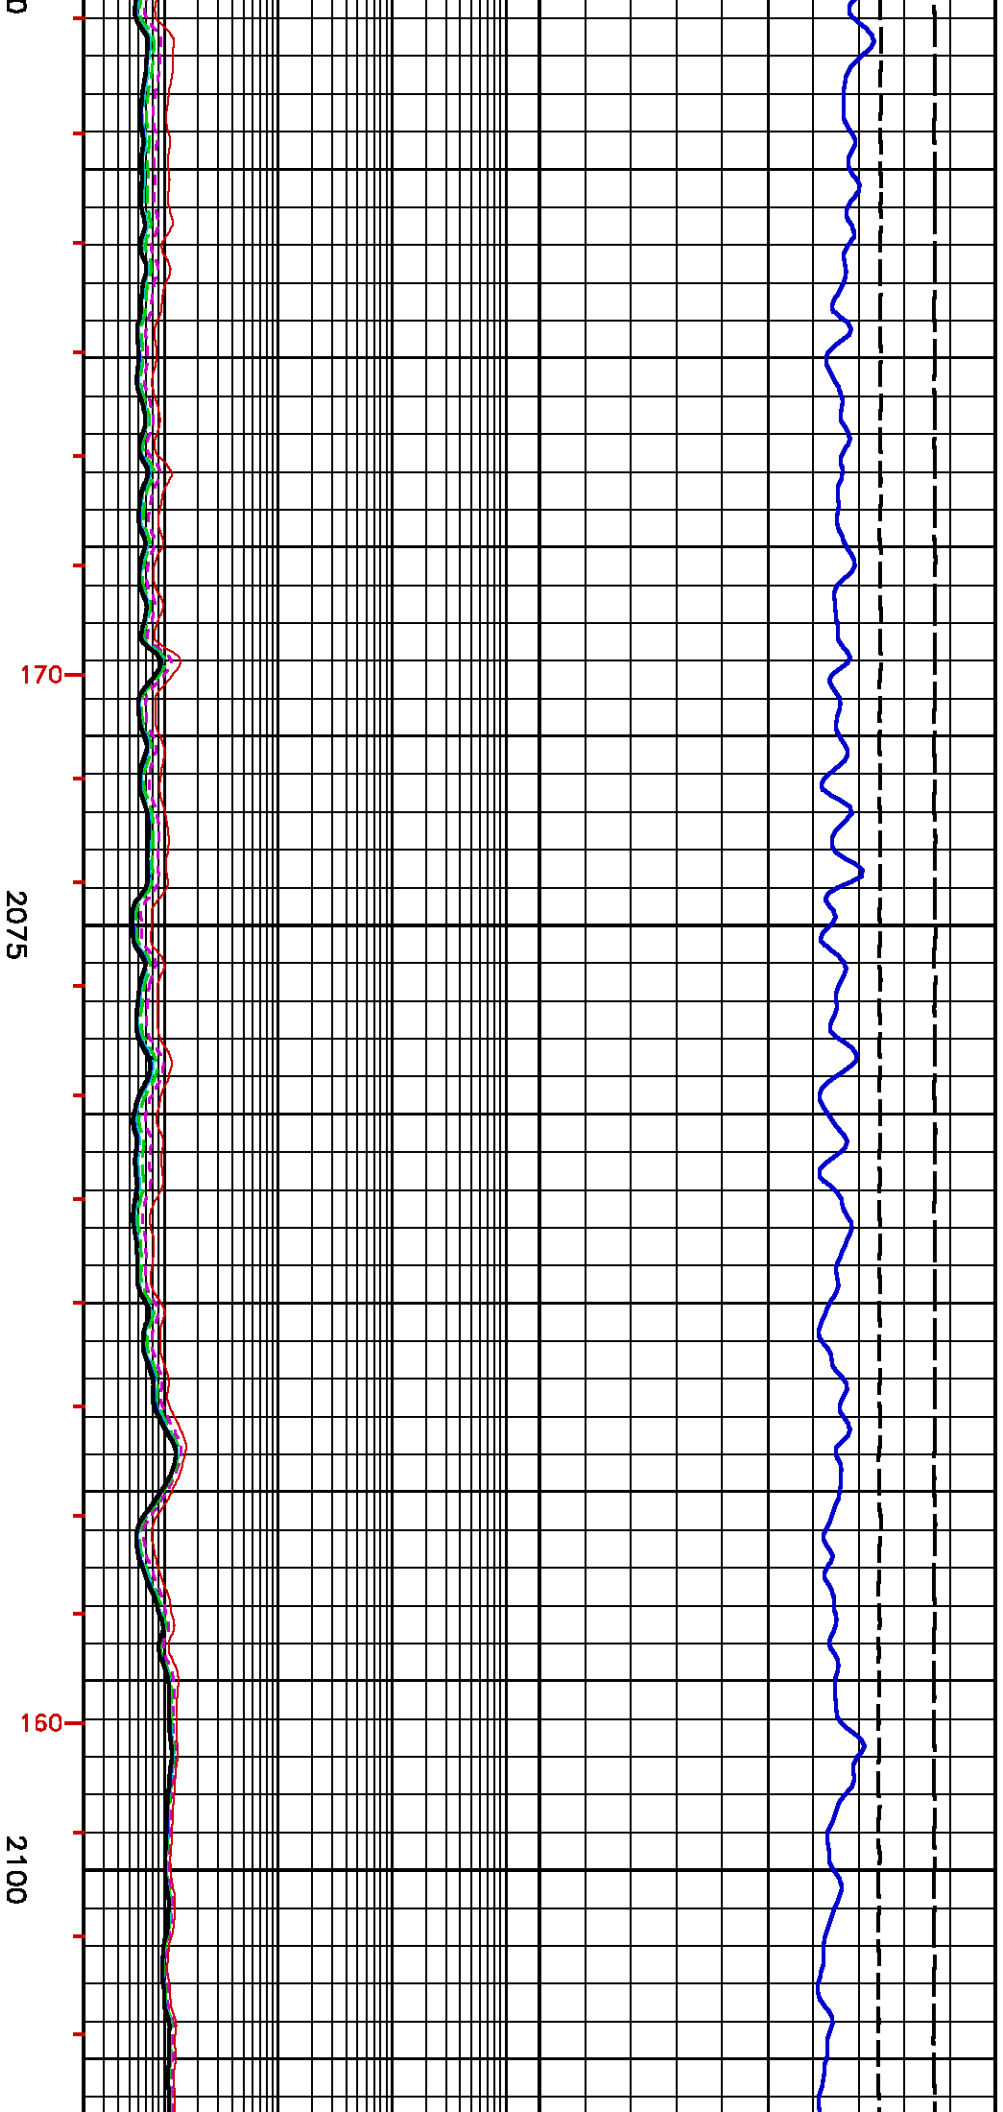

150
2125

40
2150

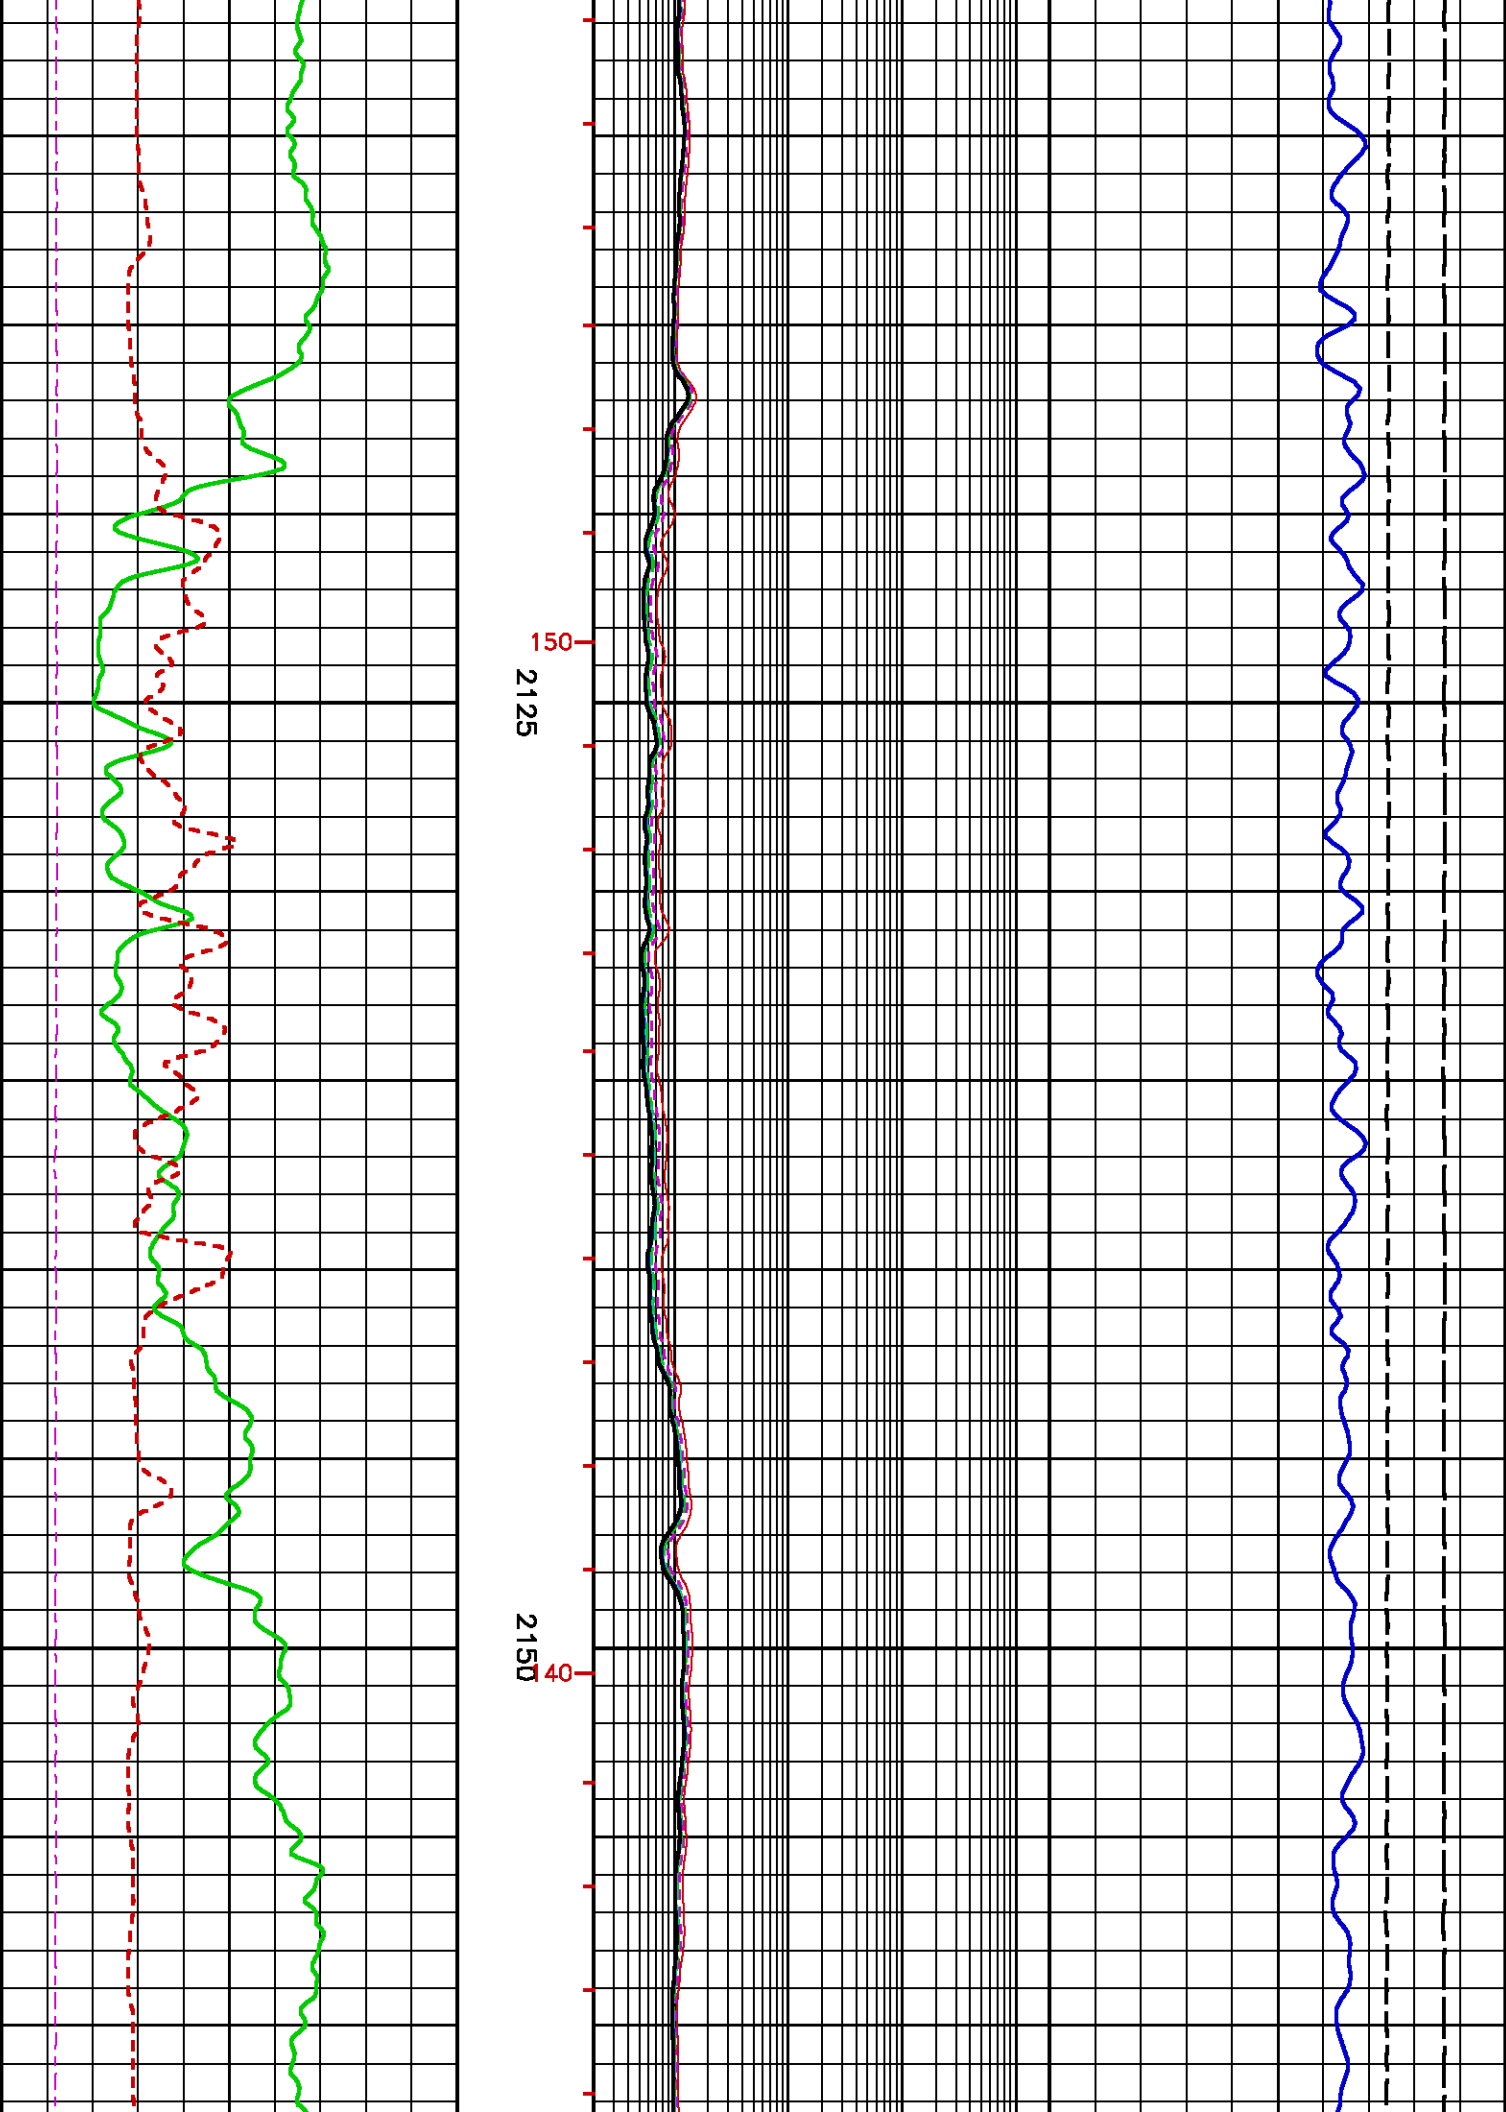


2175

130

2200

120

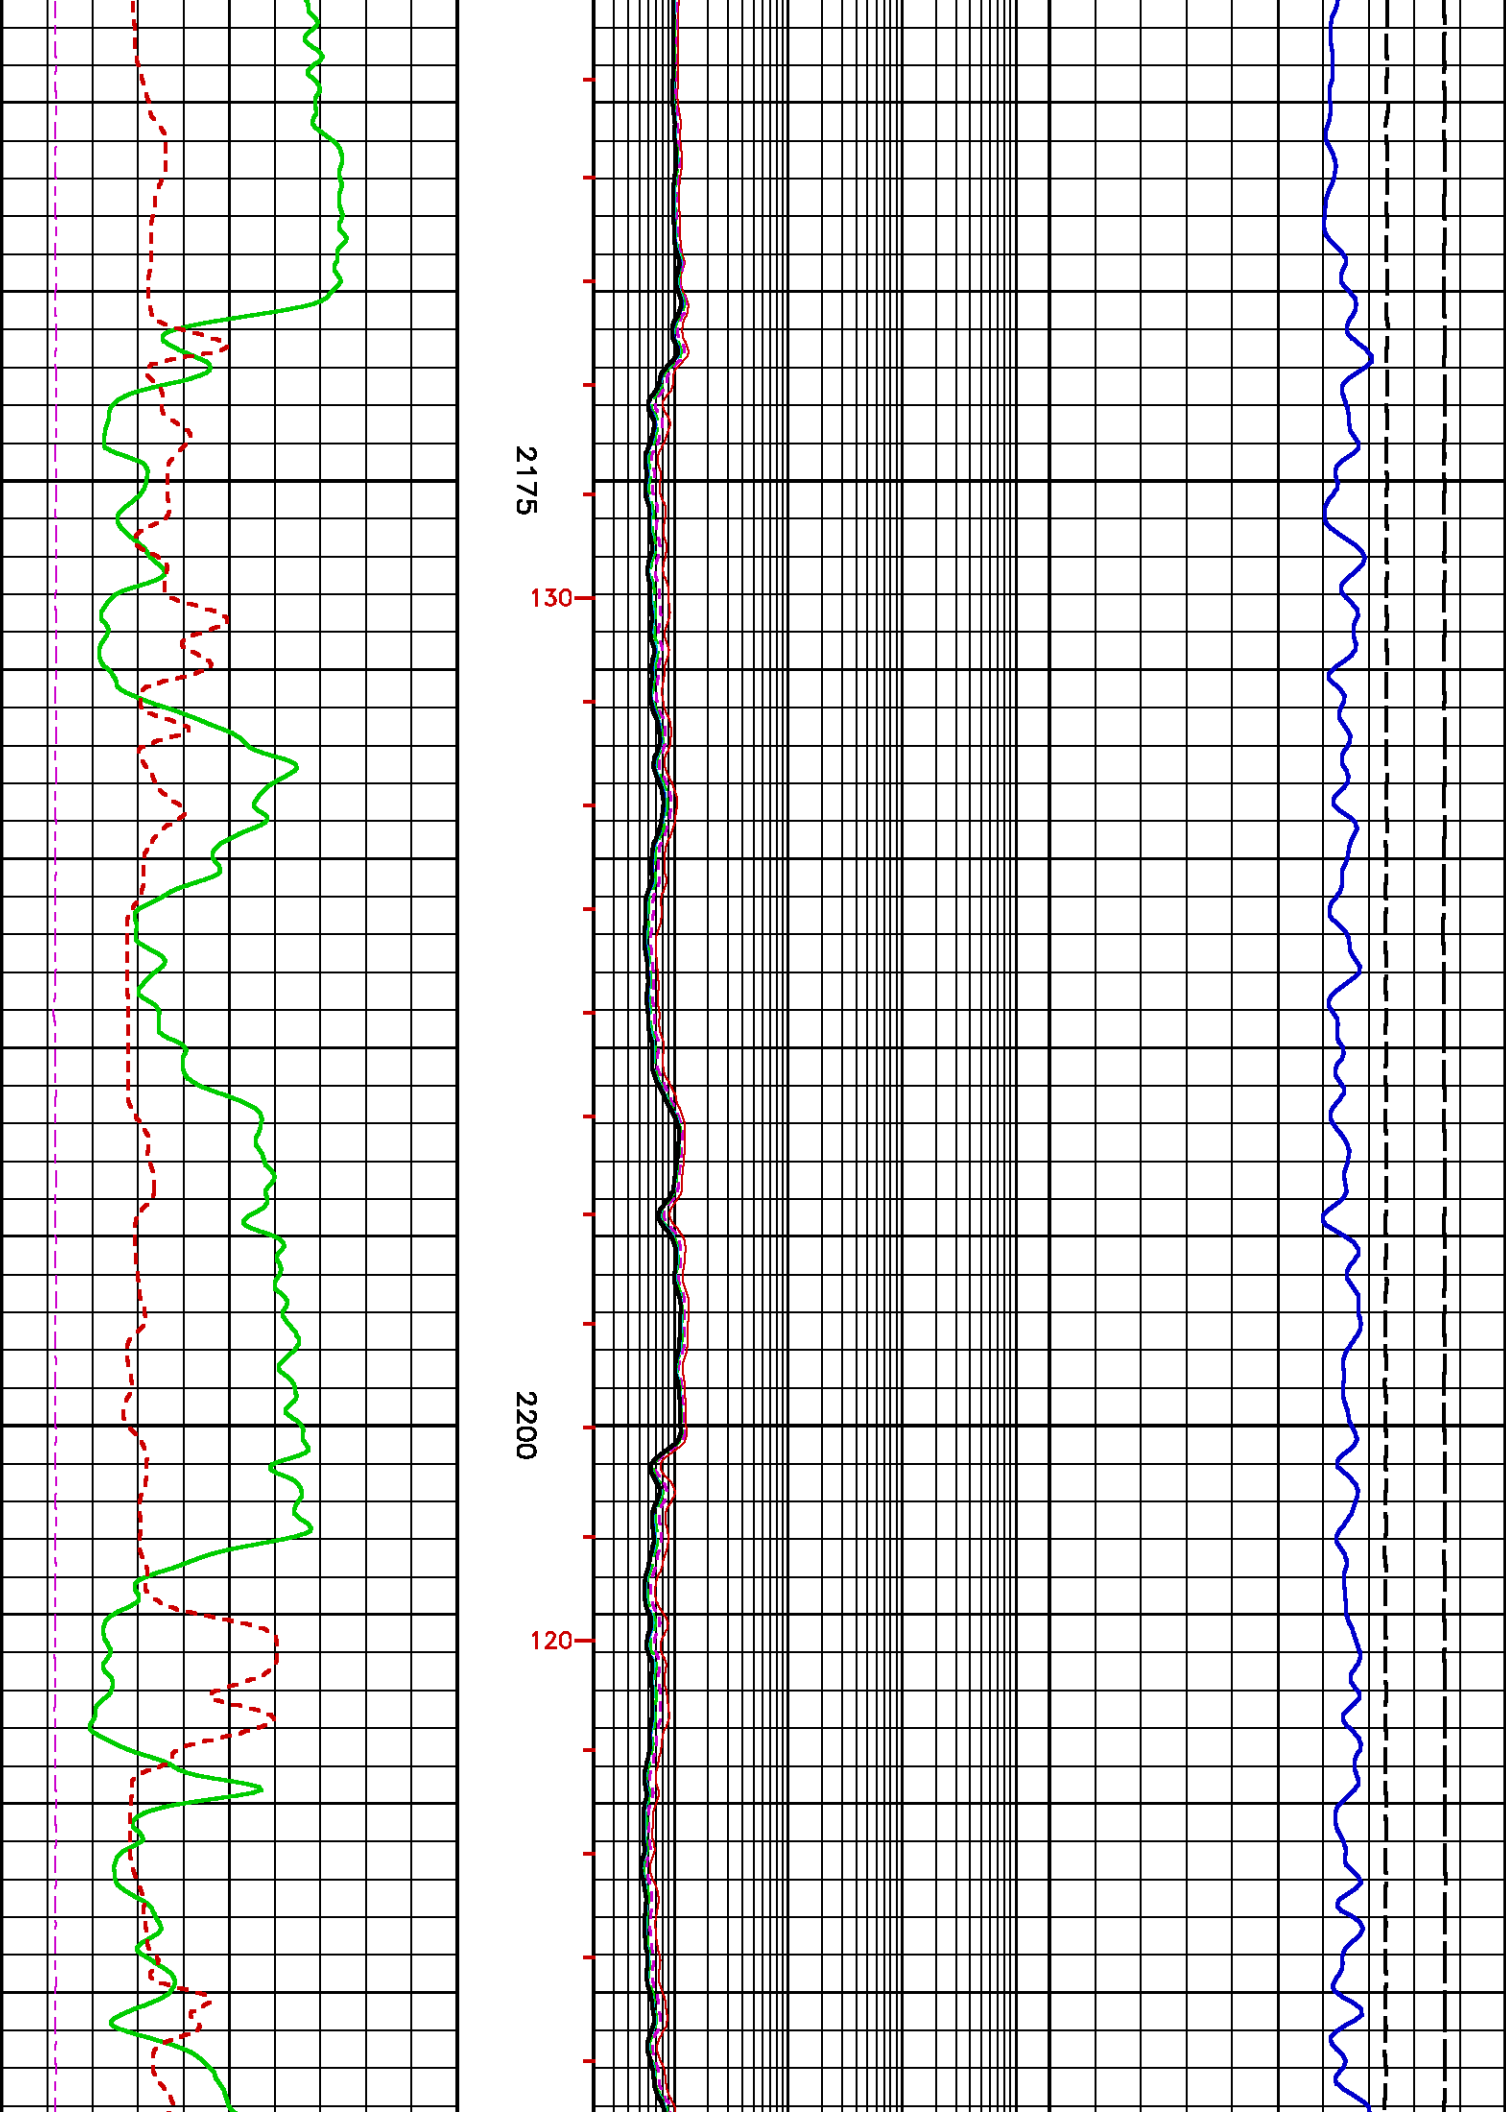



2225



2250



100

110

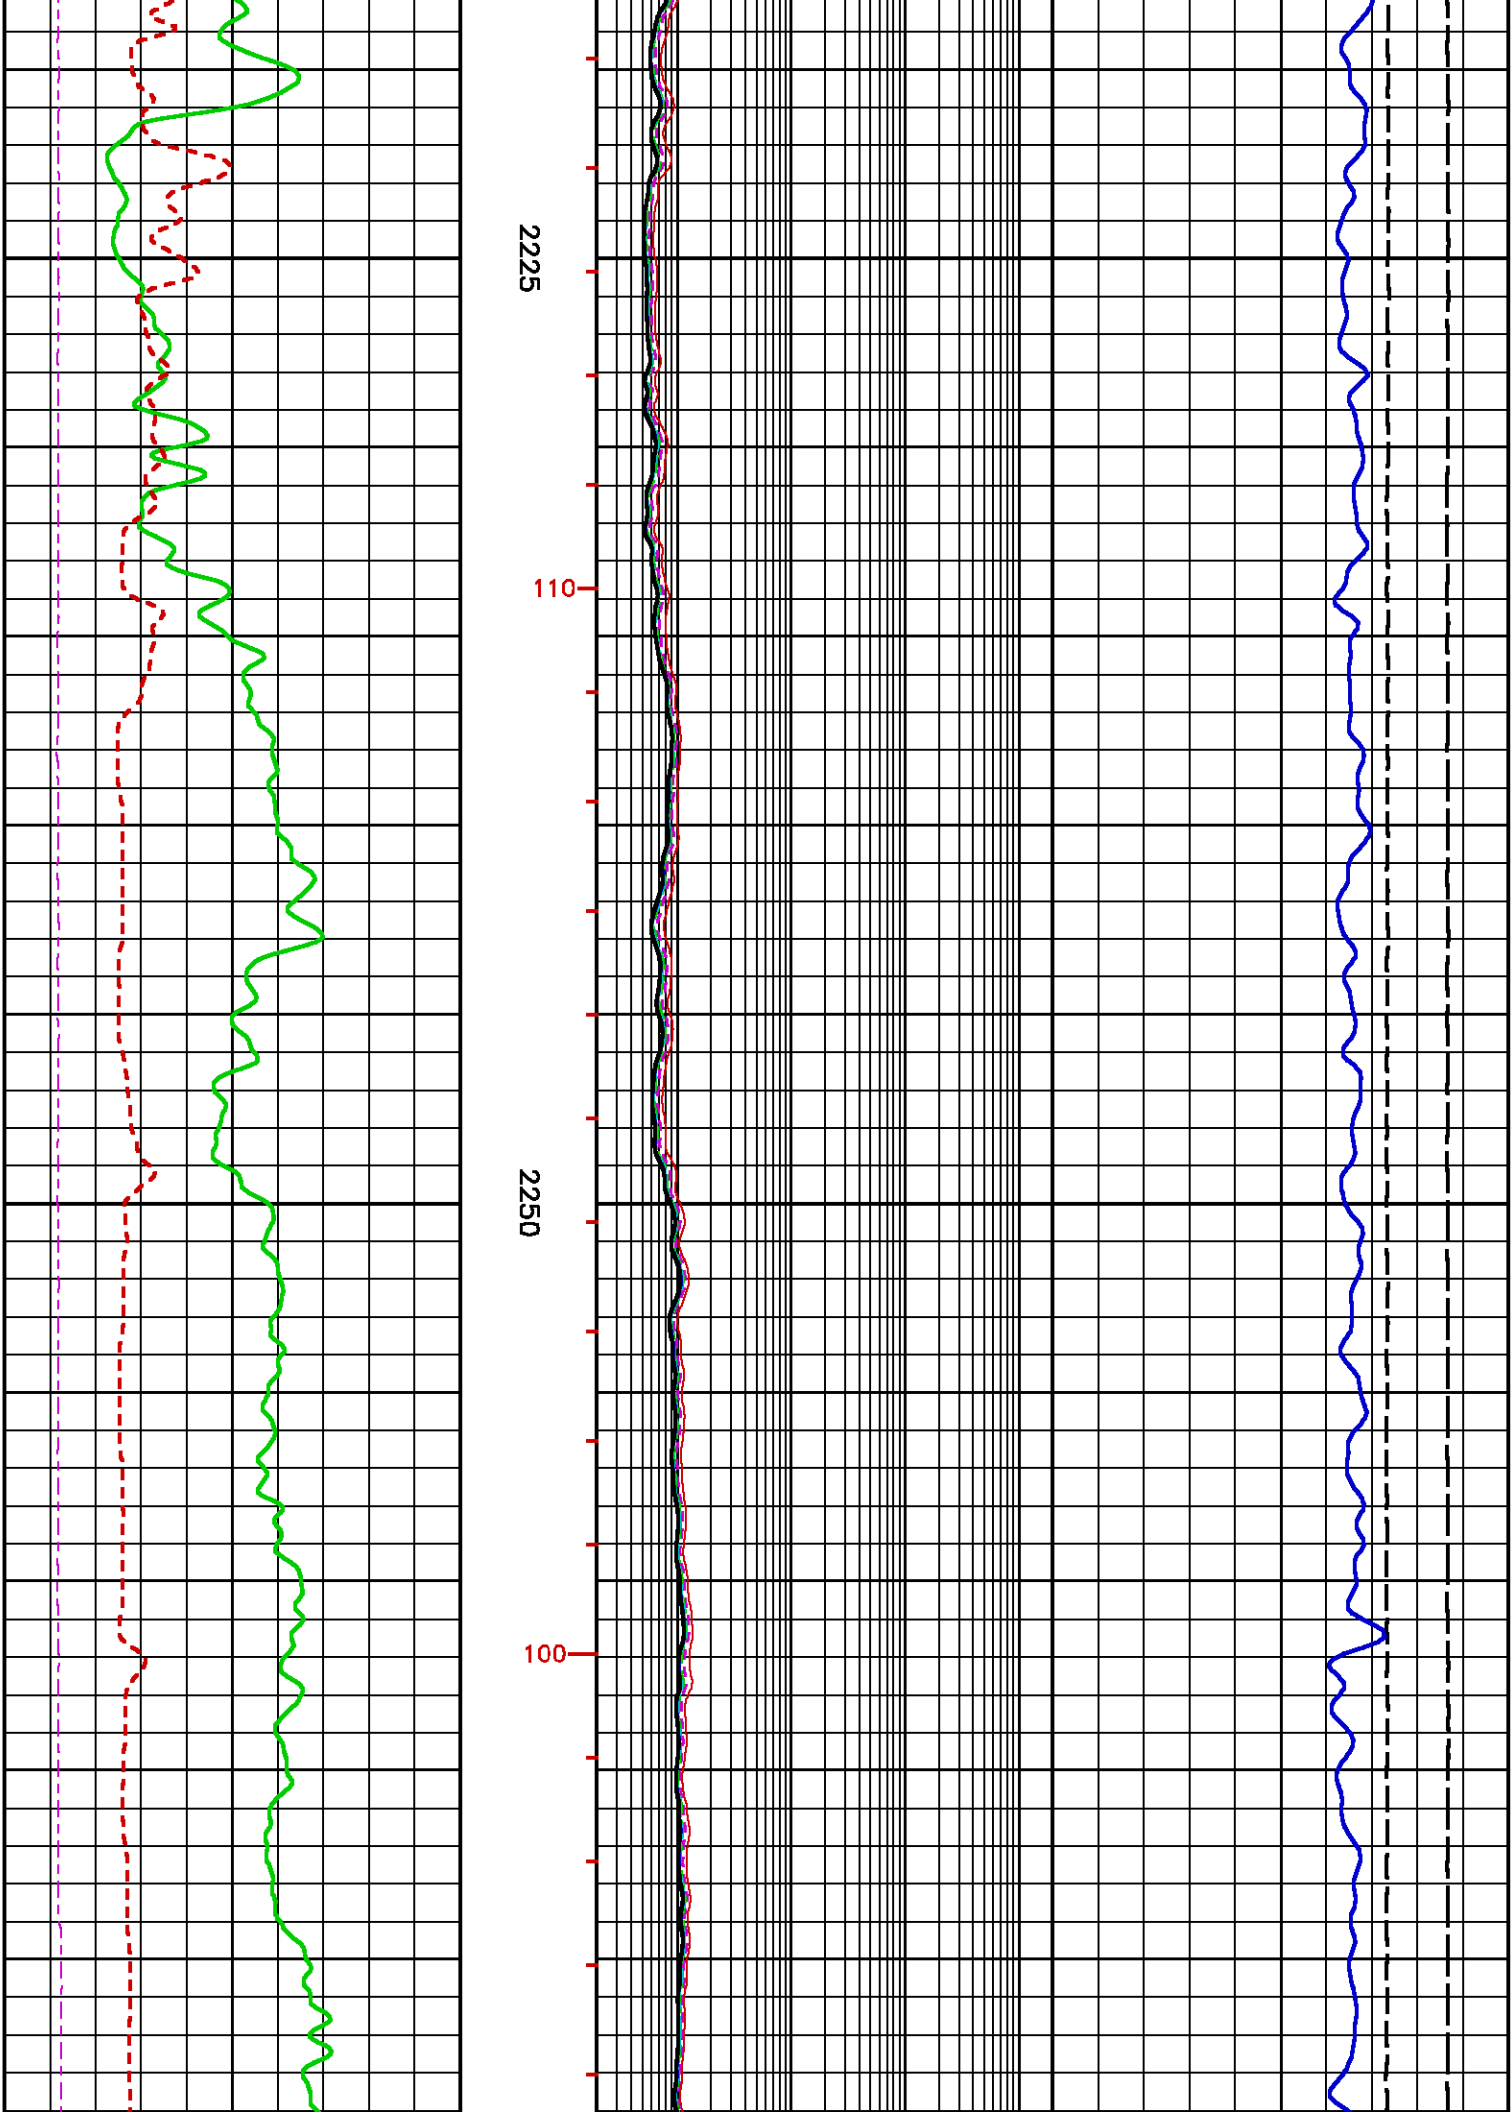

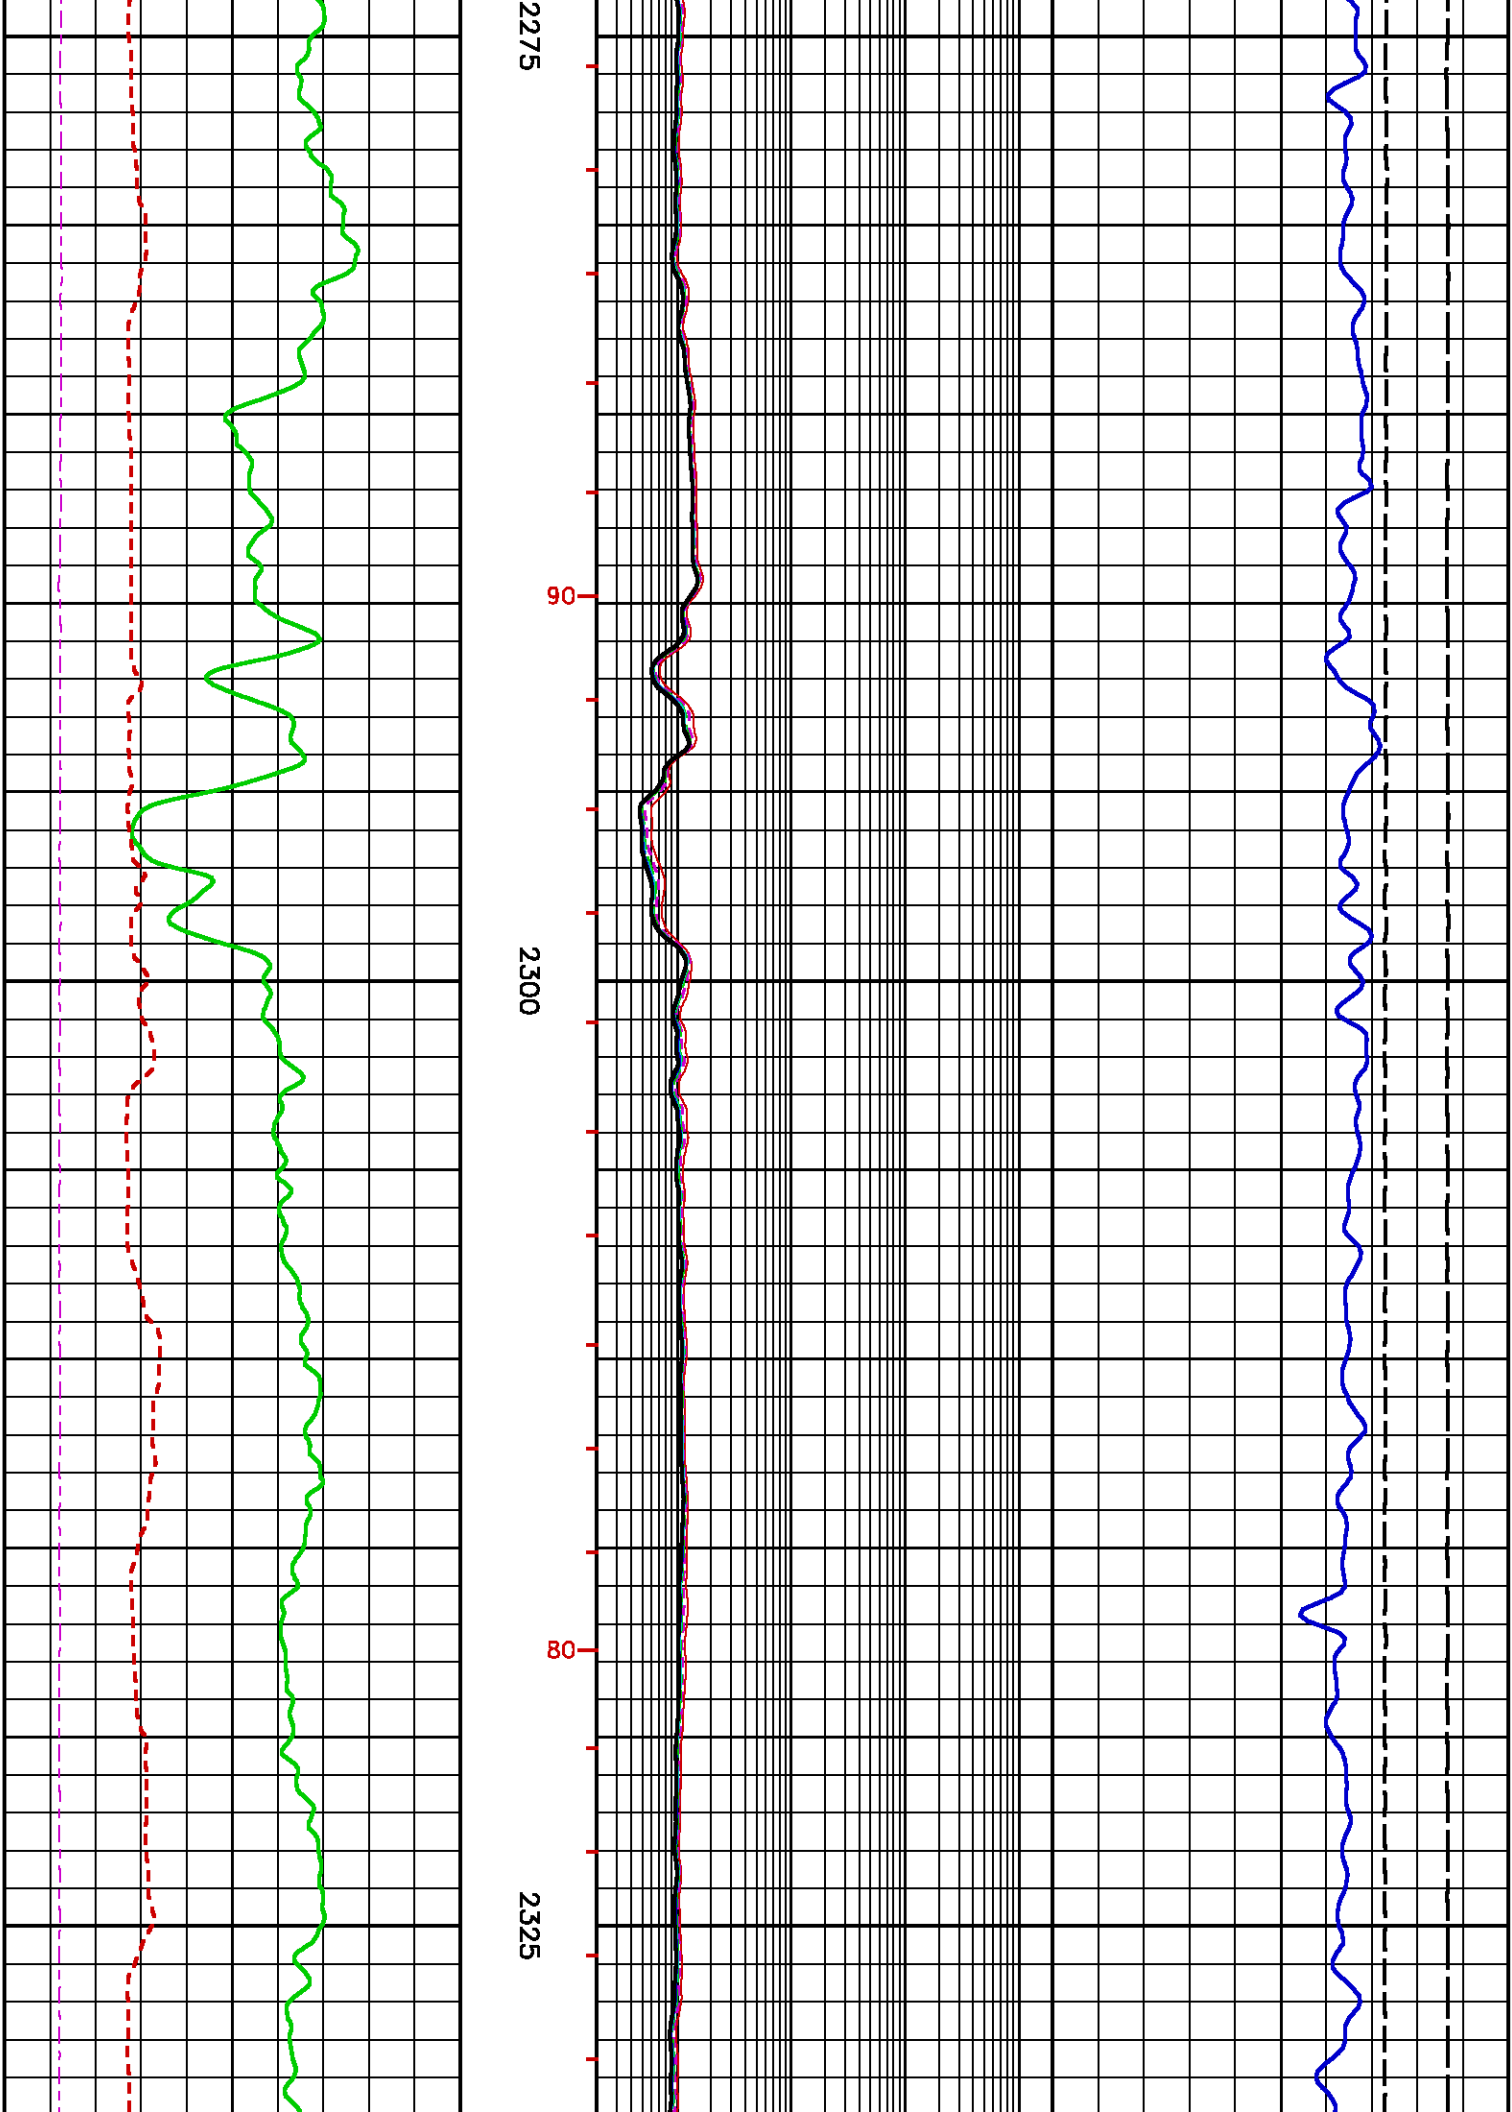

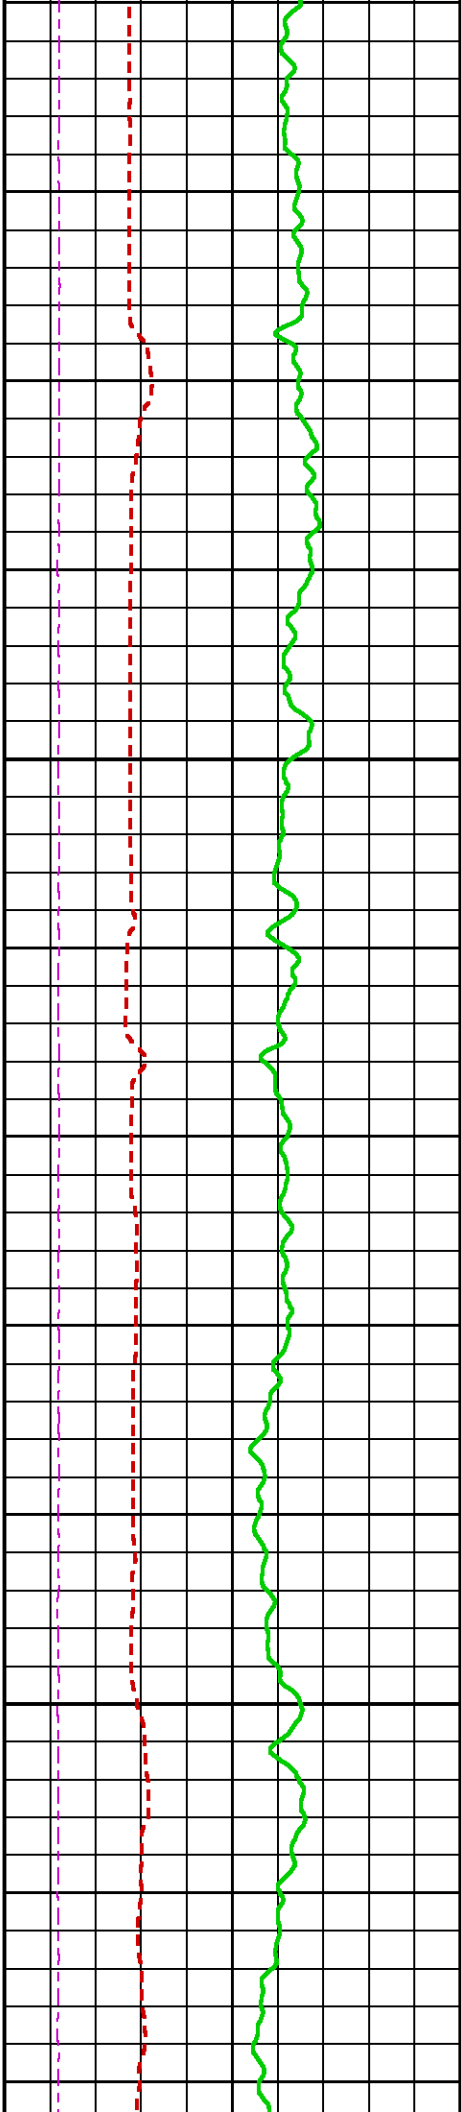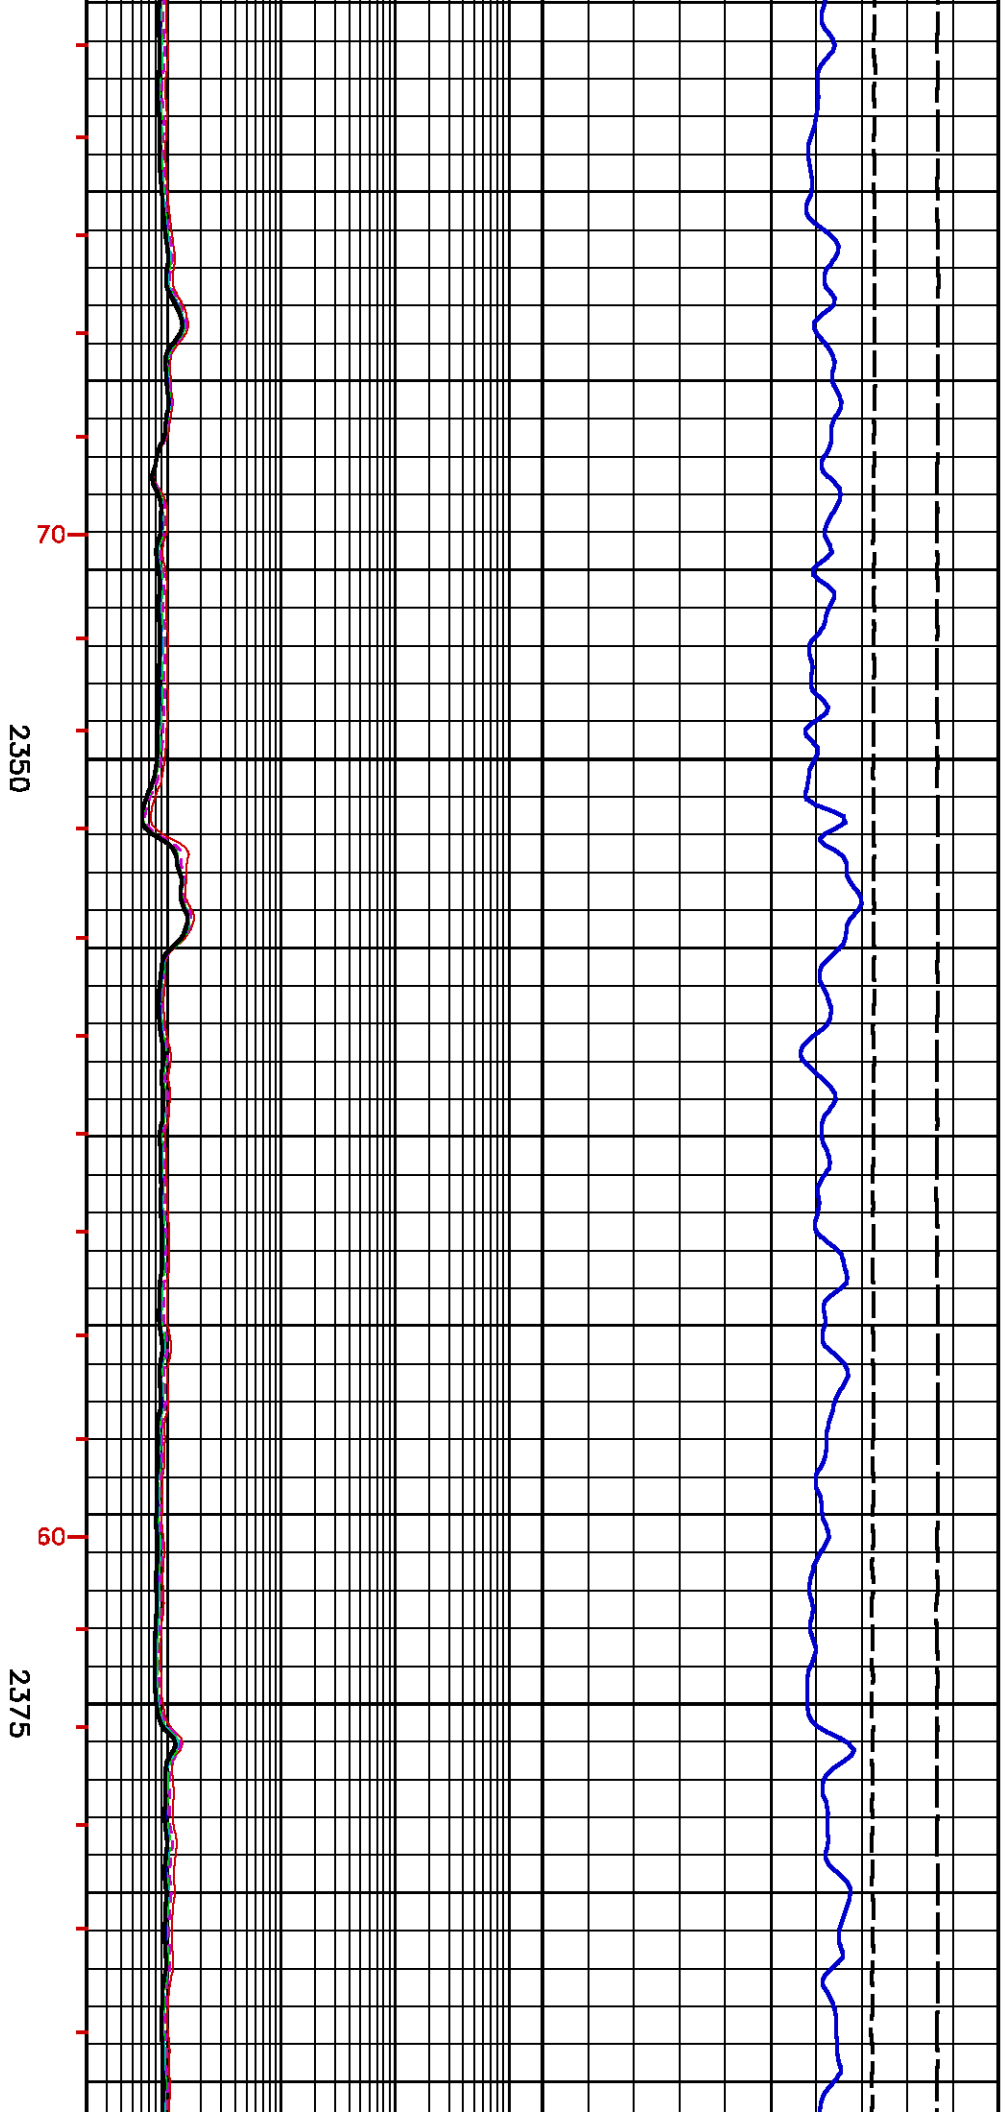

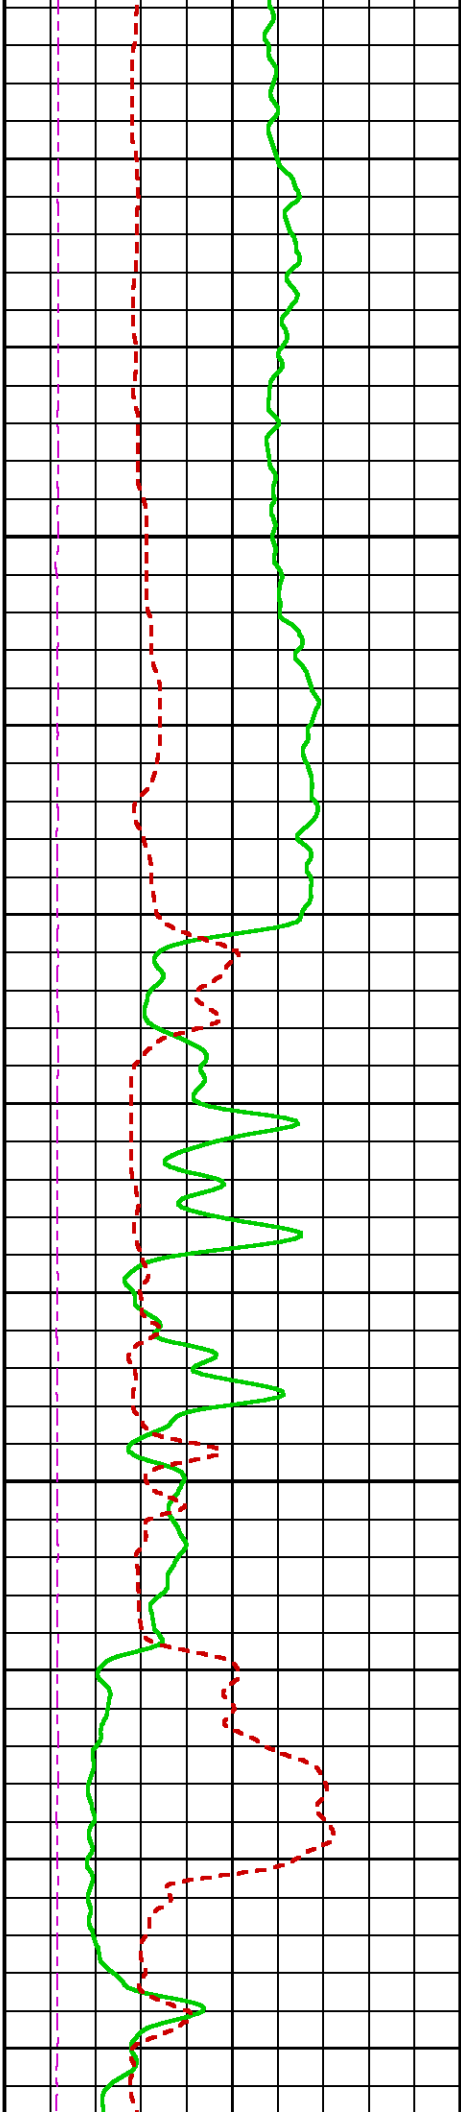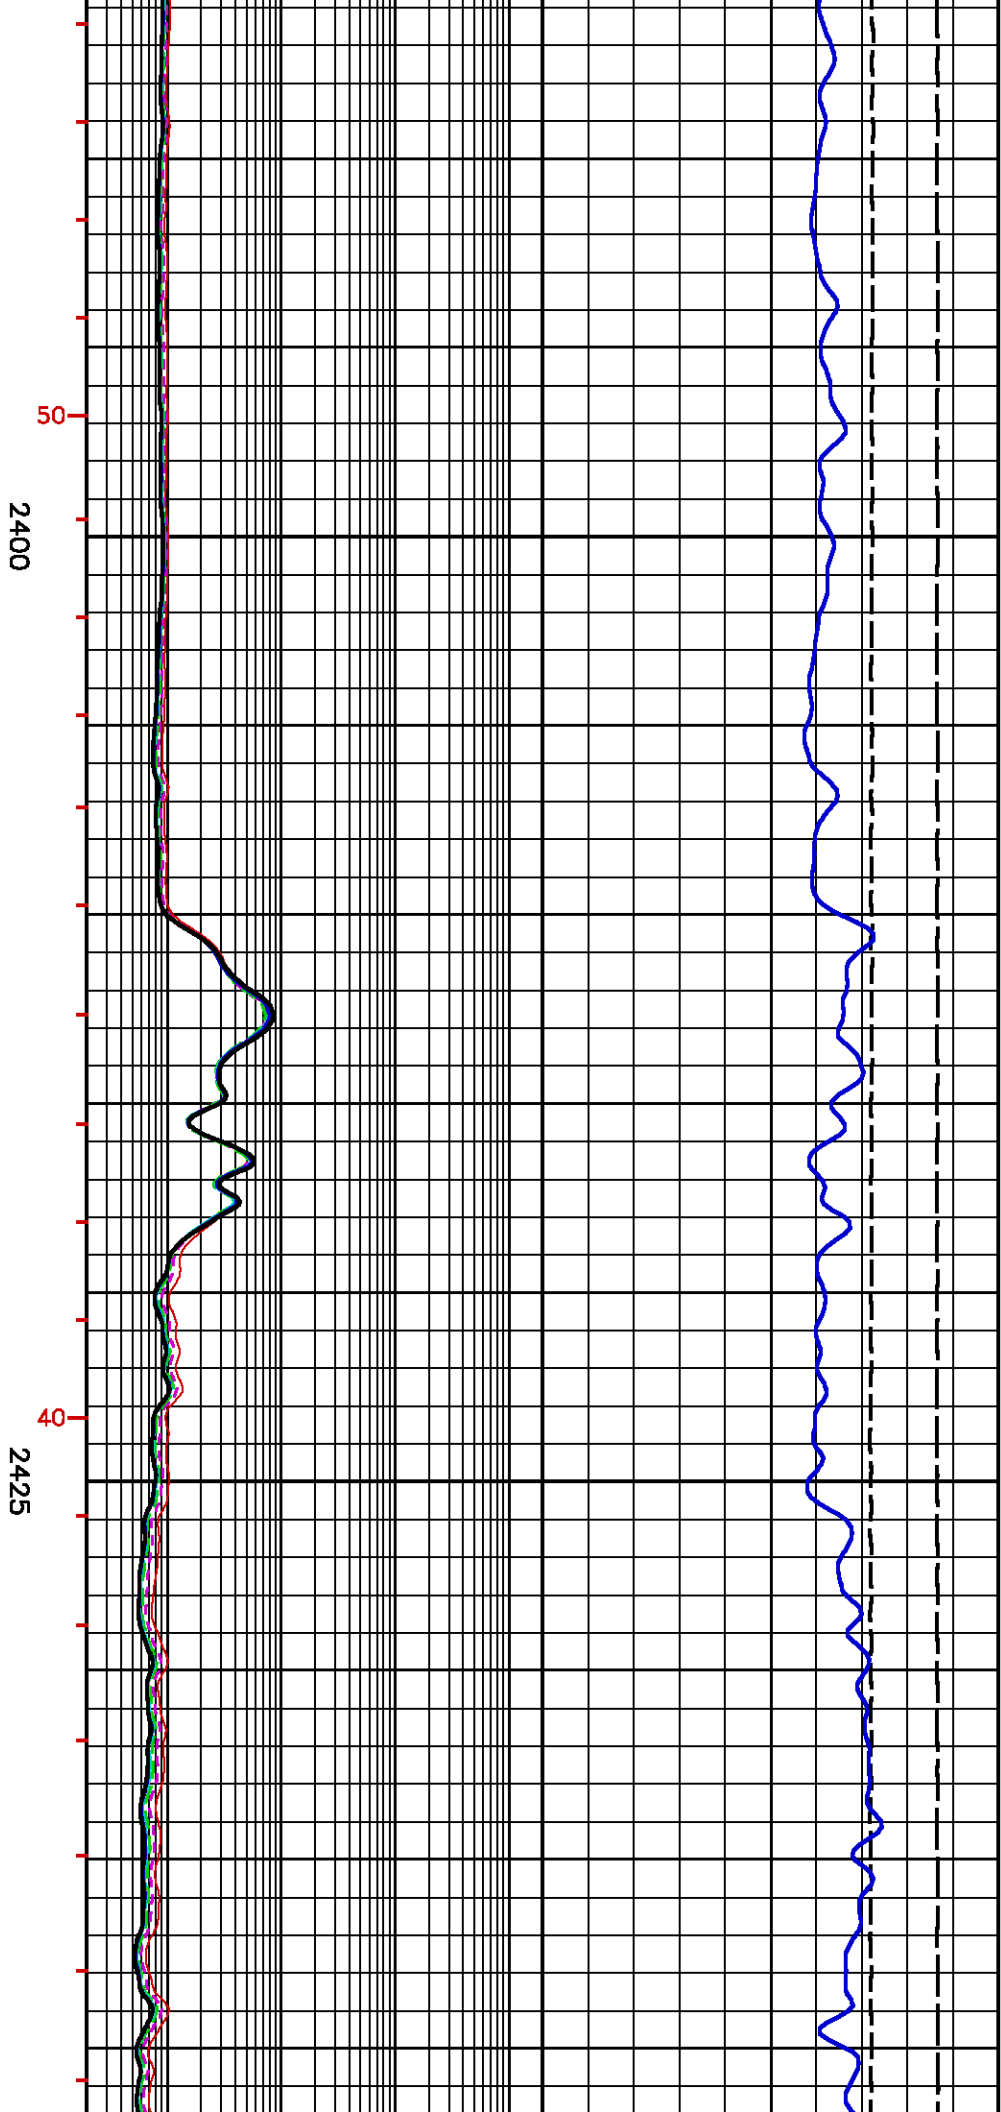


2450

30

2475

20

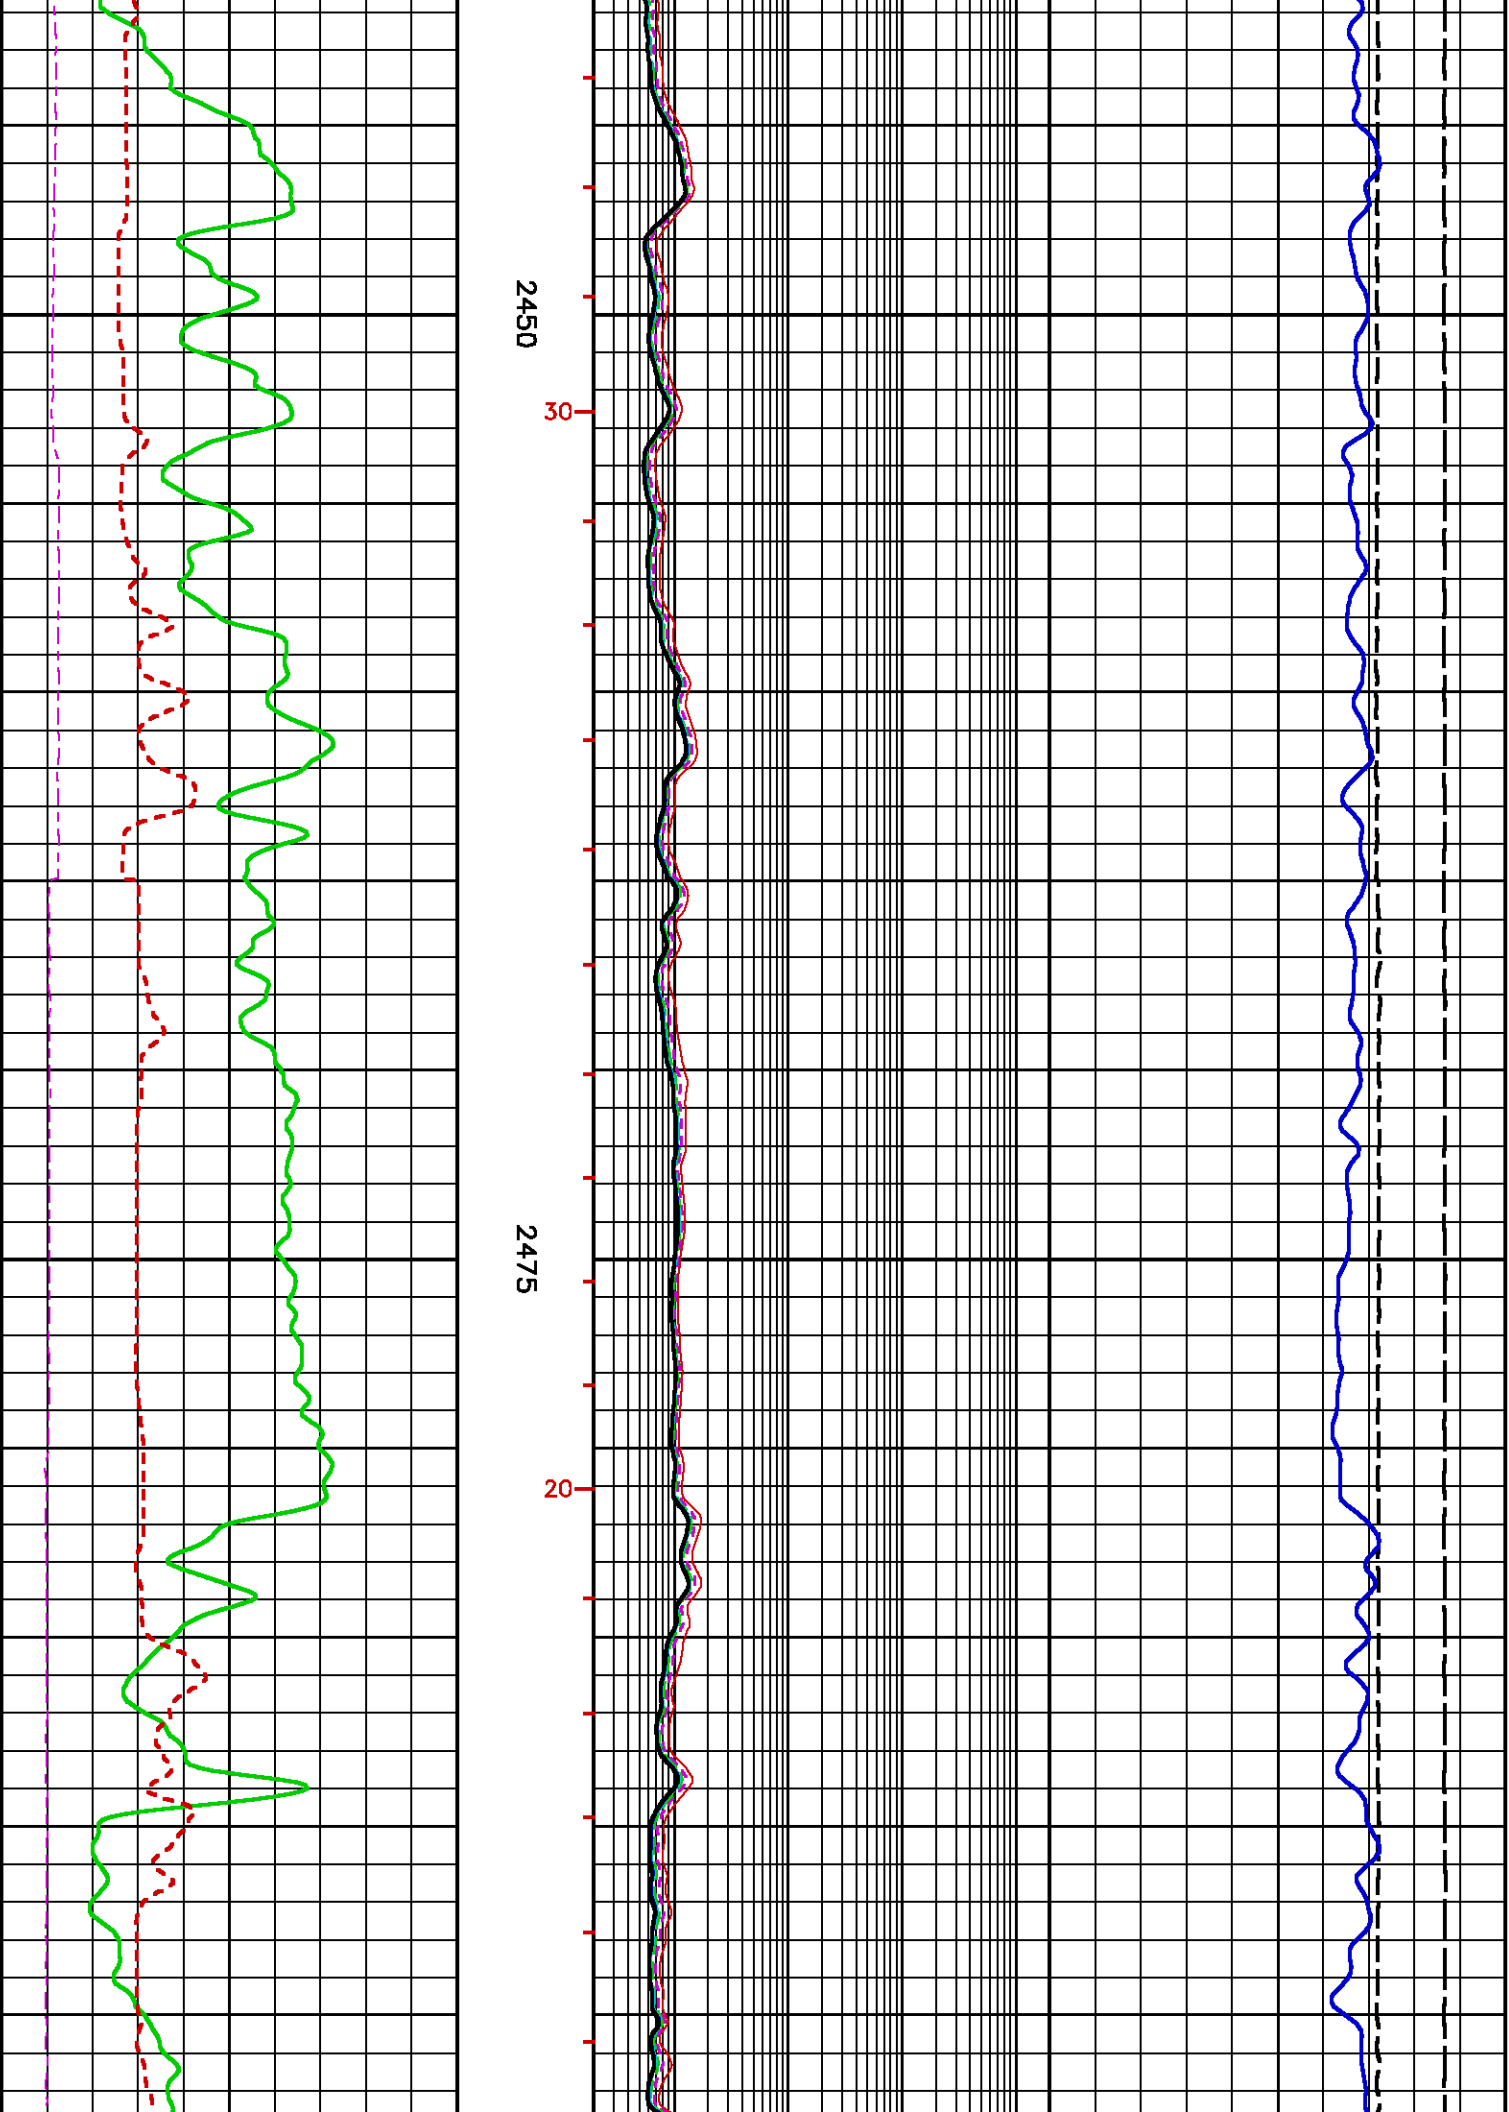

2500

2525

2550


10


- FR M2R1
- FR M2R2
- FR M2R3
- FR M2R6
- FR M2R9
- FR M2RX

FR DT24Q1

FR GR

FR CALX

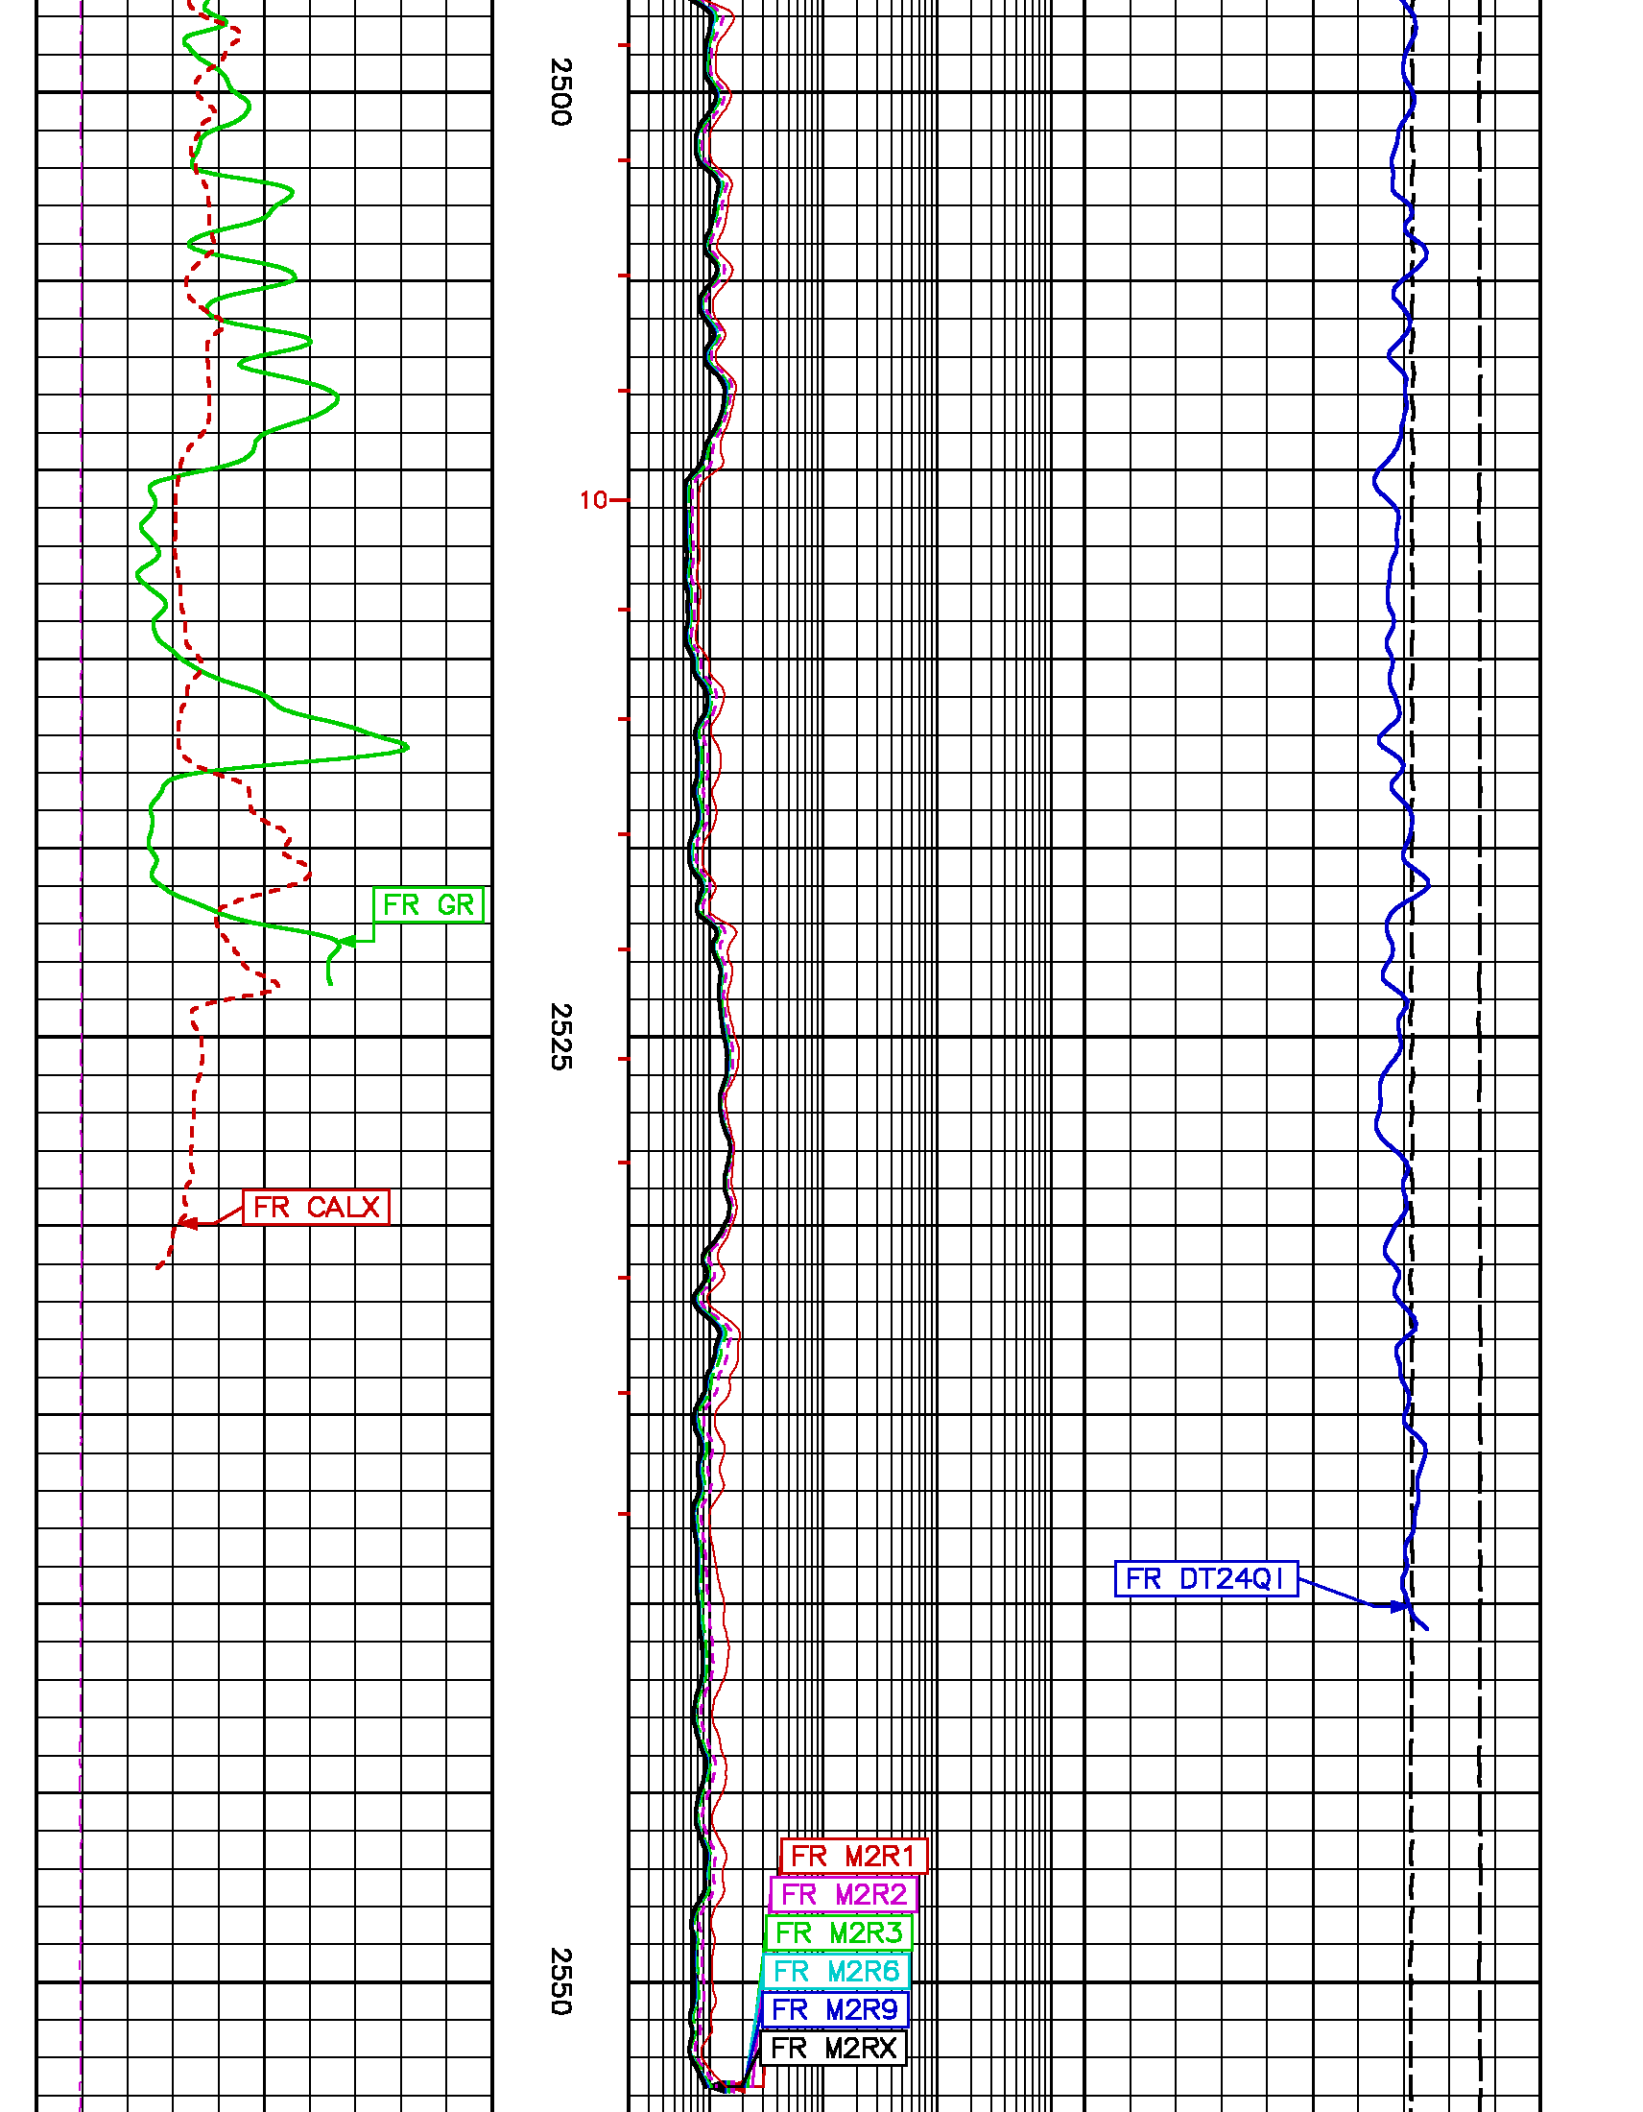

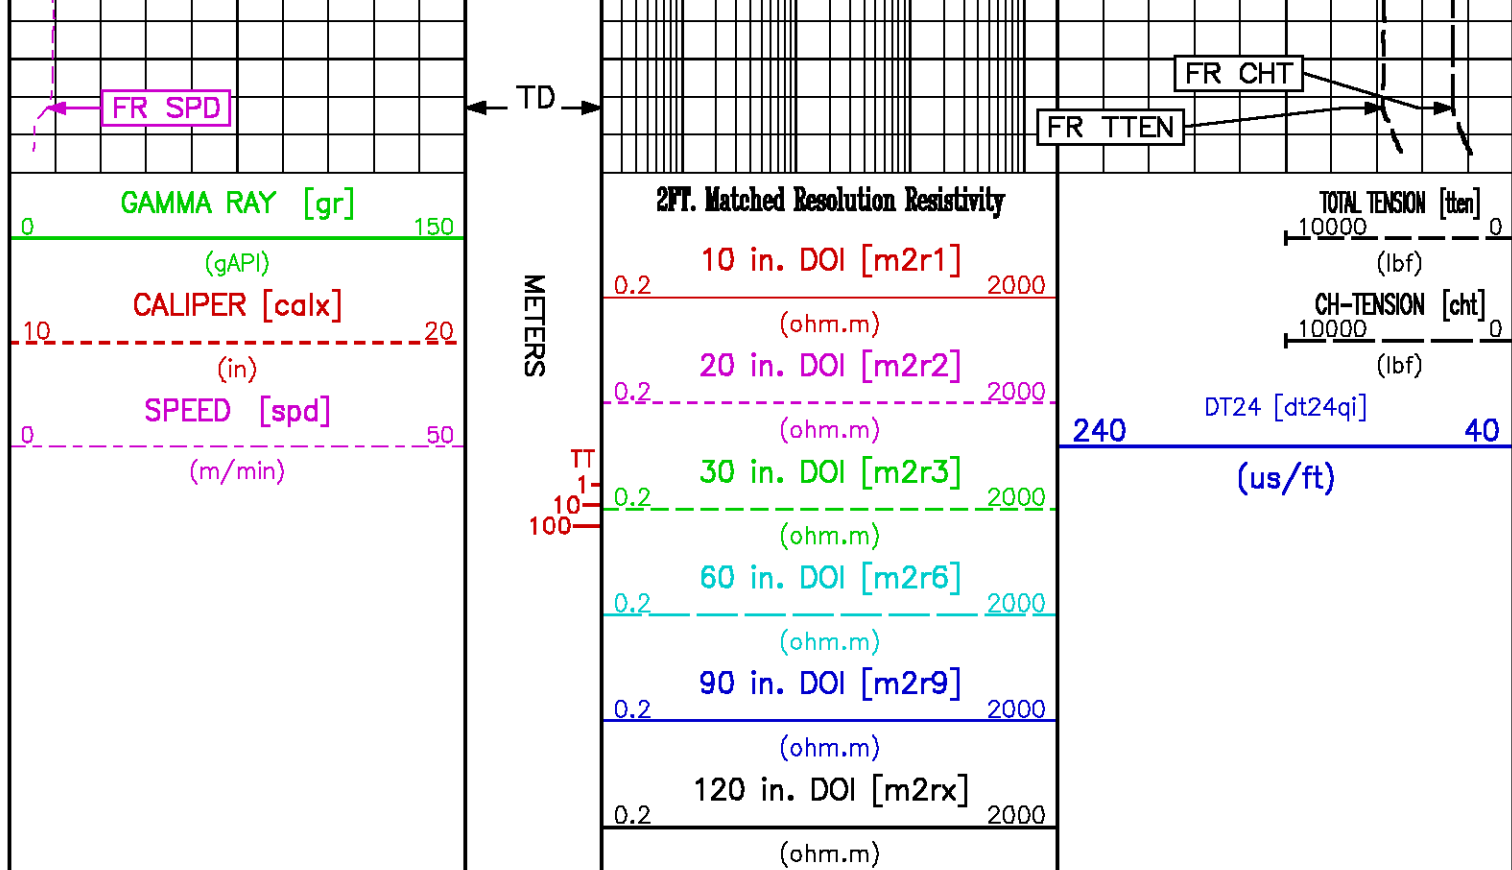

RUN 1 REPEAT LOG 1:200 SCALE

ECLIPS 5.1i Sep 16, 2005
Updates: 1,2,37

Fri Oct 27 16:03:12 2006

Pcrplt /main/61

Cplot 9.18

Pdf_Cpp /main/16

Fileview 5.00

PARAMETER AND FILTER SUMMARY REPORT

FILE: /data/peak/bilabar1_D3/177702.prm
LOGGING MODE: DEPTH DIRECTION: UP
TOP DEPTH: 2380.755 m BOTTOM DEPTH: 2512.428 m

SYMMETRIC FILTER

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
CHT	FILTER ()	medium (1)		TOP	BOTTOM
Y AXIS CALIPER	FILTER ()	medium (1)		"	"
SPEED	FILTER ()	medium (1)		"	"
TENSION	FILTER ()	medium (1)		"	"
GR	FILTER ()	medium (1)		"	"
X AXIS CALIPER	FILTER ()	medium (1)		"	"
	FILTER (.h)	medium (1)		"	"
	FILTER (.i)	medium (1)		"	"
DT24	FILTER ()	light (2)		"	"

BOREHOLE & CEMENT

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
BIT SIZE	BIT SIZE	12.250	In	TOP	BOTTOM
BOREHOLE CORR DIAMETER SOURCE	CALIPER/FIXED DIA. (mbh*)	USE CALIPER		"	"
BOREHOLE CORR DIAMETER	FIXED DIAMETER (mbh*)	12.250	In	"	"

MUD VALUES SOURCE	RMUD SOURCE (HDIL)	OIL BASE MUD			
MUD VALUES	MUD SAMPLE TEMP	75.0	degF		
	MUD SAMPLE RES	1.000	ohm.m		
	MUD REFERENCE TEMP	75.0	degF		
	TEMP GRADIENT	1.200	0.01 degF/ft		

ACOUSTIC POROSITY					
MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
DELTA T CURVE SELECTION	DT24 SOURCE	FIRST ARRIVAL DT24		TOP	BOTTOM

ACOUSTIC PICK CONTROL					
MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
DELTA-T REJECTION RANGE	REJECTION DTmin	40	us/ft	TOP	BOTTOM
	REJECTION DTmax	180	us/ft		
FIRST ARRIVAL PICK	SEARCH START OFFSET {sfa1*}	87	us		
	SEARCH START OFFSET {sfa2*}	87	us		
	SEARCH START OFFSET {sfa3*}	87	us		
	SEARCH START OFFSET {sfa4*}	87	us		
	SEARCH WINDOW LENGTH	1045	us		
	THRESHOLD FACTOR	0.30			
	THRESHOLD MINIMUM {sfa1*}	1.8	pct		
	THRESHOLD MINIMUM {sfa2*}	1.8	pct		
	THRESHOLD MINIMUM {sfa3*}	1.8	pct		
	THRESHOLD MINIMUM {sfa4*}	1.8	pct		
	E3 THRESHOLD	OFF			

ACOUSTIC QUALITY CONTROL					
MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
CYCLE SKIP LIMIT	CYCLE SKIP LIMIT	100	us	TOP	BOTTOM

ACOUSTIC WAVEFORM FILTER					
MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
WAVEFORM FILTER - DELTA T	SURFACE WAVE FILTER	ON		TOP	BOTTOM
	LOW FREQ CUTOFF	4000	Hz		
	HIGH FREQ CUTOFF	20000	Hz		


HDIL PROCESSING					
MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
HDIL TEMPERATURE CORRECTION	TEMP CORR SOURCE	USE RXTEMP		TOP	BOTTOM
ADAPTIVE BOREHOLE CORRECTION	ABC PROCESSING	ON			
	ABC to CALCULATE	STANDOFF			
	STANDOFF	1.50	In		
	TOOL POSITION	ECCENTERED			
	Rmud MULTIPLIER	1.000			


CURVE DESCRIPTION REPORT			
CURVE NAME	CURVE ALIAS	CREATION DATE	CURVE DESCRIPTION
F1:BIT	BIT	Oct 25 22:21:58 2006	BIT SIZE
F1:CALX	CAL	Oct 25 22:21:58 2006	CALIPER FROM X AXIS OF X-Y CALIPER(S)
F1:CHT	CHT	Oct 25 22:21:58 2006	CABLE HEAD TENSION
F1:DT24QI	DT24	Oct 25 22:21:58 2006	INTERVAL TRANSIT TIME OVER 24 INCH INTERVAL
F1:GR	GR	Oct 25 22:21:58 2006	GAMMA RAY
F1:M2R1	MOR1	Oct 25 22:21:58 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 10 INCH
F1:M2R2	MOR2	Oct 25 22:21:58 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 20 INCH
F1:M2R3	MOR3	Oct 25 22:21:58 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 30 INCH
F1:M2R6	MOR6	Oct 25 22:21:58 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 60 INCH
F1:M2R9	MOR9	Oct 25 22:21:58 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 90 INCH
F1:M2RX	MORX	Oct 25 22:21:58 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 120 INCH
F1:SPD	SPD	Oct 25 22:21:58 2006	SPEED
F1:TEN	TEN	Oct 25 22:21:58 2006	TOTAL TENSION

CURVE MEASURE POINT OFFSET							
CURVE	OFFSET (m)	CURVE	OFFSET (m)	CURVE	OFFSET (m)	CURVE	OFFSET (m)
BIT	0.00	GR	33.83	M2R6	2.44	TEN	0.00
CALX	26.37	M2R1	2.44	M2R9	2.44		
CHT	0.00	M2R2	2.44	M2RX	2.44		

CHI	0.00	M2R2	2.44	M2R3	2.44	SPD	0.00
DT24QI	13.56	M2R3	2.44				


Presentation	: sys1:/dat1a/peak/bilabari_D3/hdilac_rpt_200.pdf [1:200 Scale]
Plot Interval	: 2343.07 - 2512.31 Meters
Data File 1	: F1 : sys1:/dat1a/peak/bilabari_D3/[777]02.off
Created On	: Oct 25 22:21:58 2006
Company	: PEAK PETROLEUM
Well	: BILABRI D3
Field	: BILABRI
File Interval	: 2343.07 - 2512.47 Meters
Oct	: [777]

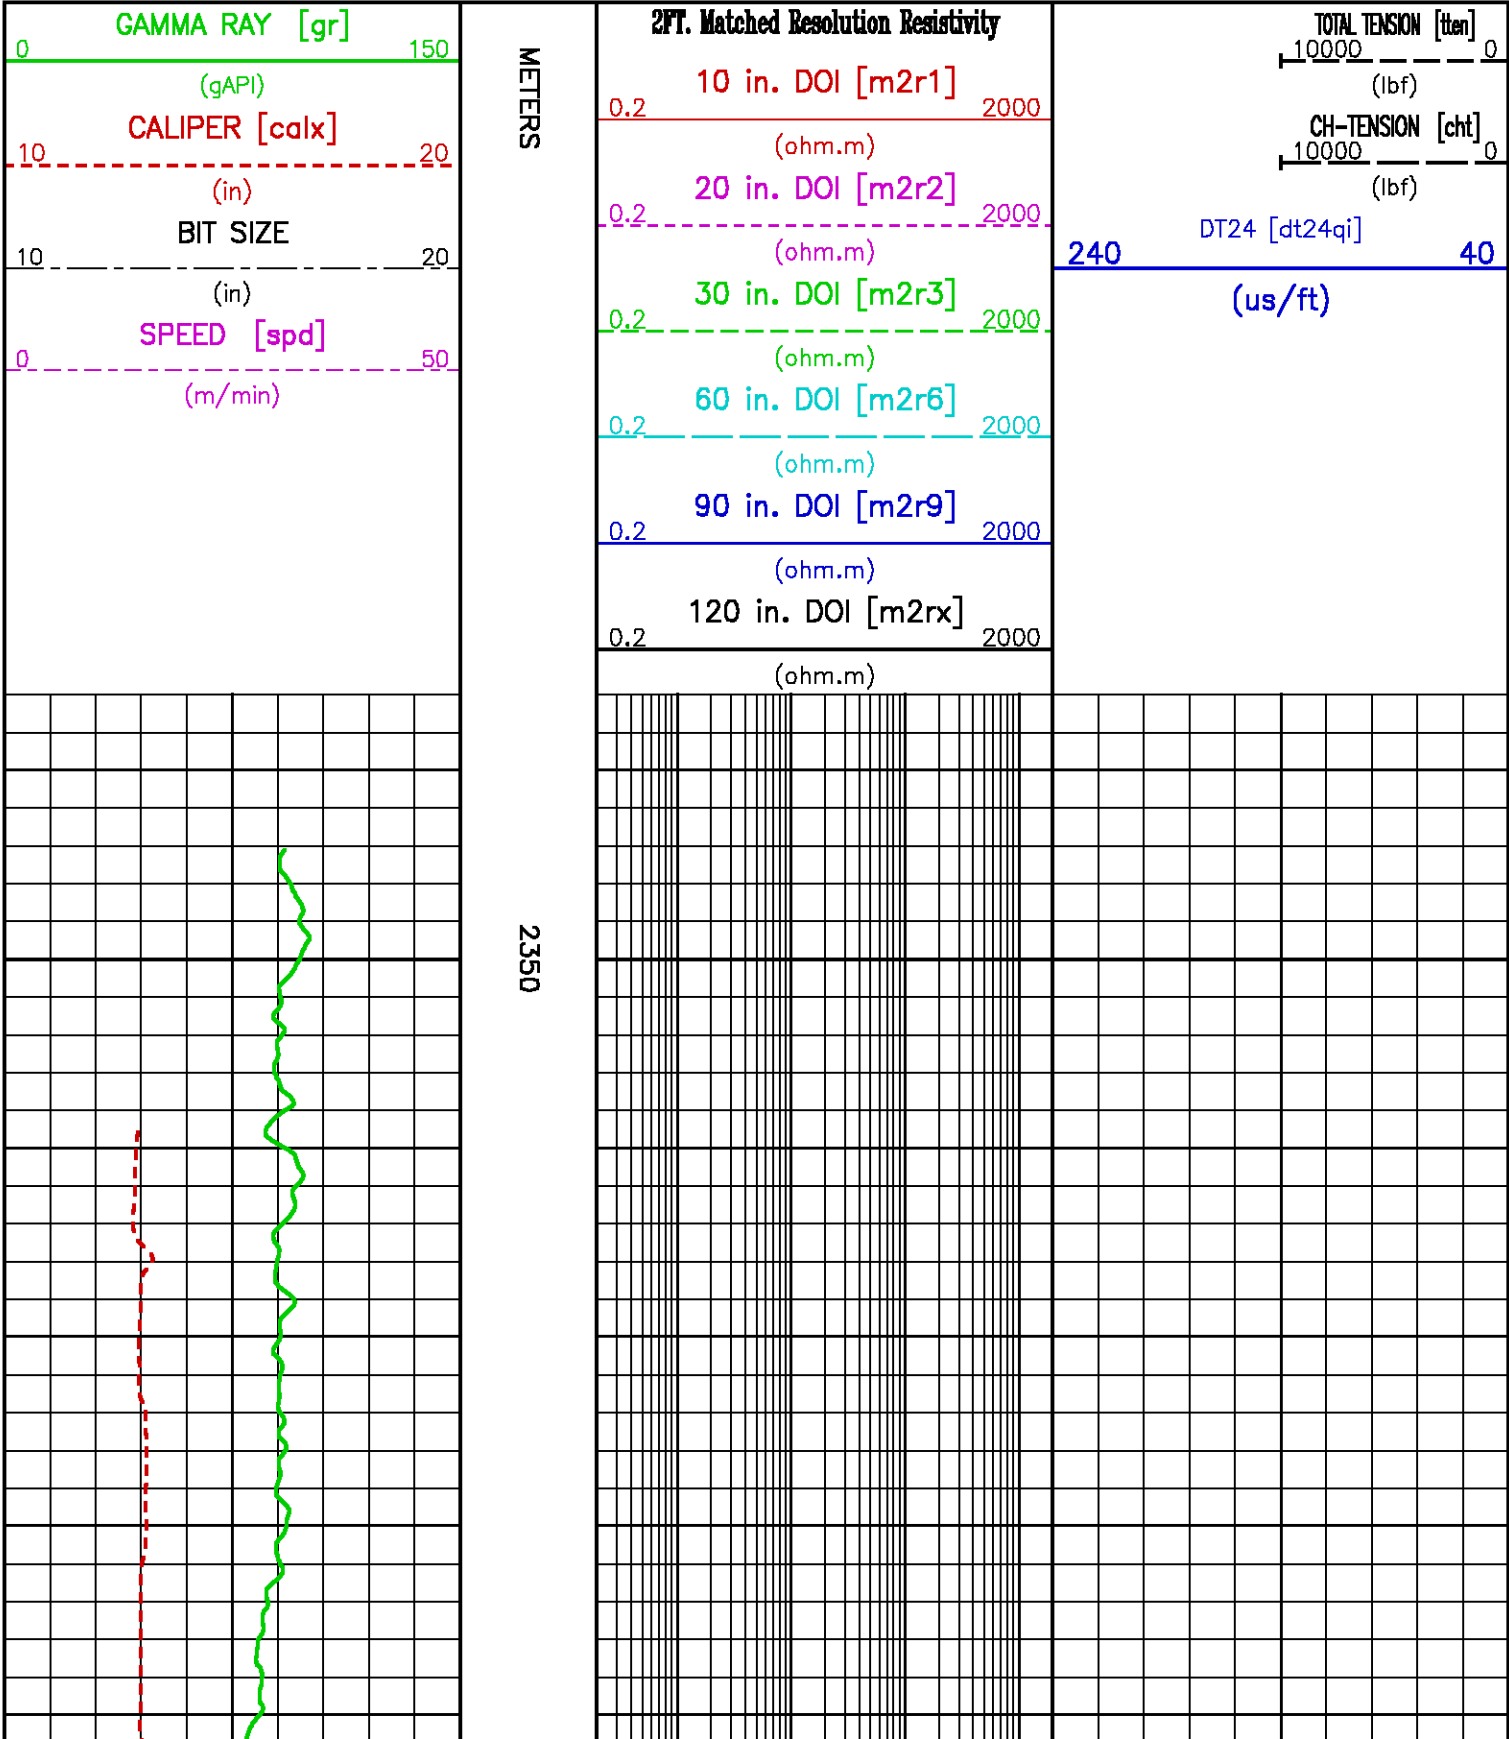


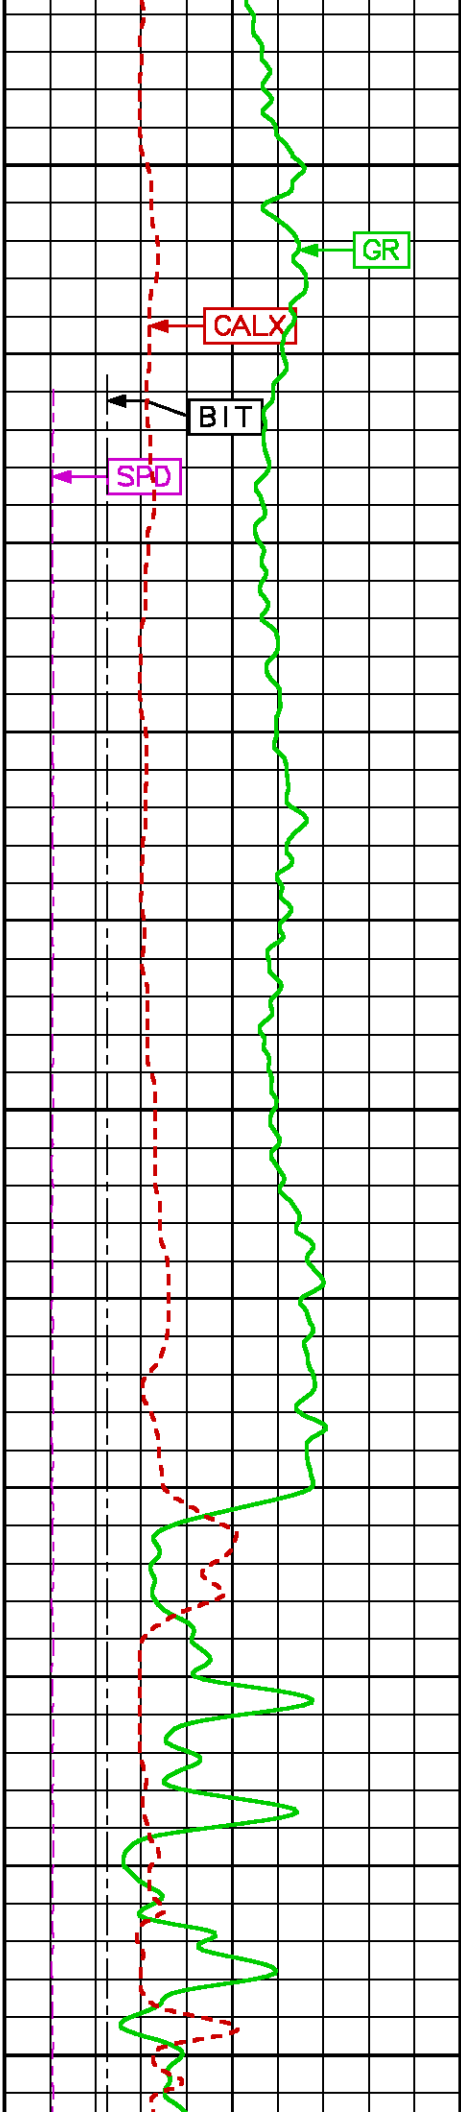

2375


2425

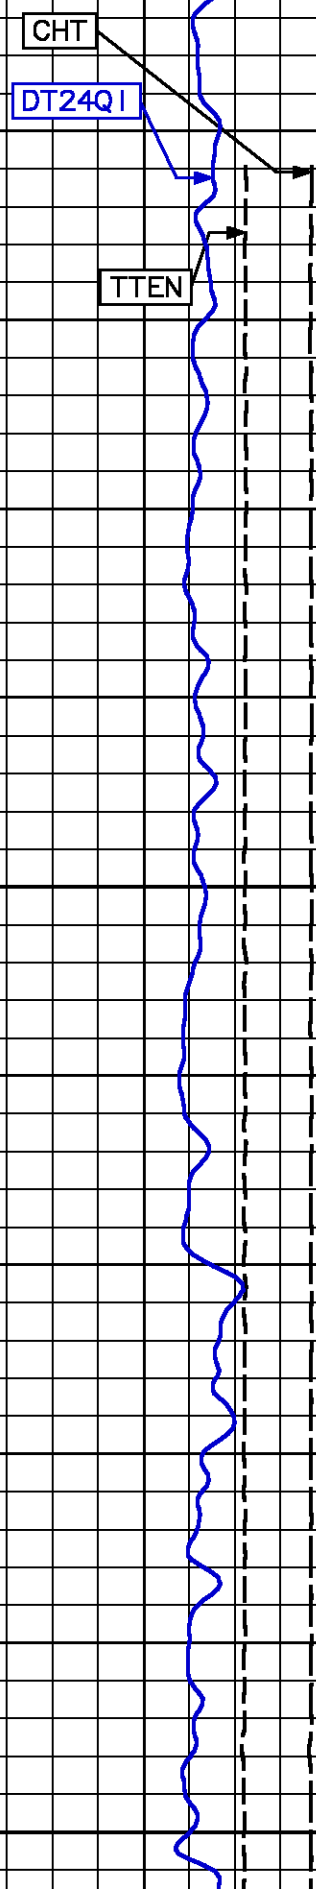


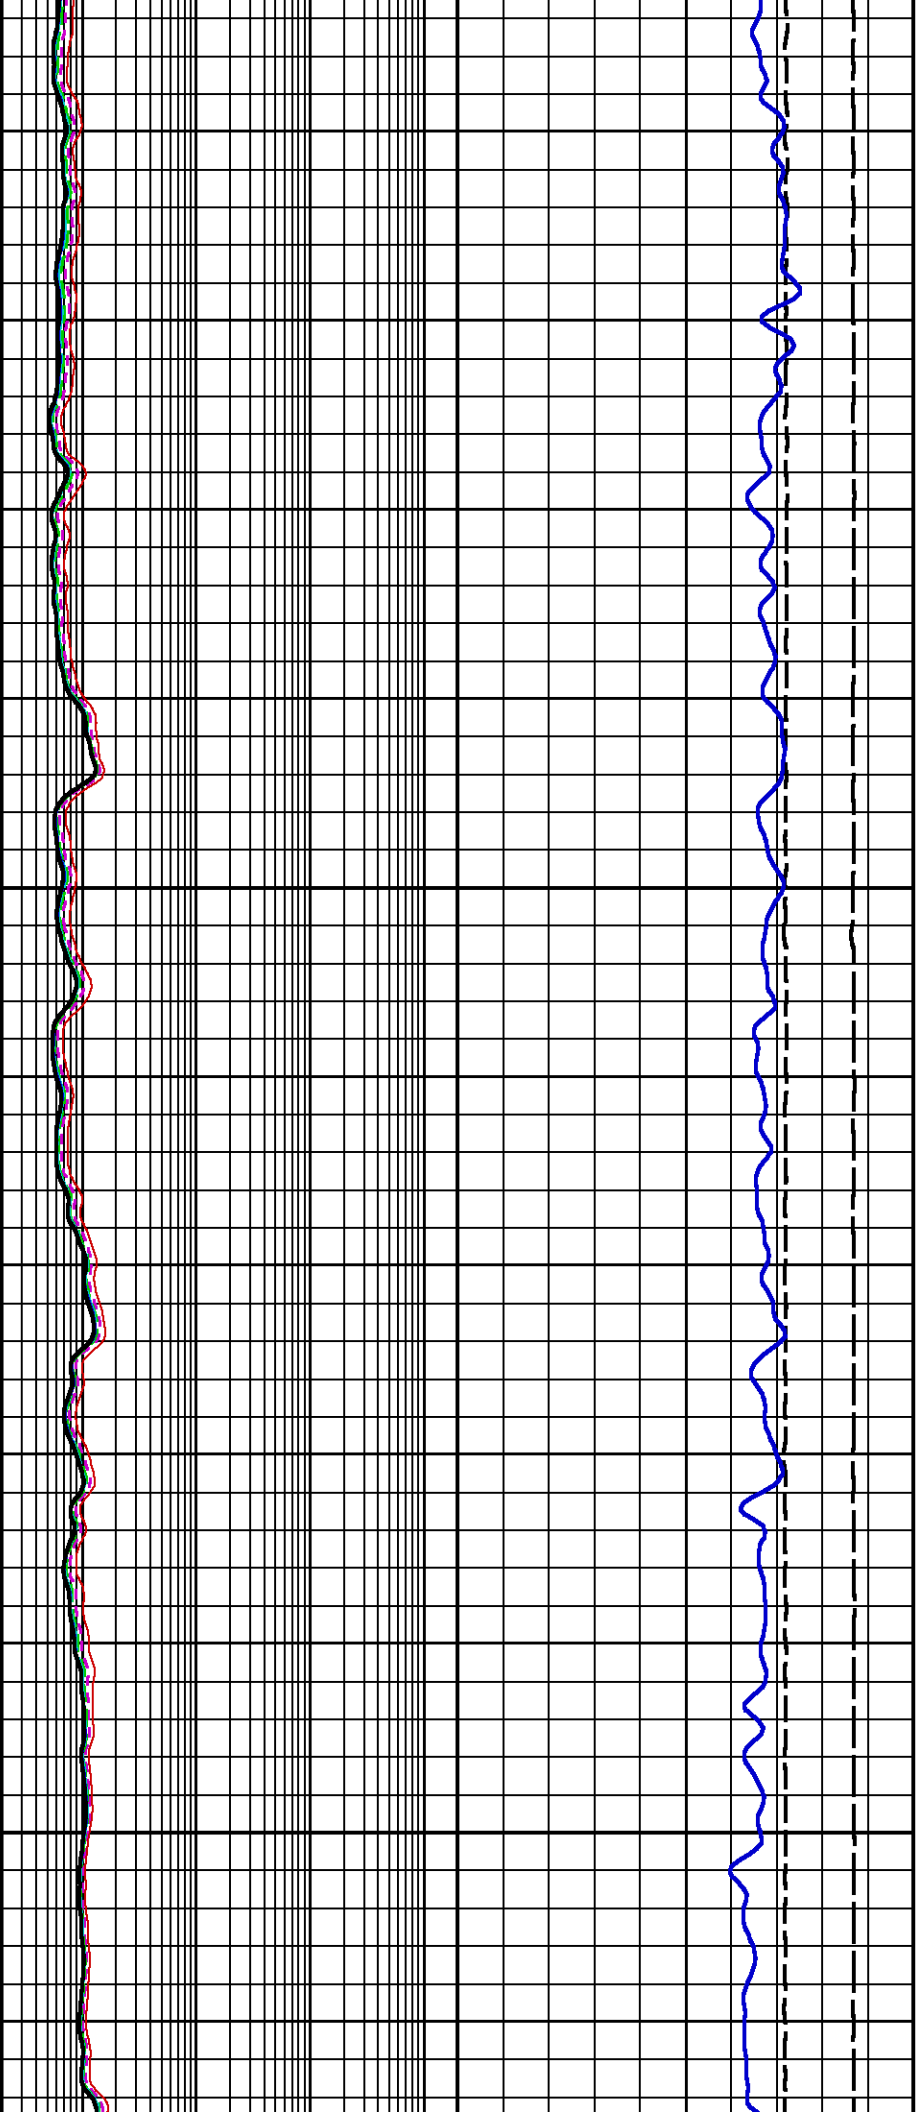

2450

2475

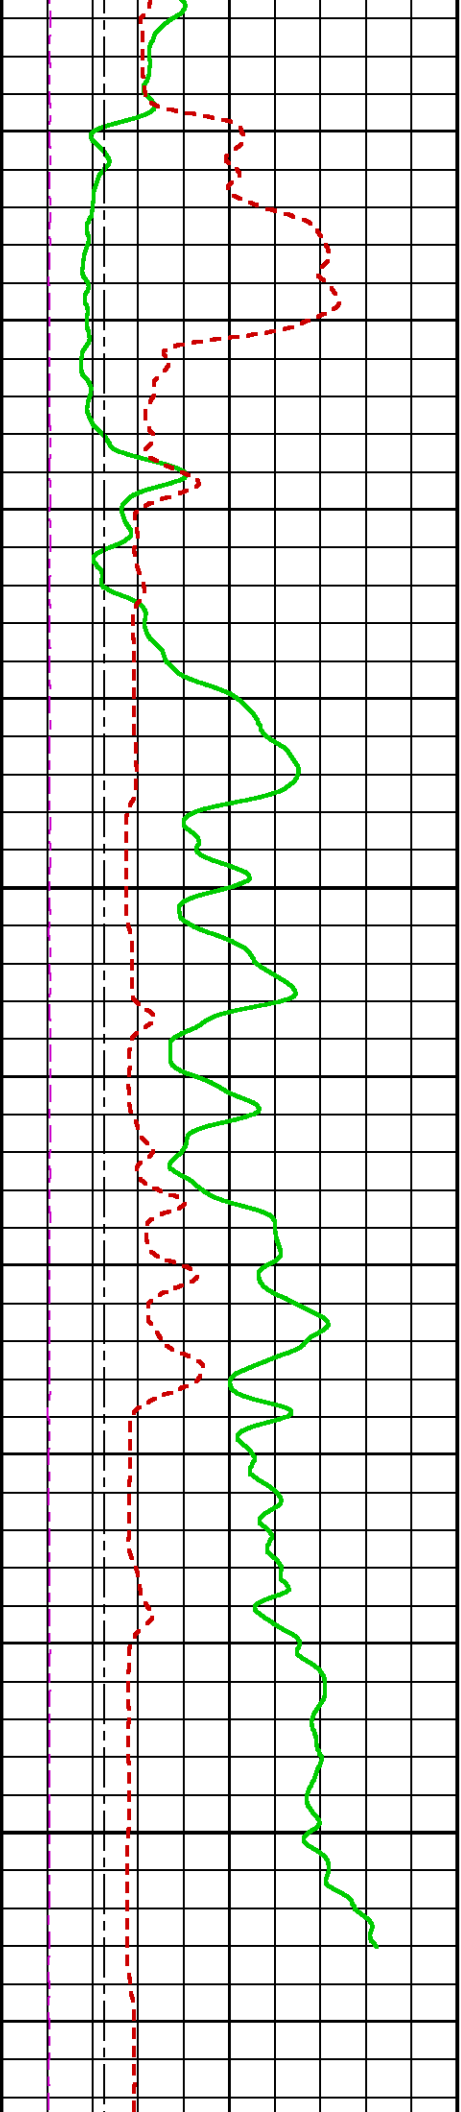

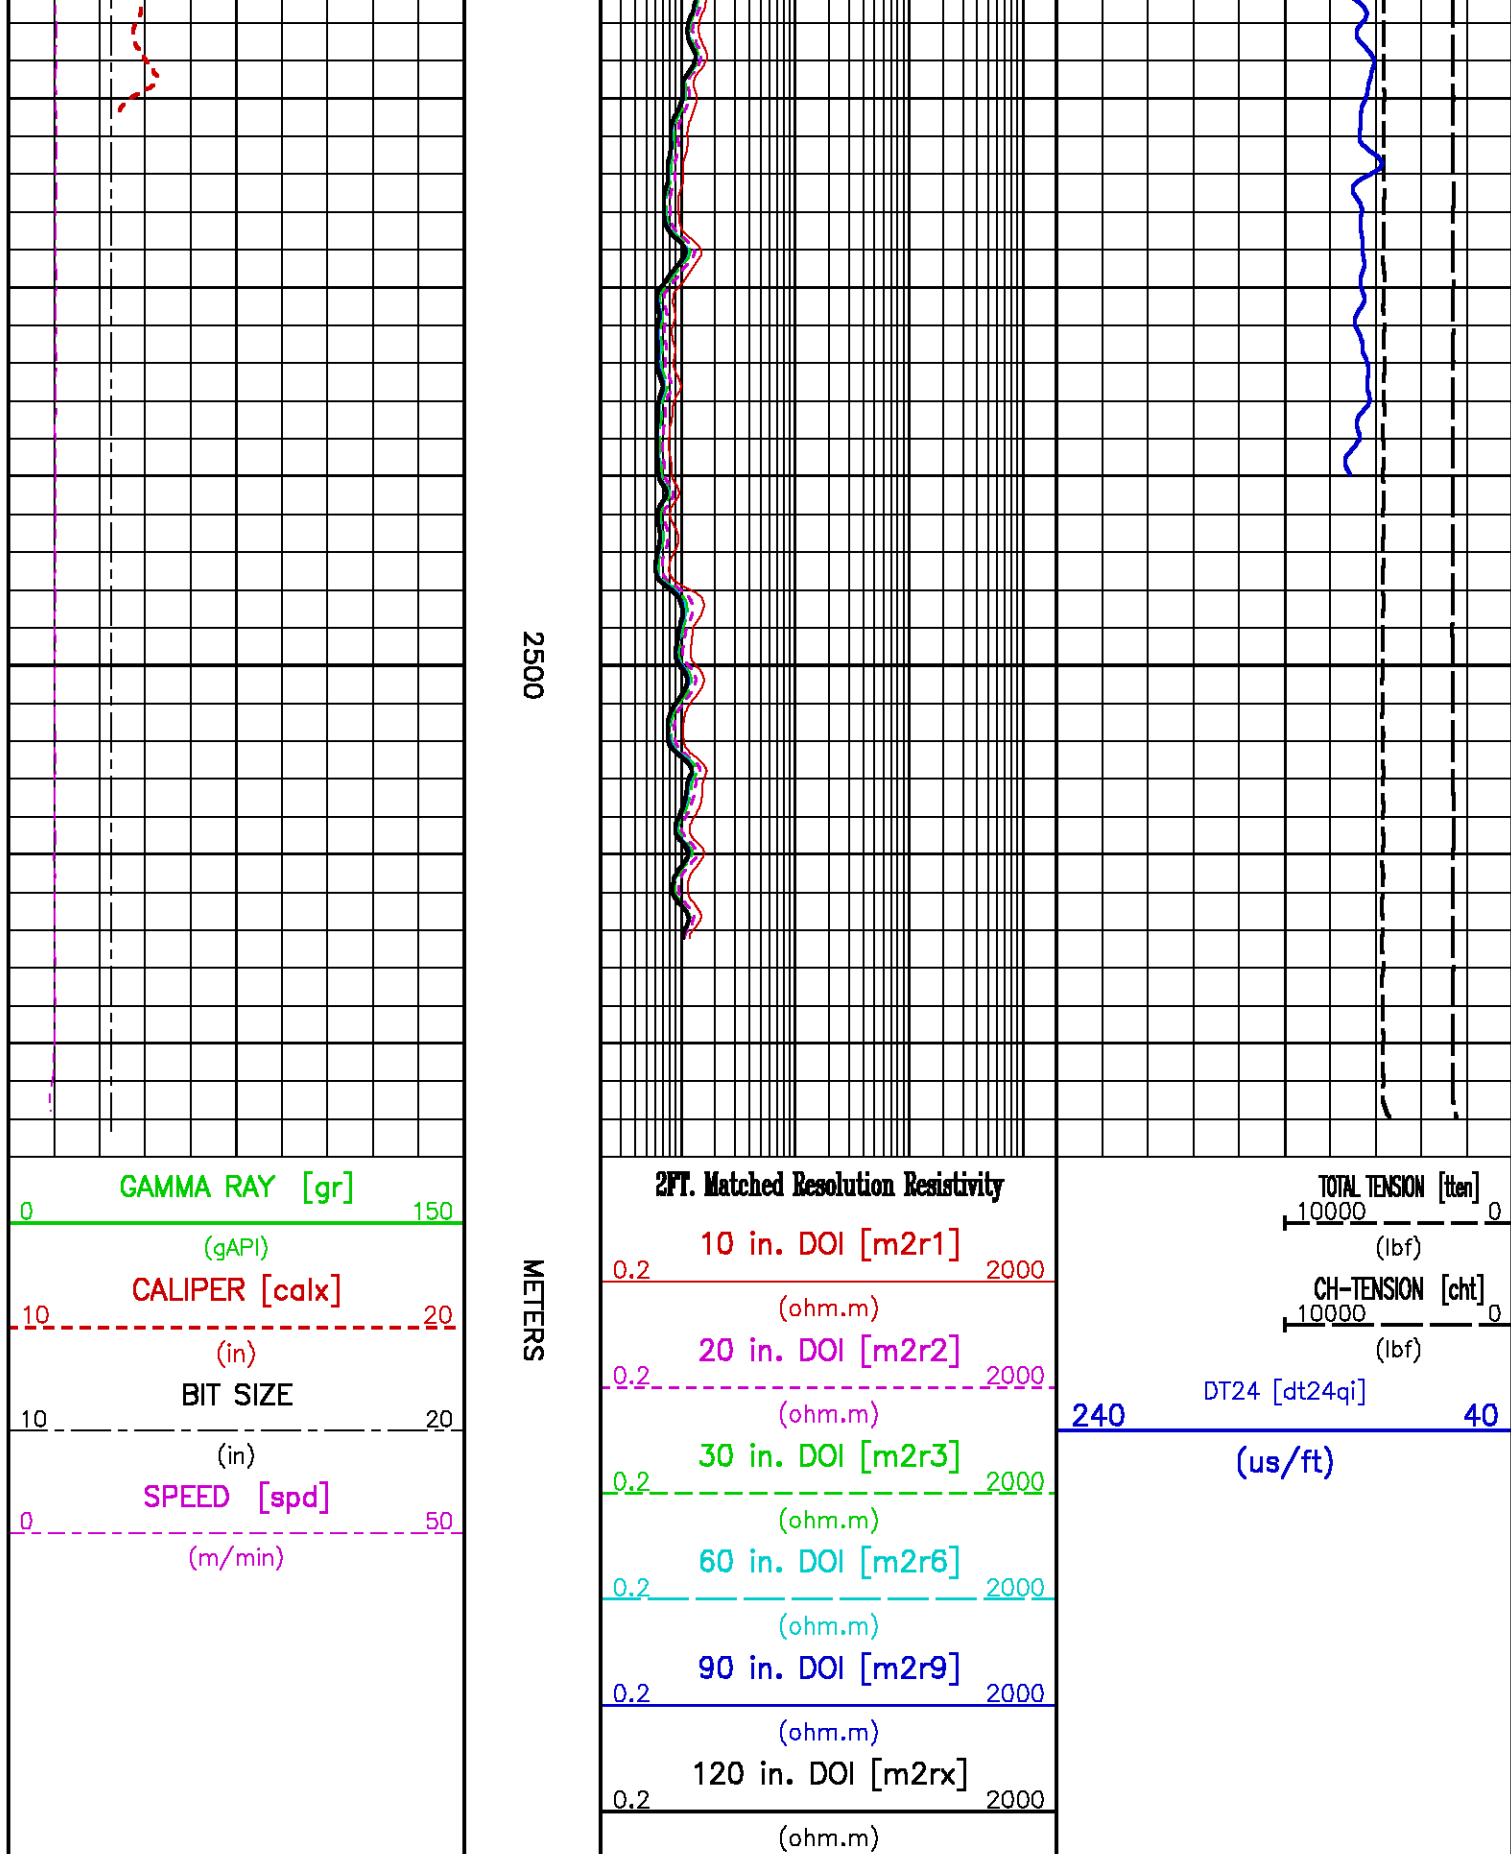

PARAMETER AND FILTER SUMMARY REPORT

FILE: /data/peak/bilabar1_D3/1777104.prm
 LOGGING MODE: DEPTH DIRECTION: UP
 TOP DEPTH: 2380.907 m BOTTOM DEPTH: 2562.416 m

SYMMETRIC FILTER

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
CHT	FILTER ()	medium (1)		TOP	BOTTOM
Y AXIS CALIPER	FILTER ()	medium (1)		''	''
SPEED	FILTER ()	medium (1)		''	''
TENSION	FILTER ()	medium (1)		''	''
GR	FILTER ()	medium (1)		''	''
X AXIS CALIPER	FILTER ()	medium (1)		''	''
	FILTER (.h)	medium (1)		''	''
	FILTER (.l)	medium (1)		''	''
DT24	FILTER ()	light (2)		''	''

BOREHOLE & CEMENT

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
BIT SIZE	BIT SIZE	12.250	In	TOP	BOTTOM
BOREHOLE CORR DIAMETER SOURCE	CALIPER/FIXED DIA. (mbh*)	USE CALIPER		''	''
BOREHOLE CORR DIAMETER	FIXED DIAMETER (mbh*)	12.250	In	''	''
MUD VALUES SOURCE	RMUD SOURCE (HDIL)	OIL BASE MUD		''	''
MUD VALUES	MUD SAMPLE TEMP	75.0	degF	''	''
	MUD SAMPLE RES	1.000	ohm.m	''	''
	MUD REFERENCE TEMP	75.0	degF	''	''
	TEMP GRADIENT	1.200	0.01 degF/ft	''	''

ACOUSTIC POROSITY

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
DELTA T CURVE SELECTION	DT24 SOURCE	FIRST ARRIVAL DT24		TOP	BOTTOM

ACOUSTIC PICK CONTROL

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
DELTA-T REJECTION RANGE	REJECTION DTmin	40	us/ft	TOP	BOTTOM
	REJECTION DTmax	180	us/ft	''	''
FIRST ARRIVAL PICK	SEARCH START OFFSET {sfan1*}	87	us	''	''
	SEARCH START OFFSET {sfan2*}	87	us	''	''
	SEARCH START OFFSET {sfan3*}	87	us	''	''
	SEARCH START OFFSET {sfan4*}	87	us	''	''
	SEARCH WINDOW LENGTH	1529	us	''	''
	THRESHOLD FACTOR	0.30		''	''
	THRESHOLD MINIMUM (sfan1*)	1.9	pct	TOP	2526.678
		1.7	pct	2526.678	BOTTOM
	THRESHOLD MINIMUM (sfan2*)	1.9	pct	TOP	2526.525
		1.7	pct	2526.525	BOTTOM
	THRESHOLD MINIMUM (sfan3*)	1.9	pct	TOP	2526.373
		1.7	pct	2526.373	BOTTOM
	THRESHOLD MINIMUM (sfan4*)	1.9	pct	TOP	2526.220
		1.7	pct	2526.220	BOTTOM
	E3 THRESHOLD	OFF		TOP	BOTTOM

ACOUSTIC QUALITY CONTROL

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
CYCLE SKIP LIMIT	CYCLE SKIP LIMIT	100	us	TOP	BOTTOM

ACOUSTIC WAVEFORM FILTER


MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
WAVEFORM FILTER - DELTA T	SURFACE WAVE FILTER	ON		TOP	BOTTOM

WAVEFORM FILTER	DELTA T	CURFACE WAVE FILTER	ON	4000	Hz	10	BOTTOM
		LOW FREQ CUTOFF		15000	Hz	11	11
HDIL PROCESSING							
MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)			
HDIL TEMPERATURE CORRECTION	TEMP CORR SOURCE	USE RXTEMP		TOP	BOTTOM		
ADAPTIVE BOREHOLE CORRECTION	ABC PROCESSING	ON		11	11		
	ABC to CALCULATE	STANDOFF		11	11		
	STANDOFF	1.50	in	11	11		
	TOOL POSITION	ECCENTERED		11	11		
	Rmud MULTIPLIER	1.000		11	11		

CURVE DESCRIPTION REPORT			
CURVE NAME	CURVE ALIAS	CREATION DATE	CURVE DESCRIPTION
F1:BIT	BIT	Oct 27 11:22:07 2006	BIT SIZE
F1:CALX	CAL	Oct 27 11:22:07 2006	CALIPER FROM X AXIS OF X-Y CALIPER(S)
F1:CHT	CHT	Oct 27 11:22:07 2006	CABLE HEAD TENSION
F1:DT24QI	DT24	Oct 27 11:22:07 2006	INTERVAL TRANSIT TIME OVER 24 INCH INTERVAL
F1:GR	GR	Oct 27 11:22:07 2006	GAMMA RAY
F1:M2R1	MOR1	Oct 27 11:22:07 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 10 INCH
F1:M2R2	MOR2	Oct 27 11:22:07 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 20 INCH
F1:M2R3	MOR3	Oct 27 11:22:07 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 30 INCH
F1:M2R6	MOR6	Oct 27 11:22:07 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 60 INCH
F1:M2R9	MOR9	Oct 27 11:22:07 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 90 INCH
F1:M2RX	MORX	Oct 27 11:22:07 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 120 INCH
F1:SPD	SPD	Oct 27 11:22:07 2006	SPEED
F1:TEN	TEN	Oct 27 11:22:07 2006	TOTAL TENSION

CURVE MEASURE POINT OFFSET							
CURVE	OFFSET (m)	CURVE	OFFSET (m)	CURVE	OFFSET (m)	CURVE	OFFSET (m)
BIT	0.00	GR	33.83	M2R6	2.44	TEN	0.00
CALX	26.37	M2R1	2.44	M2R9	2.44		
CHT	0.00	M2R2	2.44	M2RX	2.44		
DT24QI	13.56	M2R3	2.44	SPD	0.00		

Presentation	: sys1:/data/peak/bilabarl_D3/hdlac_spilcerpt_200.pdf [1:200 Scale]
Plot Interval	: 2339.04 - 2558.19 Meters
Data File 1	: F1 : sys1:/data/peak/bilabarl_D3/C2rpt.xtf
Created On	: Oct 27 11:22:07 2006
Company	: PEAK PETROLEUM
Well	: BILABRI D3
Field	: BILABRI
File Interval	: 2339.04 - 2558.19 Meters
Oct	: [??]

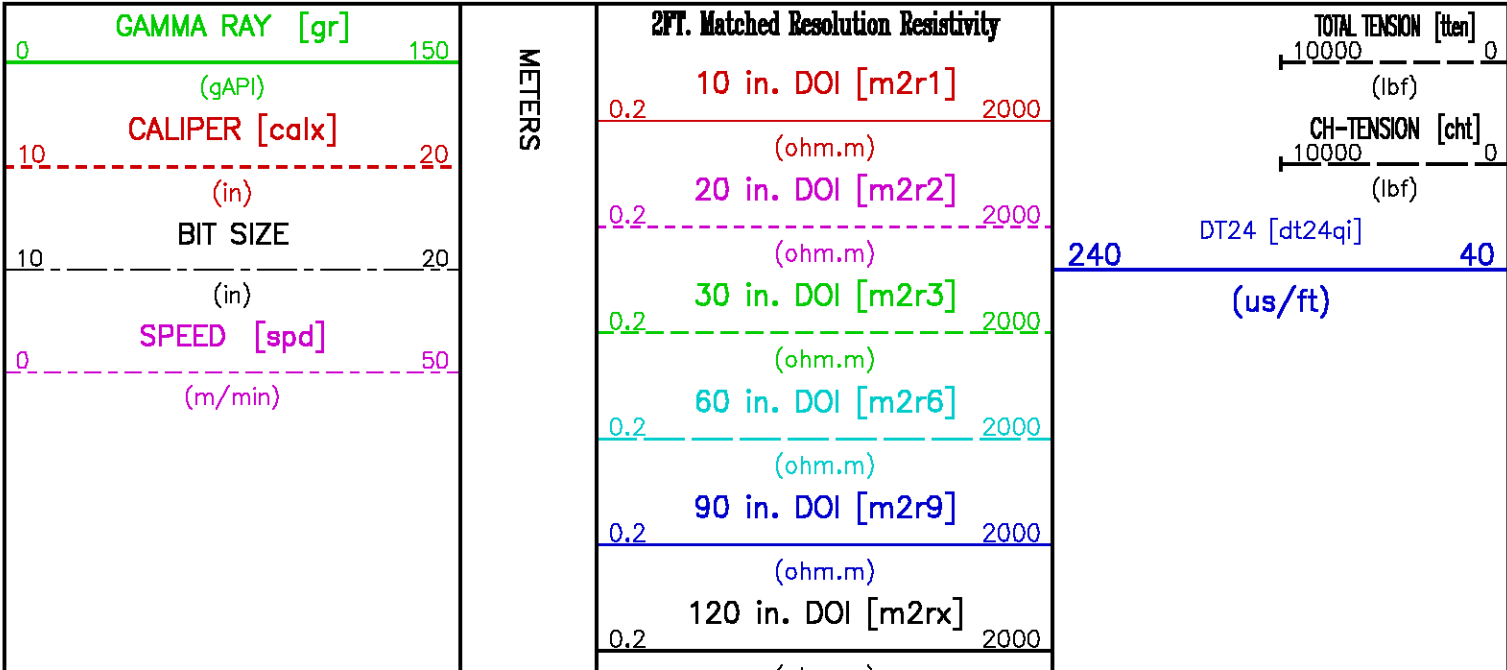

2350

2375

BIT

GR

CALX

(ohm.m)

DT24QI

CHT

TTEN


M2R9
M2R3
M2R1

M2RX
M2R6
M2R2

2400

2425


24

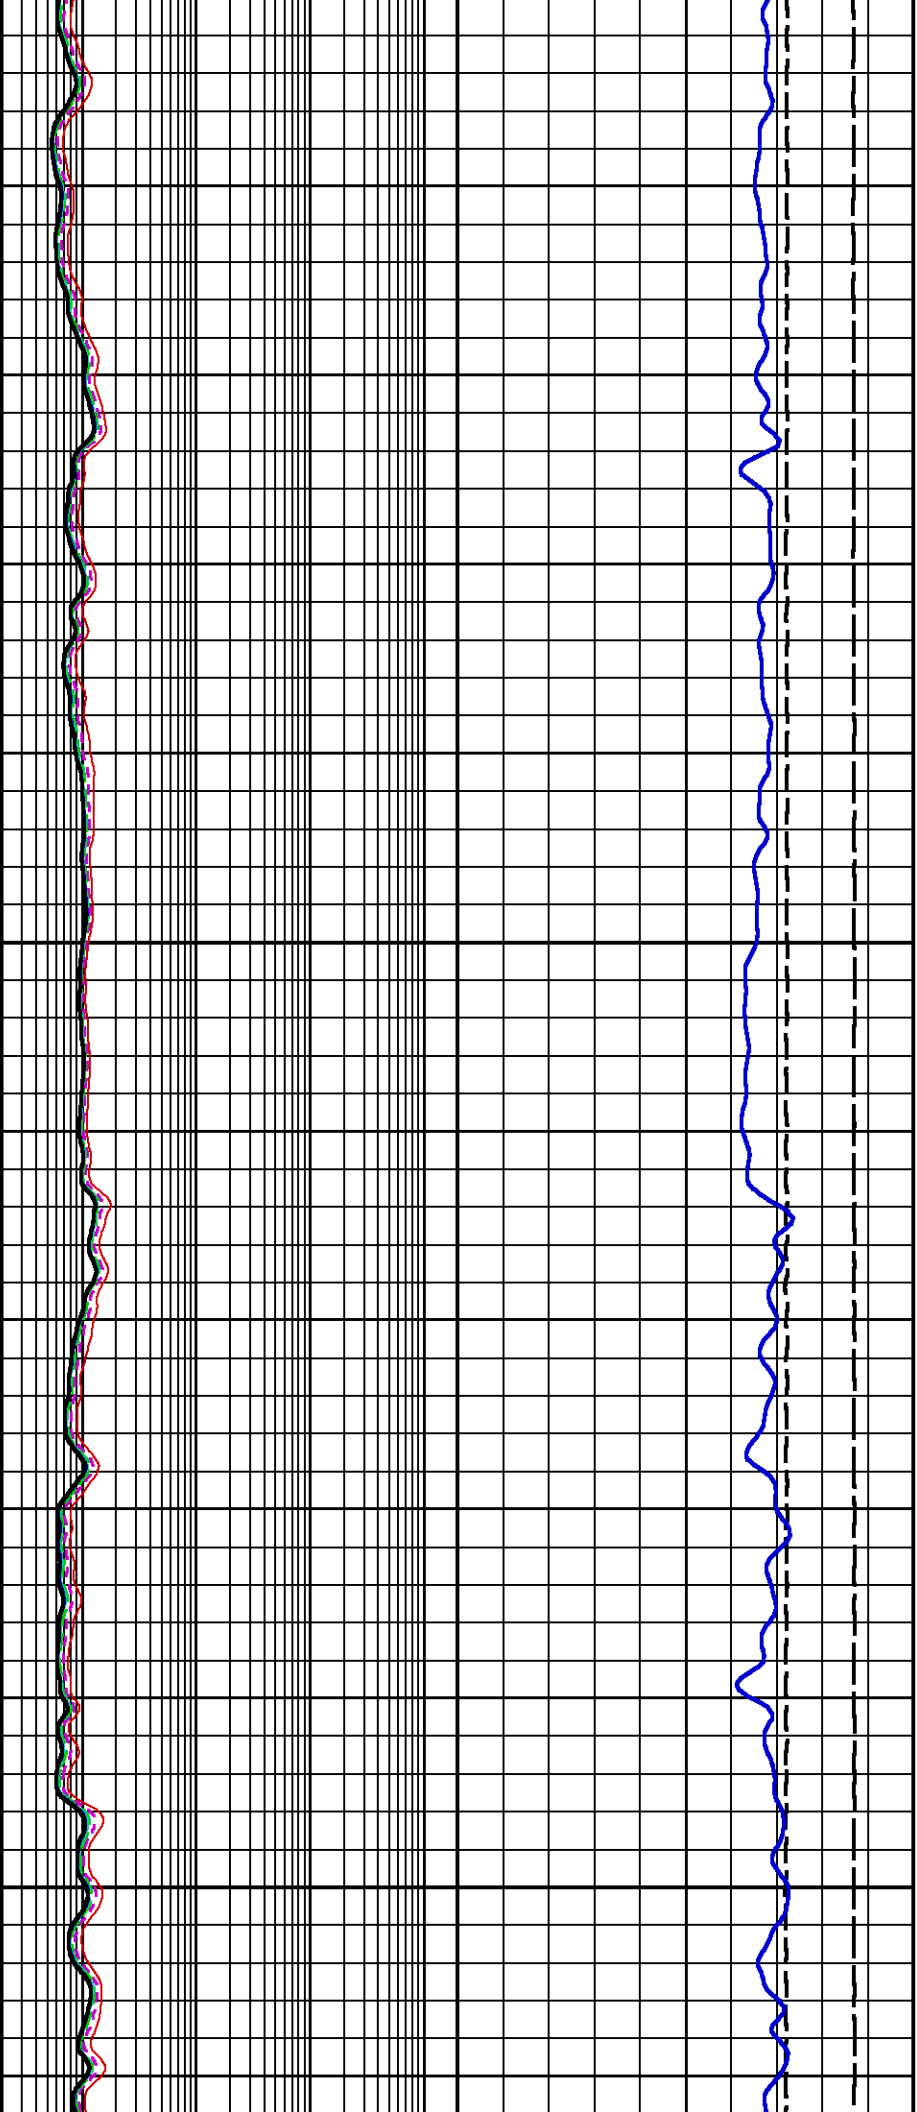


50

2475



2500

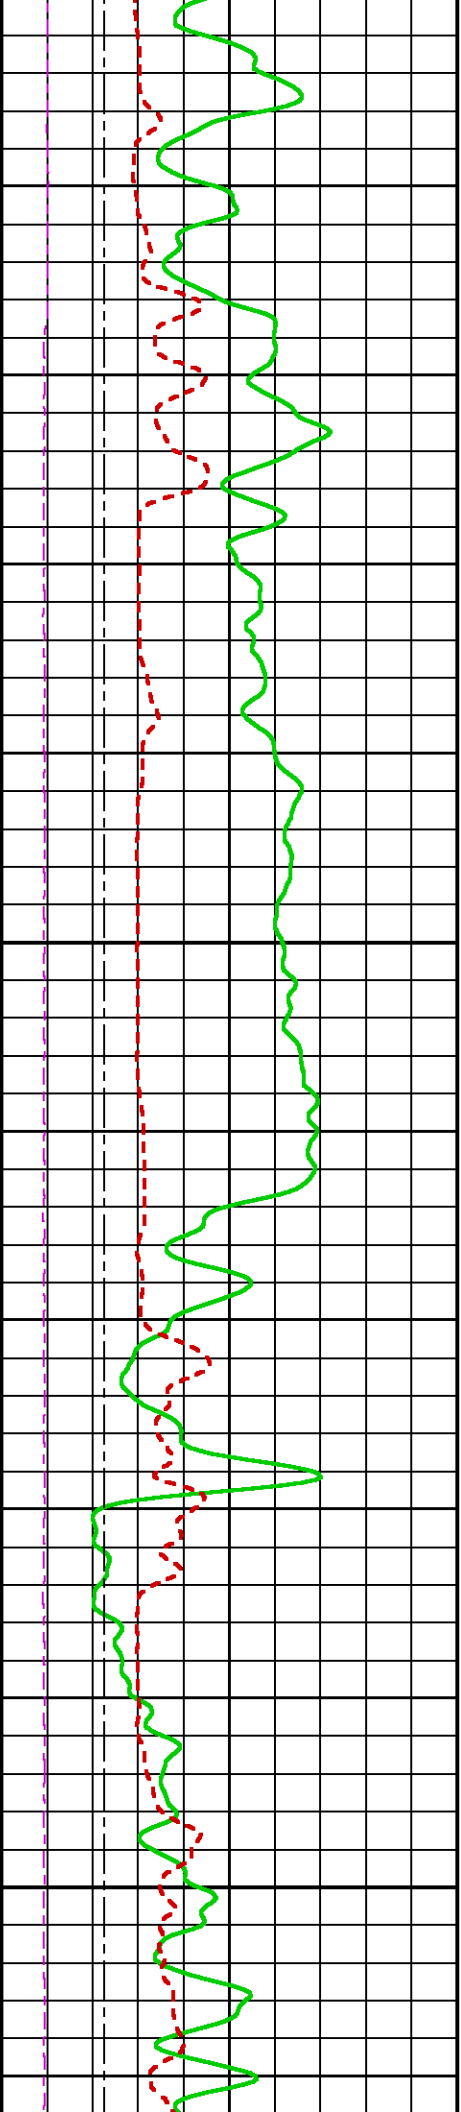

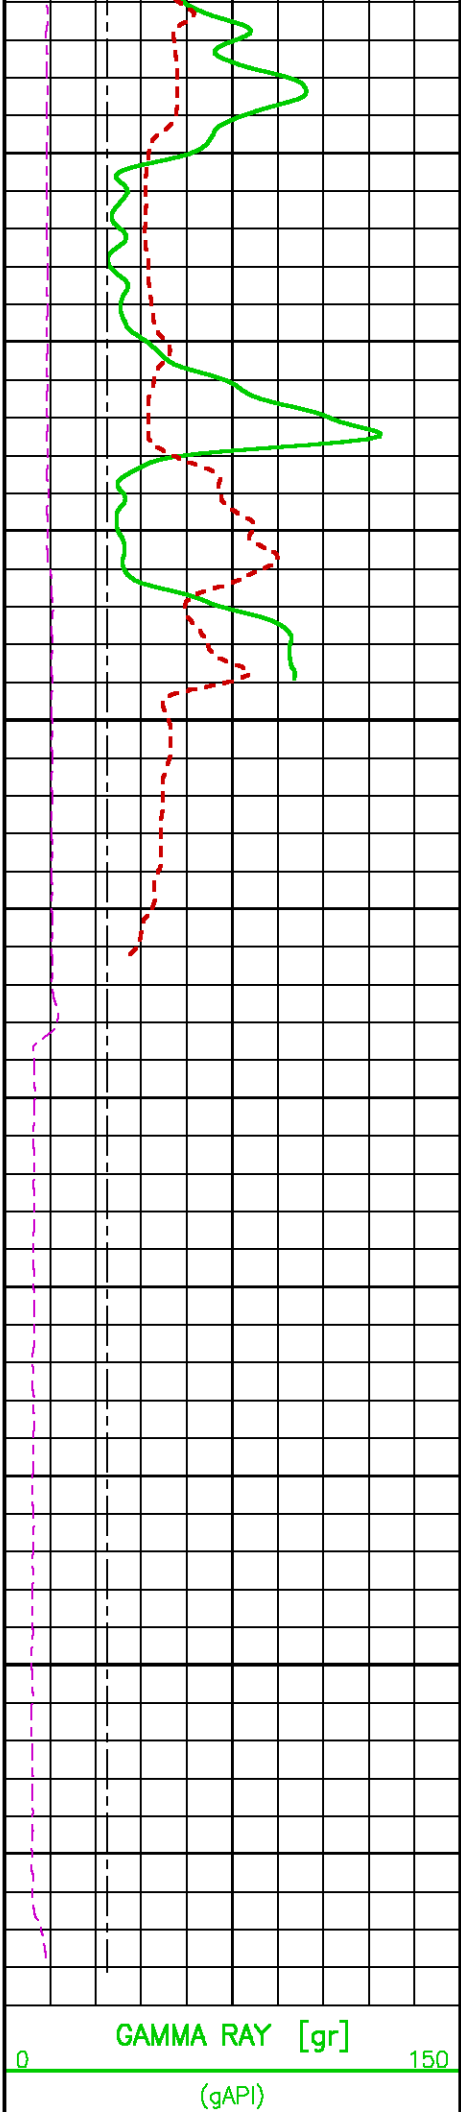

2525

2550

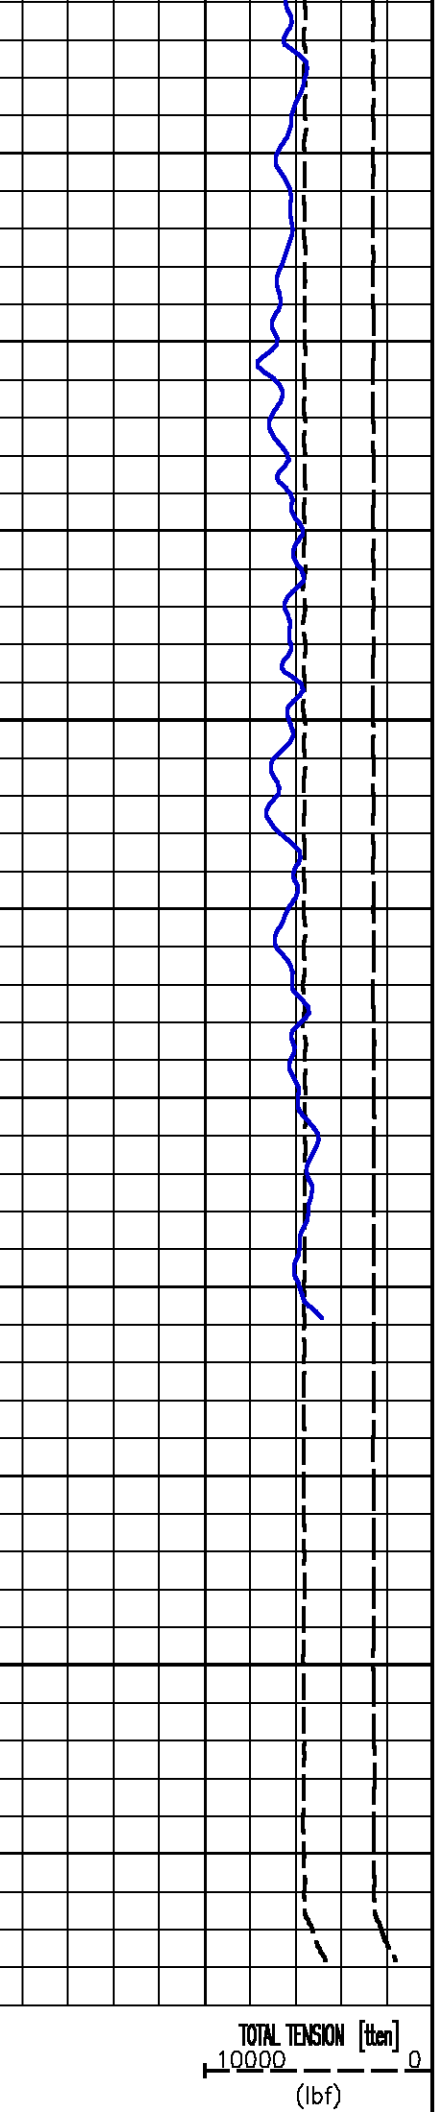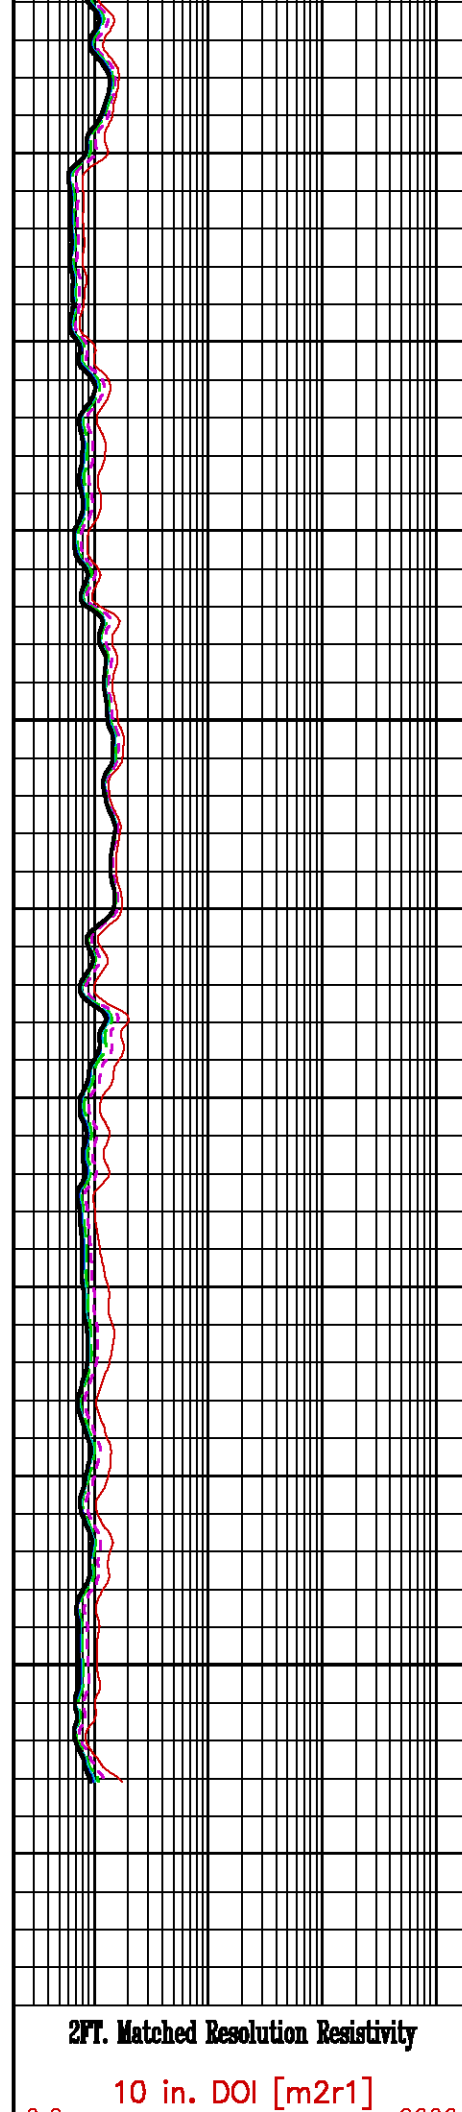

METERS	CALIPER [calx] (in) BIT SIZE (in) SPEED [spd] (m/min)	0.2 (ohm.m) 20 in. DOI [m2r2] (ohm.m) 30 in. DOI [m2r3] (ohm.m) 60 in. DOI [m2r6] (ohm.m) 90 in. DOI [m2r9] (ohm.m) 120 in. DOI [m2rx] (ohm.m)	2000 2000 2000 2000 2000 2000 2000 2000 2000 2000	CH-TENSION [cht] (lbf) DT24 [dt24qi] (us/ft)
	10-----20	0.2-----2000	10000-----0	
	10-----20	0.2-----2000	240-----40	
	0-----50	0.2-----2000		
		0.2-----2000		
		0.2-----2000		
		0.2-----2000		

CALIBRATION / VERIFICATION SUMMARY

Source File: /data/peak/bilabari_D3/slam.tp1

CHT PRIMARY CALIBRATION SUMMARY

TOOL #: 3981XA 186331

DATE/TIME PERFORMED: Sat Jul 1 01:12:15 2006

UNIT #: 3854SA 008601

	Signal Low (raw)	Signal High (raw)	Scale Mult	Scale Add	Engr Low (lbf)	Engr High (lbf)
CHT	140.29	669.21	5.05	-878.22	-170.00	2500.00

GR PRIMARY CALIBRATION SUMMARY

TOOL #: 1329XA 167531

DATE/TIME PERFORMED: Tue Oct 24 15:59:24 2006

UNIT #: 5753XB 10164949 CALB JIG #: 4702NK da-644

	BACKGROUND (cts/s)	CALBRTR ON (cts/s)	CR DIFF (cts/s)	MULT	BACKGROUND (gAPI)	CALBRTR ON (gAPI)	CALBRTR (gAPI)
GR	57.36	951.80	894.4 830.0 980.0	0.168	9.62	159.62	150

GR BEFORE LOG VERIFICATION SUMMARY

TOOL #: 1329XA 167531 DATE/TIME PERFORMED: Tue Oct 24 16:05:04 2006 DAYS SINCE CAL: 0

UNIT #: 5753XB 10164949 VERI JIG #: 4702NK da-644

	BACKGROUND (cts/s)	CALBRTR ON (cts/s)	MULT	BACKGROUND (gAPI)	CALBRTR ON (gAPI)	DIFF. (gAPI)
GR	56.93	952.96	0.168	9.55	159.81	150.26
						140.00 160.00

GR AFTER LOG VERIFICATION SUMMARY

TOOL #: 1329XA 167531 DATE/TIME PERFORMED: Thu Oct 26 05:11:36 2006 DAYS SINCE CAL: 1

UNIT #: 5753XB 10164949 VERI JIG #: 4702NK da-644

	BACKGROUND (cts/s)	CALBRTR ON (cts/s)	MULT	BACKGROUND (gAPI)	CALBRTR ON (gAPI)	DIFF. (gAPI)
GR	54.20	912.67	0.168	9.09	153.06	143.97
						140.28 160.28

CAL PRIMARY CALIBRATION SUMMARY

TOOL #: 2228MA 114428 DATE/TIME PERFORMED: Tue Oct 24 15:42:35 2006

UNIT #: 5753XB 10164949

	SMALL RING (raw)	LARGE RING (raw)	MULT	ADD	SMALL RING (in)	LARGE RING (in)
CALIPER	1927.5	2638.8	0.00590	-3.58127	7.800	12.000

CAL BEFORE LOG VERIFICATION SUMMARY

TOOL #: 2228MA 114428 DATE/TIME PERFORMED: Wed Oct 25 20:37:44 2006 DAYS SINCE CAL: 1

UNIT #: 5753XB 10164949

	I.D. (raw)	MULT	ADD	I.D. (in)
CALIPER	2682.3	0.00590	-3.43813	12.400

CAL AFTER LOG VERIFICATION SUMMARY

TOOL #: 2228MA 114428 DATE/TIME PERFORMED: Thu Oct 26 03:54:59 2006 DAYS SINCE CAL: 1

UNIT #: 5753XB 10164949

	I.D. (raw)	MULT	ADD	I.D. (in)
CALIPER	2708.2	0.00590	-3.43813	12.553
				11.900 12.900

HDIL PRIMARY CALIBRATION SUMMARY

TOOL #: 1515MA 179516

DATE/TIME PERFORMED: Thu Aug 31 10:14:31 2006

UNIT #: 3854SA 008604

GRCOND ID & DATE: 12 083096

ZERO DATA(mv)	10 KHz	30 KHz	50 KHz	70 KHz	90 KHz	110 KHz	130 KHz	150 KHz
Coil 0 R	-0.010 -0.200 0.200	-0.009 -0.100 0.100	-0.007 -0.100 0.100	-0.002 -0.100 0.100	-0.000 -0.100 0.100	0.003 -0.100 0.100	0.005 -0.100 0.100	0.001 -0.100 0.100
Coil 0 Q	0.040 -1.000 1.000	0.013 -0.200 0.200	0.001 -0.100 0.100	-0.004 -0.100 0.100	-0.004 -0.100 0.100	-0.001 -0.100 0.100	0.001 -0.100 0.100	0.005 -0.100 0.100
Coil 1 R	-0.017 -0.200 0.200	-0.010 -0.100 0.100	0.002 -0.100 0.100	0.007 -0.100 0.100	0.007 -0.100 0.100	0.006 -0.100 0.100	0.001 -0.100 0.100	0.000 -0.100 0.100
Coil 1 Q	0.029 -1.000 1.000	0.001 -0.200 0.200	-0.008 -0.100 0.100	-0.005 -0.100 0.100	0.001 -0.100 0.100	0.004 -0.100 0.100	0.002 -0.100 0.100	-0.001 -0.100 0.100
Coil 2 R	-0.008 -0.200 0.200	-0.010 -0.100 0.100	-0.008 -0.100 0.100	0.003 -0.100 0.100	0.014 -0.100 0.100	0.010 -0.100 0.100	-0.000 -0.100 0.100	-0.006 -0.100 0.100
Coil 2 Q	0.032 -1.000 1.000	0.003 -0.200 0.200	-0.009 -0.100 0.100	-0.011 -0.100 0.100	-0.004 -0.100 0.100	0.008 -0.100 0.100	0.009 -0.100 0.100	0.001 -0.100 0.100
Coil 3 R	-0.011 -0.100 0.100	-0.013 -0.100 0.100	-0.012 -0.100 0.100	-0.004 -0.100 0.100	0.007 -0.100 0.100	0.009 -0.100 0.100	0.009 -0.100 0.100	0.005 -0.100 0.100
Coil 3 Q	0.047 -0.500 0.500	0.005 -0.200 0.200	-0.002 -0.100 0.100	-0.007 -0.100 0.100	-0.009 -0.100 0.100	-0.004 -0.100 0.100	-0.000 -0.100 0.100	0.006 -0.100 0.100
Coil 4 R	0.015 -0.200 0.200	-0.001 -0.200 0.200	-0.021 -0.200 0.200	-0.012 -0.200 0.200	0.007 -0.200 0.200	0.023 -0.200 0.200	0.006 -0.200 0.200	-0.011 -0.200 0.200
Coil 4 Q	0.003 -1.000 1.000	0.040 -0.400 0.400	0.006 -0.200 0.200	-0.022 -0.200 0.200	-0.018 -0.200 0.200	0.008 -0.200 0.200	0.017 -0.200 0.200	0.009 -0.200 0.200
Coil 5 R	-0.053 -0.400 0.400	-0.053 -0.400 0.400	-0.026 -0.400 0.400	-0.012 -0.400 0.400	0.010 -0.400 0.400	0.026 -0.400 0.400	0.032 -0.400 0.400	0.006 -0.400 0.400
Coil 5 Q	0.172 -2.000 2.000	0.021 -0.800 0.800	-0.020 -0.400 0.400	-0.035 -0.400 0.400	-0.021 -0.400 0.400	-0.015 -0.400 0.400	0.013 -0.400 0.400	0.032 -0.400 0.400
Coil 6 R	-0.125 -1.000 1.000	-0.079 -1.000 1.000	-0.049 -1.000 1.000	-0.005 -1.000 1.000	0.034 -1.000 1.000	0.035 -1.000 1.000	-0.003 -1.000 1.000	-0.022 -1.000 1.000
Coil 6 Q	0.177 -5.000 5.000	0.032 -2.000 2.000	-0.003 -1.000 1.000	-0.056 -1.000 1.000	-0.026 -1.000 1.000	0.023 -1.000 1.000	0.018 -1.000 1.000	0.015 -1.000 1.000

ELEC. GAINS	10 KHz	30 KHz	50 KHz	70 KHz	90 KHz	110 KHz	130 KHz	150 KHz
Coil 0 M	124.85 100.00 150.00	124.13 100.00 150.00	122.46 98.00 150.00	119.16 98.00 140.00	114.44 92.00 140.00	108.47 87.00 130.00	101.56 82.00 120.00	93.47 78.00 110.00
Coil 0 P	7.384 8.000 9.000	23.278 19.000 28.000	39.203 32.000 47.000	55.348 44.000 66.000	71.379 57.000 85.000	87.453 70.000 100.000	103.253 82.000 120.000	119.075 95.000 140.000
Coil 1 M	224.86 180.00 270.00	223.73 180.00 270.00	221.07 170.00 280.00	215.58 170.00 250.00	207.31 160.00 250.00	196.70 160.00 230.00	184.06 150.00 220.00	168.99 140.00 200.00
Coil 1 P	7.438 8.000 9.000	23.588 19.000 28.000	39.778 32.000 48.000	56.223 45.000 67.000	72.661 57.000 88.000	89.231 70.000 110.000	105.521 83.000 120.000	121.919 98.000 140.000
Coil 2 M	453.14	451.33	446.90	437.09	422.23	402.79	379.49	351.01

	350.00	540.00	360.00	540.00	350.00	530.00	340.00	510.00	330.00	500.00	310.00	470.00	300.00	440.00	270.00	410.00
Coil 2 P	7.424	23.419	39.513	55.879	72.278	88.789	105.147	121.703								
	6.000	9.000	19.000	29.000	32.000	48.000	45.000	67.000	58.000	87.000	71.000	110.000	84.000	130.000	96.000	140.000
Coil 3 M	722.43	718.42	709.36	691.48	665.51	632.39	593.61	548.14								
	590.00	880.00	580.00	870.00	570.00	850.00	550.00	830.00	530.00	800.00	500.00	760.00	470.00	710.00	440.00	850.00
Coil 3 P	7.498	23.715	39.950	56.393	72.793	89.237	105.455	121.814								
	6.000	10.000	20.000	29.000	33.000	49.000	48.000	69.000	59.000	89.000	72.000	110.000	85.000	130.000	98.000	150.000
Coil 4 M	1144.4	1138.9	1126.4	1100.2	1061.0	1010.4	950.2	879.1								
	900.0	1400.0	900.0	1300.0	900.0	1300.0	850.0	1300.0	800.0	1200.0	800.0	1200.0	750.0	1100.0	700.0	1000.0
Coil 4 P	7.560	23.918	40.328	56.985	73.633	90.360	106.943	123.673								
	6.000	10.000	20.000	30.000	33.000	50.000	48.000	70.000	60.000	90.000	73.000	110.000	88.000	130.000	99.000	150.000
Coil 5 M	2345.1	2325.2	2282.7	2206.8	2102.5	1976.0	1833.1	1672.7								
	1900.0	2800.0	1800.0	2800.0	1800.0	2700.0	1800.0	2600.0	1700.0	2500.0	1600.0	2400.0	1500.0	2200.0	1400.0	2100.0
Coil 5 P	8.368	26.297	44.197	62.208	80.054	97.829	115.298	132.787								
	6.000	10.000	20.000	31.000	34.000	51.000	48.000	72.000	62.000	93.000	76.000	110.000	89.000	130.000	100.000	150.000
Coil 6 M	5945.3	5904.1	5812.4	5636.5	5382.9	5062.6	4685.6	4251.4								
	4700.0	7100.0	4700.0	7000.0	4800.0	6900.0	4400.0	6800.0	4200.0	6400.0	4000.0	6000.0	3700.0	5600.0	3400.0	5100.0
Coil 6 P	8.778	27.577	46.405	65.483	84.557	103.664	122.544	141.507								
	7.000	10.000	22.000	32.000	38.000	54.000	51.000	76.000	65.000	98.000	80.000	120.000	94.000	140.000	110.000	180.000

AM Factor 10 KHz 30 KHz 50 KHz 70 KHz 90 KHz 110 KHz 130 KHz 150 KHz

Coil 0 R	299	-236	-281	-280	-269	-256	-244	-232								
	-200	800	-500	100	-800	0	-800	0	-500	0	-500	0	-500	0	-500	0
Coil 0 Q	1444	501	238	105	21	-39	-86	-124								
	-3000	8000	-1000	2000	-1000	1200	-500	800	-400	800	-400	500	-400	400	-400	300
Coil 1 R	538	52	-8	-27	-36	-41	-44	-45								
	450	850	20	115	-30	45	-50	20	-55	0	-60	0	-80	0	-80	0
Coil 1 Q	1089	441	273	194	148	117	94	77								
	0	2500	0	900	0	600	0	400	0	300	0	250	0	200	0	200
Coil 2 R	177.3	22.2	2.5	-3.9	-6.7	-8.0	-8.8	-9.8								
	140.0	230.0	0.0	51.0	-10.0	25.0	-15.0	15.0	-16.0	10.0	-16.0	7.0	-16.0	5.0	-16.0	3.0
Coil 2 Q	505.3	197.5	125.3	93.7	76.3	65.7	59.2	54.5								
	-200.0	1000.0	0.0	350.0	0.0	220.0	0.0	160.0	0.0	130.0	0.0	110.0	0.0	100.0	0.0	90.0
Coil 3 R	52.2	7.3	1.4	-0.6	-1.5	-2.3	-5.6	-4.7								
	37.0	82.0	0.0	12.0	-3.0	6.0	-4.0	4.0	-5.0	2.0	-5.0	1.0	-6.0	1.0	-6.0	1.0
Coil 3 Q	55.6	30.7	25.1	24.0	24.7	26.9	28.8	26.3								
	-140.0	280.0	-40.0	100.0	-20.0	70.0	-10.0	60.0	-10.0	50.0	-10.0	50.0	-10.0	50.0	-10.0	50.0
Coil 4 R	13.54	1.32	-0.06	-0.66	-0.96	-1.19	-1.32	-1.54								
	5.00	18.00	-1.00	4.00	-2.00	2.00	-2.20	2.00	-2.50	2.00	-3.00	2.00	-3.00	2.00	-4.00	2.00
Coil 4 Q	14.38	12.00	13.64	16.47	19.66	22.99	26.63	30.32								
	-100.00	100.00	-30.00	50.00	-20.00	40.00	-10.00	40.00	-10.00	40.00	-10.00	45.00	-10.00	50.00	-10.00	60.00
Coil 5 R	1.67	-1.16	-1.61	-2.05	-2.11	-2.23	-2.27	-2.38								
	-2.00	5.80	-3.20	2.40	-4.50	3.10	-4.70	3.20	-4.80	3.20	-5.00	3.30	-5.20	3.40	-5.40	3.50
Coil 5 Q	7.53	8.40	11.40	14.80	18.32	22.02	25.87	29.72								
	-60.00	70.00	-20.00	30.00	-20.00	30.00	-20.00	35.00	-20.00	45.00	-20.00	50.00	-20.00	60.00	-30.00	70.00
Coil 6 R	-1.69	-2.26	-2.68	-2.78	-2.98	-2.90	-2.83	-2.86								
	-4.80	1.00	-5.70	3.80	-8.50	4.90	-6.90	5.40	-7.30	5.80	-7.50	6.00	-7.70	6.10	-7.90	6.30
Coil 6 Q	3.28	8.50	13.53	18.50	23.61	28.62	34.00	39.50								
	-30.00	30.00	-20.00	25.00	-20.00	35.00	-30.00	50.00	-35.00	80.00	-40.00	70.00	-50.00	80.00	-60.00	100.00

MM Factor 10 KHz 30 KHz 50 KHz 70 KHz 90 KHz 110 KHz 130 KHz 150 KHz

Coil 0 M	1.016	1.014	1.010	1.010	1.009	1.009	1.009	1.008								
	0.900	1.100	0.900	1.100	0.900	1.100	0.900	1.100	0.900	1.100	0.900	1.100	0.900	1.100	0.900	1.100
Coil 0 P	0.241	0.224	0.264	0.229	0.179	0.190	0.183	0.146								

	-2.000	2.000	-2.000	2.000	-2.000	2.000	-2.000	2.000	-2.000	2.000	-2.000	2.000
Coil 1 M	0.999	0.997	0.994	0.994	0.992	0.992	0.991	0.991				
	0.900	1.100	0.900	1.100	0.900	1.100	0.900	1.100	0.900	1.100	0.900	1.100
Coil 1 P	0.122	0.220	0.243	0.243	0.233	0.260	0.204	0.168				
	-2.000	2.000	-2.000	2.000	-2.000	2.000	-2.000	2.000	-2.000	2.000	-2.000	2.000
Coil 2 M	1.005	1.002	1.002	1.002	1.002	1.002	1.001	1.000				
	0.900	1.100	0.900	1.100	0.900	1.100	0.900	1.100	0.900	1.100	0.900	1.100
Coil 2 P	0.085	0.042	0.031	0.052	0.117	0.162	0.147	0.143				
	-2.000	2.000	-2.000	2.000	-2.000	2.000	-2.000	2.000	-2.000	2.000	-2.000	2.000
Coil 3 M	1.012	1.011	1.011	1.012	1.012	1.013	1.015	1.013				
	0.900	1.100	0.900	1.100	0.900	1.100	0.900	1.100	0.900	1.100	0.900	1.100
Coil 3 P	0.076	0.033	0.014	0.003	0.022	0.014	0.088	0.239				
	-2.000	2.000	-2.000	2.000	-2.000	2.000	-2.000	2.000	-2.000	2.000	-2.000	2.000
Coil 4 M	1.016	1.015	1.015	1.016	1.015	1.015	1.014	1.014				
	0.900	1.100	0.900	1.100	0.900	1.100	0.900	1.100	0.900	1.100	0.900	1.100
Coil 4 P	0.083	0.046	0.015	0.032	0.081	0.103	0.110	0.092				
	-2.000	2.000	-2.000	2.000	-2.000	2.000	-2.000	2.000	-2.000	2.000	-2.000	2.000
Coil 5 M	1.020	1.020	1.020	1.020	1.019	1.021	1.019	1.019				
	0.900	1.100	0.900	1.100	0.900	1.100	0.900	1.100	0.900	1.100	0.900	1.100
Coil 5 P	0.021	-0.001	0.034	0.058	0.070	0.072	0.159	0.207				
	-2.000	2.000	-2.000	2.000	-2.000	2.000	-2.000	2.000	-2.000	2.000	-2.000	2.000
Coil 6 M	1.017	1.018	1.017	1.015	1.014	1.020	1.019	1.017				
	0.900	1.100	0.900	1.100	0.900	1.100	0.900	1.100	0.900	1.100	0.900	1.100
Coil 6 P	0.059	0.178	0.117	0.207	0.182	0.153	0.196	0.128				
	-2.000	2.000	-2.000	2.000	-2.000	2.000	-2.000	2.000	-2.000	2.000	-2.000	2.000

PARMS TCID 0 TCID 1 Cal Temp T Factor
(degF)

IDs 1.883 0.926 80.5 1.04

HDIL BEFORE LOG VERIFICATION SUMMARY

TOOL #: 1515MA 179516 DATE/TIME PERFORMED: Tue Oct 24 16:07:21 2006 DAYS SINCE CAL: 54

UNIT #: 5753XB 10164949

ZERO DATA(mv)	10 KHz	30 KHz	50 KHz	70 KHz	90 KHz	110 KHz	130 KHz	150 KHz
Coil 0 R	-0.008	-0.011	-0.007	-0.002	0.002	0.006	0.005	0.002
	-0.200	0.200	-0.100	0.100	-0.100	0.100	-0.100	0.100
Coil 0 Q	0.041	0.011	-0.002	-0.005	-0.004	-0.001	0.002	0.005
	-1.000	1.000	-0.200	0.200	-0.100	0.100	-0.100	0.100
Coil 1 R	-0.015	-0.010	0.001	0.009	0.008	0.003	-0.000	-0.001
	-0.200	0.200	-0.100	0.100	-0.100	0.100	-0.100	0.100
Coil 1 Q	0.030	-0.001	-0.009	-0.004	0.003	0.004	0.003	-0.001
	-1.000	1.000	-0.200	0.200	-0.100	0.100	-0.100	0.100
Coil 2 R	-0.013	-0.011	-0.004	0.006	0.013	0.008	-0.001	-0.008
	-0.200	0.200	-0.100	0.100	-0.100	0.100	-0.100	0.100
Coil 2 Q	0.031	-0.001	-0.010	-0.012	-0.002	0.010	0.009	0.000
	-1.000	1.000	-0.200	0.200	-0.100	0.100	-0.100	0.100
Coil 3 R	-0.010	-0.014	-0.008	-0.002	0.009	0.012	0.011	0.008
	-0.100	0.100	-0.100	0.100	-0.100	0.100	-0.100	0.100
Coil 3 Q	0.047	0.005	-0.003	-0.011	-0.010	-0.004	0.002	0.003
	-0.500	0.500	-0.200	0.200	-0.100	0.100	-0.100	0.100

Coil 4 R	-0.052 -0.200 0.200	-0.044 -0.200 0.200	-0.018 -0.200 0.200	0.003 -0.200 0.200	0.016 -0.200 0.200	0.016 -0.200 0.200	0.000 -0.200 0.200	-0.010 -0.200 0.200
Coil 4 Q	0.107 -1.000 1.000	0.017 -0.400 0.400	-0.014 -0.200 0.200	-0.023 -0.200 0.200	-0.011 -0.200 0.200	0.011 -0.200 0.200	0.015 -0.200 0.200	0.005 -0.200 0.200
Coil 5 R	-0.055 -0.400 0.400	-0.054 -0.400 0.400	-0.036 -0.400 0.400	-0.013 -0.400 0.400	0.007 -0.400 0.400	0.025 -0.400 0.400	0.020 -0.400 0.400	0.007 -0.400 0.400
Coil 5 Q	0.174 -2.000 2.000	0.027 -0.800 0.800	-0.015 -0.400 0.400	-0.034 -0.400 0.400	-0.026 -0.400 0.400	-0.017 -0.400 0.400	0.003 -0.400 0.400	0.014 -0.400 0.400
Coil 6 R	-0.131 -1.000 1.000	-0.112 -1.000 1.000	-0.028 -1.000 1.000	0.001 -1.000 1.000	0.039 -1.000 1.000	0.019 -1.000 1.000	-0.005 -1.000 1.000	-0.035 -1.000 1.000
Coil 6 Q	0.247 -5.000 5.000	0.027 -2.000 2.000	-0.037 -1.000 1.000	-0.070 -1.000 1.000	-0.013 -1.000 1.000	0.019 -1.000 1.000	0.023 -1.000 1.000	-0.007 -1.000 1.000

ELEC. GAINS 10 KHz 30 KHz 50 KHz 70 KHz 90 KHz 110 KHz 130 KHz 150 KHz

Coil 0 M	124.84 100.00 150.00	124.04 100.00 150.00	122.43 98.00 150.00	119.28 98.00 140.00	114.18 92.00 140.00	108.04 87.00 130.00	100.79 82.00 120.00	92.78 78.00 110.00
Coil 0 P	7.324 8.000 9.000	23.046 19.000 28.000	38.808 32.000 47.000	54.800 44.000 66.000	70.952 57.000 85.000	86.672 70.000 100.000	102.419 82.000 120.000	117.785 95.000 140.000
Coil 1 M	226.68 180.00 270.00	225.45 180.00 270.00	222.79 170.00 280.00	217.56 170.00 250.00	208.67 160.00 250.00	197.53 160.00 230.00	184.21 150.00 220.00	169.28 140.00 200.00
Coil 1 P	7.352 8.000 9.000	23.330 19.000 28.000	39.334 32.000 48.000	55.639 45.000 67.000	72.164 57.000 88.000	88.329 70.000 110.000	104.557 83.000 120.000	120.494 98.000 140.000
Coil 2 M	455.12 380.00 540.00	453.07 380.00 540.00	448.74 350.00 530.00	439.48 340.00 510.00	423.27 330.00 500.00	402.91 310.00 470.00	378.45 300.00 440.00	349.93 270.00 410.00
Coil 2 P	7.333 8.000 9.000	23.107 19.000 29.000	38.975 32.000 48.000	55.132 45.000 67.000	71.554 58.000 87.000	87.708 71.000 110.000	103.981 84.000 130.000	120.014 98.000 140.000
Coil 3 M	725.79 590.00 880.00	721.38 580.00 870.00	712.49 570.00 850.00	695.46 550.00 830.00	667.32 530.00 800.00	632.69 500.00 780.00	592.13 470.00 710.00	546.46 440.00 850.00
Coil 3 P	7.433 8.000 10.000	23.440 20.000 29.000	39.489 33.000 49.000	55.749 48.000 69.000	72.222 59.000 89.000	88.304 72.000 110.000	104.497 85.000 130.000	120.363 98.000 150.000
Coil 4 M	1141.5 900.0 1400.0	1135.7 900.0 1300.0	1123.3 900.0 1300.0	1098.5 850.0 1300.0	1056.2 800.0 1200.0	1003.7 800.0 1200.0	940.9 750.0 1100.0	870.2 700.0 1000.0
Coil 4 P	7.499 8.000 10.000	23.713 20.000 30.000	39.994 33.000 50.000	56.524 48.000 70.000	73.309 60.000 90.000	89.718 73.000 110.000	106.281 88.000 130.000	122.589 99.000 150.000
Coil 5 M	2342.2 1900.0 2800.0	2321.1 1800.0 2800.0	2279.0 1800.0 2700.0	2206.2 1800.0 2600.0	2095.7 1700.0 2500.0	1965.6 1600.0 2400.0	1817.7 1500.0 2200.0	1658.6 1400.0 2100.0
Coil 5 P	8.298 8.000 10.000	26.100 20.000 31.000	43.866 34.000 51.000	61.752 48.000 72.000	79.740 62.000 93.000	97.174 76.000 110.000	114.636 89.000 130.000	131.696 100.000 150.000
Coil 6 M	5916.3 4700.0 7100.0	5872.1 4700.0 7000.0	5781.9 4800.0 6900.0	5613.5 4400.0 6800.0	5345.3 4200.0 6400.0	5016.1 4000.0 6000.0	4627.8 3700.0 5800.0	4195.4 3400.0 5100.0
Coil 6 P	8.727 7.000 10.000	27.412 22.000 32.000	46.136 38.000 54.000	65.142 51.000 76.000	84.333 65.000 98.000	103.139 80.000 120.000	122.080 94.000 140.000	140.599 110.000 180.000

HDIL AFTER LOG VERIFICATION SUMMARY

TOOL #: 1515MA 179516 DATE/TIME PERFORMED: Thu Oct 26 04:25:24 2006 DAYS SINCE CAL: 55

UNIT #: 5753XB 10164949

ZERO DATA(mv) 10 KHz 30 KHz 50 KHz 70 KHz 90 KHz 110 KHz 130 KHz 150 KHz

Coil 0 R	-0.008 -0.095 0.085	-0.012 -0.083 0.037	-0.007 -0.048 0.012	-0.001 -0.039 0.021	0.004 -0.032 0.028	0.006 -0.030 0.030	0.005 -0.028 0.032	0.000 -0.030 0.030
Coil 0 Q	0.043	0.012	-0.002	-0.005	-0.004	-0.001	0.002	0.006

	0.004	0.084	-0.107	0.133	-0.036	0.024	-0.041	0.019	-0.038	0.022	-0.035	0.025	-0.033	0.027	-0.029	0.031
Coil 1 R	-0.016	-0.010	0.001	0.007	0.008	0.001	-0.003	-0.003	-0.003	-0.003	-0.003	-0.003	-0.003	-0.003	-0.003	-0.003
	-0.097	0.083	-0.062	0.038	-0.032	0.028	-0.024	0.036	-0.024	0.038	-0.027	0.033	-0.032	0.028	-0.032	0.028
Coil 1 Q	0.032	-0.001	-0.008	-0.003	0.004	0.005	0.004	0.005	0.004	0.005	0.004	0.005	0.004	0.005	-0.002	-0.002
	-0.389	0.431	-0.100	0.100	-0.039	0.021	-0.038	0.022	-0.029	0.031	-0.024	0.036	-0.028	0.032	-0.033	0.027
Coil 2 R	-0.013	-0.014	-0.008	0.005	0.016	0.009	-0.001	-0.007	-0.001	-0.007	-0.001	-0.007	-0.001	-0.007	-0.007	-0.007
	-0.090	0.050	-0.054	0.008	-0.049	0.011	-0.034	0.026	-0.026	0.034	-0.030	0.030	-0.037	0.023	-0.041	0.019
Coil 2 Q	0.037	0.001	-0.007	-0.012	-0.005	0.010	0.009	0.001	0.009	0.001	0.009	0.001	0.009	0.001	0.001	0.001
	-0.315	0.385	-0.098	0.102	-0.041	0.019	-0.045	0.015	-0.033	0.027	-0.024	0.036	-0.024	0.036	-0.032	0.028
Coil 3 R	-0.014	-0.016	-0.006	0.000	0.008	0.009	0.011	0.010	0.011	0.010	0.011	0.010	0.011	0.010	0.010	0.010
	-0.057	0.023	-0.064	0.018	-0.060	0.020	-0.044	0.036	-0.038	0.042	-0.035	0.045	-0.033	0.047	-0.032	0.048
Coil 3 Q	0.053	0.005	-0.007	-0.009	-0.009	-0.004	0.001	0.005	-0.004	0.001	0.001	0.005	-0.004	0.001	0.005	0.005
	-0.147	0.253	-0.070	0.090	-0.048	0.032	-0.052	0.028	-0.051	0.029	-0.046	0.034	-0.043	0.037	-0.038	0.042
Coil 4 R	-0.048	-0.033	-0.018	-0.001	0.016	0.015	0.001	-0.014	0.016	0.015	0.001	-0.014	0.016	0.015	-0.014	-0.014
	-0.103	0.017	-0.098	0.022	-0.086	0.034	-0.082	0.058	-0.044	0.078	-0.047	0.073	-0.082	0.058	-0.073	0.047
Coil 4 Q	0.120	0.016	-0.015	-0.023	-0.008	0.011	0.019	0.007	0.011	0.019	0.011	0.019	0.011	0.019	0.007	0.007
	-0.193	0.407	-0.081	0.119	-0.074	0.048	-0.085	0.035	-0.088	0.052	-0.051	0.089	-0.042	0.078	-0.058	0.064
Coil 5 R	-0.051	-0.071	-0.036	-0.011	0.012	0.021	0.031	0.002	0.021	0.031	0.031	0.002	0.021	0.031	0.002	0.002
	-0.196	0.044	-0.185	0.055	-0.158	0.082	-0.147	0.093	-0.123	0.117	-0.107	0.133	-0.105	0.135	-0.118	0.124
Coil 5 Q	0.188	0.021	-0.019	-0.026	-0.025	-0.008	0.009	0.025	-0.008	0.009	0.009	0.025	-0.008	0.009	0.025	0.025
	-0.408	0.792	-0.223	0.277	-0.132	0.108	-0.144	0.096	-0.149	0.091	-0.131	0.109	-0.122	0.118	-0.103	0.137
Coil 6 R	-0.120	-0.080	-0.038	0.019	0.041	0.023	-0.003	-0.016	0.041	0.023	-0.003	-0.016	0.041	0.023	-0.016	-0.016
	-0.428	0.172	-0.410	0.190	-0.344	0.256	-0.305	0.295	-0.274	0.328	-0.288	0.312	-0.324	0.276	-0.329	0.271
Coil 6 Q	0.275	0.030	-0.034	-0.022	-0.004	0.029	0.023	0.018	0.029	0.023	0.023	0.018	0.029	0.023	0.018	0.018
	-1.257	1.743	-0.572	0.828	-0.341	0.259	-0.345	0.255	-0.330	0.270	-0.281	0.319	-0.287	0.333	-0.301	0.299

ELEC. GAINS 10 KHz 30 KHz 50 KHz 70 KHz 90 KHz 110 KHz 130 KHz 150 KHz

Coil 0 M	125.03	124.05	121.69	117.66	113.06	107.67	101.59	94.23
	122.40	127.39	121.74	128.71	120.07	124.97	118.52	121.28
	111.61	118.17	105.66	109.97	98.78	102.79	90.77	94.48
Coil 0 P	7.381	23.284	39.101	54.752	70.123	85.621	101.014	116.756
	4.314	10.314	20.084	28.084	35.958	41.958	51.998	57.998
	67.881	73.881	83.668	89.668	99.246	105.246	114.951	120.951
Coil 1 M	226.87	225.31	221.32	214.51	206.44	196.63	185.58	171.67
	222.19	231.26	221.22	230.25	218.47	227.38	212.48	221.16
	203.93	212.25	193.09	200.97	180.43	187.80	165.47	172.23
Coil 1 P	7.406	23.553	39.613	55.560	71.281	87.252	103.139	119.413
	4.343	10.343	20.365	28.385	38.480	42.480	52.834	58.834
	69.045	75.045	85.330	91.330	101.404	107.404	117.653	123.853
Coil 2 M	455.27	452.57	445.69	432.94	418.67	401.09	380.78	354.93
	448.05	484.26	444.50	482.85	439.97	457.93	429.14	446.85
	413.49	430.38	394.04	410.13	370.76	385.89	342.38	358.35
Coil 2 P	7.389	23.336	39.252	55.099	70.732	86.665	102.567	118.956
	4.322	10.322	20.145	28.145	38.110	42.110	52.325	58.325
	68.474	74.474	84.690	90.690	100.799	106.799	117.152	123.152
Coil 3 M	726.64	721.17	708.10	685.90	660.50	630.17	596.46	554.51
	711.52	740.56	707.91	738.80	698.78	727.30	679.38	707.11
	652.08	678.89	618.59	643.84	580.20	603.88	534.92	558.76
Coil 3 P	7.492	23.673	39.768	55.701	71.395	87.266	103.081	119.288
	4.424	10.424	20.477	28.477	38.633	42.633	52.941	58.941
	69.149	75.149	85.308	91.308	101.313	107.313	117.489	123.489
Coil 4 M	1145.2	1137.7	1118.6	1085.5	1047.6	1001.7	949.7	884.3
	1119.5	1185.2	1115.0	1160.5	1102.0	1147.0	1073.8	1117.4
	1032.7	1074.8	982.1	1022.1	922.4	960.1	851.5	886.2
Coil 4 P	7.561	23.962	40.298	56.506	72.503	88.728	104.940	121.592
	4.490	10.490	20.753	28.753	37.141	43.141	53.724	59.724
	70.217	78.217	86.723	92.723	103.122	109.122	119.728	125.728
Coil 5 M	2348.3	2323.7	2268.0	2179.2	2077.0	1960.1	1834.2	1685.2
	2296.6	2390.4	2278.4	2371.4	2235.6	2326.9	2155.9	2243.9
	2048.8	2132.4	1922.3	2000.8	1781.7	1854.4	1623.0	1689.2
Coil 5 P	8.361	26.347	44.171	61.736	78.943	96.203	113.302	130.705
	5.290	11.290	23.139	29.139	41.013	47.013	58.957	64.957
	76.858	82.858	94.195	100.195	111.487	117.487	128.837	134.837
Coil 6 M	5927.4	5875.2	5750.5	5541.1	5293.5	4997.3	4665.7	4259.4
	5800.6	6037.4	5763.1	5998.3	5870.9	5902.3	5485.1	5709.0
	5228.6	5439.9	4906.2	5108.5	4534.0	4719.0	4105.8	4273.2
Coil 6 P	8.790	27.666	46.455	65.113	83.550	102.191	120.727	139.643
	5.718	11.718	24.446	30.446	43.285	49.285	62.332	68.332
	81.268	87.268	100.166	106.166	118.906	124.906	137.763	143.763



Baker Atlas



COMPANY
WELL
FIELD
RIG NAME

PEAK PETROLEUM INDUSTRIES NIGERIA LTD
BILABRI D3
BILABRI
BULFORD DOLPHIN

FILE NO:

API NO:

SCALE 1:200

LOCATION:

NORTH: 515,558.23 M
EAST: 731,847.1 M

ELEVATIONS:

KB
DF 25 M
GL -145 M

FIELD PRINT
TIGHT HOLE

DATE 26-OCT-2006