



HIGH DEFINITION INDUCTION LOGSM
COMPENSATED Z-DENSITOGSM
COMPENSATED NEUTRON LOG
GAMMA RAY LOG

Baker Atlas

FILE NO:	COMPANY	PEAK PETROLEUM INDUSTRIES NIGERIA LTD
API NO:	WELL	BILABRI D3
SCALE 1:200	FIELD	BILABRI
	RIG NAME	BULFORD DOLPHIN
Ver. 3.87 FIELD PRINT TIGHT HOLE	LOCATION:	NORTH: 515,558.23 M EAST: 731,847.1 M
PERMANENT DATUM LOG MEASURED FROM DRILL MEAS. FROM	MSL DF DF	ELEVATION 25 M ABOVE P.D.
	OTHER SERVICES	SPECTRALOG HDIL/MAC/GR RCI/SAMPLEVIEW/GR SMC
	ELEVATIONS:	KB DF 25 M GL -145 M

DATE	26-OCT-2006	27-OCT-2006
RUN	1	2
TRIP	1	1
SERVICE ORDER	NG543428	NG543429
DEPTH DRILLER	2555 M	2555 M
DEPTH LOGGER	N/A	2556.3 M
BOTTOM LOGGED INTERVAL	2505.0 M	2552.7 M
TOP LOGGED INTERVAL	829.0 M	2345.0 M
CASING DRILLER	13.375 IN @ 829 M	13.375 IN @ 829 M
CASING LOGGER	829.0 M	N/A
BIT SIZE	12.25 IN	12.25 IN
TYPE OF FLUID IN HOLE	OBM	OBM
DENSITY	10.1 LB/G	10.1 LB/G
VISCOSITY	63 S	63 S
PH	N/A	N/A
FLUID LOSS	23 CS	23 CS
SOURCE OF SAMPLE	N/A	N/A
RM AT MEAS. TEMP.	N/A @ N/A	N/A @ N/A
RMF AT MEAS. TEMP.	N/A @ N/A	N/A @ N/A
RMC AT MEAS. TEMP.	N/A @ N/A	N/A @ N/A
SOURCE OF RMF	N/A	N/A
RMC	N/A	N/A
RM AT BHT	N/A @ N/A	N/A @ N/A
TIME SINCE CIRCULATION	46 HOURS	16 HOURS
MAX. RECORDED TEMP.	196.9 DEGF	187.5 DEGF
EQUIP. NO.	HSL-8706	HSL 8706
LOCATION	PH	PH
RECORDED BY	T. OGILVIE / A. GREEFF	T. OGILVIE
WITNESSED BY	CHARLES OGBORBE	CHARLES OGBORBE

IN MAKING INTERPRETATIONS OF LOGS OUR EMPLOYEES WILL GIVE CUSTOMER THE BENEFIT OF THEIR BEST JUDGEMENT. BUT SINCE ALL INTERPRETATIONS ARE OPINIONS BASED ON INFERENCES FROM ELECTRICAL OR OTHER MEASUREMENTS, WE CANNOT, AND WE DO NOT GUARANTEE THE ACCURACY OR CORRECTNESS OF ANY INTERPRETATION. WE SHALL NOT BE LIABLE OR RESPONSIBLE FOR ANY LOSS, COST, DAMAGES, OR EXPENSES WHATSOEVER INCURRED OR SUSTAINED BY THE CUSTOMER RESULTING FROM ANY INTERPRETATION MADE BY ANY OF OUR EMPLOYEES.

BOREHOLE RECORD

BIT SIZE	FROM	TO
12.25 IN	840 M	2555.0 M

CASING RECORD

SIZE	WEIGHT	GRADE	FROM	TO
13.375 IN	68 LB/F	K-55	0 M	829 M

REMARKS

RUN 1 TRIP 1:

1. ALL TOOLS WERE CONVEYED ON WIRELINE.
2. DEPTH CORRECTED TO MAGNETIC MARKS AND ADJUSTED FOR STRETCH.
3. RUN 1 BOREHOLE VOL = 179.1M3. CEMENT VOL = 100.3 M3 (9.625" CSG).
4. NEUTRON POROSITY RECORDED ON SANDSTONE MATRIX.
5. TOP OF FISH LOCATED AT APPROXIMATELY 2542M.
6. SIGNIFICANT WASHOUT AFFECTED NEUTRON / DENSITY & ACOUSTIC LOG RESPONSE OVER INTERVAL 945 - 950M, ACROSS SAND INTERVALS AND IMMEDIATELY BELOW CSG SHOE.
7. WASHOUT GREATER THAN MAXIMUM CALIPER READING IMMEDIATELY BELOW CSG SHOE.
8. ADAPTIVE BOREHOLE CORRECTIONS (STANDOFF) APPLIED TO HDIL.
9. HDIL AND CNC ARE CALIPER CORRECTED.

RUN 2 TRIP 1:

1. ALL TOOLS USED WERE THE SAME AS PER RUN 1.
2. LOG TIED INTO RUN 1.

3. NEUTRON POROSITY RECORDED ON SANDSTONE MATRIX.
4. ADAPTIVE BOREHOLE CORRECTIONS (STANDOFF) APPLIED TO HDIL.
5. HDIL AND CNC ARE CALIPER CORRECTED.
6. COMBINED BVOL (RUN 1 & 2) = 6250 FT3. COMBINED CVOL = 3430 FT3.
7. DATA FROM RUNS 1 AND 2 SPLICED AT 2465.0M

EQUIPMENT DATA

RUN	TRIP	TOOL	SERIES NO.	SERIAL NO.	POSITION
1	1	SWVL	3944XA	112591	FREE
1	1	DHPA	4430XA	10003917	FREE
1	1	TTRM	3981XA	186331	FREE
1	1	COMR	3514XA	10203475	FREE
1	1	DSL	1329XA	167531	FREE
1	1	CN	2446XA	153117	DECENTRALIZED
1	1	ZDL EA	2228EA	167879	DECENTRALIZED
1	1	ZDL MA	2228MA	114428	PAD DEVICE
1	1	KNJT	3939XA	183765	FREE
1	1	ORIT	4401XA	10089606	FREE
1	1	XMAC EA	1677EA	369972	CENTRALIZED
1	1	XMAC MB	1678MB	189692	CENTRALIZED
1	1	XMAC PA	1678PA	190325	CENTRALIZED
1	1	XMAC BA	1678BA	1179582	CENTRALIZED
1	1	XMAC FA	1678FA	189314	CENTRALIZED
1	1	KNJT	3939XA	176925	FREE
1	1	HDIL EA	1515EA	10179438	1.5" STANDOFF
1	1	HDIL MA	1515MA	179516	1.5" STANDOFF

MAIN LOG 1:1000 SCALE

ECLIPS 5.1i Sep 16, 2005
Updates: 1,2,37

Sun Oct 29 12:26:37 2006

Perplf /main/61

Cplot 9.18

Pdf_Cpp /main/16

Fileview 5.00

PARAMETER AND FILTER SUMMARY REPORT

File: /data/peak/bilabari_D3/1777103.prm
LOGGING MODE: DEPTH DIRECTION: UP
TOP DEPTH: 807.453 m BOTTOM DEPTH: 2510.028 m

SYMMETRIC FILTER

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
CHT	FILTER ()	medium (1)		TOP	BOTTOM
Y AXIS CALIPER	FILTER ()	medium (1)		"	"
SPEED	FILTER ()	medium (1)		"	"
TENSION	FILTER ()	medium (1)		"	"
GR	FILTER ()	medium (1)		"	"
CN	FILTER ()	medium (1)		"	"
X AXIS CALIPER	FILTER ()	medium (1)		"	"
	FILTER (.h)	medium (1)		"	"
	FILTER (.l)	medium (1)		"	"
ZDL	FILTER ()	medium (1)		"	"
DT24	FILTER ()	light (2)		"	"

BOREHOLE & CEMENT

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
CASING - BOREHOLE & CEMENT VOLUME	CASING O.D.	9.625	In	TOP	BOTTOM
	CASING THICKNESS	0.000	In	"	"
BIT SIZE	BIT SIZE	12.250	In	"	"
BOREHOLE CORR DIAMETER SOURCE	CALIPER/FIXED DIA. (cnbh*)	USE CALIPER		"	"
	CALIPER/FIXED DIA. (lft*)	USE CALIPER		"	"

	CALIPER/FIXED DIA. (mbh*)	USE CALIPER			
BOREHOLE CORR DIAMETER	FIXED DIAMETER (cnbh*)	12.250	In		
	FIXED DIAMETER (mbh*)	12.250	In		
MUD VALUES SOURCE	RMUD SOURCE (HDIL)	OIL BASE MUD			
MUD VALUES	MUD SAMPLE TEMP	75.0	degF		
	MUD SAMPLE RES	1.000	ohm.m		
	MUD REFERENCE TEMP	75.0	degF		
	TEMP GRADIENT	1.200	0.01 degF/ft		

CN PROCESSING

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
2446 CN MATRIX	2446 MATRIX	SANDSTONE		TOP	BOTTOM
CN SALINITY CORRECTION	SALINITY	0	ppm		
CN CASING & CEMENT CORRECTION	CORRECTION	ON OFF		TOP 822.655	822.655 BOTTOM
	BIT SIZE BEHIND CSNG	7.875	In	TOP	BOTTOM

ZDL PROCESSING

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
ZDL CHI-SMOOTH FILTER	DEN CHISM	ON		TOP	BOTTOM
	PE CHISM	ON			
MUD DENSITY	RHOmud	10.100	lbm/gal		
ZDL	ZDL TRACKING	ON			

ACOUSTIC POROSITY

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
DELTA T CURVE SELECTION	DT24 SOURCE	FIRST ARRIVAL DT24		TOP	BOTTOM

ACOUSTIC PICK CONTROL

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
DELTA-T REJECTION RANGE	REJECTION DTmin	40	us/ft	TOP	BOTTOM
	REJECTION DTmax	180	us/ft		
FIRST ARRIVAL PICK	SEARCH START OFFSET (sfan1*)	87	us		
	SEARCH START OFFSET (sfan2*)	87	us		
	SEARCH START OFFSET (sfan3*)	87	us		
	SEARCH START OFFSET (sfan4*)	87	us		
	SEARCH WINDOW LENGTH	1529	us	TOP	835.685
		1245	us	835.685	1453.363
		1045	us	1453.363	BOTTOM
	THRESHOLD FACTOR	0.30		TOP	1264.234
		0.33		1264.234	1264.996
		0.36		1264.996	1285.806
		0.40		1285.806	1999.717
		0.34		1999.717	2001.545
		0.30		2001.545	BOTTOM
	THRESHOLD MINIMUM (sfan1*)	2.0	pcf	TOP	880.948
		1.6	pcf	880.948	1352.626
		2.0	pcf	1352.626	2117.979
		1.7	pcf	2117.979	2118.131
		1.8	pcf	2118.131	BOTTOM
	THRESHOLD MINIMUM (sfan2*)	1.6	pcf	TOP	1352.474
		2.0	pcf	1352.474	2117.827
		1.7	pcf	2117.827	2117.979
		1.8	pcf	2117.979	BOTTOM
	THRESHOLD MINIMUM (sfan3*)	1.6	pcf	TOP	1352.321
		2.0	pcf	1352.321	2117.674
		1.7	pcf	2117.674	2117.827
		1.8	pcf	2117.827	BOTTOM
	THRESHOLD MINIMUM (sfan4*)	1.6	pcf	TOP	1352.169
		2.0	pcf	1352.169	2117.522
		1.7	pcf	2117.522	2117.674
		1.8	pcf	2117.674	BOTTOM
	E3 THRESHOLD	OFF		TOP	BOTTOM

ACOUSTIC QUALITY CONTROL

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
CYCLE SKIP LIMIT	CYCLE SKIP LIMIT	100	us	TOP	BOTTOM

ACOUSTIC WAVEFORM FILTER

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
WAVEFORM FILTER - DELTA T	SURFACE WAVE FILTER	ON		TOP	BOTTOM
	LOW FREQ CUTOFF	4000	Hz		
	HIGH FREQ CUTOFF	15000	Hz		

HIGH FREQ CUTOFF

15000
20000Hz
HzTOP
2144.6492144.649
BOTTOM

HDIL PROCESSING

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
HDIL TEMPERATURE CORRECTION	TEMP CORR SOURCE	USE RXTEMP		TOP	BOTTOM
ADAPTIVE BOREHOLE CORRECTION	ABC PROCESSING	ON		''	''
	ABC to CALCULATE	STANDOFF		''	''
	STANDOFF	1.50	In	''	''
	TOOL POSITION	ECCENTERED		''	''
	Rmud MULTIPLIER	1.000		''	''

CURVE DESCRIPTION REPORT

CURVE NAME	CURVE ALIAS	CREATION DATE	CURVE DESCRIPTION
F1:CALX	CAL	Oct 25 23:01:34 2006	CALIPER FROM X AXIS OF X-Y CALIPER(S)
F1:CHT	CHT	Oct 25 23:01:34 2006	CABLE HEAD TENSION
F1:CNC	CNC	Oct 25 23:01:34 2006	BOREHOLE SIZE CORRECTED COMPENSATED NEUTRON POROSITY
F1:GR	GR	Oct 25 23:01:34 2006	GAMMA RAY
F1:M2R1	MOR1	Oct 25 23:01:34 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 10 INCH
F1:M2R2	MOR2	Oct 25 23:01:34 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 20 INCH
F1:M2R3	MOR3	Oct 25 23:01:34 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 30 INCH
F1:M2R6	MOR6	Oct 25 23:01:34 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 60 INCH
F1:M2R9	MOR9	Oct 25 23:01:34 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 90 INCH
F1:M2RX	MORX	Oct 25 23:01:34 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 120 INCH
F1:PE	PE	Oct 25 23:01:34 2006	PHOTO ELECTRIC CROSS-SECTION
F1:SPD	SPD	Oct 25 23:01:34 2006	SPEED
F1:TTEN	TTEN	Oct 25 23:01:34 2006	TOTAL TENSION
F1:ZCOR	ZCOR	Oct 25 23:01:34 2006	DENSITY CORRECTION
F1:ZDNC	ZDNC	Oct 25 23:01:34 2006	BOREHOLE SIZE/MUD WEIGHT CORRECTED DENSITY

CURVE MEASURE POINT OFFSET

CURVE	OFFSET (m)	CURVE	OFFSET (m)	CURVE	OFFSET (m)	CURVE	OFFSET (m)
CALX	26.37	M2R1	2.44	M2R9	2.44	TTEN	0.00
CHT	0.00	M2R2	2.44	M2RX	2.44	ZCOR	26.37
CNC	31.70	M2R3	2.44	PE	26.37	ZDNC	26.37
GR	33.83	M2R6	2.44	SPD	0.00		

Presentation : sys1:/dat1a/peak/bilabarl_D3/slam_splice_1000.pdf [1:1000 Scale]

Plot Interval : 815 - 2557.88 Meters

Data File 1 : F1 : sys1:/dat1a/peak/bilabarl_D3/slams.xtf

Created On : Oct 25 23:01:34 2006


Company : PEAK PETROLEUM



Well : BILABRI D3



Field : BILABRI



File Interval : 769.772 - 2557.88 Meters



Oct : [777]


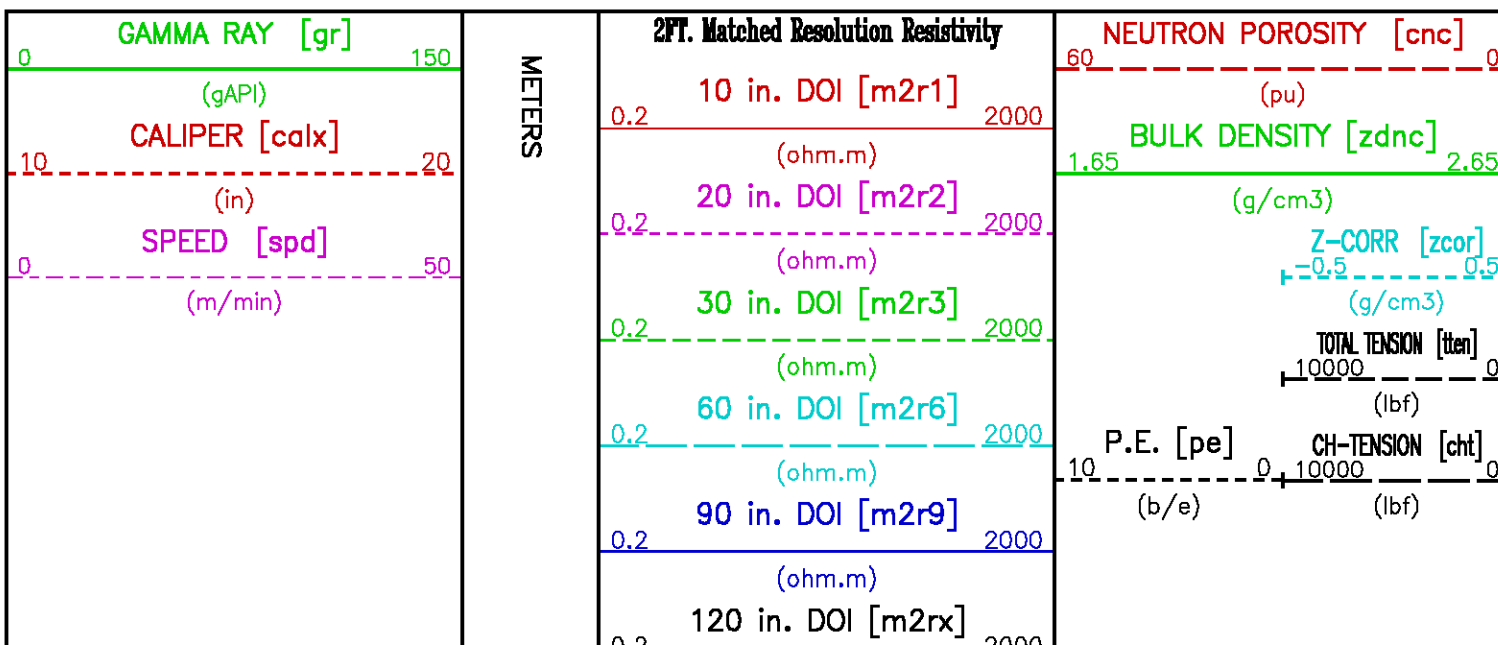


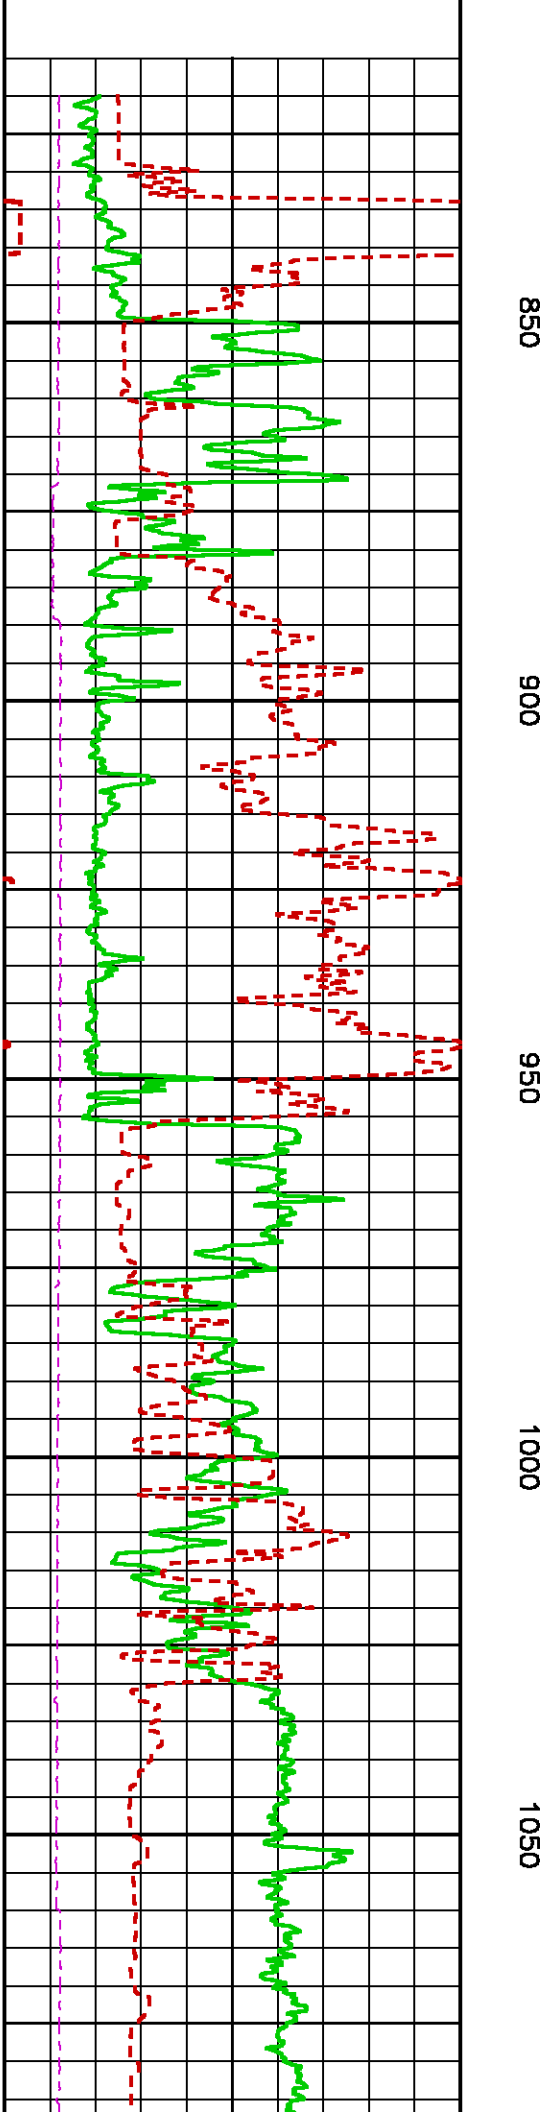
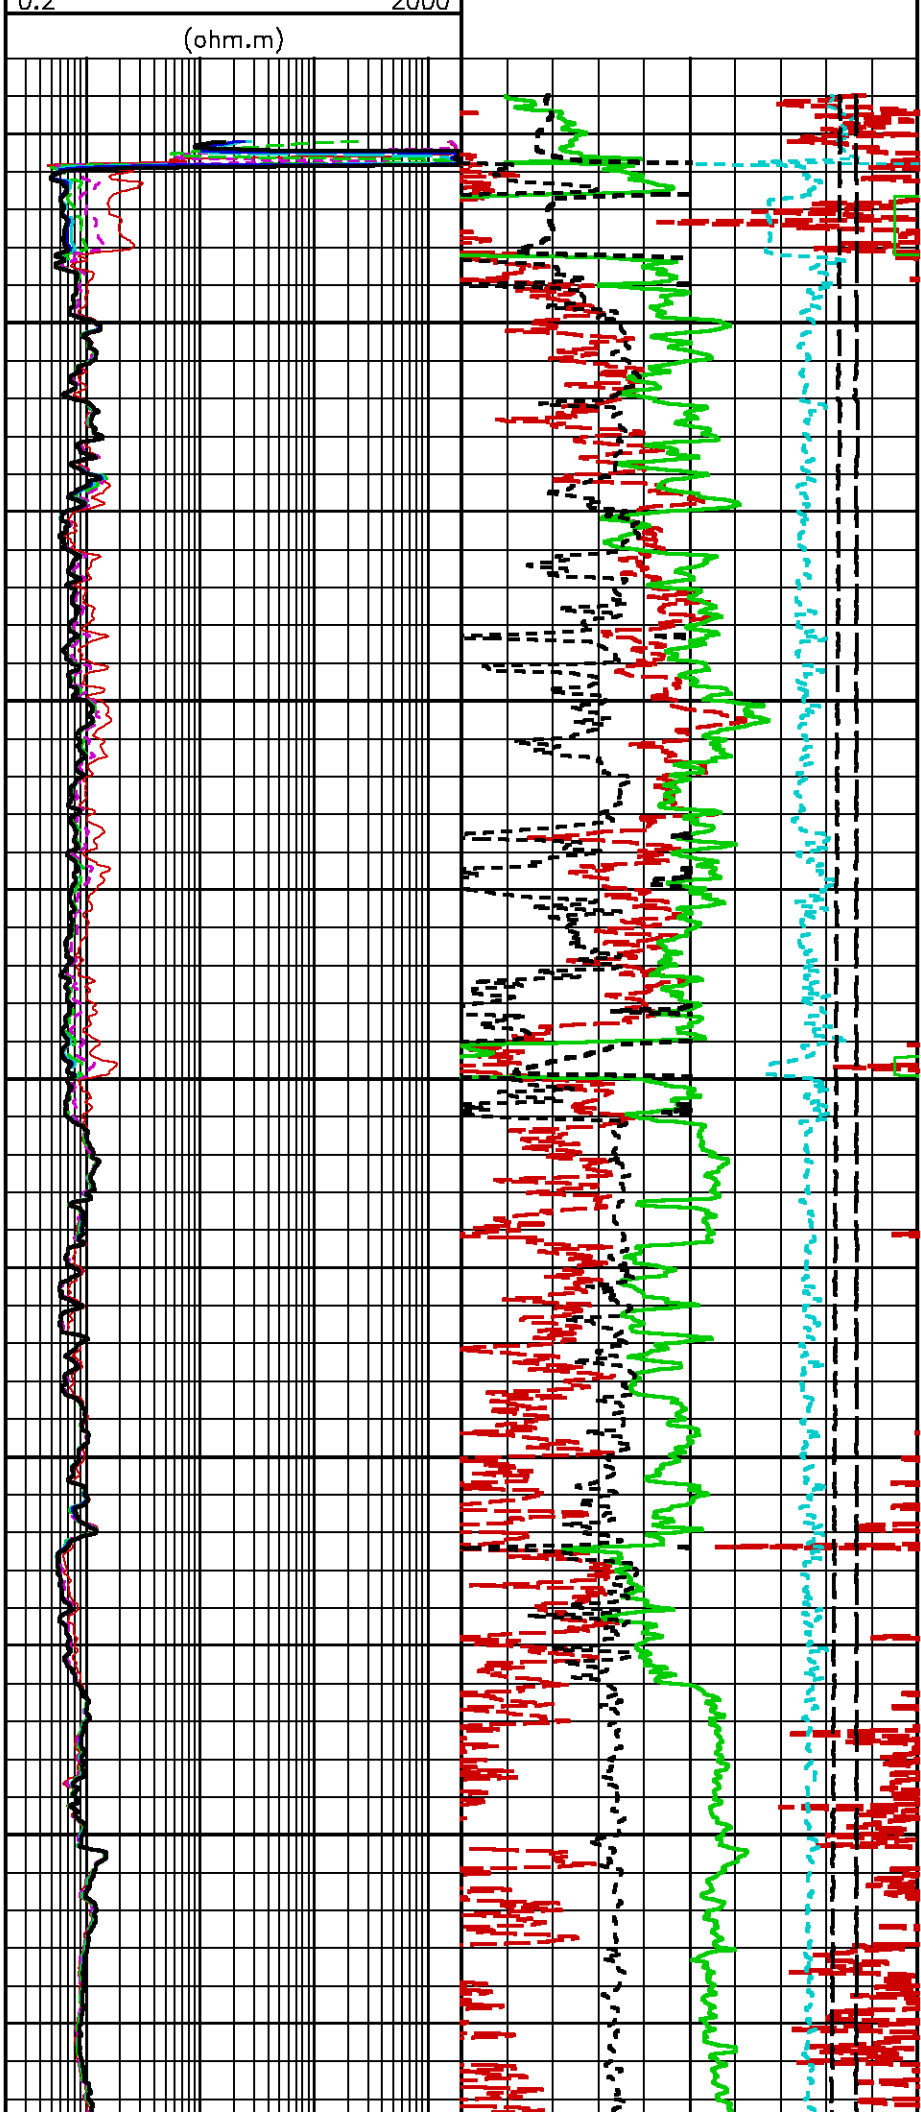


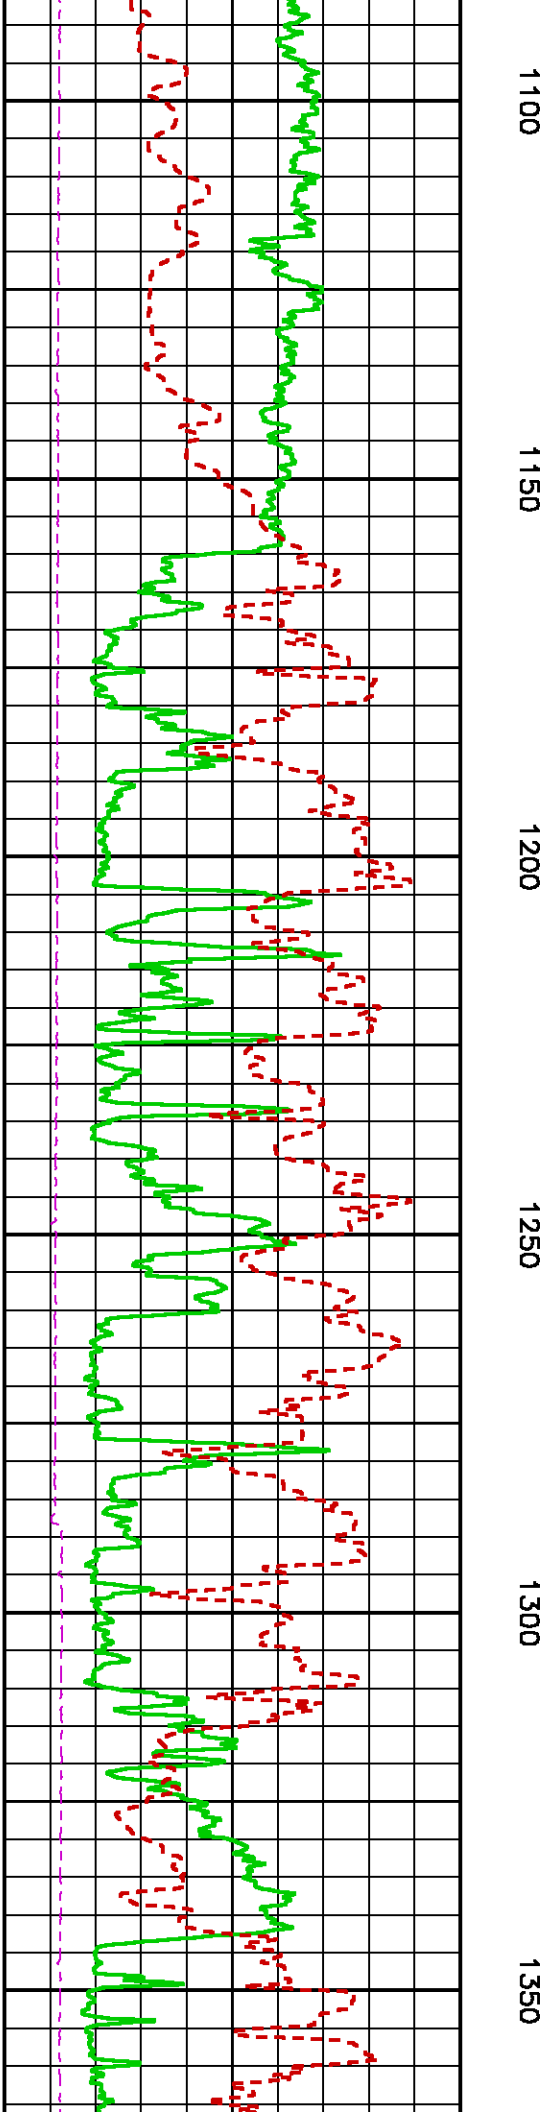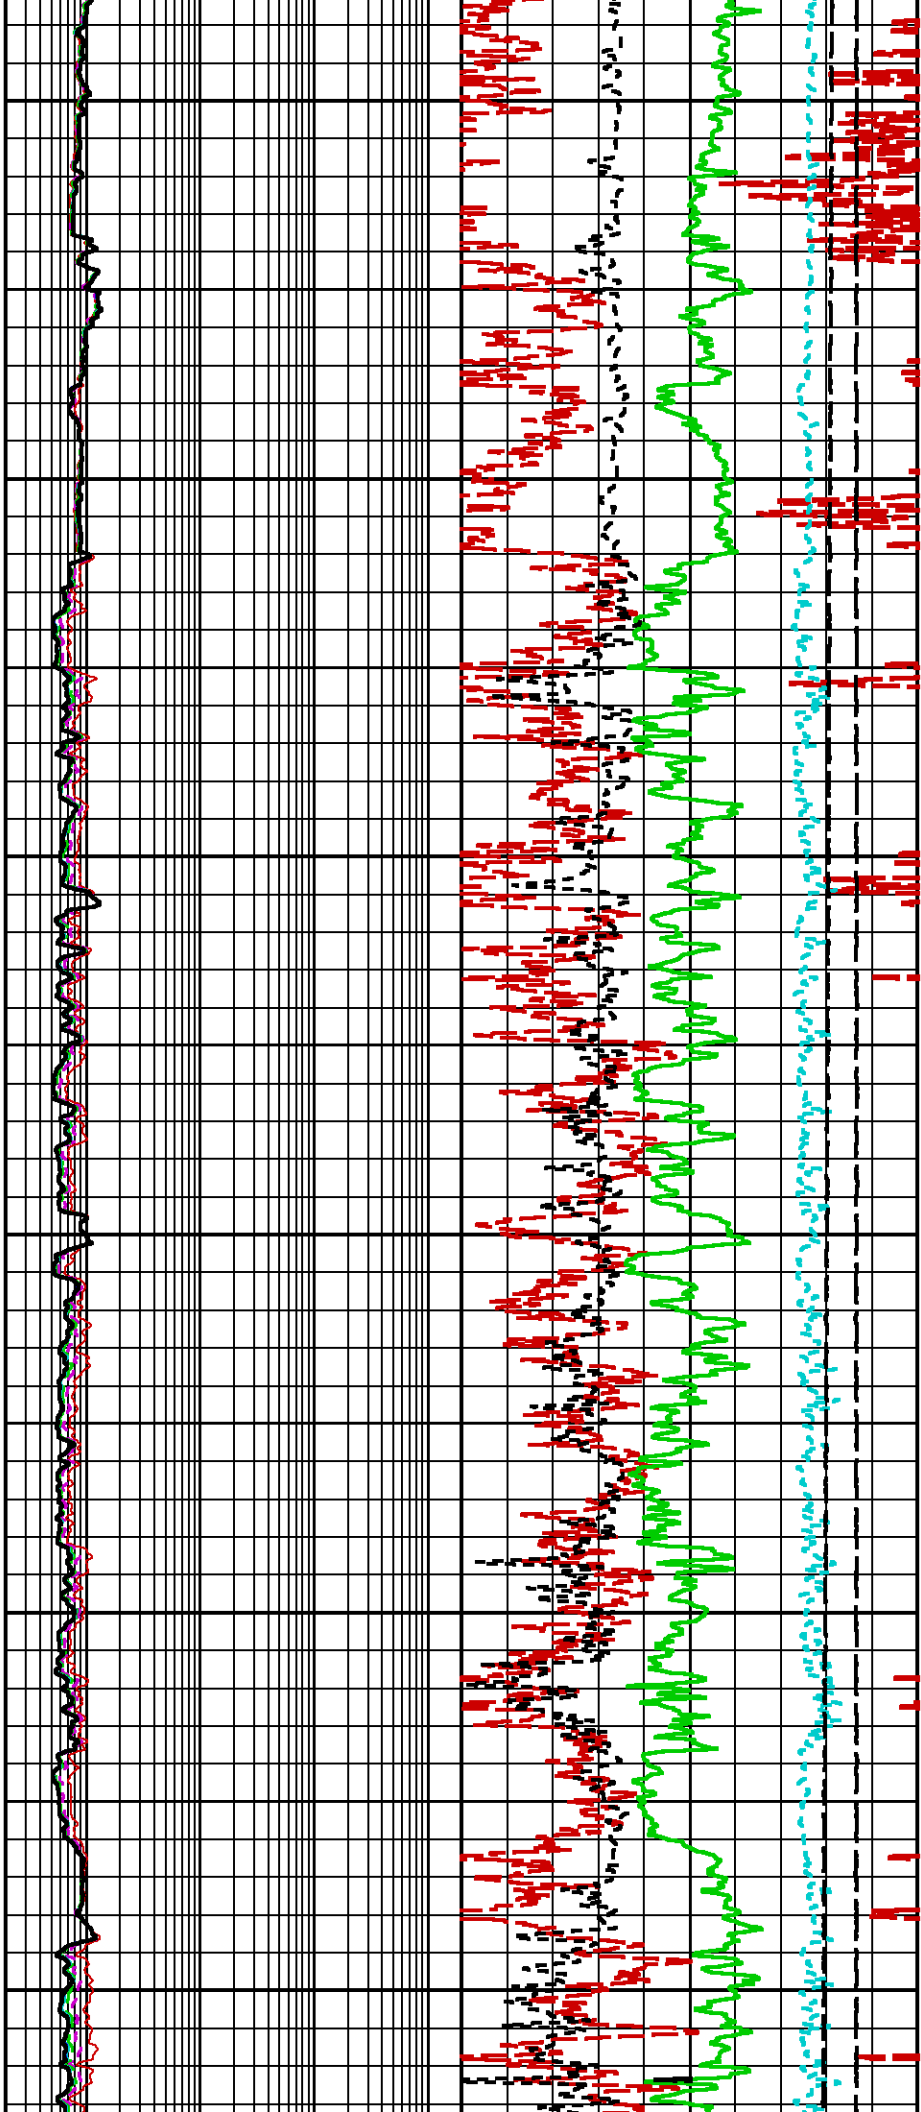


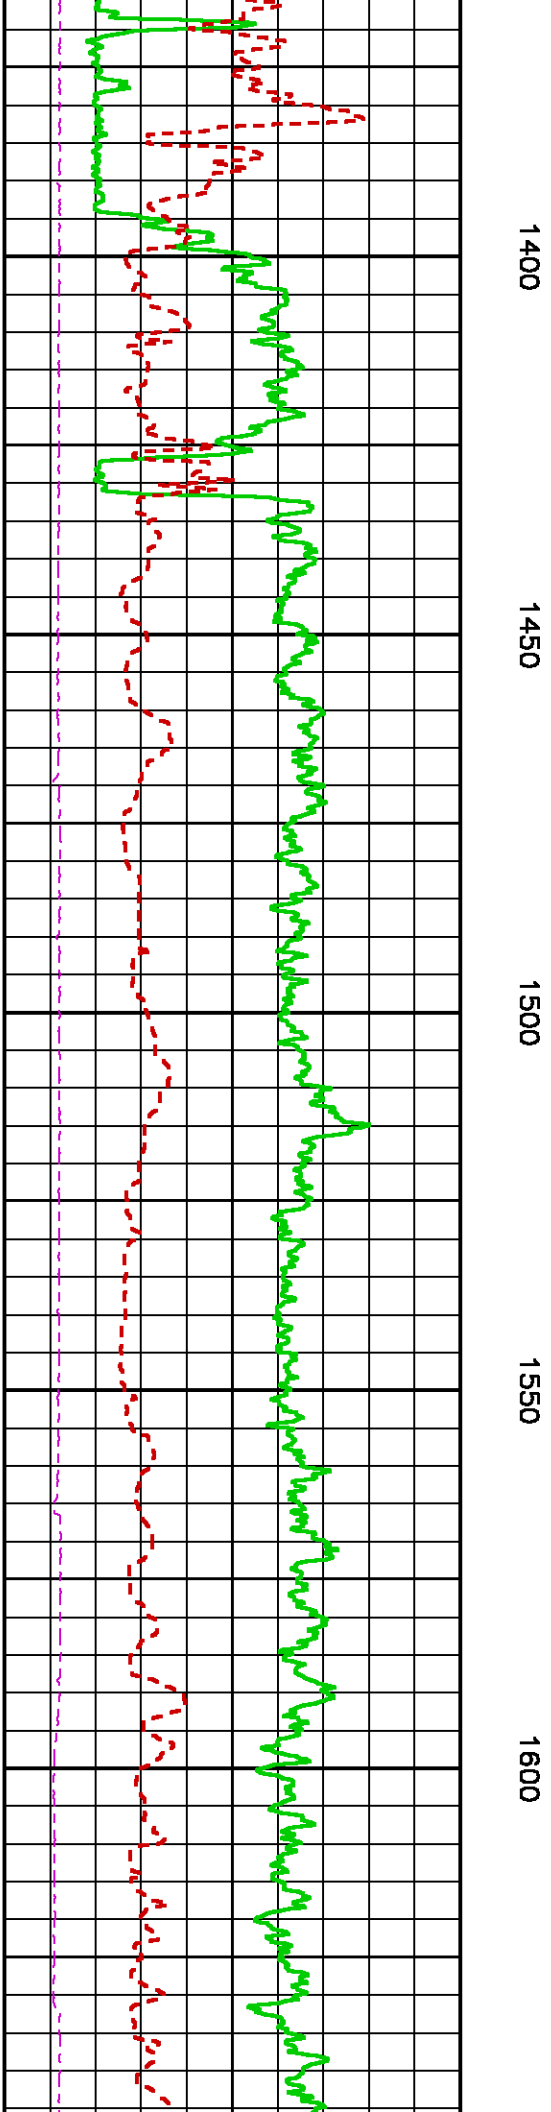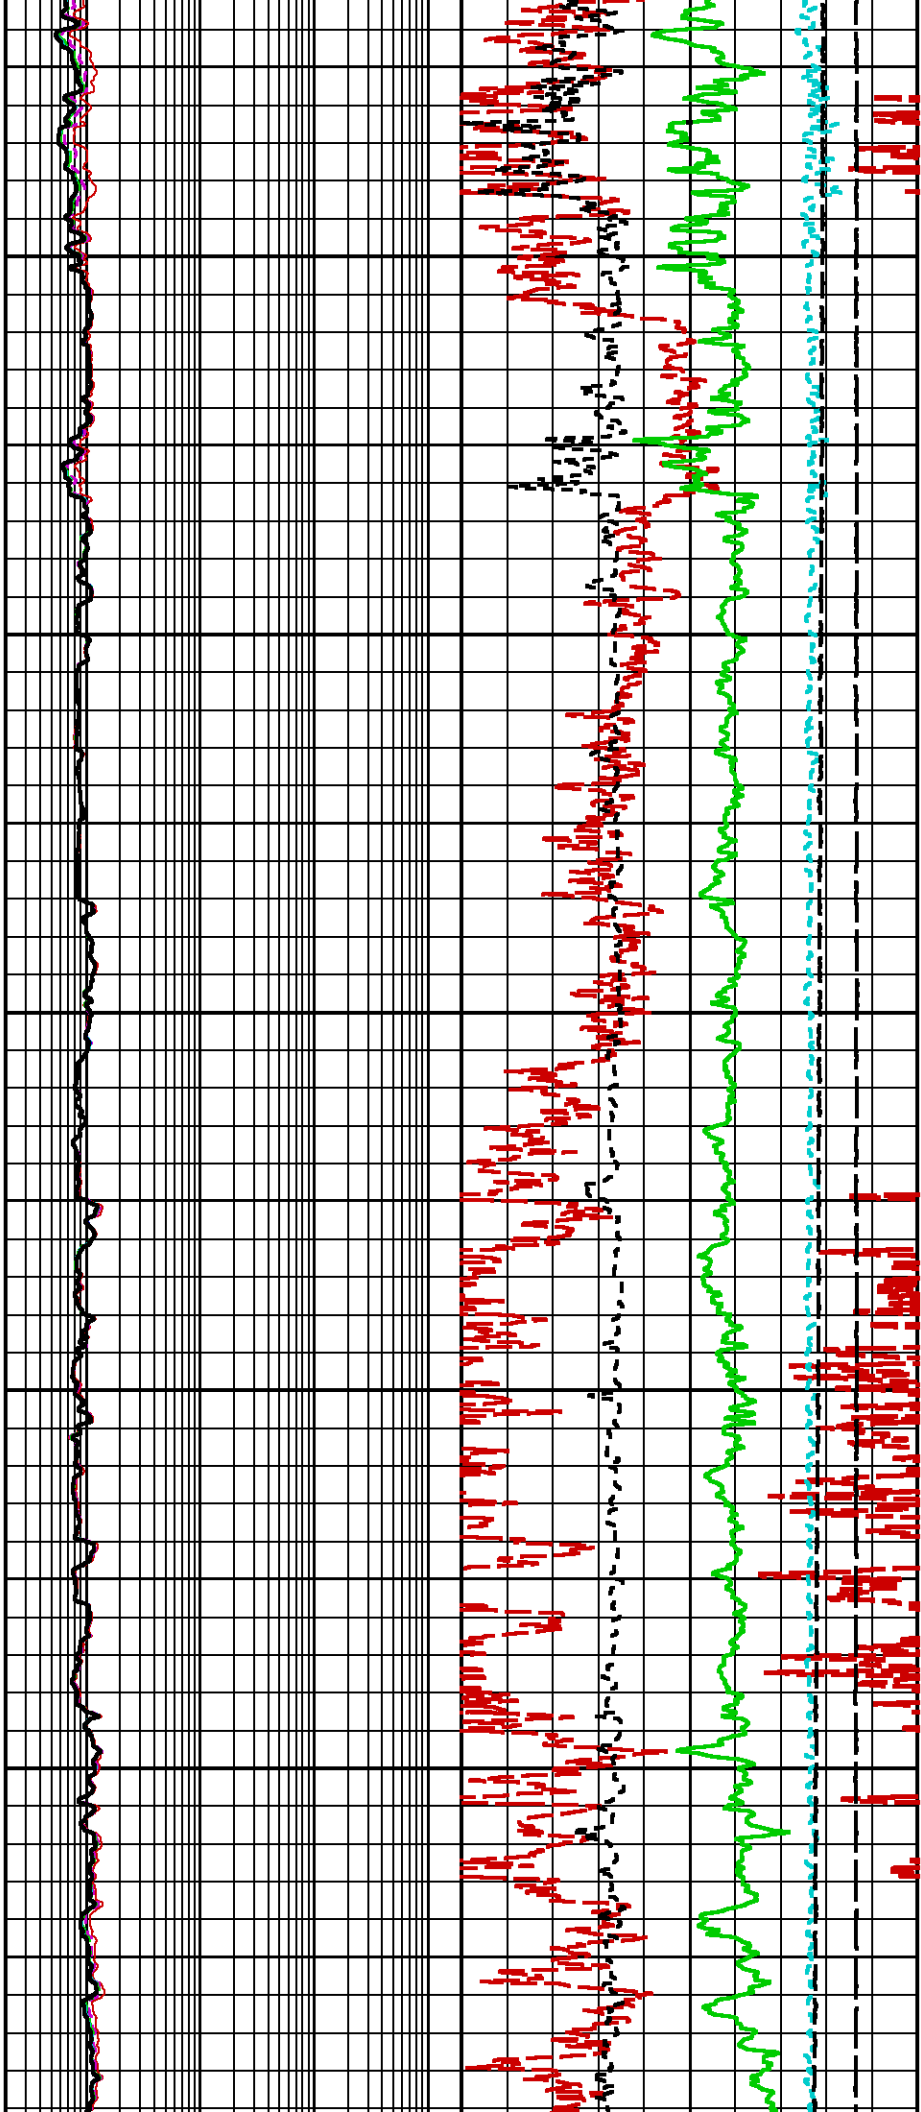

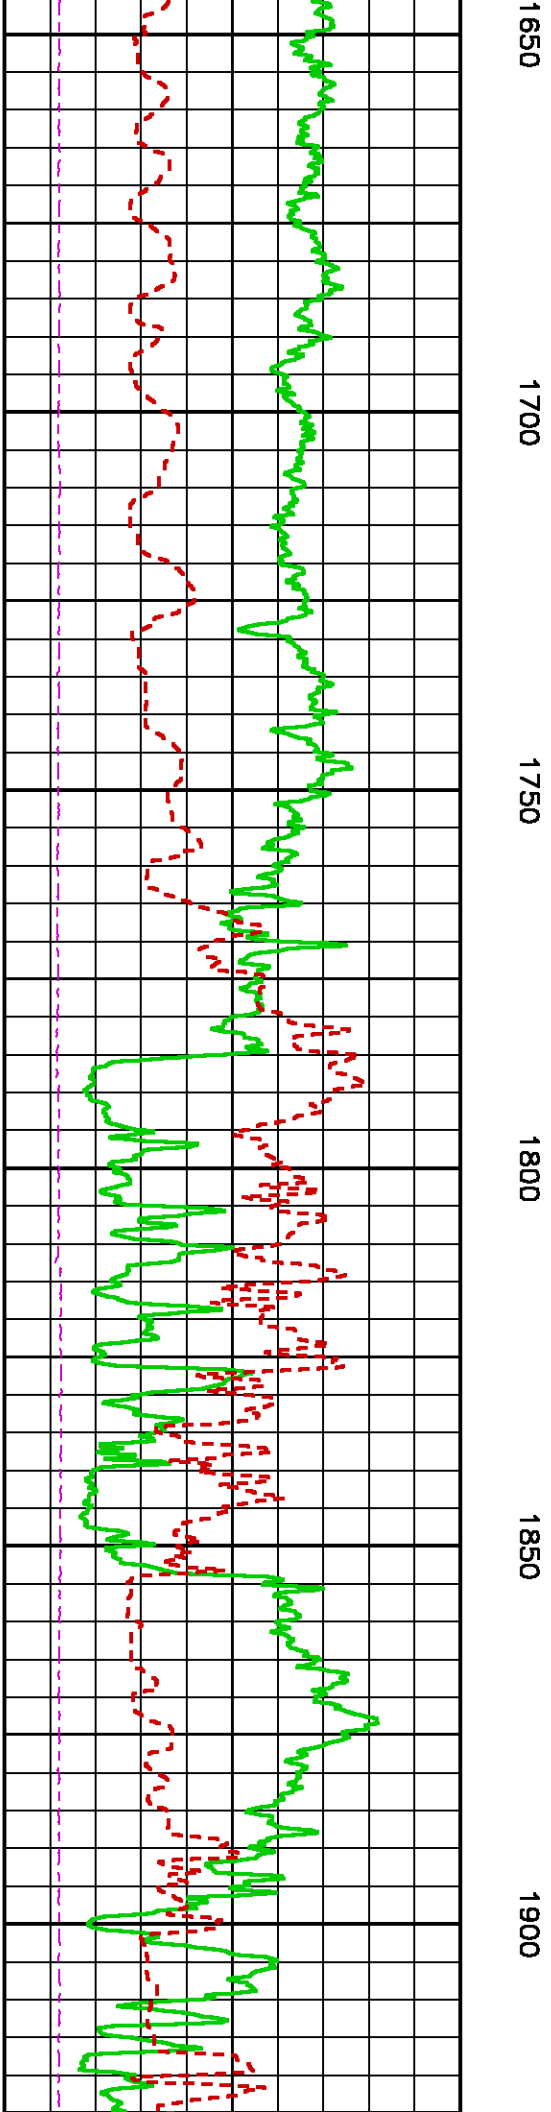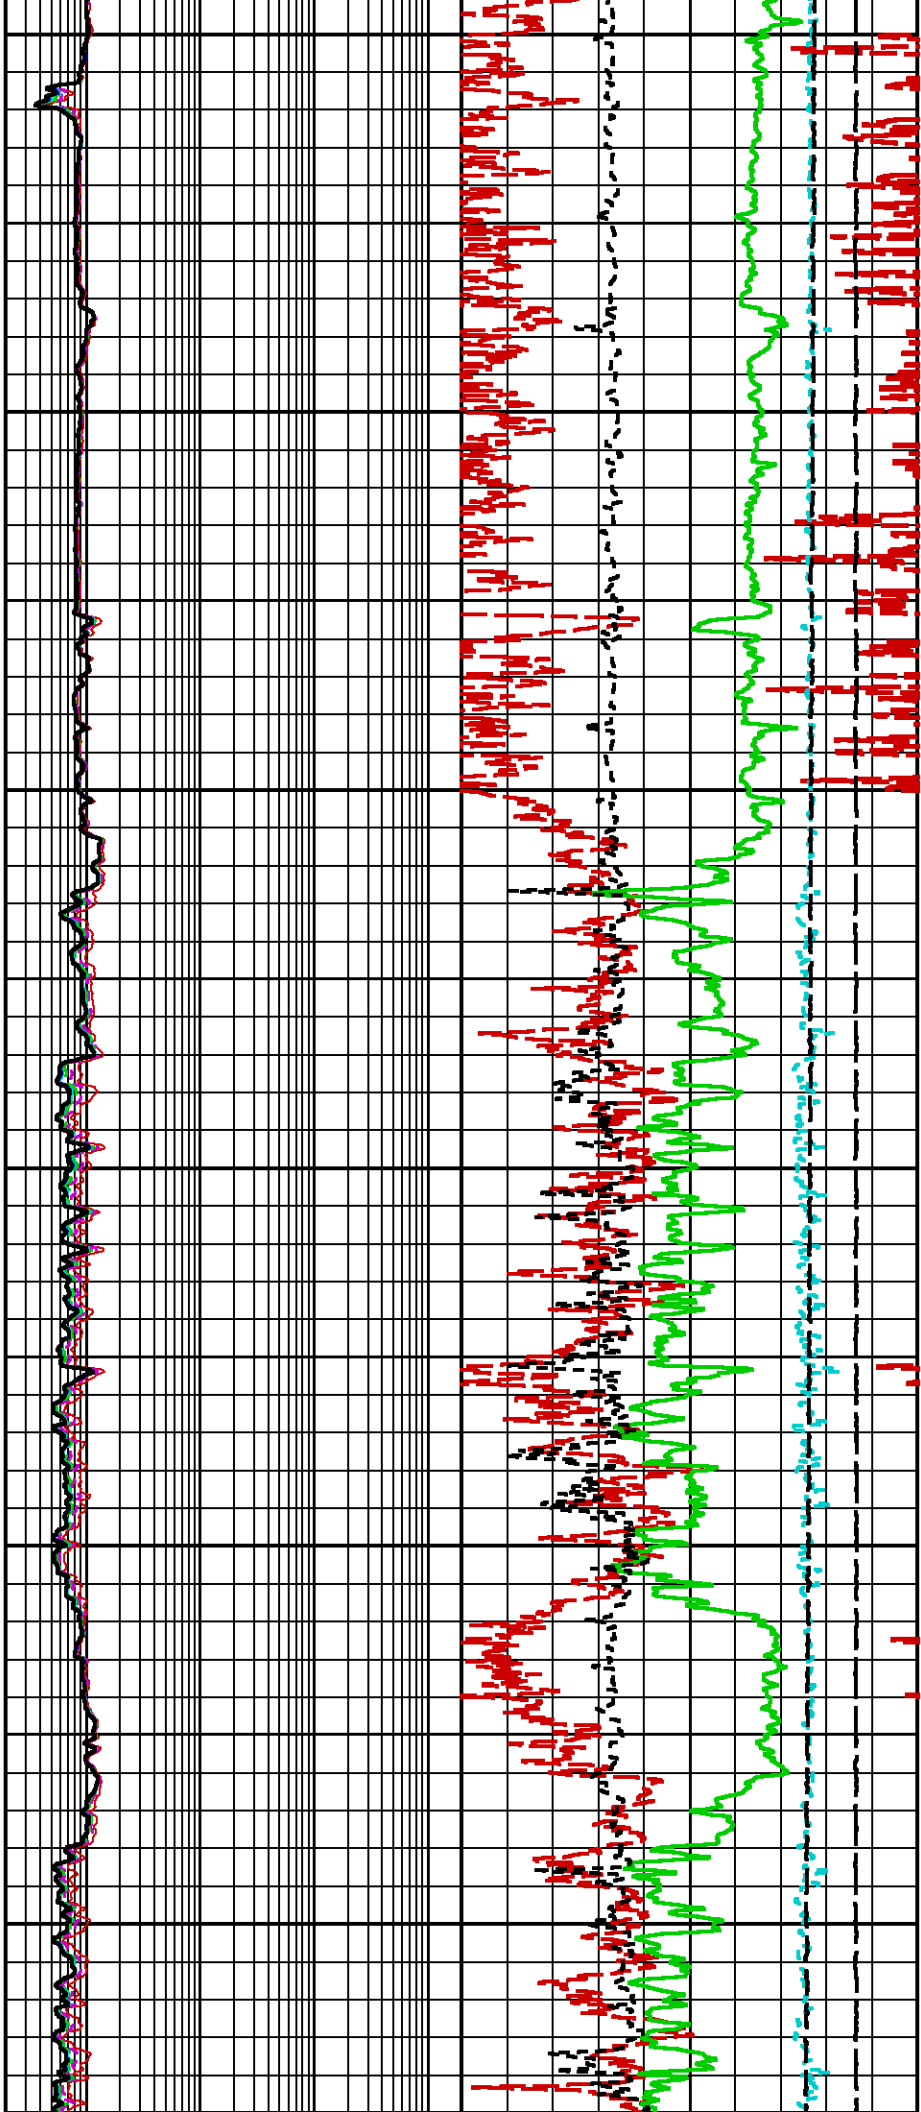

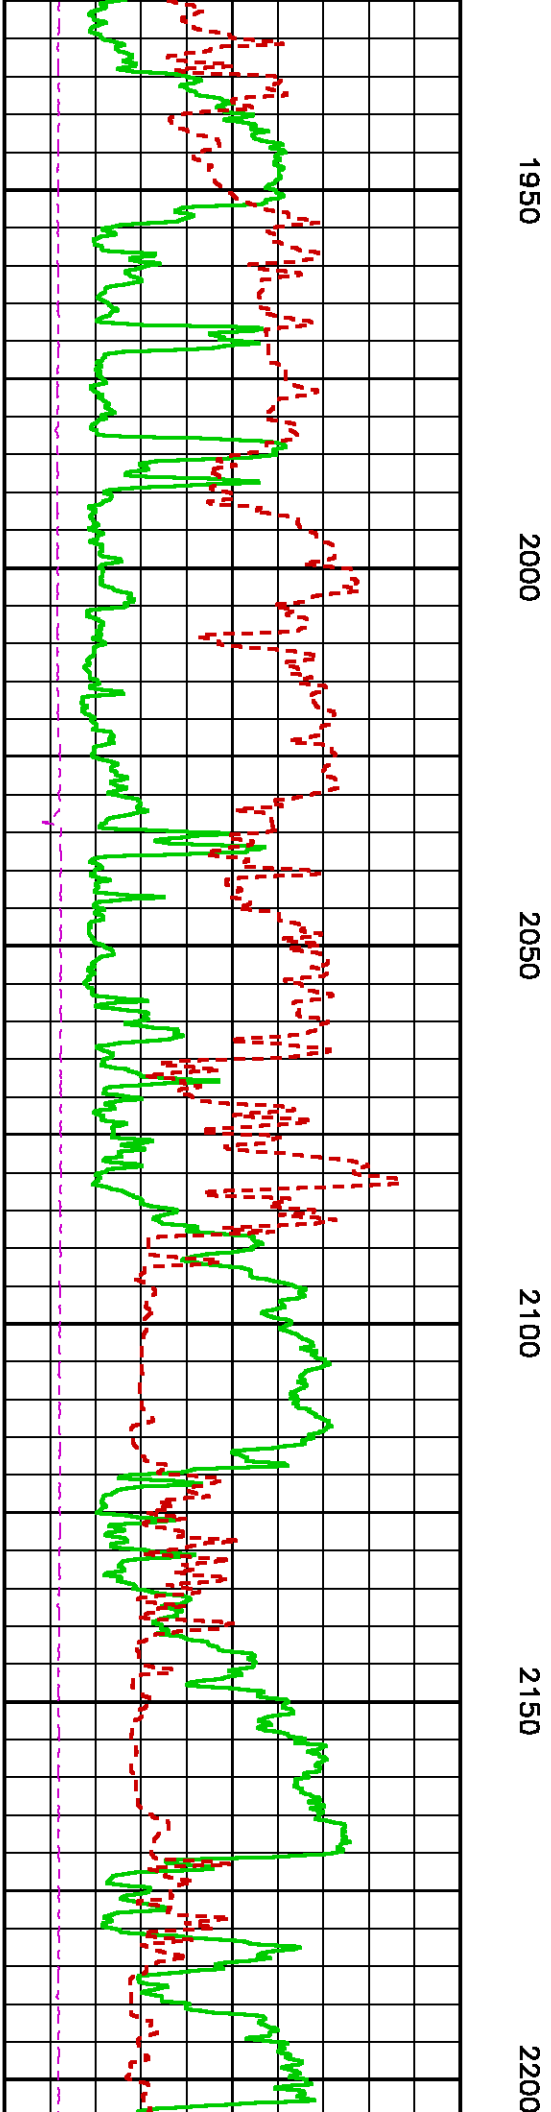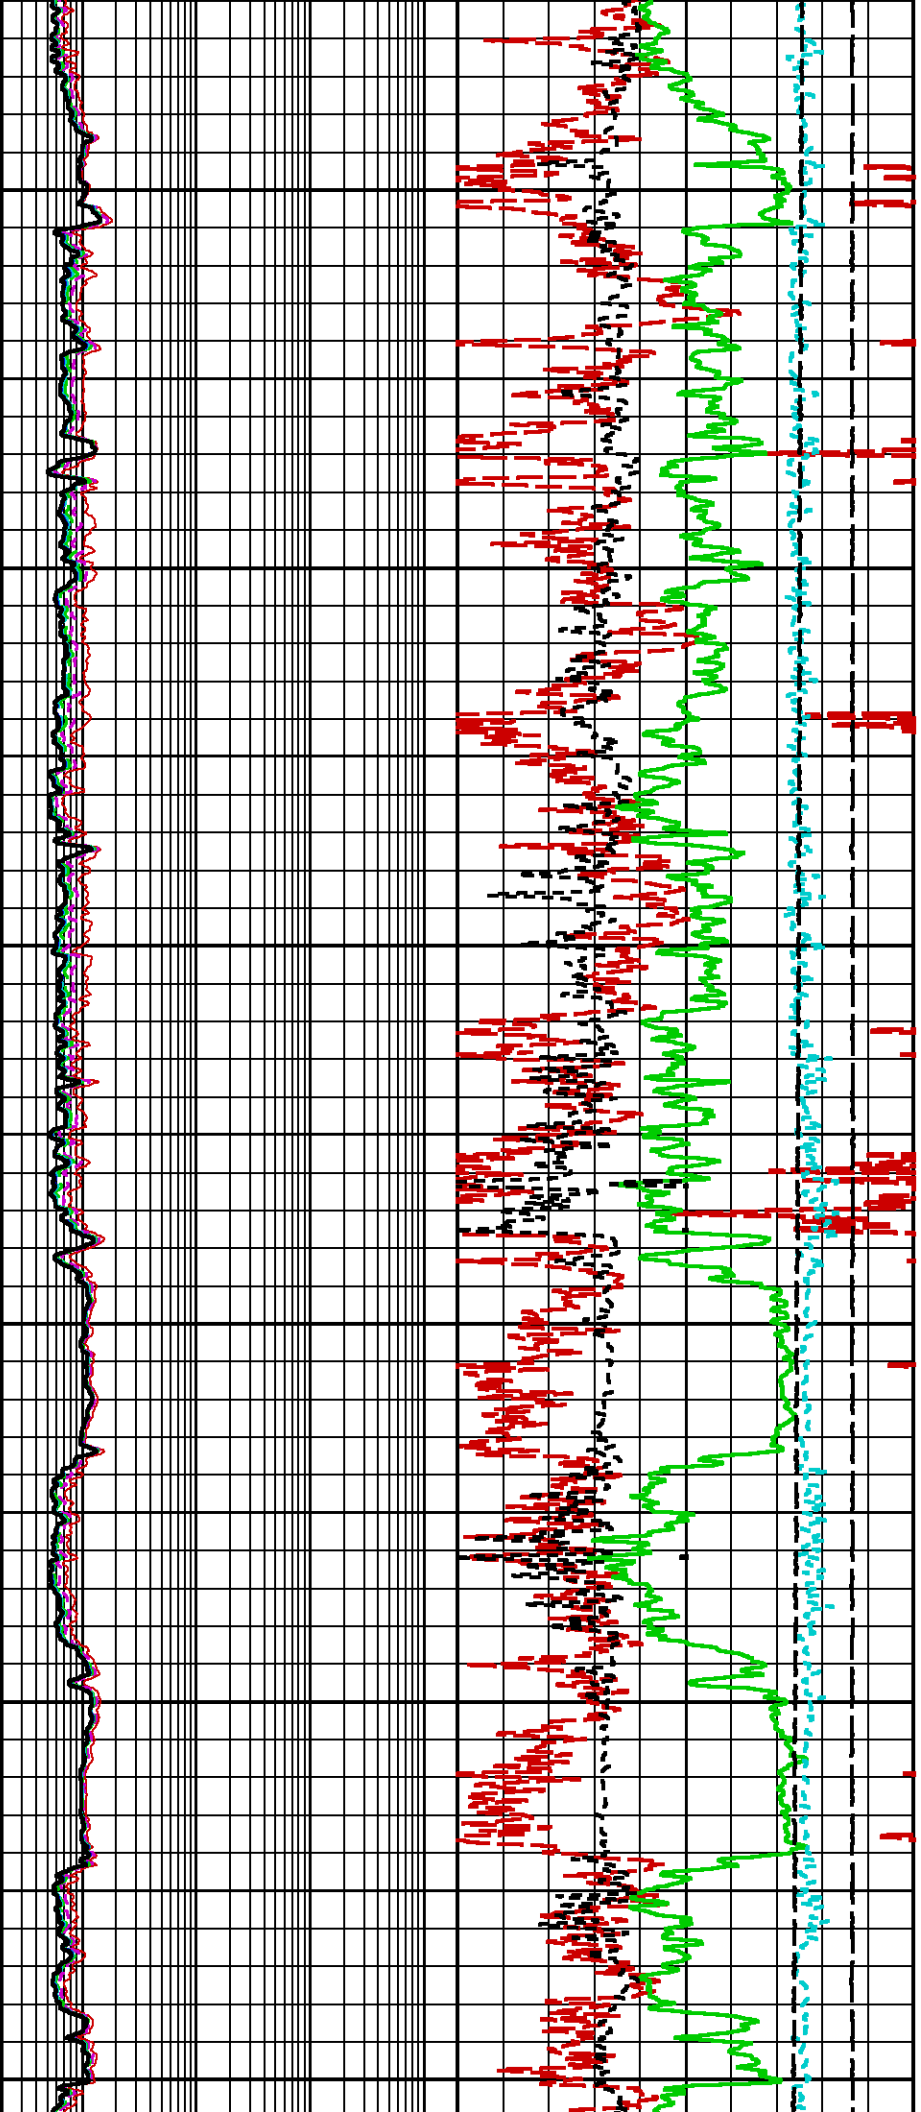

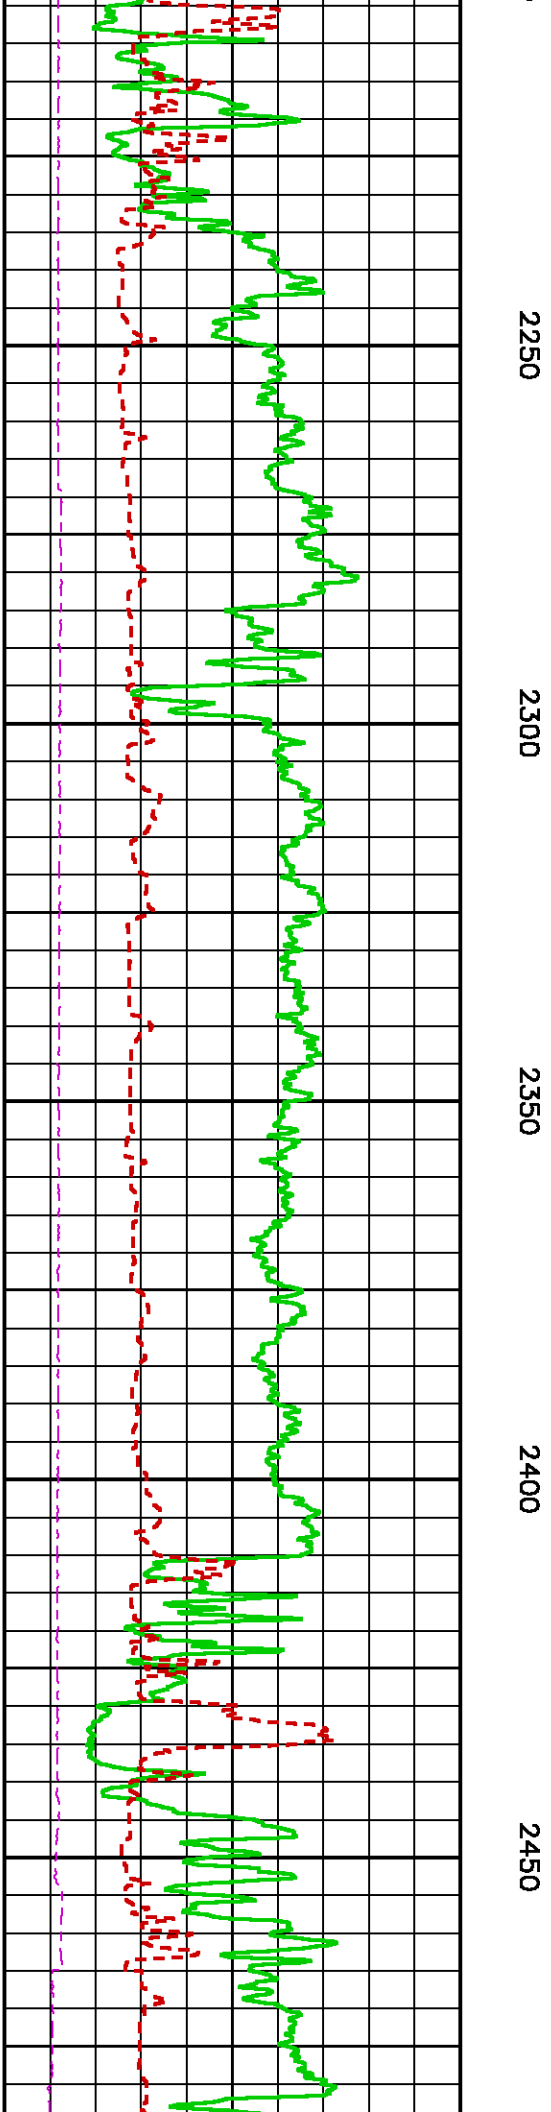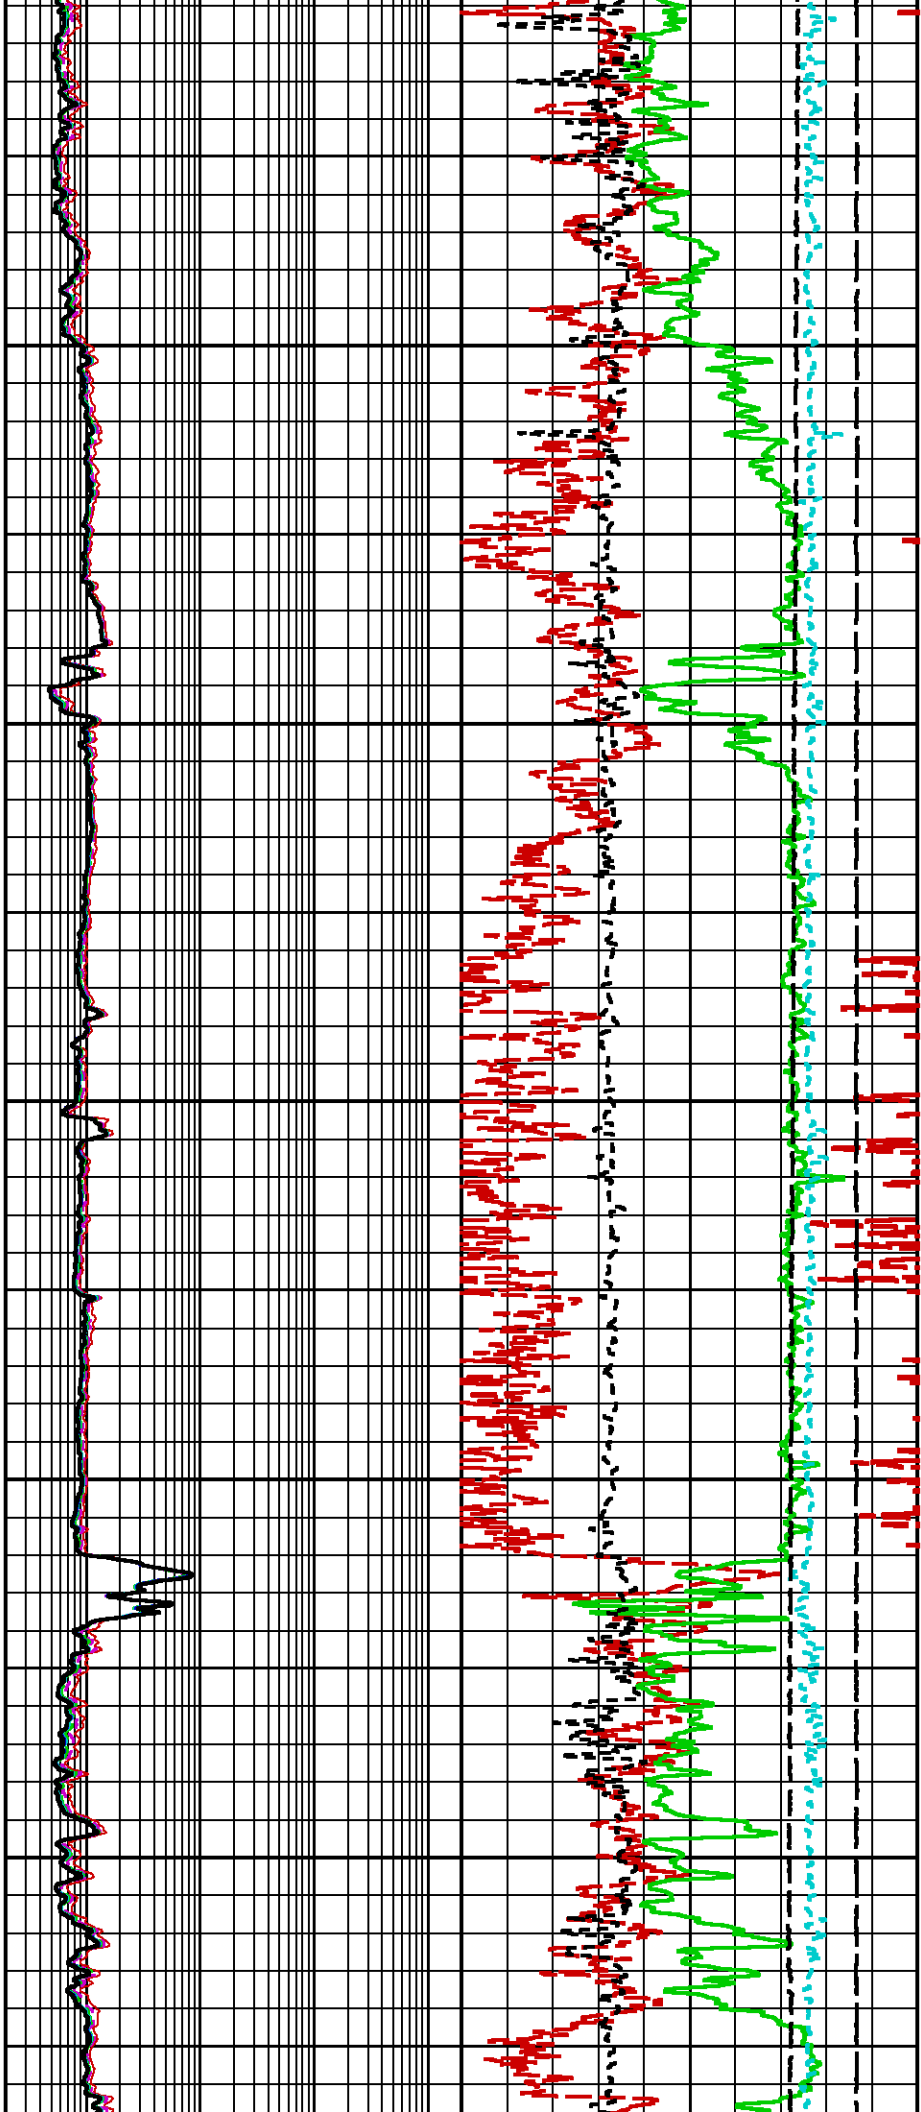

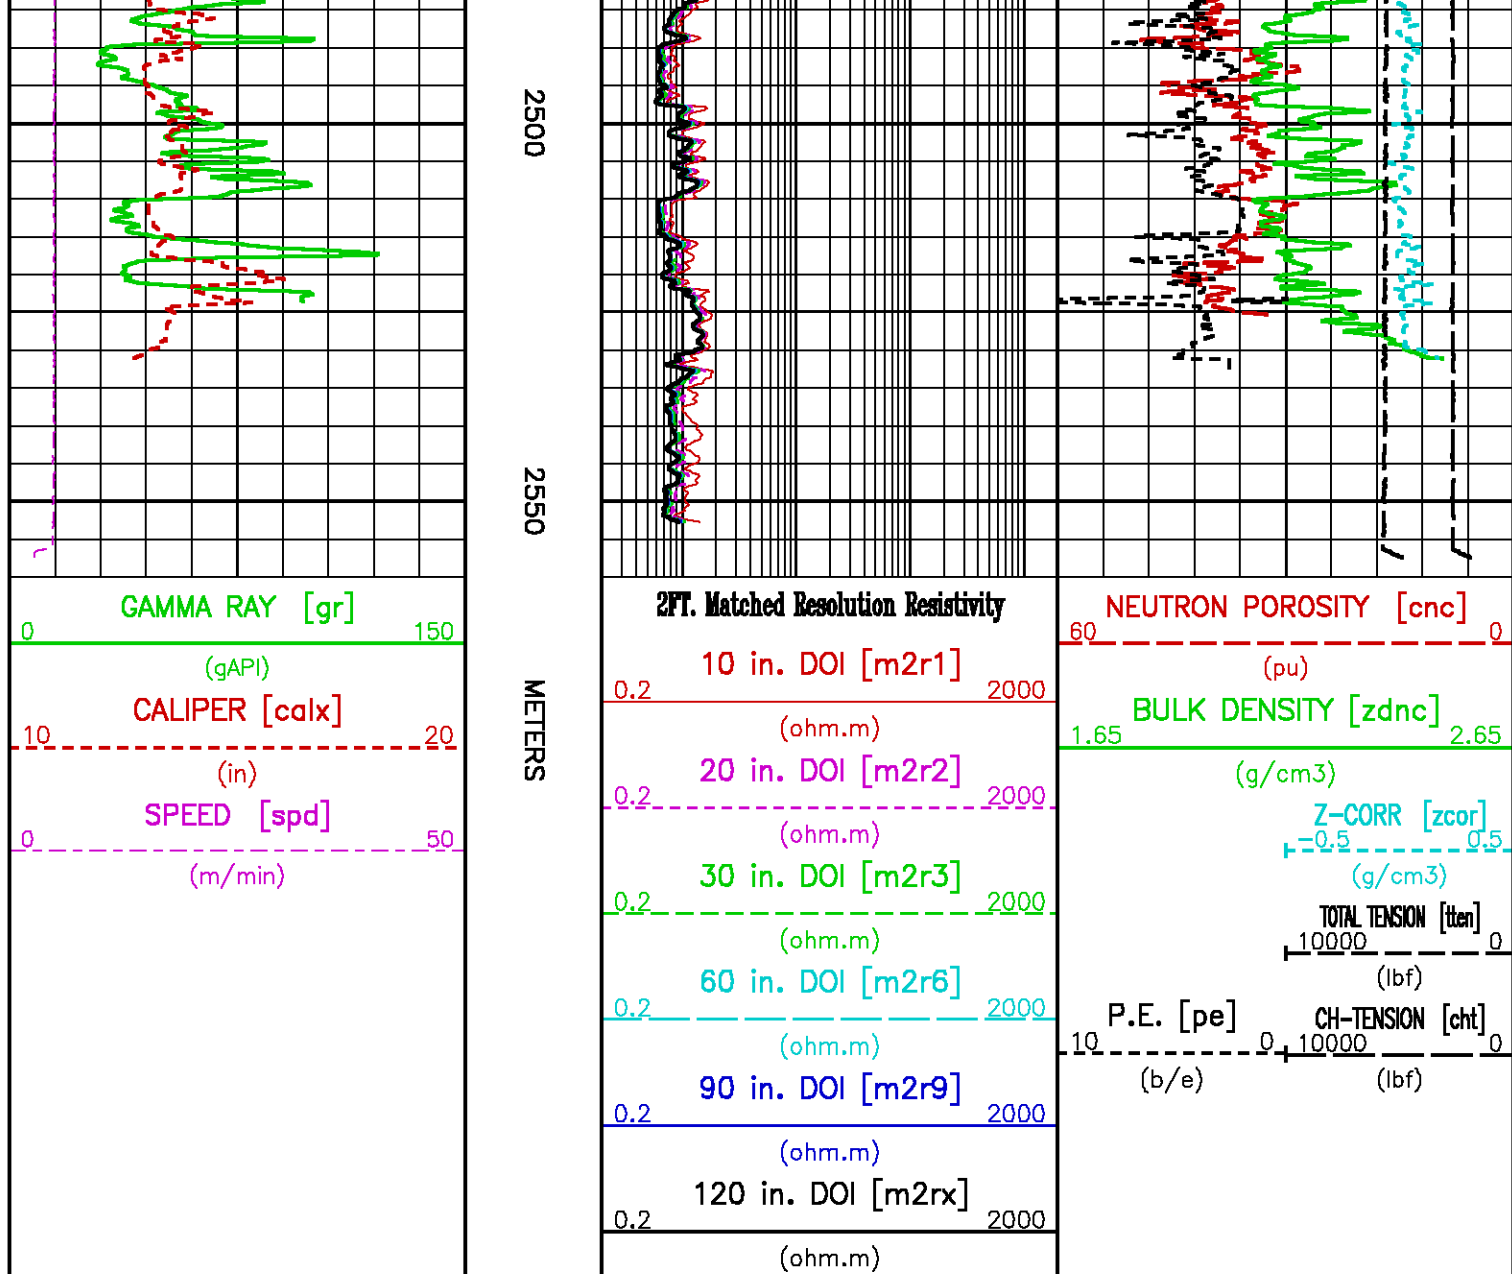

MAIN LOG 1:200 SCALE

ECLIPS 5.1i Sep 16, 2005
Updates: 1,2,37

Fri Oct 27 15:30:07 2006

Pcrplt /main/61

Cplot 9.18

Pdf_Cpp /main/16

Fileview 5.00

PARAMETER AND FILTER SUMMARY REPORT

File: /data/peak/bilabar1_D3/177103.prm
LOGGING MODE: DEPTH DIRECTION: UP
TOP DEPTH: 807.453 m BOTTOM DEPTH: 2510.028 m

SYMMETRIC FILTER

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
CHT	FILTER ()	medium (1)		TOP	BOTTOM
Y AXIS CALIPER	FILTER ()	medium (1)		"	"
SPEED	FILTER ()	medium (1)		"	"

SPEED	FILTER ()	medium (1)	''	''
TENSION	FILTER ()	medium (1)	''	''
GR	FILTER ()	medium (1)	''	''
CN	FILTER ()	medium (1)	''	''
X AXIS CALIPER	FILTER ()	medium (1)	''	''
	FILTER (.h)	medium (1)	''	''
	FILTER (.l)	medium (1)	''	''
ZDL	FILTER ()	medium (1)	''	''
DT24	FILTER ()	light (2)	''	''

BOREHOLE & CEMENT

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
CASING - BOREHOLE & CEMENT VOLUME	CASING O.D.	9.625	In	TOP	BOTTOM
	CASING THICKNESS	0.000	In	''	''
BIT SIZE	BIT SIZE	12.250	In	''	''
BOREHOLE CORR DIAMETER SOURCE	CALIPER/FIXED DIA. (cnbh*)	USE CALIPER		''	''
	CALIPER/FIXED DIA. (mbh*)	USE CALIPER		''	''
BOREHOLE CORR DIAMETER	FIXED DIAMETER (cnbh*)	12.250	In	''	''
	FIXED DIAMETER (mbh*)	12.250	In	''	''
MUD VALUES SOURCE	RMUD SOURCE (HDIL)	OIL BASE MUD		''	''
MUD VALUES	MUD SAMPLE TEMP	75.0	degF	''	''
	MUD SAMPLE RES	1.000	ohm.m	''	''
	MUD REFERENCE TEMP	75.0	degF	''	''
	TEMP GRADIENT	1.200	0.01 degF/ft	''	''

CN PROCESSING

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
2446 CN MATRIX	2446 MATRIX	SANDSTONE		TOP	BOTTOM
CN SALINITY CORRECTION	SALINITY	0	ppm	''	''
CN CASING & CEMENT CORRECTION	CORRECTION	ON		TOP	822.655
		OFF		822.655	BOTTOM
	BIT SIZE BEHIND CSNG	7.875	In	TOP	BOTTOM

ZDL PROCESSING

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
ZDL CHI-SMOOTH FILTER	DEN CHISM	ON		TOP	BOTTOM
	PE CHISM	ON		''	''
ZDL	ZDL TRACKING	ON		''	''

ACOUSTIC POROSITY

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
DELTA T CURVE SELECTION	DT24 SOURCE	FIRST ARRIVAL DT24		TOP	BOTTOM

ACOUSTIC PICK CONTROL

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
DELTA-T REJECTION RANGE	REJECTION DTmin	40	us/ft	TOP	BOTTOM
	REJECTION DTmax	180	us/ft	''	''
FIRST ARRIVAL PICK	SEARCH START OFFSET (sfan1*)	87	us	''	''
	SEARCH START OFFSET (sfan2*)	87	us	''	''
	SEARCH START OFFSET (sfan3*)	87	us	''	''
	SEARCH START OFFSET (sfan4*)	87	us	''	''
	SEARCH WINDOW LENGTH	1529	us	TOP	835.685
		1245	us	835.685	1453.363
		1045	us	1453.363	BOTTOM
	THRESHOLD FACTOR	0.30		TOP	1264.234
		0.33		1264.234	1264.996
		0.36		1264.996	1265.606
		0.40		1265.606	1999.717
		0.34		1999.717	2001.545
		0.30		2001.545	BOTTOM
	THRESHOLD MINIMUM (sfan1*)	2.0	pct	TOP	880.948
		1.6	pct	880.948	1352.626
		2.0	pct	1352.626	2117.979
		1.7	pct	2117.979	2118.131
		1.8	pct	2118.131	BOTTOM
	THRESHOLD MINIMUM (sfan2*)	1.6	pct	TOP	1352.474
		2.0	pct	1352.474	2117.827
		1.7	pct	2117.827	2117.979
		1.8	pct	2117.979	BOTTOM
		1.6	pct	TOP	1352.321
	THRESHOLD MINIMUM (sfan3*)	2.0	pct	1352.321	2117.674
		1.7	pct	2117.674	2117.827
		1.8	pct	2117.827	BOTTOM

THRESHOLD MINIMUM (sfan4*)	1.6	pct	TOP	1352.169
	2.0	pct	2117.522	2117.522
	1.7	pct	2117.674	2117.674
	1.8	pct	2117.674	2117.674
E3 THRESHOLD	OFF		TOP	BOTTOM

ACOUSTIC QUALITY CONTROL				
MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)
CYCLE SKIP LIMIT	CYCLE SKIP LIMIT	100	us	TOP BOTTOM

ACOUSTIC WAVEFORM FILTER				
MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)
WAVEFORM FILTER - DELTA T	SURFACE WAVE FILTER	ON		TOP ''
	LOW FREQ CUTOFF	4000	Hz	''
	HIGH FREQ CUTOFF	15000	Hz	TOP
		20000	Hz	2144.649 BOTTOM


HDIL PROCESSING				
MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)
HDIL TEMPERATURE CORRECTION	TEMP CORR SOURCE	USE RXTEMP		TOP BOTTOM
ADAPTIVE BOREHOLE CORRECTION	ABC PROCESSING	ON		''
	ABC to CALCULATE	STANDOFF		''
	STANDOFF	1.50	in	''
	TOOL POSITION	ECCENTERED		''
	Rmud MULTIPLIER	1.000		''


CURVE DESCRIPTION REPORT			
CURVE NAME	CURVE ALIAS	CREATION DATE	CURVE DESCRIPTION
F1:BVOL	BVOL	Oct 25 23:01:34 2006	BOREHOLE VOLUME
F1:CALX	CAL	Oct 25 23:01:34 2006	CALIPER FROM X AXIS OF X-Y CALIPER(S)
F1:CHT	CHT	Oct 25 23:01:34 2006	CABLE HEAD TENSION
F1:CNC	CNC	Oct 25 23:01:34 2006	BOREHOLE SIZE CORRECTED COMPENSATED NEUTRON POROSITY
F1:CVOL	CVOL	Oct 25 23:01:34 2006	CEMENT VOLUME
F1:GR	GR	Oct 25 23:01:34 2006	GAMMA RAY
F1:M2R1	MOR1	Oct 25 23:01:34 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 10 INCH
F1:M2R2	MOR2	Oct 25 23:01:34 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 20 INCH
F1:M2R3	MOR3	Oct 25 23:01:34 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 30 INCH
F1:M2R6	MOR6	Oct 25 23:01:34 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 60 INCH
F1:M2R9	MOR9	Oct 25 23:01:34 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 90 INCH
F1:M2RX	MORX	Oct 25 23:01:34 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 120 INCH
F1:PE	PE	Oct 25 23:01:34 2006	PHOTO ELECTRIC CROSS-SECTION
F1:SPD	SPD	Oct 25 23:01:34 2006	SPEED
F1:TEN	TEN	Oct 25 23:01:34 2006	TOTAL TENSION
F1:ZCOR	ZCOR	Oct 25 23:01:34 2006	DENSITY CORRECTION
F1:ZDEN	ZDEN	Oct 25 23:01:34 2006	FORMATION BULK DENSITY


CURVE MEASURE POINT OFFSET							
CURVE	OFFSET (m)	CURVE	OFFSET (m)	CURVE	OFFSET (m)	CURVE	OFFSET (m)
CALX	26.37	M2R1	2.44	M2R9	2.44	TEN	0.00
CHT	0.00	M2R2	2.44	M2RX	2.44	ZCOR	26.37
CNC	31.70	M2R3	2.44	PE	26.37	ZDEN	26.37
GR	33.83	M2R6	2.44	SPD	0.00		


Presentation	: sys1:/dat1a/peak/bilabarl_D3/slam_splice_200.pdf [1:200 Scale]
Plot Interval	: 815 - 2557.88 Meters
Data File 1	: F1 : sys1:/dat1a/peak/bilabarl_D3/slams.xtf
Created On	: Oct 25 23:01:34 2006
Company	: PEAK PETROLEUM
Well	: BILABRI D3
Field	: BILABRI
File Interval	: 769.772 - 2557.88 Meters
Oct	: [777]


GAMMA RAY [gr]		METERS	2FT. Matched Resolution Resistivity		NEUTRON POROSITY [cnc]	
0	150		10 in. DOI [m2r1]		60	0
(gAPI)			0.2		(pu)	
CALIPER [calx]			2000		BULK DENSITY [zden]	

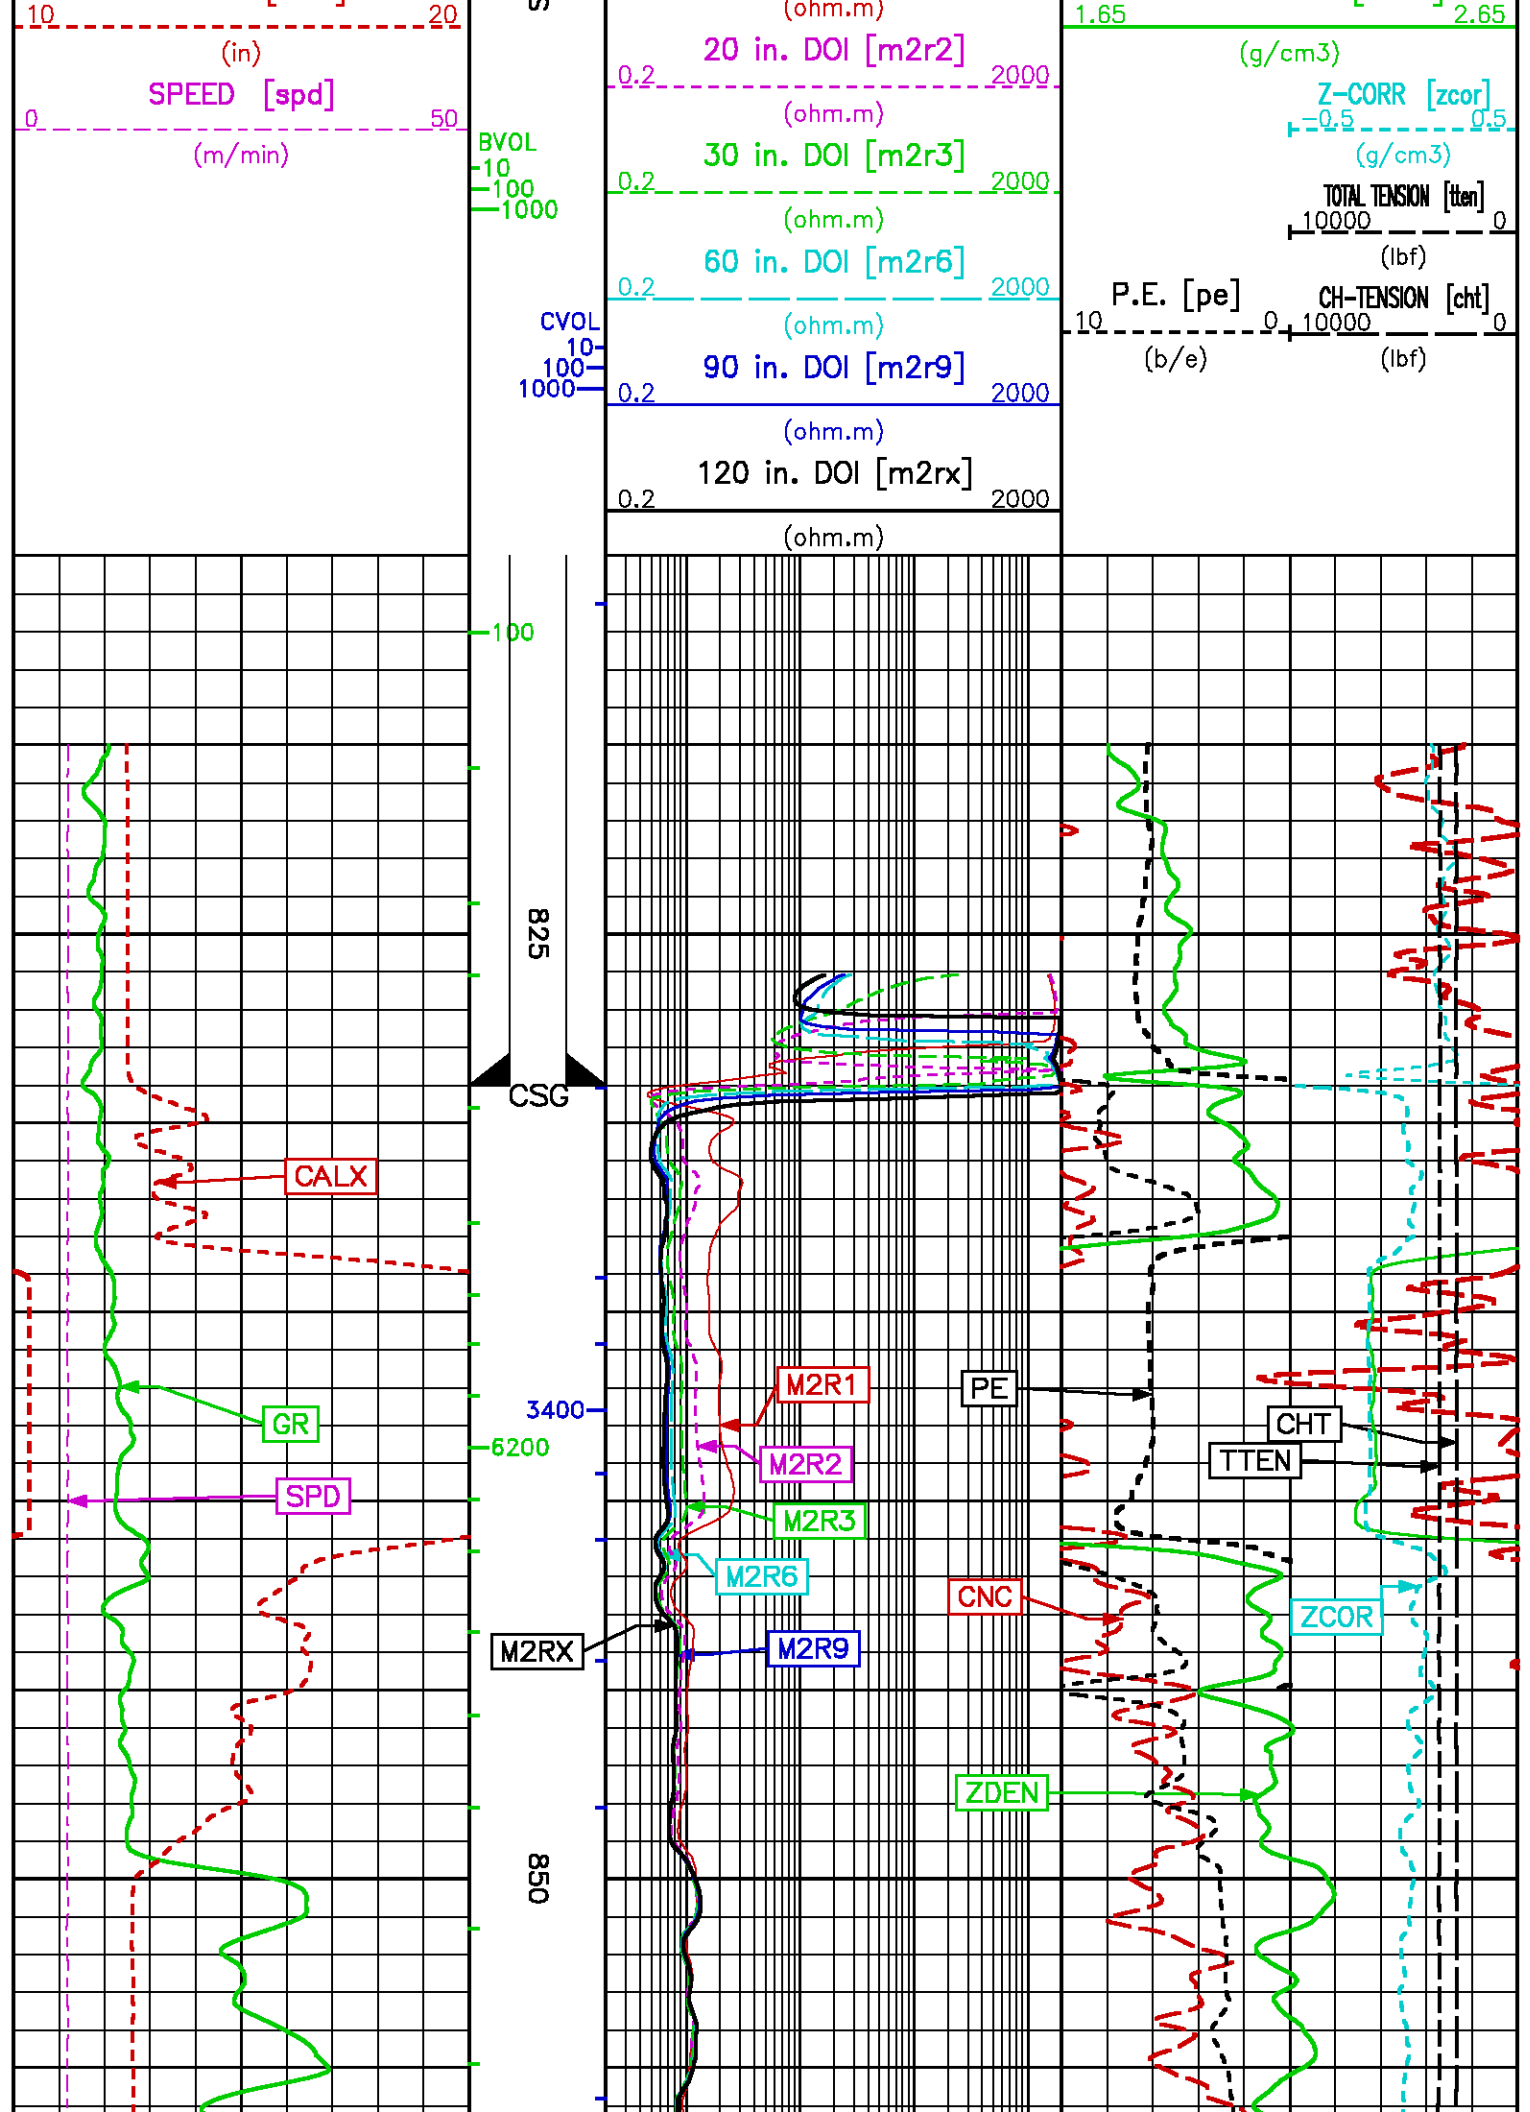


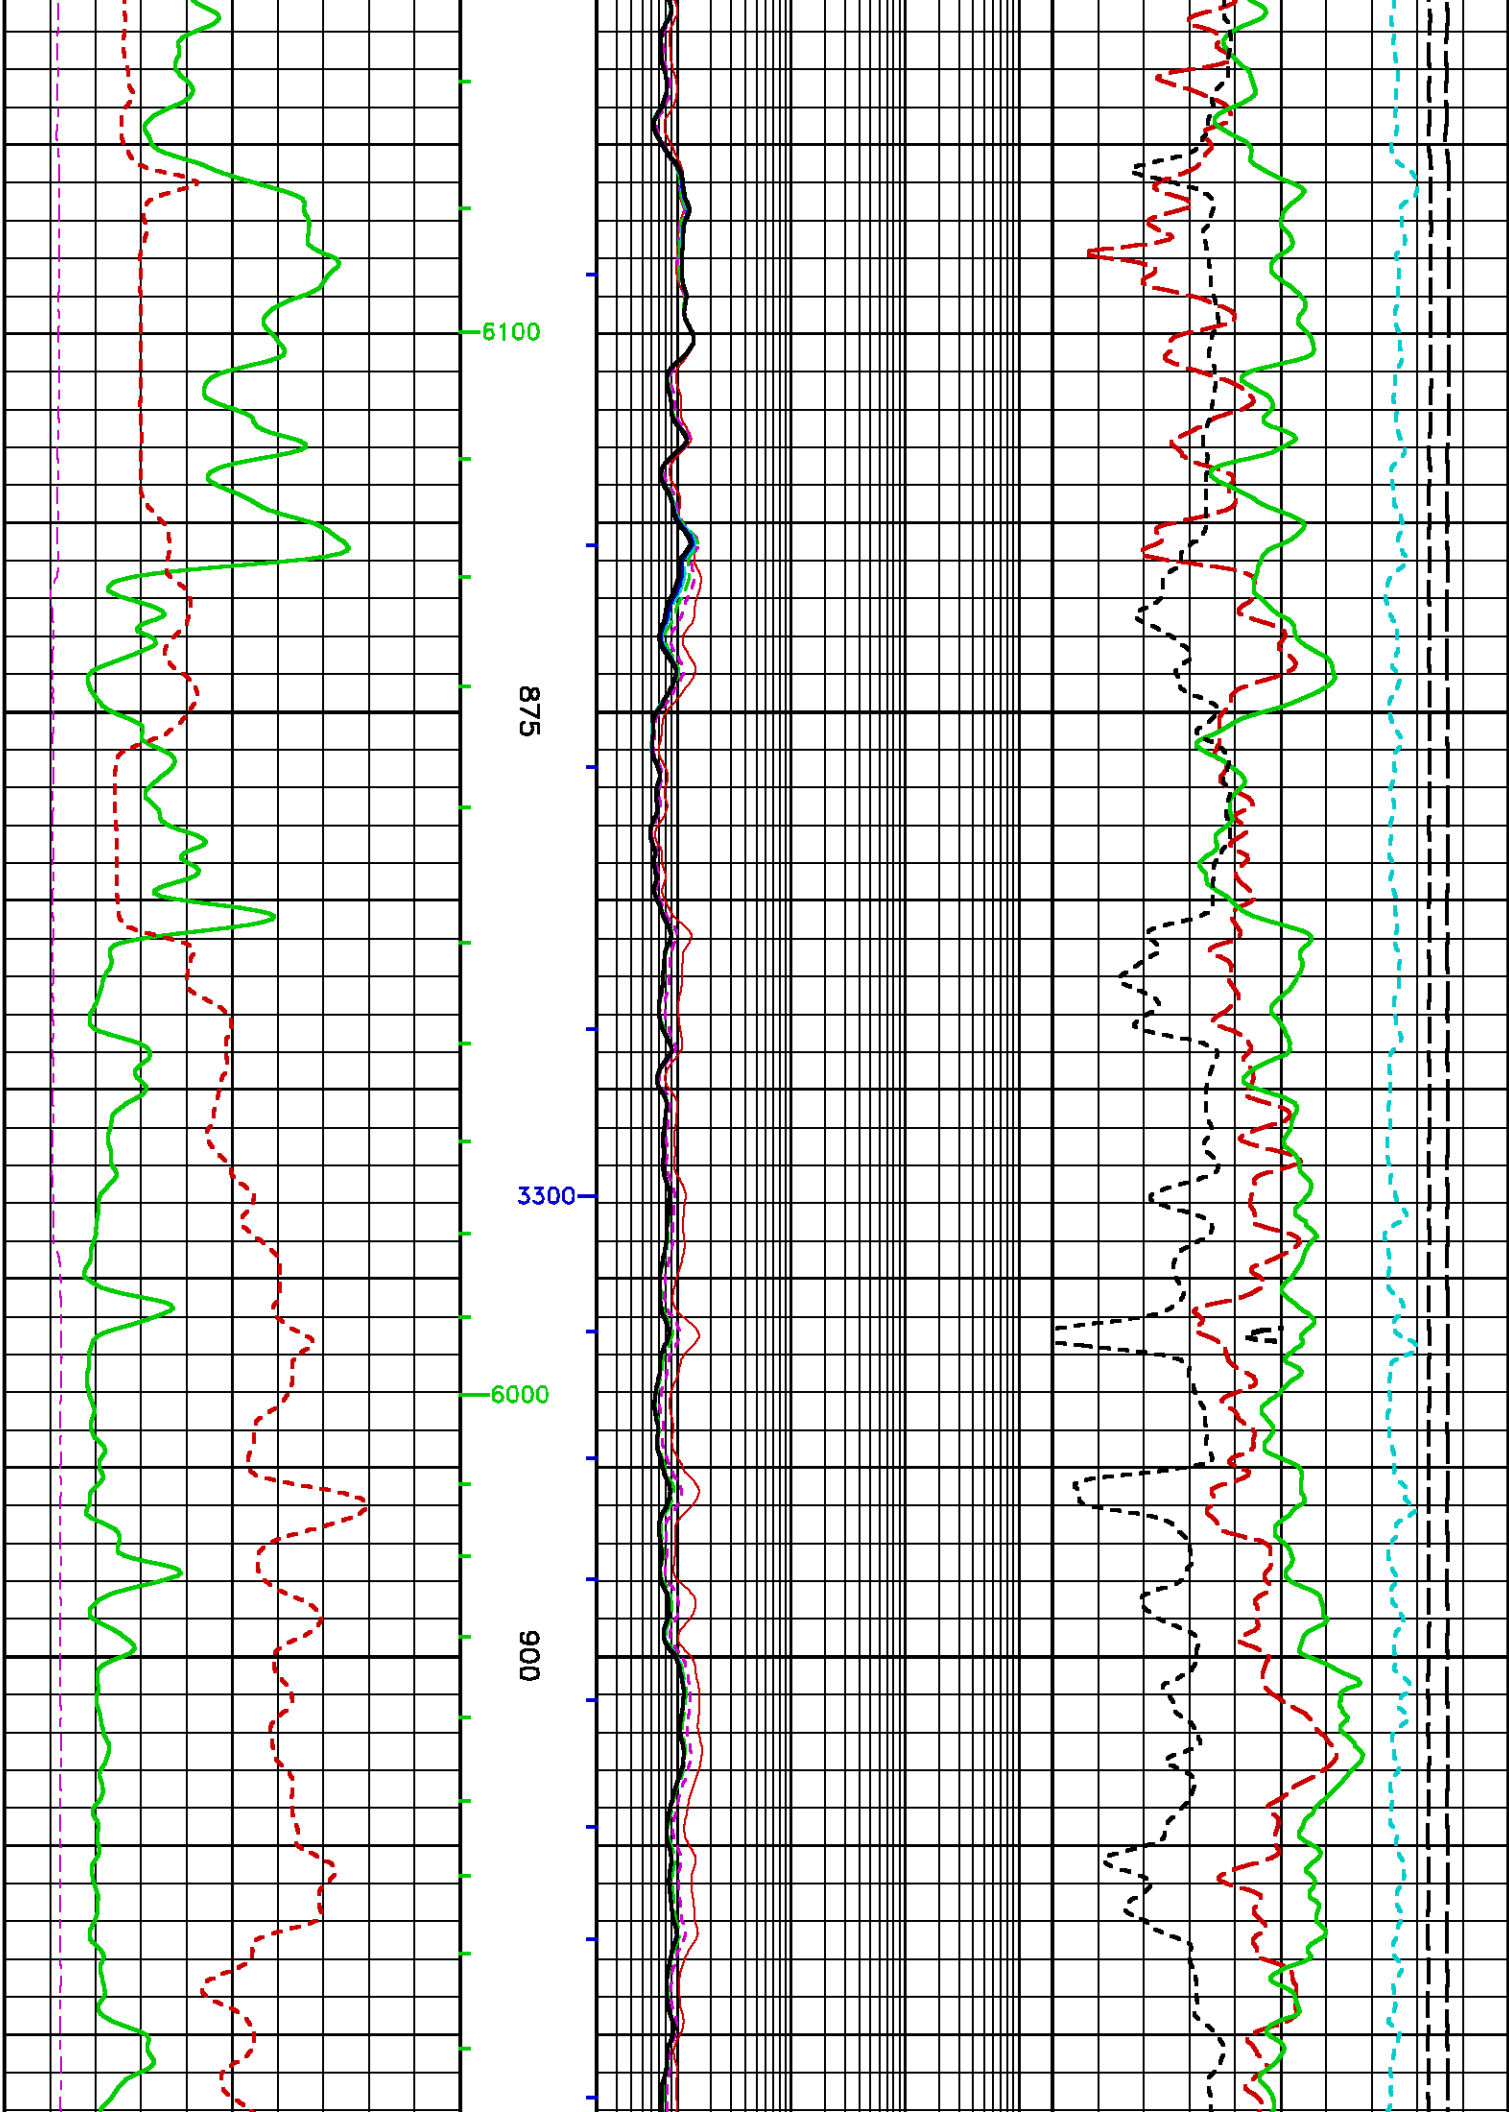


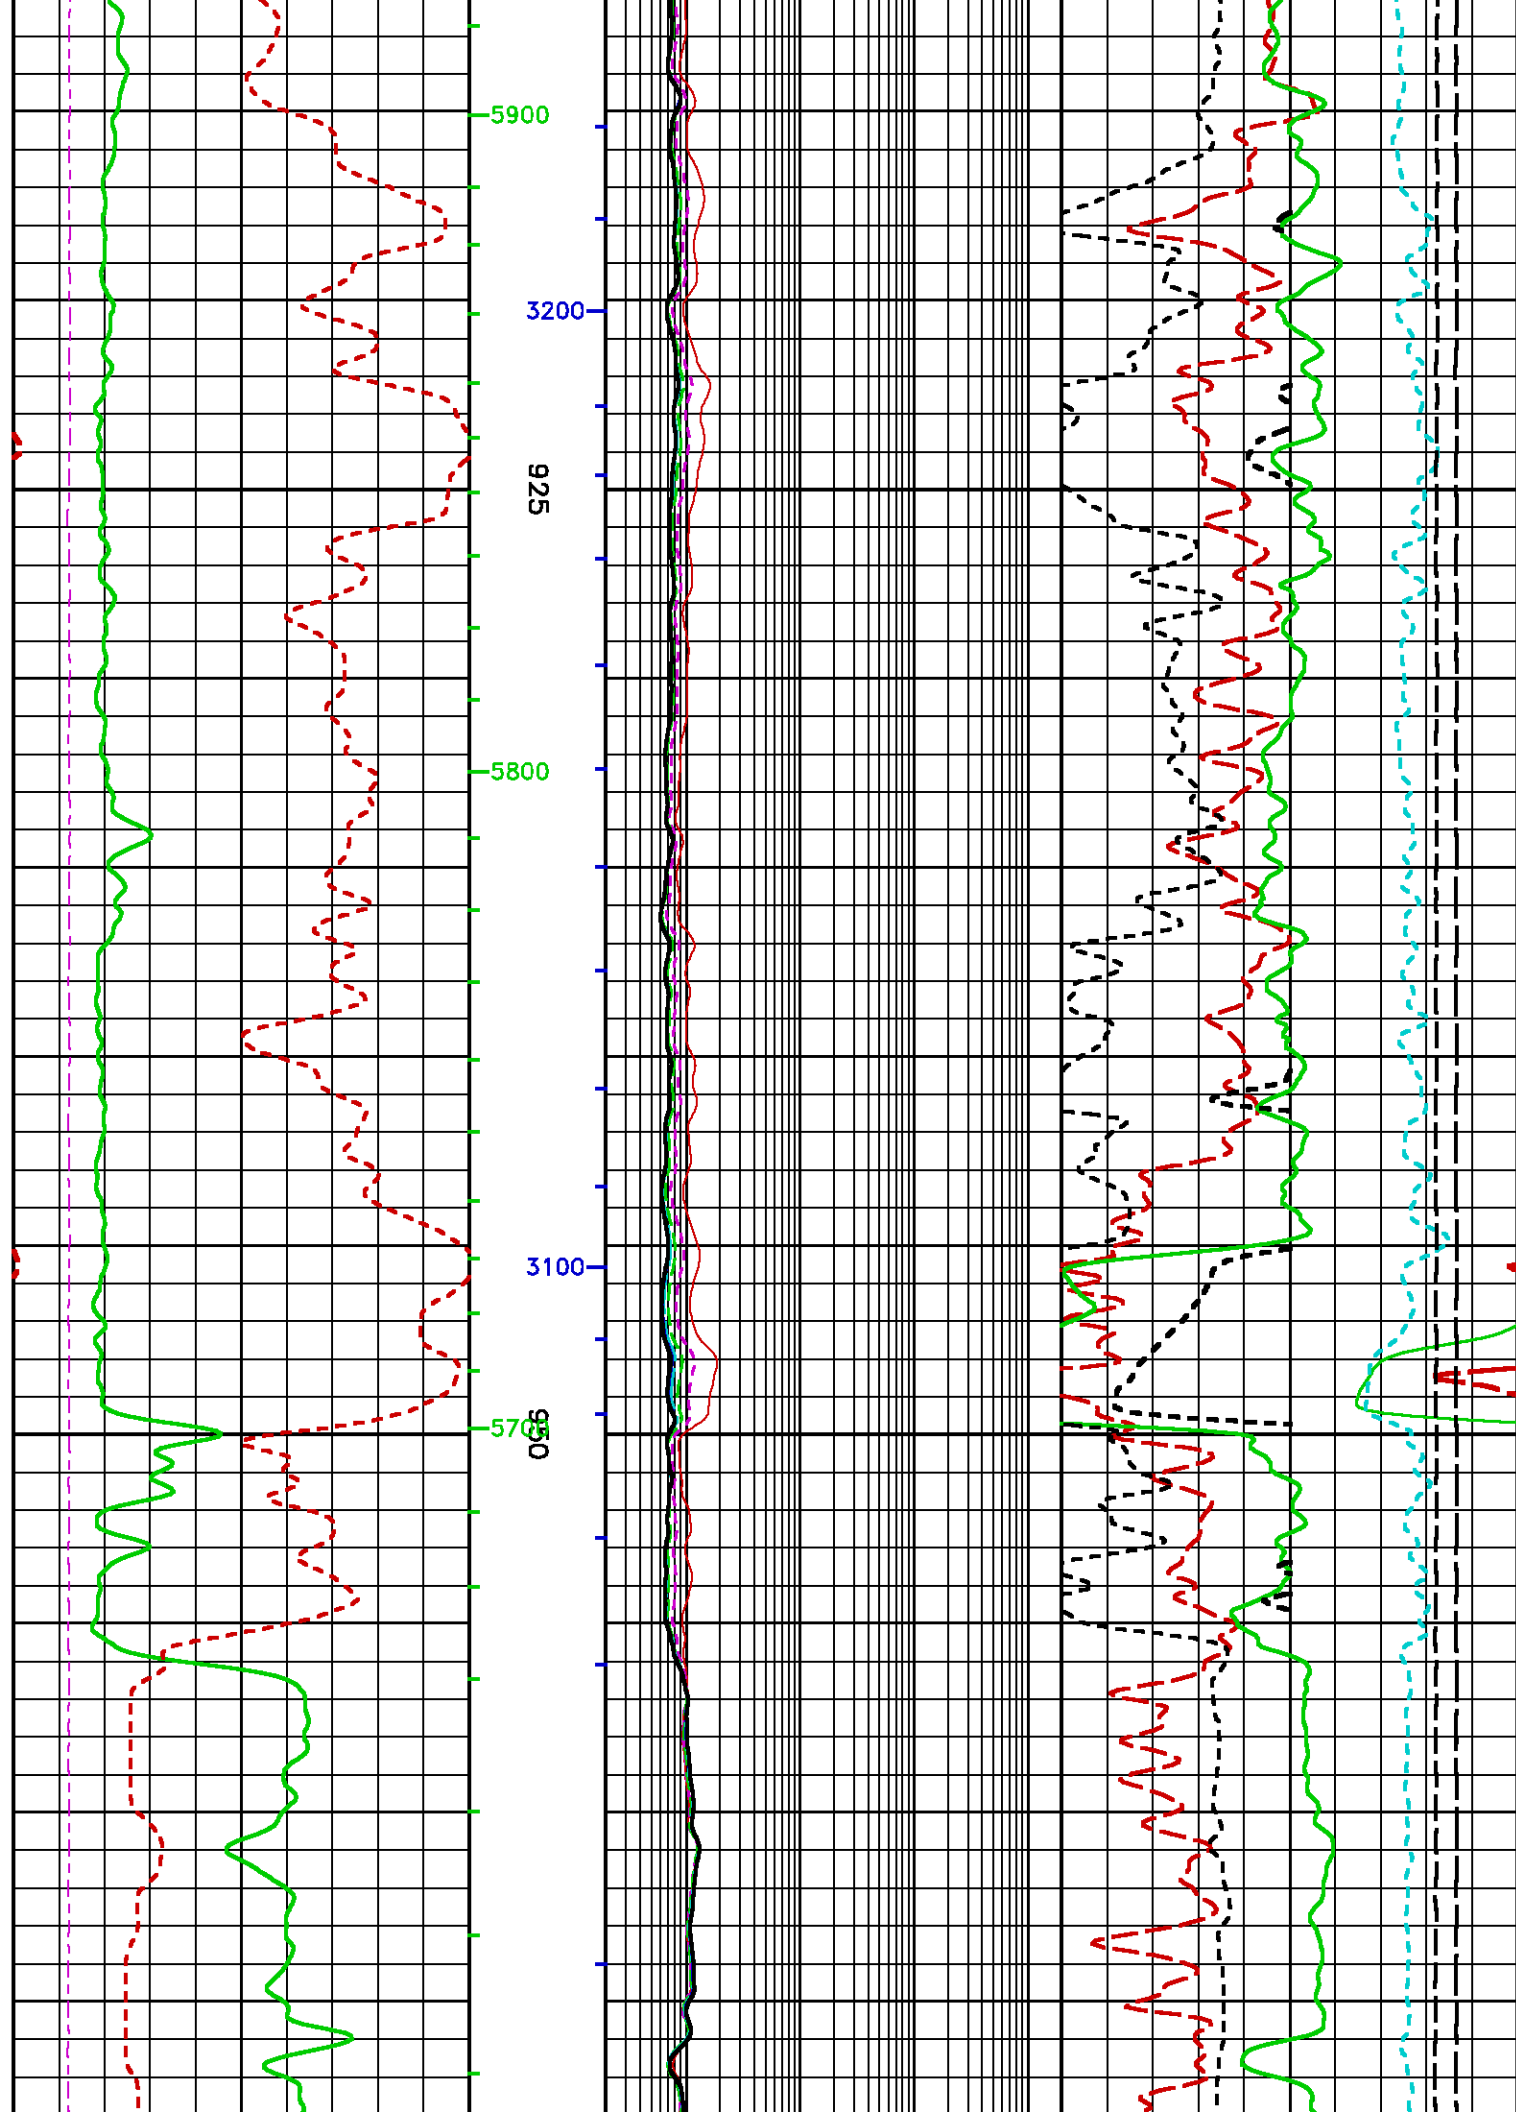


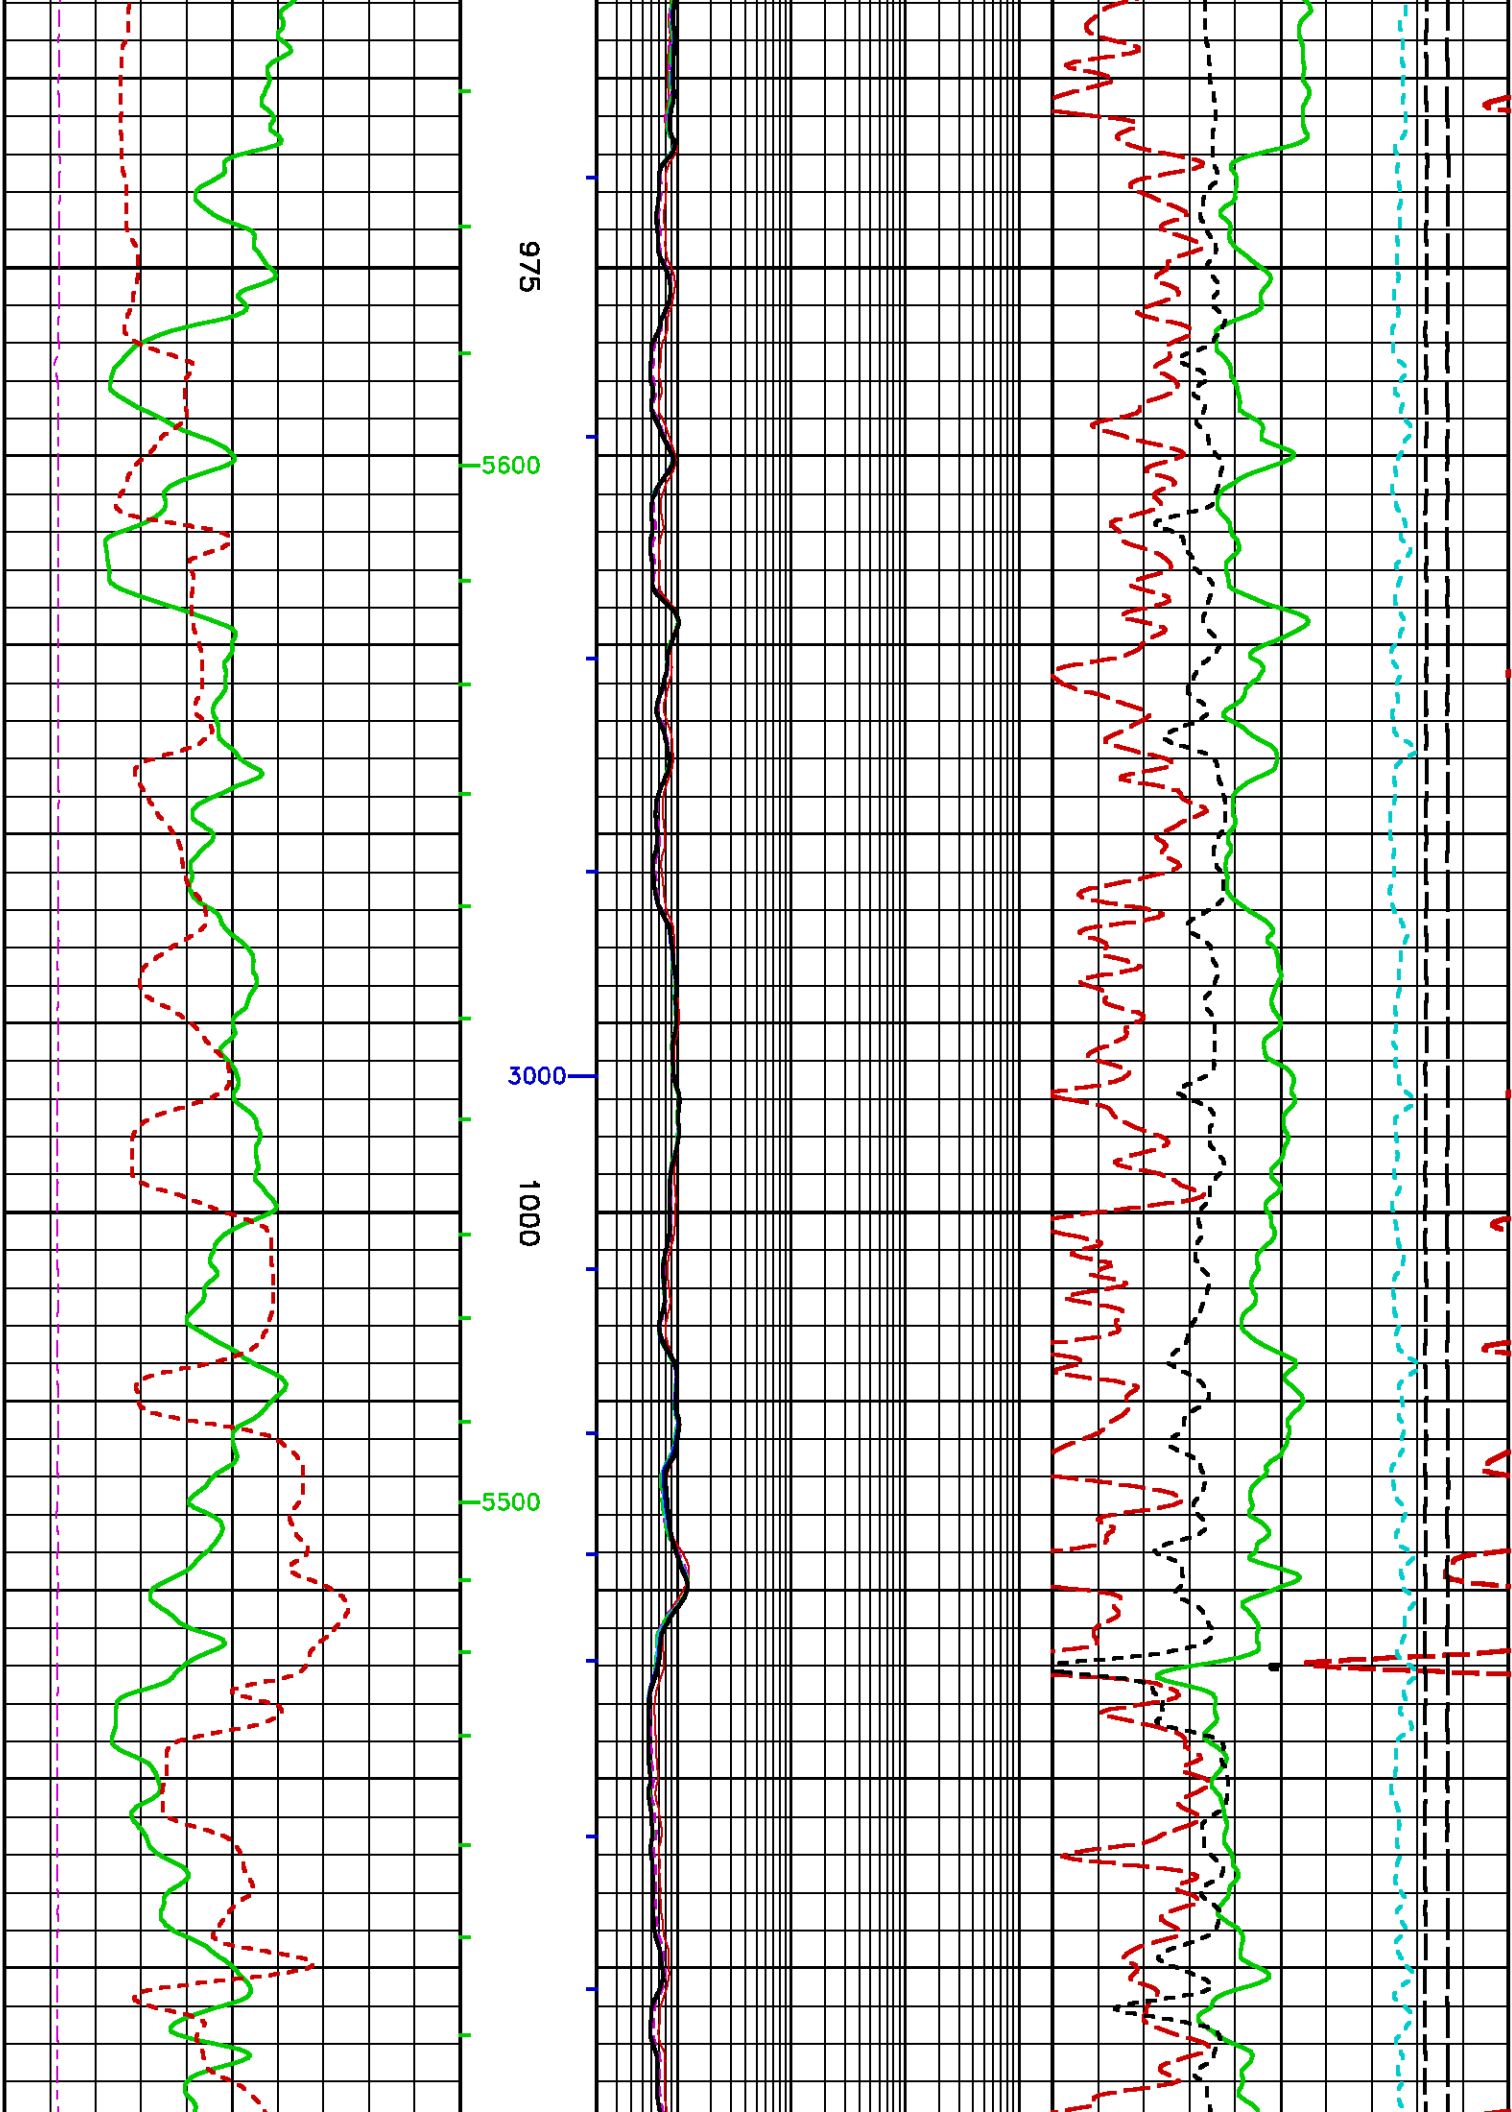


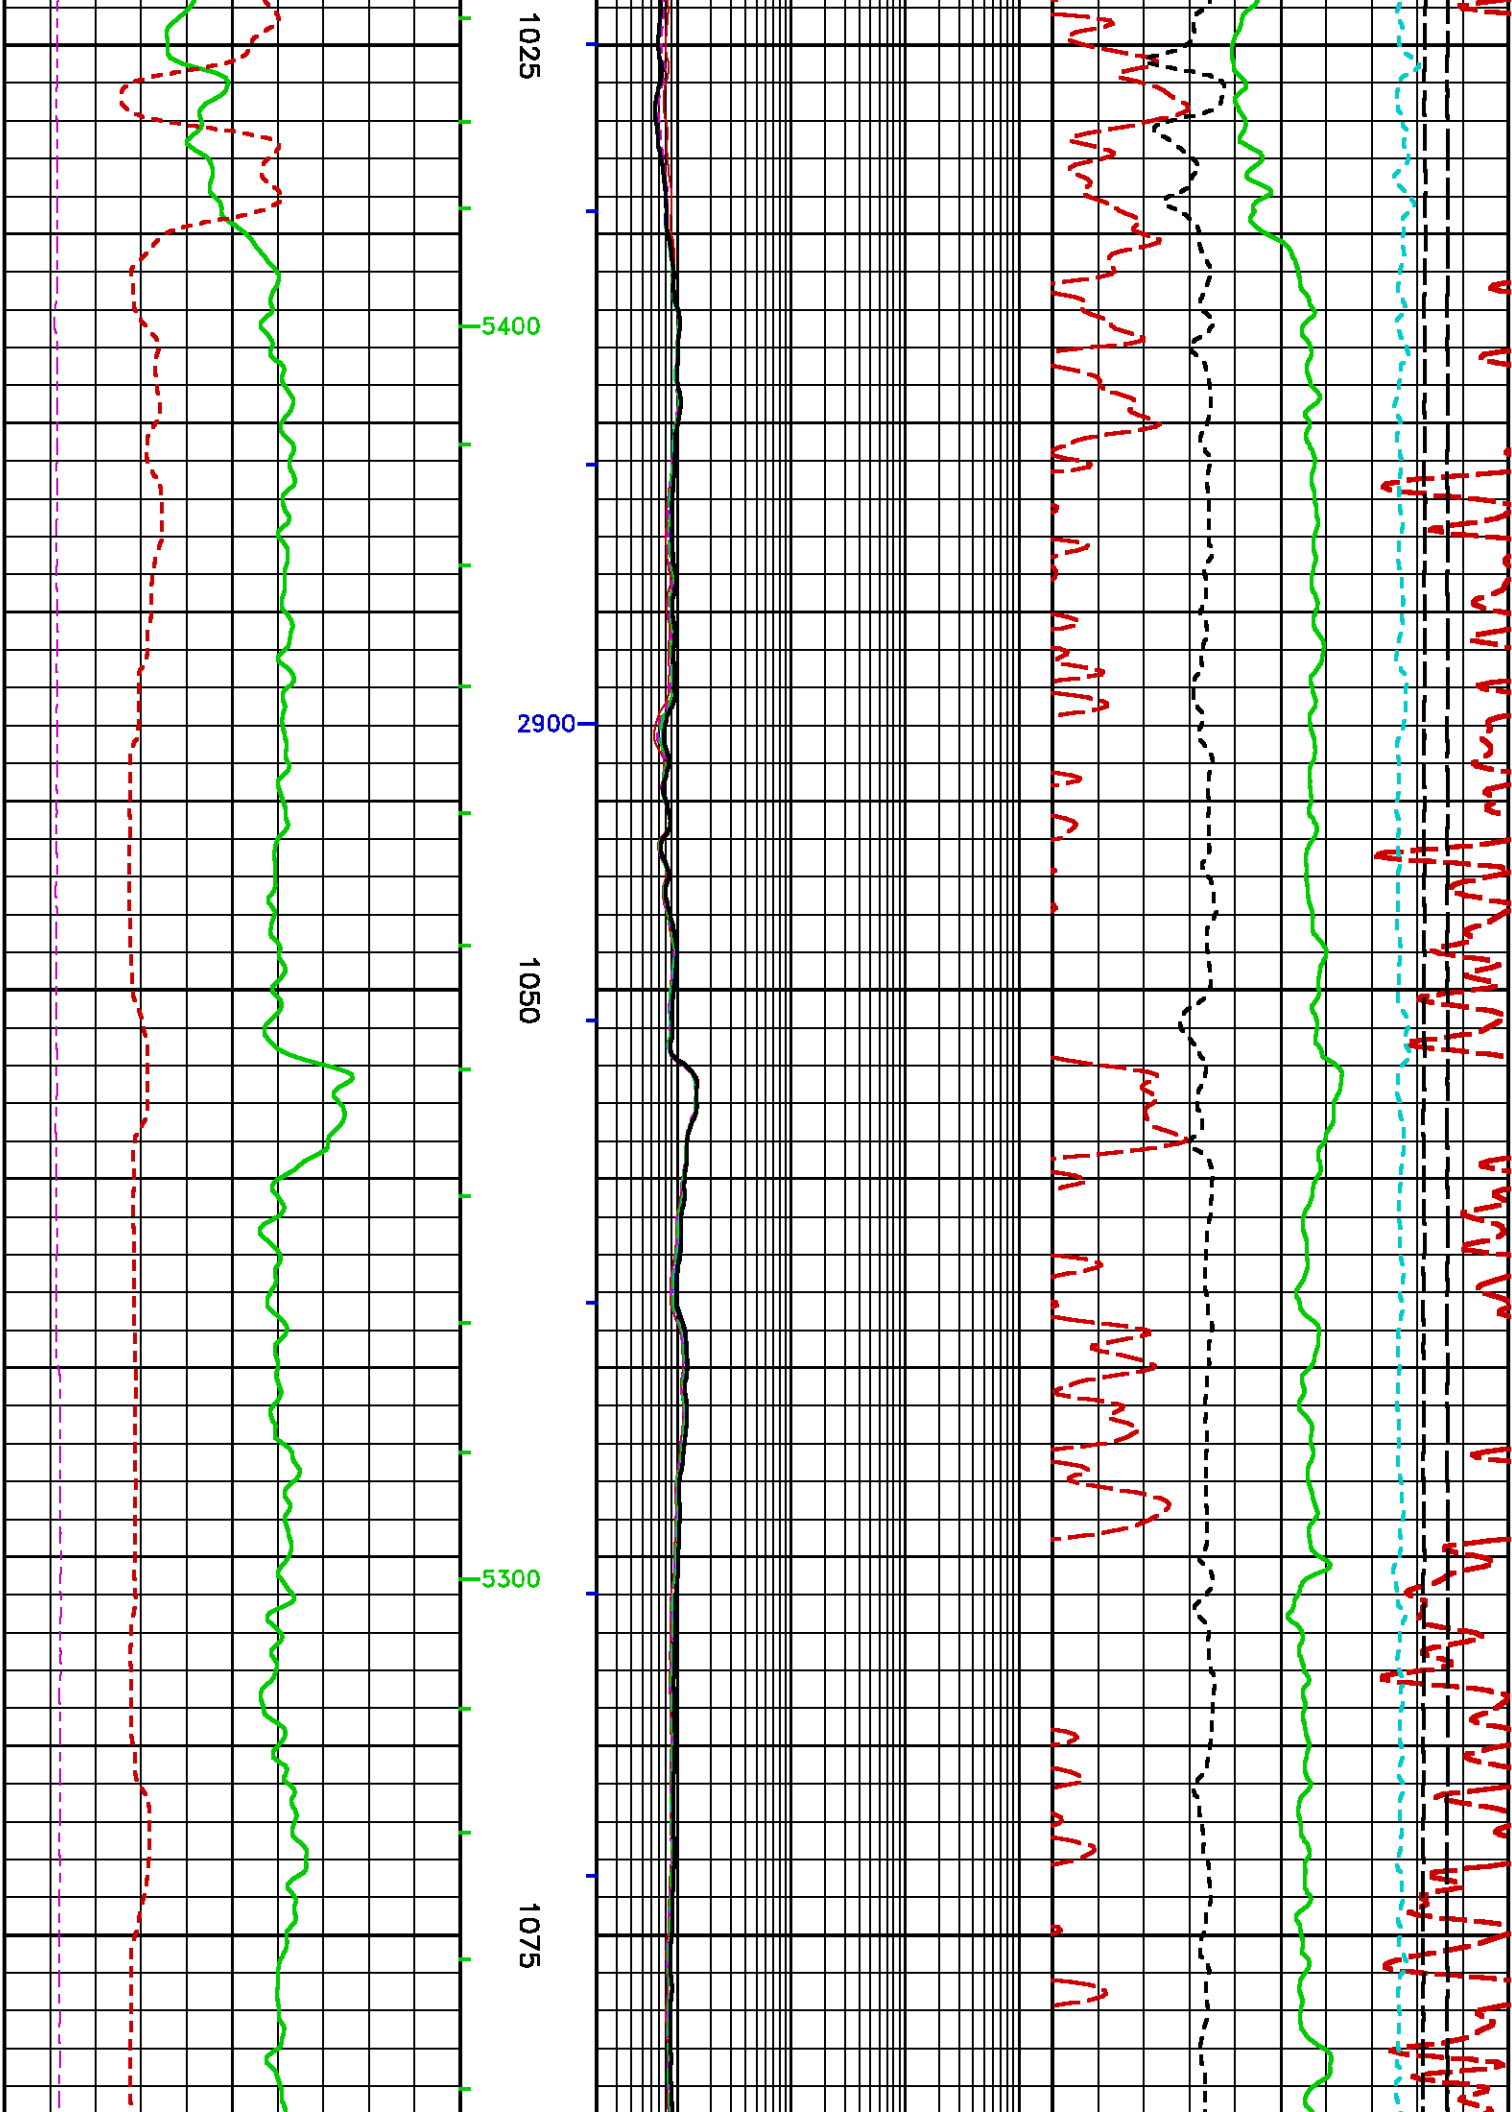


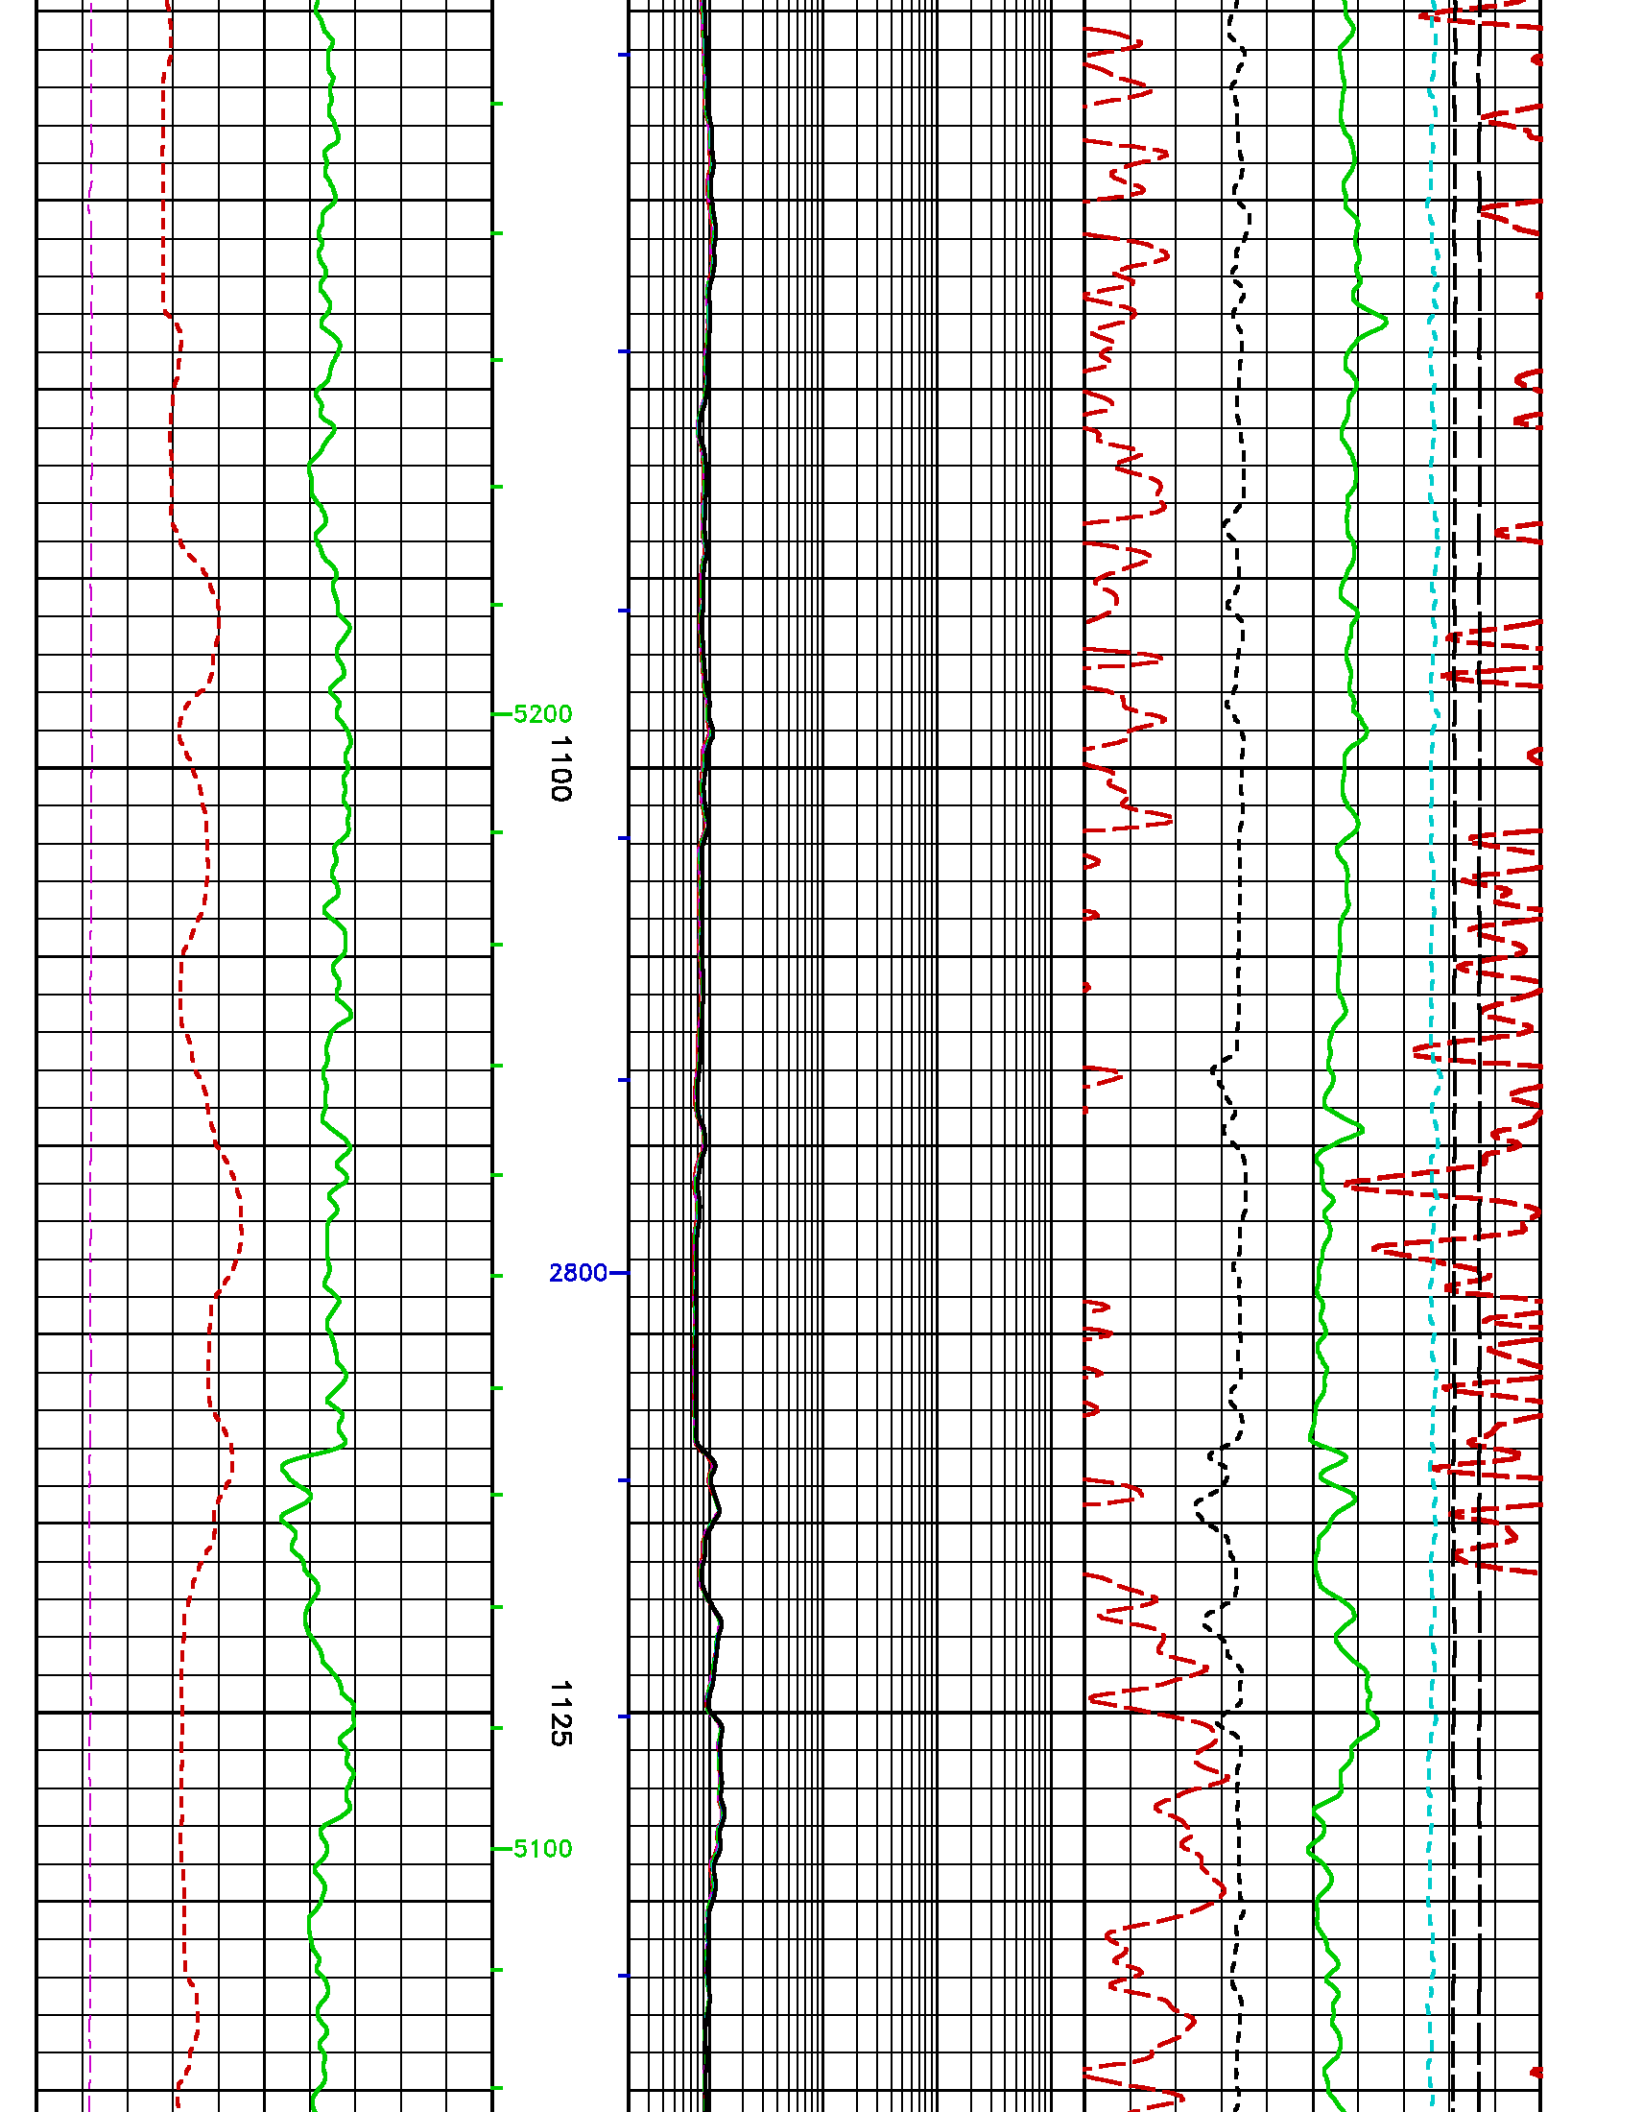


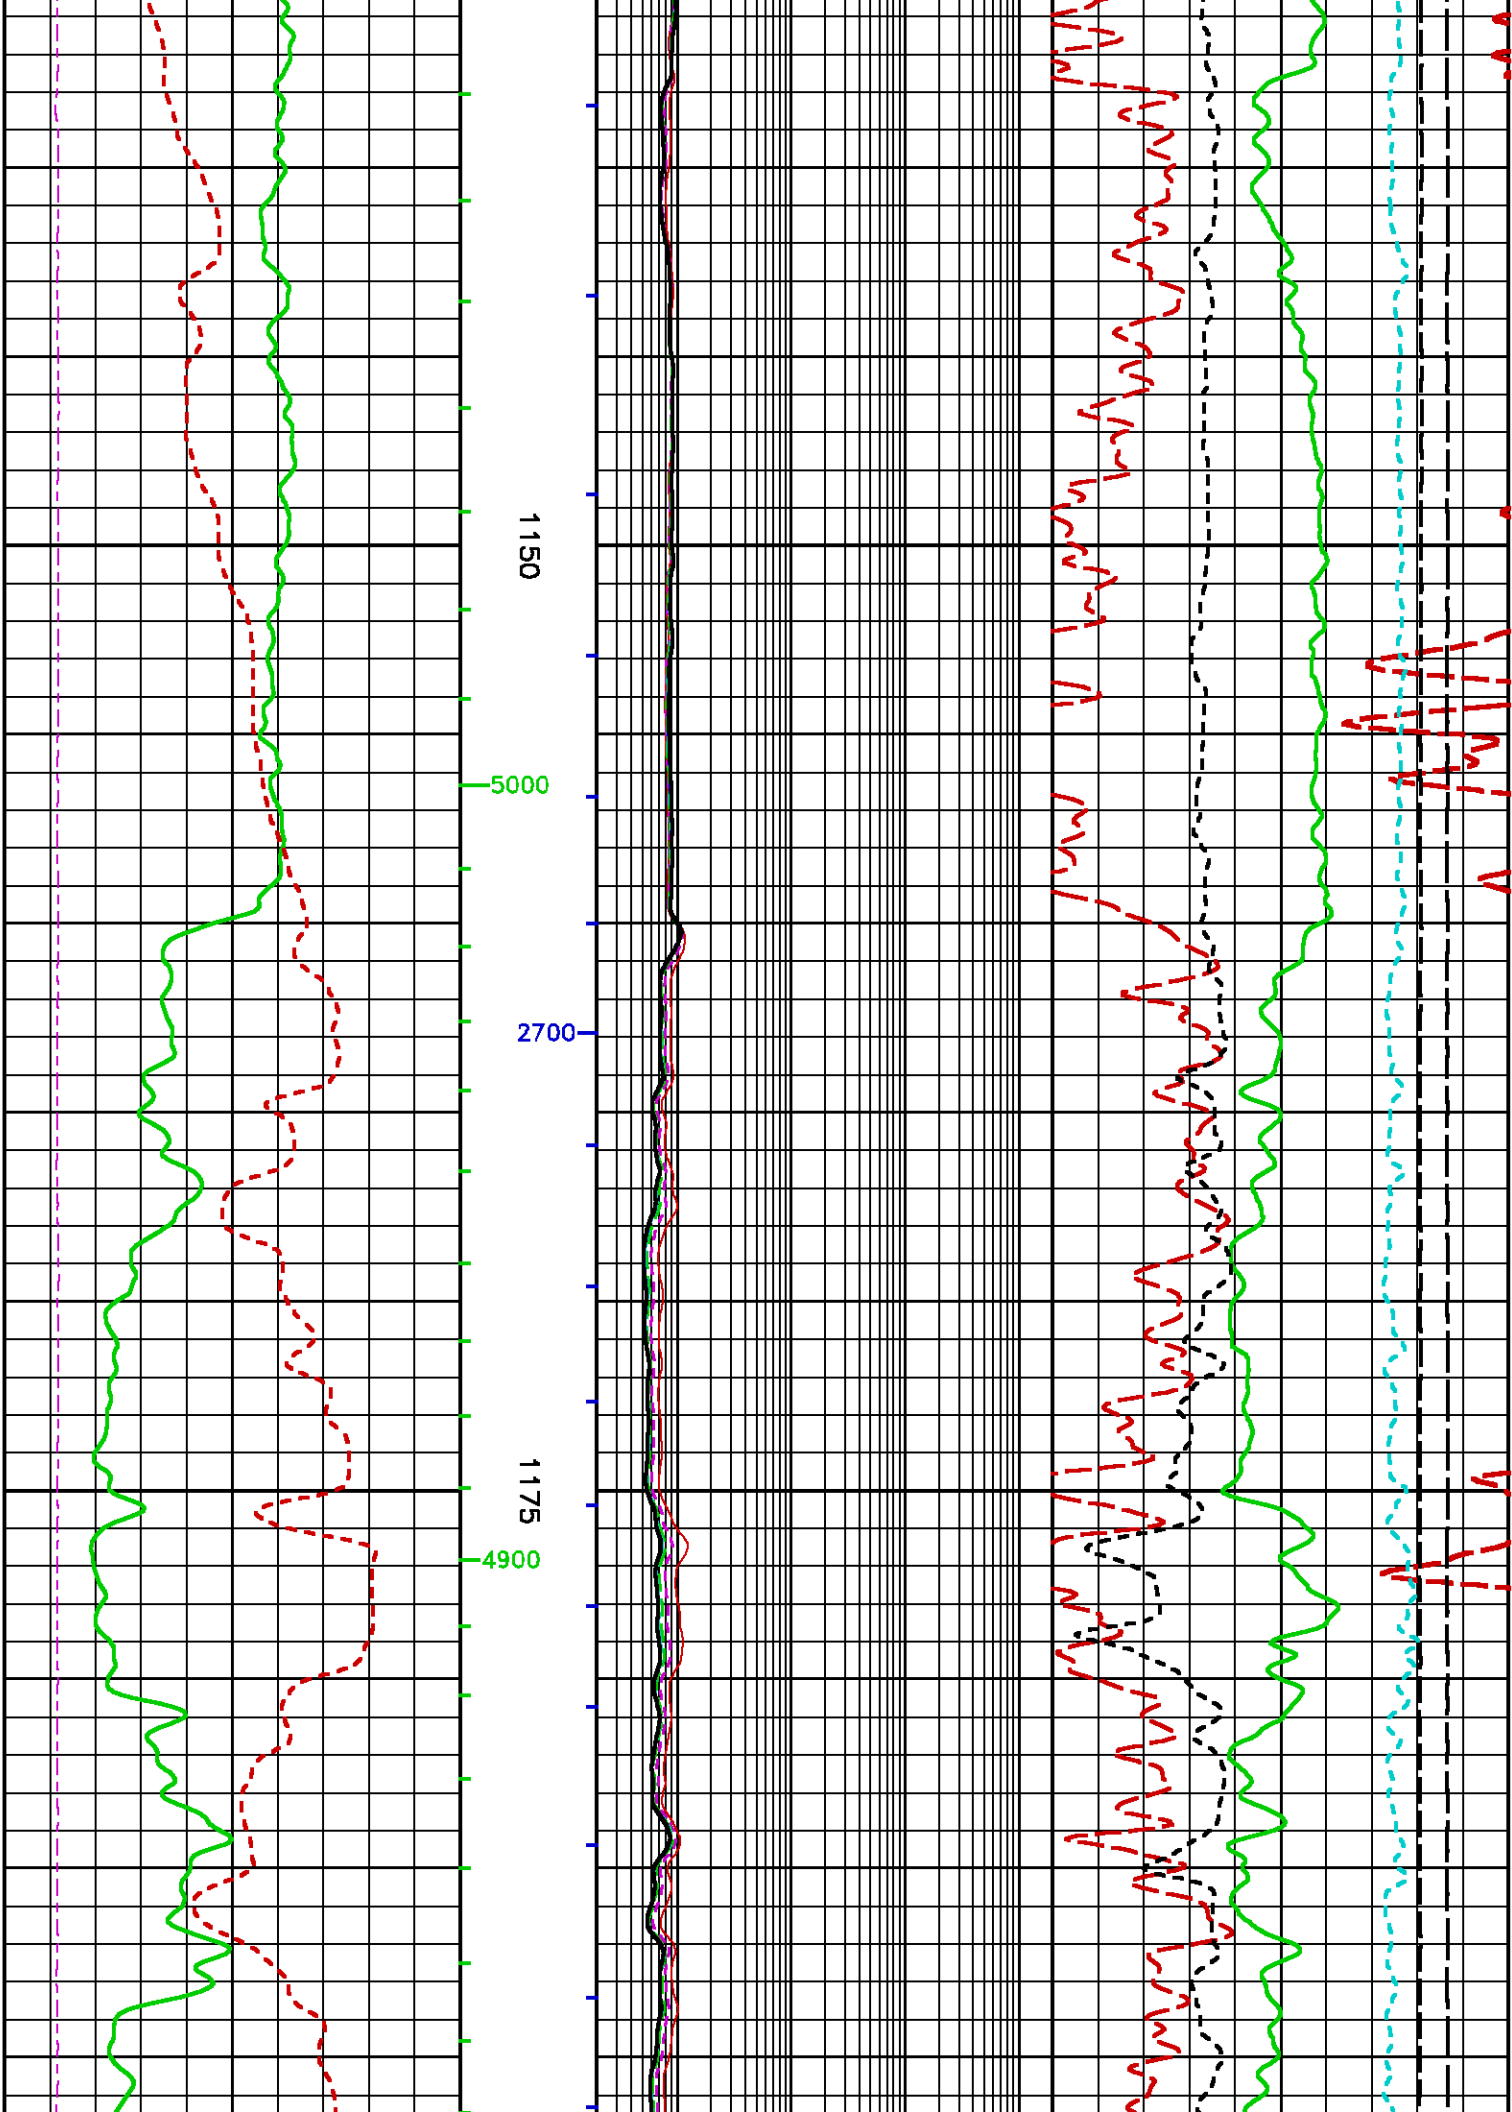


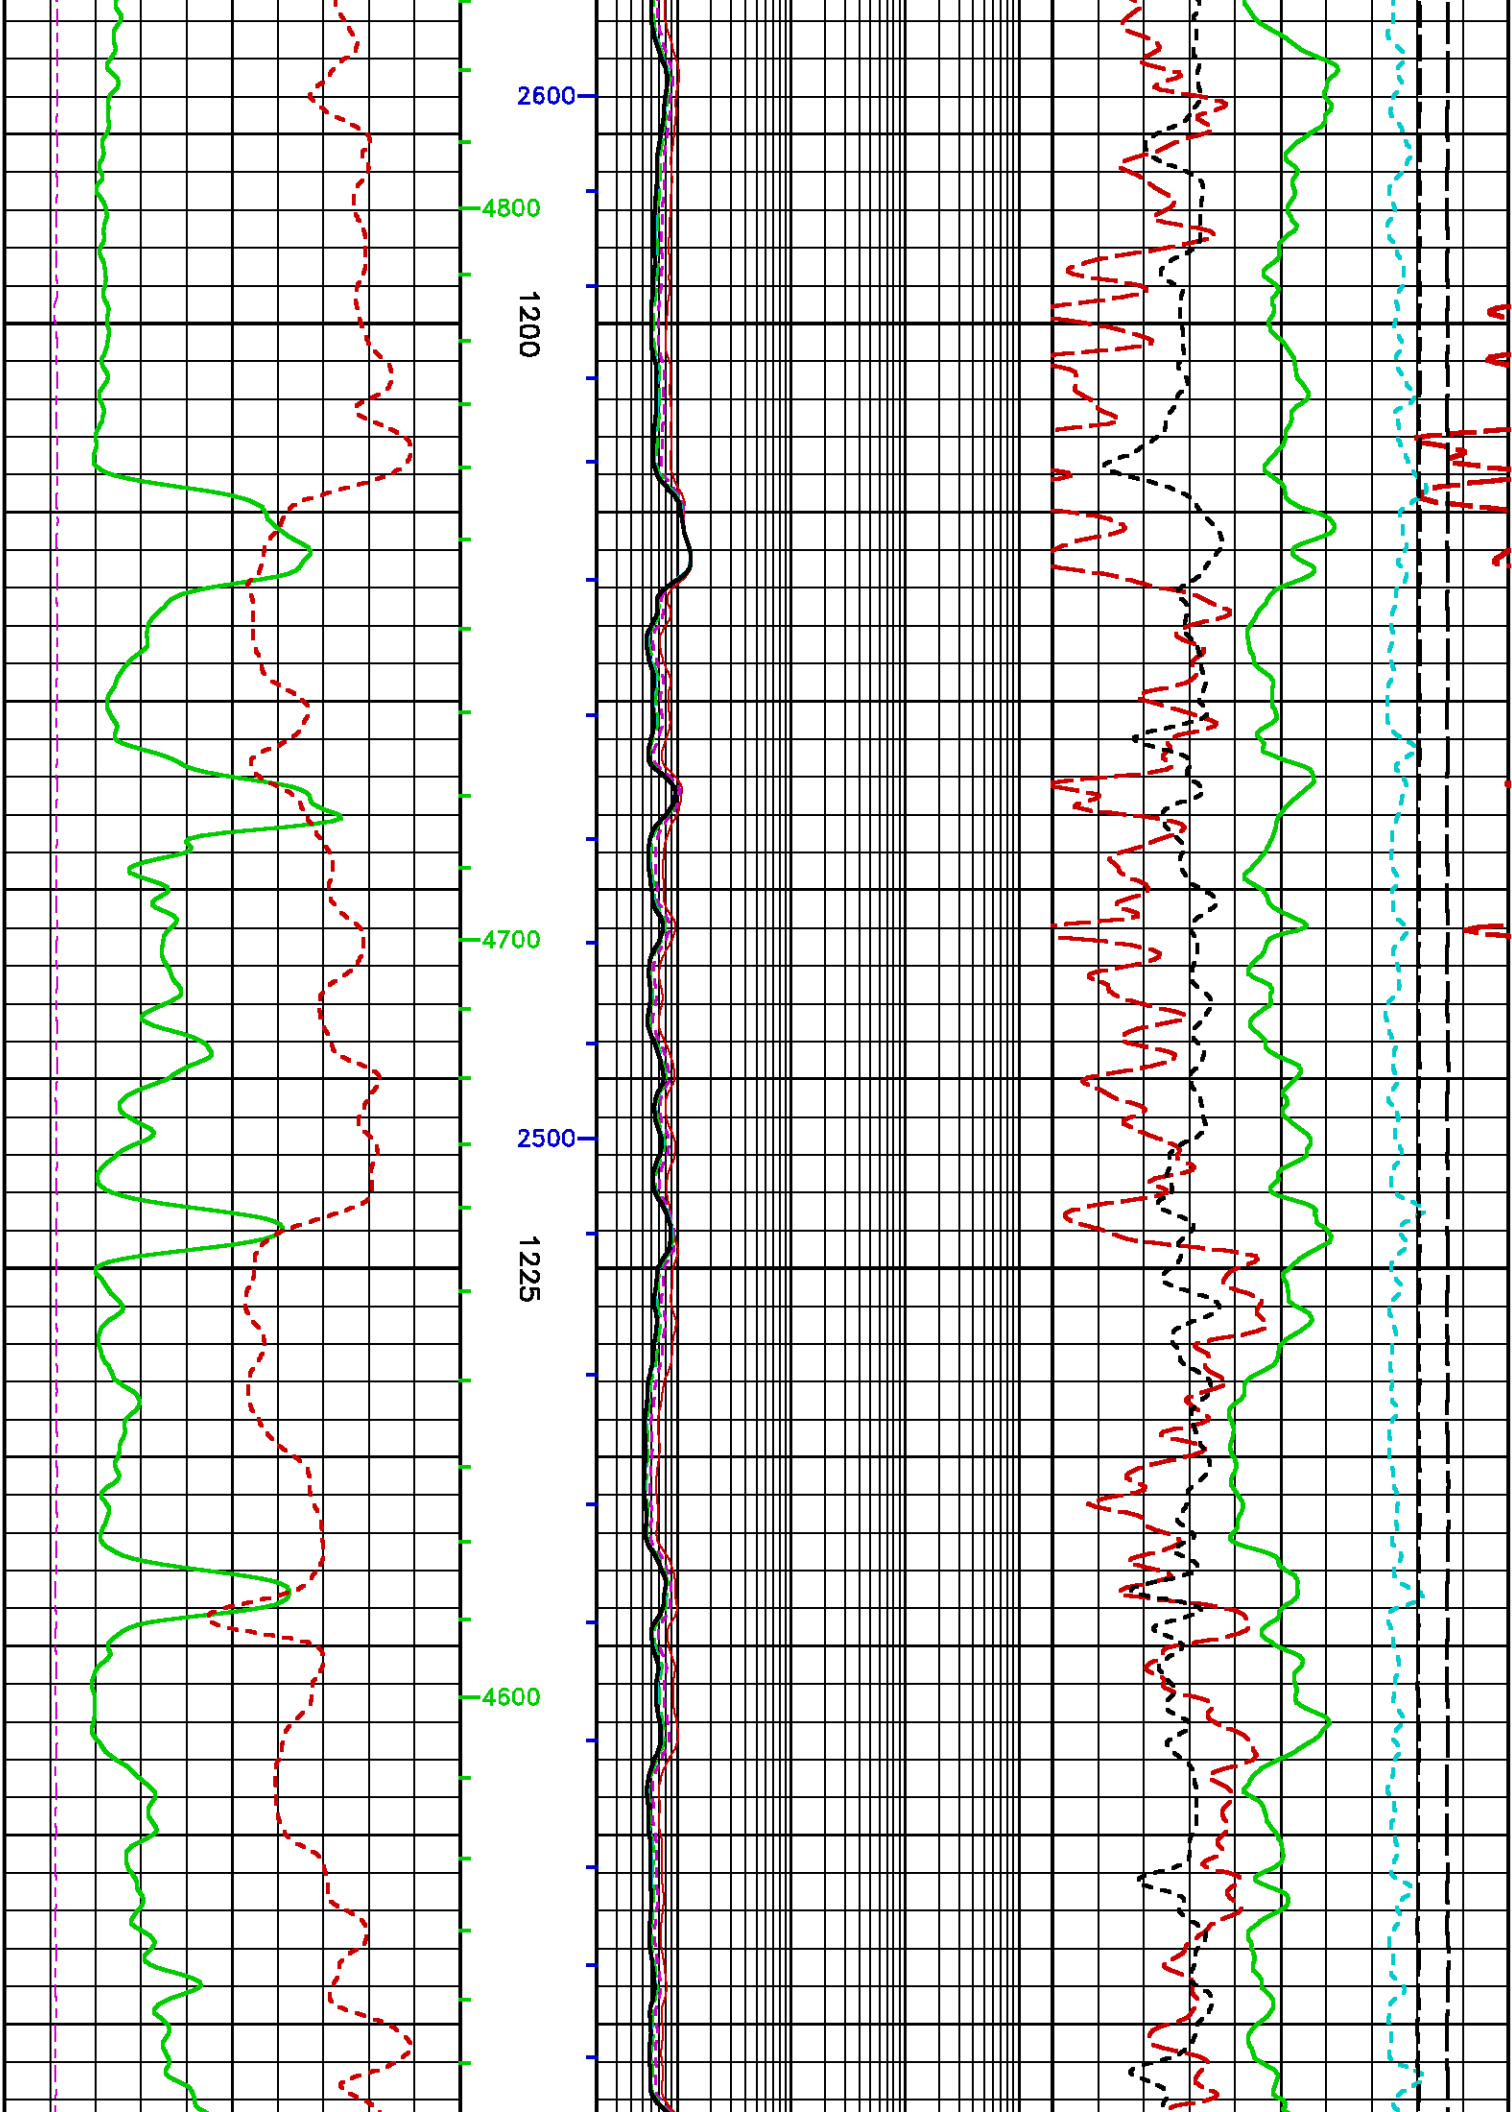


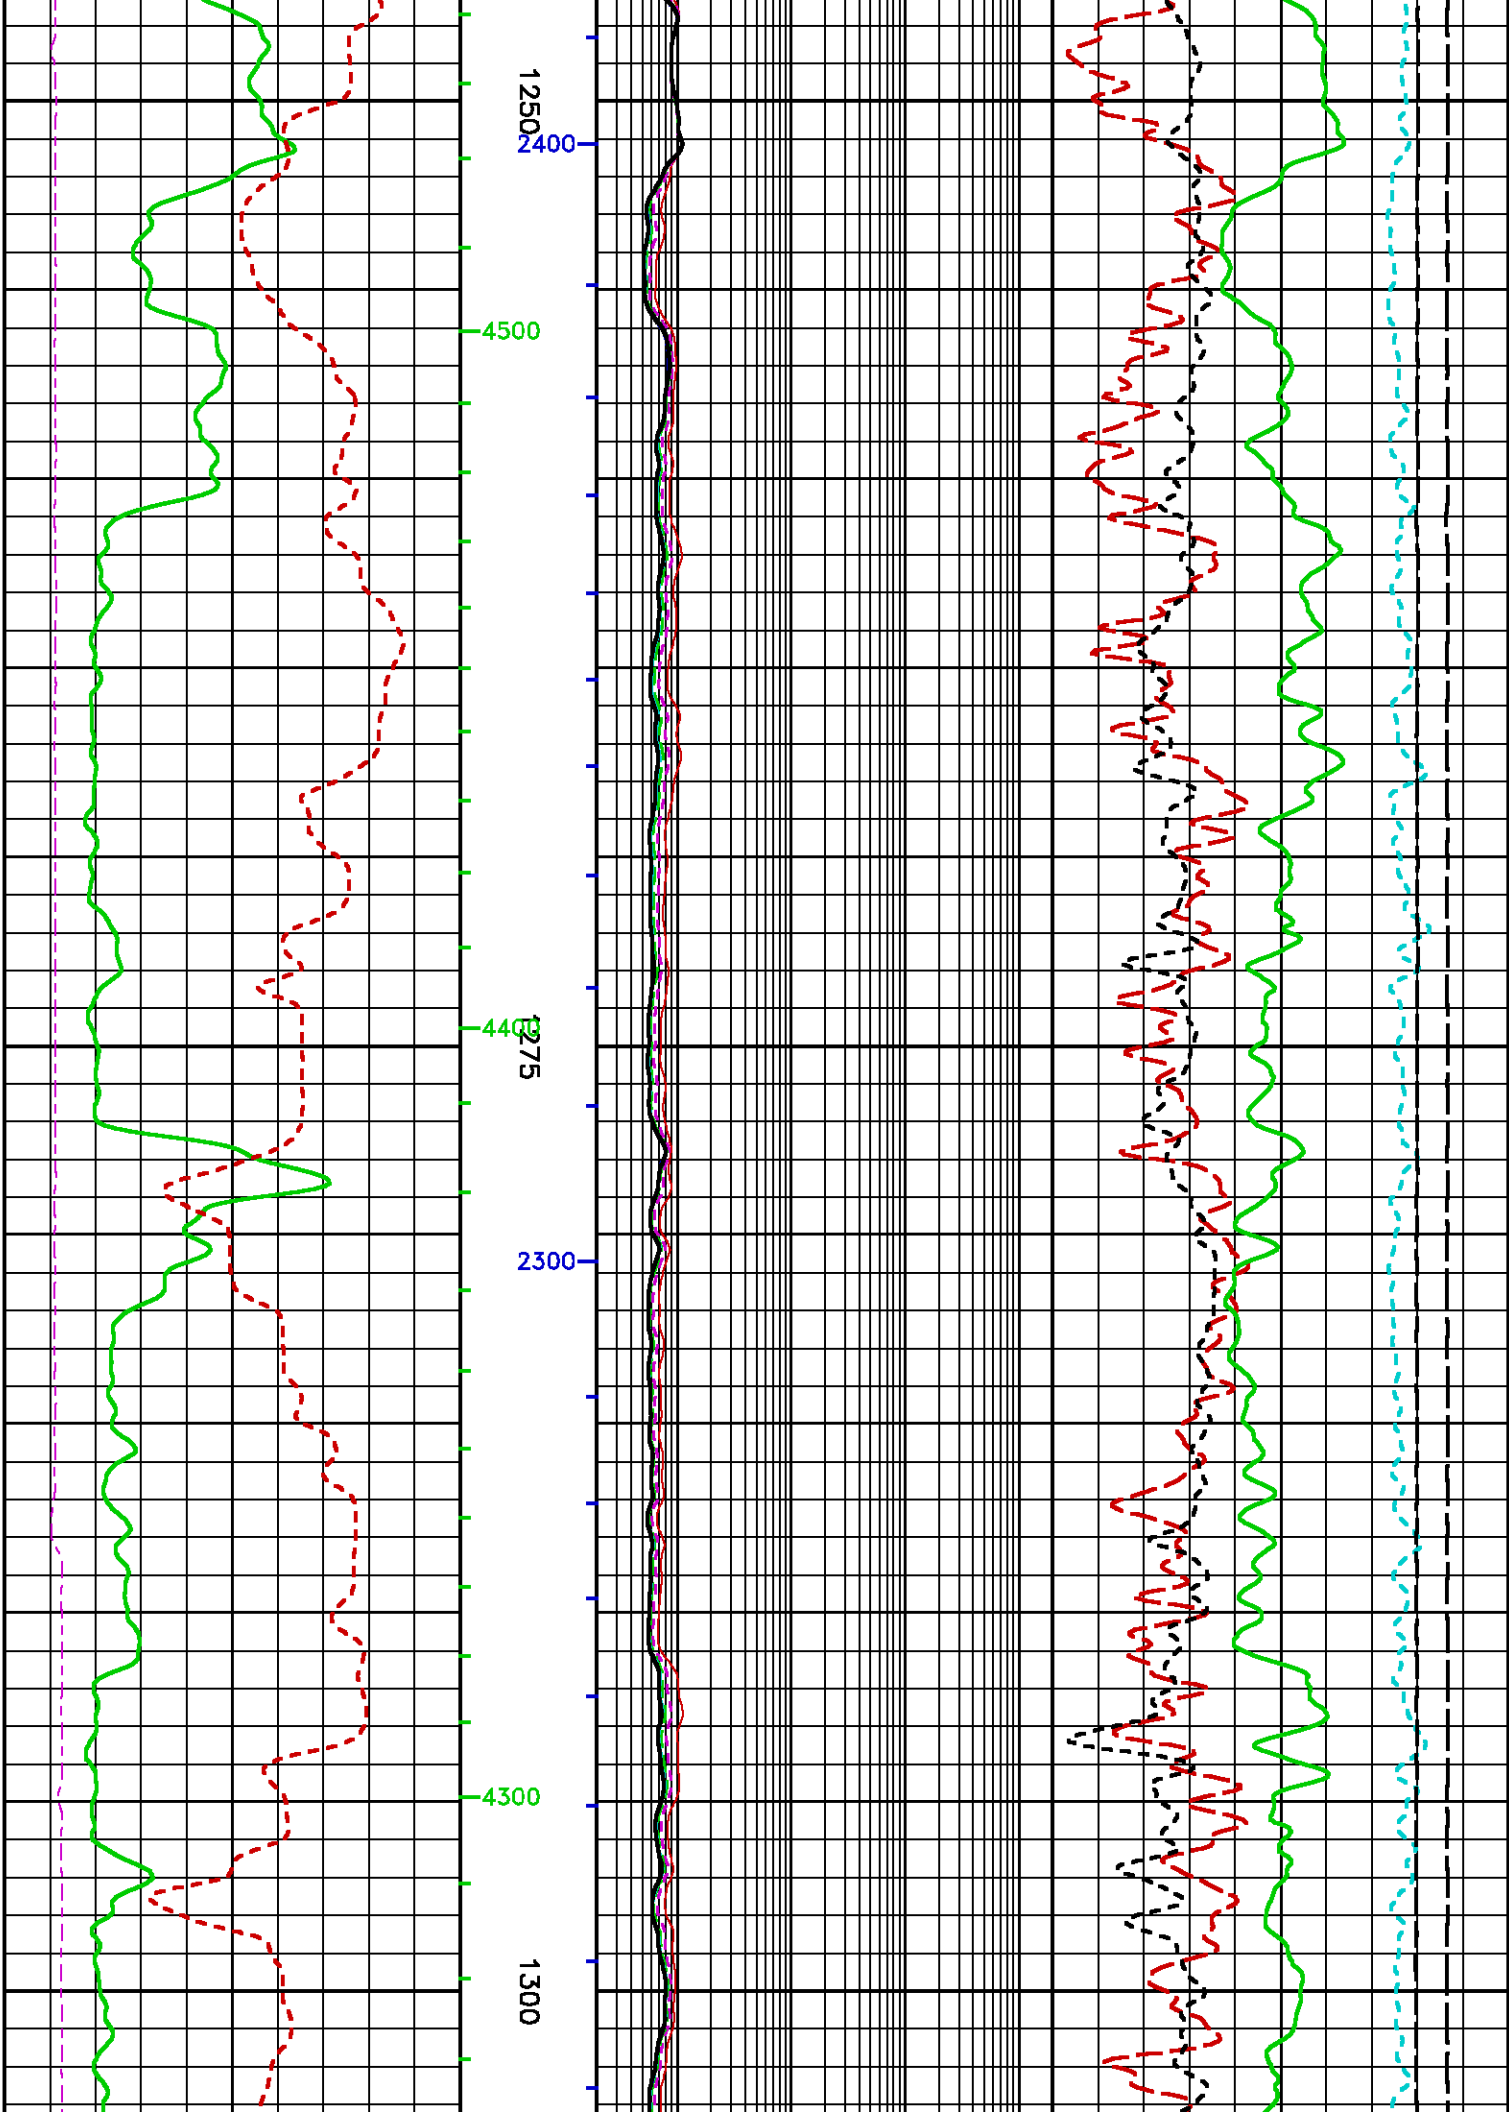


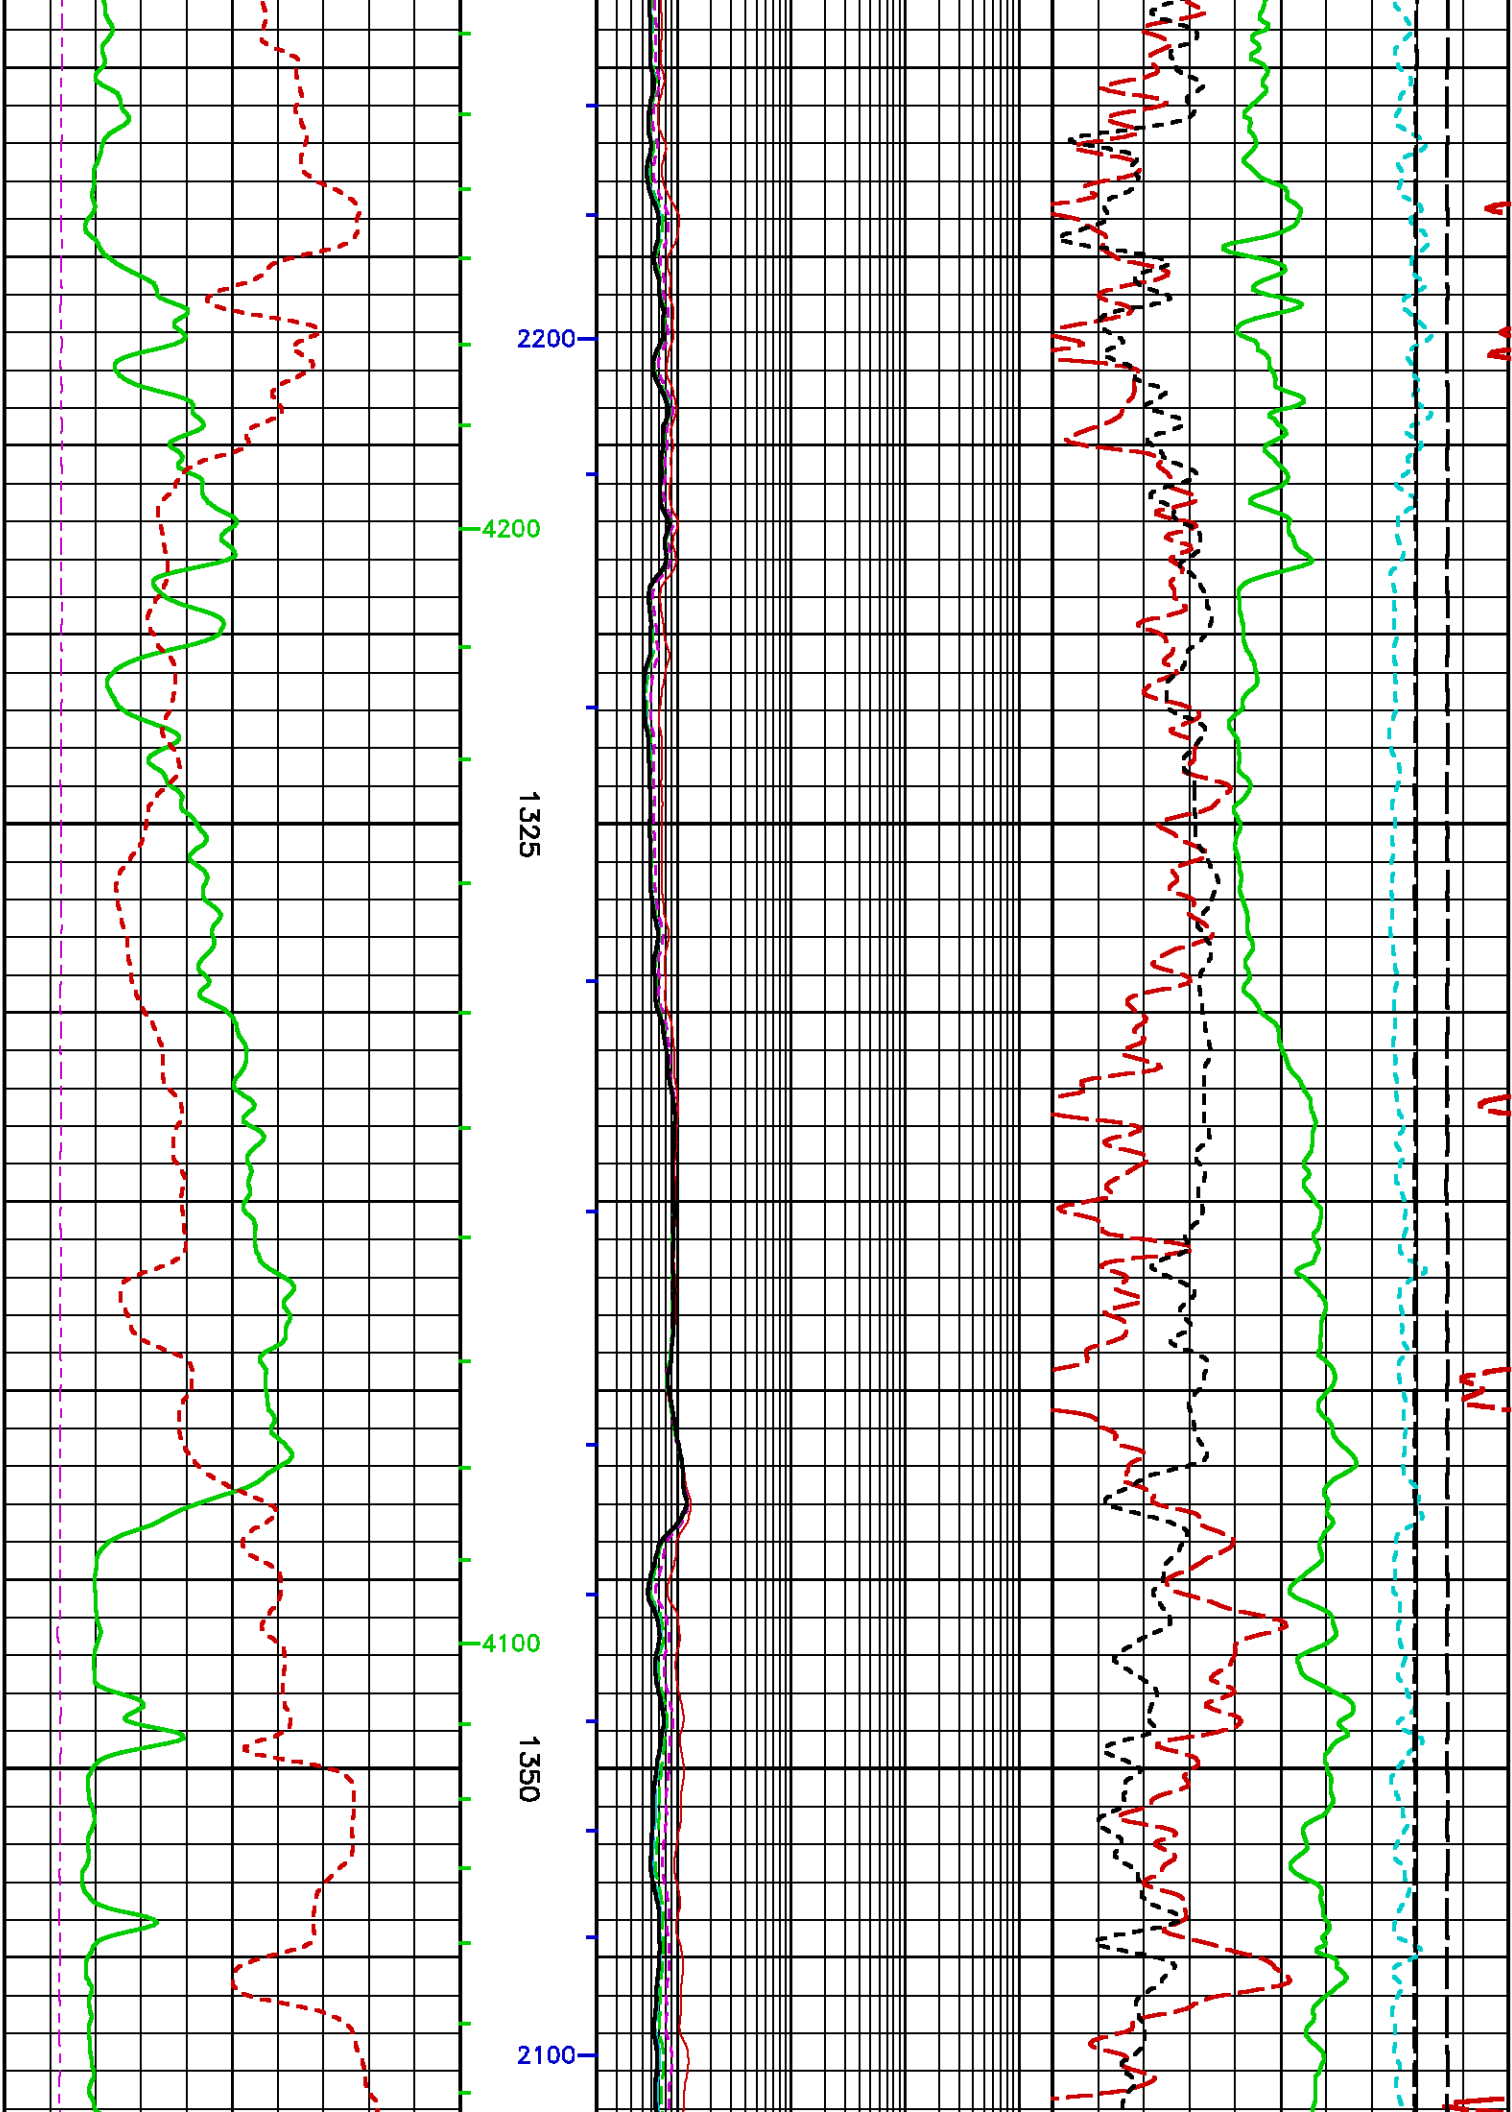


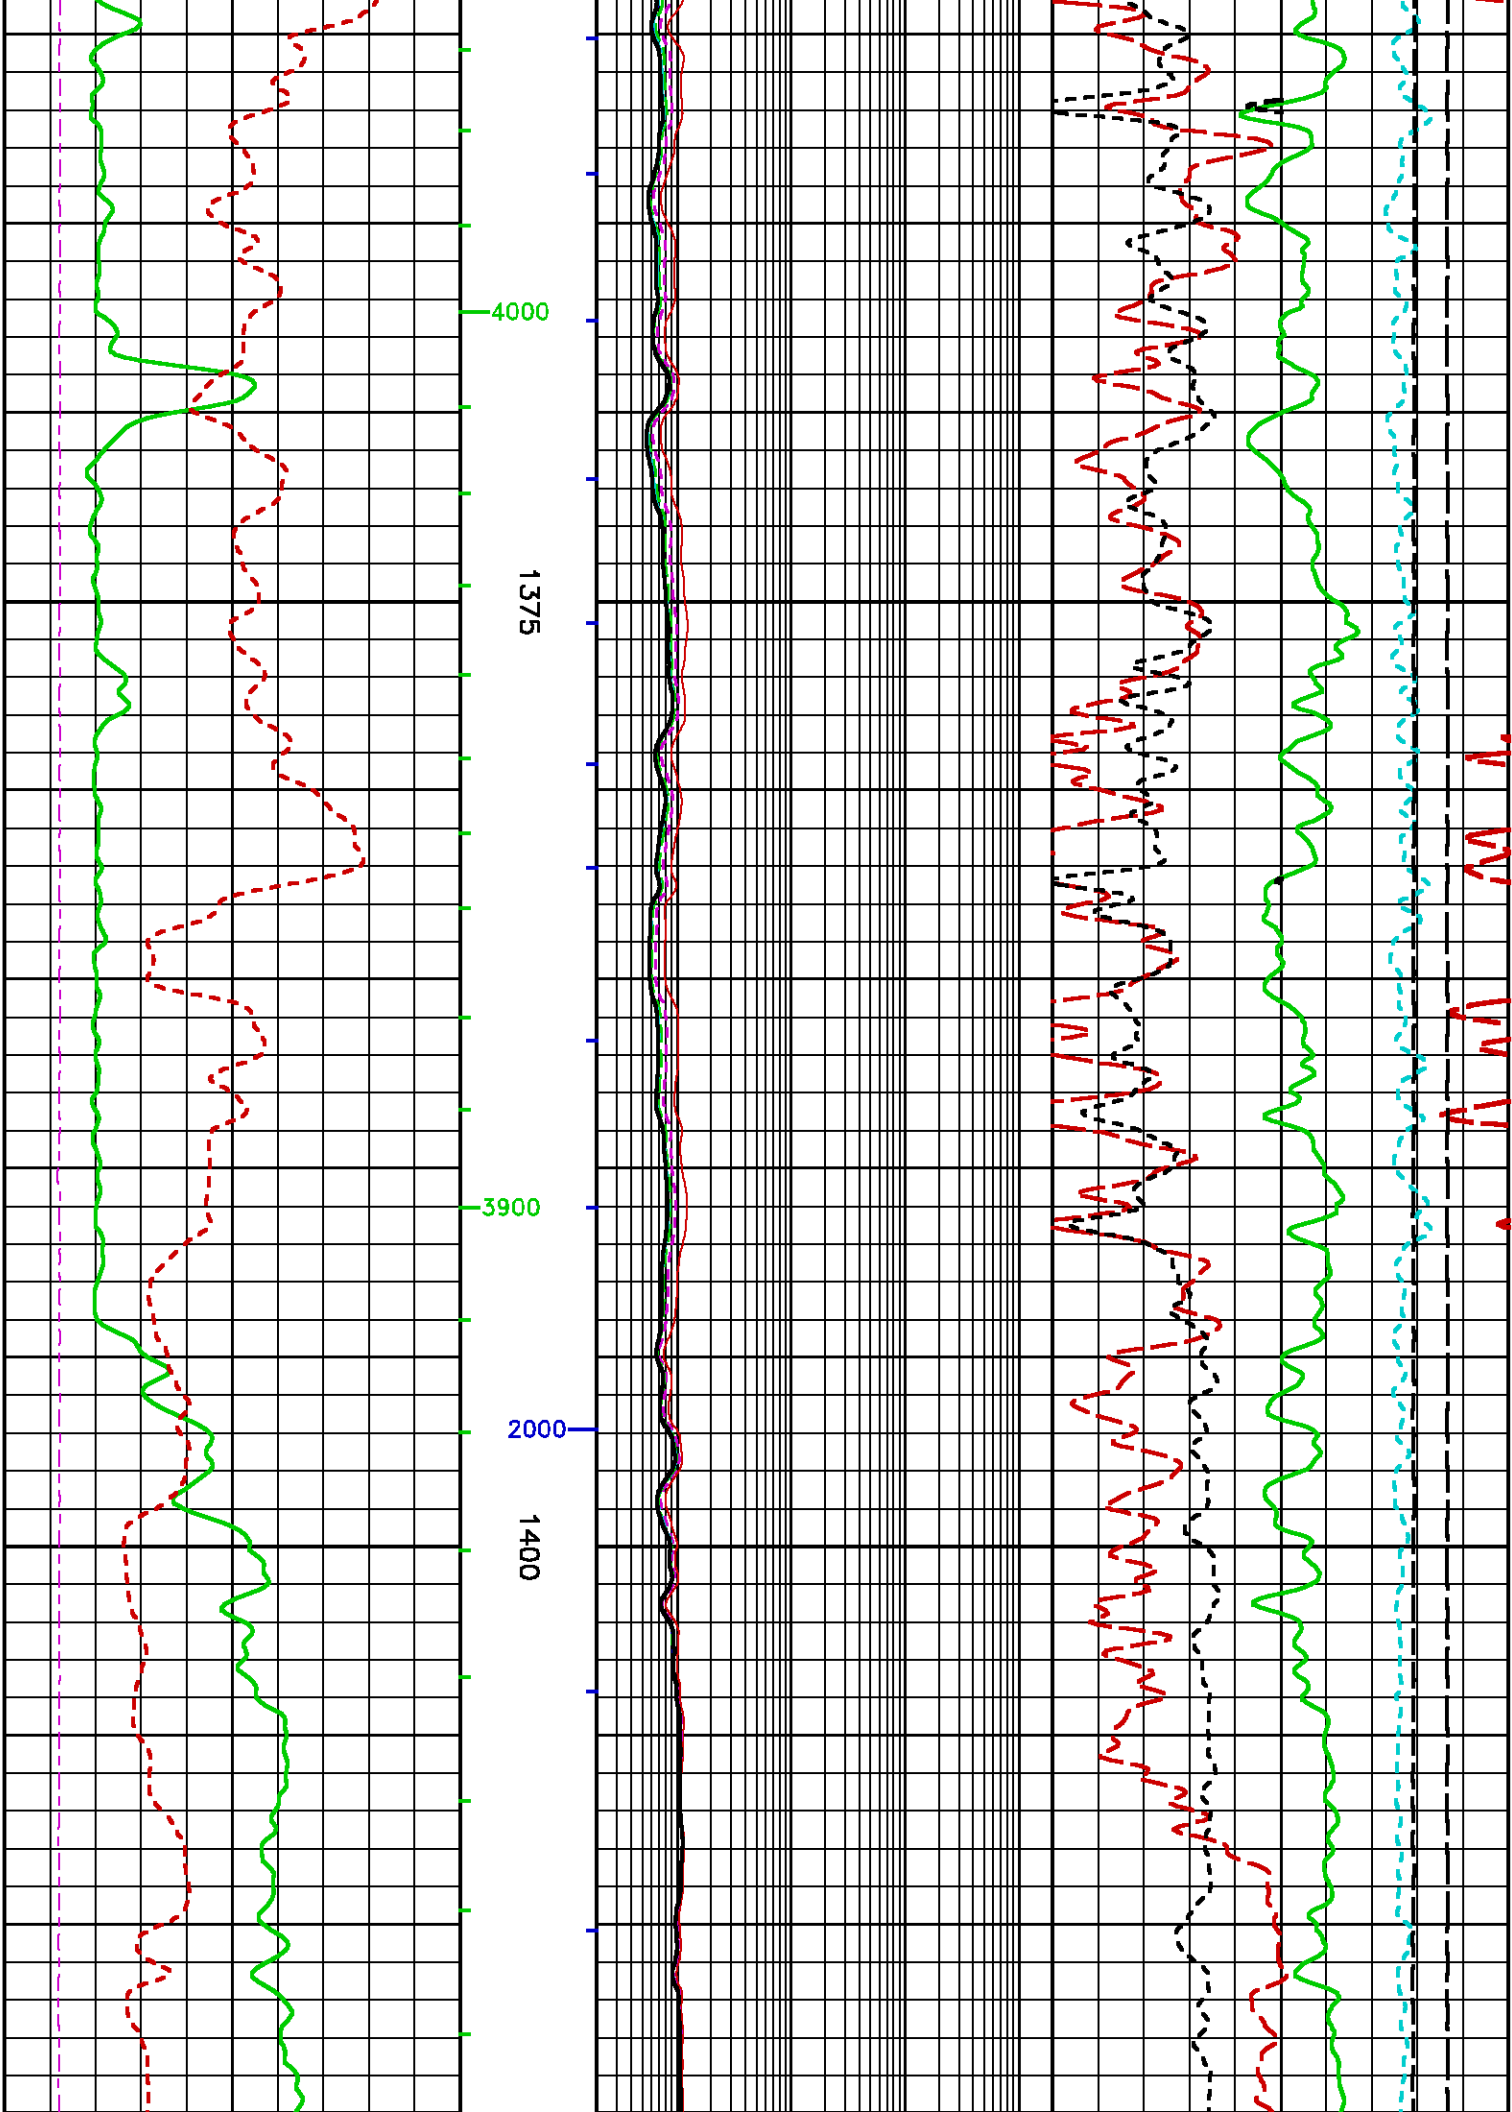


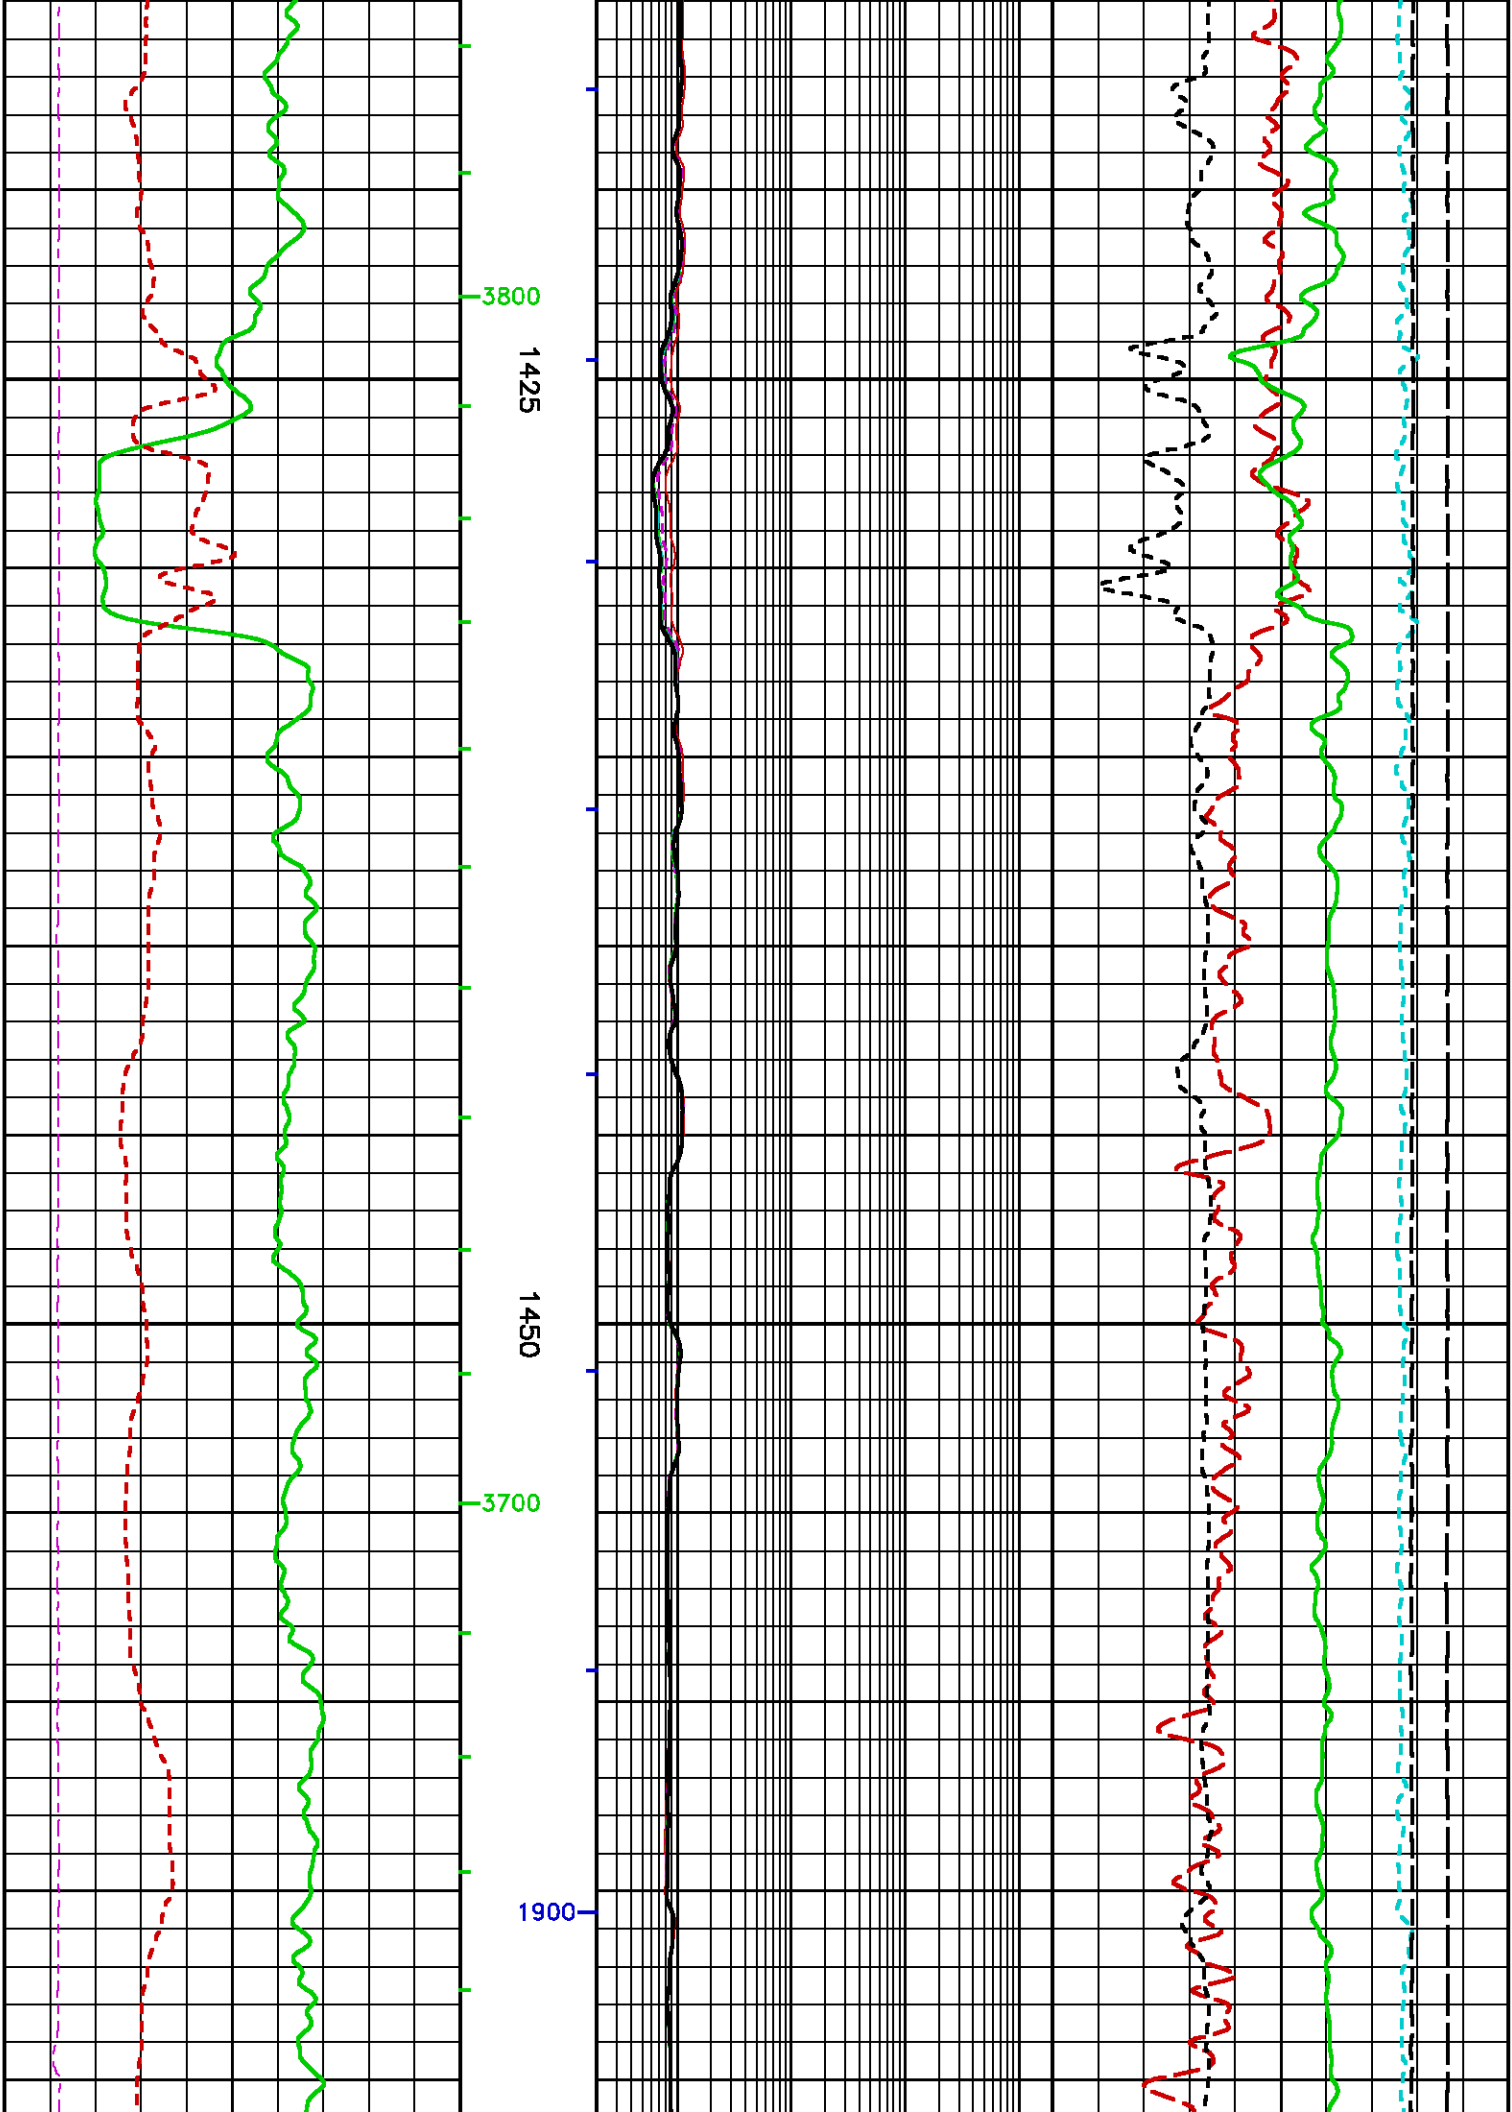



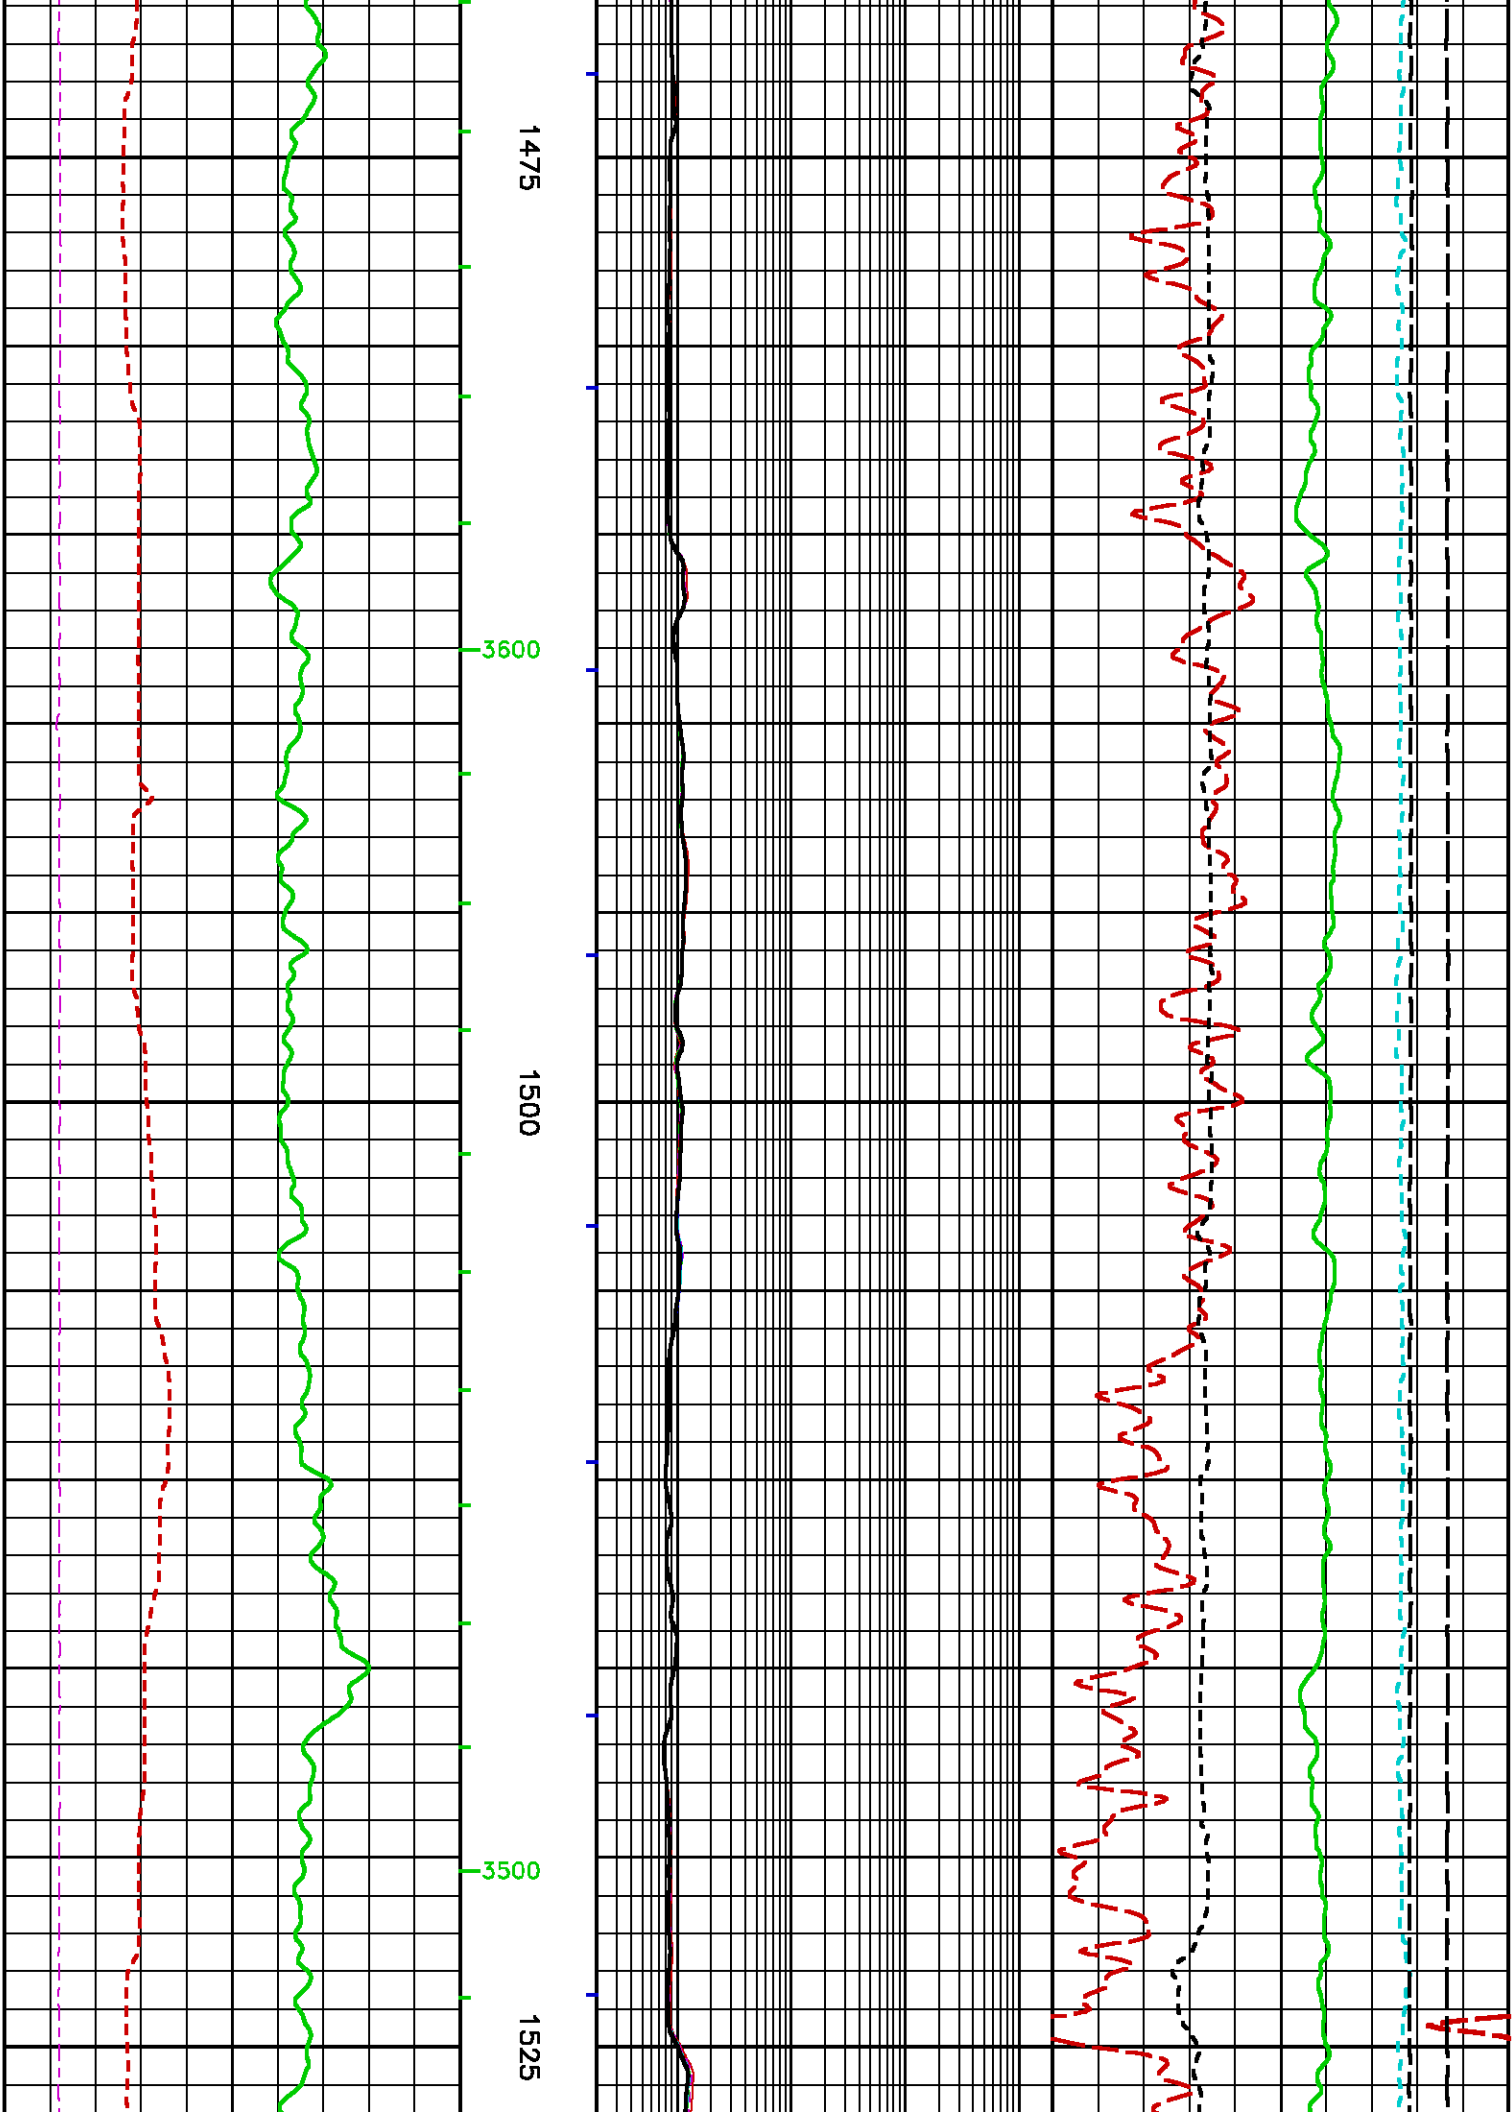


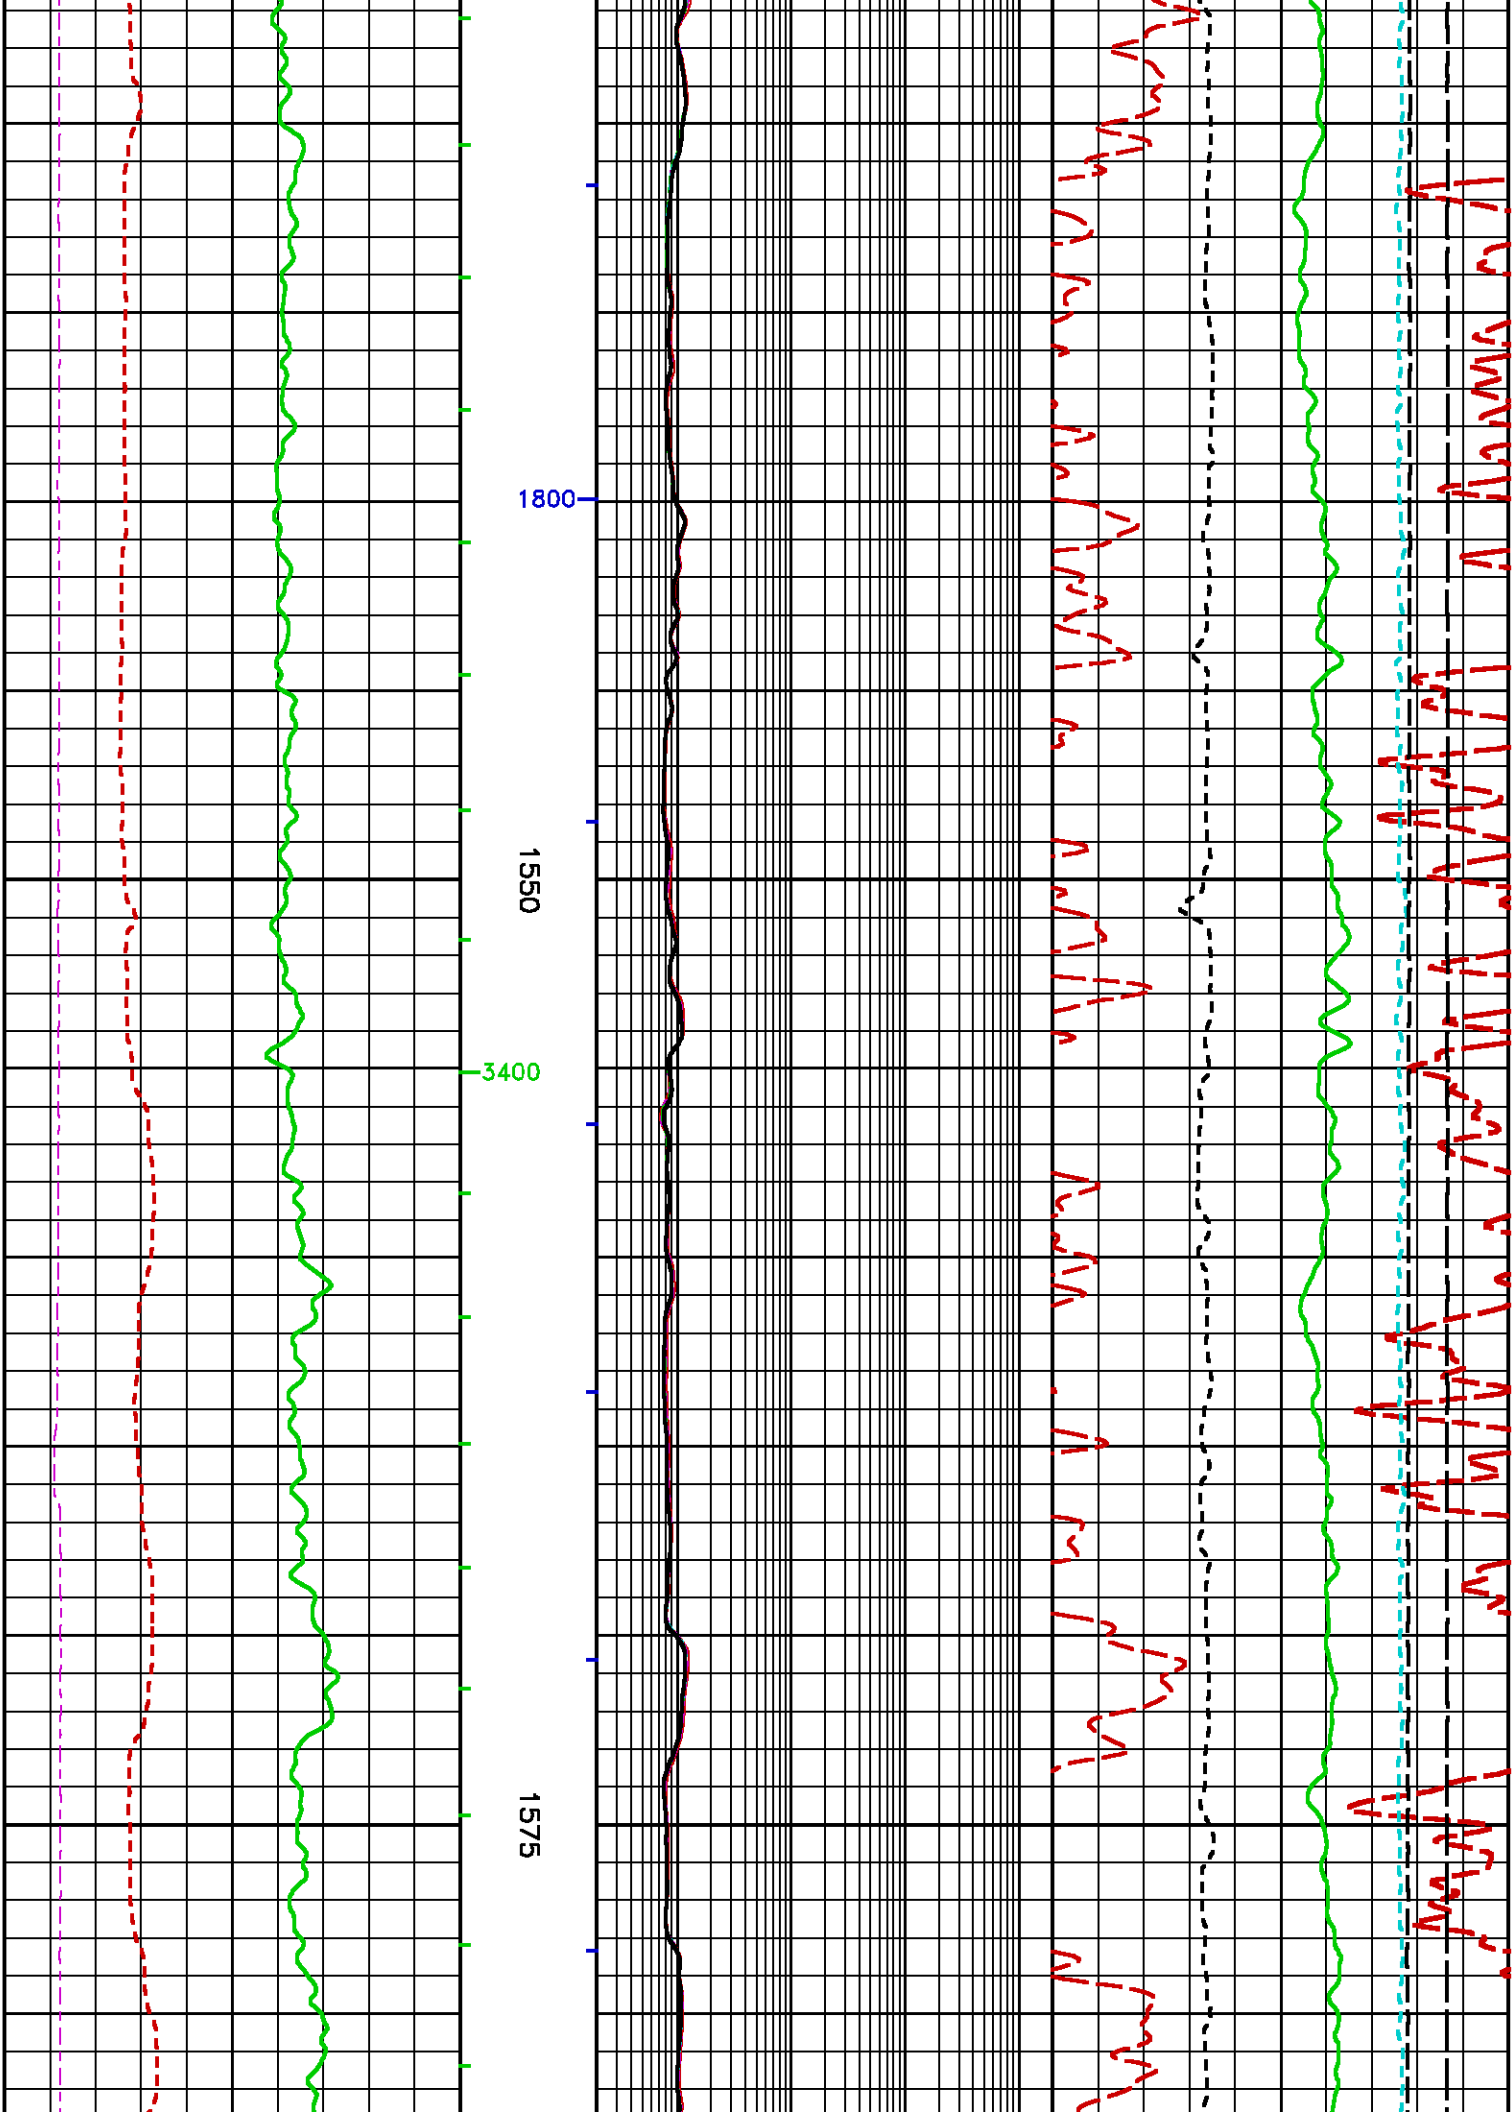


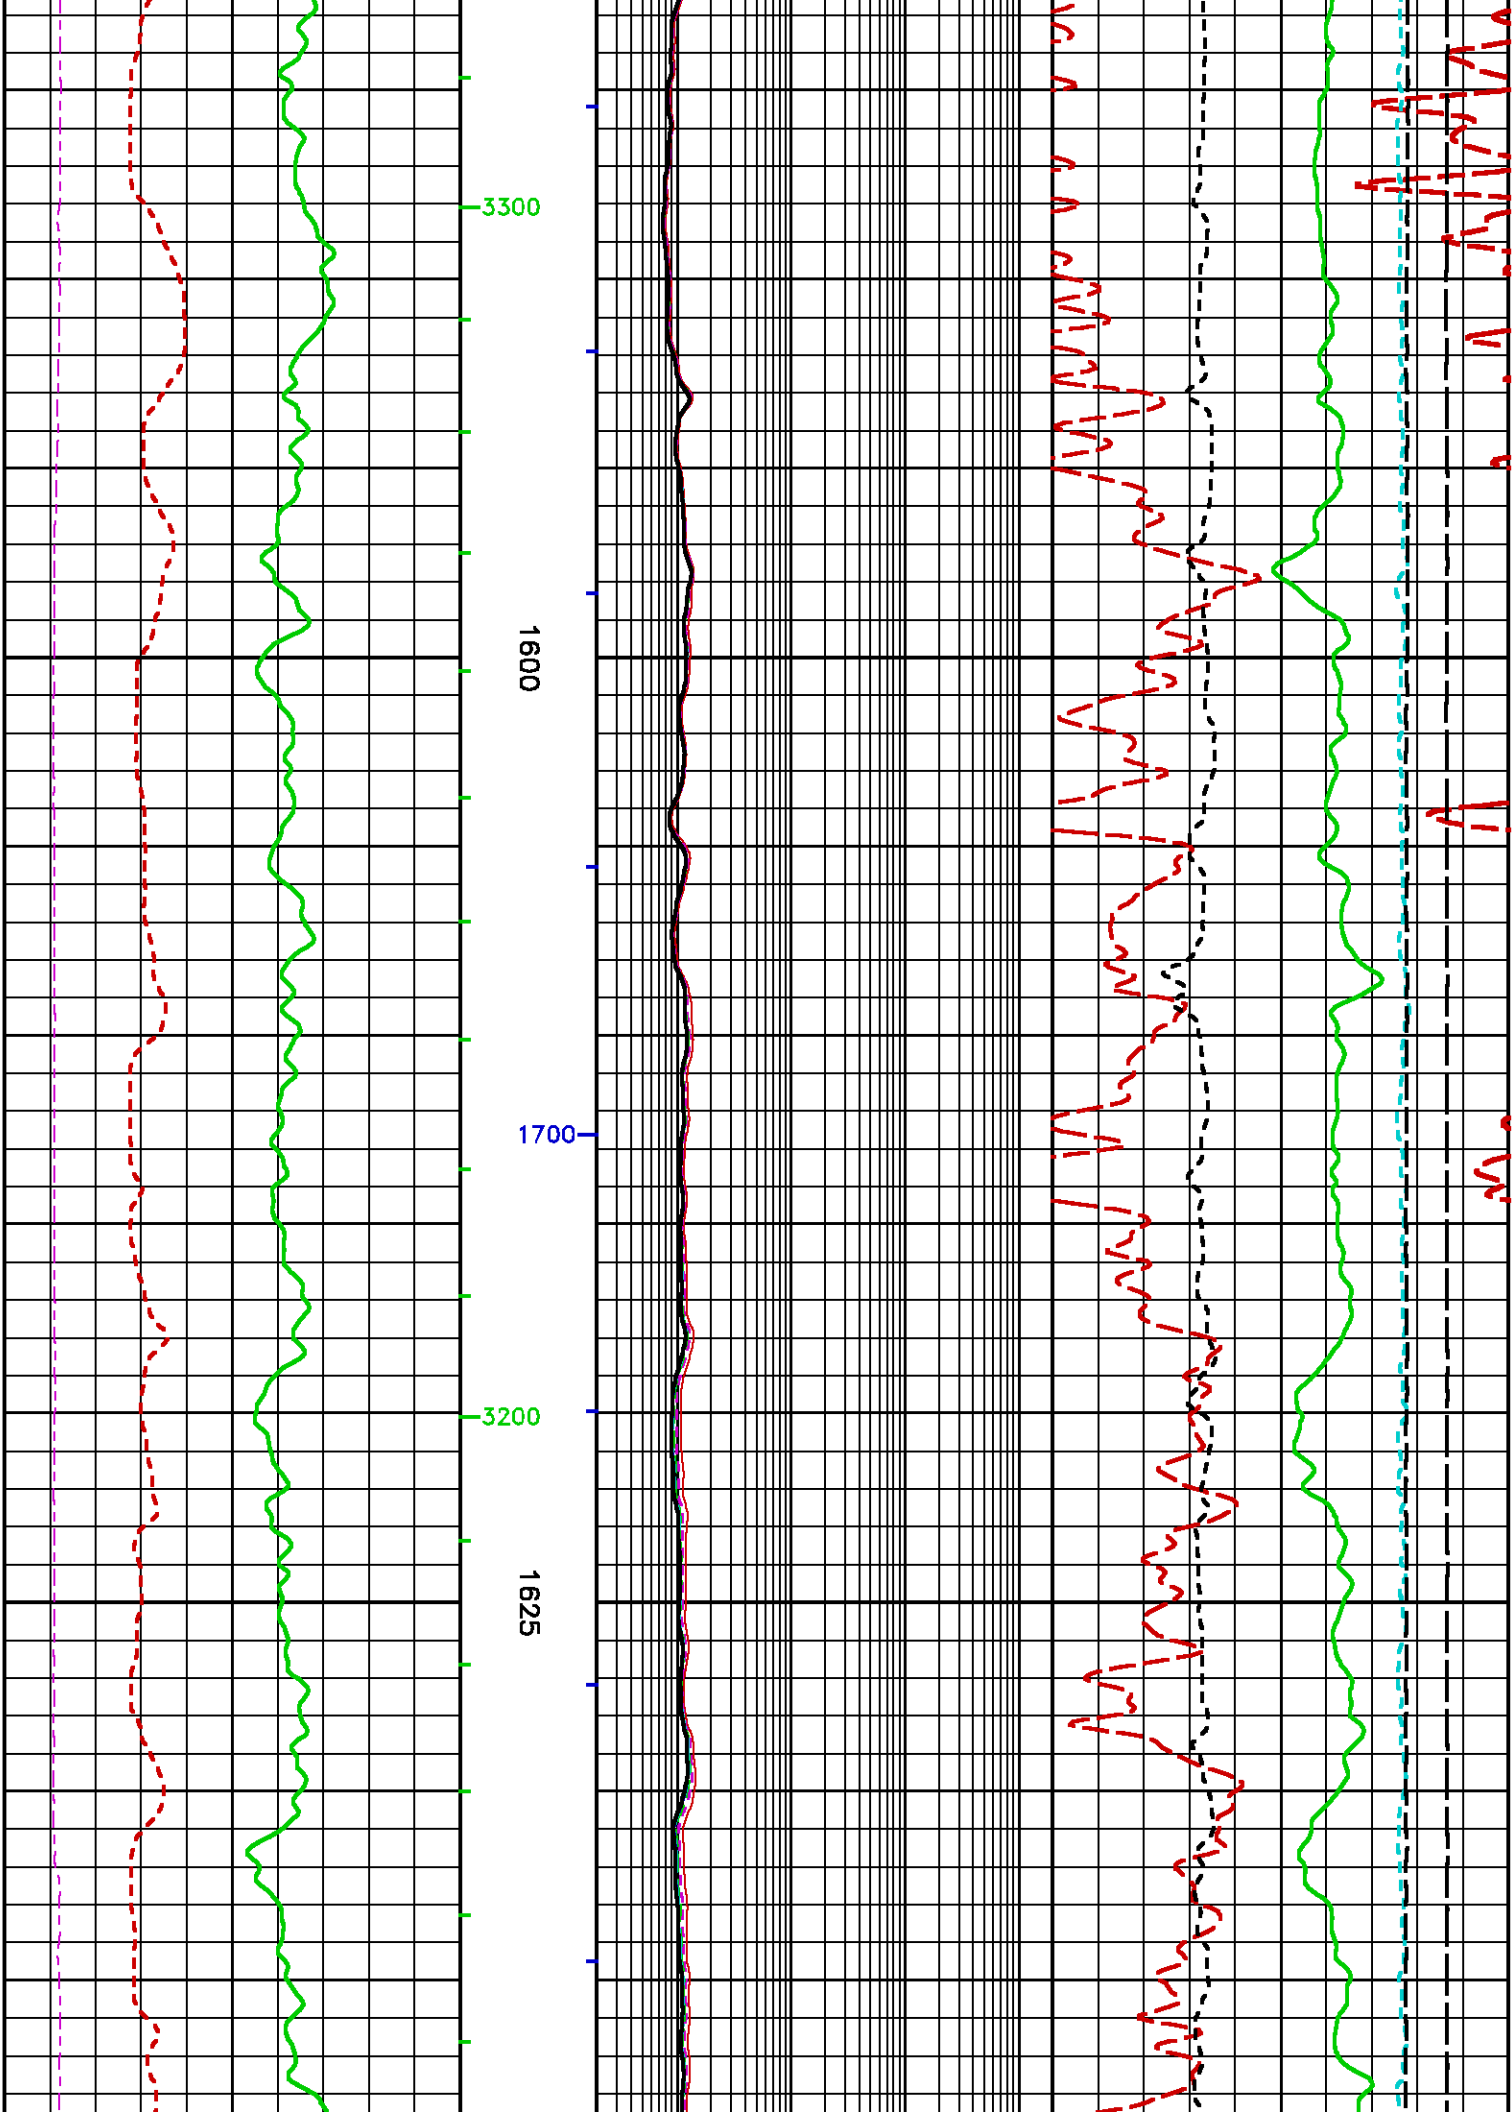


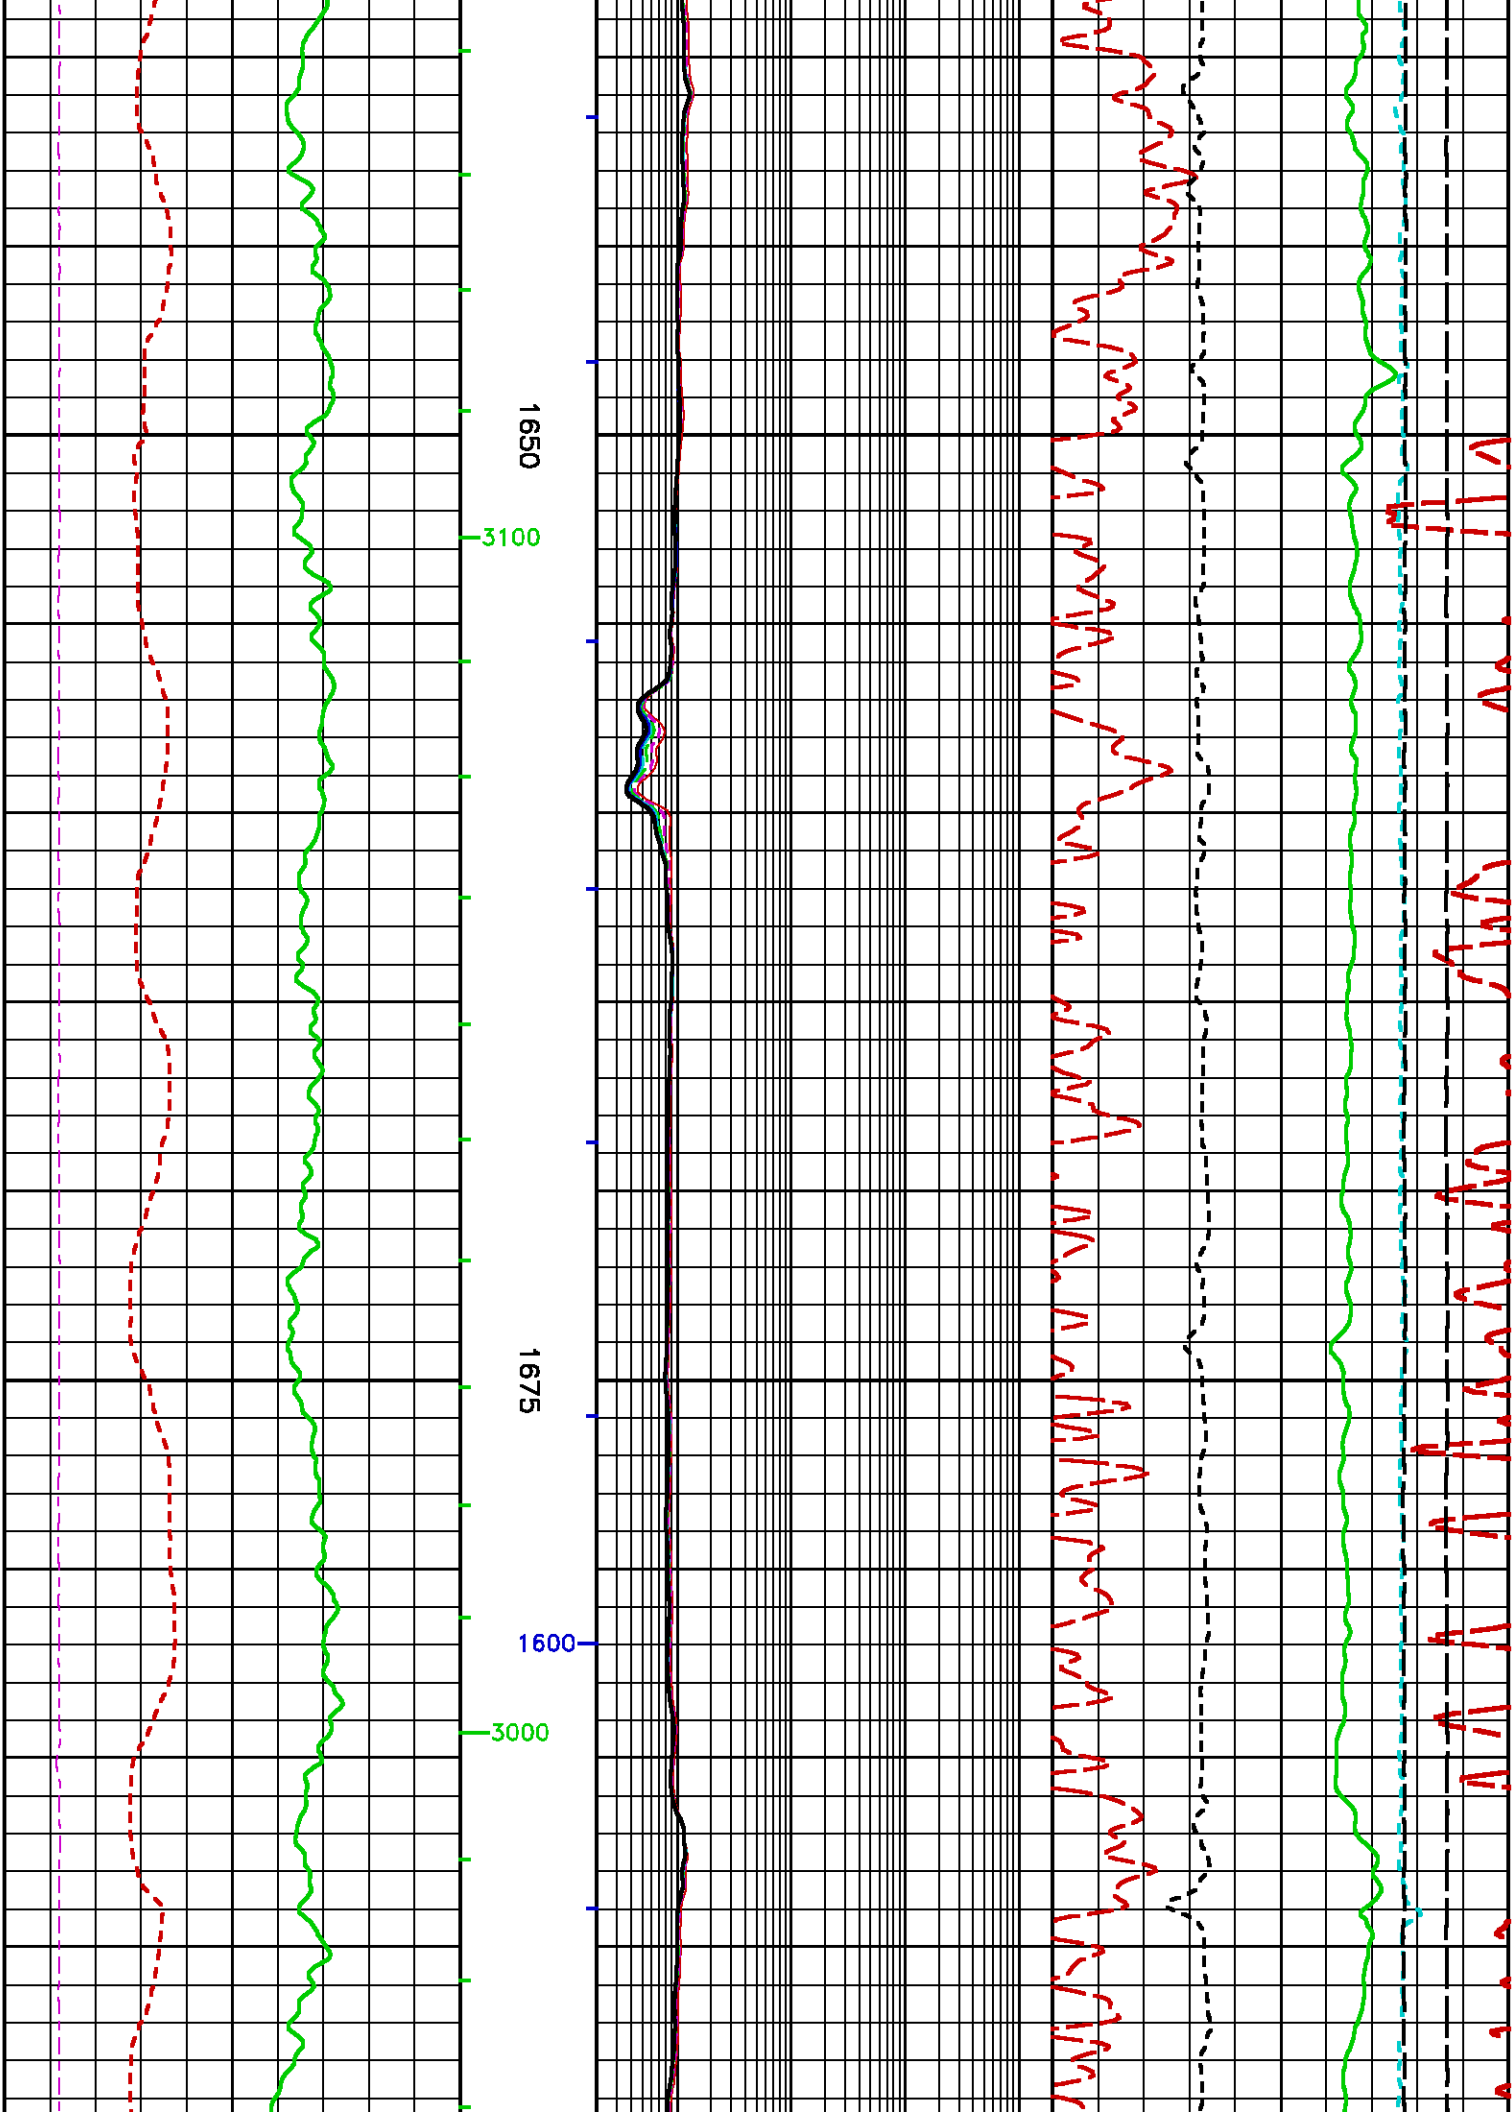


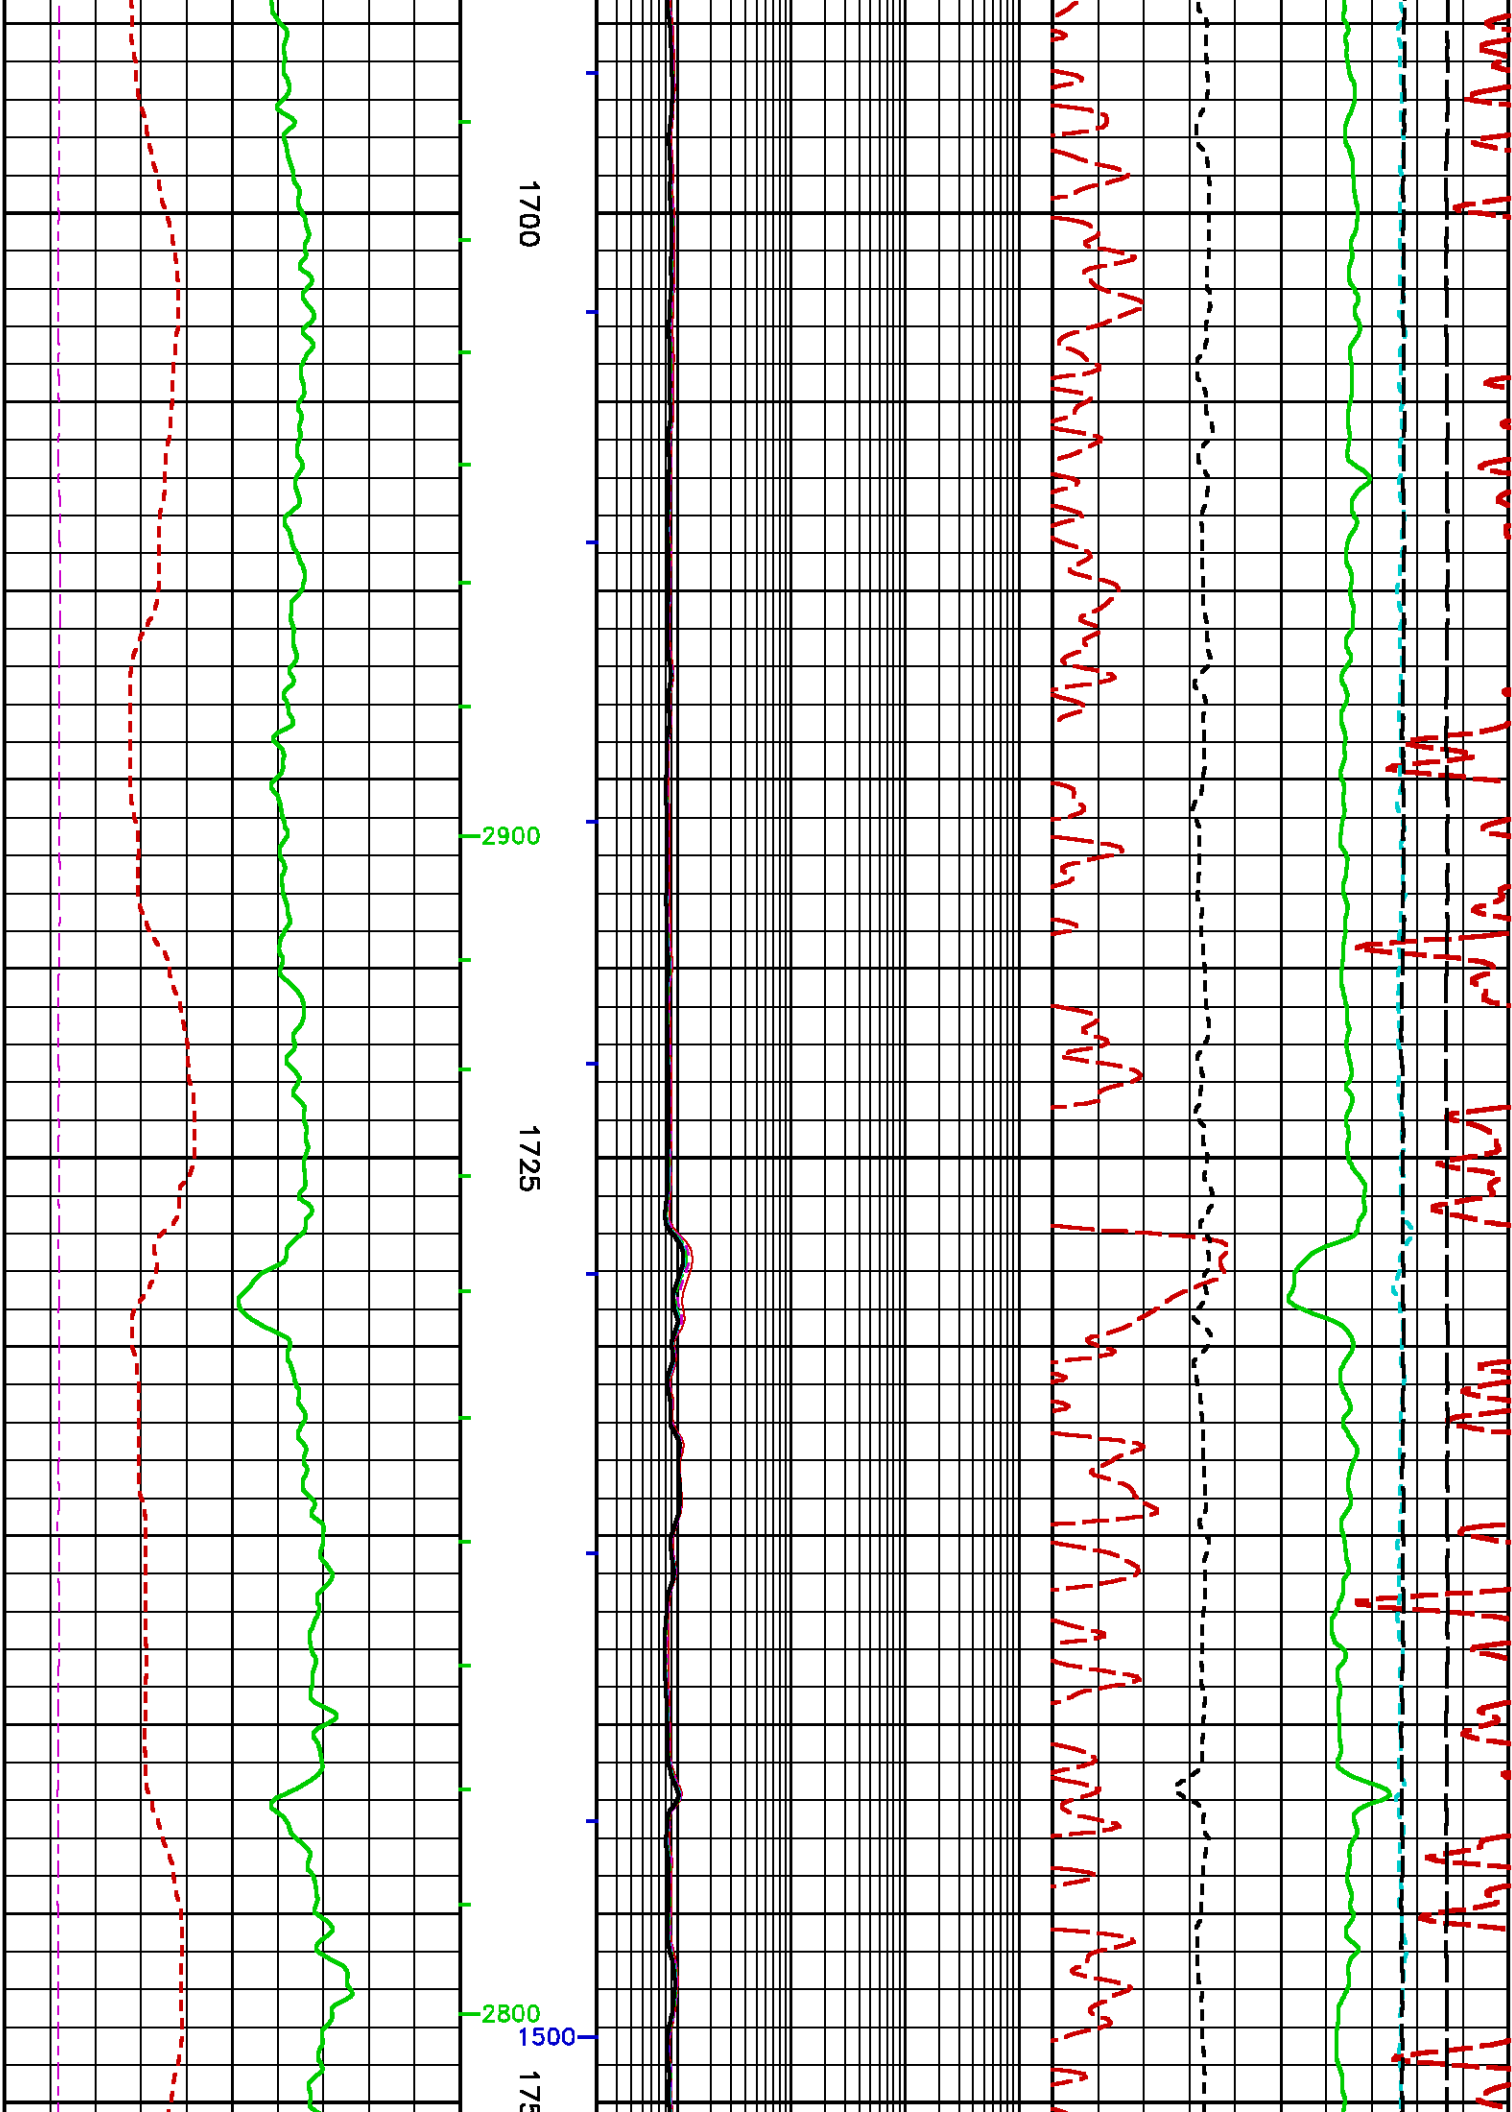


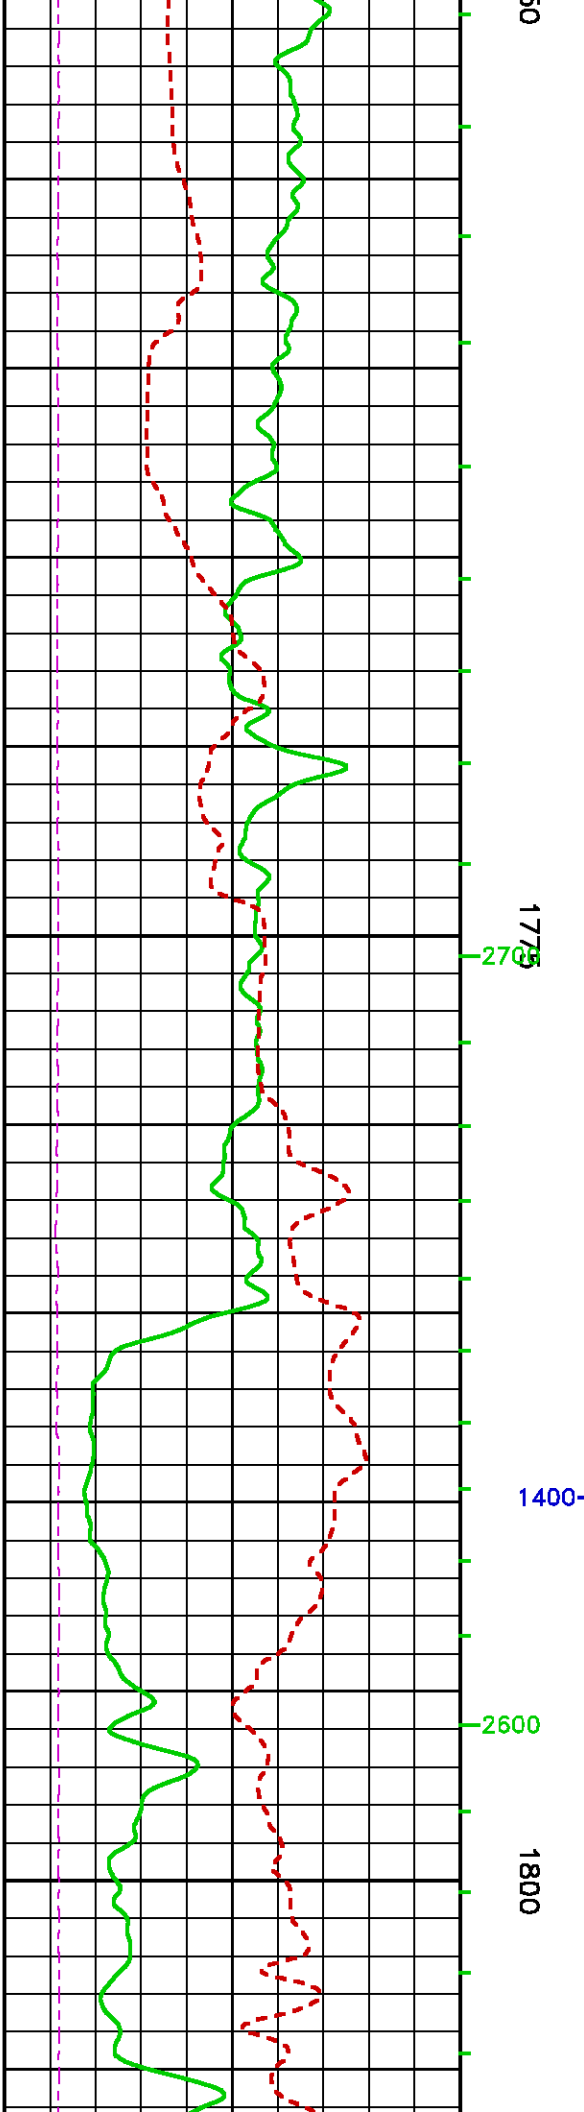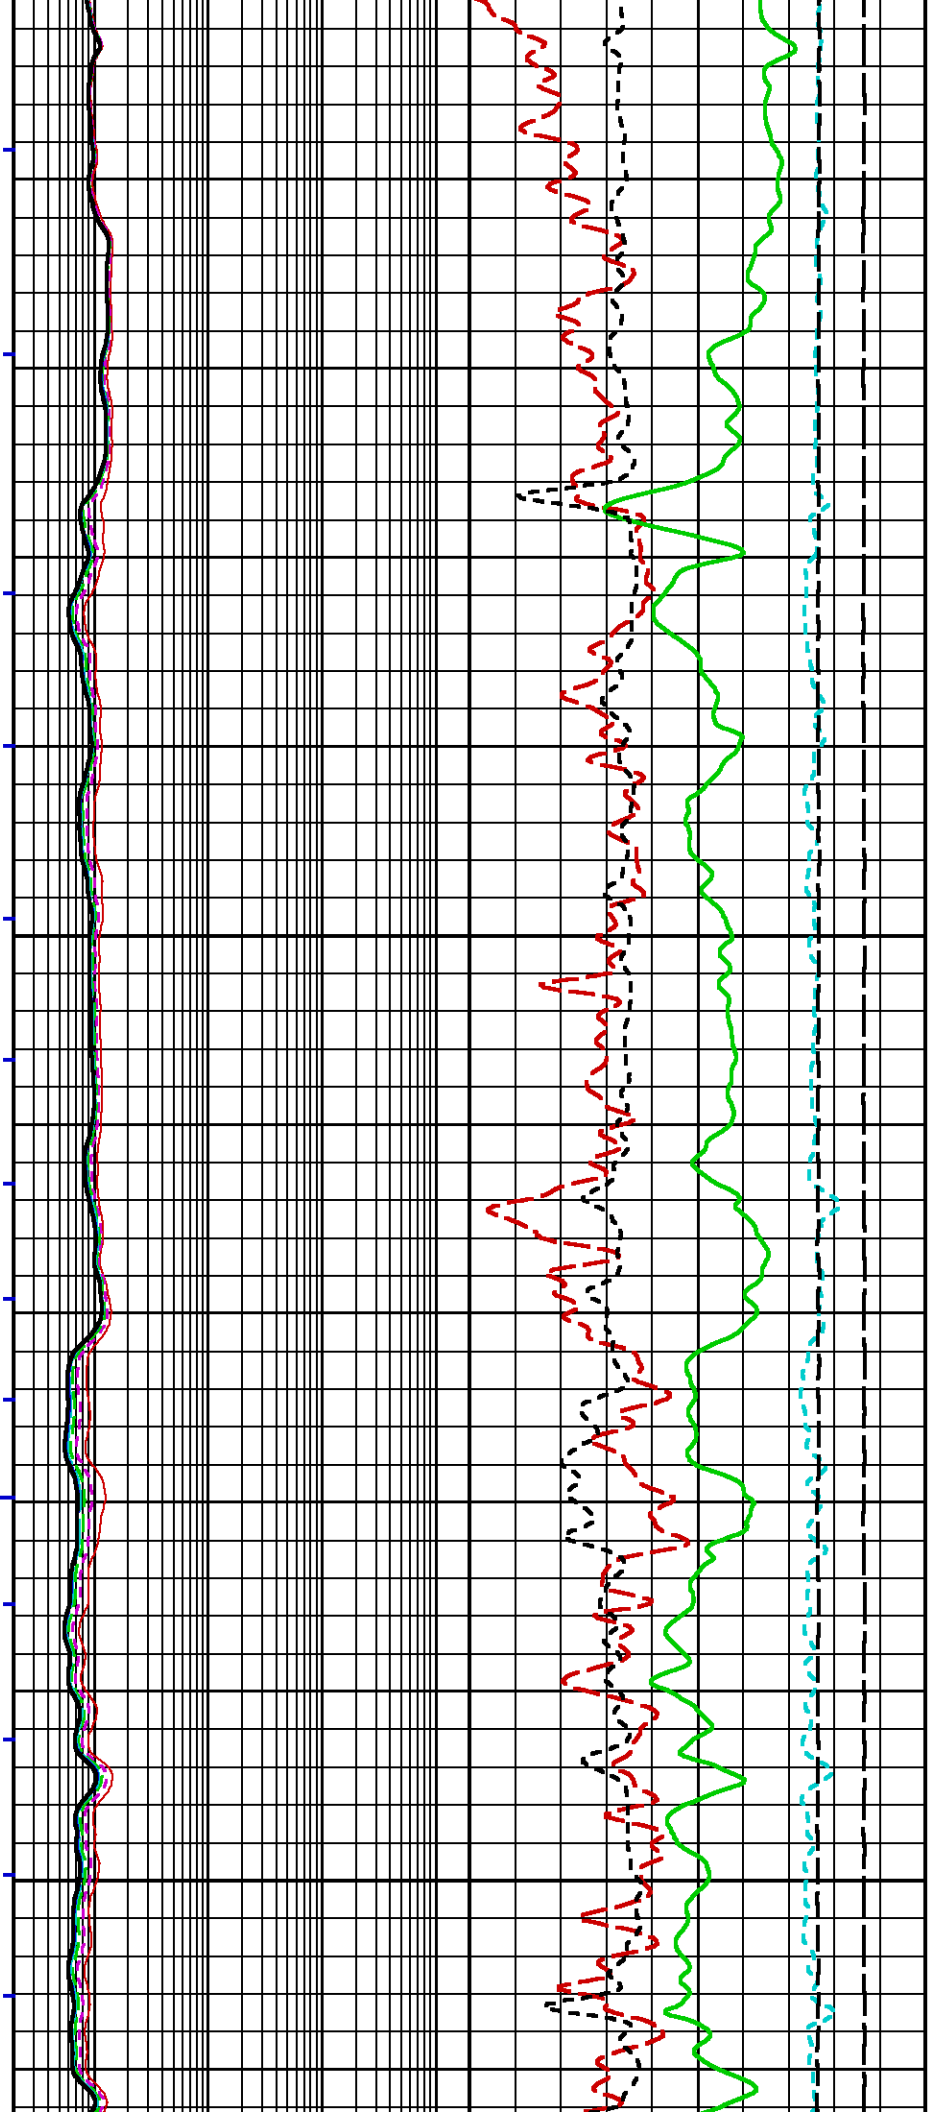


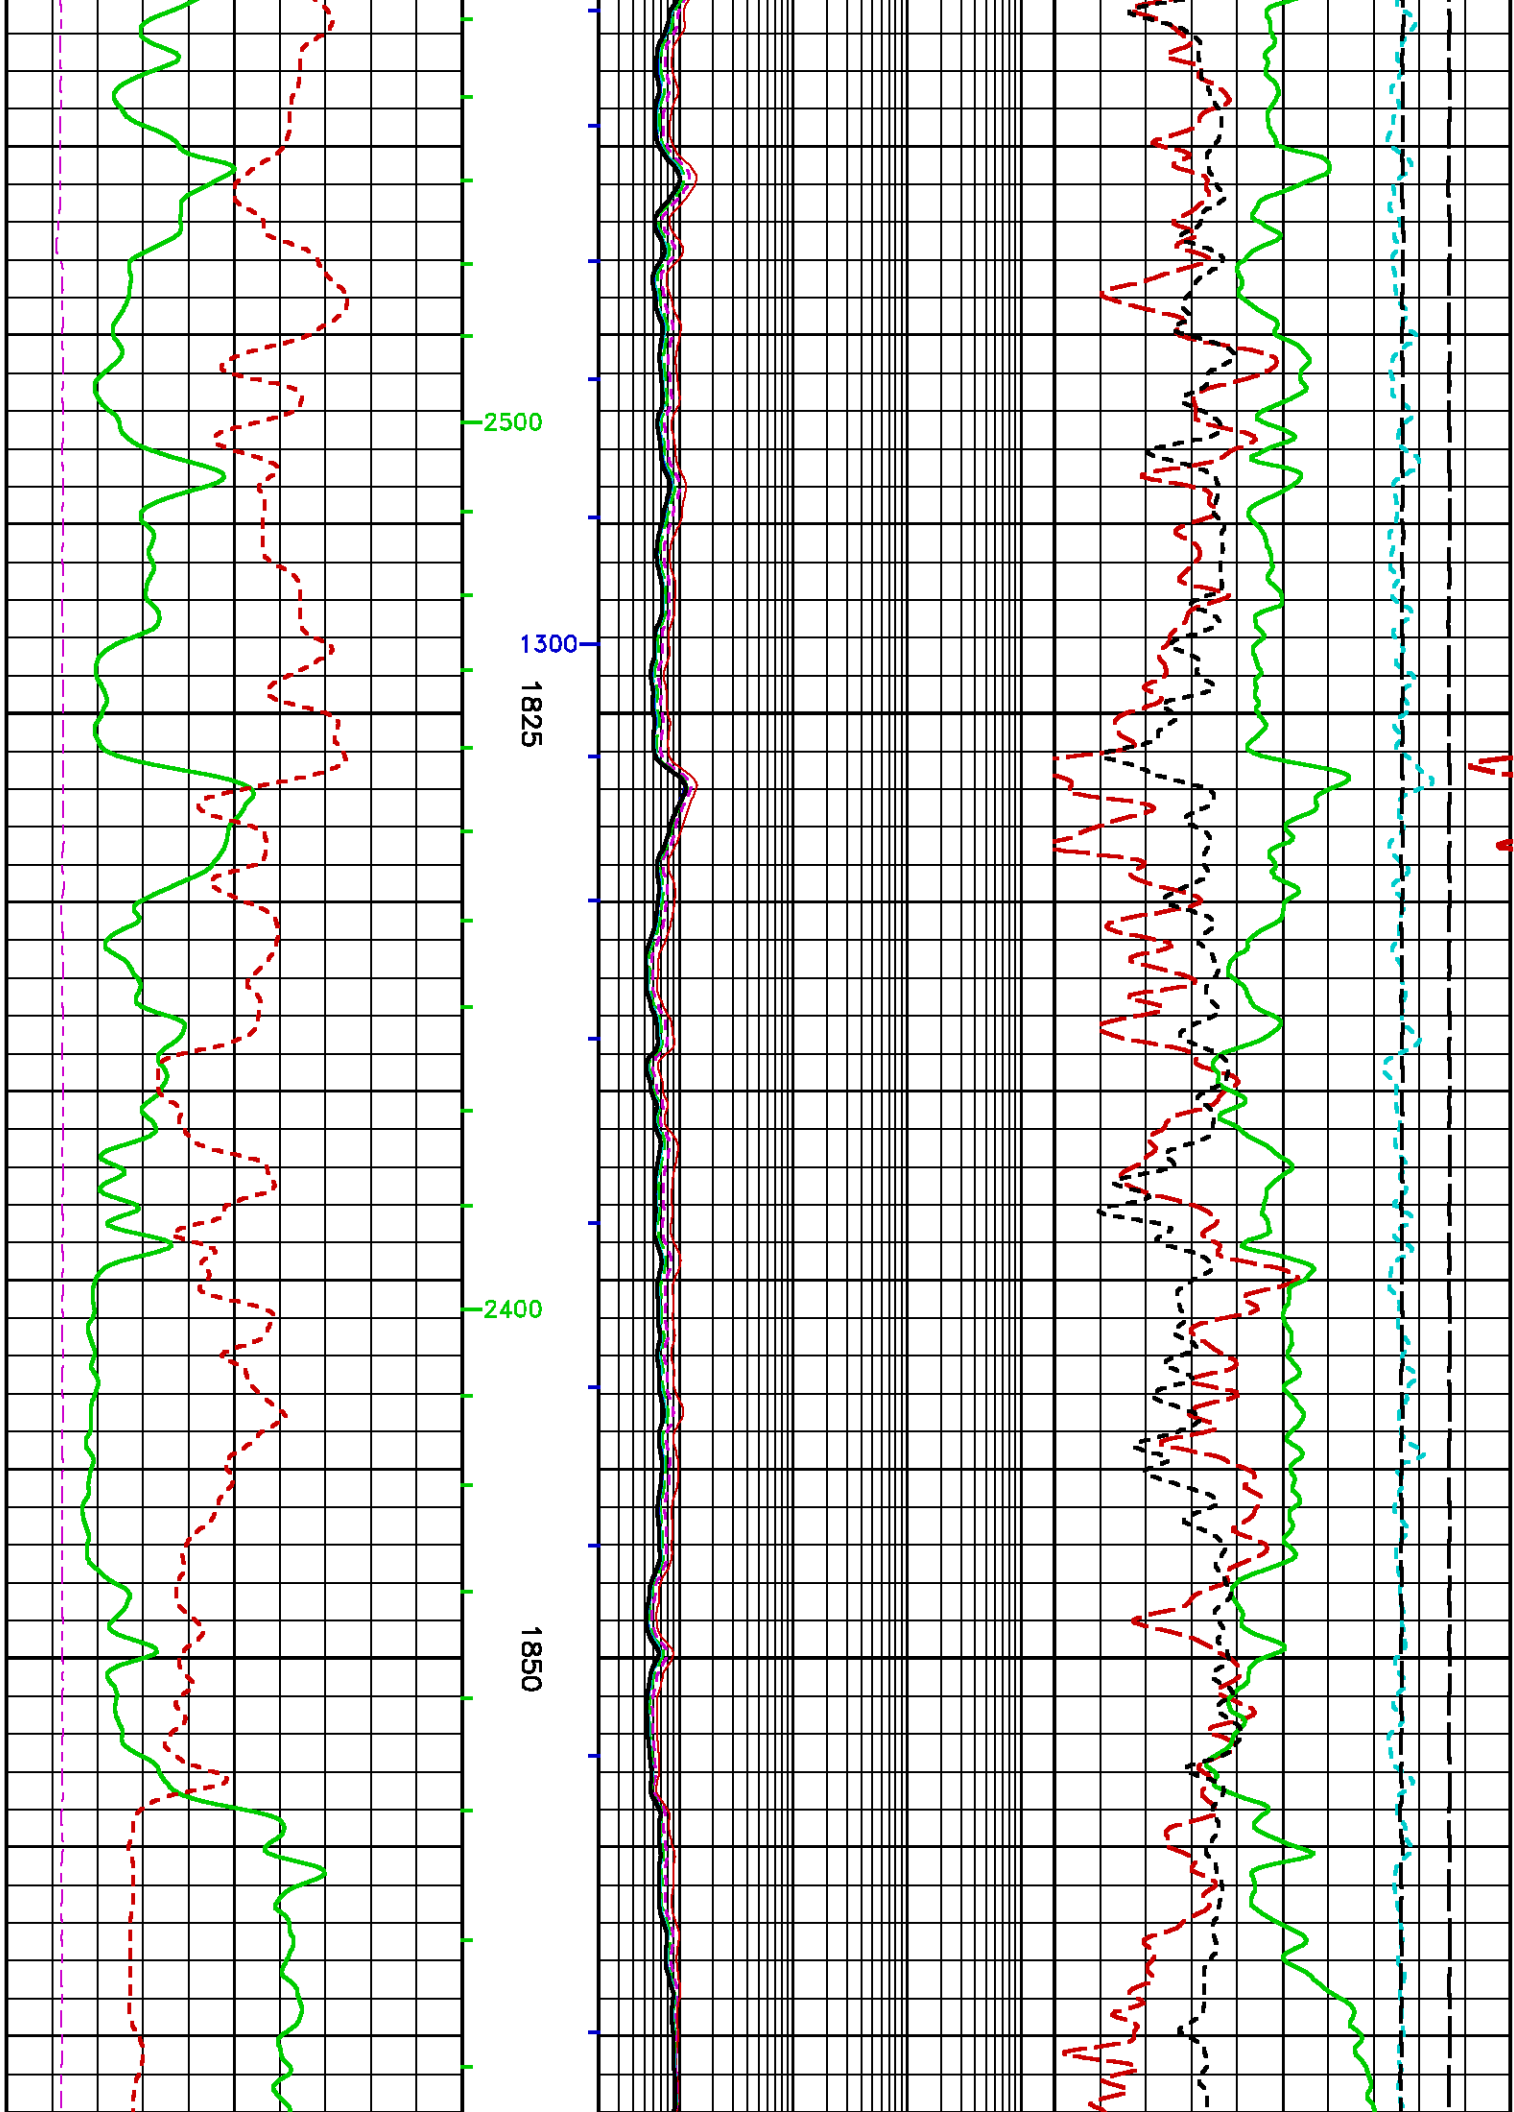


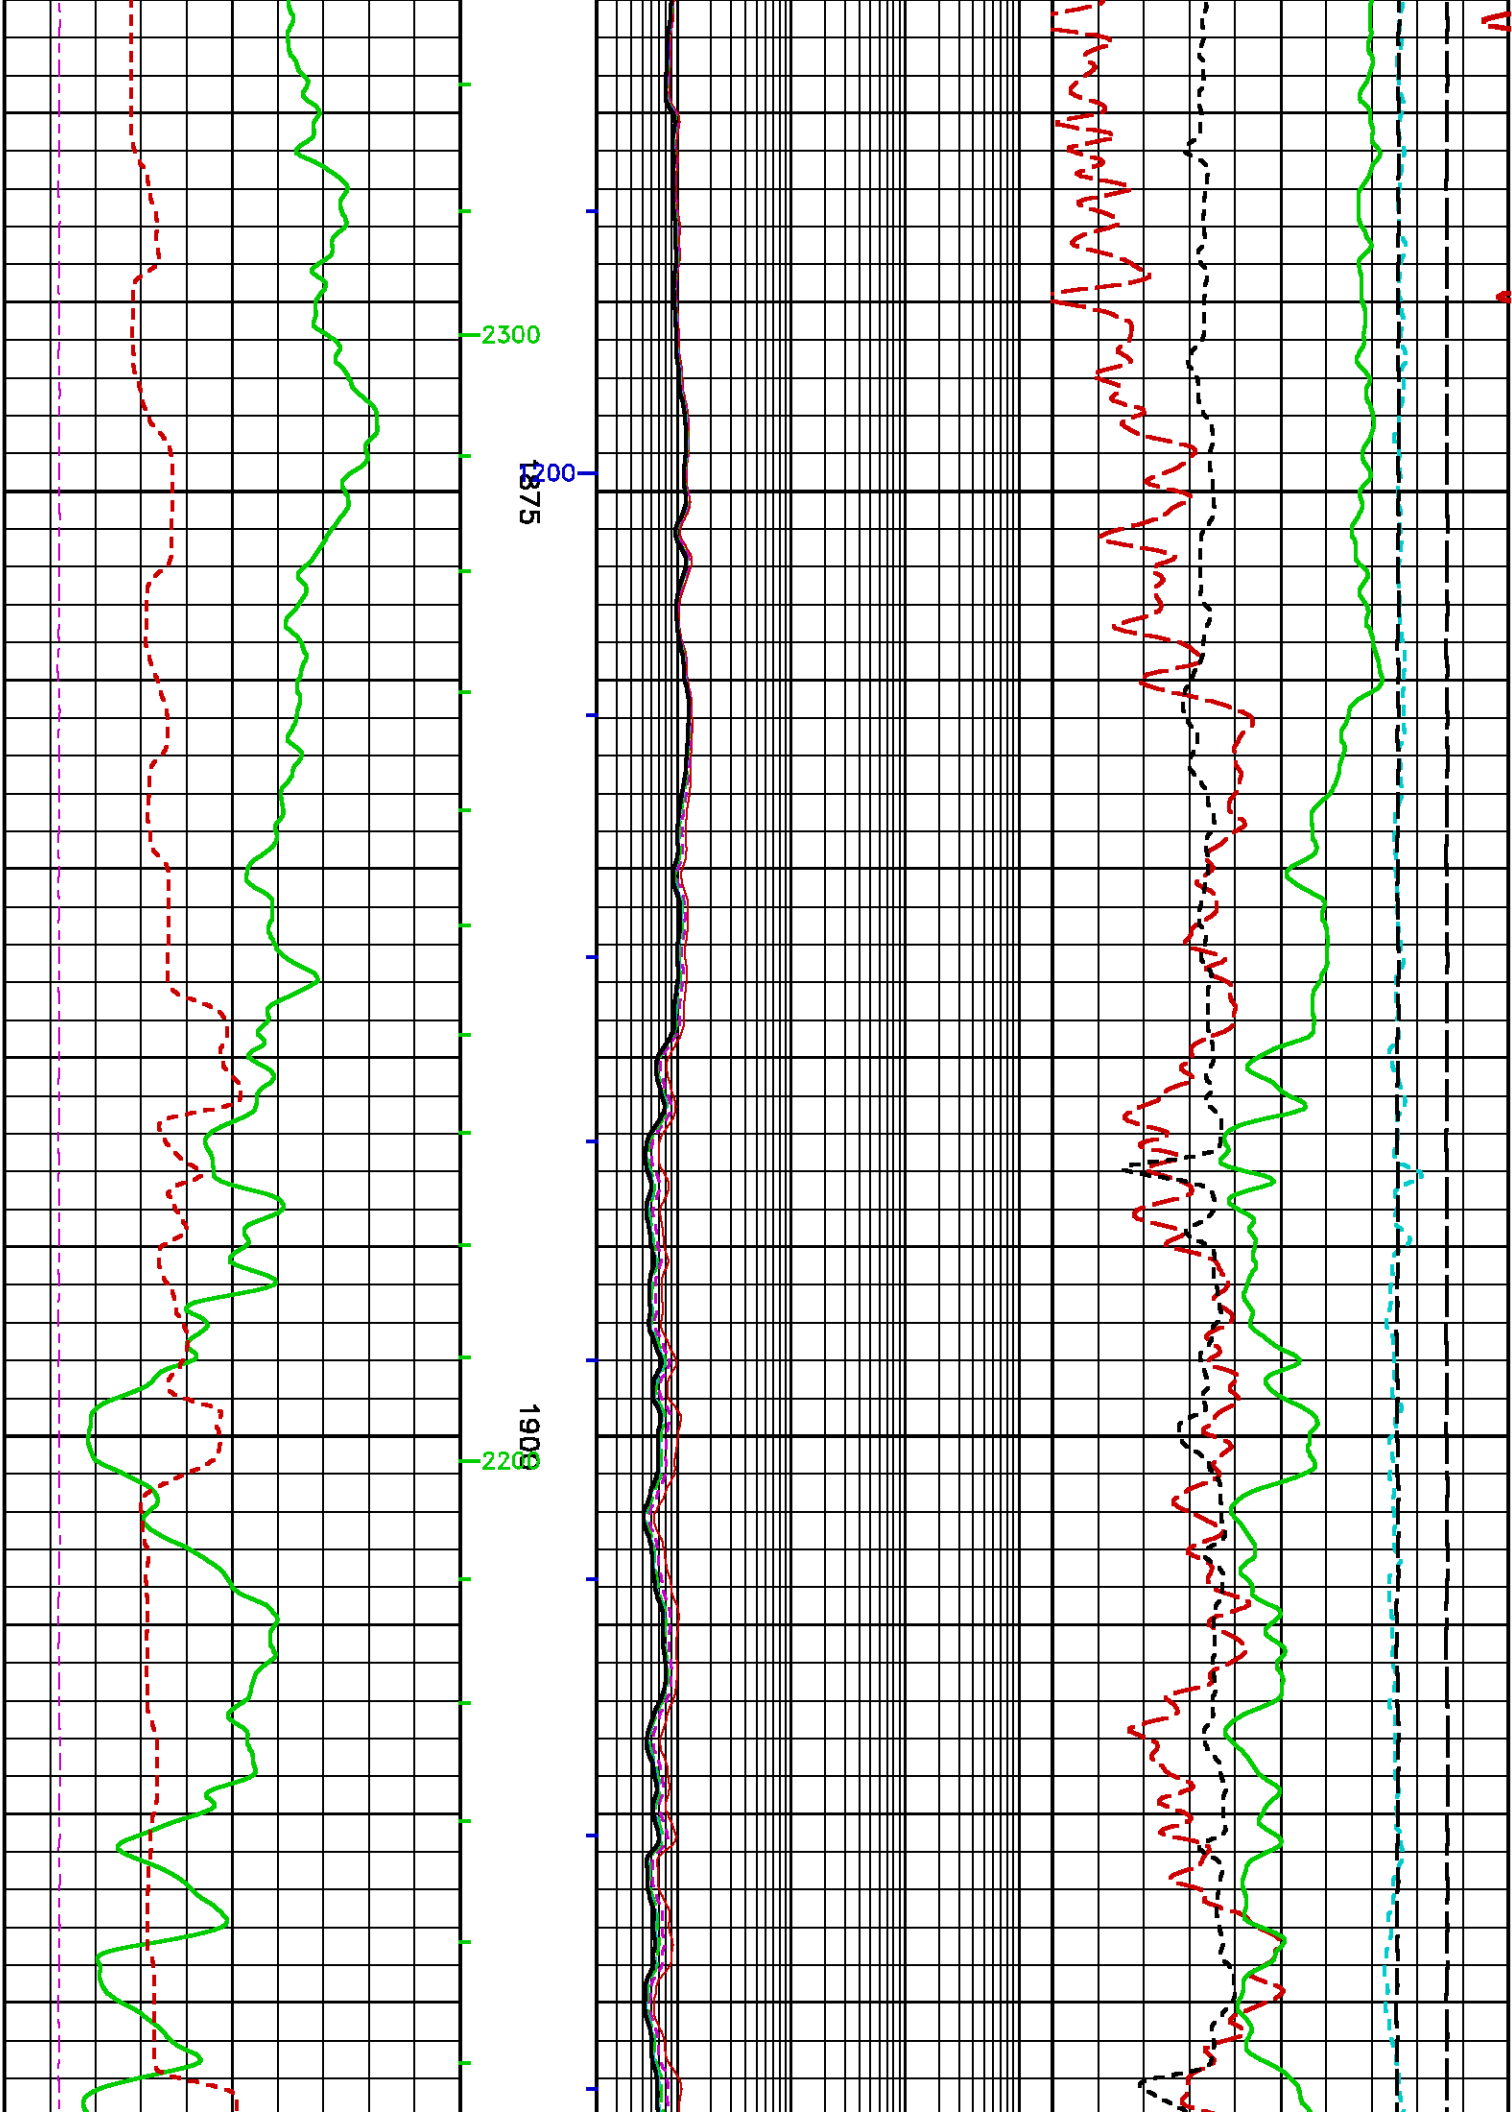


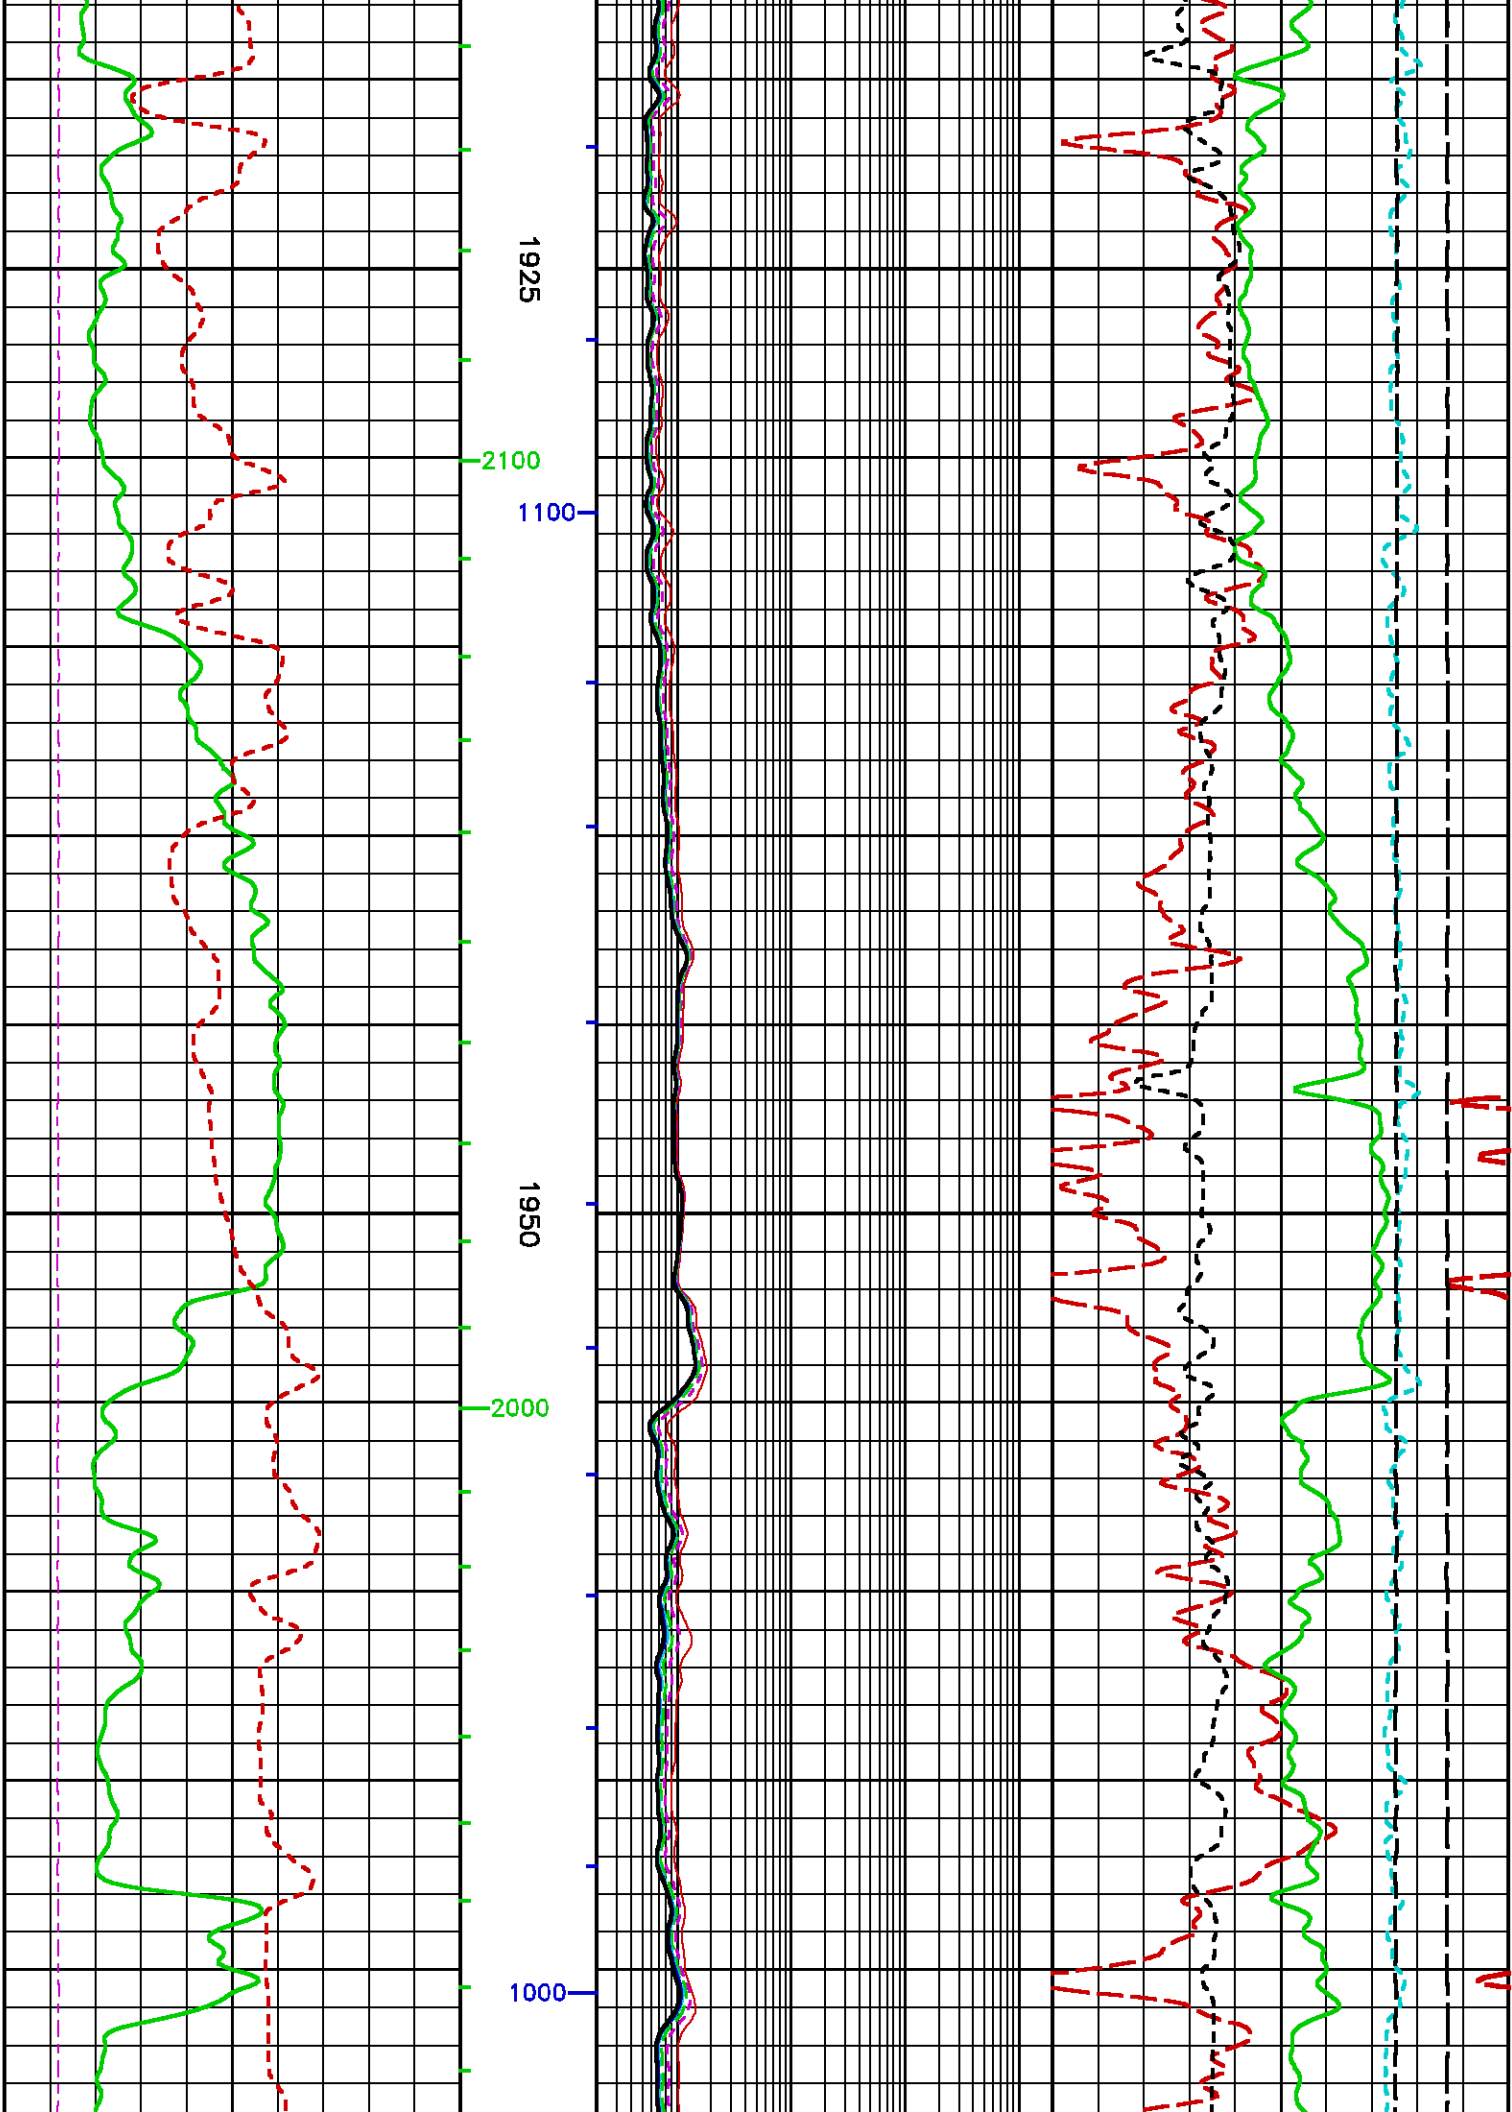


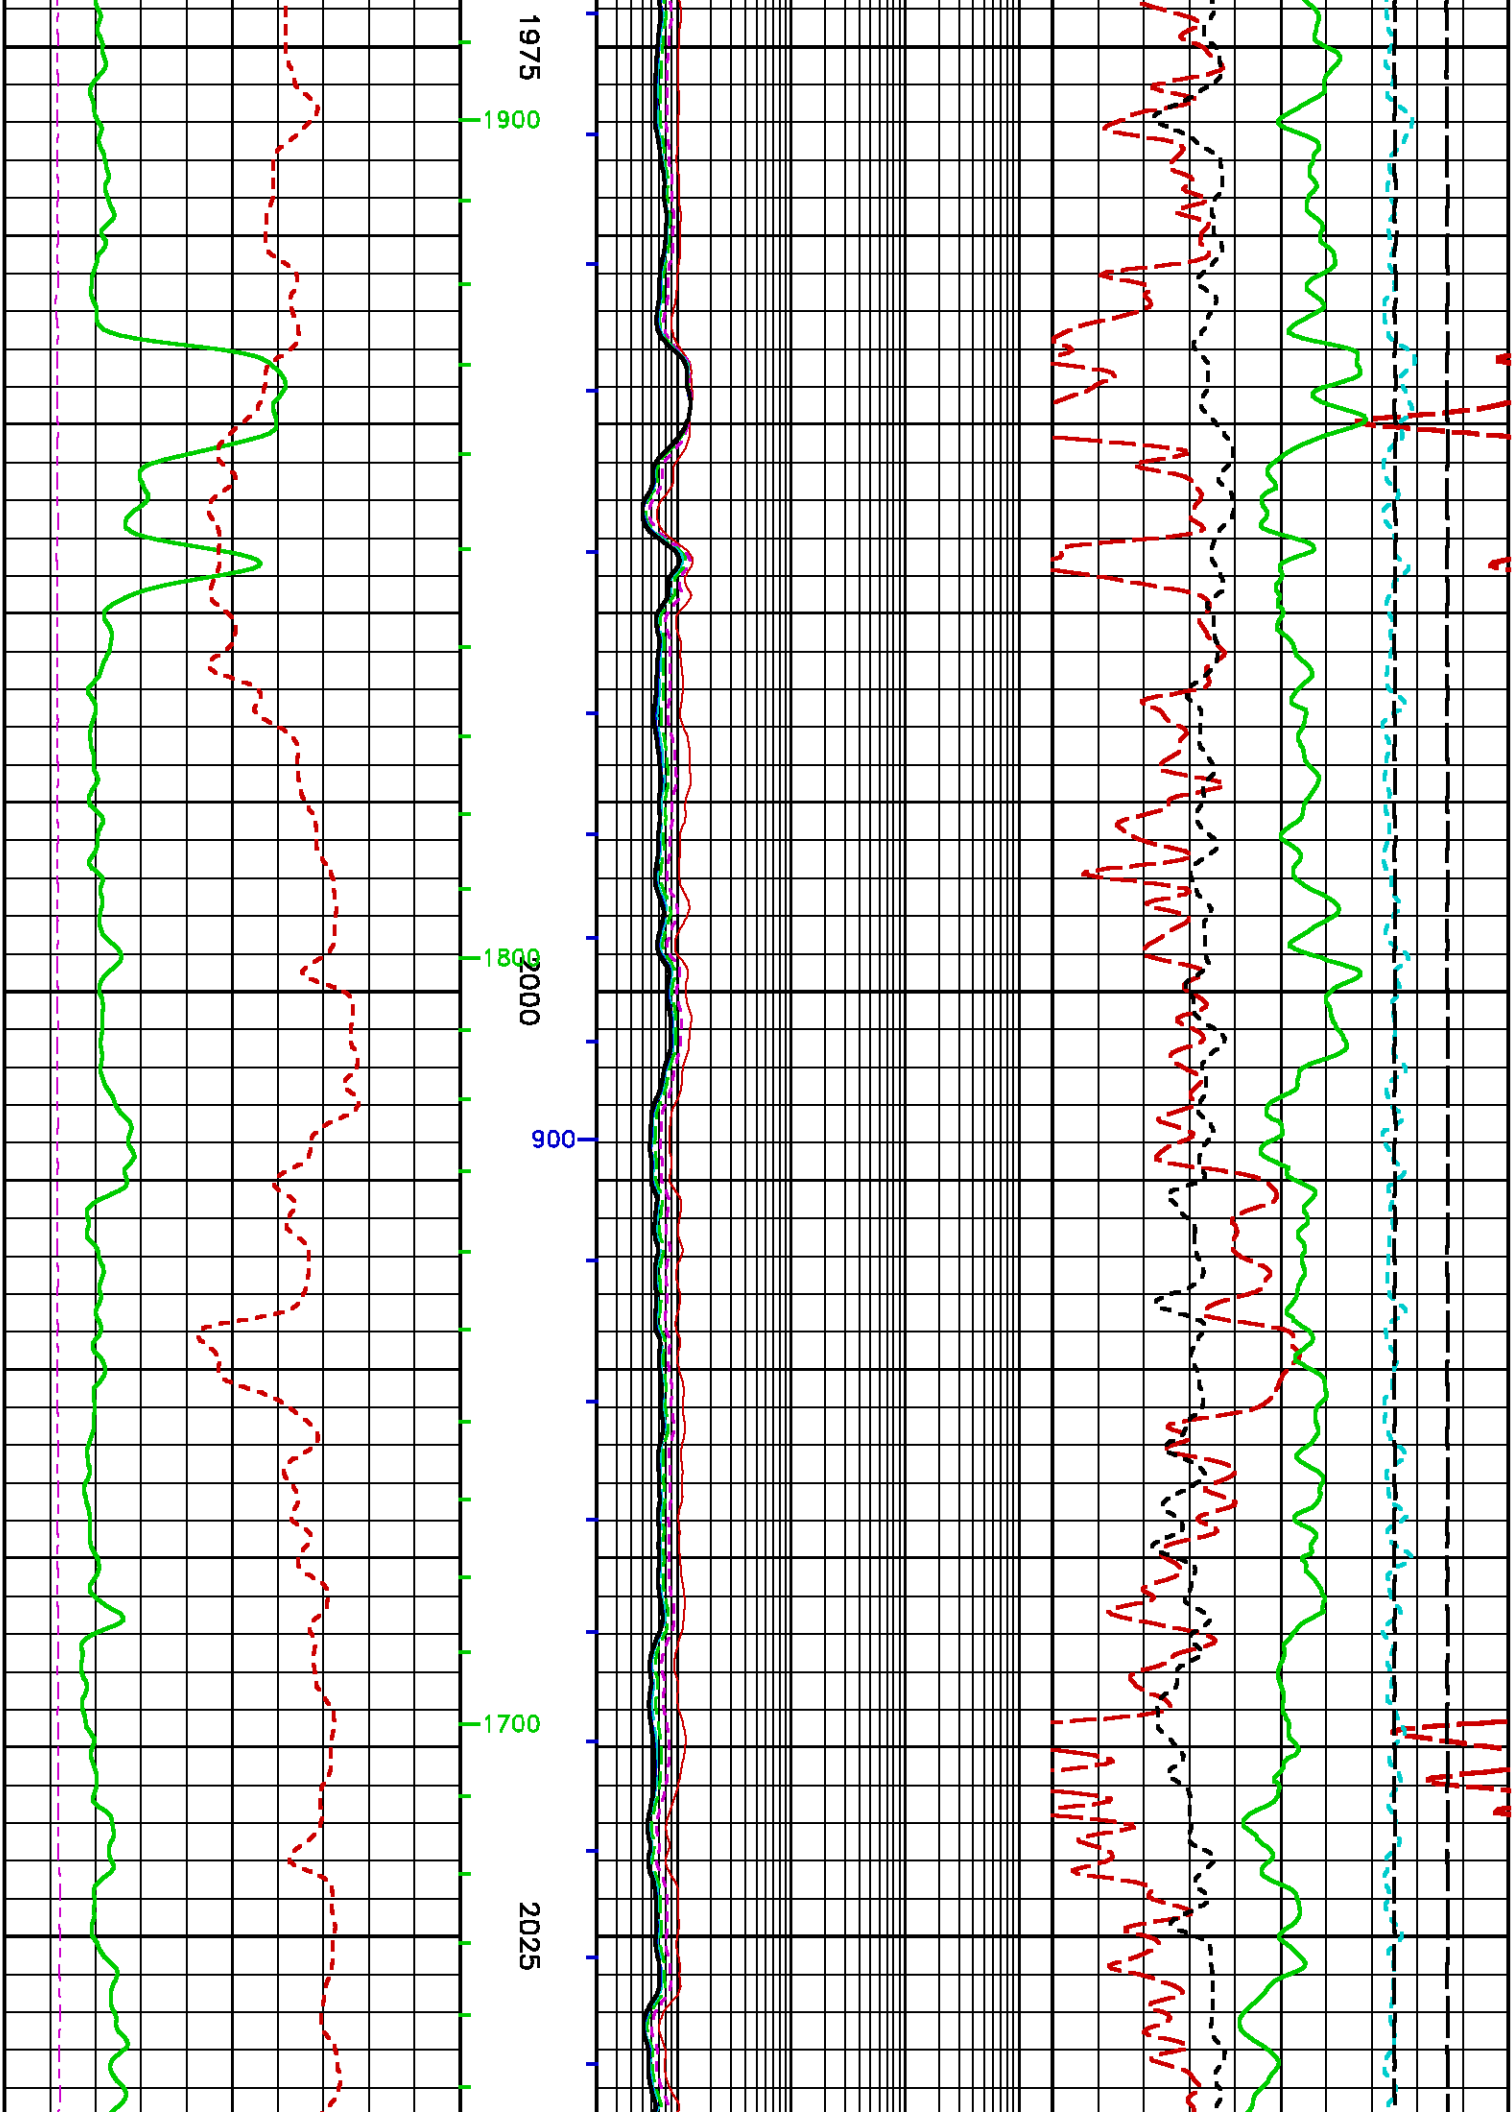


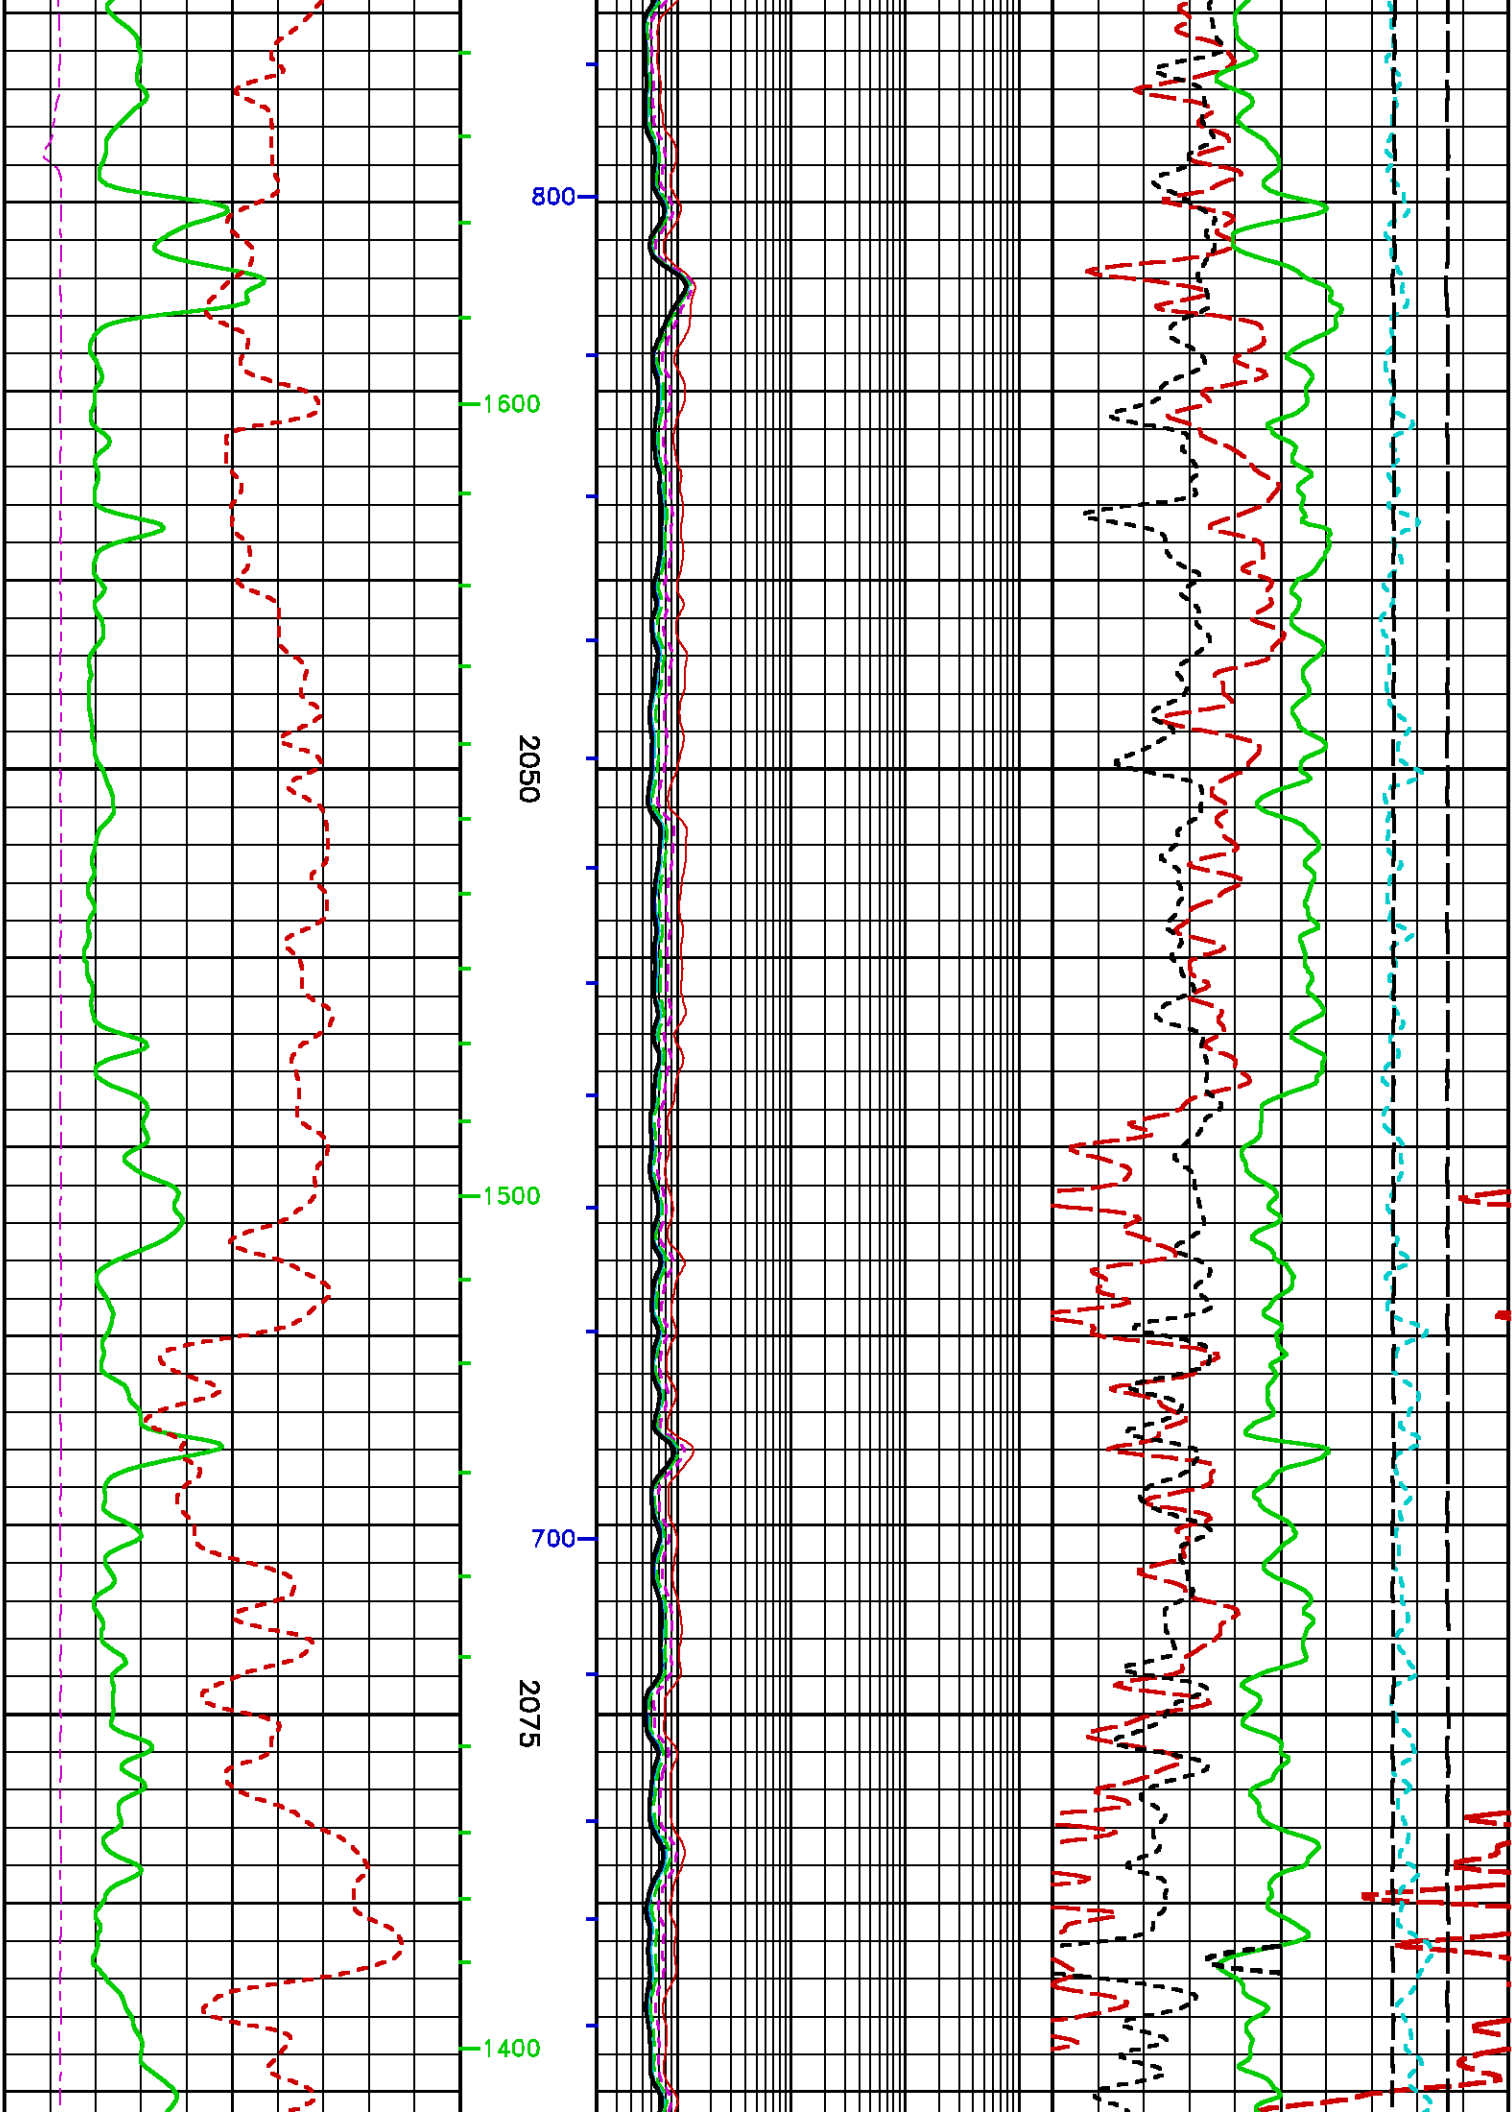


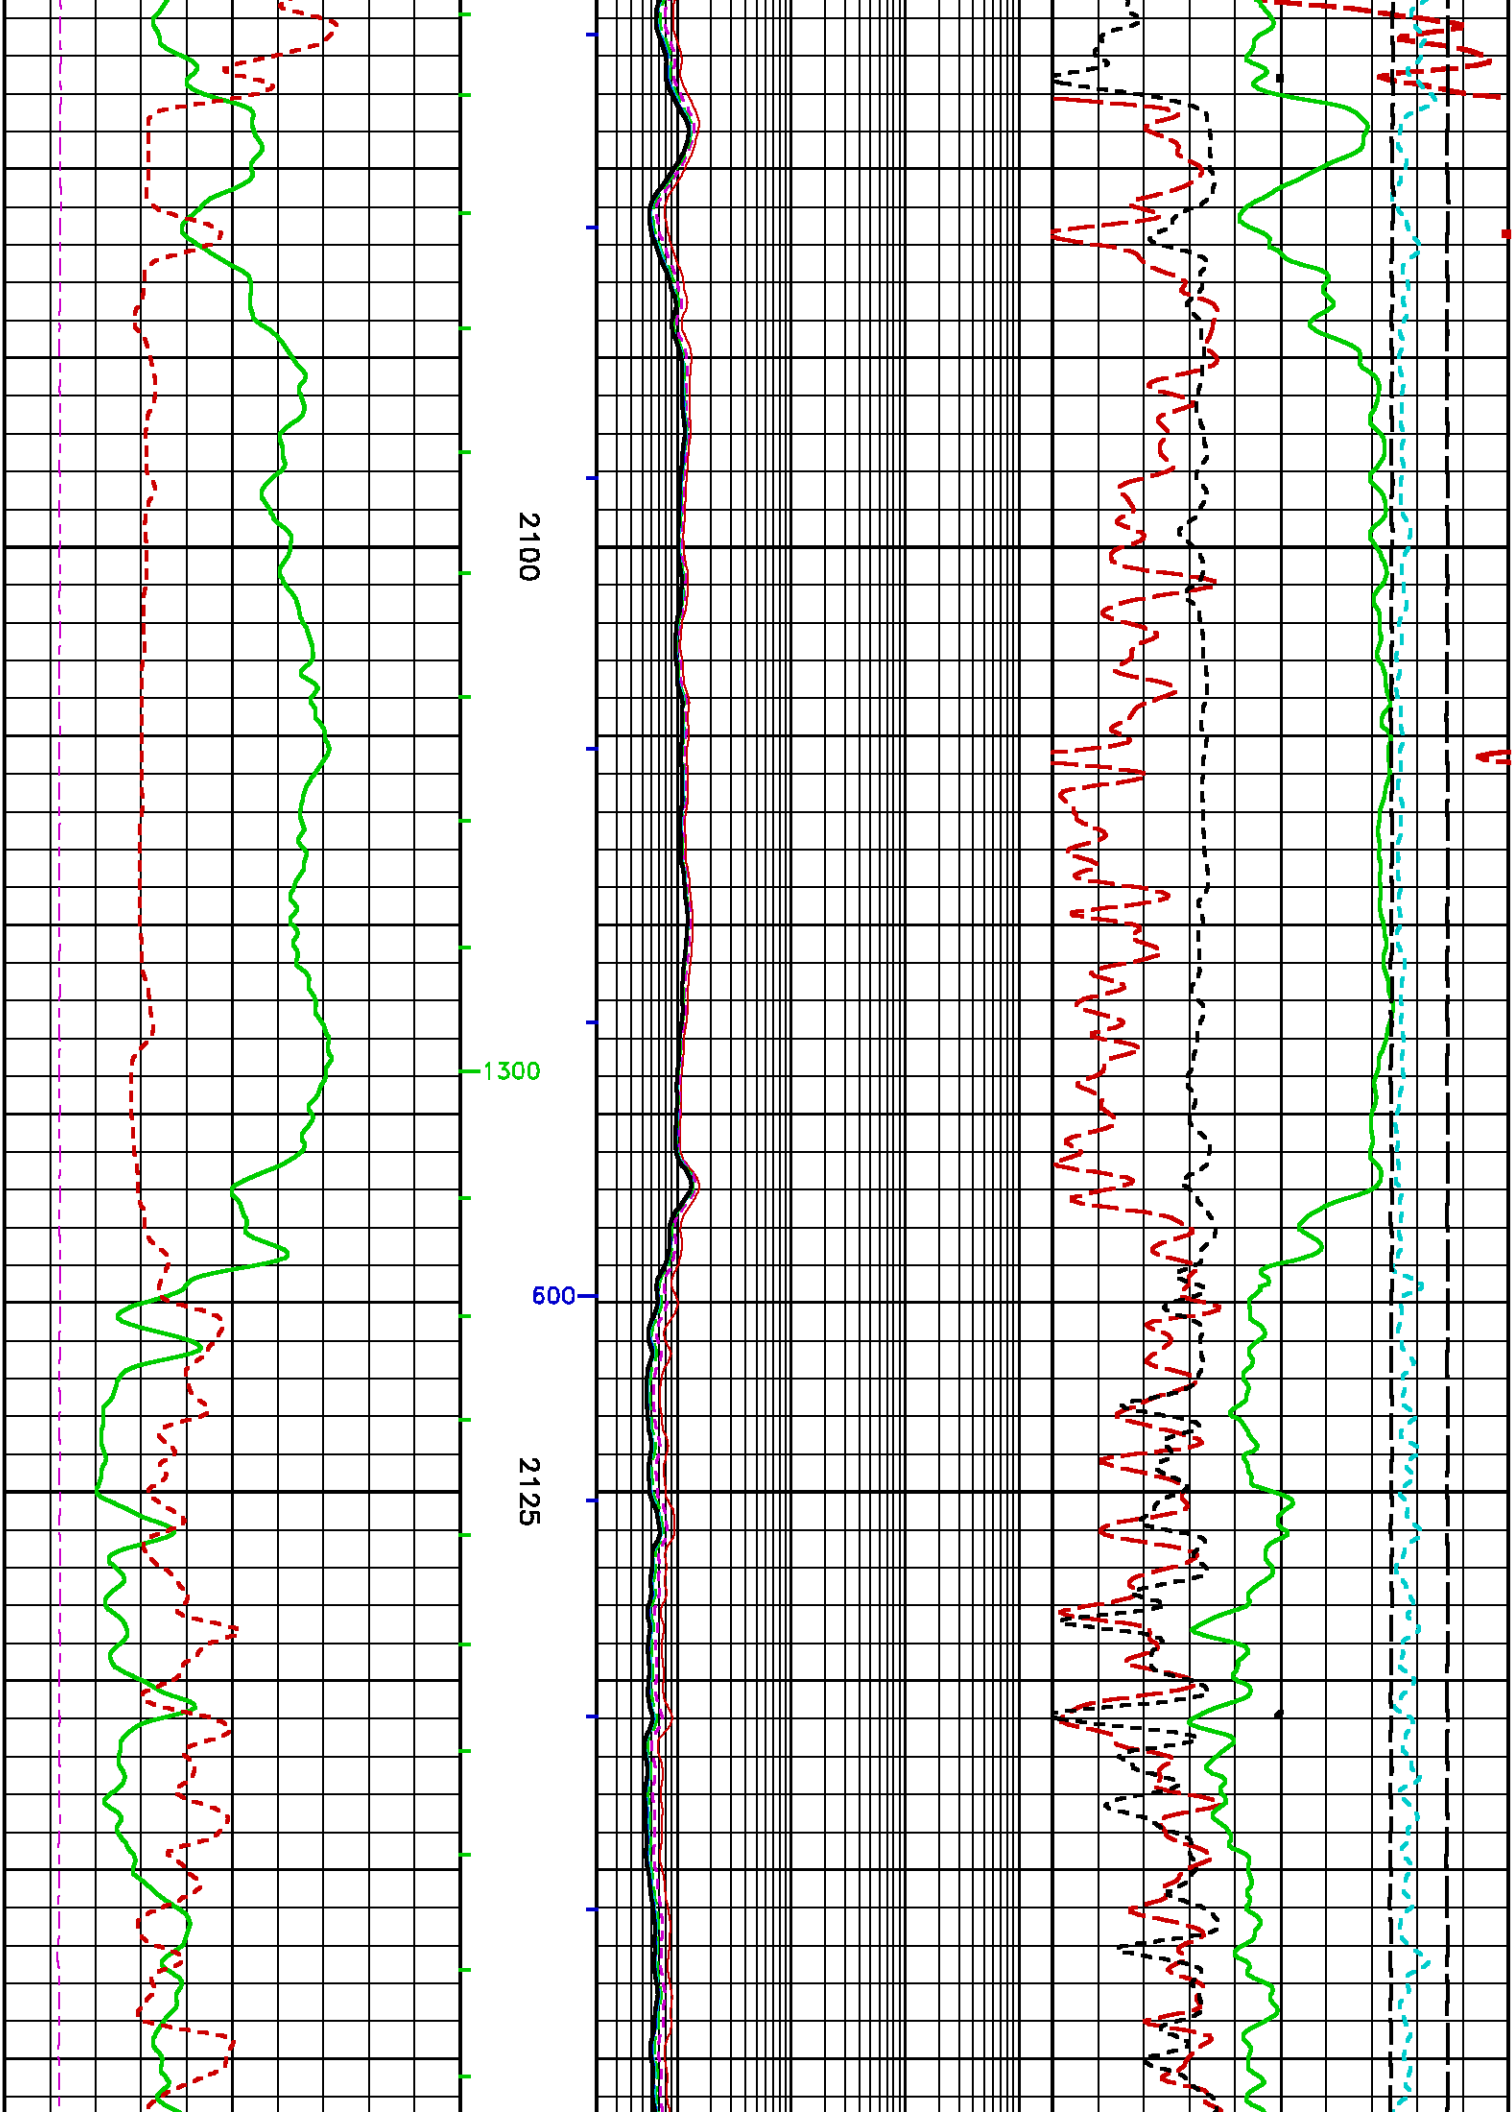


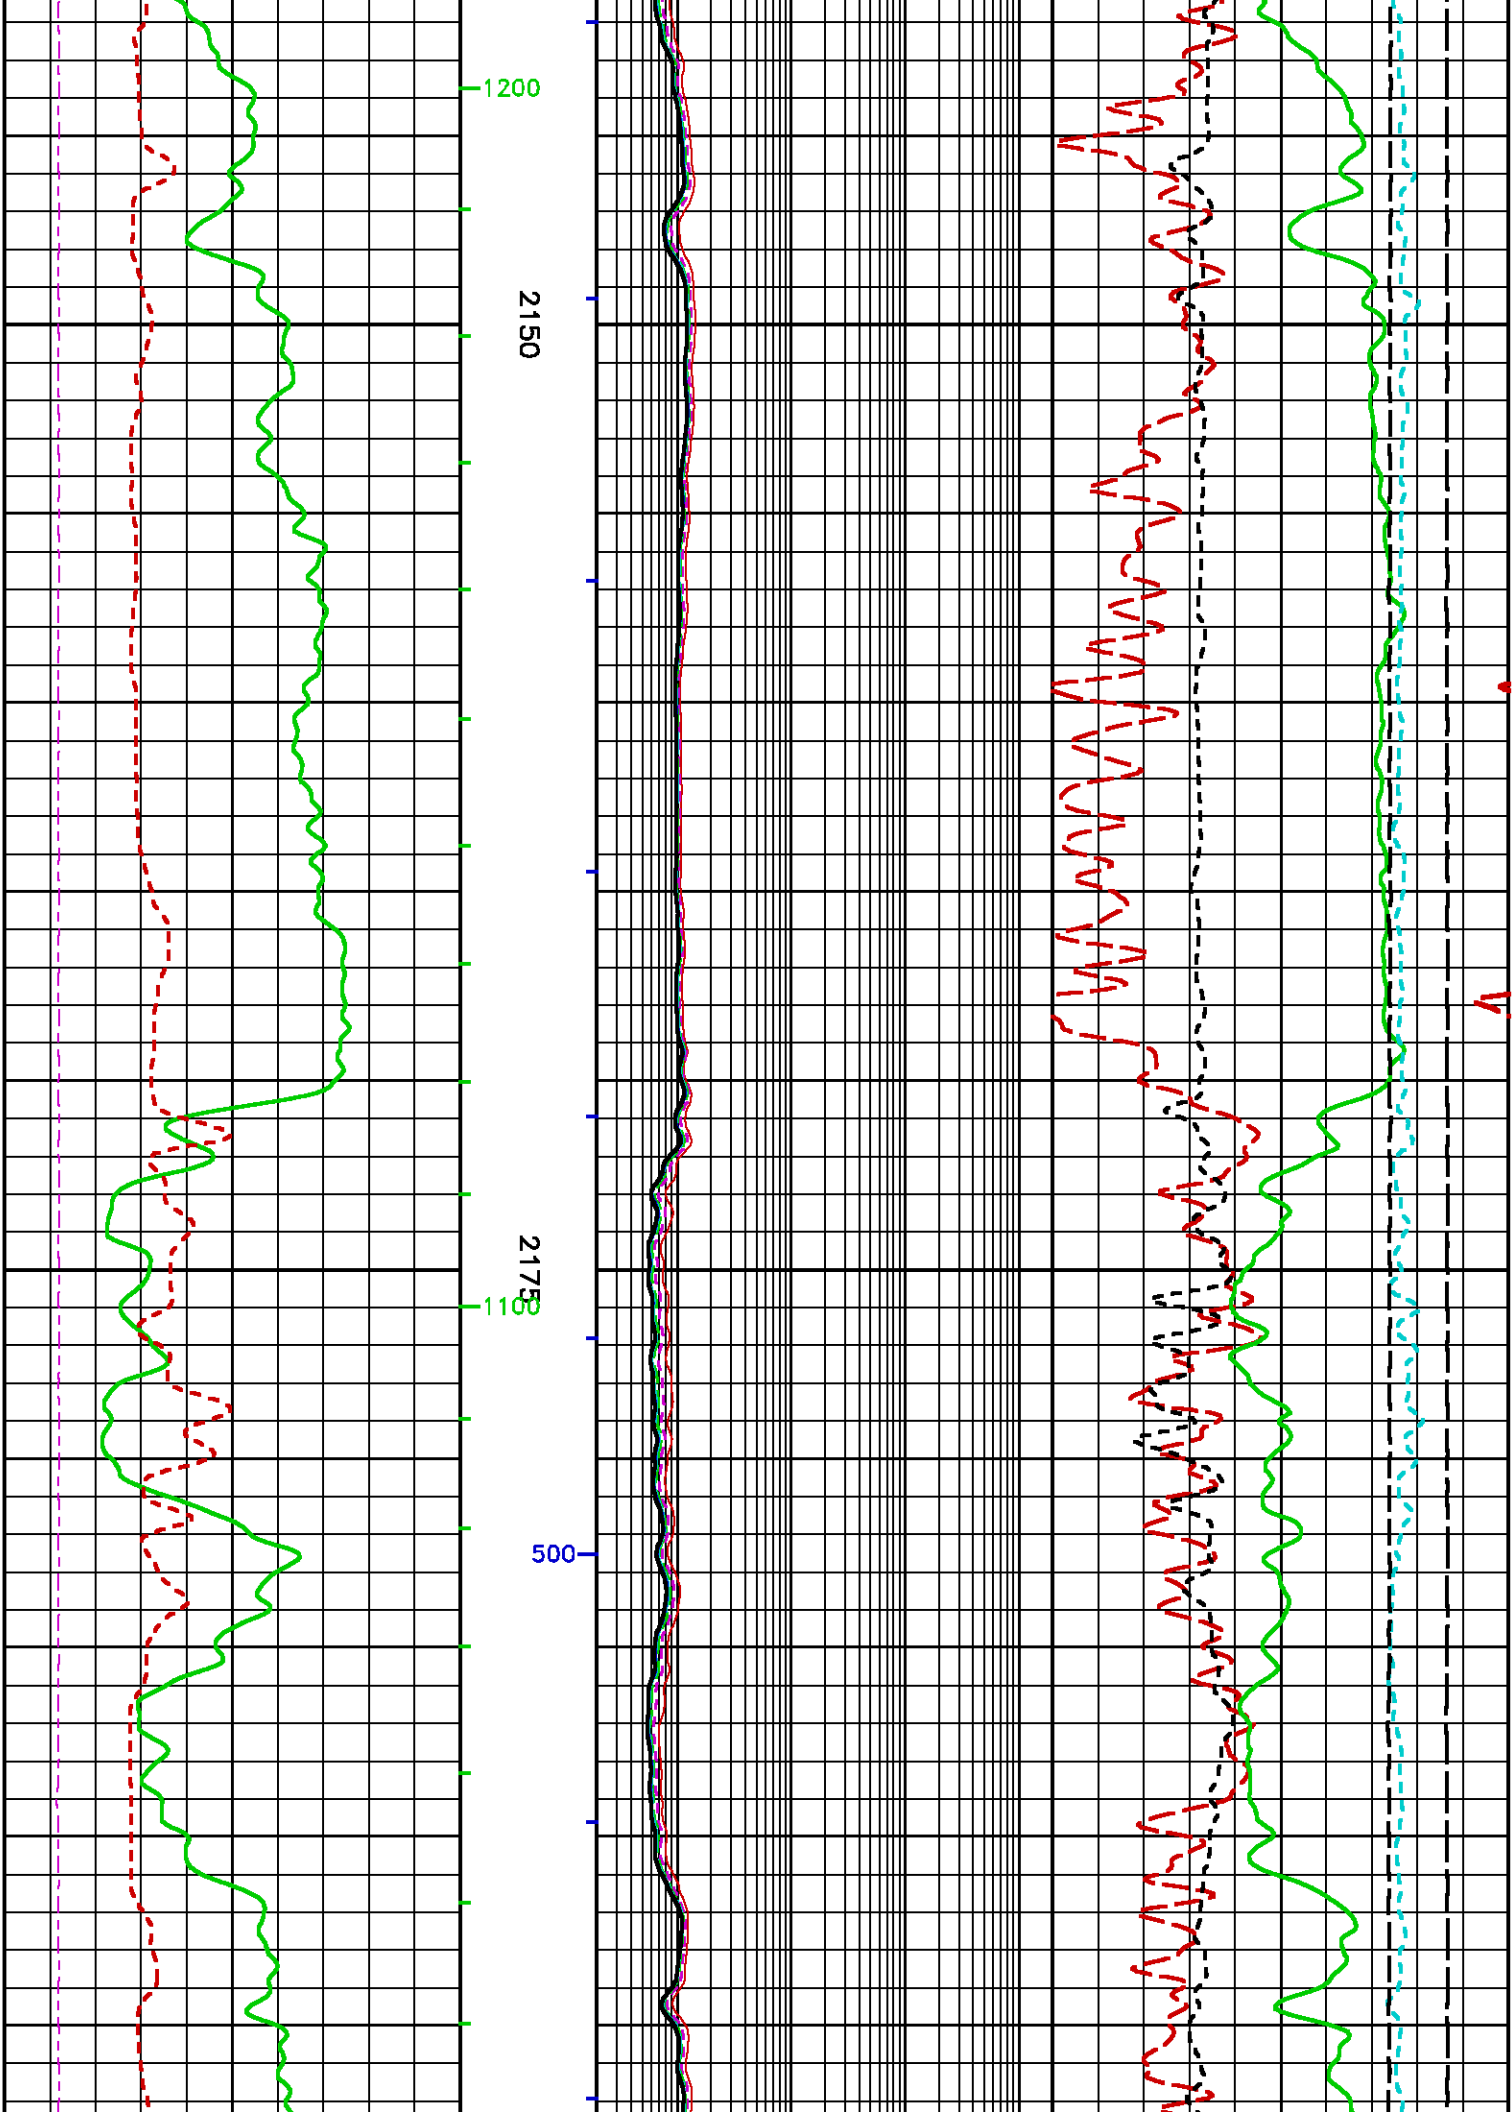

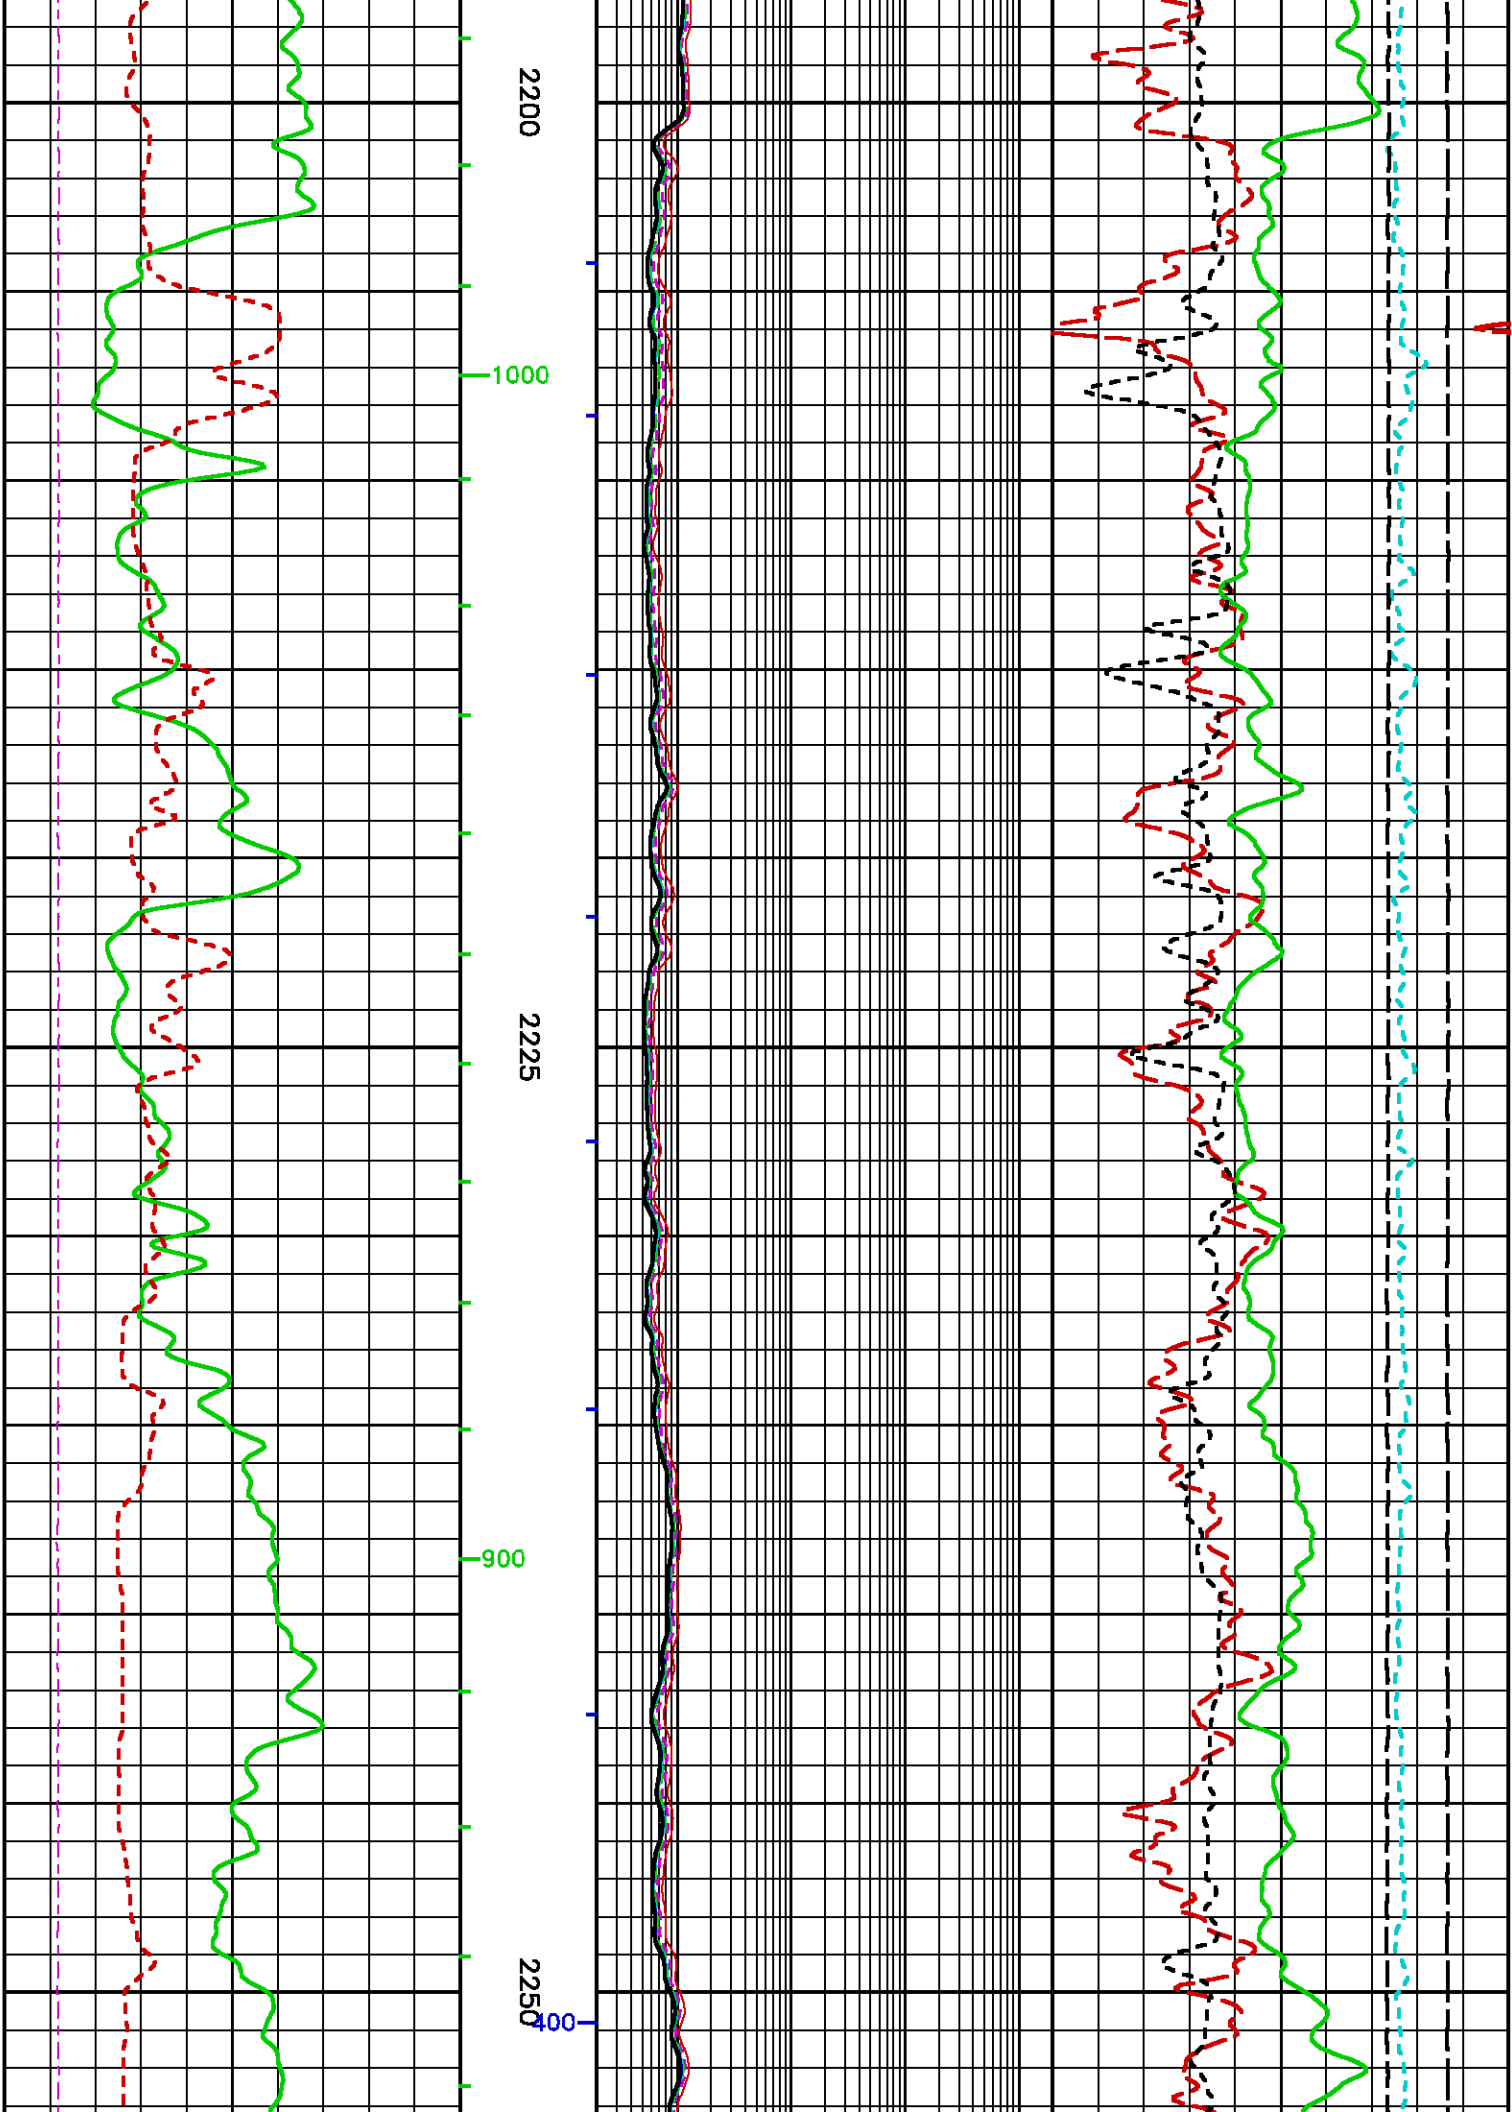

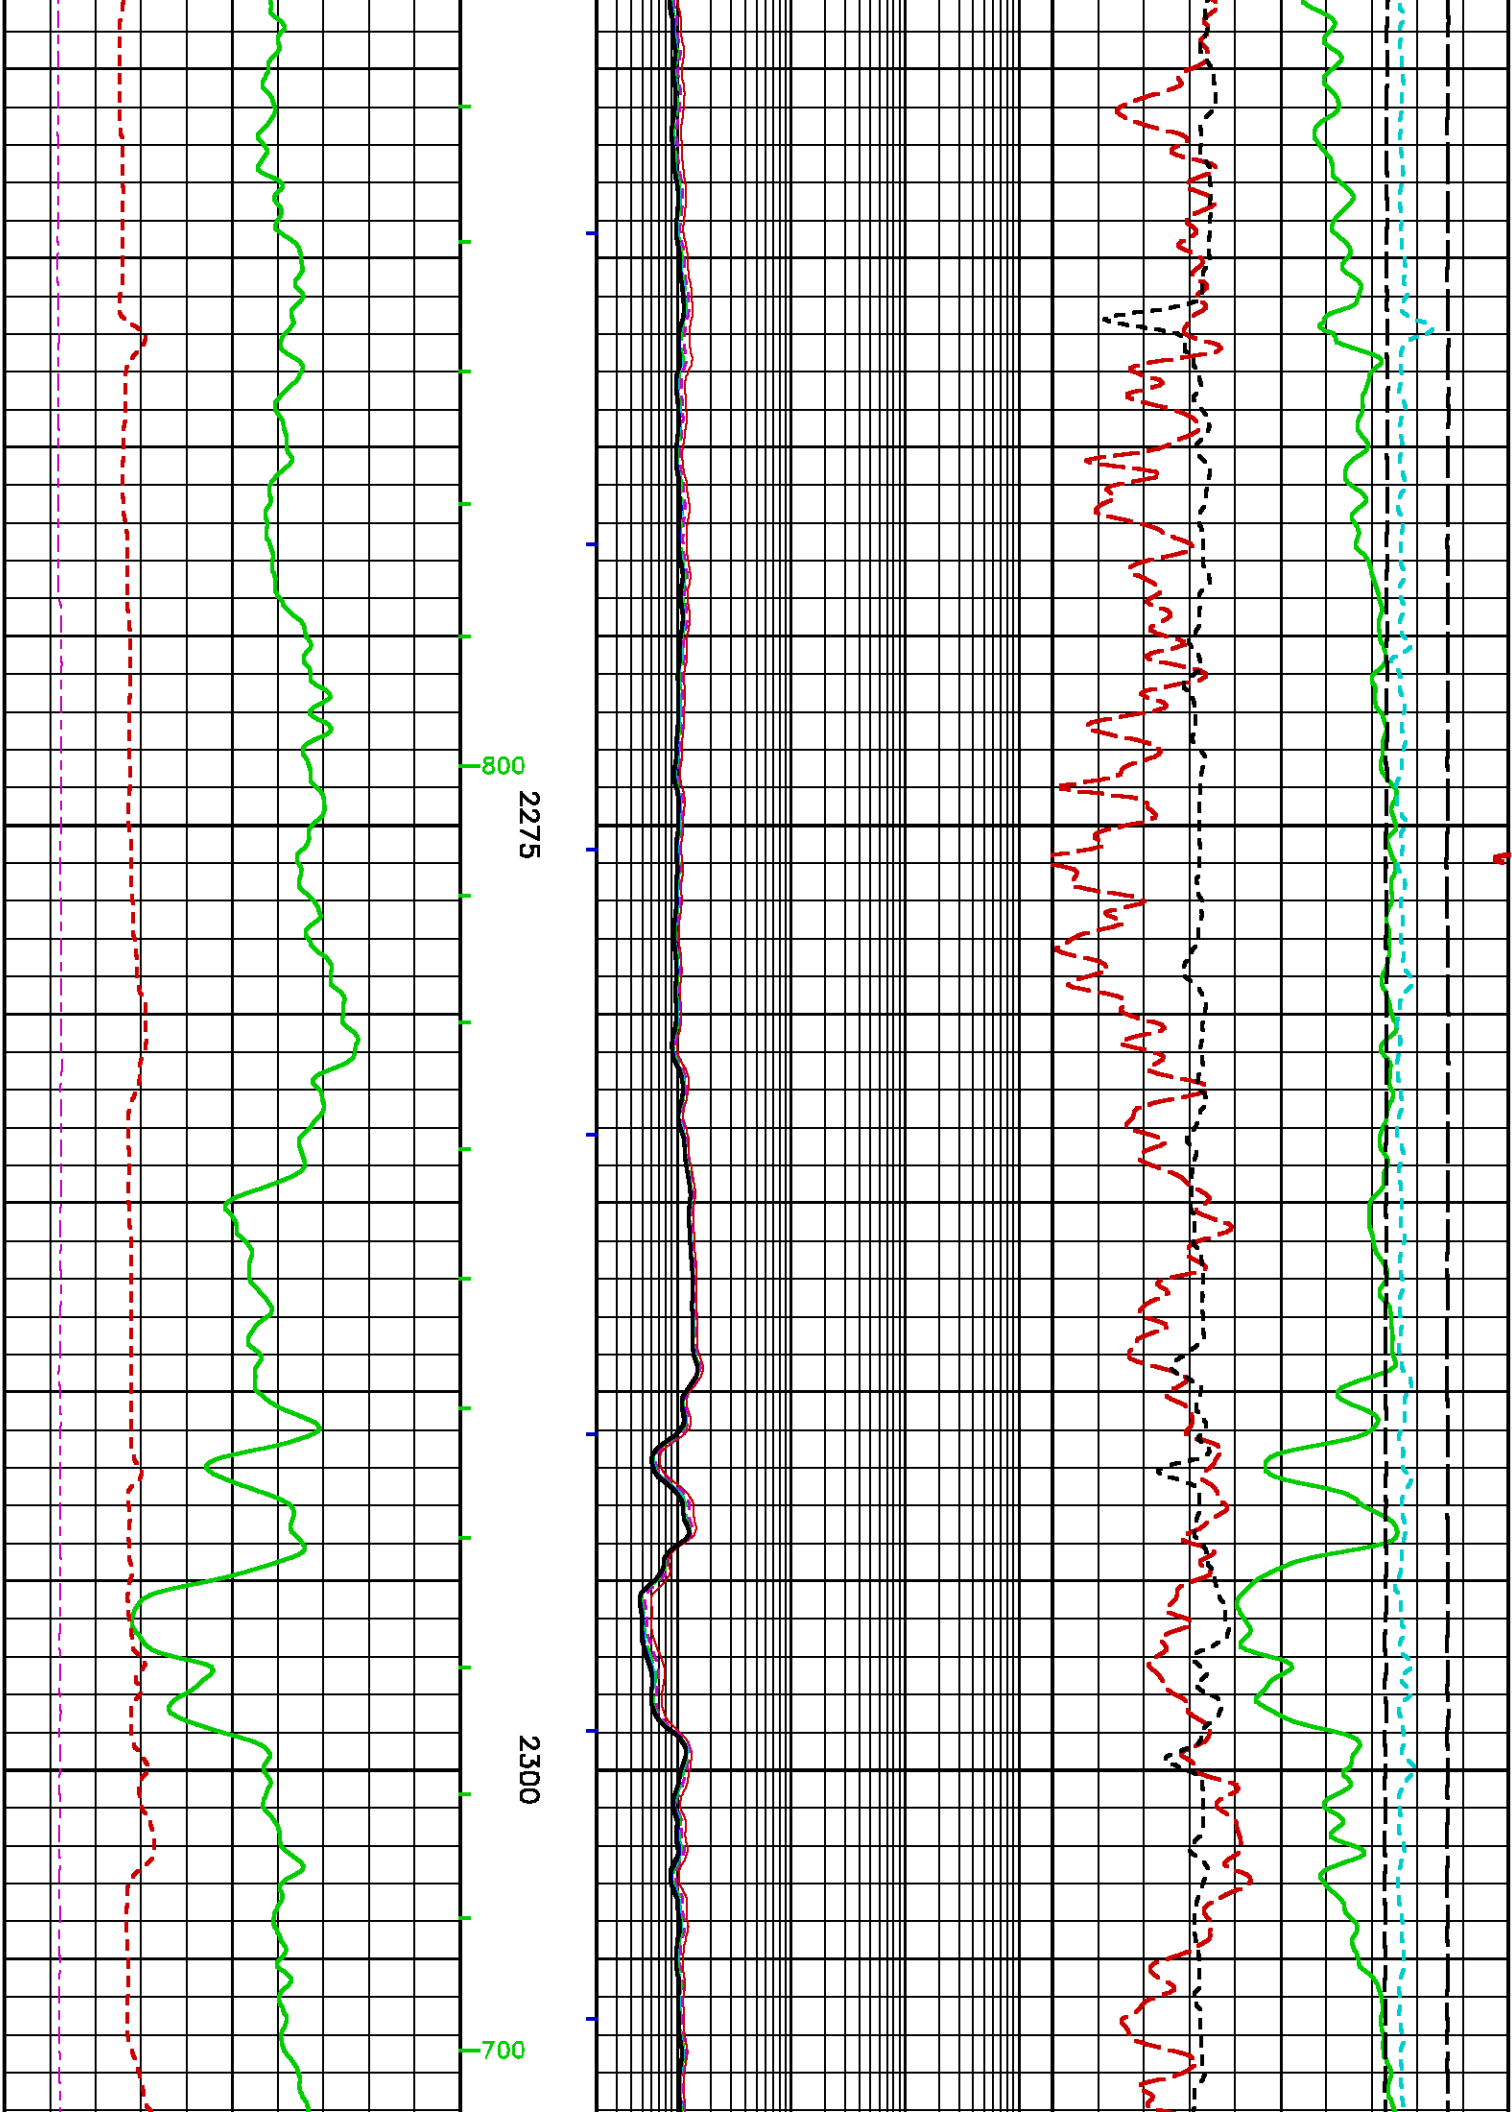

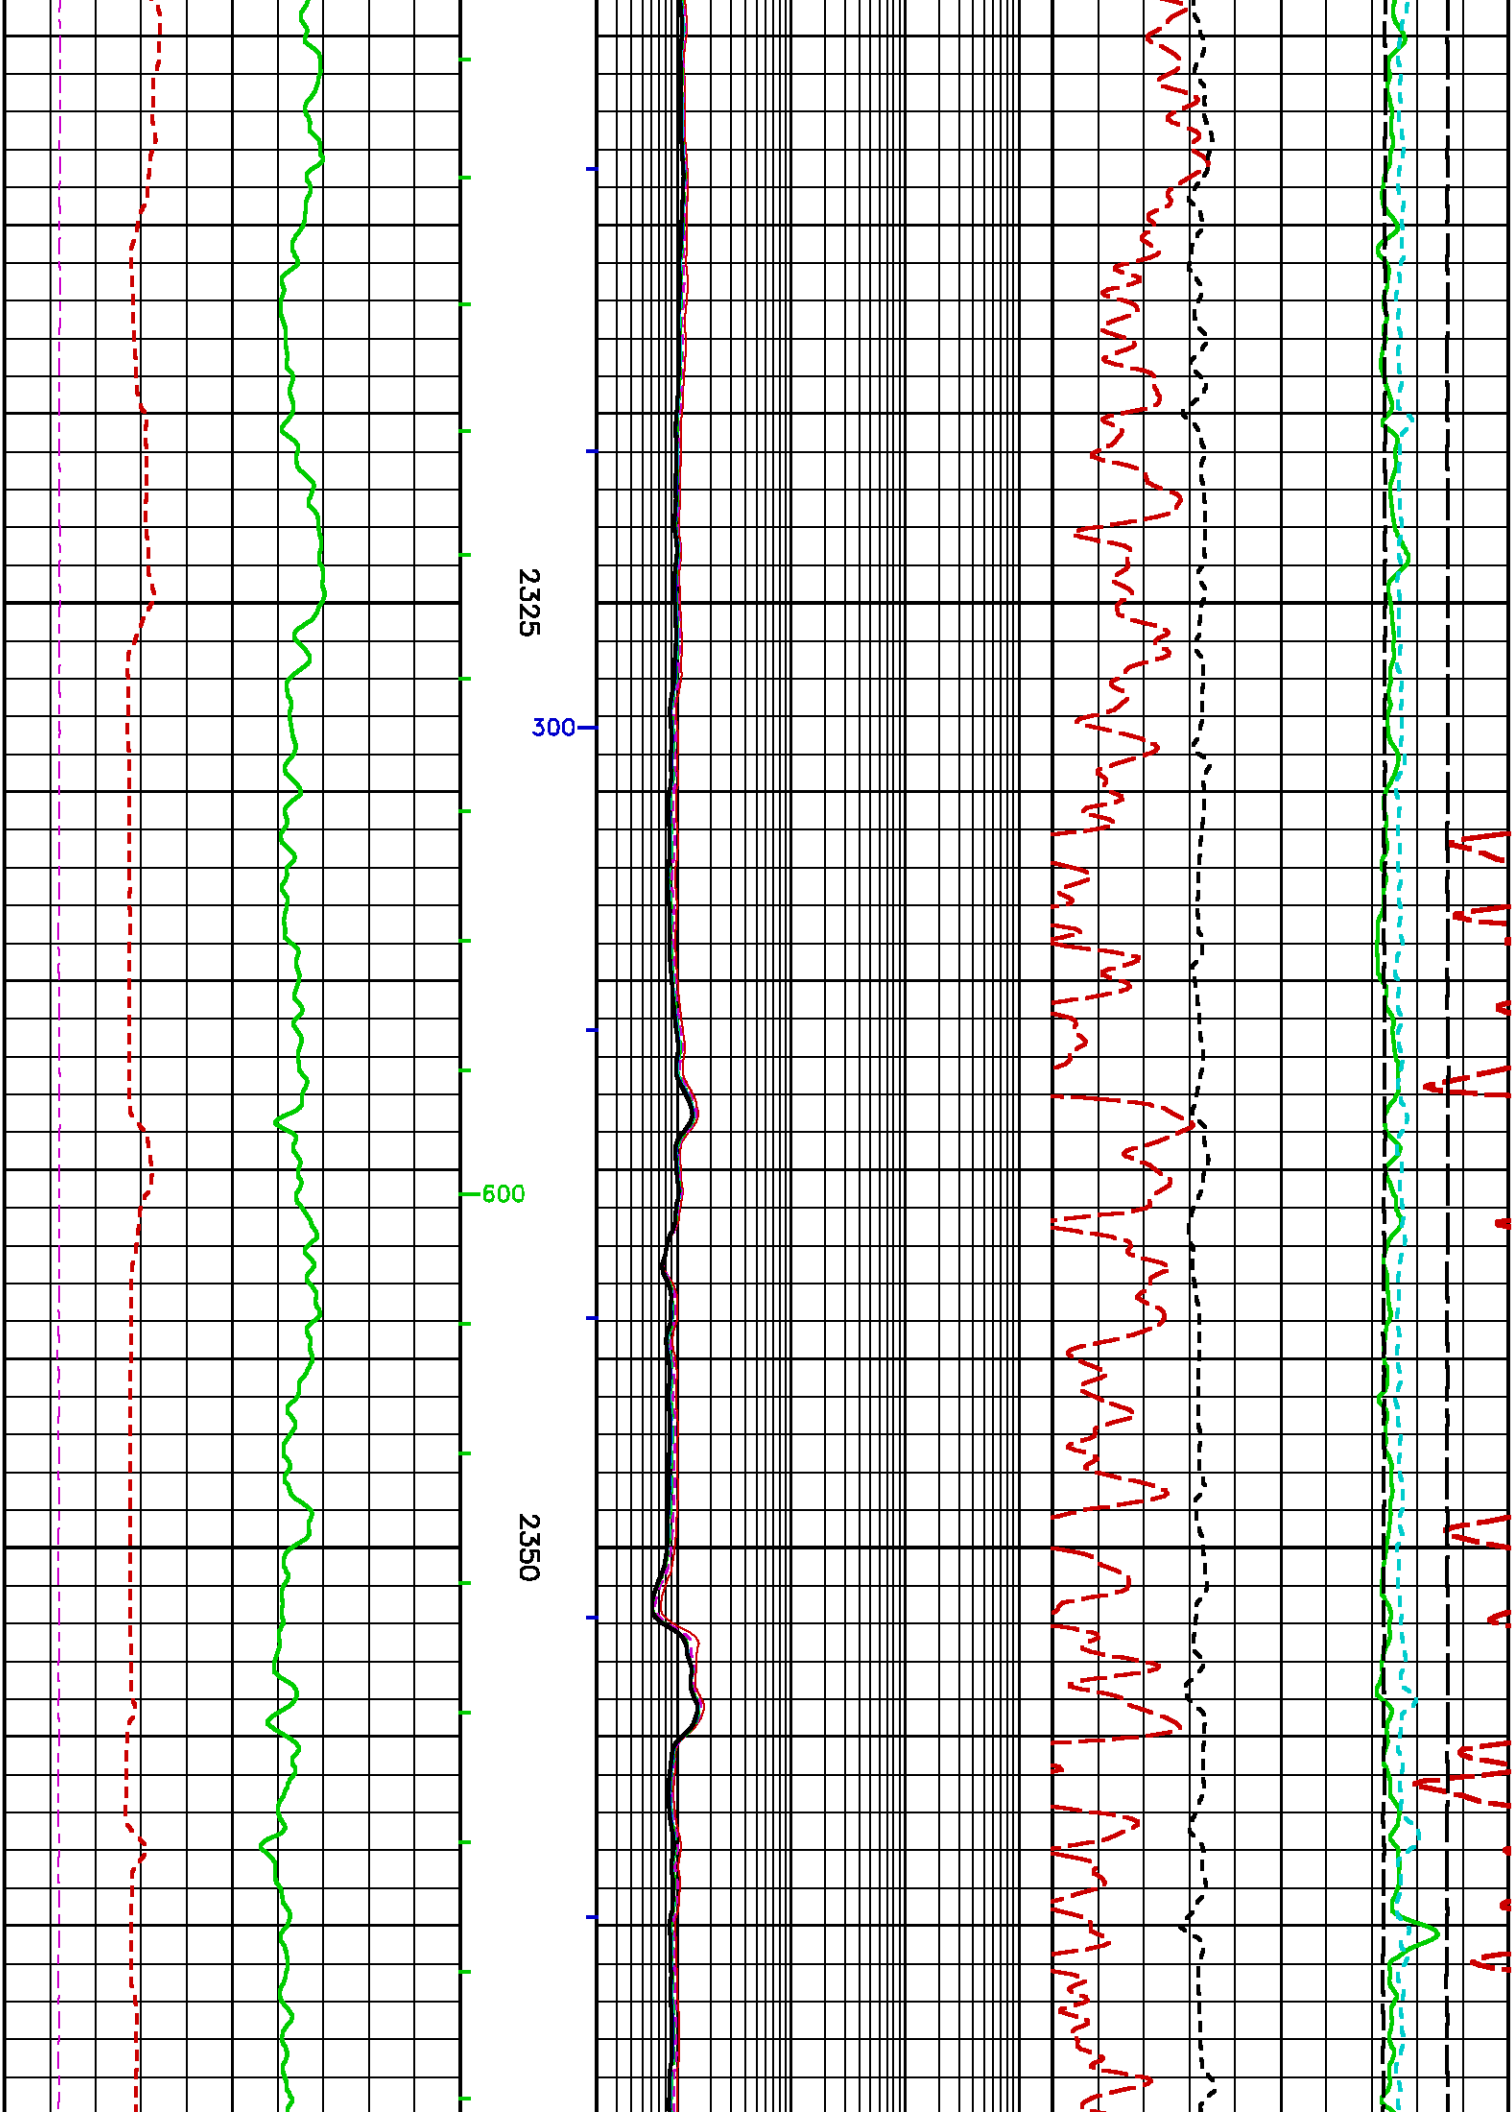

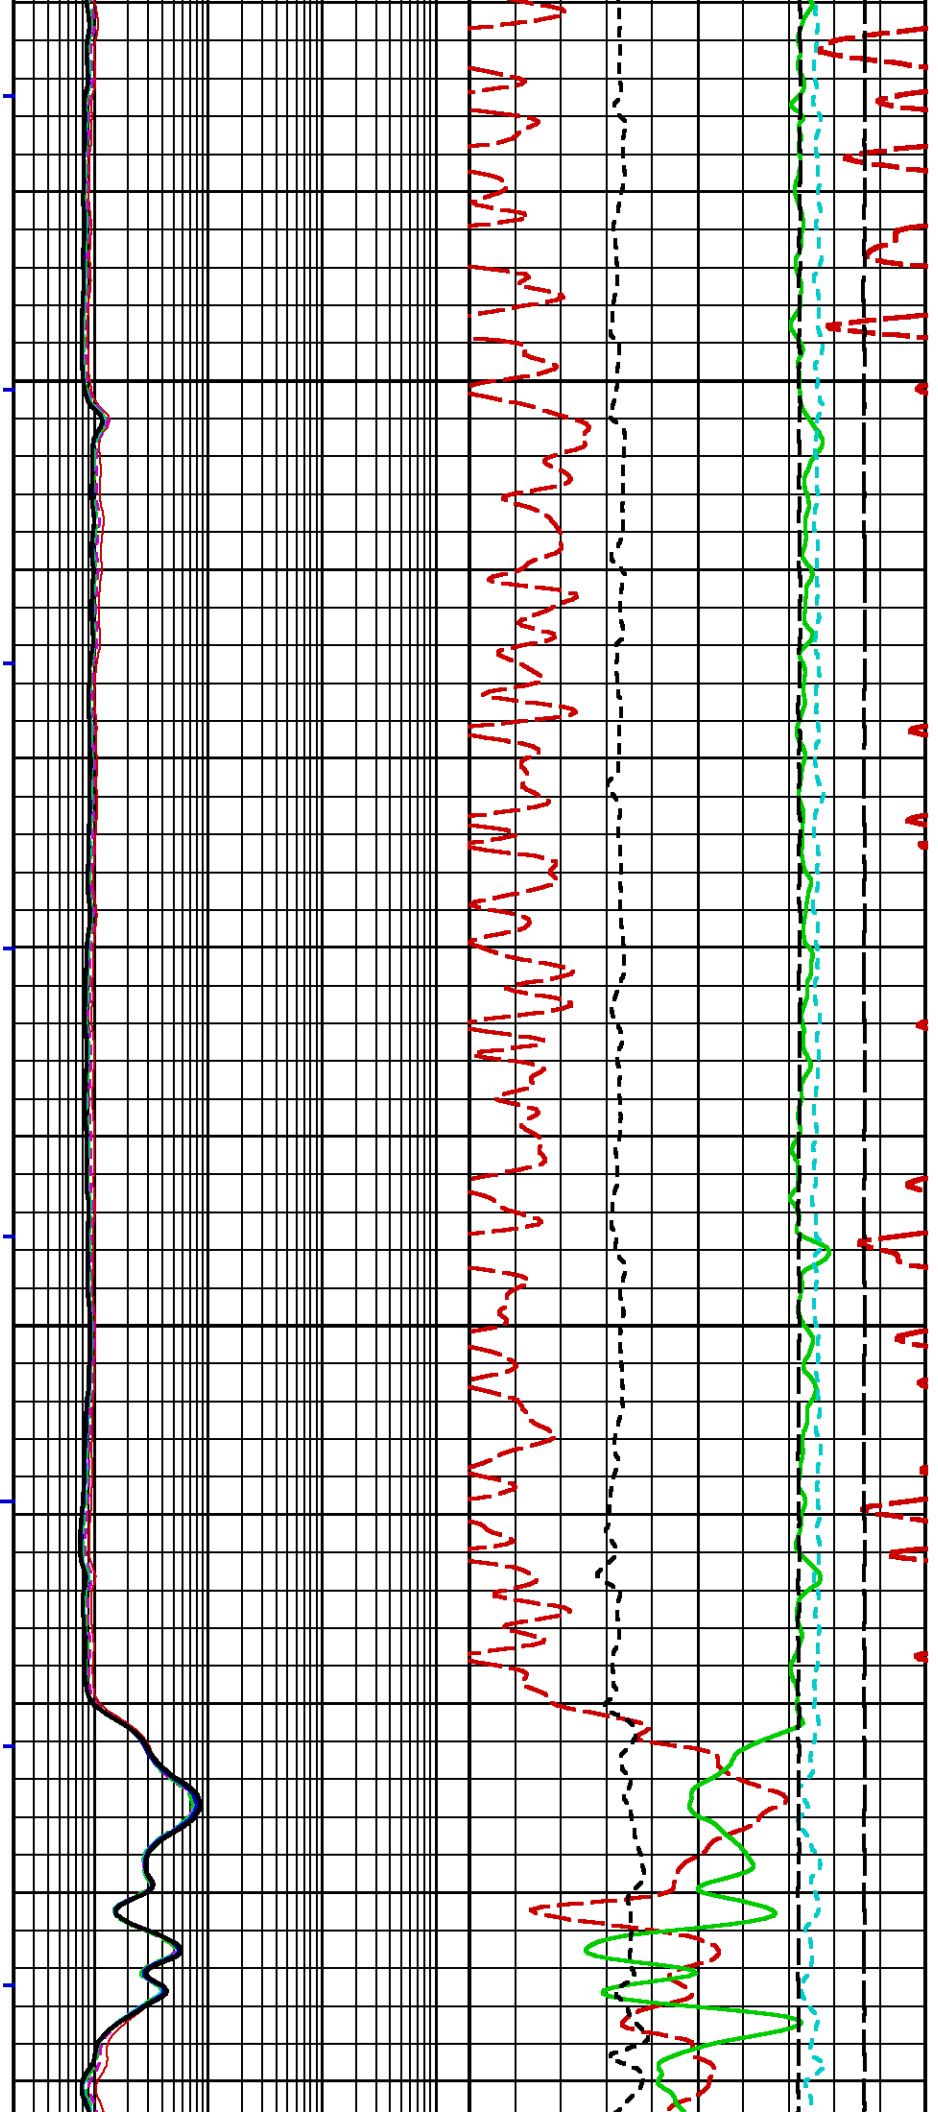


2375


500



2400


200

400

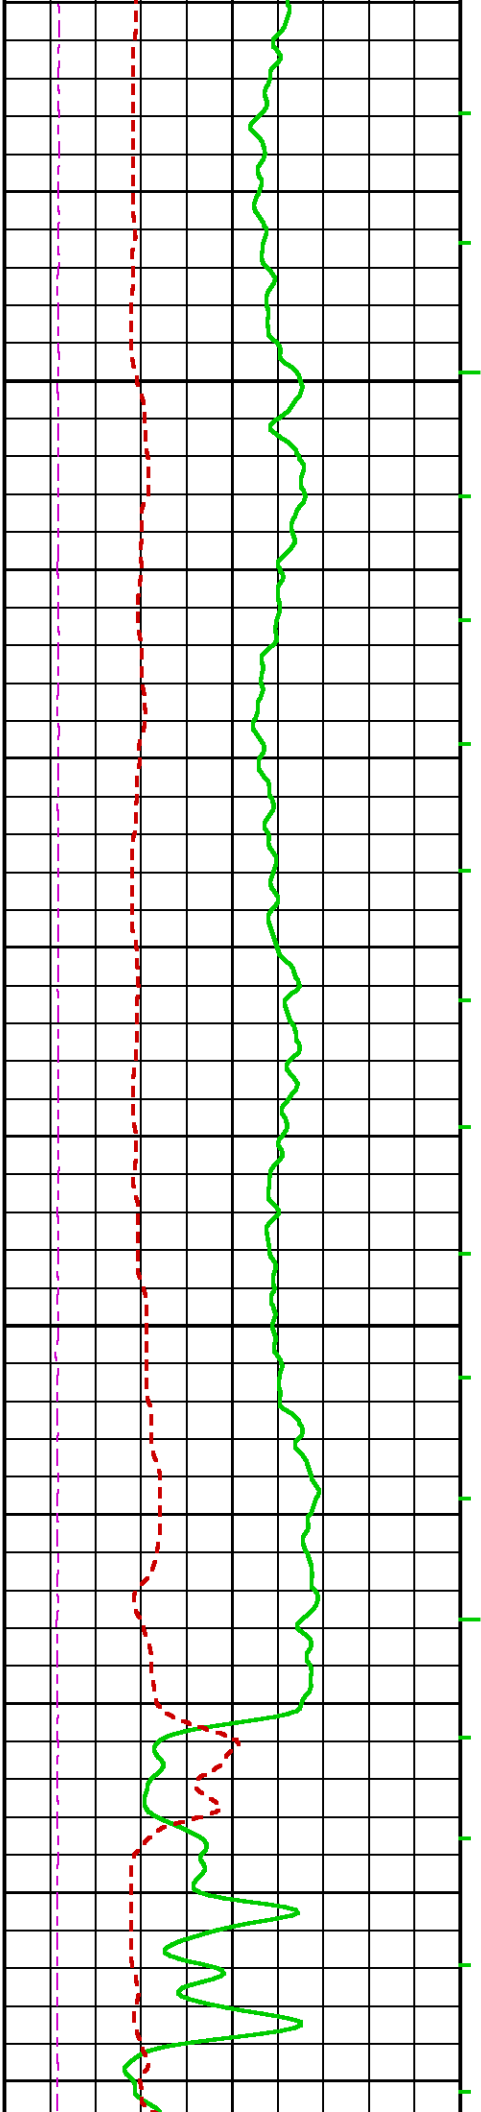

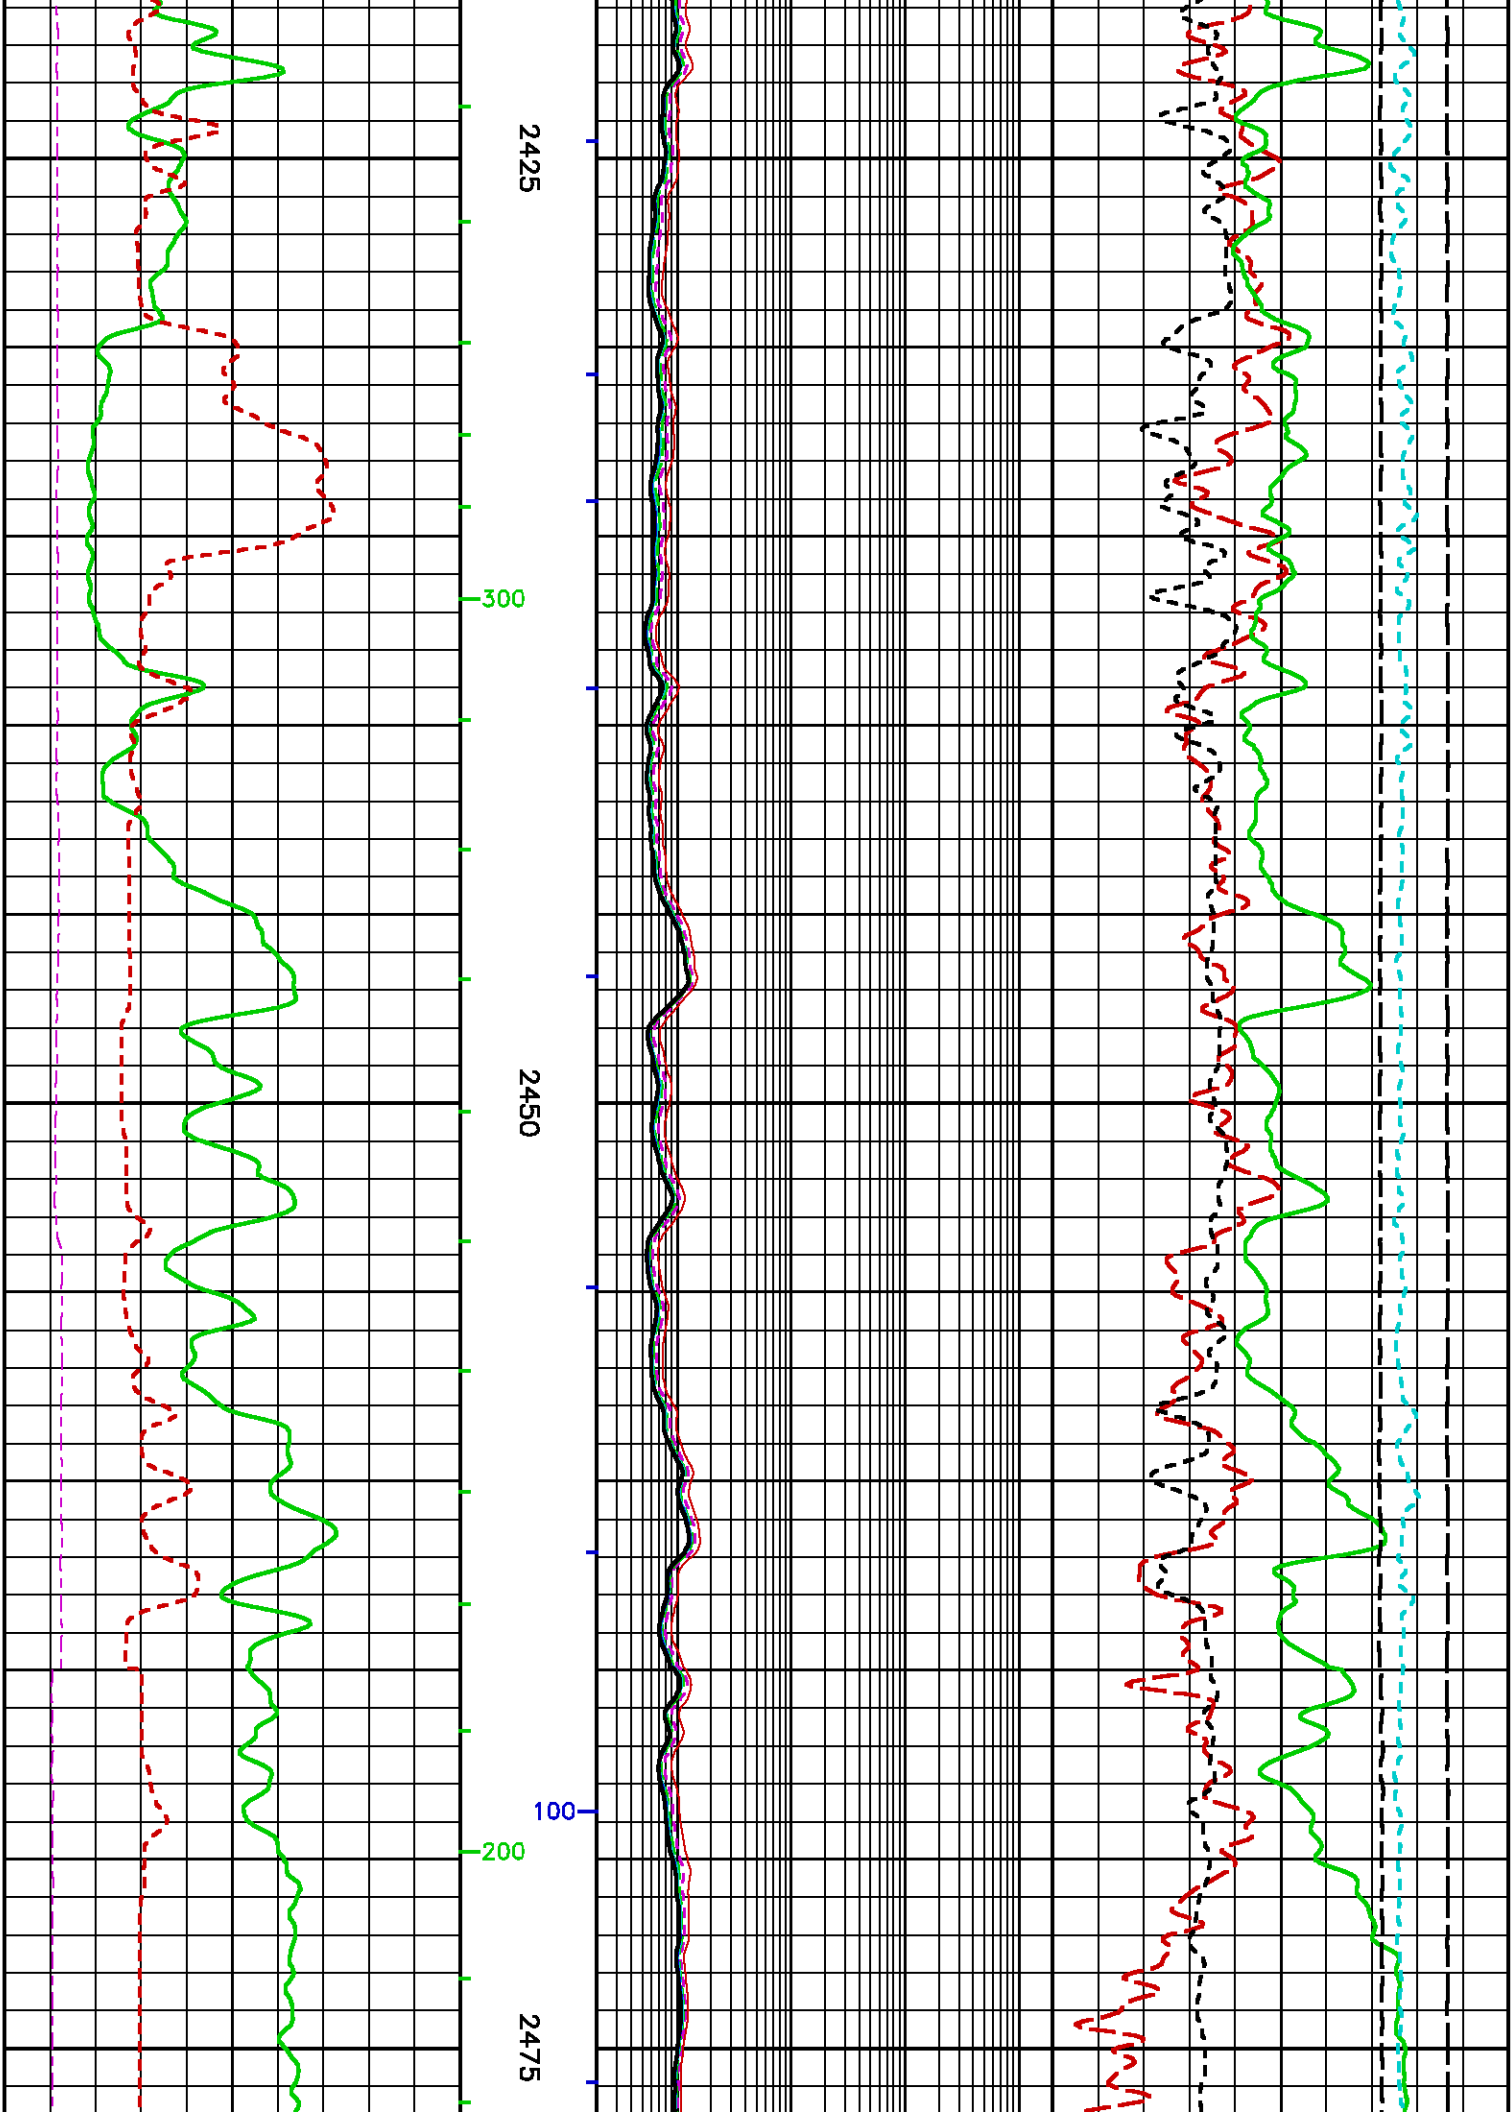

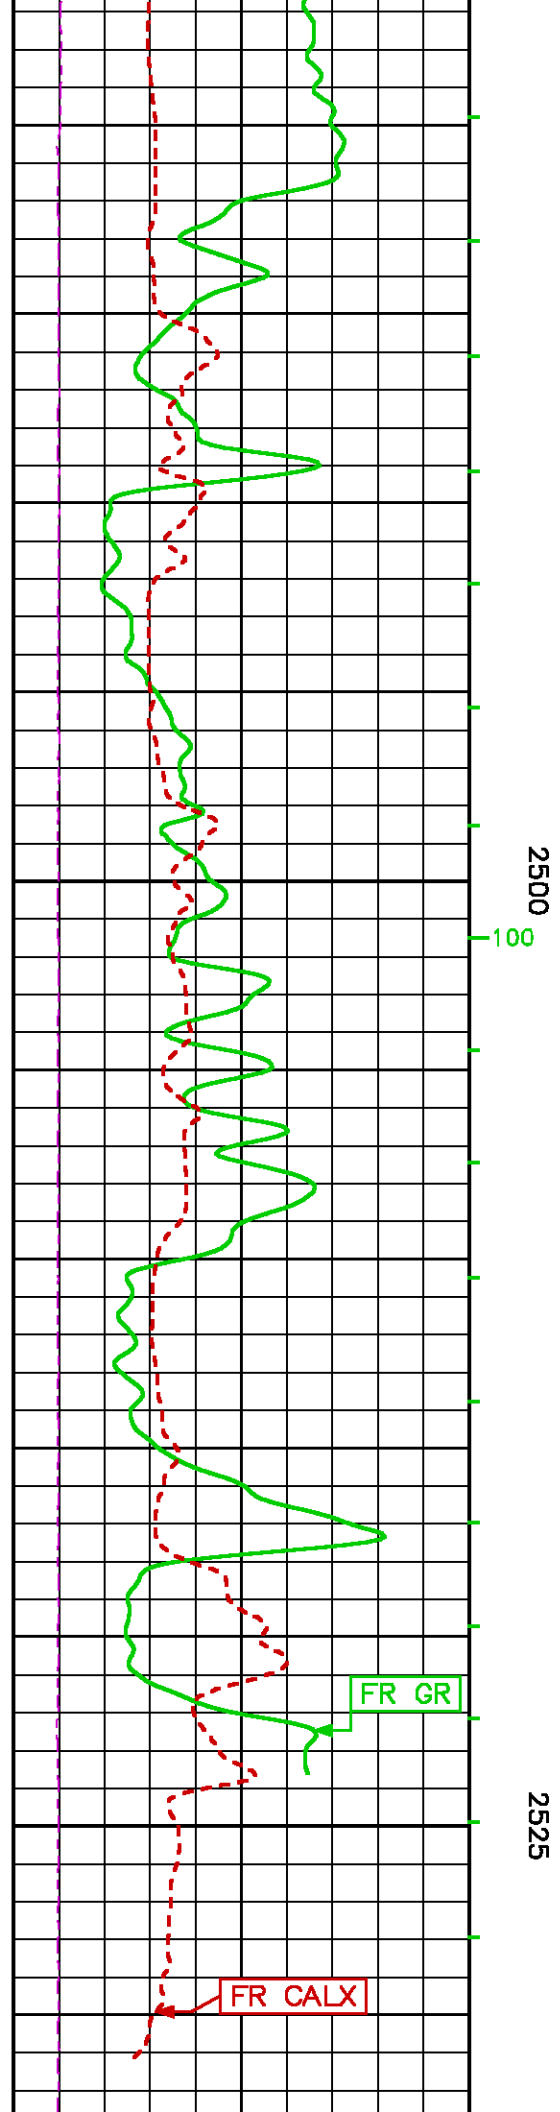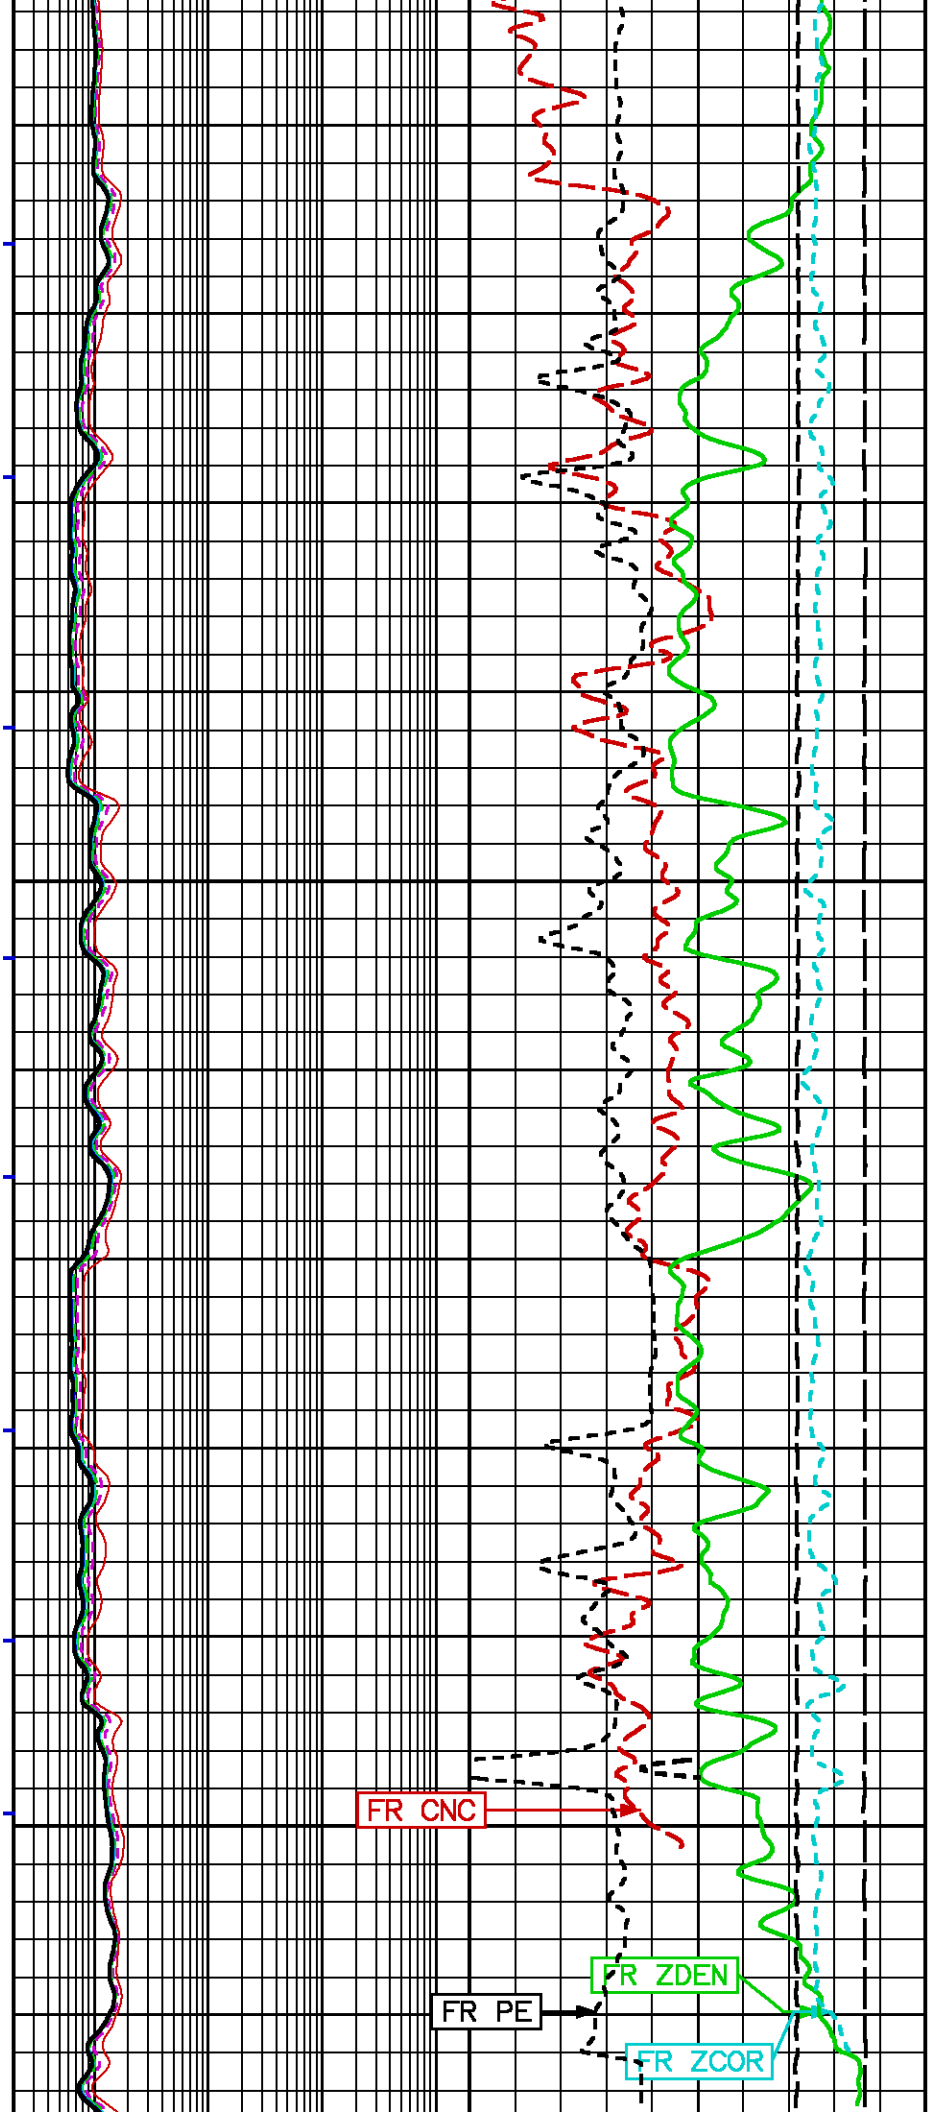

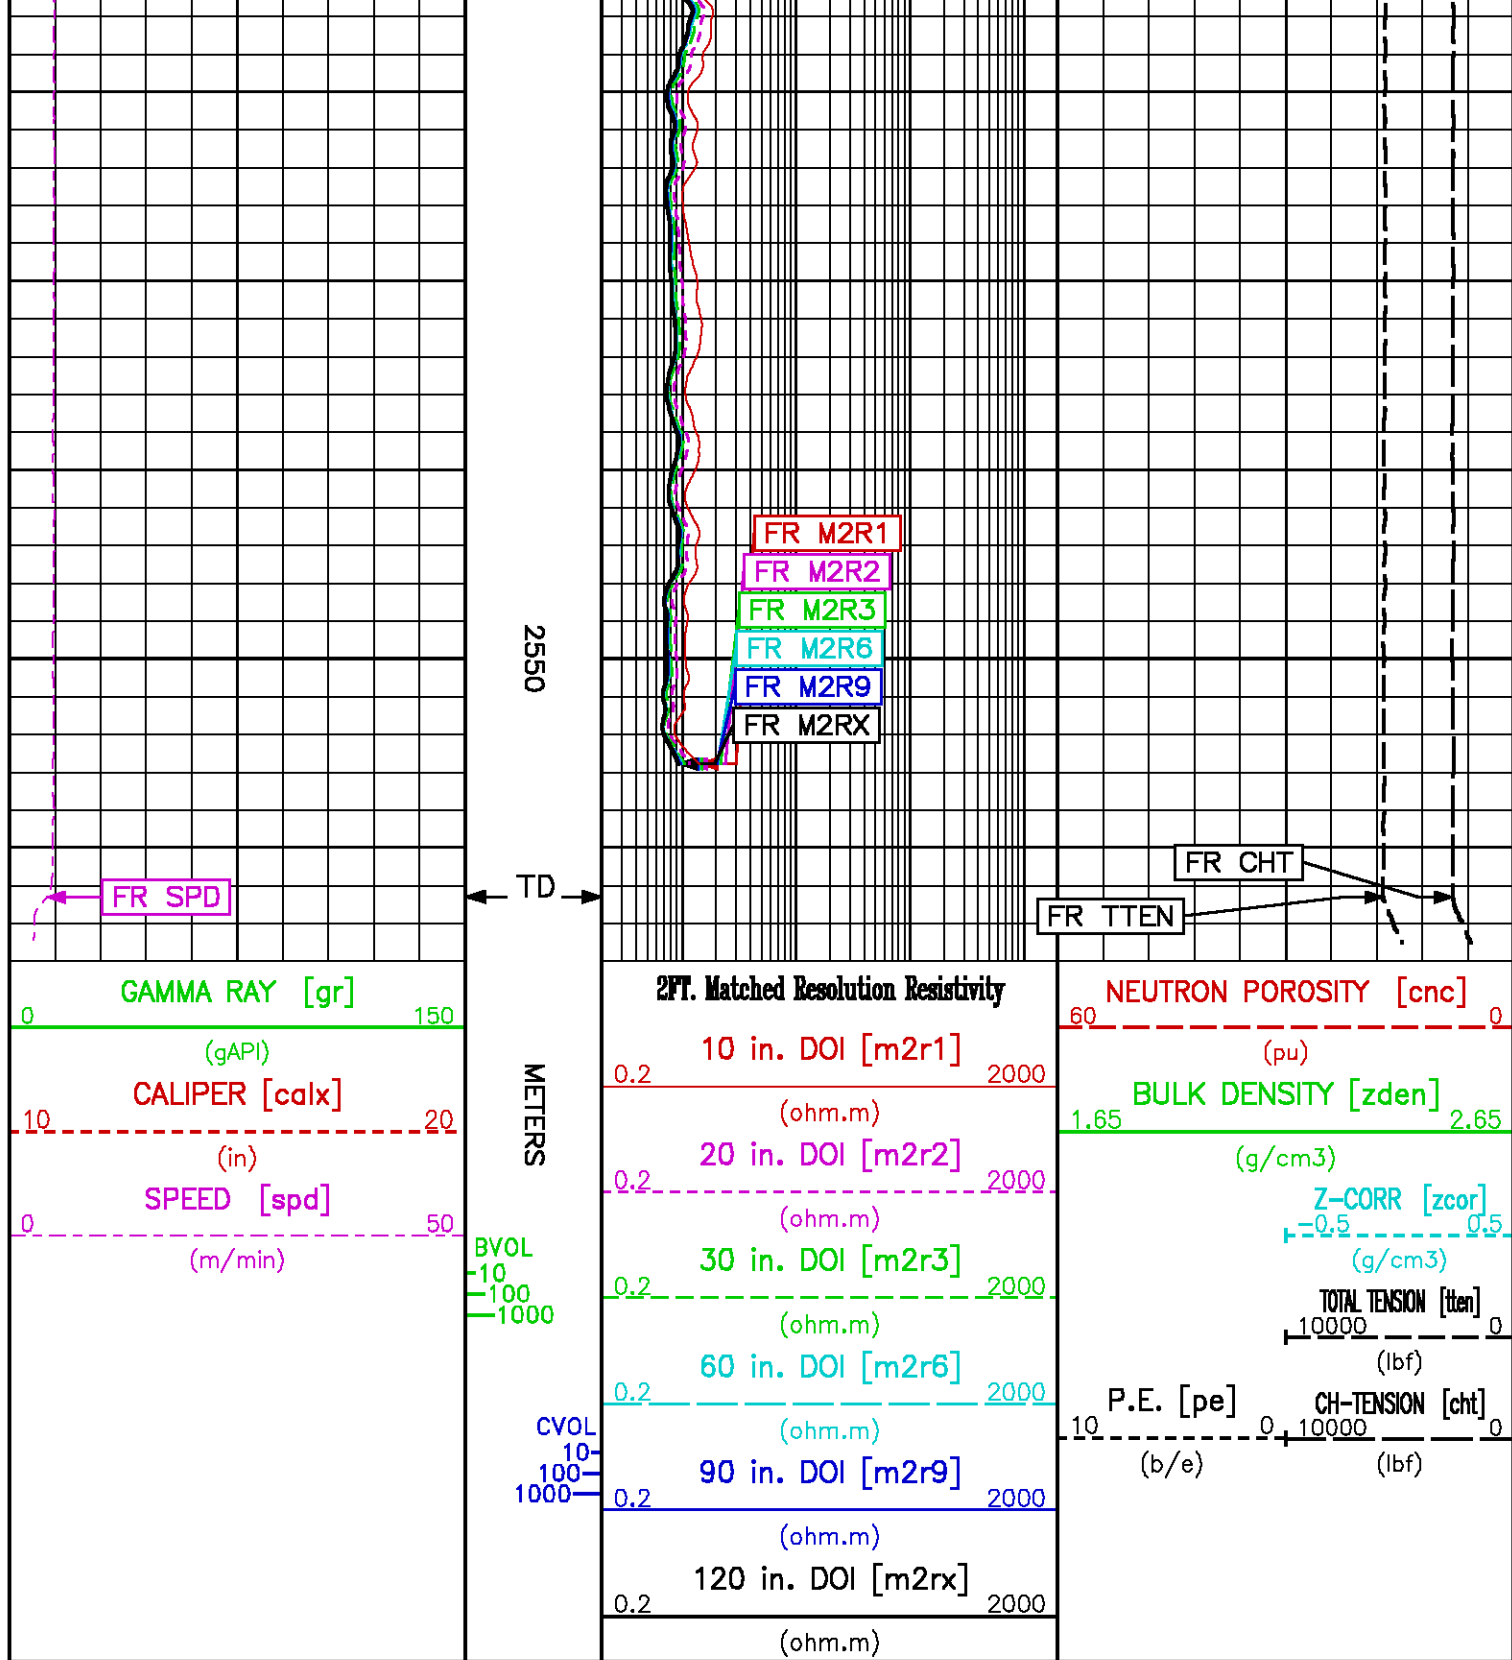

RUN 1 REPEAT LOG 1:200 SCALE

PARAMETER AND FILTER SUMMARY REPORT

FILE: /data/peak/bilabar1_D3/1777102.prm
 LOGGING MODE: DEPTH DIRECTION: UP
 TOP DEPTH: 2380.755 m BOTTOM DEPTH: 2512.428 m

SYMMETRIC FILTER

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
CHT	FILTER ()	medium (1)		TOP	BOTTOM
Y AXIS CALIPER	FILTER ()	medium (1)		"	"
SPEED	FILTER ()	medium (1)		"	"
TENSION	FILTER ()	medium (1)		"	"
GR	FILTER ()	medium (1)		"	"
CN	FILTER ()	medium (1)		"	"
X AXIS CALIPER	FILTER ()	medium (1)		"	"
	FILTER (.h)	medium (1)		"	"
	FILTER (.l)	medium (1)		"	"
ZDL	FILTER ()	medium (1)		"	"
DT24	FILTER ()	light (2)		"	"

BOREHOLE & CEMENT

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
CASING - BOREHOLE & CEMENT VOLUME	CASING O.D.	9.625	In	TOP	BOTTOM
	CASING THICKNESS	0.000	In	"	"
BIT SIZE	BIT SIZE	12.250	In	"	"
BOREHOLE CORR DIAMETER SOURCE	CALIPER/FIXED DIA. (cnbh*)	USE CALIPER		"	"
	CALIPER/FIXED DIA. (mbh*)	USE CALIPER		"	"
BOREHOLE CORR DIAMETER	FIXED DIAMETER (cnbh*)	12.250	In	"	"
	FIXED DIAMETER (mbh*)	12.250	In	"	"
MUD VALUES SOURCE	RMUD SOURCE (HDIL)	OIL BASE MUD		"	"
MUD VALUES	MUD SAMPLE TEMP	75.0	degF	"	"
	MUD SAMPLE RES	1.000	ohm.m	"	"
	MUD REFERENCE TEMP	75.0	degF	"	"
	TEMP GRADIENT	1.200	0.01 degF/ft	"	"

CN PROCESSING

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
2446 CN MATRIX	2446 MATRIX	SANDSTONE		TOP	BOTTOM
CN SALINITY CORRECTION	SALINITY	0	ppm	"	"
CN CASING & CEMENT CORRECTION	CORRECTION	OFF		"	"
	BIT SIZE BEHIND CSNG	7.875	In	"	"

ZDL PROCESSING

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
ZDL CHI-SMOOTH FILTER	DEN CHISM	ON		TOP	BOTTOM
	PE CHISM	ON		"	"
ZDL	ZDL TRACKING	ON		"	"

ACOUSTIC POROSITY

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
DELTA T CURVE SELECTION	DT24 SOURCE	FIRST ARRIVAL DT24		TOP	BOTTOM

ACOUSTIC PICK CONTROL

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
DELTA-T REJECTION RANGE	REJECTION DTmin	40	us/ft	TOP	BOTTOM
	REJECTION DTmax	180	us/ft	"	"
FIRST ARRIVAL PICK	SEARCH START OFFSET {sfan1*}	87	us	"	"
	SEARCH START OFFSET {sfan2*}	87	us	"	"
	SEARCH START OFFSET {sfan3*}	87	us	"	"
	SEARCH START OFFSET {sfan4*}	87	us	"	"
	SEARCH WINDOW LENGTH	1045	us	"	"
	THRESHOLD FACTOR	0.30		"	"
	THRESHOLD MINIMUM {sfan1*}	1.8	pct	"	"
	THRESHOLD MINIMUM {sfan2*}	1.8	pct	"	"
	THRESHOLD MINIMUM {sfan3*}	1.8	pct	"	"

THRESHOLD MINIMUM (sfan4*)
E3 THRESHOLD

OFF

1.8

pct

''

''

ACOUSTIC QUALITY CONTROL

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
CYCLE SKIP LIMIT	CYCLE SKIP LIMIT	100	us	TOP	BOTTOM

ACOUSTIC WAVEFORM FILTER

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
WAVEFORM FILTER - DELTA T	SURFACE WAVE FILTER	ON		TOP	BOTTOM
	LOW FREQ CUTOFF	4000	Hz	''	''
	HIGH FREQ CUTOFF	20000	Hz	''	''

HDIL PROCESSING

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
HDIL TEMPERATURE CORRECTION	TEMP CORR SOURCE	USE RXTEMP		TOP	BOTTOM
ADAPTIVE BOREHOLE CORRECTION	ABC PROCESSING	ON		''	''
	ABC to CALCULATE	STANDOFF		''	''
	STANDOFF	1.50	In	''	''
	TOOL POSITION	ECCENTERED		''	''
	Rmud MULTIPLIER	1.000		''	''

CURVE DESCRIPTION REPORT


CURVE NAME	CURVE ALIAS	CREATION DATE	CURVE DESCRIPTION
F1:BIT	BIT	Oct 25 22:21:58 2006	BIT SIZE
F1:CALX	CAL	Oct 25 22:21:58 2006	CALIPER FROM X AXIS OF X-Y CALIPER(S)
F1:CHT	CHT	Oct 25 22:21:58 2006	CABLE HEAD TENSION
F1:CNC	CNC	Oct 25 22:21:58 2006	BOREHOLE SIZE CORRECTED COMPENSATED NEUTRON POROSITY
F1:GR	GR	Oct 25 22:21:58 2006	GAMMA RAY
F1:M2R1	MOR1	Oct 25 22:21:58 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 10 INCH
F1:M2R2	MOR2	Oct 25 22:21:58 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 20 INCH
F1:M2R3	MOR3	Oct 25 22:21:58 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 30 INCH
F1:M2R6	MOR6	Oct 25 22:21:58 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 60 INCH
F1:M2R9	MOR9	Oct 25 22:21:58 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 90 INCH
F1:M2RX	MORX	Oct 25 22:21:58 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 120 INCH
F1:PE	PE	Oct 25 22:21:58 2006	PHOTO ELECTRIC CROSS-SECTION
F1:SPD	SPD	Oct 25 22:21:58 2006	SPEED
F1:TTEN	TTEN	Oct 25 22:21:58 2006	TOTAL TENSION
F1:ZCOR	ZCOR	Oct 25 22:21:58 2006	DENSITY CORRECTION
F1:ZDEN	ZDEN	Oct 25 22:21:58 2006	FORMATION BULK DENSITY



CURVE MEASURE POINT OFFSET

CURVE	OFFSET (m)	CURVE	OFFSET (m)	CURVE	OFFSET (m)	CURVE	OFFSET (m)
BIT	0.00	GR	33.83	M2R6	2.44	SPD	0.00
CALX	26.37	M2R1	2.44	M2R9	2.44	TTEN	0.00
CHT	0.00	M2R2	2.44	M2RX	2.44	ZCOR	26.37
CNC	31.70	M2R3	2.44	PE	26.37	ZDEN	26.37

Presentation : sys1:/dat1a/peak/bilabari_D3/slam_rpt_200.pdf [1:200 Scale]
Plot Interval : 2343.07 - 2512.31 Meters


Data File 1 : F1 : sys1:/dat1a/peak/bilabari_D3/[777]02.off
Created On : Oct 25 22:21:58 2006
Company : PEAK PETROLEUM
Well : BILABRI D3
Field : BILABRI
File Interval : 2343.07 - 2512.47 Meters
Oct : [777]

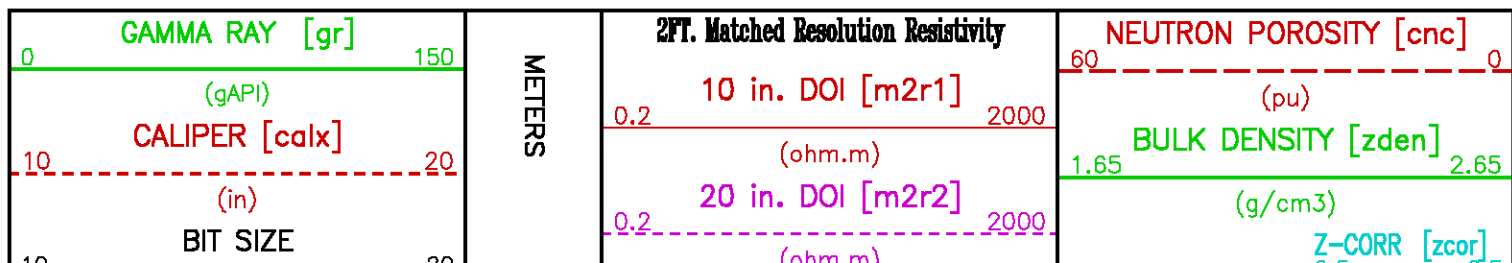


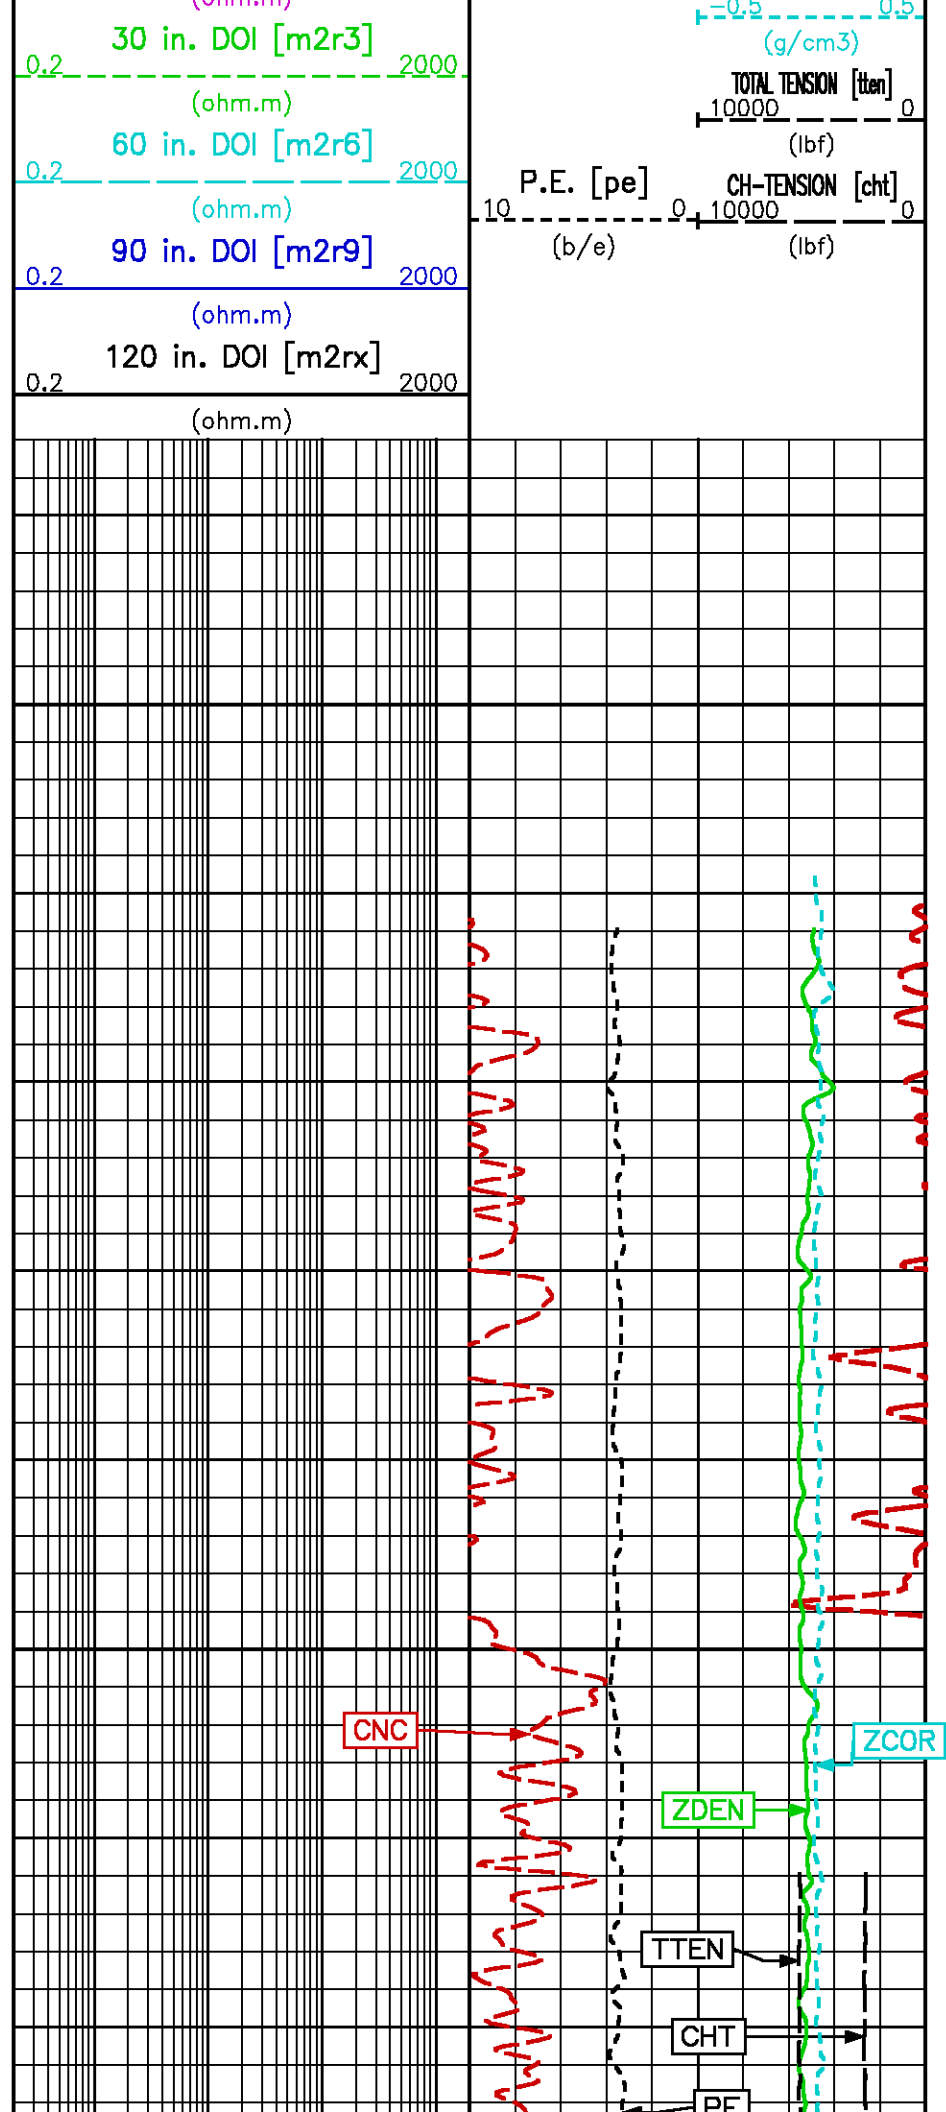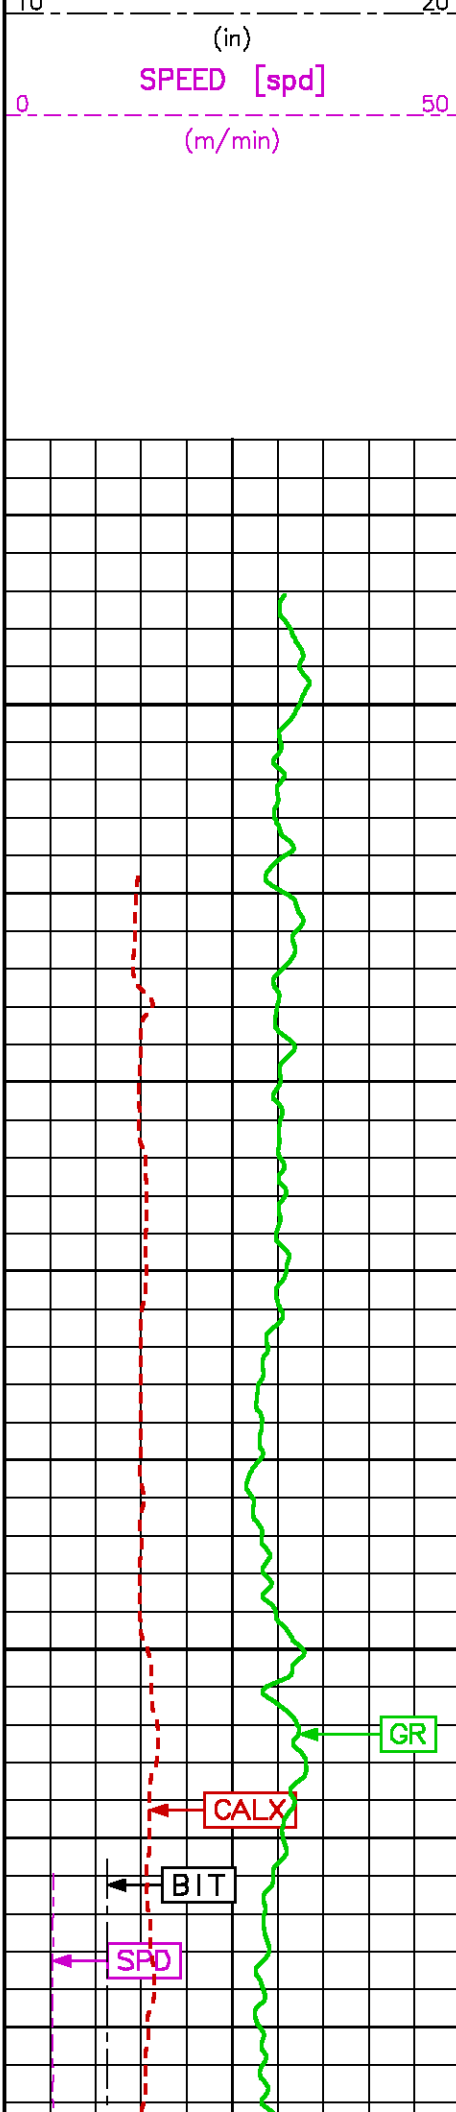

M2R1
M2R2
M2R3
M2R6
M2R9
M2RX
2400


2425

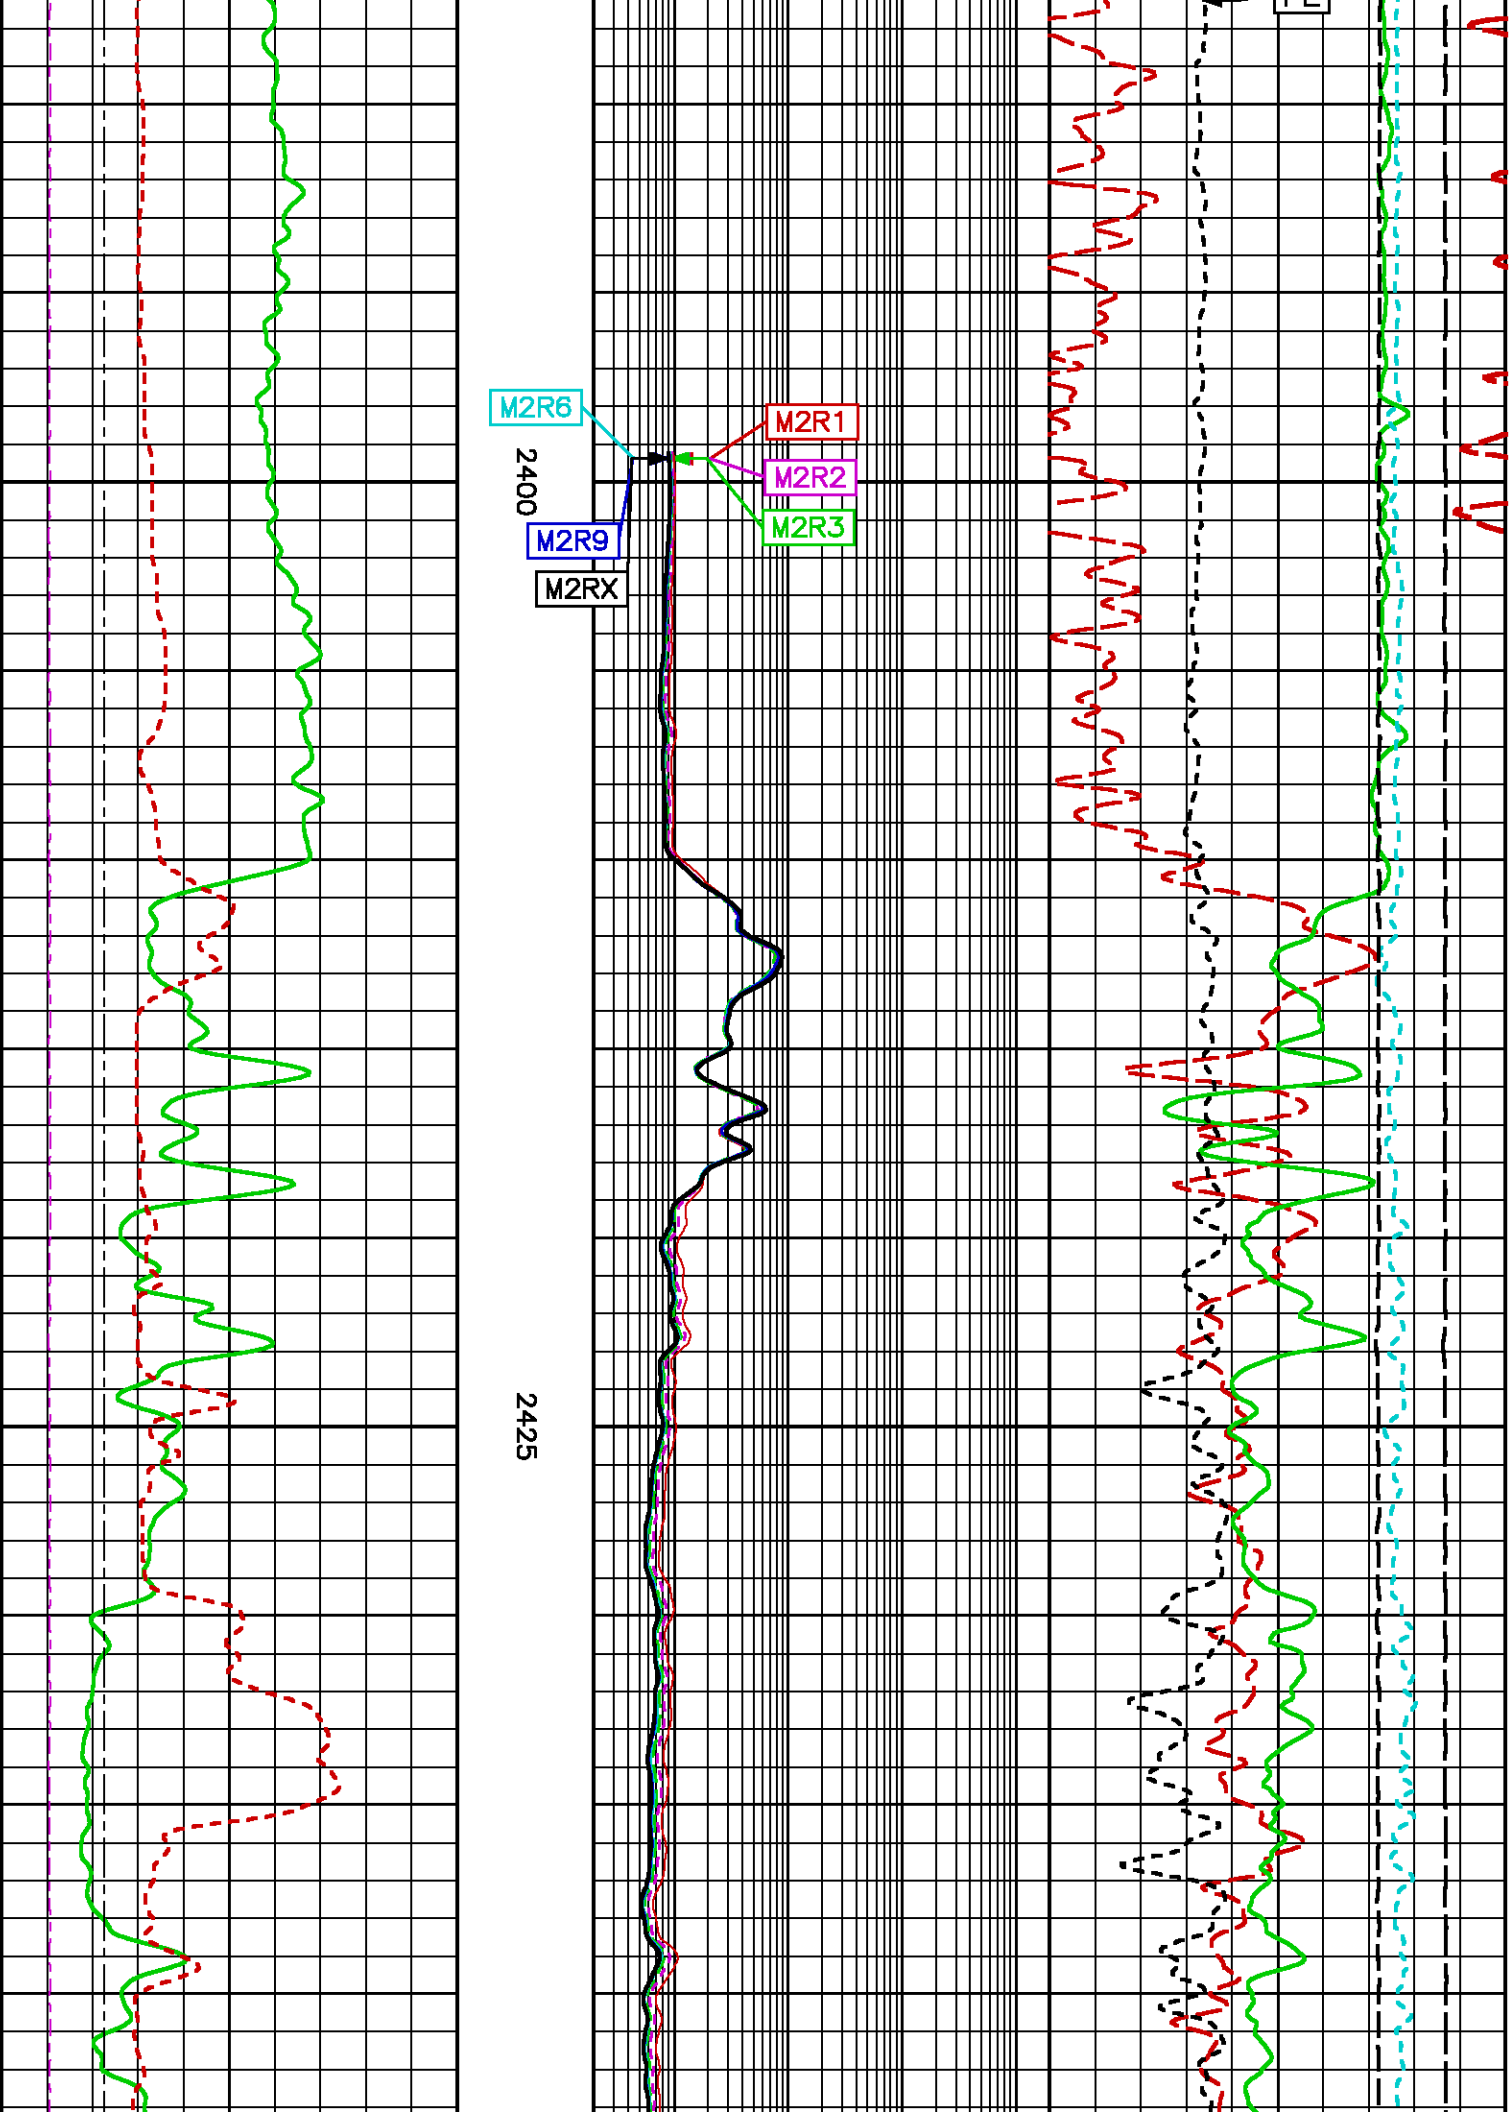


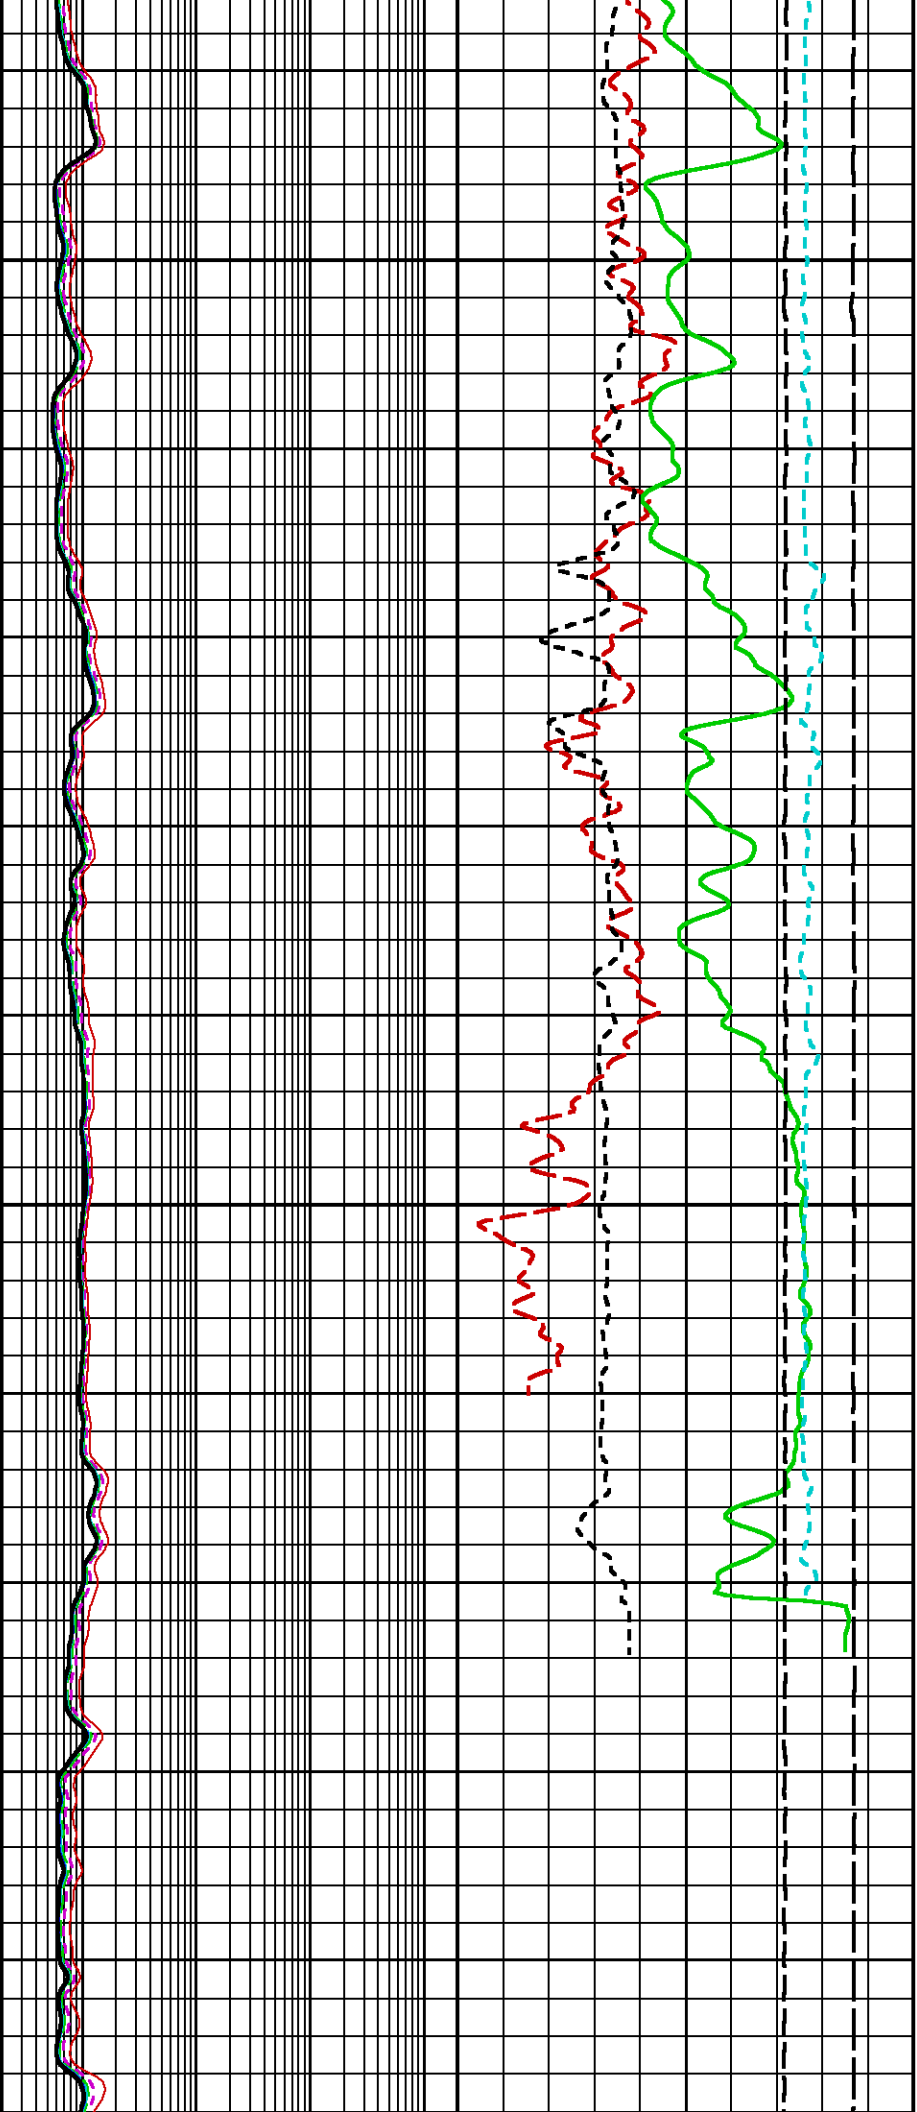

2450

2475

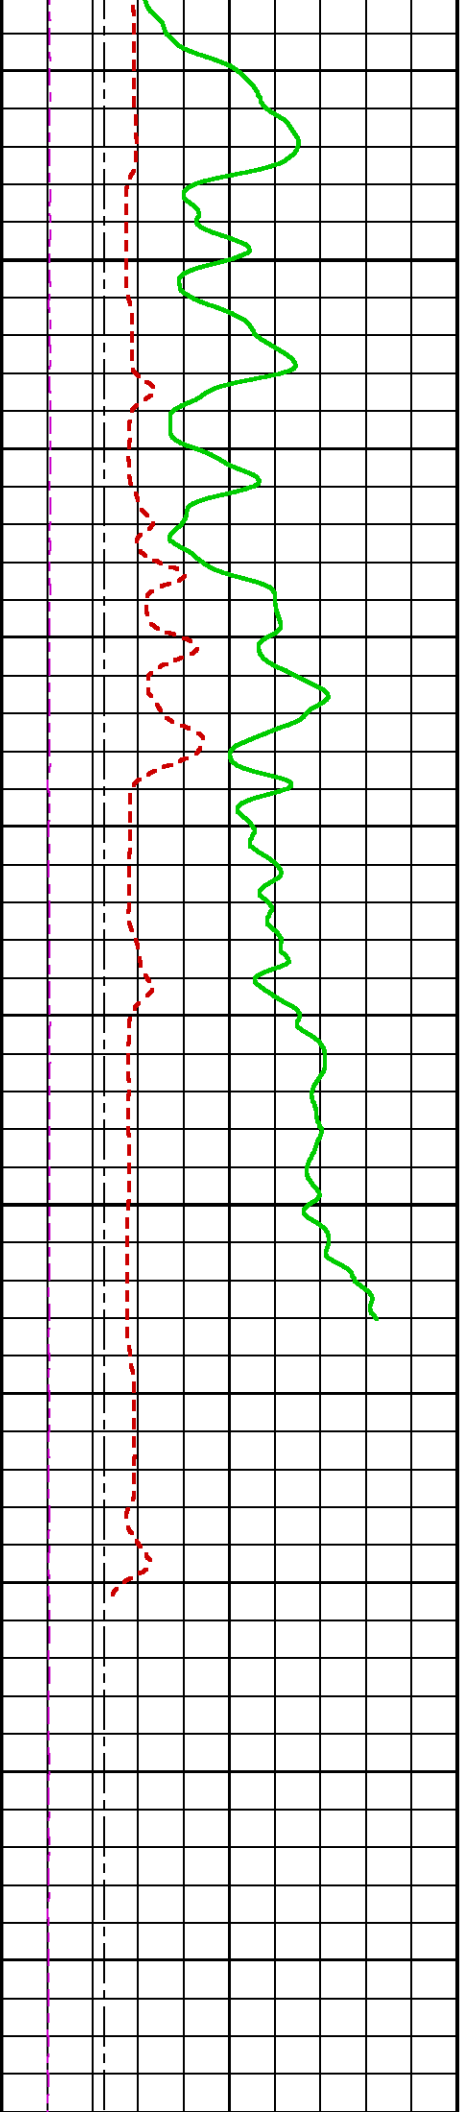

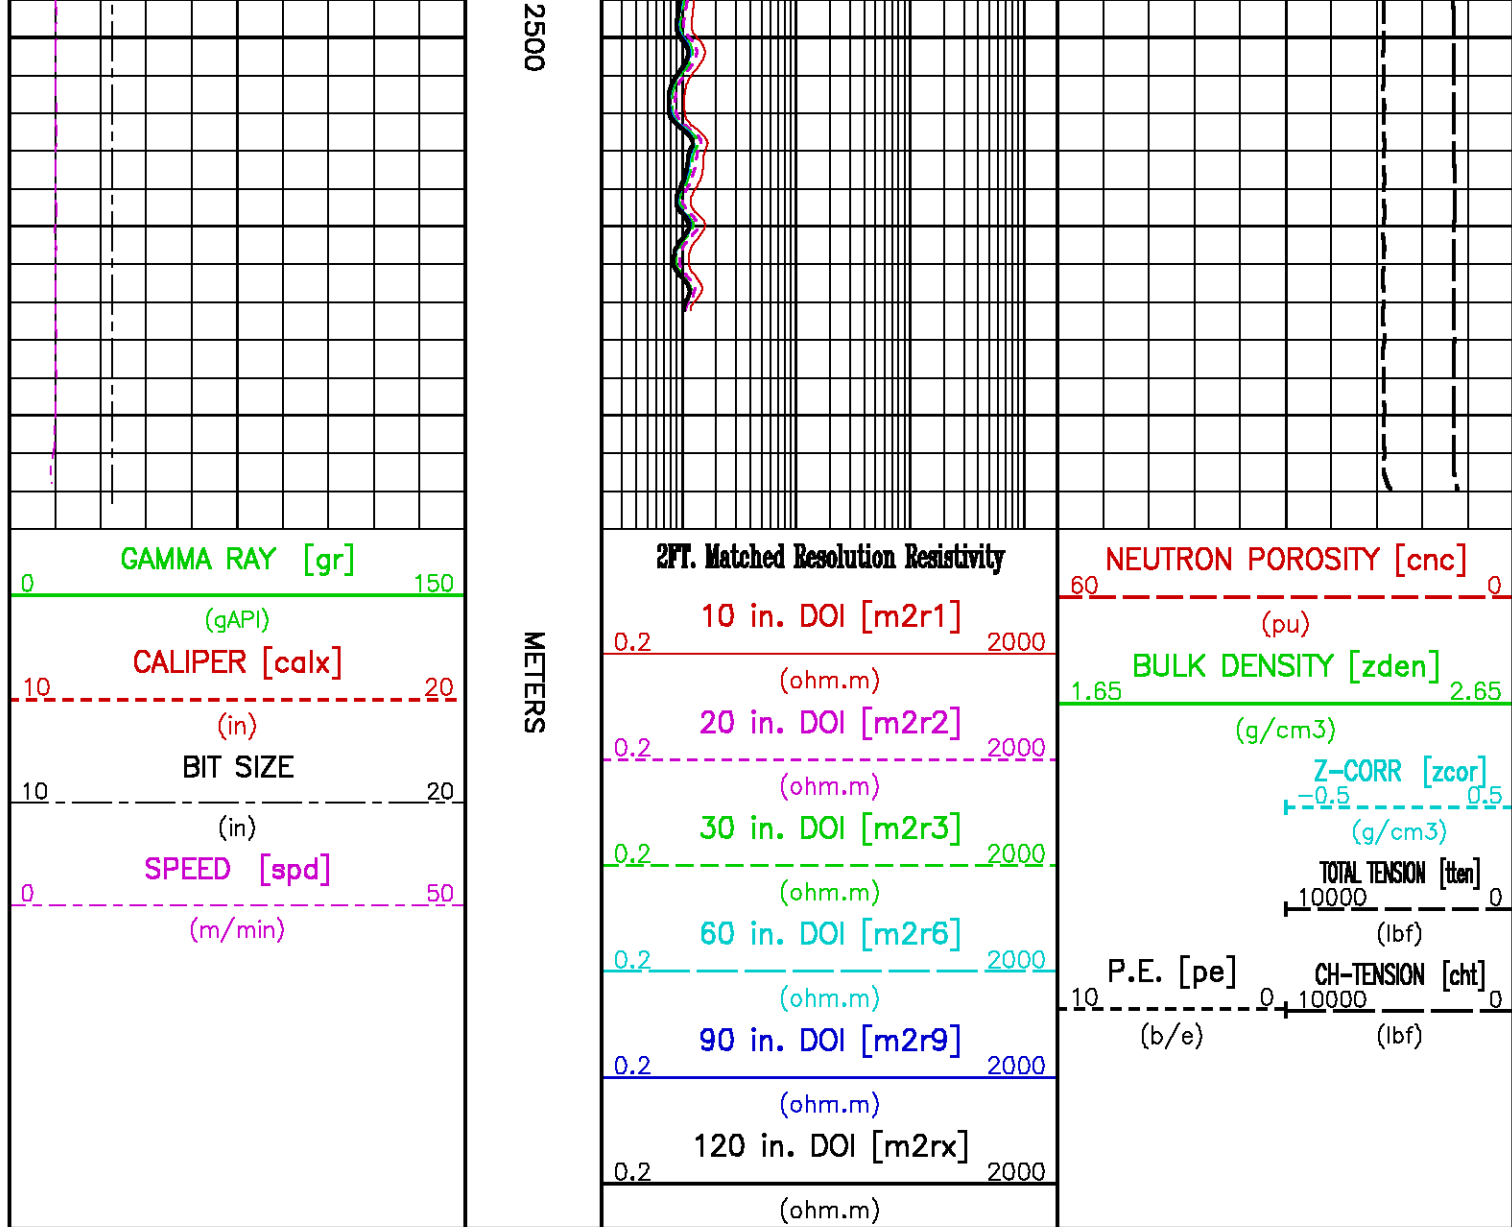

RUN 2 REPEAT LOG 1:200 SCALE

ECLIPS 5.1i Sep 16, 2005
Updates: 1,2,37

Fri Oct 27 13:57:02 2006

Pcrplt /main/61

Cplot 9.18

Pdf_Cpp /main/16

Fileview 5.00

PARAMETER AND FILTER SUMMARY REPORT

FILE: /data/peak/bilabar1_D3/1777104.prm
LOGGING MODE: DEPTH DIRECTION: UP
TOP DEPTH: 2380.907 m BOTTOM DEPTH: 2562.416 m

SYMMETRIC FILTER

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
CHT	FILTER ()	medium (1)		TOP	BOTTOM
Y AXIS CALIPER	FILTER ()	medium (1)		"	"
SPEED	FILTER ()	medium (1)		"	"
TENSION	FILTER ()	medium (1)		"	"

GR	FILTER ()	medium (1)	''	''
CN	FILTER ()	medium (1)	''	''
X AXIS CALIPER	FILTER ()	medium (1)	''	''
	FILTER (.h)	medium (1)	''	''
	FILTER (.l)	medium (1)	''	''
	FILTER ()	medium (1)	''	''
ZDL	FILTER ()	medium (1)	''	''
DT24	FILTER ()	light (2)	''	''

BOREHOLE & CEMENT

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
CASING - BOREHOLE & CEMENT VOLUME	CASING O.D.	9.625	In	TOP	BOTTOM
	CASING THICKNESS	0.000	In	''	''
BIT SIZE	BIT SIZE	12.250	In	''	''
BOREHOLE CORR DIAMETER SOURCE	CALIPER/FIXED DIA. (cnbh*)	USE CALIPER		''	''
	CALIPER/FIXED DIA. (mbh*)	USE CALIPER		''	''
BOREHOLE CORR DIAMETER	FIXED DIAMETER (cnbh*)	12.250	In	''	''
	FIXED DIAMETER (mbh*)	12.250	In	''	''
MUD VALUES SOURCE	RMUD SOURCE (HDIL)	OIL BASE MUD		''	''
MUD VALUES	MUD SAMPLE TEMP	75.0	degF	''	''
	MUD SAMPLE RES	1.000	ohm.m	''	''
	MUD REFERENCE TEMP	75.0	degF	''	''
	TEMP GRADIENT	1.200	0.01 degF/ft	''	''

CN PROCESSING

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
2446 CN MATRIX	2446 MATRIX	SANDSTONE		TOP	BOTTOM
CN SALINITY CORRECTION	SALINITY	0	ppm	''	''
CN CASING & CEMENT CORRECTION	CORRECTION	OFF		''	''
	BIT SIZE BEHIND CSNG	7.875	in	''	''

ZDL PROCESSING

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
ZDL CHI-SMOOTH FILTER	DEN CHISM	ON		TOP	BOTTOM
	PE CHISM	ON		''	''
ZDL	ZDL TRACKING	ON		''	''

ACOUSTIC POROSITY

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
DELTA T CURVE SELECTION	DT24 SOURCE	FIRST ARRIVAL DT24		TOP	BOTTOM

ACOUSTIC PICK CONTROL

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
DELTA-T REJECTION RANGE	REJECTION DTmin	40	us/ft	TOP	BOTTOM
	REJECTION DTmax	180	us/ft	''	''
FIRST ARRIVAL PICK	SEARCH START OFFSET (sfan1*)	87	us	''	''
	SEARCH START OFFSET (sfan2*)	87	us	''	''
	SEARCH START OFFSET (sfan3*)	87	us	''	''
	SEARCH START OFFSET (sfan4*)	87	us	''	''
	SEARCH WINDOW LENGTH	1529	us	''	''
	THRESHOLD FACTOR	0.30		''	''
	THRESHOLD MINIMUM (sfan1*)	1.9	pct	TOP	2526.678
		1.7	pct	BOTTOM	2526.678
	THRESHOLD MINIMUM (sfan2*)	1.9	pct	TOP	2526.525
		1.7	pct	BOTTOM	2526.525
	THRESHOLD MINIMUM (sfan3*)	1.9	pct	TOP	2526.373
		1.7	pct	BOTTOM	2526.373
	THRESHOLD MINIMUM (sfan4*)	1.9	pct	TOP	2526.220
		1.7	pct	BOTTOM	2526.220
	E3 THRESHOLD	OFF		TOP	BOTTOM

ACOUSTIC QUALITY CONTROL

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
CYCLE SKIP LIMIT	CYCLE SKIP LIMIT	100	us	TOP	BOTTOM

ACOUSTIC WAVEFORM FILTER

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
WAVEFORM FILTER - DELTA T	SURFACE WAVE FILTER	ON		TOP	BOTTOM

LOW FREQ CUTOFF
HIGH FREQ CUTOFF

4000
15000

Hz
Hz

..
..

HDIL PROCESSING

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
HDIL TEMPERATURE CORRECTION	TEMP CORR SOURCE	USE RXTEMP		TOP	BOTTOM
ADAPTIVE BOREHOLE CORRECTION	ABC PROCESSING	ON		..	..
	ABC to CALCULATE	STANDOFF		..	..
	STANDOFF	1.50	In	..	..
	TOOL POSITION	ECCENTERED		..	..
	Rmud MULTIPLIER	1.000		..	..

CURVE DESCRIPTION REPORT


CURVE NAME	CURVE ALIAS	CREATION DATE	CURVE DESCRIPTION
F1:BIT	BIT	Oct 27 11:22:07 2006	BIT SIZE
F1:CALX	CAL	Oct 27 11:22:07 2006	CALIPER FROM X AXIS OF X-Y CALIPER(S)
F1:CHT	CHT	Oct 27 11:22:07 2006	CABLE HEAD TENSION
F1:CNC	CNC	Oct 27 11:22:07 2006	BOREHOLE SIZE CORRECTED COMPENSATED NEUTRON POROSITY
F1:GR	GR	Oct 27 11:22:07 2006	GAMMA RAY
F1:M2R1	MOR1	Oct 27 11:22:07 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 10 INCH
F1:M2R2	MOR2	Oct 27 11:22:07 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 20 INCH
F1:M2R3	MOR3	Oct 27 11:22:07 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 30 INCH
F1:M2R6	MOR6	Oct 27 11:22:07 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 60 INCH
F1:M2R9	MOR9	Oct 27 11:22:07 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 90 INCH
F1:M2RX	MORX	Oct 27 11:22:07 2006	VERT RESOLUTION MATCHED (2 FT) RES - DOI 120 INCH
F1:PE	PE	Oct 27 11:22:07 2006	PHOTO ELECTRIC CROSS-SECTION
F1:SPD	SPD	Oct 27 11:22:07 2006	SPEED
F1:TEN	TEN	Oct 27 11:22:07 2006	TOTAL TENSION
F1:ZCOR	ZCOR	Oct 27 11:22:07 2006	DENSITY CORRECTION
F1:ZDEN	ZDEN	Oct 27 11:22:07 2006	FORMATION BULK DENSITY

CURVE MEASURE POINT OFFSET

CURVE	OFFSET (m)	CURVE	OFFSET (m)	CURVE	OFFSET (m)	CURVE	OFFSET (m)
BIT	0.00	GR	33.83	M2R6	2.44	SPD	0.00
CALX	26.37	M2R1	2.44	M2R9	2.44	TEN	0.00
CHT	0.00	M2R2	2.44	M2RX	2.44	ZCOR	26.37
CNC	31.70	M2R3	2.44	PE	26.37	ZDEN	26.37


Presentation : sys1:/dat1a/peak/bilabarl_D3/C2_rpt_200.pdf [1:200 Scale]
Plot Interval : 2339.04 - 2558.19 Meters

Data File 1 : F1 : sys1:/dat1a/peak/bilabarl_D3/C2rpt.xtf
Created On : Oct 27 11:22:07 2006
Company : PEAK PETROLEUM
Well : BILABRI D3
Field : BILABRI
File Interval : 2339.04 - 2558.19 Meters
Oct : [777]

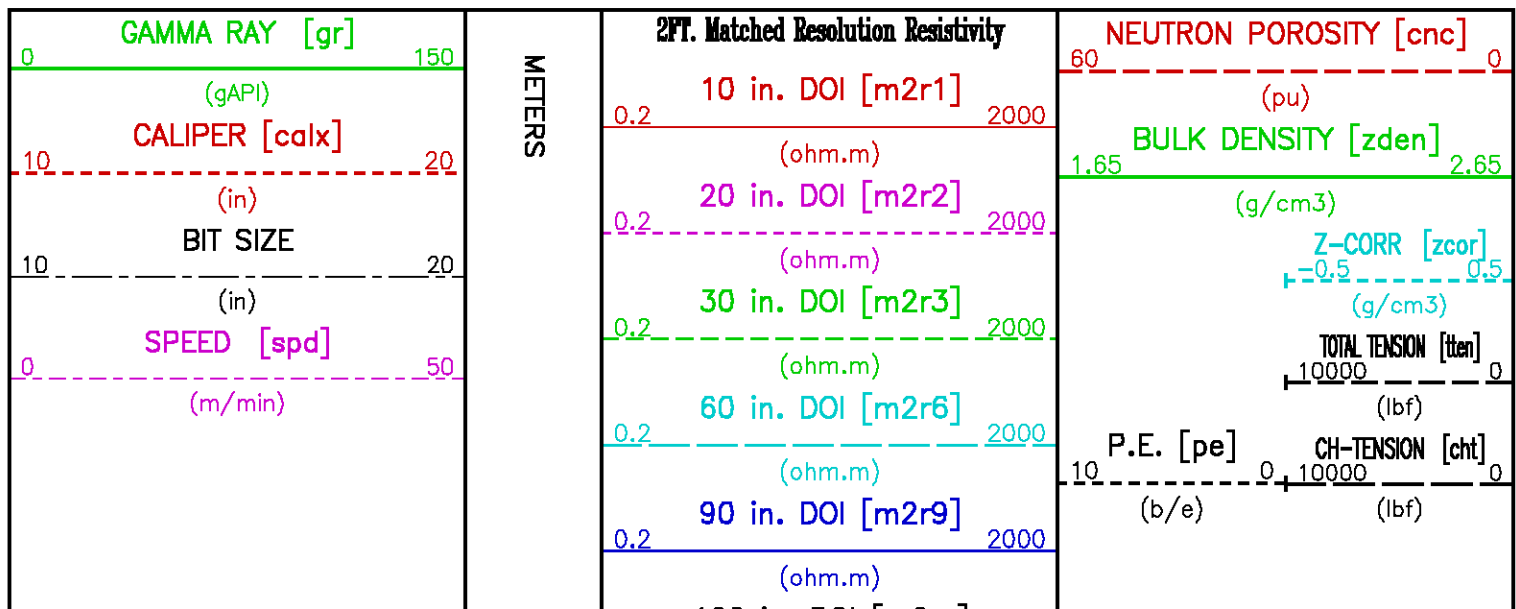


0.2 120 in. DOI [m2rx] 2000


(ohm.m)

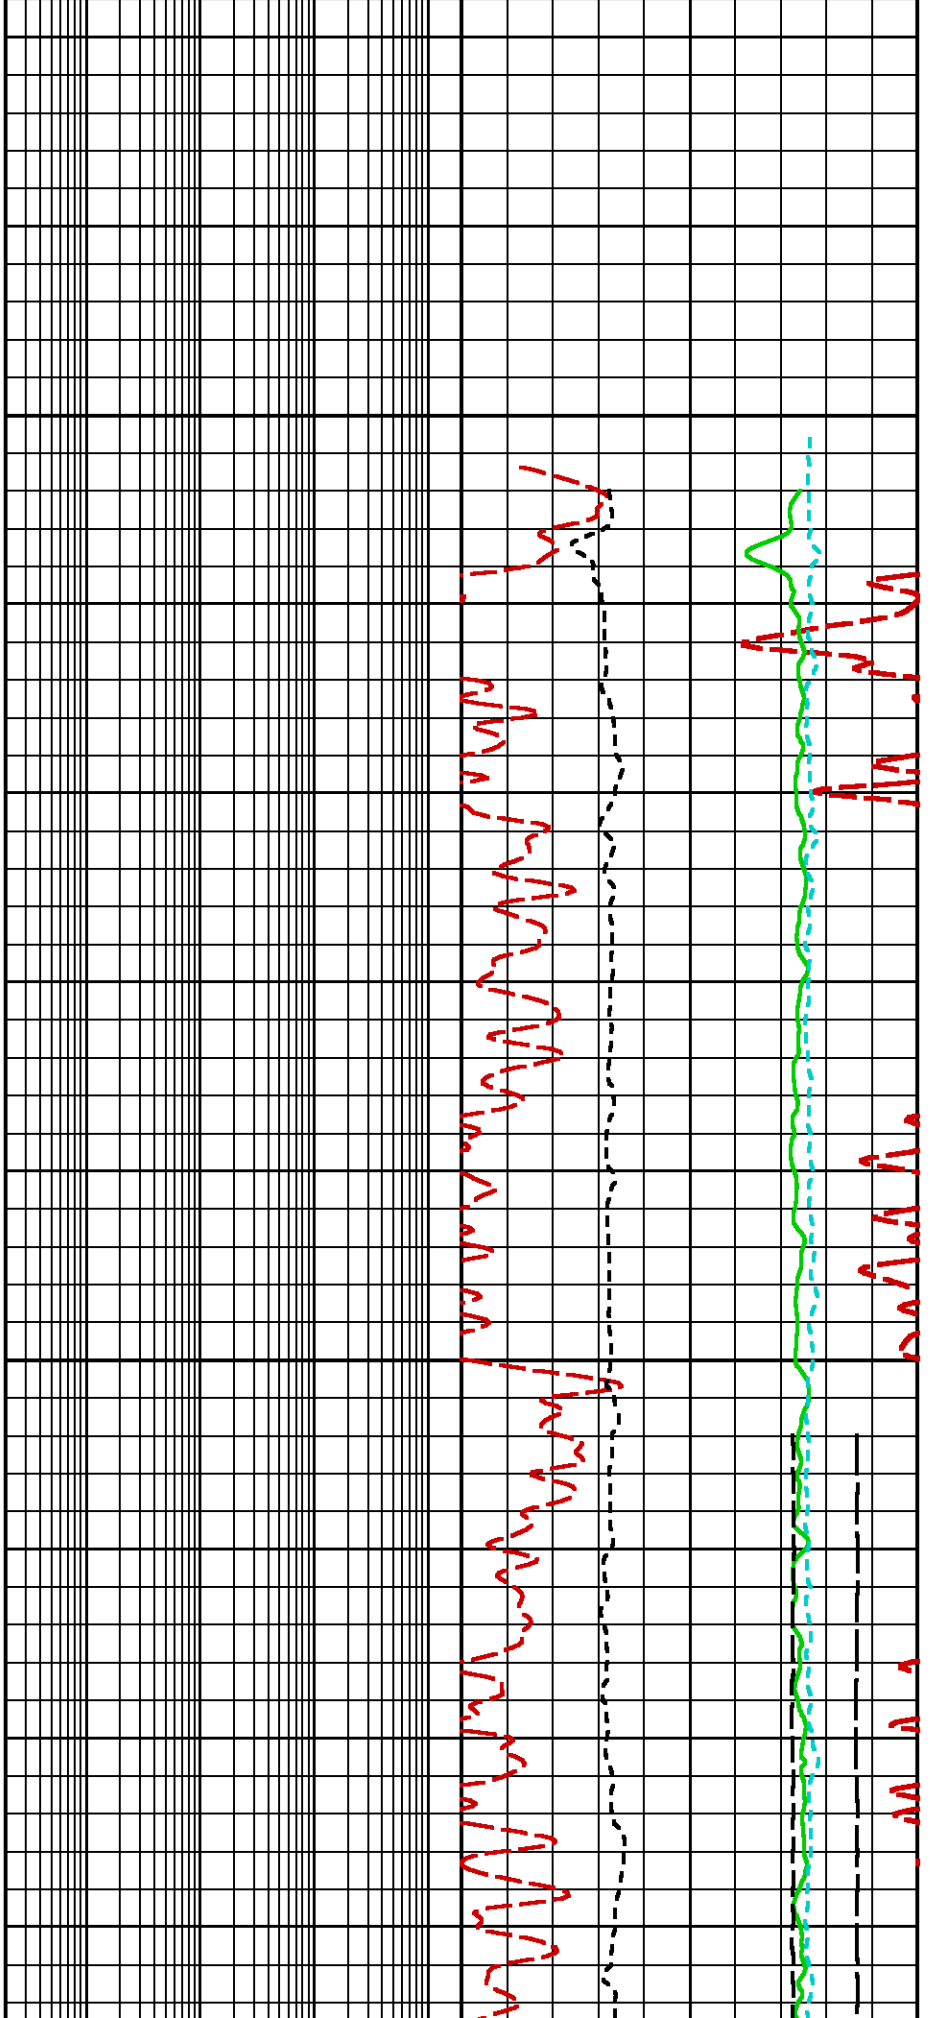

2350


2375

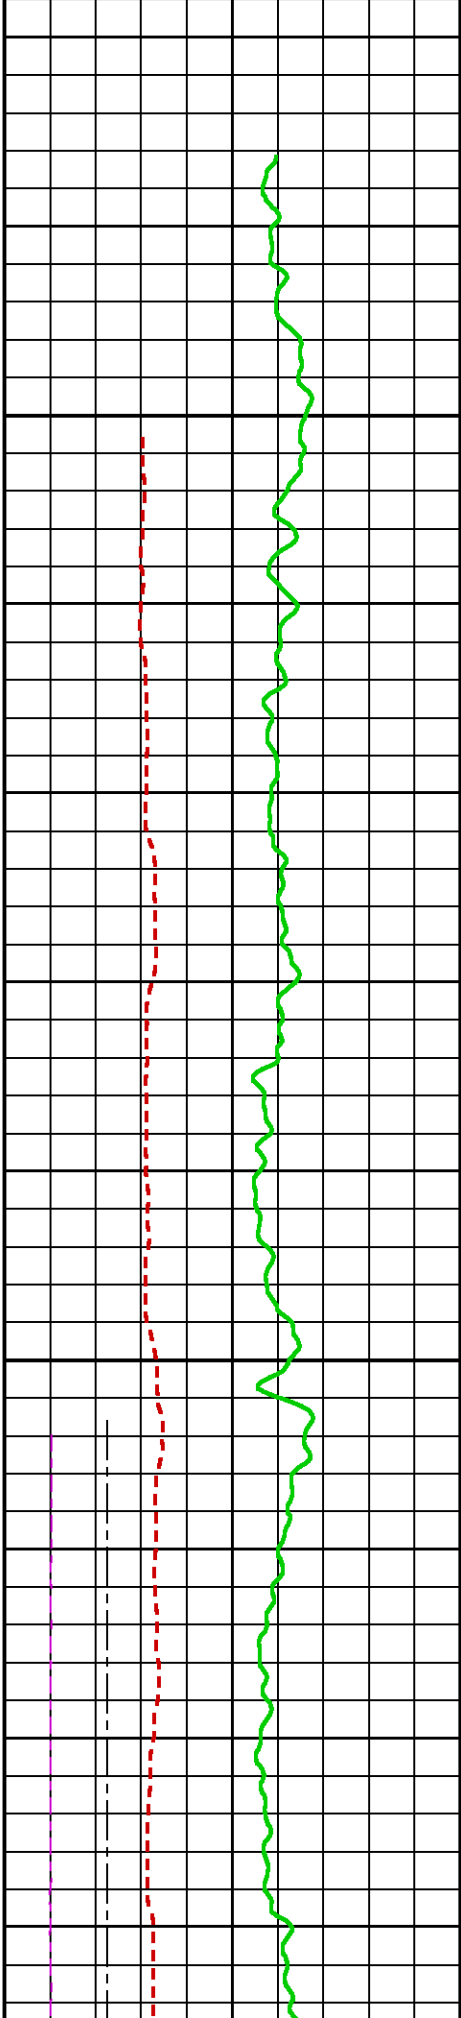


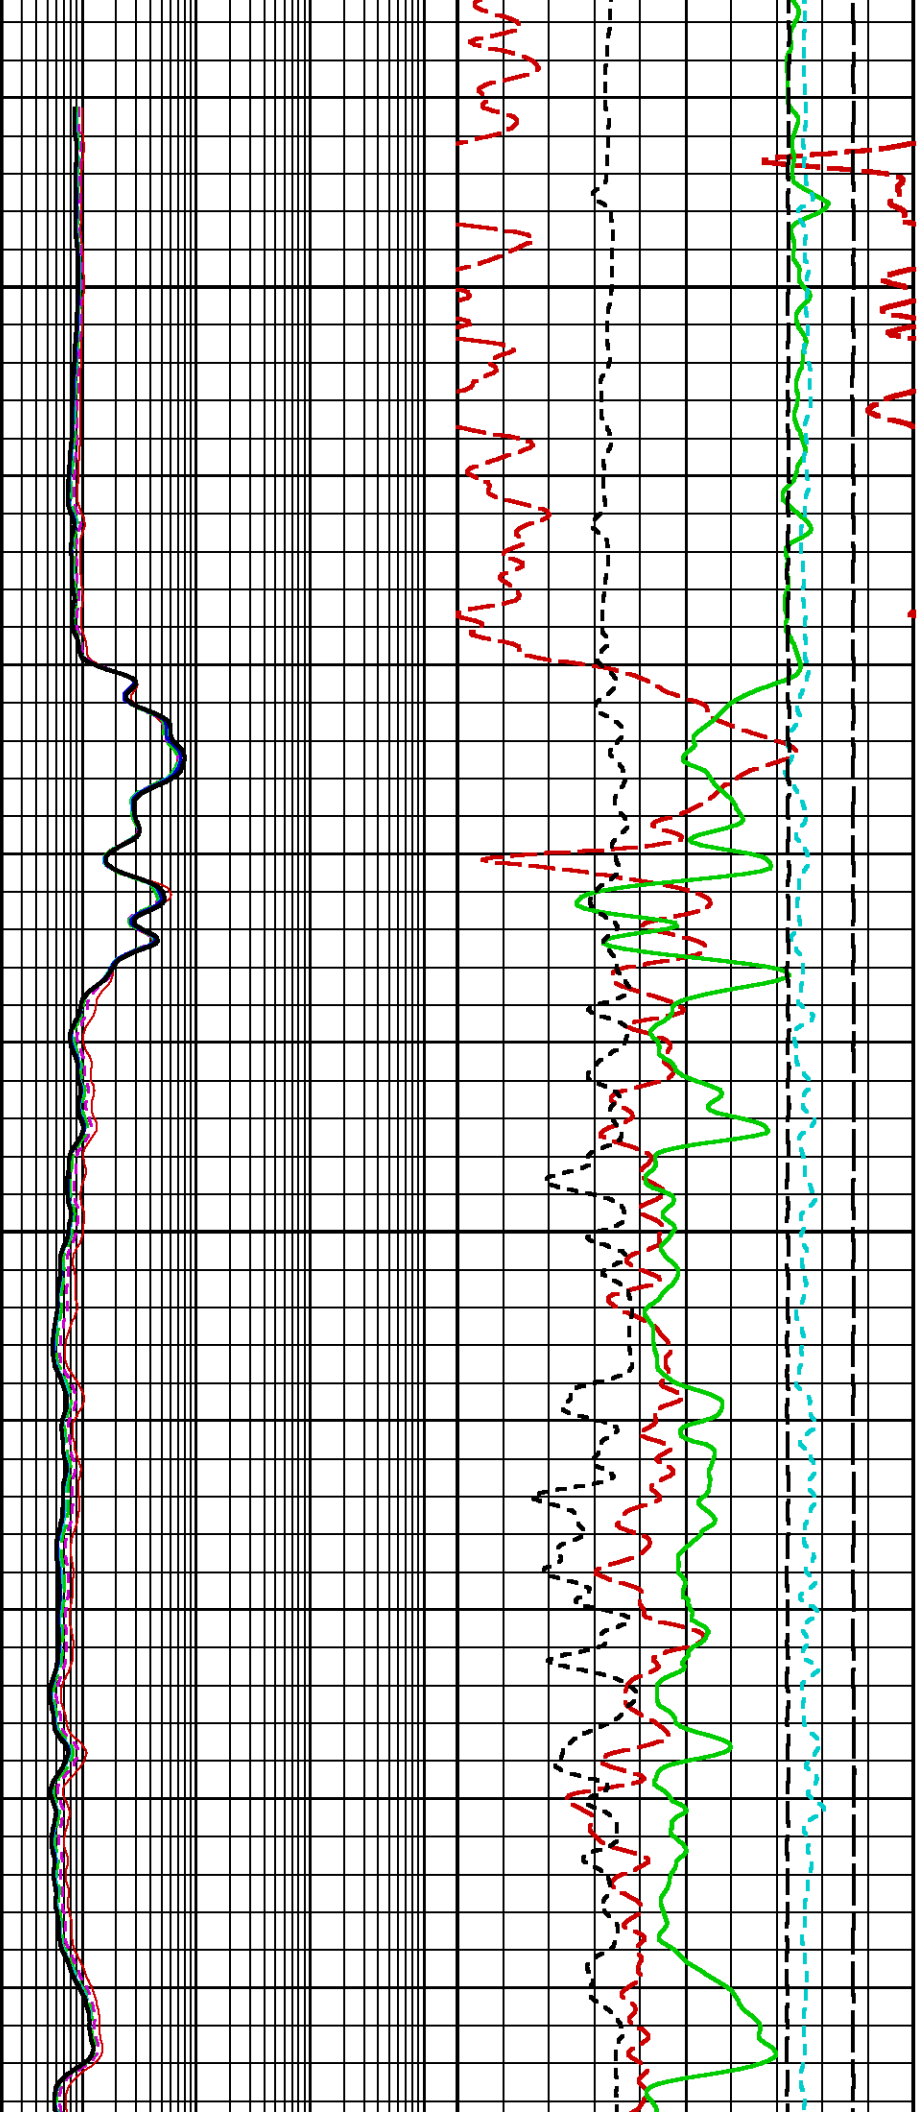

2400

2425

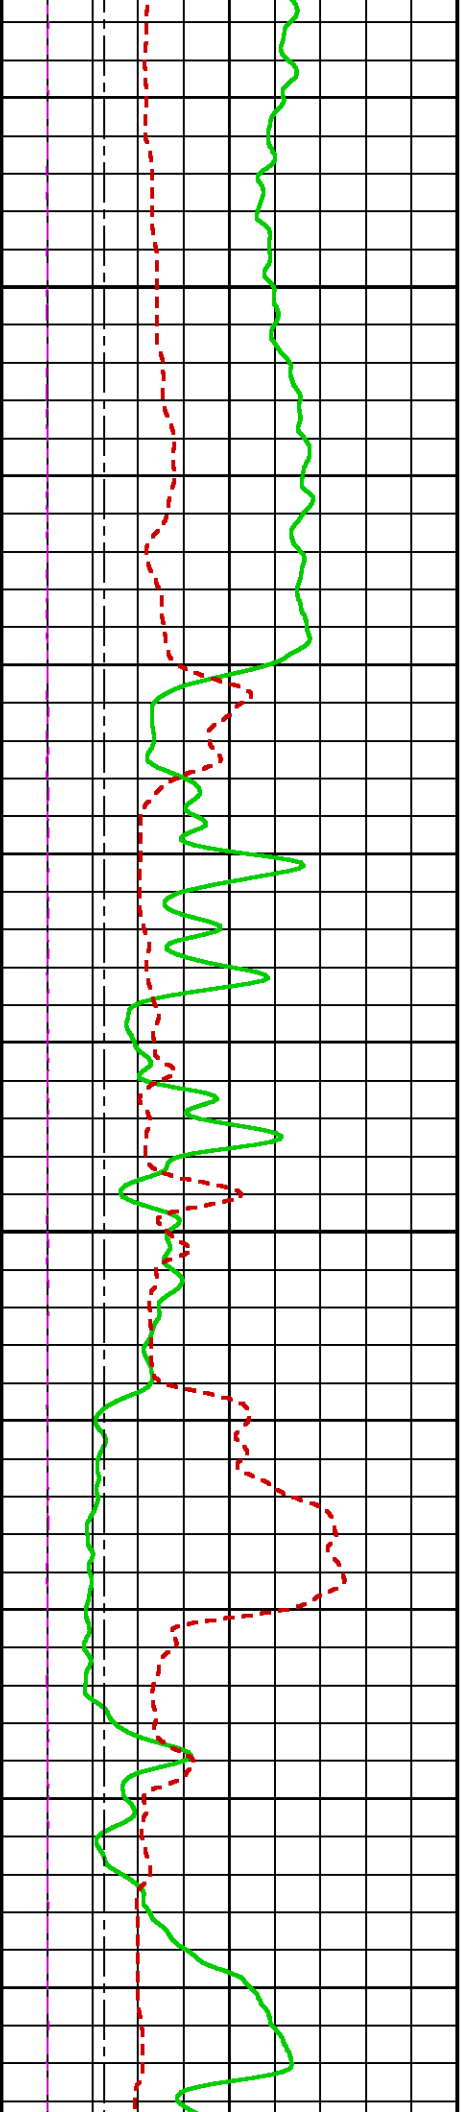


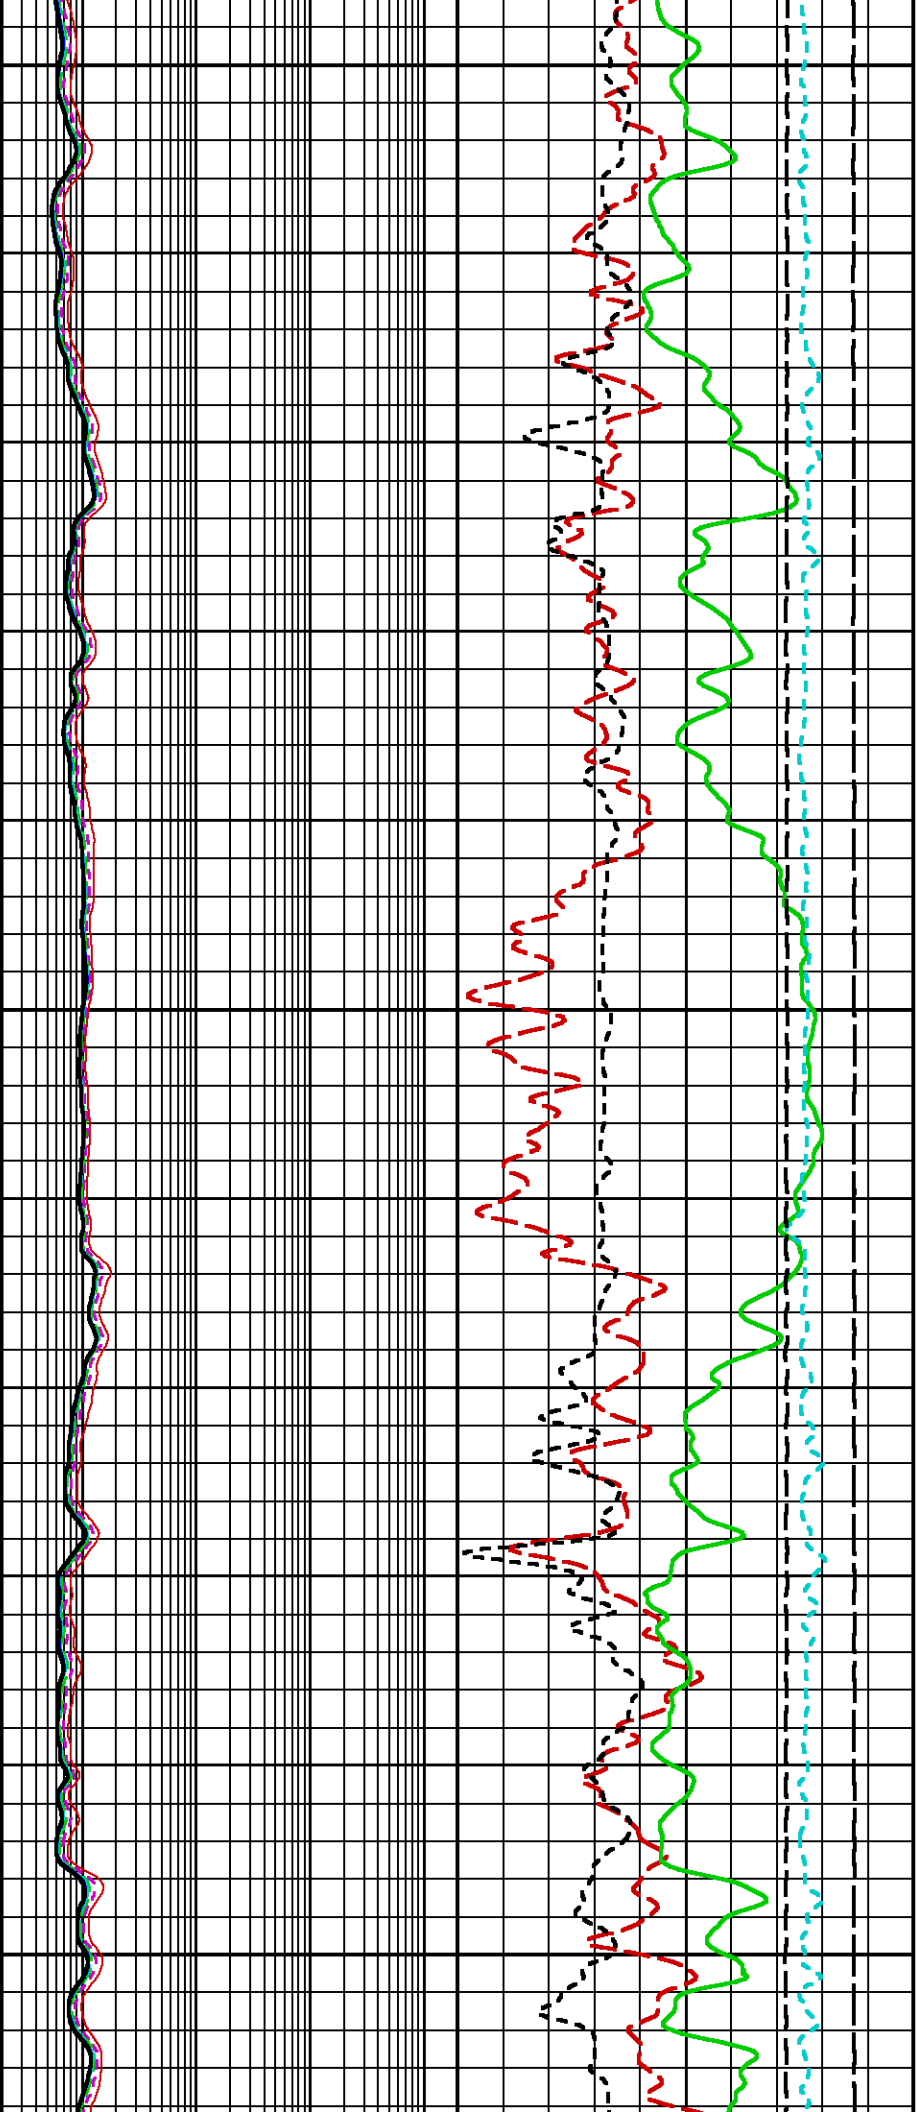


2450

2475

2500

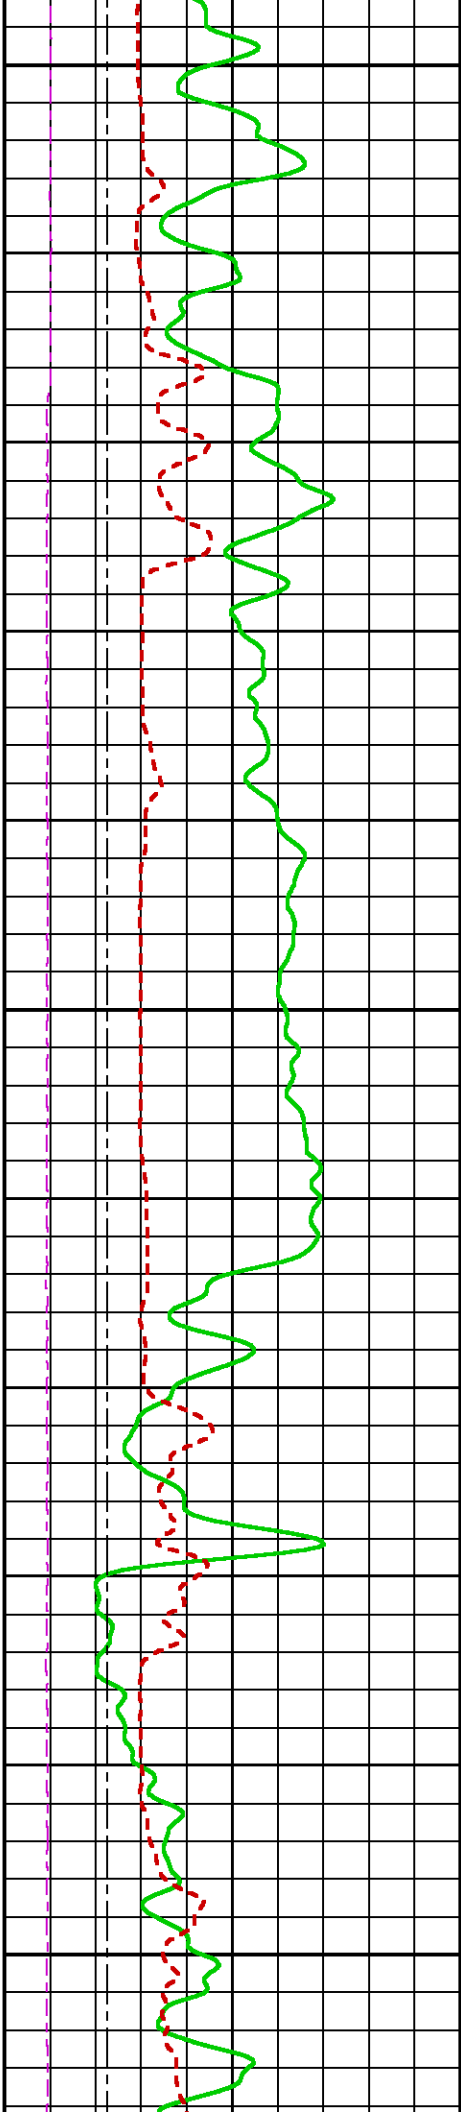

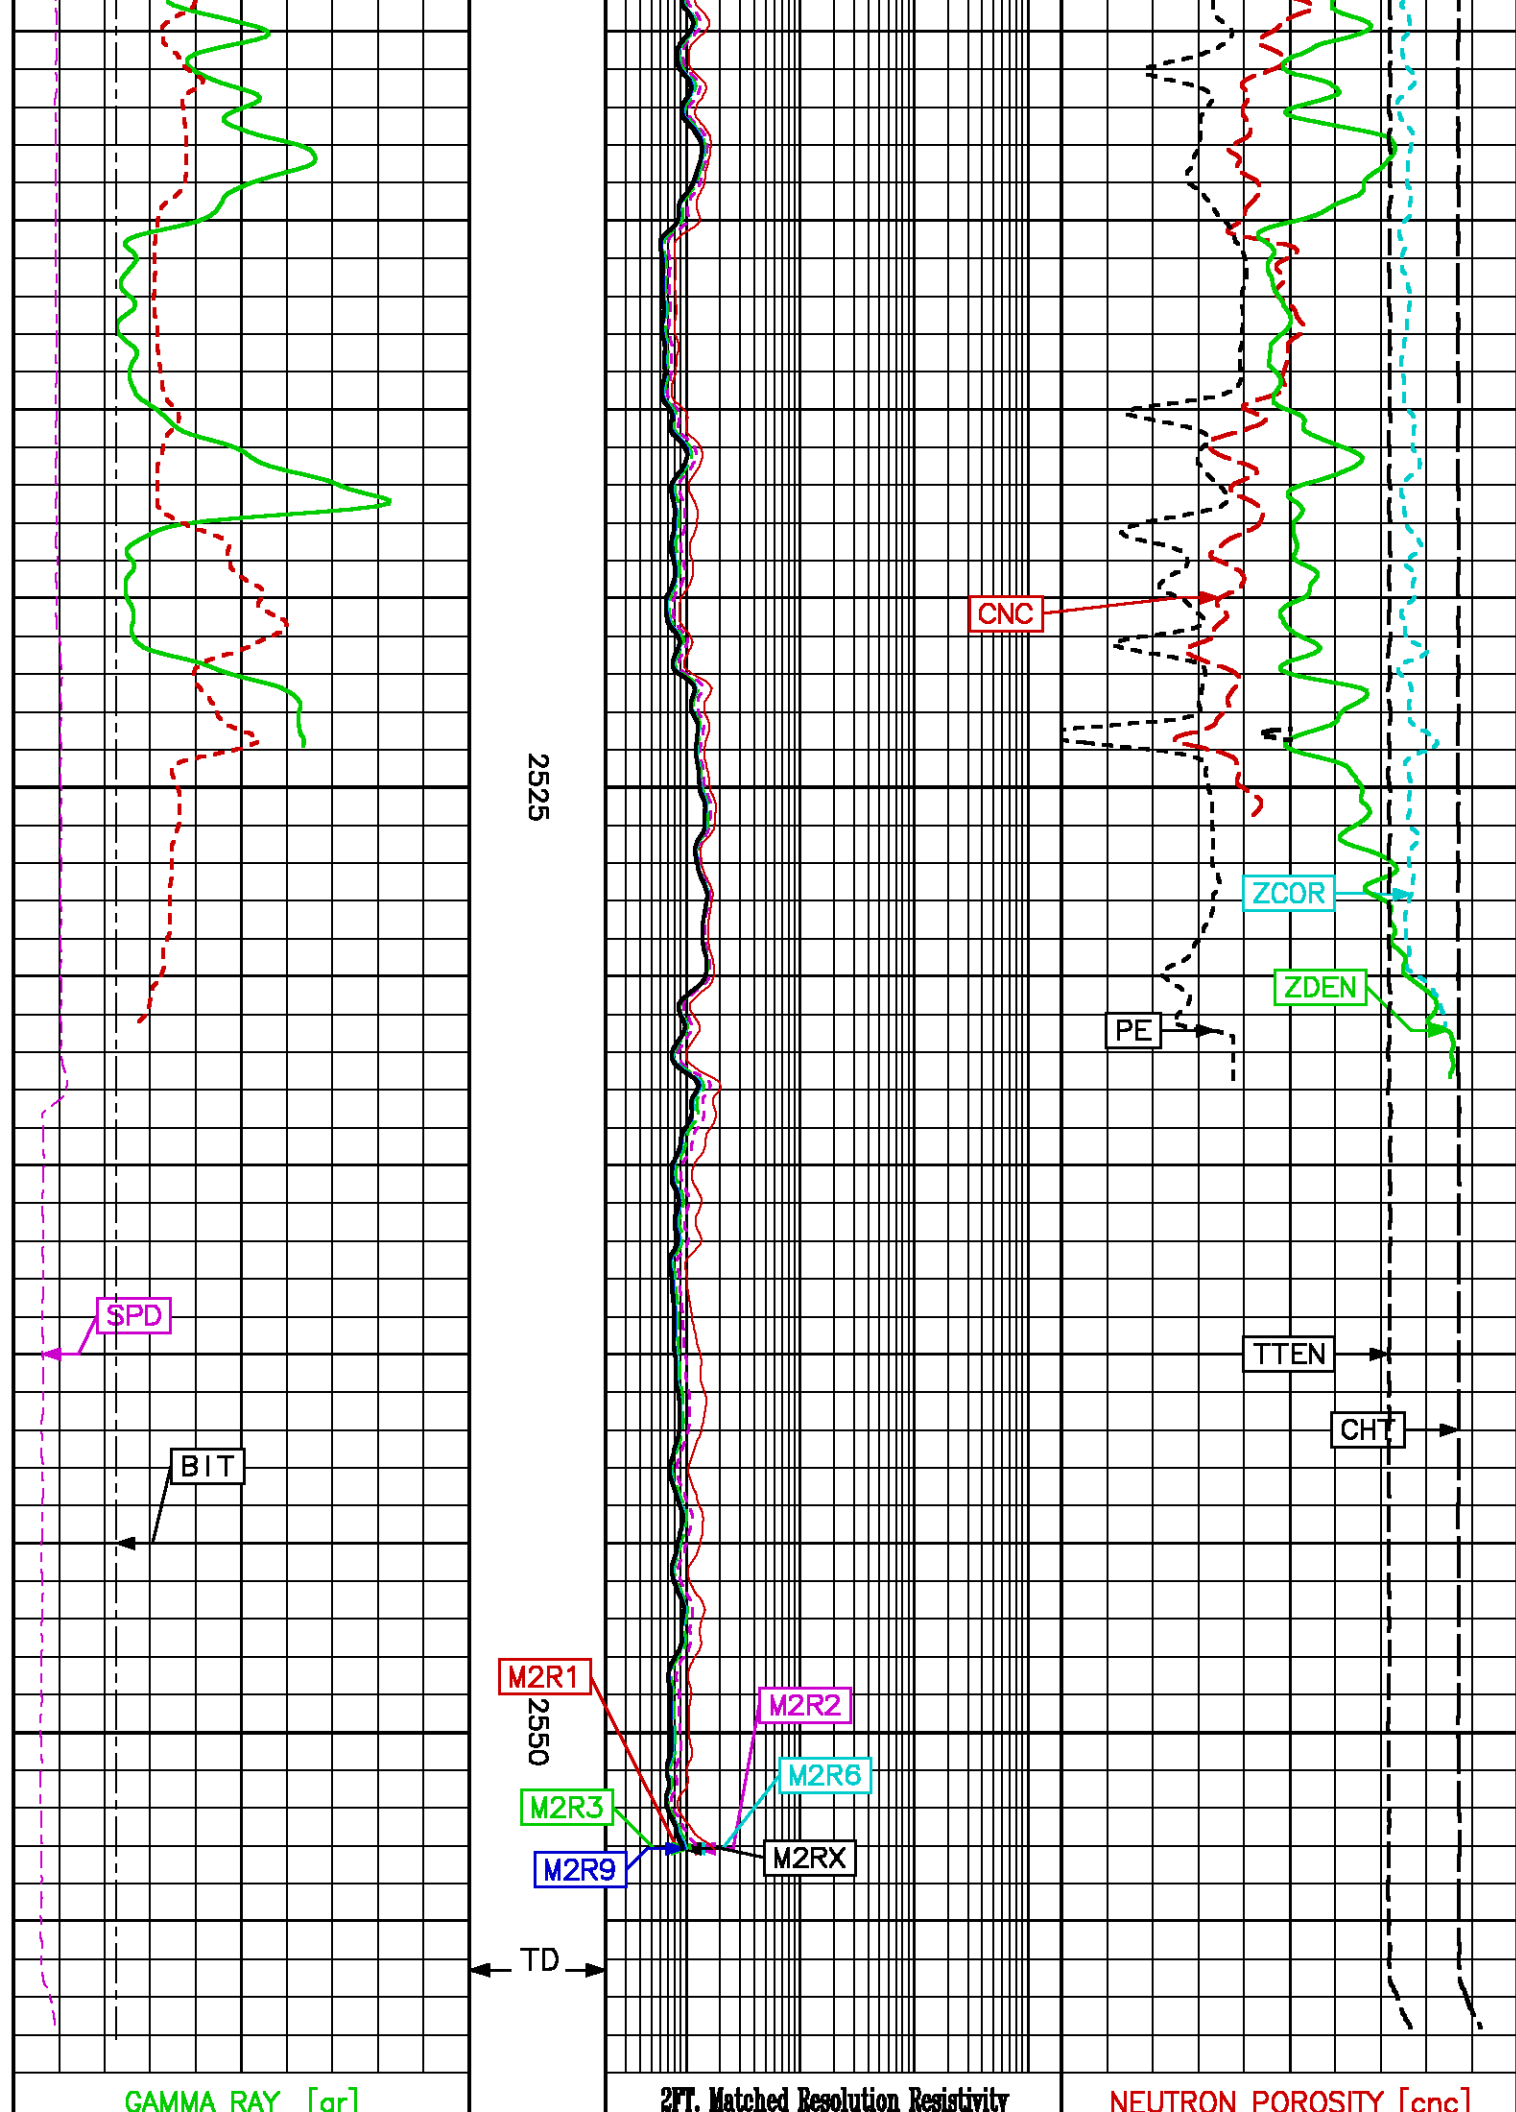

0	150	METERS	0.2	10 in. DOI [m2r1]	2000	60	0
(gAPI)				(ohm.m)		(pu)	
CALIPER [calx]	10 20		0.2	20 in. DOI [m2r2]	2000	BULK DENSITY [zden]	1.65 2.65
(in)				(ohm.m)		(g/cm3)	
BIT SIZE	10 20		0.2	30 in. DOI [m2r3]	2000	Z-CORR [zcor]	-0.5 0.5
(in)				(ohm.m)		(g/cm3)	
SPEED [spd]	0 50		0.2	60 in. DOI [m2r6]	2000	TOTAL TENSION [tten]	10000 0
(m/min)				(ohm.m)		(lbf)	
			0.2	90 in. DOI [m2r9]	2000	P.E. [pe]	10 0 10000 0
				(ohm.m)		(b/e)	CH-TENSION [cht]
			0.2	120 in. DOI [m2rx]	2000		(lbf)
				(ohm.m)			

CALIBRATION / VERIFICATION SUMMARY

Source File: /data/peak/bilabari_D3/slam.tp1

CHT PRIMARY CALIBRATION SUMMARY

TOOL #: 3981XA 186331

DATE/TIME PERFORMED: Sat Jul 1 01:12:15 2006

UNIT #: 3854SA 008601

	Signal Low (raw)	Signal High (raw)	Scale Mult	Scale Add	Engr Low (lbf)	Engr High (lbf)
CHT	140.29	669.21	5.05	-878.22	-170.00	2500.00

GR PRIMARY CALIBRATION SUMMARY

TOOL #: 1329XA 167531

DATE/TIME PERFORMED: Tue Oct 24 15:59:24 2006

UNIT #: 5753XB 10164949

CALB JIG #: 4702NK da-644

	BACKGROUND (cts/s)	CALBRTR ON (cts/s)	CR DIFF (cts/s)	MULT	BACKGROUND (gAPI)	CALBRTR ON (gAPI)	CALBRTR (gAPI)
GR	57.36	951.80	894.4	0.168	9.62	159.62	150
			830.0 980.0				

GR BEFORE LOG VERIFICATION SUMMARY

TOOL #: 1329XA 167531 DATE/TIME PERFORMED: Tue Oct 24 16:05:04 2006 DAYS SINCE CAL: 0

UNIT #: 5753XB 10164949 VERI JIG #: 4702NK da-644

	BACKGROUND (cts/s)	CALBRTR ON (cts/s)	MULT	BACKGROUND (gAPI)	CALBRTR ON (gAPI)	DIFF. (gAPI)
GR	56.93	952.96	0.168	9.55	159.81	150.26
						140.00 160.00

GR AFTER LOG VERIFICATION SUMMARY

TOOL #: 1329XA 167531 DATE/TIME PERFORMED: Thu Oct 26 05:11:36 2006 DAYS SINCE CAL: 1

UNIT #: 5753XB 10164949 VERI JIG #: 4702NK da-644

	BACKGROUND (cts/s)	CALBRTR ON (cts/s)	MULT	BACKGROUND (gAPI)	CALBRTR ON (gAPI)	DIFF. (gAPI)
GR	54.20	912.67	0.168	9.09	153.06	143.97
						140.26 160.26

SL II PRIMARY CALIBRATION SUMMARY

TOOL #: 1329XA 167531 DATE/TIME PERFORMED: Tue Oct 24 16:01:49 2006

UNIT #: 5753XB 10164949 CALIBRATOR ID: 4702NA da-644

	Bkgnd (cts/s)	Cal ON (cts/s)	Mult (gAPI/(cts/s))	Bkgnd (gAPI)	Cal ON (gAPI)	Cal Value (gAPI)
GR-SL (.06-3.5)	53.18	948.88	0.167	8.91	158.91	150

	Std Rate (cts/s)	Meas Rate (cts/s)	Tool Norm	Std Mult	Log Mult	App Con (pct ppm)
E (.15-3.0)	748	746.7	1.002			
			0.900 1.100			

K 0.01169 0.01171 8.700

U 0.02668 0.02673 20.000

TH 0.07158 0.07171 53.500

	Mult chnl/MeV	Add chnls	Chi Sqr qsa	QCAL	GAIN	QPKS
SPECTRUM	71.268	1.654	0.389	1.001	3014	5
				0.980 1.020		

P1 P2 P3 P4 P5
.352 MeV .609 MeV 1.120 MeV 1.765 MeV 2.204 MeV

Std Pk	25.80	44.20	81.00	127.40	159.00
Meas Pk	26.15	45.34	81.96	127.72	158.28
	22.80	28.80	40.20	48.20	76.00
	86.00	121.40	133.40	152.00	166.00
Fit Pk	26.74	45.06	81.47	127.44	158.73

SL_II BEFORE LOG VERIFICATION SUMMARY

TOOL #: 1329XA 167531 DATE/TIME PERFORMED: Tue Oct 24 16:05:21 2006 DAYS SINCE CAL: 0

UNIT #: 5753XB 10164949 CALIBRATOR ID: 4702NA da-644

	Bkgnd (cts/s)	Cal ON (cts/s)	Mult (gAPI/(cts/s))	Bkgnd (gAPI)	Cal ON (gAPI)	Cal Value (gAPI)
GR-SL (.06-3.5)	53.48	957.07	0.167	8.96	160.28	151
						135 165

	Std rate (cts/s)	Meas rate (cts/s)	Tool norm	Std Mult	Log Mult	App Con (pct ppm)
E (.15-3.0)	748	746.6	1.002			

K	0.01169	0.01171	8.744
			7.830 9.570
U	0.02668	0.02673	19.956
			18.000 22.000
TH	0.07158	0.07171	53.539
			48.150 58.850

	Mult chnl/MeV	Add chnls	Chi Sq qsa	QCAL	GAIN	QPKS
SPECTRUM	71.346	1.732	0.610	1.003	3014	5
				0.980 1.020		

	P1 .352 MeV	P2 .609 MeV	P3 1.120 MeV	P4 1.765 MeV	P5 2.204 MeV
Std Pk	25.80	44.20	81.00	127.40	159.00
Meas Pk	26.20	45.31	82.44	127.95	158.41
	22.80	28.80	40.20	48.20	76.00
	86.00	121.40	133.40	152.00	166.00
Fit Pk	26.85	45.18	81.64	127.66	158.98

SL_II AFTER LOG VERIFICATION SUMMARY

TOOL #: 1329XA 167531 DATE/TIME PERFORMED: Thu Oct 26 05:12:01 2006 DAYS SINCE CAL: 1

UNIT #: 5753XB 10164949 CALIBRATOR ID: 4702NA da-644

	Bkgnd (cts/s)	Cal ON (cts/s)	Mult (gAPI/(cts/s))	Bkgnd (gAPI)	Cal ON (gAPI)	Cal Value (gAPI)
GR-SL (.06-3.5)	50.27	915.98	0.167	8.42	153.40	145
						135 165

	Std rate (cts/s)	Meas rate (cts/s)	Tool norm	Std Mult	Log Mult	App Con (pct ppm)
E (.15-3.0)	748	737.9	1.002			
K				0.01169	0.01171	8.642 7.830 9.570
U				0.02668	0.02673	19.723 18.000 22.000
TH				0.07158	0.07171	52.915 48.150 58.850

	Mult chnl/MeV	Add chnls	Chi Sqr qsa	QCAL	GAIN	QPKS
SPECTRUM	70.122	0.989	0.684	0.980 0.980 1.020	3014	5

	P1 .352 MeV	P2 .609 MeV	P3 1.120 MeV	P4 1.765 MeV	P5 2.204 MeV
Std Pk	25.80	44.20	81.00	127.40	159.00
Meas Pk	24.96 22.80 28.80	43.85 40.20 48.20	80.44 76.00 86.00	124.93 121.40 133.40	155.01 152.00 166.00
Fit Pk	25.67	43.69	79.53	124.75	155.54

CN PRIMARY CALIBRATION SUMMARY

TOOL #: 2446XA 153117 DATE/TIME PERFORMED: Wed Aug 30 09:20:31 2006

UNIT #: 3854SA 008604 CALIBRATOR #: 2437XB 113132 SOURCE #: 4717XS 120419

	MEASURED CPS	DEADTM CORR CPS	DTC SSN/LSN	NOMINAL SSN/LSN	CORRECTION FACTOR	POROSITY (pu)
LSN	795.39	810.87				
SSN	2027.86	2113.58				
RATIO			2.60657	2.75100	1.05541 0.97000 1.07000	
CN						21.358

CN PRIMARY VERIFICATION SUMMARY

TOOL #: 2446XA 153117 DATE/TIME PERFORMED: Wed Aug 30 09:41:28 2006

UNIT #: 3854SA 008604 ICE BLOCK #: 4717ND D--251

	MEASURED CPS	DEADTM CORR CPS	DTC SSN/LSN	CORRECTION FACTOR	DTC CORR SSN/LSN	POROSITY (pu)
LSN	1856.04	1947.60				

LSN 1856.94 1943.60
SSN 4284.87 4686.59
RATIO 2.41129 1.05541 2.54607
CN 18.483

CN BEFORE LOG VERIFICATION SUMMARY

TOOL #: 2446XA 153117 DATE/TIME PERFORMED: Tue Oct 24 15:35:57 2006 DAYS SINCE CAL: 55

UNIT #: 5753XB 10164949 ICE BLOCK #: 4717ND D--251

	MEASURED CPS	DEADTM CORR CPS	DTC SSN/LSN	CORRECTION FACTOR	DTC CORR SSN/LSN	POROSITY (pu)
LSN	1895.08	1985.42				
SSN	4218.58	4607.40				
RATIO			2.32062	1.05541	2.45034	
CN						17.191 16.483 20.483

CN AFTER LOG VERIFICATION SUMMARY

TOOL #: 2446XA 153117 DATE/TIME PERFORMED: Thu Oct 26 05:05:16 2006 DAYS SINCE CAL: 56

UNIT #: 5753XB 10164949 ICE BLOCK #: 4717ND D--251

	MEASURED CPS	DEADTM CORR CPS	DTC SSN/LSN	CORRECTION FACTOR	DTC CORR SSN/LSN	POROSITY (pu)
LSN	1867.52	1955.20				
SSN	4251.37	4646.55				
RATIO			2.37651	1.05541	2.50946	
CN						17.986 15.191 19.191

CAL PRIMARY CALIBRATION SUMMARY

TOOL #: 2228MA 114428 DATE/TIME PERFORMED: Tue Oct 24 15:42:35 2006

UNIT #: 5753XB 10164949

SMALL RING (row)	LARGE RING (row)	MULT	ADD	SMALL RING (in)	LARGE RING (in)
---------------------	---------------------	------	-----	--------------------	--------------------

	(raw)	(raw)	(in)	(in)
CALIPER	1927.5	2638.8	0.00590	-3.58127
			7.800	12.000

CAL BEFORE LOG VERIFICATION SUMMARY

TOOL #: 2228MA 114428 DATE/TIME PERFORMED: Wed Oct 25 20:37:44 2006 DAYS SINCE CAL: 1

UNIT #: 5753XB 10164949

	I.D. (raw)	MULT	ADD	I.D. (in)
CALIPER	2682.3	0.00590	-3.43813	12.400

CAL AFTER LOG VERIFICATION SUMMARY

TOOL #: 2228MA 114428 DATE/TIME PERFORMED: Thu Oct 26 03:54:59 2006 DAYS SINCE CAL: 1

UNIT #: 5753XB 10164949

	I.D. (raw)	MULT	ADD	I.D. (in)
CALIPER	2708.2	0.00590	-3.43813	12.553
				11.900 12.900

ZDL PRIMARY CALIBRATION SUMMARY

TOOL #: 2228MA 114428 DATE/TIME PERFORMED: Wed Aug 30 13:13:34 2006

UNIT #: 3854SA 008604 CALB. BLOCK SET: 2225XA 112687 CS SOURCE #: 4703NT 001047

	SSD-NDTC (cts/s)	HRD1-NDTC (cts/s)	HRD2-NDTC (cts/s)	SHR	DEN (g/cm ³)	CORR (g/cm ³)	PE (b/e)
MG BLOCK (LO PE)	10653.9	4600.3	5550.0	0.698	1.687	0.007	2.142
				0.625 0.725			
AL BLOCK	5292.4	497.7	631.2		2.687	-0.013	
AL+SHIM (CORR)	7352.8	831.9	1016.9		2.598	0.165	
MG+SHIM (HI PE)		2180.5	2811.0	0.283			10.310
				0.280 0.310			
RATIO AL+SHIM/AL	1.39	1.67	1.61				
	1.35 1.45	1.60 1.80	1.80 1.80				
RATIO MG/AL	2.01	9.24	8.79				
	1.97 2.07	8.80 10.40	8.75 9.75				

BACKGROUND (cts/s)	CS PEAK CHANNEL #	AM PEAK CHANNEL #
1005.9	229.1	23.2
	225.0 235.0	21.0 25.0

ZDL PRIMARY VERIFICATION SUMMARY

TOOL #: 2228MA 114428

DATE/TIME PERFORMED: Sun Sep 3 18:17:27 2006

UNIT #: 3854SA 008604

VERI. JIG #: 4704NA V1150-1158

	SSD-NDTC (cts/s)	HRD1-NDTC (cts/s)	HRD2-NDTC (cts/s)	SHR	DEN (g/cm3)	CORR (g/cm3)	PE (b/e)
FIELD BLOCK	9895.4	2168.0	5221.9	0.184	1.882	0.040	15.676

ZDL BEFORE LOG VERIFICATION SUMMARY

TOOL #: 2228MA 114428

DATE/TIME PERFORMED: Tue Oct 24 15:36:11 2006

DAYS SINCE CAL: 55

UNIT #: 5753XB 10164949

VERI. JIG #: 4704NA V1150-1158

	SSD-NDTC (cts/s)	HRD1-NDTC (cts/s)	HRD2-NDTC (cts/s)	SHR	DEN (g/cm3)	CORR (g/cm3)	PE (b/e)
FIELD BLOCK	9886.4	2167.7	5226.5	0.184	1.880	0.039	15.675
				0.164 0.204	1.857 1.907	0.015 0.065	

ZDL AFTER LOG VERIFICATION SUMMARY

TOOL #: 2228MA 114428

DATE/TIME PERFORMED: Thu Oct 26 04:59:19 2006

DAYS SINCE CAL: 56

UNIT #: 5753XB 10164949

VERI. JIG #: 4704NA V1150-1158

	SSD-NDTC (cts/s)	HRD1-NDTC (cts/s)	HRD2-NDTC (cts/s)	SHR	DEN (g/cm3)	CORR (g/cm3)	PE (b/e)
FIELD BLOCK	9836.4	2161.3	5229.6	0.185	1.876	0.034	15.610
				0.164 0.204	1.855 1.905	0.014 0.064	

HDIL PRIMARY CALIBRATION SUMMARY

TOOL #: 1515MA 179516

DATE/TIME PERFORMED: Thu Aug 31 10:14:31 2006

UNIT #: 3854SA 008604

GRCOND ID & DATE: 12 083096

ZERO DATA(mv) 10 KHz 30 KHz 50 KHz 70 KHz 90 KHz 110 KHz 130 KHz 150 KHz

Coil 0 R	-0.010 -0.200 0.200	-0.009 -0.100 0.100	-0.007 -0.100 0.100	-0.002 -0.100 0.100	-0.000 -0.100 0.100	0.003 -0.100 0.100	0.005 -0.100 0.100	0.001 -0.100 0.100
Coil 0 Q	0.040 -1.000 1.000	0.013 -0.200 0.200	0.001 -0.100 0.100	-0.004 -0.100 0.100	-0.004 -0.100 0.100	-0.001 -0.100 0.100	0.001 -0.100 0.100	0.005 -0.100 0.100
Coil 1 R	-0.017 -0.200 0.200	-0.010 -0.100 0.100	0.002 -0.100 0.100	0.007 -0.100 0.100	0.007 -0.100 0.100	0.006 -0.100 0.100	0.001 -0.100 0.100	0.000 -0.100 0.100

Coil 1 Q	0.029 -1.000 1.000	0.001 -0.200 0.200	-0.008 -0.100 0.100	-0.005 -0.100 0.100	0.001 -0.100 0.100	0.004 -0.100 0.100	0.002 -0.100 0.100	-0.001 -0.100 0.100
Coil 2 R	-0.008 -0.200 0.200	-0.010 -0.100 0.100	-0.008 -0.100 0.100	0.003 -0.100 0.100	0.014 -0.100 0.100	0.010 -0.100 0.100	-0.000 -0.100 0.100	-0.006 -0.100 0.100
Coil 2 Q	0.032 -1.000 1.000	0.003 -0.200 0.200	-0.009 -0.100 0.100	-0.011 -0.100 0.100	-0.004 -0.100 0.100	0.008 -0.100 0.100	0.009 -0.100 0.100	0.001 -0.100 0.100
Coil 3 R	-0.011 -0.100 0.100	-0.013 -0.100 0.100	-0.012 -0.100 0.100	-0.004 -0.100 0.100	0.007 -0.100 0.100	0.009 -0.100 0.100	0.009 -0.100 0.100	0.005 -0.100 0.100
Coil 3 Q	0.047 -0.500 0.500	0.005 -0.200 0.200	-0.002 -0.100 0.100	-0.007 -0.100 0.100	-0.009 -0.100 0.100	-0.004 -0.100 0.100	-0.000 -0.100 0.100	0.006 -0.100 0.100
Coil 4 R	0.015 -0.200 0.200	-0.001 -0.200 0.200	-0.021 -0.200 0.200	-0.012 -0.200 0.200	0.007 -0.200 0.200	0.023 -0.200 0.200	0.006 -0.200 0.200	-0.011 -0.200 0.200
Coil 4 Q	0.003 -1.000 1.000	0.040 -0.400 0.400	0.006 -0.200 0.200	-0.022 -0.200 0.200	-0.018 -0.200 0.200	0.008 -0.200 0.200	0.017 -0.200 0.200	0.009 -0.200 0.200
Coil 5 R	-0.053 -0.400 0.400	-0.053 -0.400 0.400	-0.026 -0.400 0.400	-0.012 -0.400 0.400	0.010 -0.400 0.400	0.026 -0.400 0.400	0.032 -0.400 0.400	0.006 -0.400 0.400
Coil 5 Q	0.172 -2.000 2.000	0.021 -0.800 0.800	-0.020 -0.400 0.400	-0.035 -0.400 0.400	-0.021 -0.400 0.400	-0.015 -0.400 0.400	0.013 -0.400 0.400	0.032 -0.400 0.400
Coil 6 R	-0.125 -1.000 1.000	-0.079 -1.000 1.000	-0.049 -1.000 1.000	-0.005 -1.000 1.000	0.034 -1.000 1.000	0.035 -1.000 1.000	-0.003 -1.000 1.000	-0.022 -1.000 1.000
Coil 6 Q	0.177 -5.000 5.000	0.032 -2.000 2.000	-0.003 -1.000 1.000	-0.056 -1.000 1.000	-0.026 -1.000 1.000	0.023 -1.000 1.000	0.018 -1.000 1.000	0.015 -1.000 1.000

ELEC. GAINS 10 KHz 30 KHz 50 KHz 70 KHz 90 KHz 110 KHz 130 KHz 150 KHz

Coil 0 M	124.85 100.00 150.00	124.13 100.00 150.00	122.46 98.00 150.00	119.16 96.00 140.00	114.44 92.00 140.00	108.47 87.00 150.00	101.56 82.00 120.00	93.47 76.00 110.00
Coil 0 P	7.384 6.000 9.000	23.278 19.000 28.000	39.203 32.000 47.000	55.348 44.000 66.000	71.379 57.000 85.000	87.453 70.000 100.000	103.253 82.000 120.000	119.075 95.000 140.000
Coil 1 M	224.86 180.00 270.00	223.73 180.00 270.00	221.07 170.00 260.00	215.58 170.00 250.00	207.31 160.00 250.00	196.70 160.00 250.00	184.06 150.00 220.00	168.99 140.00 200.00
Coil 1 P	7.438 6.000 9.000	23.588 19.000 28.000	39.778 32.000 48.000	56.223 45.000 67.000	72.661 57.000 86.000	89.231 70.000 110.000	105.521 83.000 120.000	121.919 96.000 140.000
Coil 2 M	453.14 360.00 540.00	451.33 360.00 540.00	446.90 350.00 530.00	437.09 340.00 510.00	422.23 330.00 500.00	402.79 310.00 470.00	379.49 300.00 440.00	351.01 270.00 410.00
Coil 2 P	7.424 6.000 9.000	23.419 19.000 29.000	39.513 32.000 48.000	55.879 45.000 67.000	72.278 58.000 87.000	88.789 71.000 110.000	105.147 84.000 130.000	121.703 96.000 140.000
Coil 3 M	722.43 590.00 880.00	718.42 580.00 870.00	709.36 570.00 850.00	691.48 550.00 830.00	665.51 530.00 800.00	632.39 500.00 760.00	593.61 470.00 710.00	548.14 440.00 650.00
Coil 3 P	7.498 6.000 10.000	23.715 20.000 29.000	39.950 33.000 49.000	56.393 46.000 69.000	72.793 59.000 89.000	89.237 72.000 110.000	105.455 85.000 130.000	121.814 98.000 150.000
Coil 4 M	1144.4 900.0 1400.0	1138.9 900.0 1300.0	1126.4 900.0 1300.0	1100.2 850.0 1300.0	1061.0 800.0 1200.0	1010.4 800.0 1200.0	950.2 750.0 1100.0	879.1 700.0 1000.0
Coil 4 P	7.560 6.000 10.000	23.918 20.000 30.000	40.328 33.000 50.000	56.985 46.000 70.000	73.633 60.000 90.000	90.360 73.000 110.000	106.943 86.000 130.000	123.673 99.000 150.000
Coil 5 M	2345.1 1900.0 2800.0	2325.2 1800.0 2800.0	2282.7 1800.0 2700.0	2206.8 1800.0 2600.0	2102.5 1700.0 2500.0	1976.0 1600.0 2400.0	1833.1 1500.0 2200.0	1672.7 1400.0 2100.0
Coil 5 P	8.368 6.000 10.000	26.297 20.000 31.000	44.197 34.000 51.000	62.208 48.000 72.000	80.054 62.000 93.000	97.829 76.000 110.000	115.298 89.000 130.000	132.787 100.000 150.000
Coil 6 M	5945.3 4700.0 7100.0	5904.1 4700.0 7000.0	5812.4 4600.0 6900.0	5636.5 4400.0 6600.0	5382.9 4200.0 6400.0	5062.6 4000.0 6000.0	4685.6 3700.0 5600.0	4251.4 3400.0 5100.0
Coil 6 P	8.778 7.000 10.000	27.577 22.000 32.000	46.405 36.000 54.000	65.483 51.000 76.000	84.557 65.000 98.000	103.664 80.000 120.000	122.544 94.000 140.000	141.507 110.000 160.000

AM Factor 10 KHz 30 KHz 50 KHz 70 KHz 90 KHz 110 KHz 130 KHz 150 KHz

Coil 6 P	8.778	27.577	46.405	65.483	84.557	103.664	122.544	141.507
----------	-------	--------	--------	--------	--------	---------	---------	---------

Coil 0 R	299 -200 800	-236 -500 100	-281 -800 0	-280 -800 0	-269 -500 0	-256 -500 0	-244 -500 0	-232 -500 0
Coil 0 Q	1444 -3000 8000	501 -1000 2000	238 -1000 1200	105 -500 800	21 -400 600	-39 -400 500	-86 -400 400	-124 -400 300
Coil 1 R	538 450 850	52 20 115	-8 -30 45	-27 -50 20	-36 -55 0	-41 -60 0	-44 -60 0	-45 -60 0
Coil 1 Q	1089 0 2500	441 0 900	273 0 600	194 0 400	148 0 300	117 0 250	94 0 200	77 0 200
Coil 2 R	177.3 140.0 230.0	22.2 0.0 51.0	2.5 -10.0 25.0	-3.9 -15.0 15.0	-6.7 -16.0 10.0	-8.0 -16.0 7.0	-8.8 -16.0 5.0	-9.8 -16.0 3.0
Coil 2 Q	505.3 -200.0 1000.0	197.5 0.0 350.0	125.3 0.0 220.0	93.7 0.0 180.0	76.3 0.0 130.0	65.7 0.0 110.0	59.2 0.0 100.0	54.5 0.0 90.0
Coil 3 R	52.2 37.0 82.0	7.3 0.0 12.0	1.4 -3.0 6.0	-0.6 -4.0 4.0	-1.5 -5.0 2.0	-2.3 -5.0 1.0	-5.6 -6.0 1.0	-4.7 -6.0 1.0
Coil 3 Q	55.6 -140.0 280.0	30.7 -40.0 100.0	25.1 -20.0 70.0	24.0 -10.0 60.0	24.7 -10.0 50.0	26.9 -10.0 50.0	28.8 -10.0 50.0	26.3 -10.0 50.0
Coil 4 R	13.54 5.00 18.00	1.32 -1.00 4.00	-0.06 -2.00 2.00	-0.66 -2.20 2.00	-0.96 -2.50 2.00	-1.19 -3.00 2.00	-1.32 -3.00 2.00	-1.54 -4.00 2.00
Coil 4 Q	14.38 -100.00 100.00	12.00 -30.00 50.00	13.64 -20.00 40.00	16.47 -10.00 40.00	19.66 -10.00 40.00	22.99 -10.00 45.00	26.63 -10.00 50.00	30.32 -10.00 60.00
Coil 5 R	1.67 -2.00 5.80	-1.16 -3.20 2.40	-1.61 -4.50 3.10	-2.05 -4.70 3.20	-2.11 -4.80 3.20	-2.23 -5.00 3.30	-2.27 -5.20 3.40	-2.38 -5.40 3.50
Coil 5 Q	7.53 -60.00 70.00	8.40 -20.00 30.00	11.40 -20.00 30.00	14.80 -20.00 35.00	18.32 -20.00 45.00	22.02 -20.00 50.00	25.87 -20.00 60.00	29.72 -30.00 70.00
Coil 6 R	-1.69 -4.80 1.00	-2.26 -5.70 3.80	-2.68 -6.50 4.90	-2.78 -6.90 5.40	-2.98 -7.30 5.80	-2.90 -7.50 6.00	-2.83 -7.70 6.10	-2.86 -7.90 6.30
Coil 6 Q	3.28 -30.00 30.00	8.50 -20.00 25.00	13.53 -20.00 35.00	18.50 -30.00 50.00	23.61 -35.00 80.00	28.62 -40.00 70.00	34.00 -50.00 80.00	39.50 -60.00 100.00

MM Factor 10 KHz 30 KHz 50 KHz 70 KHz 90 KHz 110 KHz 130 KHz 150 KHz

Coil 0 M	1.016 0.900 1.100	1.014 0.900 1.100	1.010 0.900 1.100	1.010 0.900 1.100	1.009 0.900 1.100	1.009 0.900 1.100	1.009 0.900 1.100	1.008 0.900 1.100
Coil 0 P	0.241 -2.000 2.000	0.224 -2.000 2.000	0.264 -2.000 2.000	0.229 -2.000 2.000	0.179 -2.000 2.000	0.190 -2.000 2.000	0.183 -2.000 2.000	0.146 -2.000 2.000
Coil 1 M	0.999 0.900 1.100	0.997 0.900 1.100	0.994 0.900 1.100	0.994 0.900 1.100	0.992 0.900 1.100	0.992 0.900 1.100	0.991 0.900 1.100	0.991 0.900 1.100
Coil 1 P	0.122 -2.000 2.000	0.220 -2.000 2.000	0.243 -2.000 2.000	0.243 -2.000 2.000	0.233 -2.000 2.000	0.260 -2.000 2.000	0.204 -2.000 2.000	0.168 -2.000 2.000
Coil 2 M	1.005 0.900 1.100	1.002 0.900 1.100	1.002 0.900 1.100	1.002 0.900 1.100	1.002 0.900 1.100	1.002 0.900 1.100	1.001 0.900 1.100	1.000 0.900 1.100
Coil 2 P	0.085 -2.000 2.000	0.042 -2.000 2.000	0.031 -2.000 2.000	0.052 -2.000 2.000	0.117 -2.000 2.000	0.162 -2.000 2.000	0.147 -2.000 2.000	0.143 -2.000 2.000
Coil 3 M	1.012 0.900 1.100	1.011 0.900 1.100	1.011 0.900 1.100	1.012 0.900 1.100	1.012 0.900 1.100	1.013 0.900 1.100	1.015 0.900 1.100	1.013 0.900 1.100
Coil 3 P	0.076 -2.000 2.000	0.033 -2.000 2.000	0.014 -2.000 2.000	0.003 -2.000 2.000	0.022 -2.000 2.000	0.014 -2.000 2.000	0.088 -2.000 2.000	0.239 -2.000 2.000
Coil 4 M	1.016 0.900 1.100	1.015 0.900 1.100	1.015 0.900 1.100	1.016 0.900 1.100	1.015 0.900 1.100	1.015 0.900 1.100	1.014 0.900 1.100	1.014 0.900 1.100
Coil 4 P	0.083 -2.000 2.000	0.046 -2.000 2.000	0.015 -2.000 2.000	0.032 -2.000 2.000	0.081 -2.000 2.000	0.103 -2.000 2.000	0.110 -2.000 2.000	0.092 -2.000 2.000
Coil 5 M	1.020 0.900 1.100	1.020 0.900 1.100	1.020 0.900 1.100	1.020 0.900 1.100	1.019 0.900 1.100	1.021 0.900 1.100	1.019 0.900 1.100	1.019 0.900 1.100
Coil 5 P	0.021 -2.000 2.000	-0.001 -2.000 2.000	0.034 -2.000 2.000	0.058 -2.000 2.000	0.070 -2.000 2.000	0.072 -2.000 2.000	0.159 -2.000 2.000	0.207 -2.000 2.000
Coil 6 M	1.017 0.900 1.100	1.018 0.900 1.100	1.017 0.900 1.100	1.015 0.900 1.100	1.014 0.900 1.100	1.020 0.900 1.100	1.019 0.900 1.100	1.017 0.900 1.100

Coil 6 P

0.059	0.178	0.117	0.207	0.182	0.153	0.196	0.128
-2.000 2.000	-2.000 2.000	-2.000 2.000	-2.000 2.000	-2.000 2.000	-2.000 2.000	-2.000 2.000	-2.000 2.000

PARMS

TCID 0

TCID 1

Cal Temp

T Factor

(degF)

IDs

1.883

0.926

80.5

1.04

HDIL BEFORE LOG VERIFICATION SUMMARY

TOOL #: 1515MA 179516 DATE/TIME PERFORMED: Tue Oct 24 16:07:21 2006 DAYS SINCE CAL: 54

UNIT #: 5753XB 10164949

ZERO DATA(mv) 10 KHz 30 KHz 50 KHz 70 KHz 90 KHz 110 KHz 130 KHz 150 KHz

Coil 0 R	-0.008	-0.011	-0.007	-0.002	0.002	0.006	0.005	0.002
	-0.200 0.200	-0.100 0.100	-0.100 0.100	-0.100 0.100	-0.100 0.100	-0.100 0.100	-0.100 0.100	-0.100 0.100
Coil 0 Q	0.041	0.011	-0.002	-0.005	-0.004	-0.001	0.002	0.005
	-1.000 1.000	-0.200 0.200	-0.100 0.100	-0.100 0.100	-0.100 0.100	-0.100 0.100	-0.100 0.100	-0.100 0.100
Coil 1 R	-0.015	-0.010	0.001	0.009	0.008	0.003	-0.000	-0.001
	-0.200 0.200	-0.100 0.100	-0.100 0.100	-0.100 0.100	-0.100 0.100	-0.100 0.100	-0.100 0.100	-0.100 0.100
Coil 1 Q	0.030	-0.001	-0.009	-0.004	0.003	0.004	0.003	-0.001
	-1.000 1.000	-0.200 0.200	-0.100 0.100	-0.100 0.100	-0.100 0.100	-0.100 0.100	-0.100 0.100	-0.100 0.100
Coil 2 R	-0.013	-0.011	-0.004	0.006	0.013	0.008	-0.001	-0.008
	-0.200 0.200	-0.100 0.100	-0.100 0.100	-0.100 0.100	-0.100 0.100	-0.100 0.100	-0.100 0.100	-0.100 0.100
Coil 2 Q	0.031	-0.001	-0.010	-0.012	-0.002	0.010	0.009	0.000
	-1.000 1.000	-0.200 0.200	-0.100 0.100	-0.100 0.100	-0.100 0.100	-0.100 0.100	-0.100 0.100	-0.100 0.100
Coil 3 R	-0.010	-0.014	-0.008	-0.002	0.009	0.012	0.011	0.008
	-0.100 0.100	-0.100 0.100	-0.100 0.100	-0.100 0.100	-0.100 0.100	-0.100 0.100	-0.100 0.100	-0.100 0.100
Coil 3 Q	0.047	0.005	-0.003	-0.011	-0.010	-0.004	0.002	0.003
	-0.500 0.500	-0.200 0.200	-0.100 0.100	-0.100 0.100	-0.100 0.100	-0.100 0.100	-0.100 0.100	-0.100 0.100
Coil 4 R	-0.052	-0.044	-0.018	0.003	0.016	0.016	0.000	-0.010
	-0.200 0.200	-0.200 0.200	-0.200 0.200	-0.200 0.200	-0.200 0.200	-0.200 0.200	-0.200 0.200	-0.200 0.200
Coil 4 Q	0.107	0.017	-0.014	-0.023	-0.011	0.011	0.015	0.005
	-1.000 1.000	-0.400 0.400	-0.200 0.200	-0.200 0.200	-0.200 0.200	-0.200 0.200	-0.200 0.200	-0.200 0.200
Coil 5 R	-0.055	-0.054	-0.036	-0.013	0.007	0.025	0.020	0.007
	-0.400 0.400	-0.400 0.400	-0.400 0.400	-0.400 0.400	-0.400 0.400	-0.400 0.400	-0.400 0.400	-0.400 0.400
Coil 5 Q	0.174	0.027	-0.015	-0.034	-0.026	-0.017	0.003	0.014
	-2.000 2.000	-0.800 0.800	-0.400 0.400	-0.400 0.400	-0.400 0.400	-0.400 0.400	-0.400 0.400	-0.400 0.400
Coil 6 R	-0.131	-0.112	-0.028	0.001	0.039	0.019	-0.005	-0.035
	-1.000 1.000	-1.000 1.000	-1.000 1.000	-1.000 1.000	-1.000 1.000	-1.000 1.000	-1.000 1.000	-1.000 1.000
Coil 6 Q	0.247	0.027	-0.037	-0.070	-0.013	0.019	0.023	-0.007
	-5.000 5.000	-2.000 2.000	-1.000 1.000	-1.000 1.000	-1.000 1.000	-1.000 1.000	-1.000 1.000	-1.000 1.000

ELEC. GAINS 10 KHz 30 KHz 50 KHz 70 KHz 90 KHz 110 KHz 130 KHz 150 KHz

Coil 0 M	124.84	124.04	122.43	119.28	114.18	108.04	100.79	92.78
	100.00 150.00	100.00 150.00	98.00 150.00	95.00 140.00	92.00 140.00	87.00 130.00	82.00 120.00	75.00 110.00
Coil 0 P	7.324	23.046	38.808	54.800	70.952	86.672	102.419	117.785
	6.000 9.000	19.000 28.000	32.000 47.000	44.000 66.000	57.000 85.000	70.000 100.000	82.000 120.000	95.000 140.000
Coil 1 M	226.68	225.45	222.79	217.56	208.67	197.53	184.21	169.28
	180.00 270.00	180.00 270.00	170.00 260.00	170.00 250.00	160.00 250.00	160.00 230.00	150.00 220.00	140.00 200.00
Coil 1 P	7.352	23.330	39.334	55.639	72.164	88.329	104.557	120.494
	6.000 9.000	19.000 28.000	32.000 48.000	45.000 67.000	57.000 86.000	70.000 110.000	83.000 120.000	96.000 140.000

Coil 2 M	455.12 360.00 540.00	453.07 360.00 540.00	448.74 350.00 530.00	439.48 340.00 510.00	423.27 330.00 500.00	402.91 310.00 470.00	378.45 300.00 440.00	349.93 270.00 410.00
Coil 2 P	7.333 6.000 9.000	23.107 19.000 29.000	38.975 32.000 48.000	55.132 45.000 67.000	71.554 58.000 87.000	87.708 71.000 110.000	103.981 84.000 130.000	120.014 96.000 140.000
Coil 3 M	725.79 590.00 880.00	721.38 580.00 870.00	712.49 570.00 850.00	695.46 550.00 830.00	667.32 530.00 800.00	632.69 500.00 760.00	592.13 470.00 710.00	546.46 440.00 650.00
Coil 3 P	7.433 6.000 10.000	23.440 20.000 29.000	39.489 33.000 49.000	55.749 46.000 69.000	72.222 59.000 89.000	88.304 72.000 110.000	104.497 85.000 130.000	120.363 98.000 150.000
Coil 4 M	1141.5 900.0 1400.0	1135.7 900.0 1300.0	1123.3 900.0 1300.0	1098.5 850.0 1300.0	1056.2 800.0 1200.0	1003.7 800.0 1200.0	940.9 750.0 1100.0	870.2 700.0 1000.0
Coil 4 P	7.499 6.000 10.000	23.713 20.000 30.000	39.994 33.000 50.000	56.524 46.000 70.000	73.309 60.000 90.000	89.718 73.000 110.000	106.281 86.000 130.000	122.589 99.000 150.000
Coil 5 M	2342.2 1900.0 2800.0	2321.1 1800.0 2800.0	2279.0 1800.0 2700.0	2206.2 1800.0 2600.0	2095.7 1700.0 2500.0	1965.6 1600.0 2400.0	1817.7 1500.0 2200.0	1658.6 1400.0 2100.0
Coil 5 P	8.298 6.000 10.000	26.100 20.000 31.000	43.866 34.000 51.000	61.752 48.000 72.000	79.740 62.000 93.000	97.174 76.000 110.000	114.636 89.000 130.000	131.696 100.000 150.000
Coil 6 M	5916.3 4700.0 7100.0	5872.1 4700.0 7000.0	5781.9 4600.0 6900.0	5613.5 4400.0 6600.0	5345.3 4200.0 6400.0	5016.1 4000.0 6000.0	4627.8 3700.0 5600.0	4195.4 3400.0 5100.0
Coil 6 P	8.727 7.000 10.000	27.412 22.000 32.000	46.136 36.000 54.000	65.142 51.000 76.000	84.333 65.000 98.000	103.139 80.000 120.000	122.080 94.000 140.000	140.599 110.000 160.000

HDIL AFTER LOG VERIFICATION SUMMARY

TOOL #: 1515MA 179516 DATE/TIME PERFORMED: Thu Oct 26 04:25:24 2006 DAYS SINCE CAL: 55

UNIT #: 5753XB 10164949

ZERO DATA(mv)	10 KHz	30 KHz	50 KHz	70 KHz	90 KHz	110 KHz	130 KHz	150 KHz
Coil 0 R	-0.008 -0.095 0.065	-0.012 -0.083 0.037	-0.007 -0.048 0.012	-0.001 -0.039 0.021	0.004 -0.032 0.028	0.006 -0.030 0.030	0.005 -0.028 0.032	0.000 -0.030 0.030
Coil 0 Q	0.043 0.004 0.084	0.012 -0.107 0.133	-0.002 -0.036 0.024	-0.005 -0.041 0.019	-0.004 -0.038 0.022	-0.001 -0.035 0.025	0.002 -0.033 0.027	0.006 -0.029 0.031
Coil 1 R	-0.016 -0.097 0.063	-0.010 -0.062 0.038	0.001 -0.032 0.028	0.007 -0.024 0.036	0.008 -0.024 0.038	0.001 -0.027 0.033	-0.003 -0.032 0.028	-0.003 -0.032 0.028
Coil 1 Q	0.032 -0.389 0.431	-0.001 -0.100 0.100	-0.008 -0.039 0.021	-0.003 -0.038 0.022	0.004 -0.029 0.031	0.005 -0.024 0.036	0.004 -0.028 0.032	-0.002 -0.033 0.027
Coil 2 R	-0.013 -0.090 0.050	-0.014 -0.054 0.006	-0.008 -0.049 0.011	0.005 -0.034 0.026	0.016 -0.026 0.034	0.009 -0.030 0.030	-0.001 -0.037 0.023	-0.007 -0.041 0.019
Coil 2 Q	0.037 -0.315 0.385	0.001 -0.098 0.102	-0.007 -0.041 0.019	-0.012 -0.045 0.015	-0.005 -0.033 0.027	0.010 -0.024 0.036	0.009 -0.024 0.036	0.001 -0.032 0.028
Coil 3 R	-0.014 -0.057 0.023	-0.016 -0.064 0.018	-0.006 -0.060 0.020	0.000 -0.044 0.036	0.008 -0.038 0.042	0.009 -0.035 0.045	0.011 -0.033 0.047	0.010 -0.032 0.048
Coil 3 Q	0.053 -0.147 0.253	0.005 -0.070 0.090	-0.007 -0.048 0.032	-0.009 -0.052 0.028	-0.009 -0.051 0.029	-0.004 -0.046 0.034	0.001 -0.043 0.037	0.005 -0.038 0.042
Coil 4 R	-0.048 -0.103 0.017	-0.033 -0.098 0.022	-0.018 -0.086 0.034	-0.001 -0.082 0.058	0.016 -0.044 0.078	0.015 -0.047 0.073	0.001 -0.082 0.058	-0.014 -0.073 0.047
Coil 4 Q	0.120 -0.193 0.407	0.016 -0.081 0.119	-0.015 -0.074 0.046	-0.023 -0.085 0.035	-0.008 -0.068 0.052	0.011 -0.051 0.069	0.019 -0.042 0.078	0.007 -0.056 0.064
Coil 5 R	-0.051 -0.196 0.044	-0.071 -0.185 0.055	-0.036 -0.158 0.082	-0.011 -0.147 0.093	0.012 -0.123 0.117	0.021 -0.107 0.133	0.031 -0.105 0.135	0.002 -0.116 0.124
Coil 5 Q	0.188 -0.408 0.792	0.021 -0.223 0.277	-0.019 -0.132 0.108	-0.026 -0.144 0.096	-0.025 -0.149 0.091	-0.008 -0.131 0.109	0.009 -0.122 0.118	0.025 -0.103 0.137
Coil 6 R	-0.120 -0.422 0.172	-0.080 -0.160 0.100	-0.038 -0.111 0.035	0.019 -0.105 0.055	0.041 -0.071 0.153	0.023 -0.032 0.115	-0.003 -0.104 0.097	-0.016 -0.100 0.067

-0.428	0.172	-0.410	0.190	-0.344	0.258	-0.305	0.295	-0.274	0.328	-0.288	0.312	-0.324	0.276	-0.329	0.271
0.275	0.030	-0.034	-0.022	-0.004	0.029	0.023	0.018	-1.257	1.743	-0.572	0.628	-0.341	0.259	-0.345	0.255
-0.330	0.270	-0.281	0.319	-0.287	0.333	-0.301	0.299								

ELEC. GAINS 10 KHz 30 KHz 50 KHz 70 KHz 90 KHz 110 KHz 130 KHz 150 KHz

Coil 0 M	125.03 122.40 127.39	124.05 121.74 126.71	121.69 120.07 124.97	117.66 116.52 121.28	113.06 111.61 116.17	107.67 105.66 109.97	101.59 98.78 102.79	94.23 90.77 94.48
Coil 0 P	7.381 4.314 10.314	23.284 20.084 26.084	39.101 35.958 41.958	54.752 51.998 57.998	70.123 67.881 73.881	85.621 83.668 89.668	101.014 99.246 105.246	116.756 114.951 120.951
Coil 1 M	226.87 222.19 231.26	225.31 221.22 230.25	221.32 218.47 227.58	214.51 212.48 221.16	206.44 203.93 212.25	196.63 193.09 200.97	185.58 180.43 187.80	171.67 165.47 172.23
Coil 1 P	7.406 4.343 10.343	23.553 20.365 26.365	39.613 36.480 42.480	55.560 52.834 58.834	71.281 69.045 75.045	87.252 85.330 91.330	103.139 101.404 107.404	119.413 117.653 123.653
Coil 2 M	455.27 446.05 464.26	452.57 444.50 462.85	445.69 439.97 457.93	432.94 429.14 446.85	418.67 413.49 430.38	401.09 394.04 410.13	380.78 370.76 385.89	354.93 342.38 356.35
Coil 2 P	7.389 4.322 10.322	23.336 20.145 26.145	39.252 36.110 42.110	55.099 52.325 58.325	70.732 68.474 74.474	86.665 84.690 90.690	102.567 100.799 106.799	118.956 117.152 123.152
Coil 3 M	726.64 711.52 740.56	721.17 707.91 736.80	708.10 698.78 727.50	685.90 679.38 707.11	660.50 652.08 678.69	630.17 618.59 643.84	596.46 580.20 603.88	554.51 534.92 556.76
Coil 3 P	7.492 4.424 10.424	23.673 20.477 26.477	39.768 36.633 42.633	55.701 52.941 58.941	71.395 69.149 75.149	87.266 85.308 91.308	103.081 101.313 107.313	119.288 117.489 123.489
Coil 4 M	1145.2 1119.5 1165.2	1137.7 1115.0 1160.5	1118.6 1102.0 1147.0	1085.5 1073.6 1117.4	1047.6 1032.7 1074.8	1001.7 982.1 1022.1	949.7 922.4 960.1	884.3 851.5 896.2
Coil 4 P	7.561 4.490 10.490	23.962 20.753 26.753	40.298 37.141 43.141	56.506 53.724 59.724	72.503 70.217 76.217	88.728 86.723 92.723	104.940 103.122 109.122	121.592 119.726 125.726
Coil 5 M	2348.3 2296.6 2390.4	2323.7 2278.4 2371.4	2268.0 2235.6 2326.9	2179.2 2155.9 2243.9	2077.0 2048.8 2132.4	1960.1 1922.3 2000.8	1834.2 1781.7 1854.4	1685.2 1623.0 1689.2
Coil 5 P	8.361 5.290 11.290	26.347 23.139 29.139	44.171 41.013 47.013	61.736 58.957 64.957	78.943 76.658 82.658	96.203 94.195 100.195	113.302 111.487 117.487	130.705 128.837 134.837
Coil 6 M	5927.4 5800.6 6037.4	5875.2 5763.1 5998.3	5750.5 5670.9 5902.3	5541.1 5485.1 5709.0	5293.5 5226.6 5439.9	4997.3 4906.2 5106.5	4665.7 4534.0 4719.0	4259.4 4105.8 4273.2
Coil 6 P	8.790 5.718 11.718	27.666 24.446 30.446	46.455 43.285 49.285	65.113 62.332 68.332	83.550 81.268 87.268	102.191 100.166 106.166	120.727 118.906 124.906	139.643 137.783 143.783



Baker Atlas



COMPANY
WELL
FIELD
RIG NAME

PEAK PETROLEUM INDUSTRIES NIGERIA LTD
BILABRI D3
BILABRI
BULFORD DOLPHIN

FILE NO:

API NO:

SCALE 1:200

LOCATION:

NORTH: 515,558.23 M
EAST: 731,847.1 M

ELEVATIONS:

KB
DF 25 M
GL -145 M

FIELD PRINT
TIGHT HOLE

DATE 26-OCT-2006