


MONOLITH
COLOR CORE CLADS

FACADES FOR A
BOLDER
TOMORROW

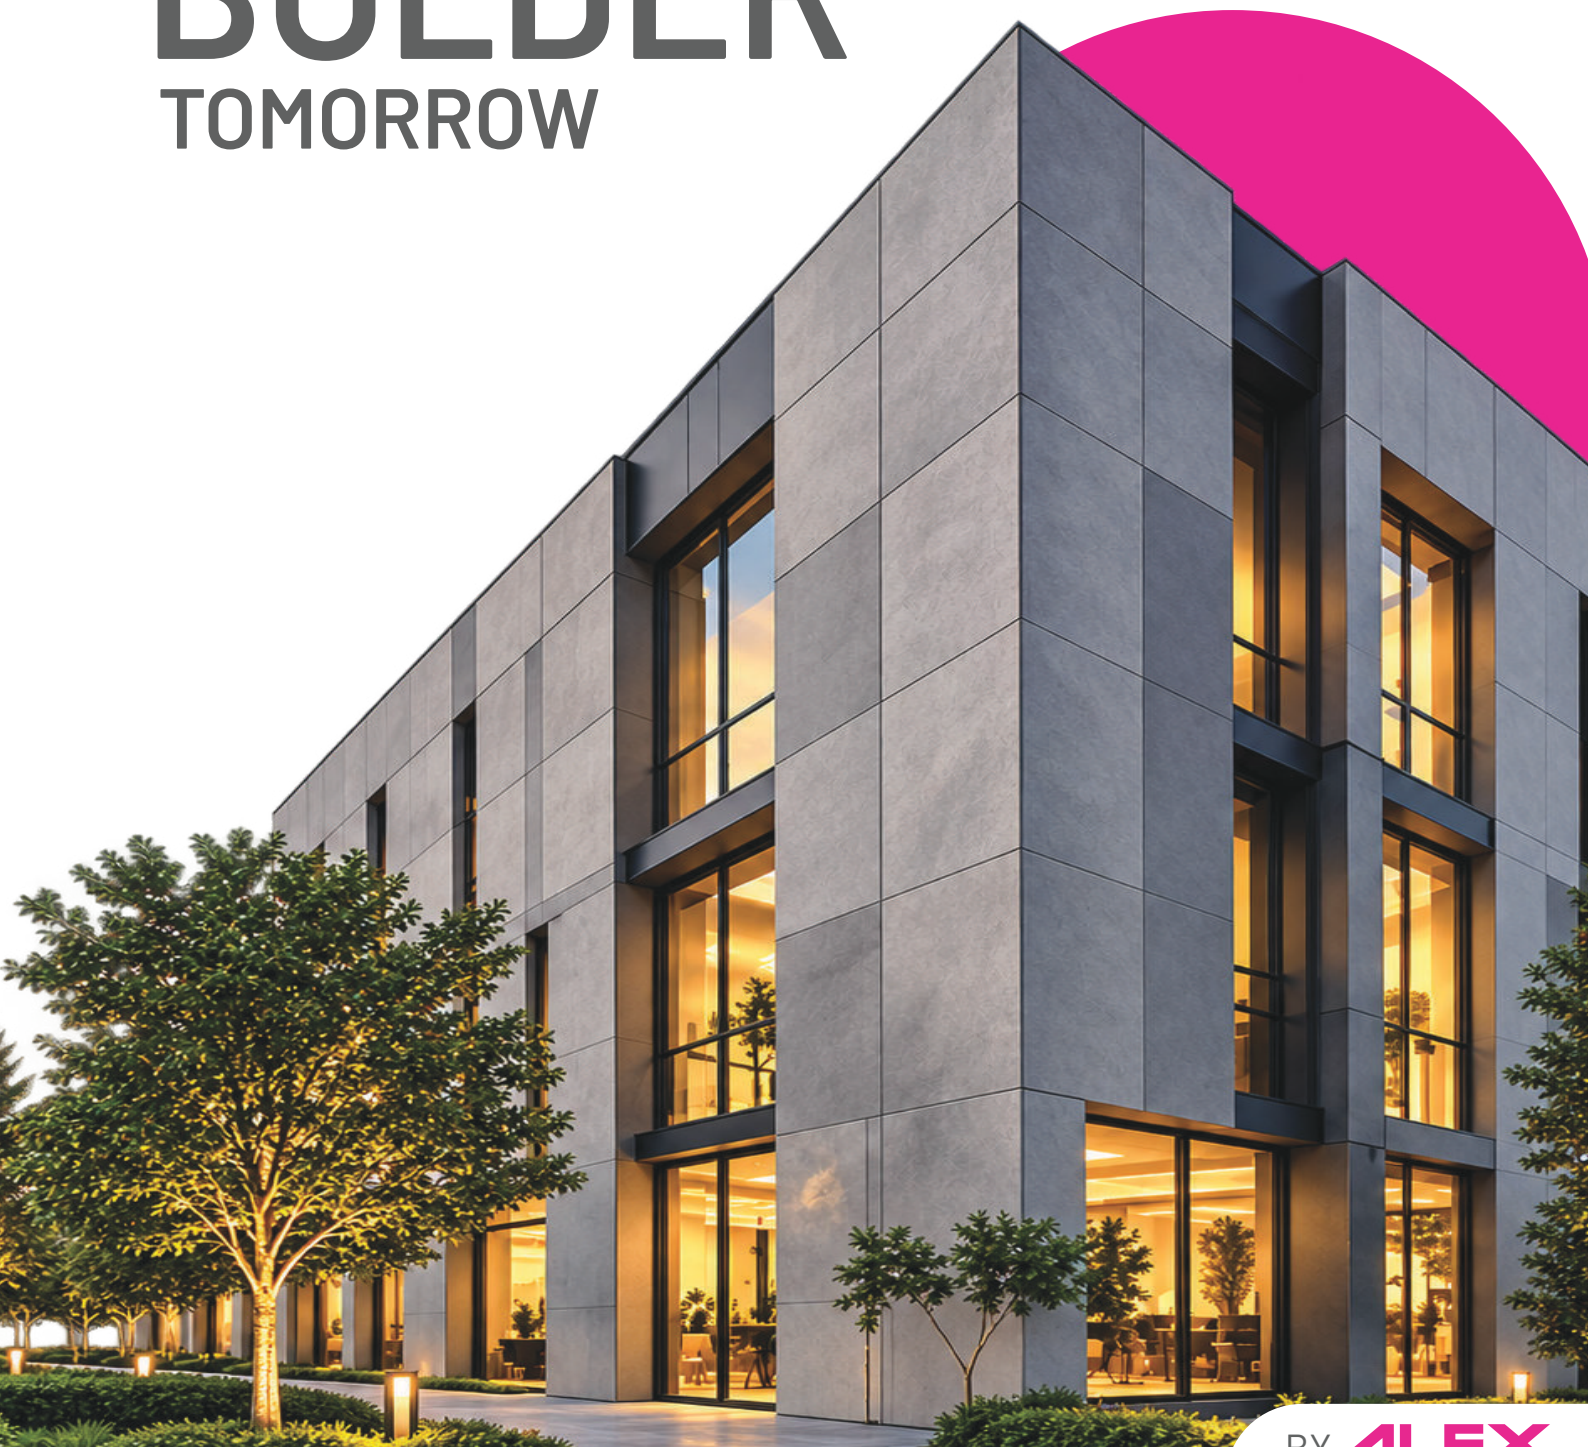

BY **ALEX**

FAÇADES, DONE DIFFERENTLY.

MEET **MONOLITH™** FAÇADE SOLUTIONS

From a high-performance façade material to a fully engineered façade system, **MONOLITH™** Façade Solutions brings the key elements of façade delivery together in one solution.

MONOLITH™ boards are color compressed boards, manufactured using advanced fibre engineering, architectural aesthetics and international manufacturing expertise in a high-performance material built for demanding façade applications.

THE MONOLITH™ FACADE SOLUTIONS APPROACH

01 MATERIAL



MONOLITH™ BOARDS
Advanced fibre engineering+
architectural aesthetics+
international manufacturing
expertise

02 SYSTEM



**FIXING + SECONDARY
FRAMEWORK + INSTALLATION**
Engineered to work together
as a complete façade
assembly.

03 EXECUTION



**TECHNICAL SUPPORT +
INSTALLATION**
Expert support through the
journey from specification
to finished façade.

BUILD BOLDER
BRIGHTER FOR
TOMORROW

ONE SYSTEM, WORKING AS ONE

COLOR COMPRESSED BOARDS + FIXING + FRAMEWORK + INSTALLATION

A façade is never just a surface. It's a panel, a fixing, a framework and installation, all acting together – or not acting at all. MONOLITH is engineered so they always act together, delivered and installed as one system rather than assembled on site from separate parts.

Engineered system build-up

- MONOLITH BOARDS – Premium 12 mm façade boards
- CONCEALED FIXING – Clips, brackets and fasteners
- SECONDARY FRAMEWORK – Corrosion-resistant sub-frame
- VENTILATED CAVITY – Continuous drainage and ventilation zone
- BUILDING STRUCTURE – Primary wall / structural system

Result – One point of accountability, from material selection to a finished, warrantied façade.





WHAT IF YOUR FAÇADE COULD BE BOTH BEAUTIFUL AND A1 FIRE RATED?

The Monolithic Façade Board

Wind, load, gravity and weather work on a façade every day. MONOLITH™ is engineered to withstand them—combining exceptional strength, rigidity and dimensional stability with refined architectural aesthetics.

A non-combustible color compressed boards with density of 1600 kg/m^3 , it delivers $\text{MOR} \geq 23 \text{ MPa}$ and $\text{MOE} \geq 14,000 \text{ MPa}$ as per ASTM C1185. Class A1 fire performance, CE certification to EN 12467 Type A, Class 4, and resistance to UV, moisture, weathering and thermal cycling ensure long-term performance.

Available in through-coloured sand-blasted and sanded finish, with concealed fixing and a 15-year warranty.

Engineered for strength. Designed for permanence.

MADE FOR WEATHER THAT DOESN'T LET UP

BUILT FOR LONG-TERM PERFORMANCE

Rain returns. Heat returns. Frost returns. MONOLITH is tested against all of it, cycle after cycle — passing heat-rain, warm-water, freeze-thaw and soak-dry testing (ASTM C1185 / BS EN 12467) — so the façade you specify today still looks specified decades from now.

TESTED FOR
REAL WORLDS.
AND REAL WEATHER.





A STRAIGHT LINE, KEPT STRAIGHT

MAINTAINS FORM OVER TIME

Every façade starts with a clean line. Most materials let it drift — warping, swelling, shifting with the seasons. MONOLITH holds its shape: a tight $\pm 6\%$ thickness tolerance and controlled moisture content ($\leq 8\%$, ASTM C1185) keep panel-to-panel sightlines clean, so the line you drew stays the line you built.

PRECISION
THAT LASTS.

UNBOTHERED BY THE FORECAST

READY FOR DEMANDING EXTERIORS

Water finds its way into almost everything — except this. MONOLITH resists it at the surface and keeps resisting it, season after season: water absorption of $\leq 20\%$ and full water-tightness (ASTM C1185) protect the building envelope, while mould resistance (ASTM D3272) keeps the façade hygienic over time, so moisture stays outside where it belongs.

BUILT TO
KEEP THE OUTSIDE
ON THE OUTSIDE




ONE MATERIAL. ENDLESS FAÇADES.

DISTINCTIVE ARCHITECTURAL EXPRESSIONS

Give ten architects the same material and you should get ten different buildings. From expansive monolithic planes to precisely articulated grids, MONOLITH's integral colour and architectural texture are built for exactly that kind of freedom — scale, rhythm, depth and texture, without conventional paint standing between the material and the idea.

A BROADER
PALETTE FOR
BOLDER IDEAS.

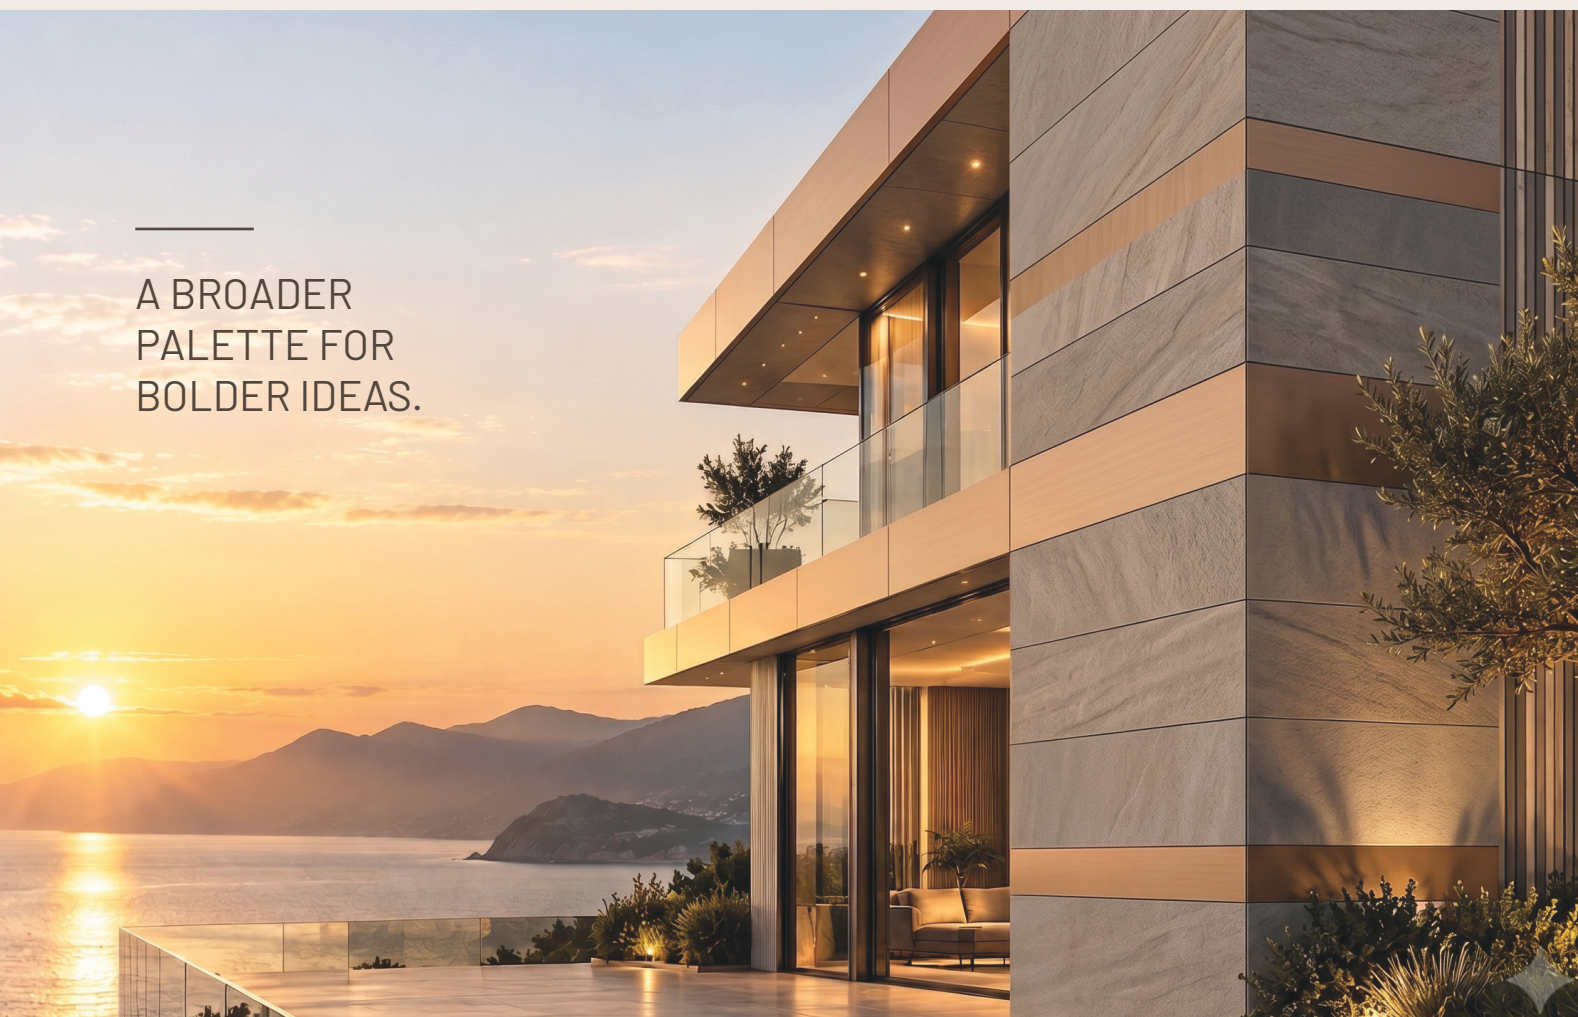

8 COLOURS



DARK GREY



LIGHT GREY



SAND STONE



WHITE GREY



BROWN



LIGHT BROWN



BLACK



TERRACOTTA

2 TEXTURE



LIGHT GREY SAND BLASTED



LIGHT GREY SMOOTH

RESPONSIBLE, BY DESIGN — NOT BY ANNOUNCEMENT

RECYCLABLE RAW MATERIALS + INSTALLATION EXPERTISE

Sustainability shouldn't be the loudest thing about a material — it should simply be true. MONOLITH is asbestos-free and mineral-based from the start, low-VOC/E0 and non-combustible, and backed by Monolith's own installation team from first panel to final fix — a considered choice for architects who don't want to compromise on material responsibility.

A MORE CONSIDERED
TOMORROW



THE FAÇADE IS NO LONGER JUST A SKIN

IT IS PART OF THE BUILDING'S PERFORMANCE.



BUILT FOR EVERY BUILDING TYPE

From corporate headquarters to healthcare facilities, MONOLITH's performance credentials make it equally at home wherever the building envelope has to work hard.

Corporate Offices
Commercial Buildings
Healthcare Institutions
Educational Institutes
Hotels
Public Infrastructure
Data Centers

DIFFERENT BUILDINGS
A HIGHER STANDARD.



TECHNICAL SPECIFICATIONS

PRODUCT DETAILS.

Dimension (mm)	Weight (kg)	Unit Weight (kg/m²)	Surface Finish	Sheet/m²
8x1,200x2,400	41.3	14.3	Flat, Straight Grain	0.347
10x1,200x2,400	51.6	17.9		
12x1,200x2,400	61.9	21.5		

PROPERTY	SPECIFICATION	STANDARDS
FIRE RESISTANCE PROPERTY		
Fire Classification of Construction Products and Building Elements	Class A1	EN 13501-1:2018
DURABILITY PROPERTY		
Freeze/ Thaw Resistance	Pass	EN12467:2012
Warm Water Resistance	Pass	EN12467:2012
Heat/ Rain Resistance	Pass	EN12467:2012
Soak/ Dry Resistance	Pass	EN12467:2012

Remarks: EMC Stands for Equilibrium Moisture Content

PROPERTY		UNIT	SPECIFICATION	STANDARDS
PHYSICAL PROPERTY				
Tolerance	Thickness	mm.	± 0.20	EN12467:2012
	Width	mm.	± 1.0	
	Length	mm.	± 1.0	
	Straightness of Edge	mm./ m.	≤ 0.1%	
Density		Kg/m3	1,600 ≤ 50	EN12467:2012
MOR Average Both MD And CD (Wet Condition)		MPa	≤ 18	EN12467:2012
MOR OF MD (Wet Condition)		MPa	≤ 23	EN12467:2012
MOR OF CD (Wet Condition)		MPa	≤ 13	EN12467:2012
MOE OF MD (Wet Condition)		MPa	≤ 11,000	EN12467:2012
Moisture Content		%	≤ 12.0	EN12467:2012
Water Absorption		%	≤25	EN12467:2012
Water Permeability			Pass	EN12467:2012
Thermal Conductivity(k)		W/ m-K	0.162	ASTM C 518-10



MOISTURE RESISTANT



FIRE RESISTANT



TERMITE PROOF