
piezo buzzer transducer KPEG Page 1



Register Login


Page 2 piezo buzzer transducer KPEG

## KMTG1603-1

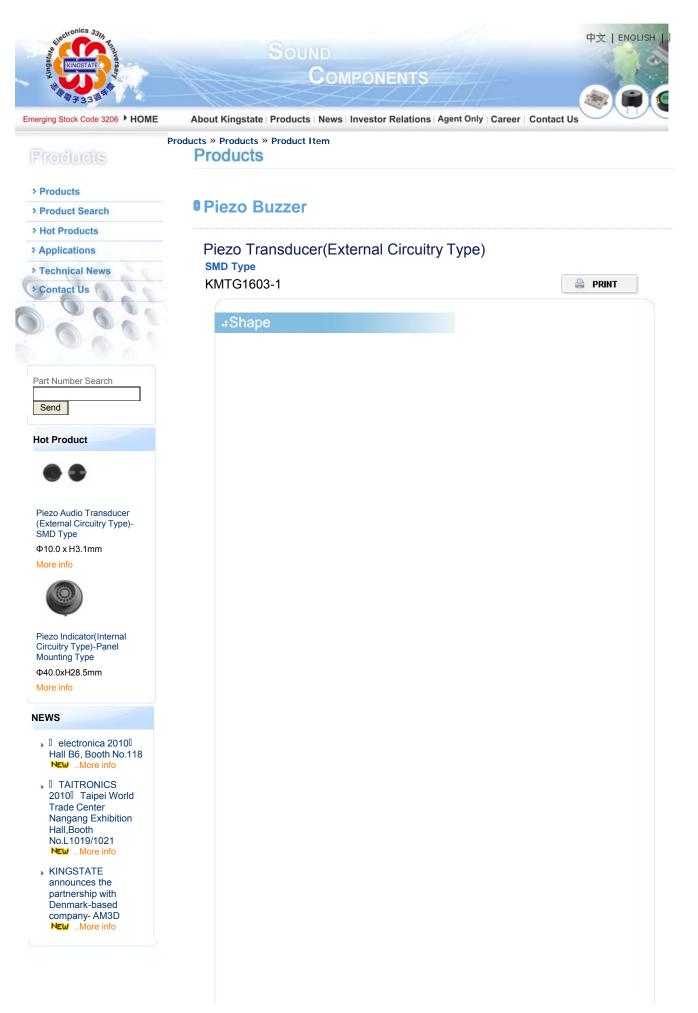

Rated Voltage (Vp-p)	MAX.25
Current Consumption (mA)	MAX 5@3Vp-p,square wave , 4.0KHz
Sound Pressure Level (dB)	MIN.81dB@10cm/3Vp-p, square wave,4.0KHz
Electrostatic Capacity(pF)	20,000±30%@1KHz/1V
Operating Temperature (□)	-40 ~ +120
Storage Temperature (□)	-40 ~ +120
Weight (Gram)	0.96
Material	LCP(White) + PCB(FR4)
Dimensions	16.0 x 16.0 x 2.6

## ... Dimension

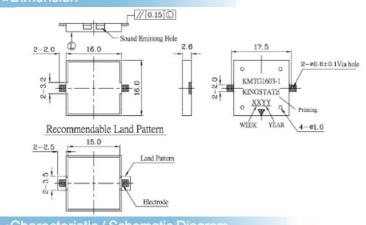

## ... Characteristic / Schematic Diagram



Back

TOP

About Kingstate | Products | News | Investor Relations | Agent Only | Career | Contact Us | Site Map | KingState JPN

Copyright 2007. Kingstate Electronics Corp. All Rights Reserved
10F, No. 69-11, Sec.2, ChungCheng E. Rd., Tamshui Dist, New Taipei City 251, Taiwan
TEL:+886-2-2809-5651 FAX:+886-2-2809-7151