
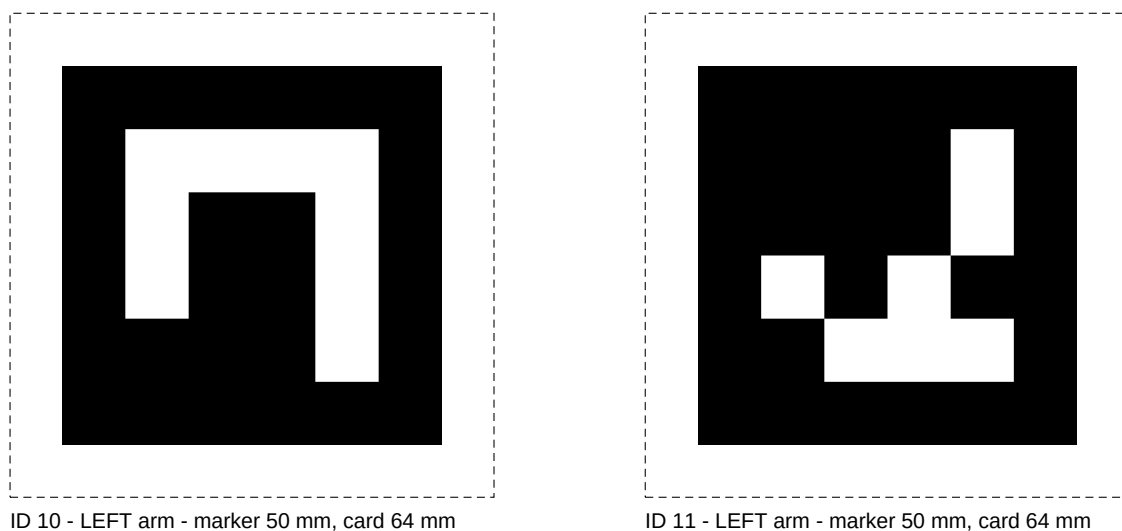


Gripper marker flags for click_to_move

PRINT AT 100% / "Actual size" (no "fit to page"). Check: the bar below must measure exactly 100 mm.

Two flags per gripper: LEFT arm = IDs 10 and 11, RIGHT arm = IDs 20 and 21 (either ID on either end).

1. Cut each card out on its outline and glue it FLAT onto something stiff, 2-3 mm thick (foam board, plastic, acrylic or a 3D-printed plate). Paper or thin card will bend: not good enough.
2. Fix one card to EACH END of the gripper rail (the bar the fingers slide along), sticking out sideways beyond the end, with the printed side facing BACK towards the wrist / arm (i.e. away from the fingertips). Keep it clear of the fingers when they open fully.
3. Make it RIGID: hot glue, cable ties or a screw. It must not wobble or shift when the arm moves. The exact angle and position do not matter -- the robot measures them (CALIBRATE MARKERS). If a flag is ever bumped or moved, run CALIBRATE MARKERS again.

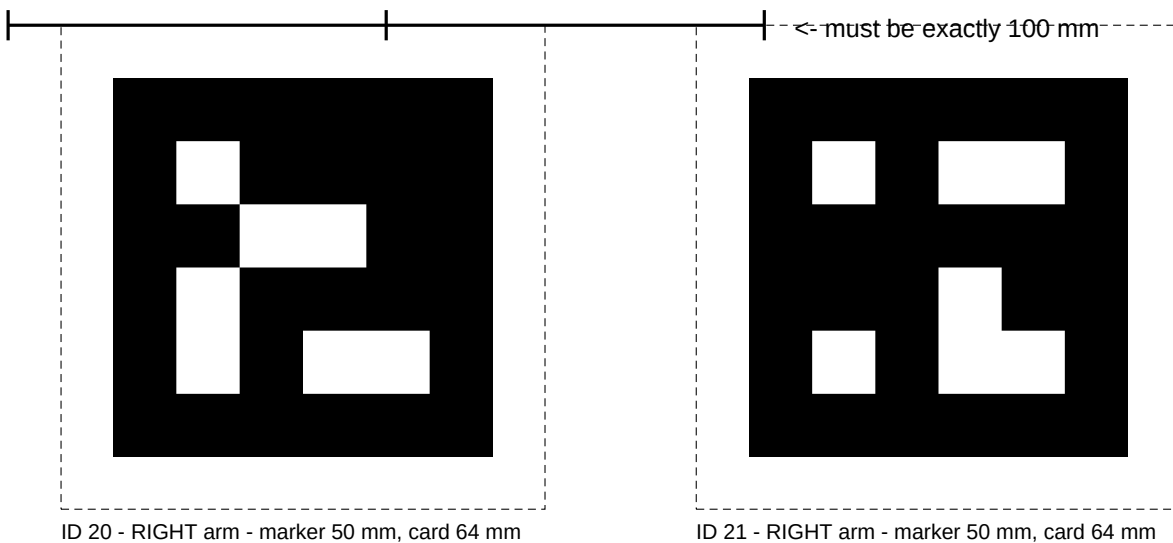

Dashed line = cut line. Do not trim into the white margin: the detector needs it.