Quotation No : Q25000302

Date : 29-Jul-2025

ILJIN ELECTRONICS INDIA PVT. LTD.
CCI Logistics Industrial Park, Pollivakkam, SH-57
SRIPERUMPUDUR
TAMILNADU
602002

Kind Attention : Mr./Ms. Harinder Singh

Dear Sir,

We understand that in industry, reliability is not just a requirement,it is the foundation of success.
That is why Absstem Industrial PSA Generator is more than just a product; it is a commitment to excellence, efficiency, and uninterrupted performance.

Every component is designed with precision and innovation, ensuring that each molecule of oxygen and nitrogen is delivered with the utmost purity.

With fully automated operation, our system seamlessly integrates into your processes, reducing manual intervention and maximizing productivity.

Moreover, our industry-leading air ratio ensures that you achieve the highest efficiency, optimizing energy consumption while maintaining peak performance.
And because we believe in standing by our craftsmanship, we offer an unmatched-10 year warranty on sieves, giving you the peace of mind that your investment is protected for the long run.

We have attached the detailed quotation for your review.

Should you have any questions or require further customization to meet your specific needs, please do not hesitate to reach out.

We are here to provide not just a product but a solution that breathes life into your operations.

We look forward to the opportunity to serve you and build a lasting partnership.

Thanks and Regards,

For Absstem Industrial Solutions Pvt. Ltd.

Amit Sahni
Chief Executive Officer
9582499594
www.absstem.com



nGEN POWERED BY ABSSTEM INDUSTRIAL

Industrial

PSA Nitrogen Generator

Unique Features of Absstem Nitrogen Generator nGEN UH

a. **Lowest Air to Gas ratio** in industry thereby guaranteeing **lowest power consumption**.
b. **10 years*** warranty on Molecular Sieves **(First In Industry)**.
c. Assured Performance for consistent Flow, Pressure and Purity of Nitrogen throughout Product Lifecycle.
d. IIOT ready machine having 100% operator free design for 24X7 operation.
e. Idle mode with auto start/stop features ensuring power savings during low/no demand.
f. Inbuilt dew point transmitter to monitor input compressed air quality as standard scope of supply.
g. Plug n Play machine with an ergonomic design suitable for accessibility.
h. All the Instruments are specially manufactured to make them suitable for Nitrogen gas.
i. All critical performance parameters are being monitored through HMI.
j. First in industry **Comprehensive Maintenance Contract (CMC)** service under Absstem Premium Shield program providing complete peace of mind to customer.

Ambient Design Parameters

a.	Temperature	0 to 45 Deg. Celsius
b.	Relative Humidity	up to 80 % (Max.)
c.	Altitude	up to 1000 m above Sea level

Absstem Industrial Solutions Pvt. Ltd.
Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122051
Contact - 1800 3010 3394 Email - indsales@absstem.com
CIN: U29256HR2022PTC103387

Product Description

a. Product Name	Ultra Purity PSA Nitrogen Gas Generator
b. PSA Module	**nGEN UH**
c. Purity Range	99.99% - 99.999%

General PSA Generation System Layout

A typical Industrial Nitrogen Generation system consists of three parts:

- Compressed Air System: Air Compressor, Pre-filter, Air Dryer, Dry Air Vessel
- PSA N_2 Generation System
- N_2 Storage Tank



Air Compressor	An Air compressor is used to compress the atmospheric air to a pressure required for the separation of **Nitrogen** from the air.
Refrigeration dryer	Compressed air then passes through a refrigerated dryer to remove moisture (which is harmful to sieves) from the air.
Air Tank	Dry air is collected in an air tank to remove the pulsations which serve the dynamic (changing) requirement of air by the PSA system.
Multistage Filtration system	Before air enters the PSA system, it is passed through multistage filtration removing moisture, particulates and oil content to the specified levels.
PSA system	Pressurized air is passed through PSA Towers filled with Molecular sieves to separate **Nitrogen** from Air.
Storage Tank	Industrial Grade **Nitrogen** produced from the PSA System is stored in this for continuous supply.
Oxygen Analyser	Nitrogen produced is monitored by an Oxygen analyser. In case, O_2 impurity goes above the specified level, it gives an alarm and switches the plant to vent mode.

Absstem Industrial Solutions Pvt. Ltd.
Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122051
Contact - 1800 3010 3394 Email - indsales@absstem.com
CIN: U29256HR2022PTC103387

HD Touch Screen Display

(User-friendly touch screen interface for easy operation and maintenance)

Absstem industrial Nitrogen generators complies with all industry standards and regulation

- Alarm management system
- Process data display
- Consumables running hours' display
- Data logging via USB drive**
- Graphical representation**



Additional upgrades

- Digital flow meter with totalizer
- Nitrogen Pressure monitoring for High pressure booster driven plants
- Cylinder manifold and alarm management system
- Remote monitoring
- Nitrogen gas Dew-point monitoring

International Quality standards

A strict quality procedure, following the leading international pharmacopoeia and Industrial directives, is followed in the selection of all mechanical and electrical instruments, vessel fabrication and designing of Industrial Gas generators.

TÜV NORD ISO 9001 · TÜV NORD ISO 14001 · TÜV NORD ISO 13485 · RIR CERTIFICATION Partners in Growth

Absstem Industrial Solutions Pvt. Ltd.
Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122051
Contact - 1800 3010 3394 Email - indsales@absstem.com
CIN: U29256HR2022PTC103387

Absstem Shield Premium

(Comprehensive Annual Maintenance Contract)



Any Industry is now heavily focused on increased OEE (Overall Equipment Efficiency) and reduced LCC (Life Cycle Cost) while deciding to invest in any equipment. At Absstem, we strive for an everlasting engagement with our customers by not selling them just a product but also provide a long term after-sales support.

We understand that to deliver a consistent performance, periodic health check and timely maintenance of the Nitrogen Generator is extremely important. With Absstem Shield Premium, you invest in complete peace of mind for all maintenance needs pertaining to N2 generators and associated integrated equipment like air compressor, Air dryer etc.

Few benefits of Absstem Shield Premium are listed as below: -

- Guaranteed assurance of plant performance.
- Genuine spare parts and consumables being used to provide longevity and durability.
- Regular visits by our technicians for health monitoring and carrying out the scheduled maintenance services.
- 24 x 7 On-Call service support to our customers for any basic trouble shooting
- Emergency visit to attend any unplanned breakdown to any location within 48 hours.
- No additional surprise charges as all breakdown spares and consumables covered.
- The contract can be signed at the time of equipment ordering itself and can be renewed on year on year basis.

Absstem Industrial Solutions Pvt. Ltd.
Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122051
Contact - 1800 3010 3394 Email - indsales@absstem.com
CIN: U29256HR2022PTC103387

Product Description

Product	Description	Make	Qty
nGen Nitrogen Generator Ultra Purity	nGEN099UH Nitrogen		1

Caption	Specification
Gas Generated	Nitrogen
Gas Pressure	upto 6.5 Barg
FLOW AT 99.99% PURITY	129 Nm3/Hr DRY AIR REQUIRED 364 CFM
FLOW AT 99.995% PURITY	116 Nm3/Hr DRY AIR REQUIRED 409 CFM
FLOW AT 99.999% PURITY	87 Nm3/Hr DRY AIR REQUIRED 410 CFM
COMPRESSED AIR PRESSURE REQUIRED	7.5 Barg
RECOMMENDED NITROGEN STORAGE	3000 Liters
POWER SUPPLY	230 V/ 110 V 50/60 Hz Single Phase
RECOMMENDED AIR RECEIVER	3000 Litres Part of Air System
INPUT AIR DEW POINT MONITOR	INCLUDED
CMS Warranty	10 Years*

Product	Description	Make	Qty
Gas Storage Vessel	AI-4000L Storage Vessel		1

Caption	Specification
Water Volume	4000 Litres
Gas Stored	Nitrogen/Oxygen
Design Standard	ASME Sec. VIII Div.1 Pressure Vessel Design
Working Pressure	8 Barg
Hydrotest Pressure	13.2 Barg
Accessories Included	Pressure Guage Safety Valve Manual Drain Additional Port for Other Instruments
Material of Construction	IS2062 Gr.B
Gas Stored Volume	26 M3
Corrosion Allowance	1.5 MM

Absstem Industrial Solutions Pvt. Ltd.
Ground Floor, Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122052
Contact: 1800 547 0506 | indsales@absstem.com
CIN: U29256HR2022PTC103387

Commercial Offer

S No	Item Code	Item Name	Description	HSN	Qty	Unit Price	Discount	GST(%)	Amount
1	nGEN099UH	nGEN099UH	nGen Nitrogen Generator Ultra Purity	840510	1	76,88,400.00	12,68,586.00	18.00	64,19,814.00
2	AIS0408ST	AI-4000L	Gas Storage Vessel	731100	1	3,36,000.00	57,120.00	18.00	2,78,880.00

Sub Total	66,98,694.00
GST(%) @18.00	12,05,764.92
Grand Total ()	79,04,458.92

Absstem Industrial Solutions Pvt. Ltd.
Ground Floor, Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122052
Contact: 1800 547 0506 | indsales@absstem.com
CIN: U29256HR2022PTC103387

Terms And Conditions

1.	EXCLUSIONS & CLIENTS SCOPE	All erection / civil work, All Power Cables & Cabling out of battery limit of PSA Plant, Cable Trenches etc. Unloading / Shifting of Gas Plant at Clients site will be in Client Scope. Additional gas piping, cooling water (if required).
2.	SUPERVISION OF ERECTION & COMMISSIONING	There shall be no commissioning charges, however you shall arrange freeTo & Fro Air Ticket, lodging / boarding, and local conveyance for our Engineers during supervision of Installation of Gas Plant at site on free of cost basis. Our Engineers will be there for Supervision only. Any manpower / fitter required for installation work shall be provided by you.
3.	P&F	3% Extra.
4.	Freight	Extra at Actuals.
5.	Insurance	In your Scope.
6.	Payment Terms	50% Advance with your Prestegious Purchase Order and Balance against PI.
7.	Delivery	6-8 Weeks from the PO and Advance. Rest can be confirmed for Availability.
8.	Warranty	We hereby confirm that, our equipment shall have Suppliers warranty for a period of 12 months from the date of Commissioning or 18 months from date of Dispatch whichever is earlier.
9.	GST	As per the Commercial Table.
10.	Remarks	.

Hope you will find our offer in line with your requirement.

Should you require any further clarification/information, please feel free to contact us.

Thanking you, and assuring you of our best attention at all times.

Very Yours truly,


For Absstem Industrial Solutions Pvt. Ltd.

Amit Sahni

Chief Executive Officer

9582499594

www.absstem.com

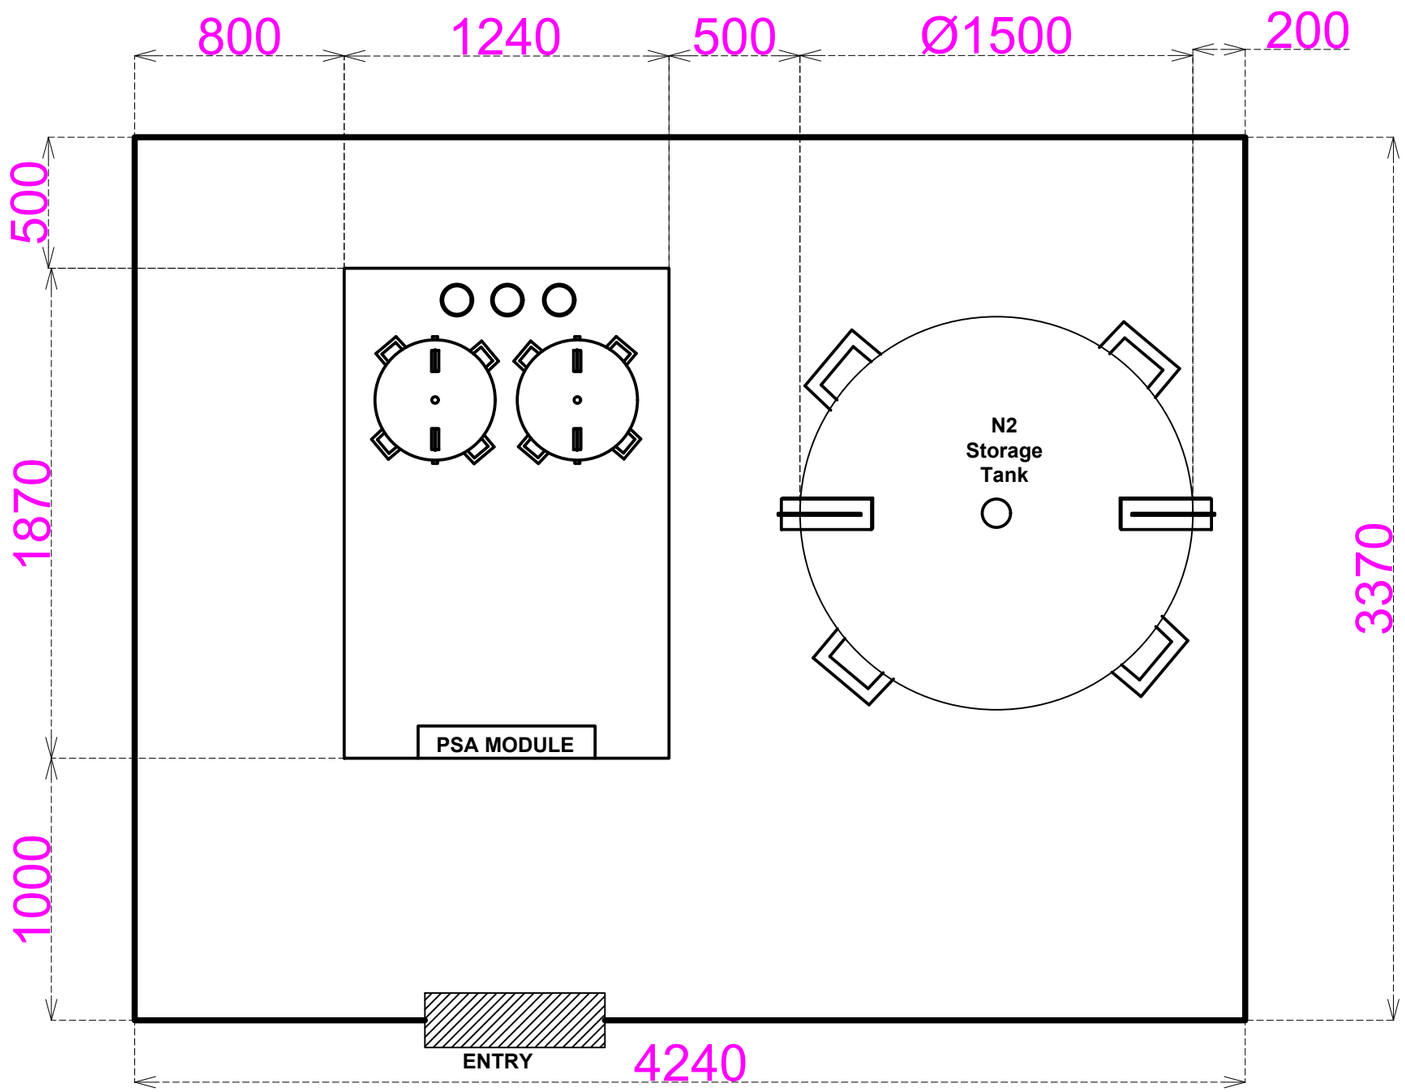

S NO.	PART NAME	QTY.
01.	PSA Module	01
02.	N2 Storage Tank	01

NOTES:-

1.ALL DIMENSION ARE IN MM UNLESS OTHERWISE SPECIFIED.

2.PLANT ROOM FLOOR FOUNDATION MUST BE OF RCC/CONCREAT OF ATLEAT 4 INCH HEIGHT FROM GROUND.

3.HOT AIR FROM AIR COMPRESSOR WILLL BE RELEASED OUTSIDE PLANT ROOM THROUGH DUCT.

4. 2 NO.S OF 18 INCH EXHAUST FAN TO BE INSTALLED IN OPPOSITE DIERCTION FOR PROPER VENTILATION.

5. PROPER LIGHT TO BE PROVIDED INSIDE THE PLANT ROOM.

6. DRAIN POINT SHOULD BE CONSIDERED.

THIS DRAWING IS A PRIVATE AND CONFIDENTIAL AND IS PROPERTY OF ABBSTEM. IT MUST NOT BE COPIED AND LENT WITHOUT CONSENT OF ABSSTEM.
Copyright absstem industry.

	DATE	NAME	SIGN
DRAWN BY:-	29/7/25	J.S	
CHECKED BY:-		A.S	
APPROVED BY:-		P.S	
TESTED BY:-			

absstem
REINVENTING PERFORMANCE

Capacity-Oxygen plant	Plant Room Dimension (In Meter)- X*Y*Z(L X B X H)	Electrical load As per tender	4 core Electrical cable size (Armoured) Aluminium / Copper use either Aluminium or copper cable	MCB RATING	Door Size (Width x Height) In Meter	Total Plant weight Aprrox. -In KG.s	Window Dimension In meter
nGen90UH						5415kg	0.5 x 0.5

DRAWING N0.

Title: nGen 99UH

Date	Description	A3
Rev. 00	Sheet 1 OF 1	SCALE.1:1