Quotation No : Q25000411

Date : 30-Oct-2025

SA Field Marketing and Services
N-62, MIDC, Hingna Road
NAGPUR
MAHARASHTRA
440016

Kind Attention : Mr./Ms. MR.MAHENDER

Dear Sir,

We understand that in industry, reliability is not just a requirement,it is the foundation of success.
That is why Absstem Industrial PSA Generator is more than just a product; it is a commitment to excellence, efficiency, and uninterrupted performance.

Every component is designed with precision and innovation, ensuring that each molecule of oxygen and nitrogen is delivered with the utmost purity.

With fully automated operation, our system seamlessly integrates into your processes, reducing manual intervention and maximizing productivity.

Moreover, our industry-leading air ratio ensures that you achieve the highest efficiency, optimizing energy consumption while maintaining peak performance.
And because we believe in standing by our craftsmanship, we offer an unmatched-10 year warranty on sieves, giving you the peace of mind that your investment is protected for the long run.

We have attached the detailed quotation for your review.

Should you have any questions or require further customization to meet your specific needs, please do not hesitate to reach out.


We are here to provide not just a product but a solution that breathes life into your operations.

We look forward to the opportunity to serve you and build a lasting partnership.

Thanks and Regards,

For Absstem Industrial Solutions Pvt. Ltd.

Arifa Zaidi
Assistant Manager Business Development
9218108184
www.absstem.com

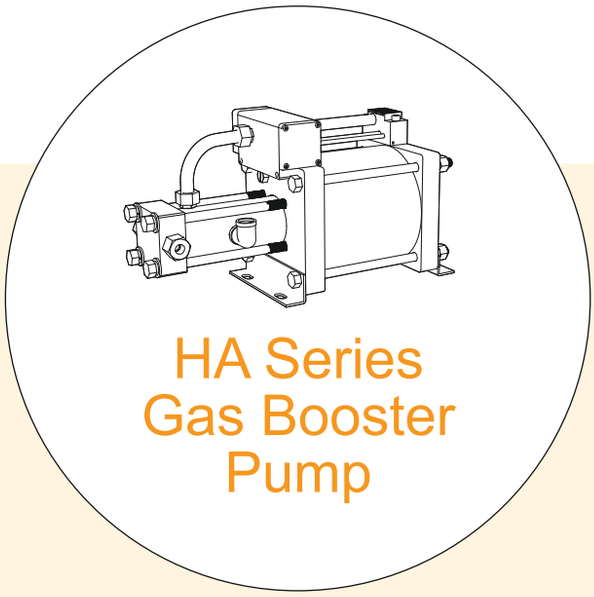

HA Series Gas Booster Pump

Air Driven Gas Booster of HA Series

HA series gas booster pump are compressed air single-driven single-acting gas booster pumps with the advantages of high safety, high output pressure, no energy consumption for pressure maintenance and some products are equipped with gas rapid cooing devices.

- Gas drive prevents the medium from generating heat, sparks and flames during transmission, and the pressurization is safe;
- The driving gas does not require lubrication and is completely isolated from the pressurized medium to ensure the cleanliness of the medium;
- The maximum output pressure can reach 830bar;
- Applicable to various media such as oxygen, nitrogen, methane, carbon dioxide, etc.
- The product is reliable, easy to maintain, strong, has a long sealing life, and can be started and stopped continuously.

Main features:

- Based on static pressure, when the driving air pressure is 7 bar, the air consumption is 1.1.5m3 / min Drive pressure 1 bar-8.3 (14.5-120.35psi) HA series is single drive piston (160mm).
- The medium temperature is not higher then 115°C(240°F) and order for extremely low temperature must be specified.
- The high-pressure end material can be customized to 17-4PH 15-5PH, 44 OC, nickel-based alloy, Hastelloy and other materials to meet special medium requirements.
- GB series standrad products are nitrogen boosted, order code such as: HA40 (series + boost ratio)

Special Product Description:

About the medium: HA series can be used for a variety of media, order code such as: HA30-O2 (series code + boost ratio + boost medium) About the interface: If you need a special medium interface, please indicate it when ordering.

Application Scenario:


- HA Series gas Booster Pumps are the suitable for application with high gas source, high output pressure and small flow requirements.
- Air tightness test of various of pressure components;
- Nitrogen filling of high pressure accumulators;
- Filling of diving breathing oxygen cylinders;
- Filling of diving breathing oxygen cylinders;
- Calibration of high pressure safety valves;
- The reaction device is filled with reaction medium;
- Recovery and reuse of spacial gases;


TECHNICAL PARAMETERS (Pa=Driving Air Pressure Pi=Input Air Pressure Po=Output Air Pressure)

Model	Pressure Ratio	Minimum gas inlet pressure Pi (bar)	Maximum allowable outlet pressure Po (bar)	Gas outlet pressure calculation formula Po=	Gas Inlet In	Gas Outlet Out	Max flow rate standard liters per minute (NL/Min)
HA02T	2.5 : 1	0	20.75	2.5Pa+Pi	NPT1/2"	NPT1/2"	522@Pi=7
HA04	4 : 1	1.2	33.2	4Pa	NPT1/2"	NPT1/2"	354@Pi=7
HA05T	5 : 1	1.7	41.5	4Pa+Pi	NPT1/2"	NPT1/2"	572@Pi=7
HA07	7 : 1	3.4	58.1	7Pa	NPT3/8"	NPT3/8"	252@Pi=7
HA08T	8 : 1	3.4	66.4	7Pa+Pi	NPT3/8"	NPT3/8"	362@Pi=7
HA10	10 : 1	6.5	83	10Pa	NPT3/8"	NPT3/8"	196@Pi=7
HA15	15 : 1	8.1	124.5	15Pa	NPT3/8"	NPT3/8"	164@Pi=10
HA30	30 : 1	18	265.6	30Pa	NPT1/4"	NPT1/4"	91@Pi=20
HA40	40 : 1	25	332	40Pa	NPT1/4"	NPT1/4"	156@Pi=40
HA60	60 : 1	32	498	60Pa	NPT1/4"	NPT1/4"	112@Pi=40
HA75	75 : 1	32	622	75Pa	NPT1/4"	NPT1/4"	86@Pi=40
HA100	100 : 1	40	830	100Pa	NPT1/4"	NPT1/4"	65@Pi=40


@ Represents Under Certain Conditions, For Example: 100@pi=7, Which Means That The Flow Rate Is 100nl/min Under The Input Pressure Of 7bar.

Quality | Efficiency | Reliability

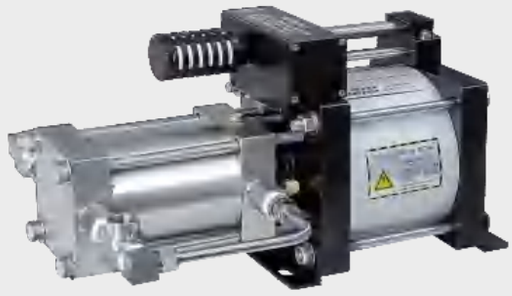


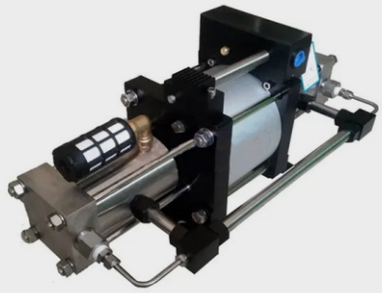


HA02T, HA05T, HA08T

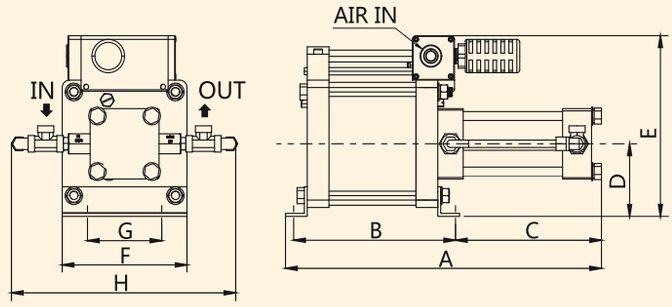


HA04, HA07

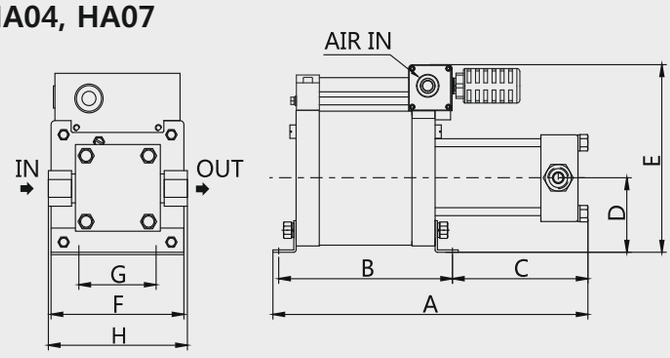

Working Principle

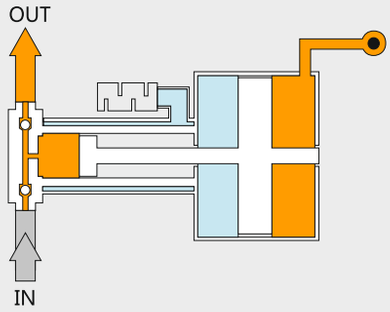

HA10, HA15, HA30, HA60, HA100

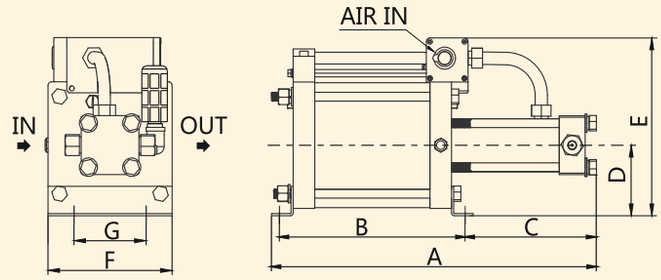

Installation Size/(mm)												
Model	Actuating air connection (AIR IN)	A	B	C	D	E	F	G	H	Mounting Holes	Cooling Function	Weight /kg
HA02T	G1/2"	448.5	218	219.5	94	240	172	100	420	4-φ12*22	/	24
HA04	G1/2"	391	218	161.5	94	240	172	100	180	4-φ12*22	/	15
HA05T	G1/2"	435.5	218	206.5	94	240	172	100	360	4-φ12*22	/	20
HA07	G1/2"	462	258	193	94	240	172	100	/	4-φ12*22	/	14
HA08T	G1/2"	435.5	218	206.5	94	240	172	100	360	4-φ12*22	/	17
HA10	G1/2"	460	258	191	94	240	172	100	/	4-φ12*22	●	14
HA15	G1/2"	460	258	191	94	240	172	100	/	4-φ12*22	●	14
HA30	G1/2"	447	258	178	94	240	172	100	/	4-φ12*22	●	15
HA40	G1/2"	447	258	178	94	240	172	100	/	4-φ12*22	●	15
HA60	G1/2"	447	258	178	94	240	172	100	/	4-φ12*22	●	15
HA75	G1/2"	447	258	178	94	240	172	100	/	4-φ12*22	●	15
HA100	G1/2"	447	258	178	94	240	172	100	/	4-φ12*22	●	17

Product Description

Product	Description	Make	Qty
Pneumatic Booster	HA02T, 2,5/1 Booster		1

Caption	Specification
Pressure Ratio	HA02T
Minimum Gas Inlet Pressure	0 Barg
Maximum Outlet Pressure	20 Barg
Gas Inlet Connection	1/2" NPT
Gas Outlet Connection	1/2" NPT
Maximum Flow Rate	500 LPM @ 7 Barg Input Pressure
Actuating Air Connection	G1/2"
Pneumatic Air Consumption	1.5 m3/min @ 7 Barg Drive Pressure

Product	Description	Make	Qty
HP Storage Tank 20 Barg	5000 ltr HP Storage Tank 20 Barg High Pressure Storage Tank	ABSSTEM	1

Caption	Specification
Capacity	5000 litres
Working Pressure	20 Barg
Hydrotest Pressure	33 Barg
Shell / Dish Thickness	18 mm / 20 mm
In / Out Connection	80 NB
Design Standard	IS 2825

Commercial Offer

S No	Item Code	Item Name	Description	HSN	Qty	Unit Price	GST(%)	Amount
1	BOS35	HA02T, 2,5/1	Pneumatic Booster	84149090	1	4,68,750.00	18.00	4,68,750.00
2	HPS7	5000 ltr HP Storage Tank 20 Barg	HP Storage Tank 20 Barg	73110090	1	6,21,500.00	18.00	6,21,500.00
							Sub Total	10,90,250.00

Absstem Industrial Solutions Pvt. Ltd.
Ground Floor, Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122052
Contact: 1800 547 0506 | indsales@absstem.com
CIN: U29256HR2022PTC103387

GST(%) @18.00	1,96,245.00
Grand Total (INR)	12,86,495.00

Terms And Conditions

1.	P&F	3% Extra.
2.	Freight	Extra at Actuals.
3.	Insurance	In your Scope.
4.	Payment Terms	50% Advance with your Prestegious Purchase Order and Balance against PI.
5.	Delivery	10-12 Weeks from the PO and Advance. Rest can be confirmed for Availability.
6.	Warranty	We hereby confirm that, our equipment shall have Suppliers warranty for a period of 12 months or 2000 Hrs whichever is earlier.
7.	GST	As per the Commercial Table.
8.	Remarks	.

Hope you will find our offer in line with your requirement.

Should you require any further clarification/information, please feel free to contact us.

Thanking you, and assuring you of our best attention at all times.

Very Yours truly,

For Absstem Industrial Solutions Pvt. Ltd.

Arifa Zaidi

Assistant Manager Business Development

9218108184

www.absstem.com