Quotation No : Q26000385

Date : 21-Jul-2026

Sanden Vikas India Pvt Ltd
Plot No S1&S2, FIT ,Sec-57
FARIDABAD
HARYANA
121004

Kind Attention : Mr./Ms. Vijay Verma

Dear Sir,

We understand that in industry, reliability is not just a requirement,it is the foundation of success.
That is why Absstem Industrial PSA Generator is more than just a product; it is a commitment to excellence, efficiency, and uninterrupted performance.

Every component is designed with precision and innovation, ensuring that each molecule of oxygen and nitrogen is delivered with the utmost purity.

With fully automated operation, our system seamlessly integrates into your processes, reducing manual intervention and maximizing productivity.

Moreover, our industry-leading air ratio ensures that you achieve the highest efficiency, optimizing energy consumption while maintaining peak performance.
And because we believe in standing by our craftsmanship, we offer an unmatched-10 year warranty on sieves, giving you the peace of mind that your investment is protected for the long run.

We have attached the detailed quotation for your review.

Should you have any questions or require further customization to meet your specific needs, please do not hesitate to reach out.

We are here to provide not just a product but a solution that breathes life into your operations.

We look forward to the opportunity to serve you and build a lasting partnership.

Thanks and Regards,

For Absstem Industrial Solutions Pvt. Ltd.

Pramod Kumar
Director
8447642325
www.absstem.com



nGEN POWERED BY ABSSTEM INDUSTRIAL

Industrial

PSA Nitrogen Generator

Unique Features of Absstem Nitrogen Generator nGEN SH

a. **Lowest Air to Gas ratio** in industry thereby guaranteeing **lowest power consumption**.
b. **10 years*** warranty on Molecular Sieves **(First In Industry)**.
c. Assured Performance for consistent Flow, Pressure and Purity of Nitrogen throughout Product Lifecycle.
d. IIOT ready machine having 100% operator free design for 24X7 operation.
e. Idle mode with auto start/stop features ensuring power savings during low/no demand.
f. Inbuilt dew point transmitter to monitor input compressed air quality as standard scope of supply.
g. Plug n Play machine with an ergonomic design suitable for accessibility.
h. All the Instruments are specially manufactured to make them suitable for Nitrogen gas.
i. All critical performance parameters are being monitored through HMI.
j. First in industry **Comprehensive Maintenance Contract (CMC)** service under Absstem Premium Shield program providing complete peace of mind to customer.

Ambient Design Parameters

a.	Temperature	0 to 45 Deg. Celsius
b.	Relative Humidity	up to 80 % (Max.)
c.	Altitude	up to 1000 m above Sea level

Absstem Industrial Solutions Pvt. Ltd.
Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122051
Contact - 1800 3010 3394 Email - indsales@absstem.com
CIN: U29256HR2022PTC103387

Product Description

a. Product Name	High Purity PSA Nitrogen Gas Generator
b. PSA Module	**nGEN SH**
c. Purity Range	99% - 99.95%

General PSA Generation System Layout

A typical Industrial Nitrogen Generation system consists of three parts:

- Compressed Air System: Air Compressor, Pre-filter, Air Dryer, Dry Air Vessel
- PSA N_2 Generator
- Nitrogen Storage Tank



Air Compressor	An Air compressor is used to compress the atmospheric air to a pressure required for the separation of **Nitrogen** from the air.
Refrigeration dryer	Compressed air then passes through a refrigerated dryer to remove moisture (which is harmful to sieves) from the air.
Air Tank	Dry air is collected in an air tank to remove the pulsations which serve the dynamic (changing) requirement of air by the PSA system.
Multistage Filtration system	Before air enters the PSA system, it is passed through multistage filtration removing moisture, particulates and oil content to the specified levels.
PSA system	Pressurized air is passed through PSA Towers filled with Molecular sieves to separate **Nitrogen** from Air.
Storage Tank	Industrial Grade **Nitrogen** produced from the PSA system is stored in this tank for continuous supply.
Oxygen Analyser	Nitrogen produced is monitored by an Oxygen analyser. In case, O_2 impurity goes above the specified level, it gives an alarm and switches the plant to vent mode.

Absstem Industrial Solutions Pvt. Ltd.
Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122051
Contact - 1800 3010 3394 Email - indsales@absstem.com
CIN: U29256HR2022PTC103387

HD Touch Screen Display

(User-friendly touch screen interface for easy operation and maintenance)

Absstem industrial Nitrogen generators complies with all industry standards and regulation

- Alarm management system
- Process data display
- Consumables running hours' display
- Data logging via USB drive**
- Graphical representation**



Additional upgrades

- Digital flow meter with totalizer
- Nitrogen Pressure monitoring for High pressure booster driven plants
- Cylinder manifold and alarm management system
- Remote monitoring
- Nitrogen gas Dew-point monitoring

International Quality standards

A strict quality procedure, following the leading international pharmacopoeia and Industrial directives, is followed in the selection of all mechanical and electrical instruments, vessel fabrication and designing of Industrial Gas generators.

TÜV NORD ISO 9001 · TÜV NORD ISO 14001 · TÜV NORD ISO 13485 · RIR CERTIFICATION Partners in Growth

Absstem Industrial Solutions Pvt. Ltd.
Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122051
Contact - 1800 3010 3394 Email - indsales@absstem.com
CIN: U29256HR2022PTC103387

Absstem Shield Premium

(Comprehensive Annual Maintenance Contract)



Any Industry is now heavily focused on increased OEE (Overall Equipment Efficiency) and reduced LCC (Life Cycle Cost) while deciding to invest in any equipment. At Absstem, we strive for an everlasting engagement with our customers by not selling them just a product but also provide a long term after-sales support.

We understand that to deliver a consistent performance, periodic health check and timely maintenance of the Nitrogen Generator is extremely important. With Absstem Shield Premium, you invest in complete peace of mind for all maintenance needs pertaining to N2 generators and associated integrated equipment like air compressor, Air dryer etc.

Few benefits of Absstem Shield Premium are listed as below: -

1) Guaranteed assurance of plant performance.
2) Genuine spare parts and consumables being used to provide longevity and durability.
3) Regular visits by our technicians for health monitoring and carrying out the scheduled maintenance services.
4) 24 x 7 On-Call service support to our customers for any basic trouble shooting
5) Emergency visit to attend any unplanned breakdown to any location within 48 hours.
6) No additional surprise charges as all breakdown spares and consumables covered.
7) The contract can be signed at the time of equipment ordering itself and can be renewed on year on year basis.

Absstem Industrial Solutions Pvt. Ltd.
Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122051
Contact - 1800 3010 3394 Email - indsales@absstem.com
CIN: U29256HR2022PTC103387


POWERED BY ABSSTEM INDUSTRIAL

Industrial

PSA Oxygen Generator



PSA Technology

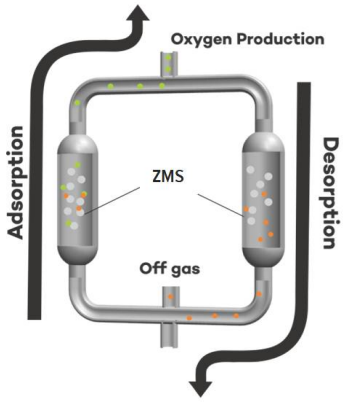

PSA Process explaining oxygen production

Industrial Oxygen Generator mainly consists of two adsorbers filled with zeolite molecular sieves. Pressurized air is passed through one of these adsorbers, zeolite having a property to attract nitrogen, adsorbs Nitrogen from air and oxygen is allowed to pass through and move into the storage tank as the final product. As the adsorber approaches saturation, the air is allowed to pass through the other adsorber while this adsorber is being regenerated to ensure a continuous supply of Oxygen. This changeover takes place through a specially designed microcontroller to ensure a hassle-free operation. The quality of oxygen produced is monitored by an Oxygen analyser.

Absstem Industrial solutions Pvt. Ltd.
Corporate Address: *Plot No. 591, Phase- IV, Sector 8, IMT Manesar, Gurugram, Haryana-122052*
Contact-1800 3010 3394, Email- Indsales@absstem.com
CIN -U29256HR2022PTC103387

Key Features

- Shipped ready for installation
- 5 minutes Startup time with uninterrupted stoppages.
- Quick & Easy installation
- Low operating costs compared to gas cylinders/liquid oxygen
- Reduced Maintenance costs
- Embedded Safety Interlocks to cater any abnormality.
- Space-saving compact design.
- Eliminates all safety hazards which are there with gas cylinder or liquid oxygen.
- 10 years warranty on molecular sieves.

Description

a. Product	Oxygen Gas Generator
b. Model	**IDOS**
c. Technology	PSA (Pressure Swing Adsorption)

Specifications

a.	Oxygen Flow Rate	As per Performance Sheet
b.	Oxygen Purity	As per Performance Sheet
c.	Oxygen Delivery Pressure	5.5 Barg (Higher Pressure Options Available)
d.	Ambient conditions	
	• Temperature	0 to 50 Deg. Celsius
	• Relative Humidity	up to 80 % (Max.)
	• Altitude	up to 1000 m above Sea level

Scheme Offered

This scheme will comprise of

- Air package
  (Air compressor, Air dryer, Air Receiver, Water Separator)
- Industrial Oxygen generator with oil removal filtration system
- Storage Tank
- Oxygen Analyzer
- Alarm panel

Unique Features of Absstem

a. All fabricated items are cleaned and degreased as per GEP standards.
b. All Instruments used are compatible with oxygen gas.
c. Guaranteed 10+ years of trouble free and reliable plant operation.
d. We provide the purest **Oxygen** in Industry.
e. Data logging and Graphical Reports for all parameters available.
f. Test certificates of all instruments are available on demand.


Absstem Industrial solutions Pvt. Ltd.
Corporate Address: *Plot No. 591, Phase- IV, Sector 8, IMT Manesar, Gurugram, Haryana-122052*
Contact-1800 3010 3394, Email- Indsales@absstem.com
CIN -U29256HR2022PTC103387

Onsite Gas Generation vs Liquid Tank/Cylinder Alternative

Non-stop availability: 24 x 7 across 365 days in an year
Easy integration within existing installations
Your own independent supply source of industrial gas
Significant economies for scale and lower operational costs: no rental charges, logistical expenses and bulk user evaporation losses
No safety hazards related to handling high-pressure cylinders

Equipment Description

The Industrial Oxygen Generator consists of

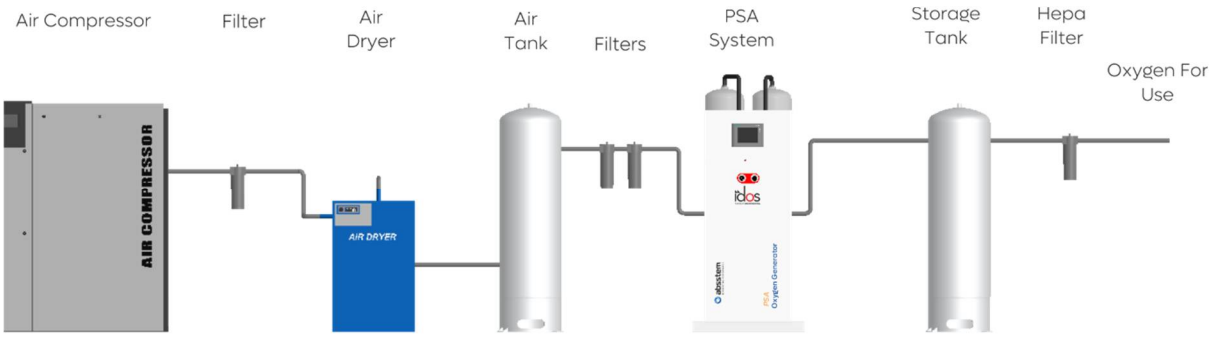

Air Compressor	An Air compressor is used to compress the atmospheric air to a pressure required for the separation of **oxygen** from the air.
Refrigerated Air Dryer	Compressed air then passes through a refrigerated dryer to remove moisture (which is harmful to sieves) from the air.
Air Receiver	Dry air is collected in an air tank to remove the pulsations which serve the dynamic (changing) requirement of air by the PSA system.
Multistage Filtration system	Before air enters the PSA system, it is passed through multistage filtration removing moisture, particulates and oil content to the specified levels.
PSA system	Pressurized air is passed through PSA Towers filled with Molecular sieves to separate **Oxygen** from Air.
Storage Tank	Industrial Grade **Oxygen** produced from IDOS is stored in this tank to supply a continuous flow of **Oxygen**.
Online Oxygen Analyzer	Online Oxygen analyzer for continuous monitoring of Oxygen purity level.


Absstem Industrial solutions Pvt. Ltd.
Corporate Address: *Plot No. 591, Phase- IV, Sector 8, IMT Manesar, Gurugram, Haryana-122052*
Contact-1800 3010 3394, Email- Indsales@absstem.com
CIN -U29256HR2022PTC103387

HD Touch Screen Display

(User-friendly touch screen interface for easy operation and maintenance)

Absstem industrial oxygen generator complies with all industry standards and regulation

- Alarm management system
- Plug and play
- Fully automatic
- Process data display
- Consumables running hours display
- Data logging via USB drive
- Graphical representation

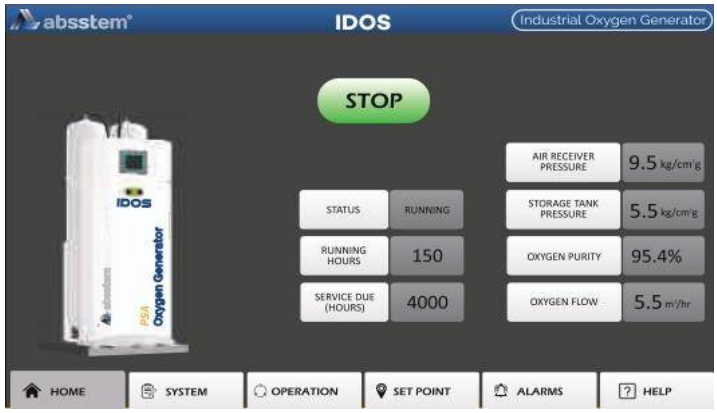

Additional upgrades

- Digital flow meter with totaliser
- High-pressure oxygen tank
- Oxygen booster for high pressure requirements
- Cylinder manifold and alarm management system
- Remote monitoring

Plant Operation

- Unit operates 24-hrs a day, 7-days a week throughout the year reliably, automatically & safely

Automation

- The Plant is fully automatic and needs only electrical power for running the Air compressor
- The machine automatically enters into standby mode when the level in the Storage Tank reaches a preset limit. This helps in optimised Air Compressor operation and reduced power consumption.

International Quality standards

A strict quality procedure, following the leading international pharmacopoeia and Industrial directives, is followed in the selection of all mechanical and electrical instruments, vessel fabrication and designing of Industrial oxygen generators.

Absstem Industrial solutions Pvt. Ltd.
Corporate Address: *Plot No. 591, Phase- IV, Sector 8, IMT Manesar, Gurugram, Haryana-122052*
Contact-1800 3010 3394, Email- Indsales@absstem.com
CIN -U29256HR2022PTC103387

Itemised Supply description

No.	Item description	Make	Qty
a	Air Compressor	Kaeser/IR/As per Demand	Client scope/ Quoted Separately
b	Refrigeration Dryer with pre filter	Kaeser/IR/As per Demand	Client scope/ Part of Compressor Package.
c	Air Tank	ABSSTEM	Client scope/ Part of Compressor Package.
d	Set of Filters	ABSSTEM	1 no.
e	PSA unit (IDOS)	ABSSTEM	1 no.
f	Electrical Power Panel with PLC and cabling	ABSSTEM & MITSUBISHI	1 no.
f	Digital Oxygen Analyzer	ABSSTEM	1 no.
g	Storage Tank	ABSSTEM	Quoted Separately.

Electrical Protection

The client should make proper arrangements for earthing/grounding systems for the Industrial **Oxygen** Generator at their facility.

Enclosure Panel

- Ergonomically designed metal enclosure with powder-coated finish for longer life.
- High-strength IP-rated panel fittings from Germany for a robust enclosure.
- Fan filters from Rittal are IP-55 rated making the electrical enclosure internal environment dust-free.
- Easy connectivity to any place of installation with req. port connections.
- High-strength base frame designed for higher load and easy transportation.
- Vessels are designed per ASME section VIII DIV I. Vessels are epoxy paint coated which is considered good for longevity and corrosion resistance.
- All electrical items are CE certified with operating voltage at 24 VDC

Maintenance Contract (AMC / CMC)

Our in-house service support packages Absstem Shield & Absstem Shield premium ensures 24*7 on site support for all scheduled and need based service requirements. Per the schedule mentioned in the operational manual, we suggest the user to change the filters by following a simple protocol.

Our technical experts are always available to guide your maintenance team for carrying out minor troubleshooting and basic maintenance activities via remote support program.

Best ROI Guaranteed

ROI within 6 to 18 months when compared to conventional methods

Generator performance depends on the component selection. Our processes make this job easier as all equipment is selected based on more than 3 decades of research. IDOS is a fully automatic (operator-free operation) that ensures peace of mind.

We deliver what we commit!!

Absstem Industrial solutions Pvt. Ltd.
Corporate Address: *Plot No. 591, Phase- IV, Sector 8,*
IMT Manesar, Gurugram, Haryana-122052
Contact-1800 3010 3394, Email- Indsales@absstem.com
CIN -U29256HR2022PTC103387

Product Description

Product	Description	Make	Qty
Compressed Air System	C003F0014 Air System		1

Caption	Specification
Air Compressor KW	3 KW
Air Compressor Make	Atlas Copco/ Ingersoll Rand/ Gardner Denver/ As per Demand
Air Dryer	Included
Dry Air Storage	200 Liters Included
Interconnecting Piping	Included
Pre filter	Included
Dry Air Generated	14 CFM
Air Pressure	7.5 Barg
POWER SUPPLY	400 V 3 Phase 50 Hz

Product	Description	Make	Qty
nGen Nitrogen Generator High Purity	nGEN001SH Nitrogen		1

Caption	Specification
Gas Generated	Nitrogen
Gas Pressure	upto 6.5 Barg
FLOW AT 99% PURITY	8 Nm3/Hr DRY AIR REQUIRED 10 CFM
FLOW AT 99.5% PURITY	7 Nm3/Hr DRY AIR REQUIRED 10 CFM
FLOW AT 99.9% PURITY	5 Nm3/Hr DRY AIR REQUIRED 10 CFM
FLOW AT 99.95% PURITY	4 Nm3/Hr DRY AIR REQUIRED 10 CFM
COMPRESSED AIR PRESSURE REQUIRED	7.5 Barg
RECOMMENDED NITROGEN STORAGE	500 Liters
POWER SUPPLY	230 V/ 110 V 50/60 Hz Single Phase
RECOMMENDED AIR RECEIVER	200 Litres Part of Air System
INPUT AIR DEW POINT MONITOR	INCLUDED
CMS Warranty	10 Years*

Absstem Industrial Solutions Pvt. Ltd.
Ground Floor, Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122052
Contact: 1800 547 0506 | indsales@absstem.com
CIN: U29256HR2022PTC103387

Product	Description	Make	Qty
Gas Storage Vessel	AI-500L Storage Vessel		1

Caption	Specification
Water Volume	500 Litres
Gas Stored	Nitrogen/Oxygen
Design Standard	ASME Sec. VIII Div.1 Pressure Vessel Design
Working Pressure	8 Barg
Hydrotest Pressure	13.2 Barg
Accessories Included	Pressure Guage Safety Valve Manual Drain Additional Port for Other Instruments
Material of Construction	IS2062 Gr.B
Gas Stored Volume	3.25 M3
Corrosion Allowance	1.5 MM

Product	Description	Make	Qty
Compressed Air System	C015F0094 Air System		1

Caption	Specification
Air Compressor KW	15 KW
Air Compressor Make	Atlas Copco/ Ingersoll Rand/ Gardner Denver/ As per Demand
Air Dryer	Included
Dry Air Storage	700 Liters Included
Interconnecting Piping	Included
Pre filter	Included
Dry Air Generated	94 CFM
Air Pressure	7.5 Barg
POWER SUPPLY	400 V 3 Phase 50 Hz

Absstem Industrial Solutions Pvt. Ltd.
Ground Floor, Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122052
Contact: 1800 547 0506 | indsales@absstem.com
CIN: U29256HR2022PTC103387

Product	Description	Make	Qty
IDOS Oxygen Generator	IDOS 09 B Oxygen		1

Caption	Specification
Gas Generated	Oxygen
Flow	9 Nm3/Hr
Purity	95 Percent
Compressor	In Your Scope / Quoted Separately
Dryer	In Your Scope / Part of Compressor Package
Air Vessel	In Your Scope / Part of Compressor Package
Dry Air Required	71 CFM
Power Required	230V 50 Hz Single Phase
Module Option	PSA Plant Only

Product	Description	Make	Qty
Gas Storage Vessel	AI-2500L Storage Vessel		1

Caption	Specification
Water Volume	2500 Litres
Gas Stored	Nitrogen/Oxygen
Design Standard	ASME Sec. VIII Div.1 Pressure Vessel Design
Working Pressure	8 Barg
Hydrotest Pressure	13.2 Barg
Accessories Included	Pressure Guage Safety Valve Manual Drain Additional Port for Other Instruments
Material of Construction	IS2062 Gr.B
Gas Stored Volume	16.25 M3
Corrosion Allowance	1.5 MM

Absstem Industrial Solutions Pvt. Ltd.
Ground Floor, Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122052
Contact: 1800 547 0506 | indsales@absstem.com
CIN: U29256HR2022PTC103387

Commercial Offer

S No	Item Code	Item Name	Description	HSN	Qty	Unit Price	GST(%)	Amount
1	ACSC003F	C003F0014	Compressed Air System	840510	1	3,80,000.00	18.00	3,80,000.00
2	nGEN001SH	nGEN001SH	nGen Nitrogen Generator High Purity	840510	1	8,00,000.00	18.00	8,00,000.00
3	AIS0058ST	AI-500L	Gas Storage Vessel	731100	1	60,000.00	18.00	60,000.00
4	ACSC015F	C015F0094	Compressed Air System	840510	1	8,20,000.00	18.00	8,20,000.00
5	IDOS 09 B	IDOS 09 B	IDOS Oxygen Generator	842139	1	14,71,000.00	18.00	14,71,000.00
6	AIS0258ST	AI-2500L	Gas Storage Vessel	731100	1	1,90,000.00	18.00	1,90,000.00
							Sub Total	37,21,000.00
							GST(%) @18.00	6,69,780.00
							Grand Total (INR)	43,90,780.00

Absstem Industrial Solutions Pvt. Ltd.
Ground Floor, Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122052
Contact: 1800 547 0506 | indsales@absstem.com
CIN: U29256HR2022PTC103387

Terms And Conditions

1.	EXCLUSIONS & CLIENTS SCOPE	All erection / civil work, All Power Cables & Cabling out of battery limit of PSA Plant, Cable Trenches etc. Unloading / Shifting of Gas Plant at Clients site will be in Client Scope. Additional gas piping, cooling water (if required).
2.	SUPERVISION OF ERECTION & COMMISSIONING	There shall be no commissioning charges, however you shall arrange freeTo & Fro Air Ticket, lodging / boarding, and local conveyance for our Engineers during supervision of Installation of Gas Plant at site on free of cost basis. Our Engineers will be there for Supervision only. Any manpower / fitter required for installation work shall be provided by you.
3.	P&F	3% Extra.
4.	Freight	Extra at Actuals.
5.	Insurance	In your Scope.
6.	Payment Terms	50% Advance with your Prestegious Purchase Order and Balance against PI.
7.	Delivery	6-8 Weeks from the PO and Advance. Rest can be confirmed for Availability.
8.	Warranty	We hereby confirm that, our equipment shall have Suppliers warranty for a period of 12 months from the date of Commissioning or 18 months from date of Dispatch whichever is earlier.
9.	GST	As per the Commercial Table.
10.	Remarks	.

Hope you will find our offer in line with your requirement.

Should you require any further clarification/information, please feel free to contact us.

Thanking you, and assuring you of our best attention at all times.

Very Yours truly,

For Absstem Industrial Solutions Pvt. Ltd.

Pramod Kumar

Director

8447642325

www.absstem.com