MIT Assignment-05

Jeetu Mehra

U24AI032

Question 1 : **Write a instruction in assemble language to add decimal 12BCD to the accumulator,which contains**

39BCD.

Output:

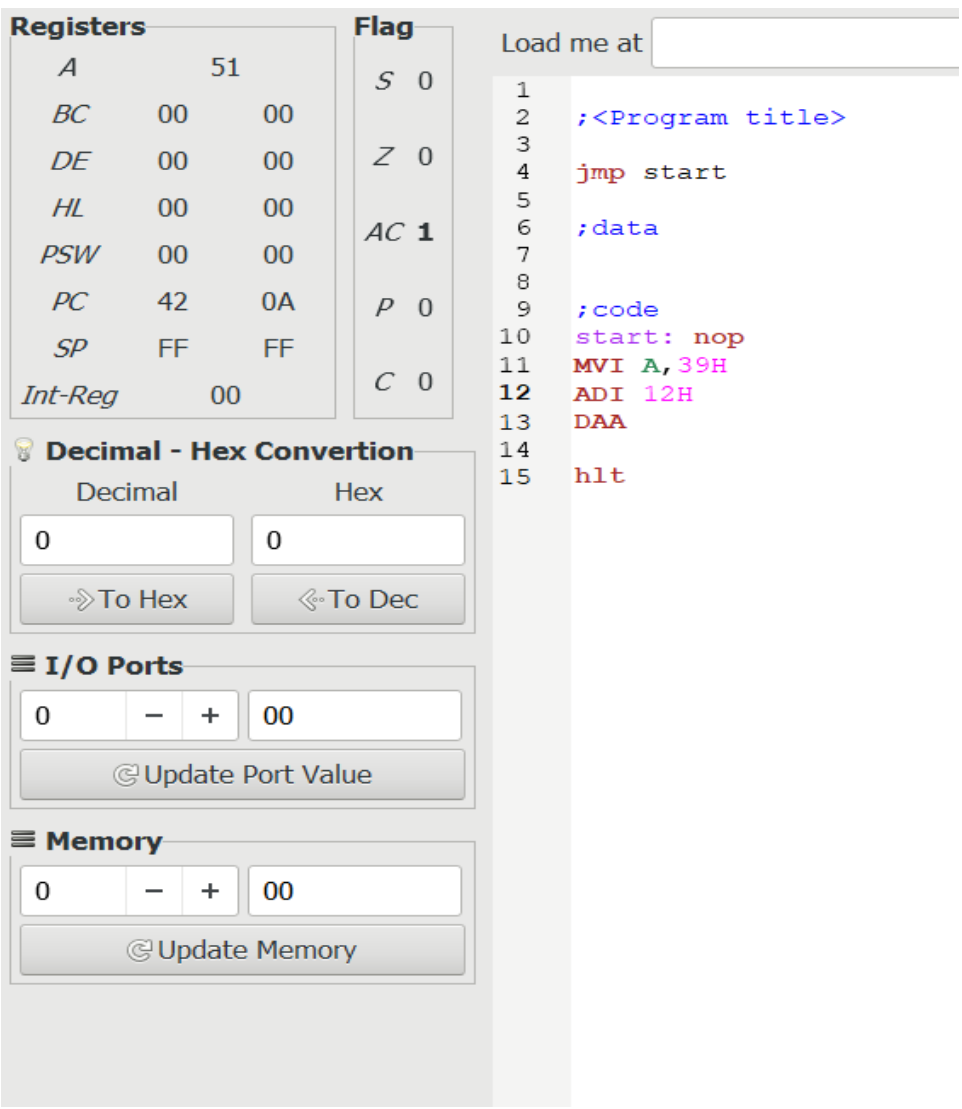

<u>Question 2</u>: Write a instruction in assemble language to add two decimal numbers 85BCD and 68BCD .

<u>Output:</u>

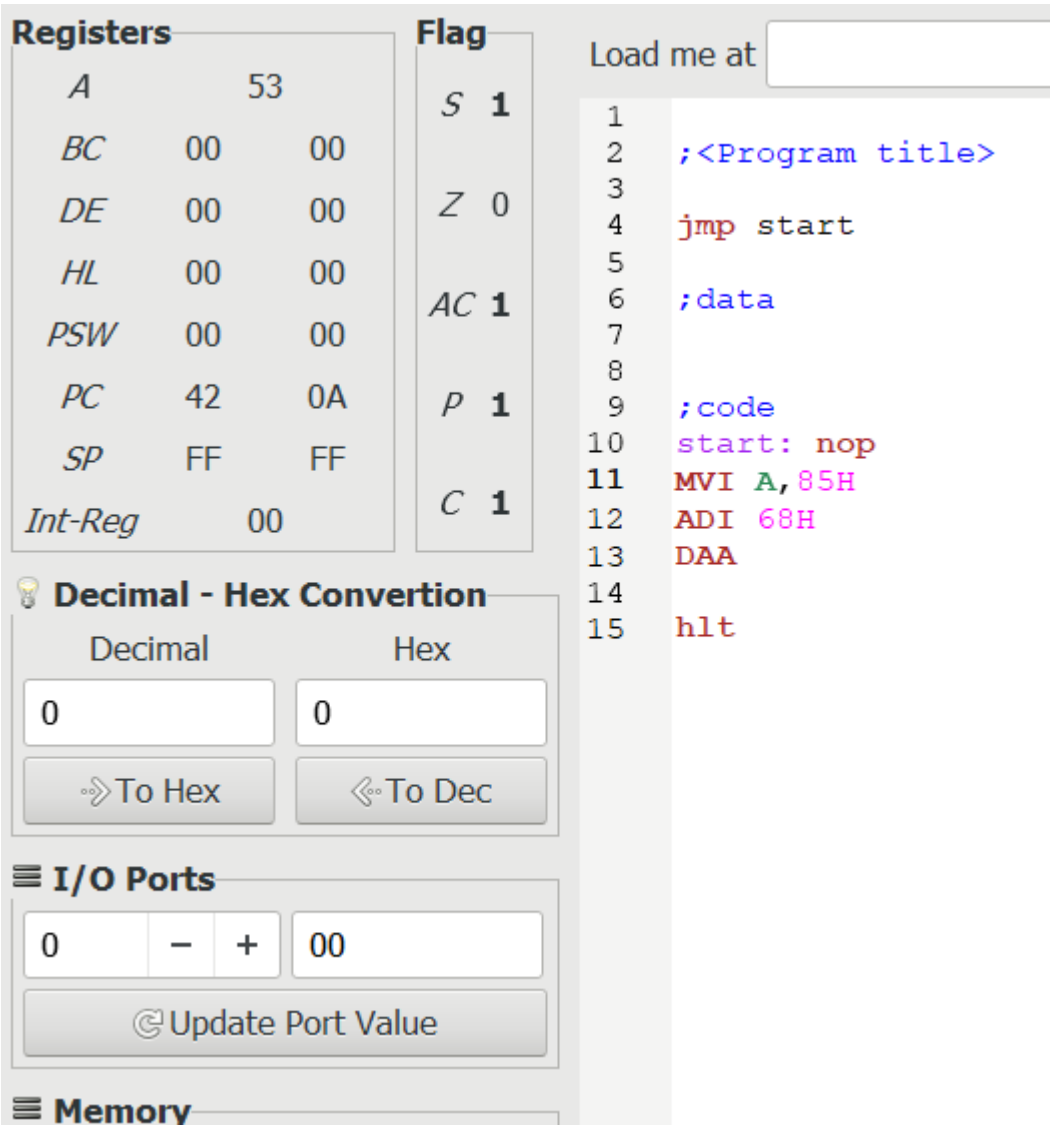

<u>Question 3</u>: Write a instruction in assemble language to add 16-bit contents of the specified register pair to

the contents of the HL register.

<u>Output:</u>

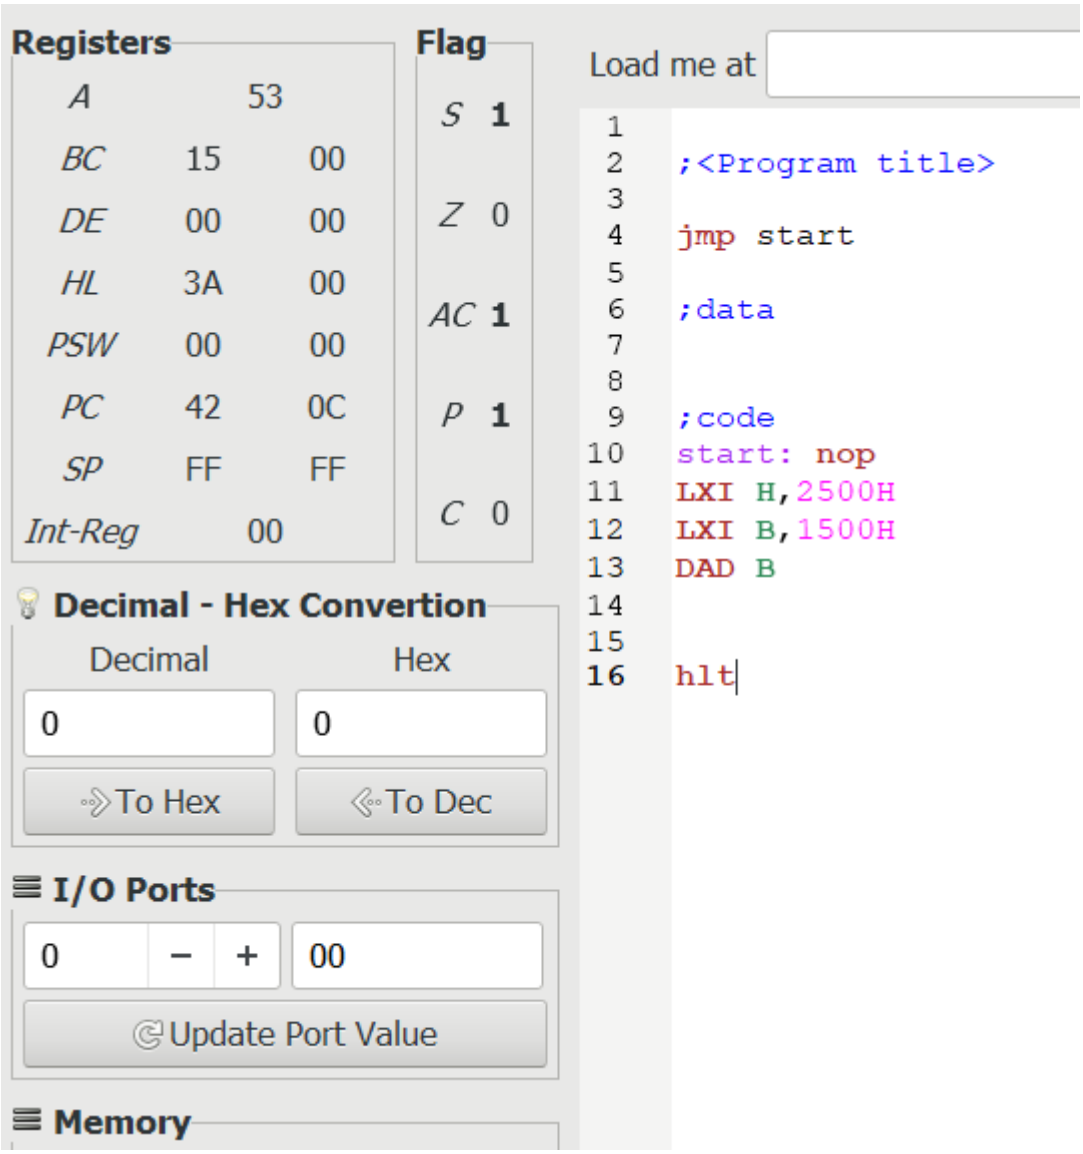

<u>Question 4</u> : Write a instruction in assemble language to copies contents of pointed 16-bit memory location

in L and contents of next memory location to H .

<u>Output:</u>

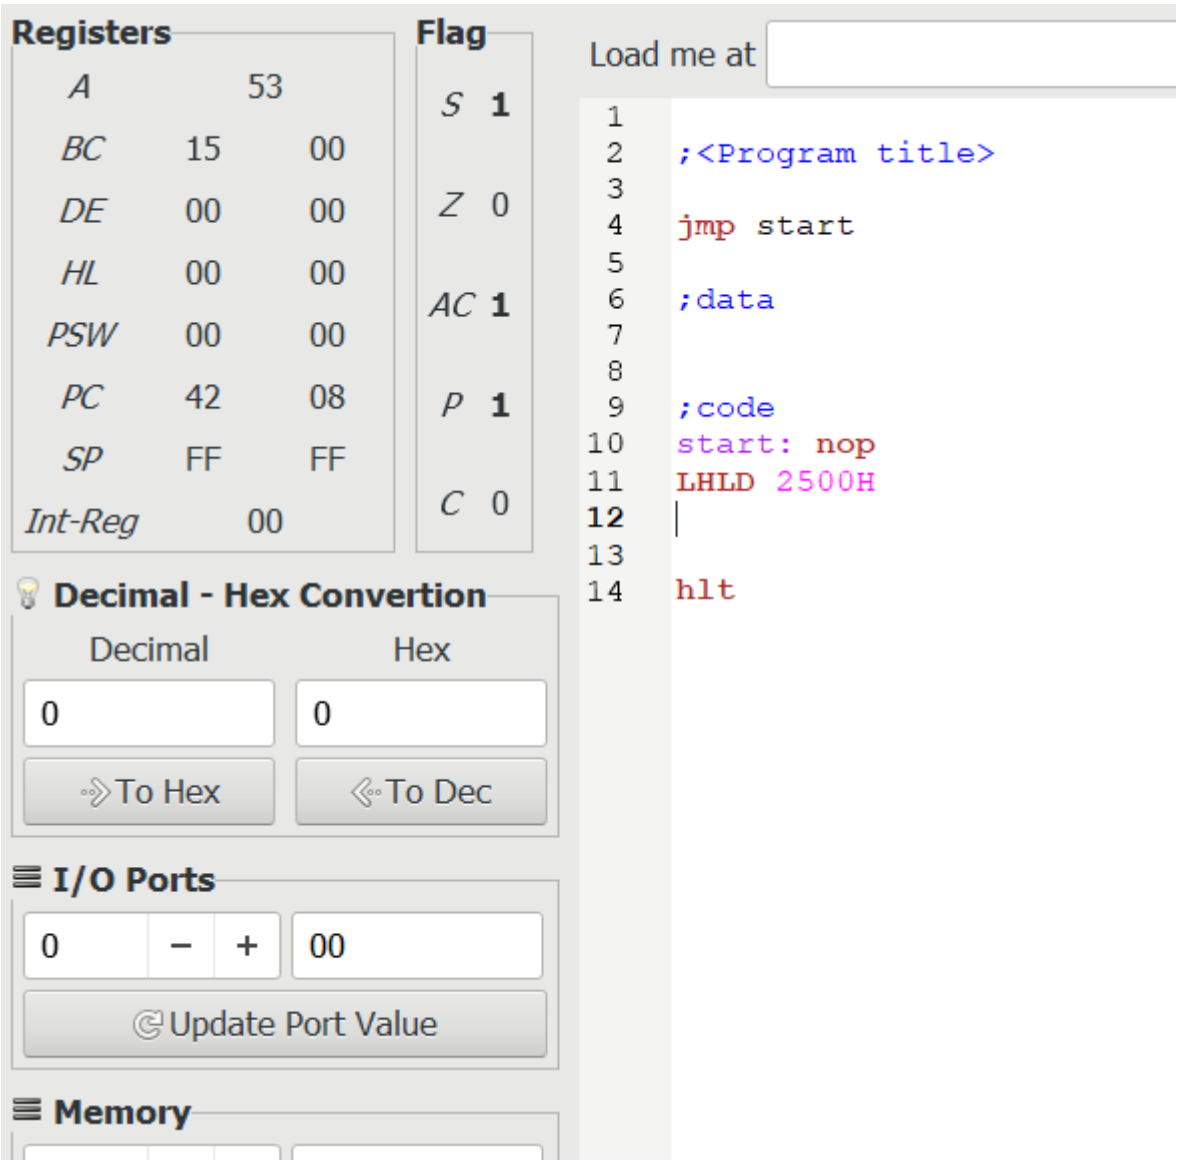

<u>Question 5</u> : Write a instruction in assemble language to copies contents of registers H and L into the Program

counter.

<u>Output:</u>

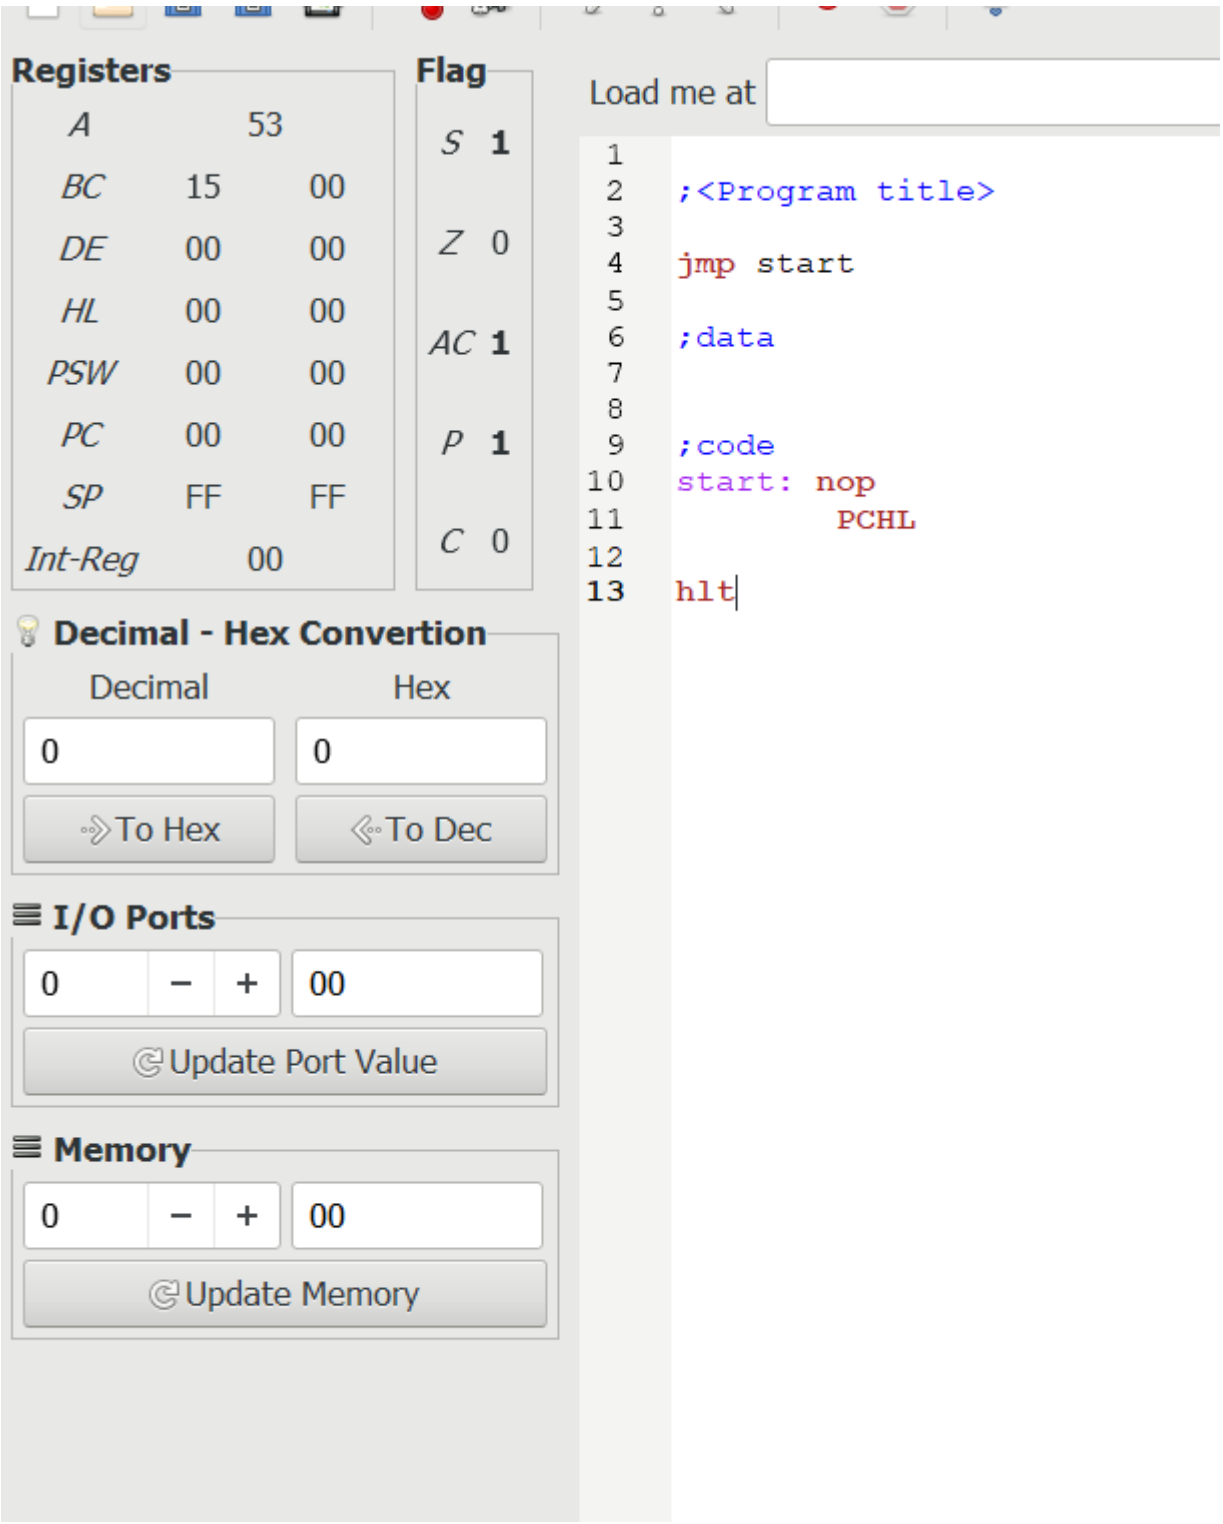

<u>Question 6</u> : **Write a instruction in assemble language to rotate the contents of the accumulator left through**

Carry, assuming the accumulator has A7H and carry flag is reset.

<u>Output:</u>

Registers

A	4F	
BC	15	00
DE	00	00
HL	00	00
PSW	00	00
PC	42	09
SP	FF	FF
Int-Reg	00	

Flag

S	1
Z	0
AC	1
P	1
C	1

Load me at

```
1
2   ;<Program title>
3
4   jmp start
5
6   ;data
7
8
9   ;code
10  start: nop
11  MVI A,0A7H
12  CMC
13  RAL
14
15  HLT
```

Decimal - Hex Convertion

Decimal	Hex
0	0
To Hex	To Dec

I/O Ports

0 − + 00

Update Port Value

Memory

0 − + 00

Update Memory

<u>Question 7</u> : Write a instruction in assemble language to rotate the contents of the accumulator right through

Carry, assuming the accumulator has 85H and carry flag is reset.

<u>Output:</u>

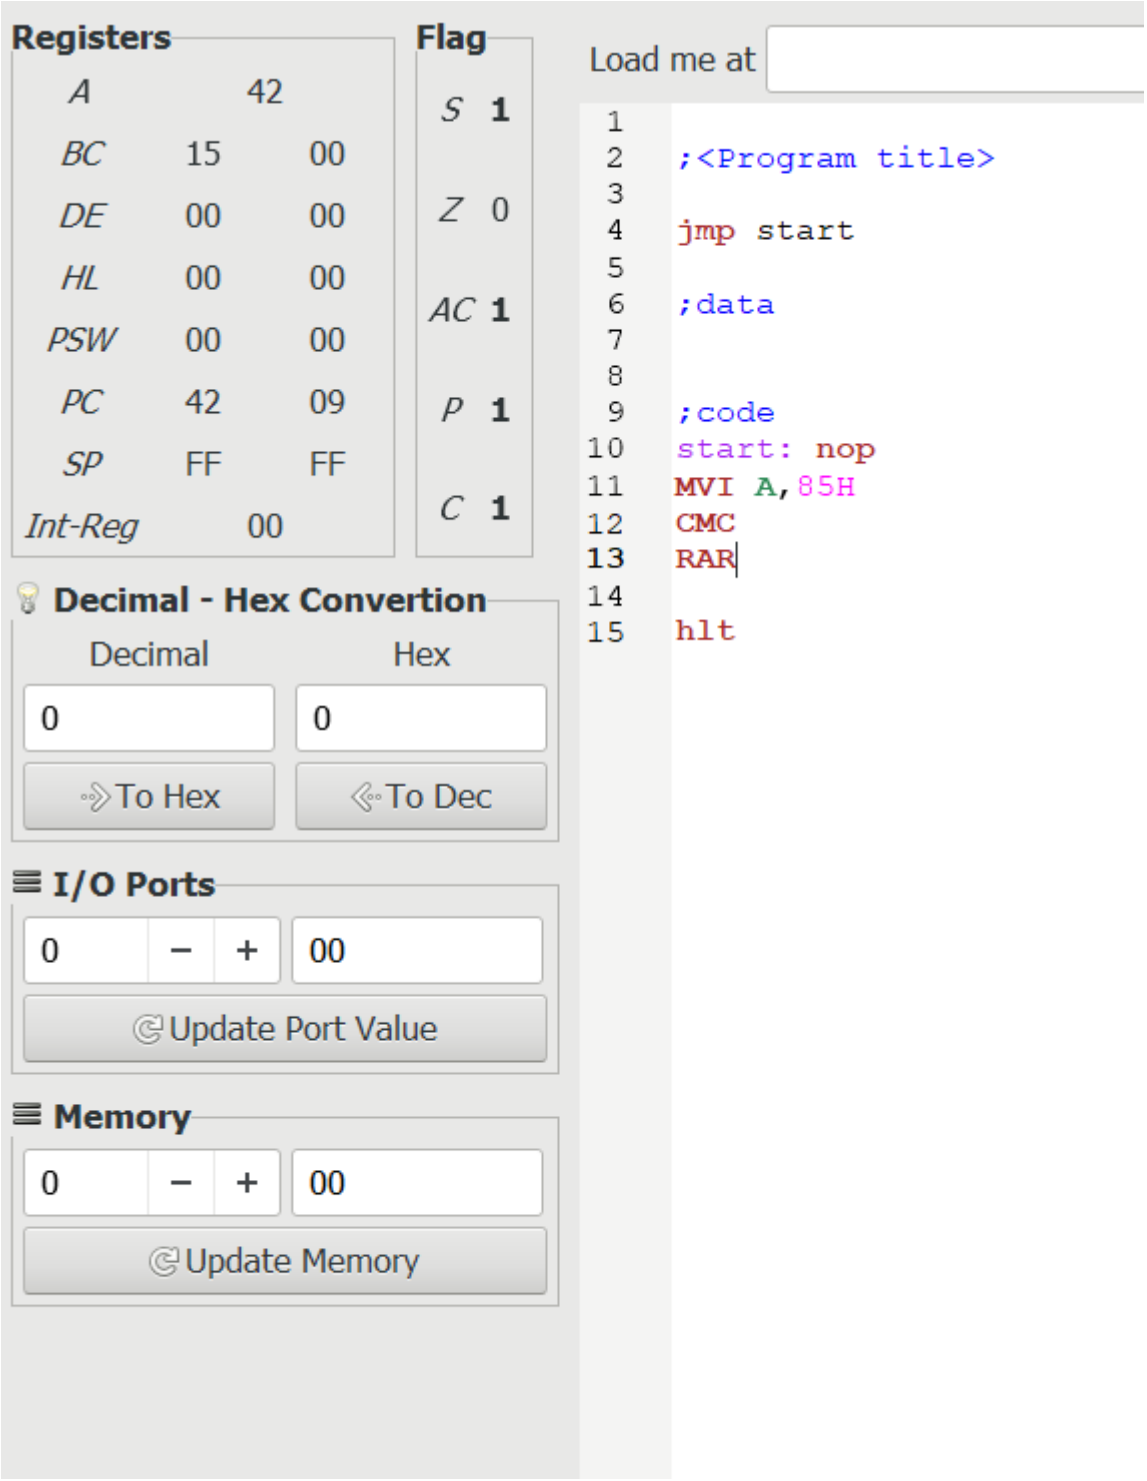

<u>Question 8</u> : Write a instruction in assemble language to rotate the contents of the accumulator right through

Carry, assuming the accumulator has 77H and carry flag is set.

<u>Output:</u>

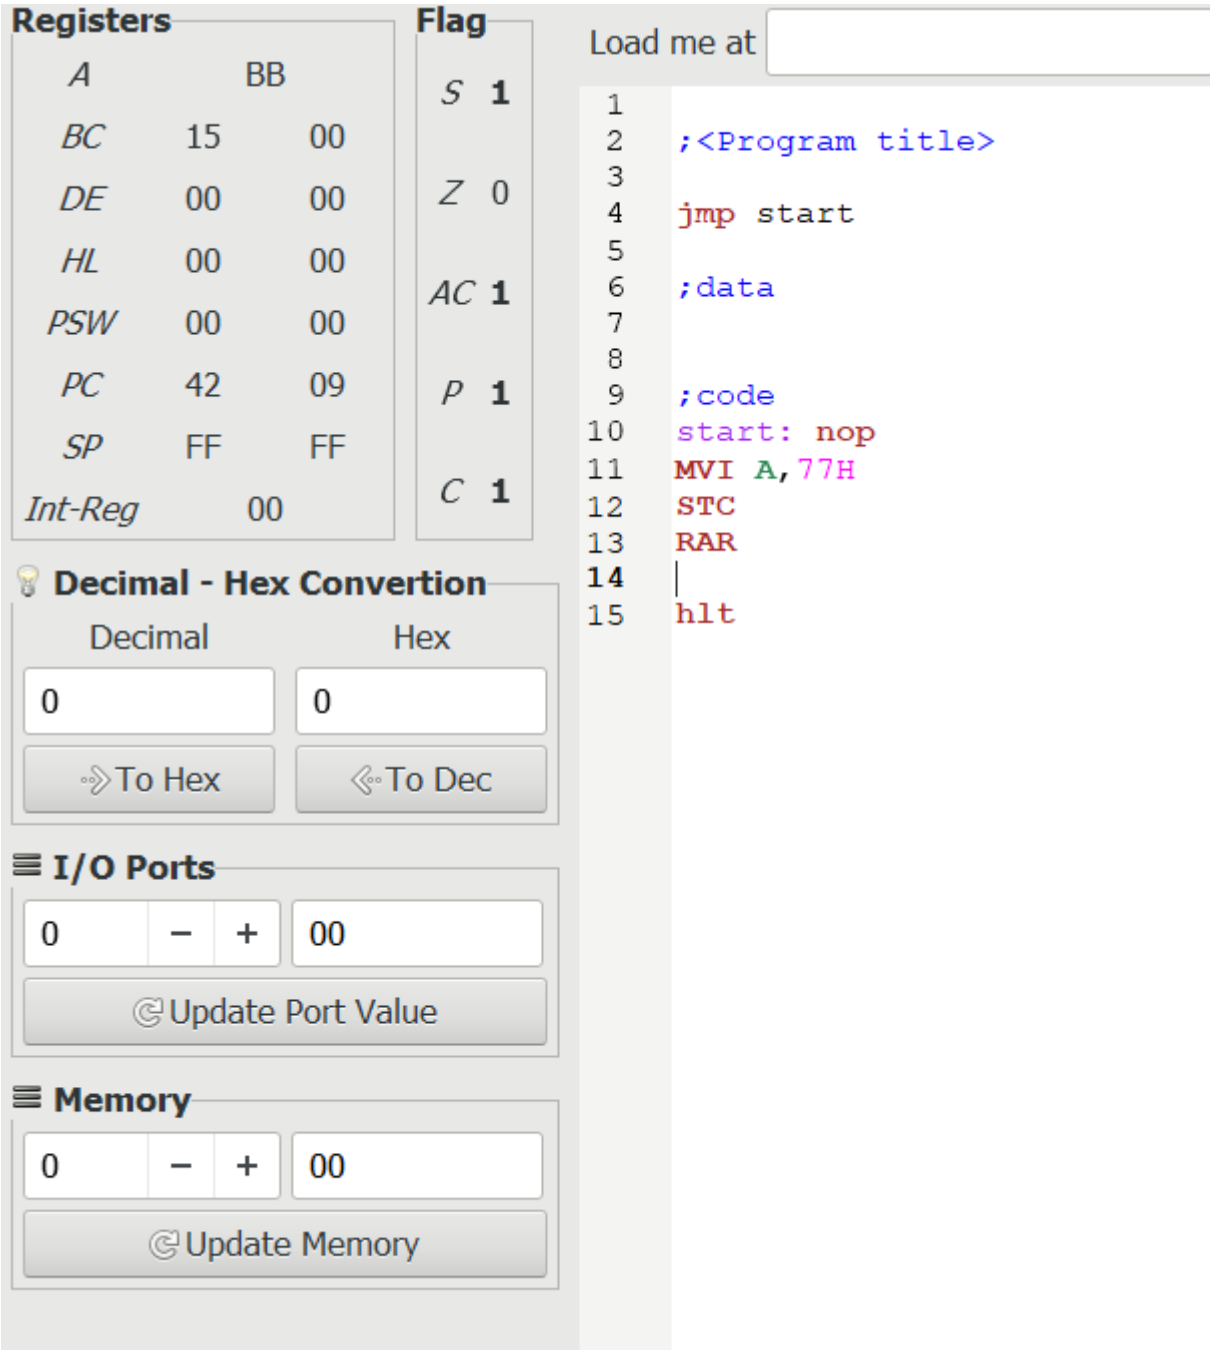

<u>Question 9</u> : Write a instruction in assemble language to rotate the contents of the accumulator left through

Carry, assuming the accumulator has 65H and carry flag is set.

<u>Output:</u>

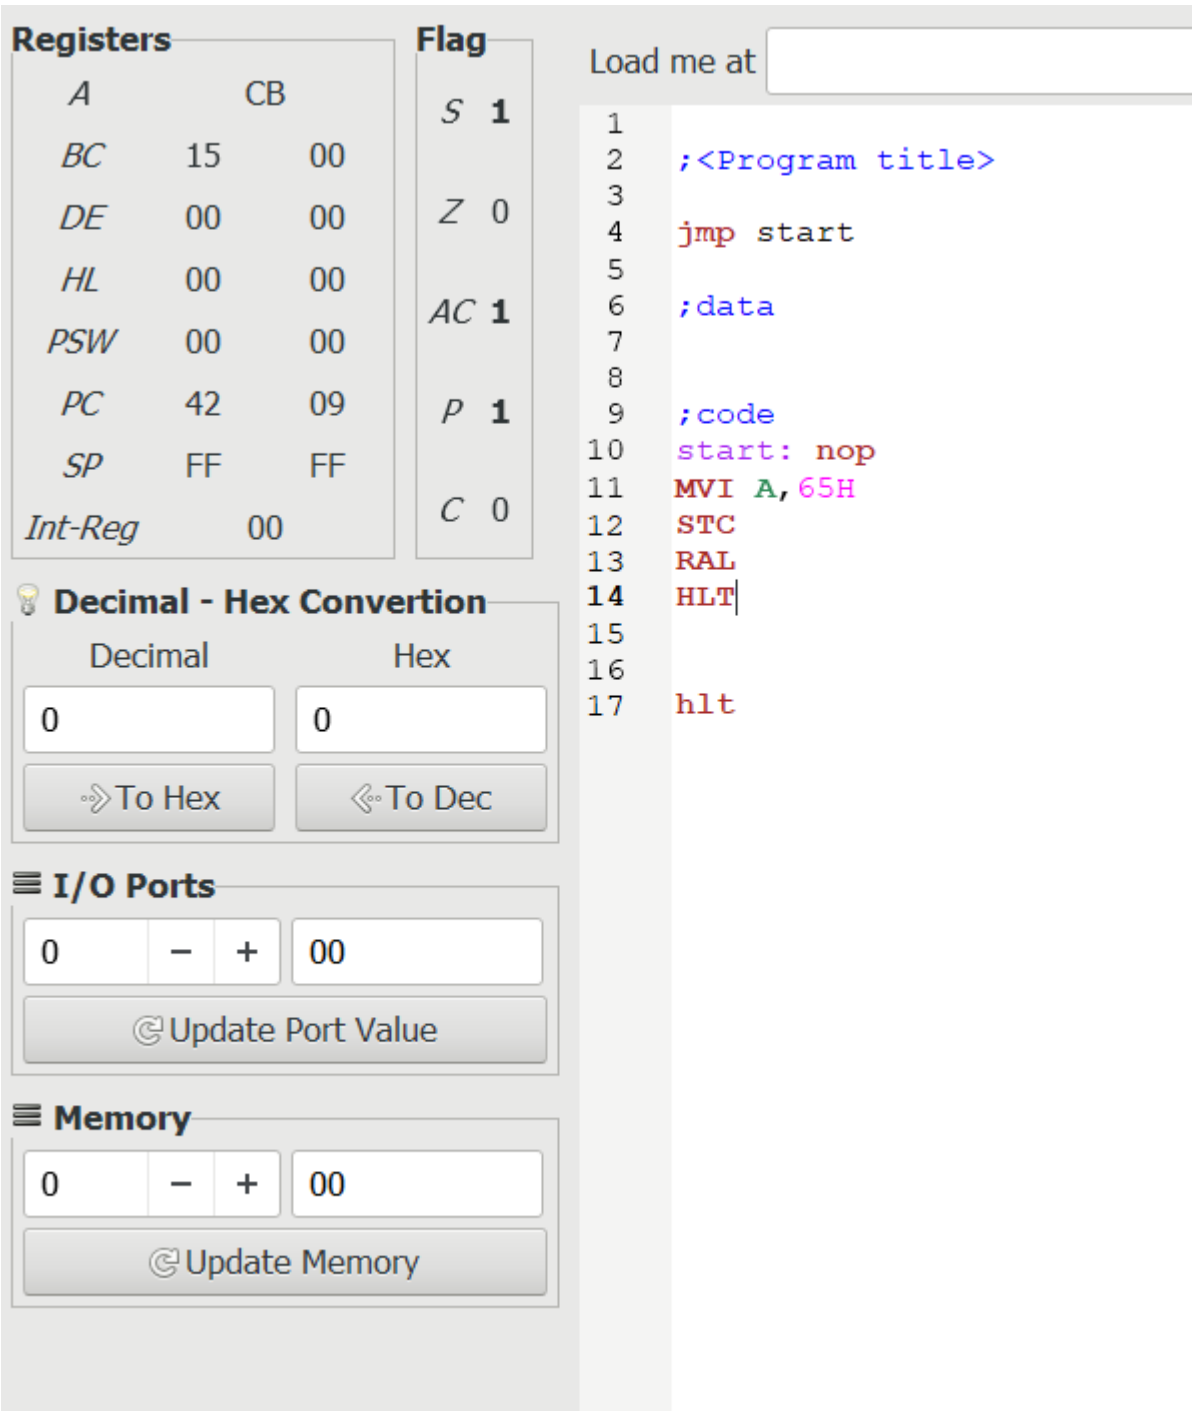

<u>Question 10</u> : Write a instruction in assemble language to copies the contents of HL pair to specified memory

location.

<u>Output:</u>

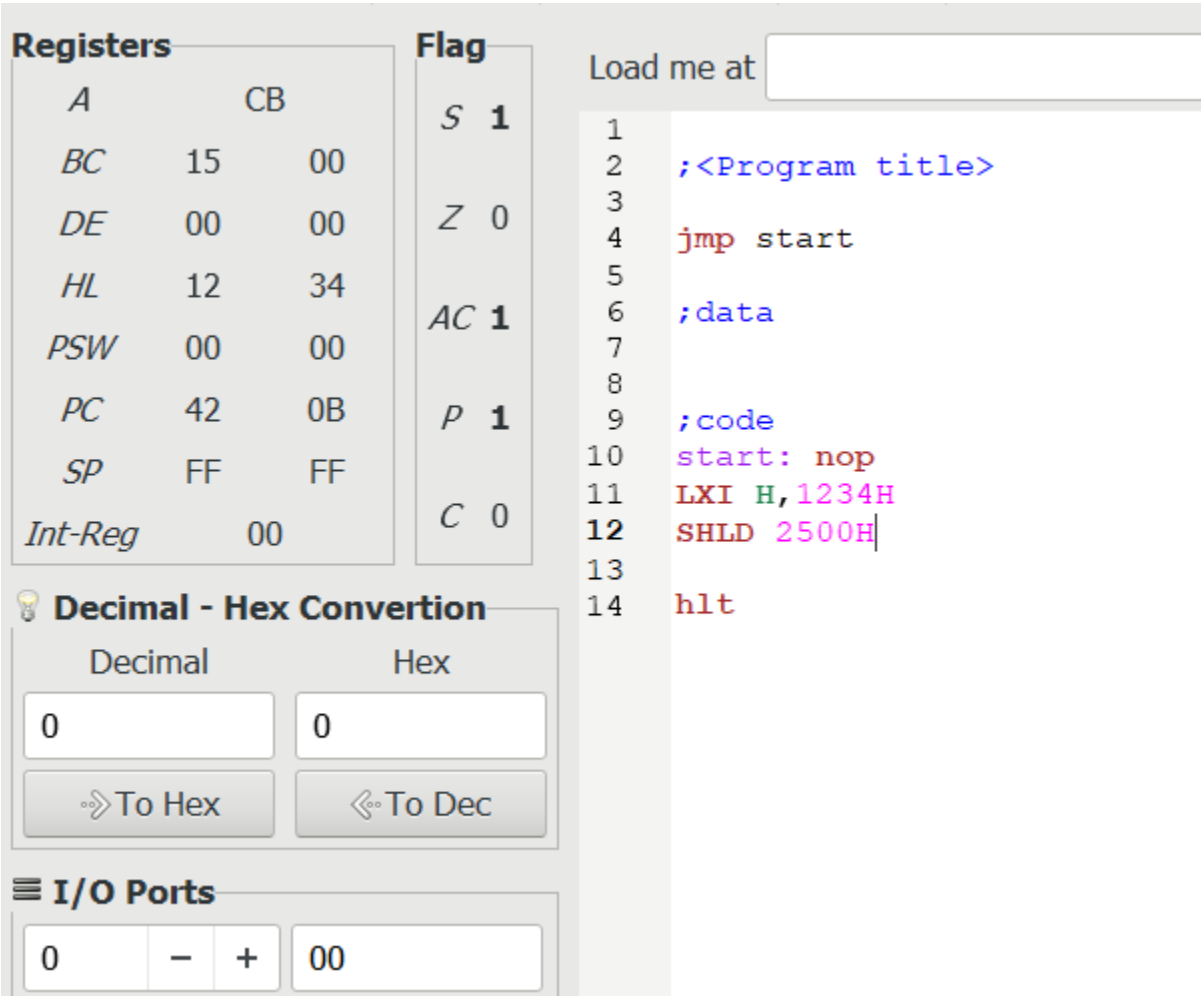

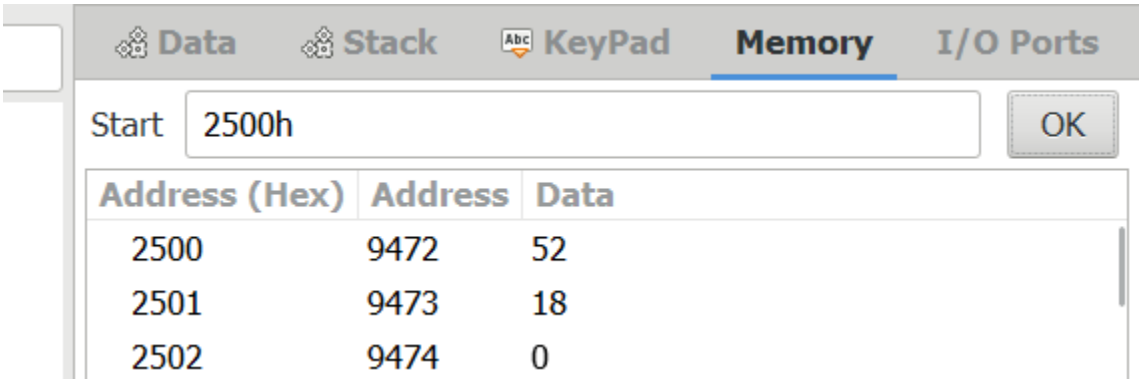

<u>Question 11</u>: Write a instruction in assemble language to copies the contents of HL pair to stack pointer.

<u>Output:</u>

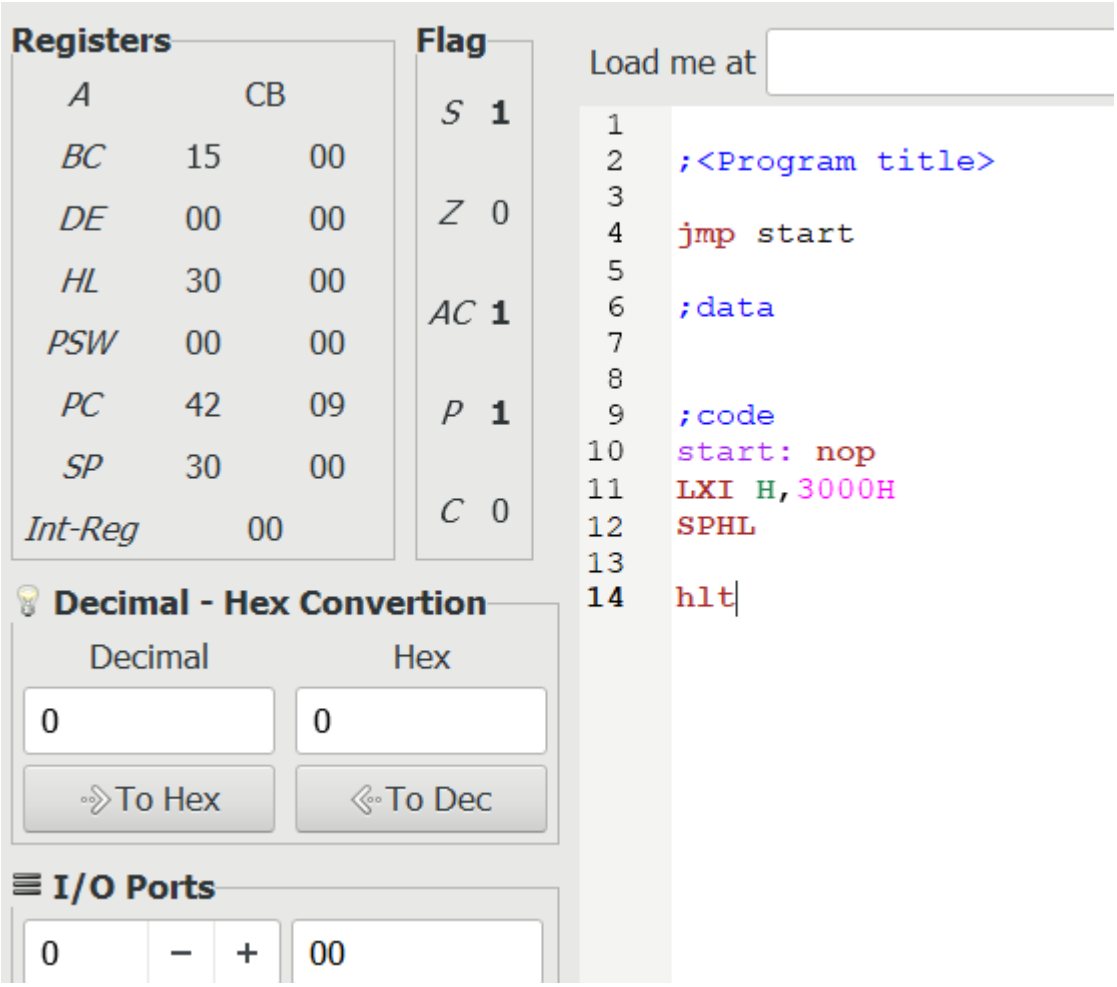

<u>Question 12</u>: Write a instruction in assemble language to set a carry flag.

<u>Output:</u>

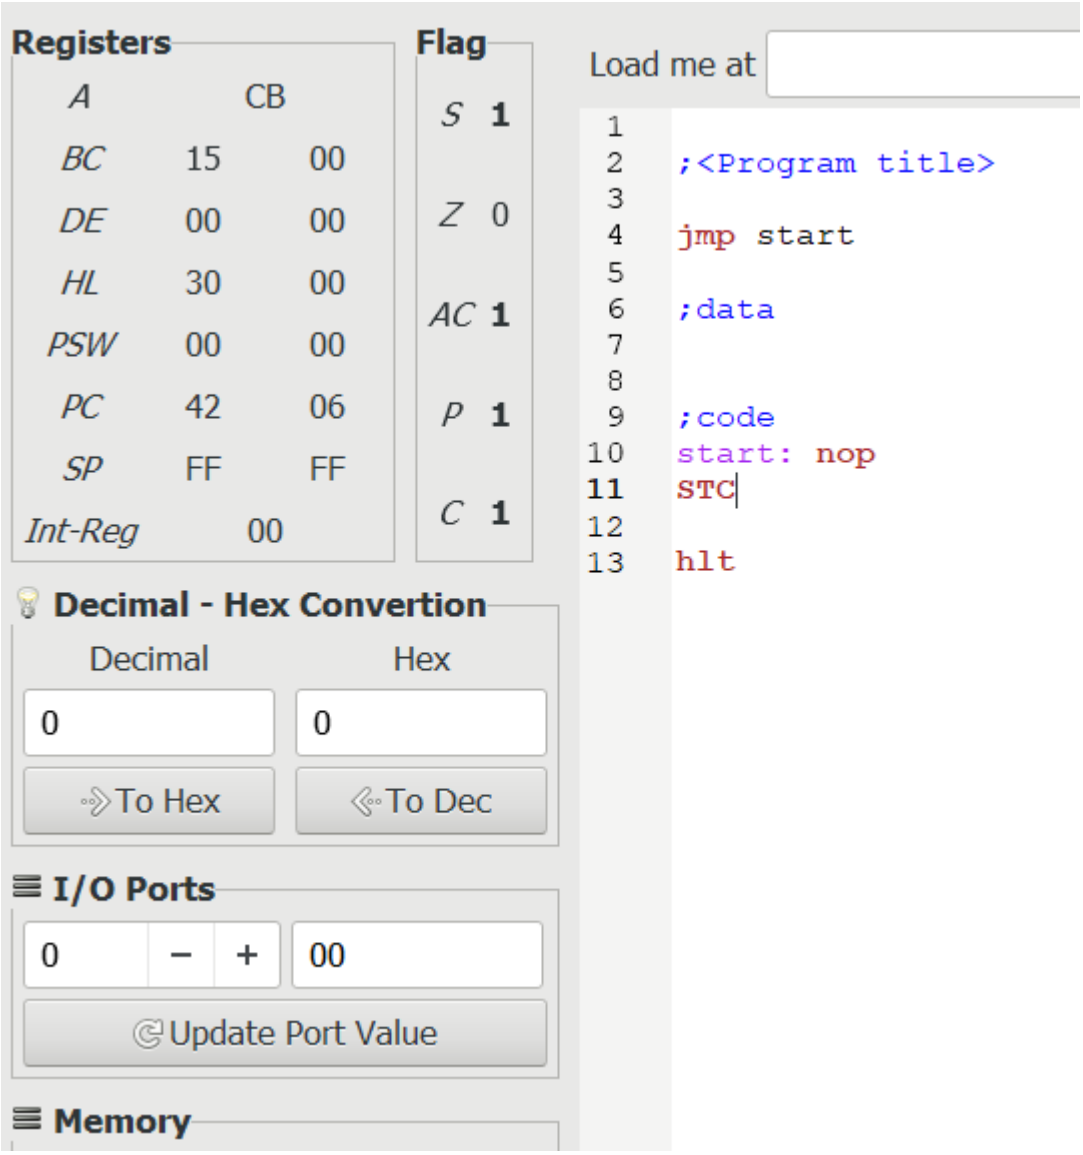

<u>Question 13</u>: Write a instruction in assemble language to exchange the contents of HL with DE.
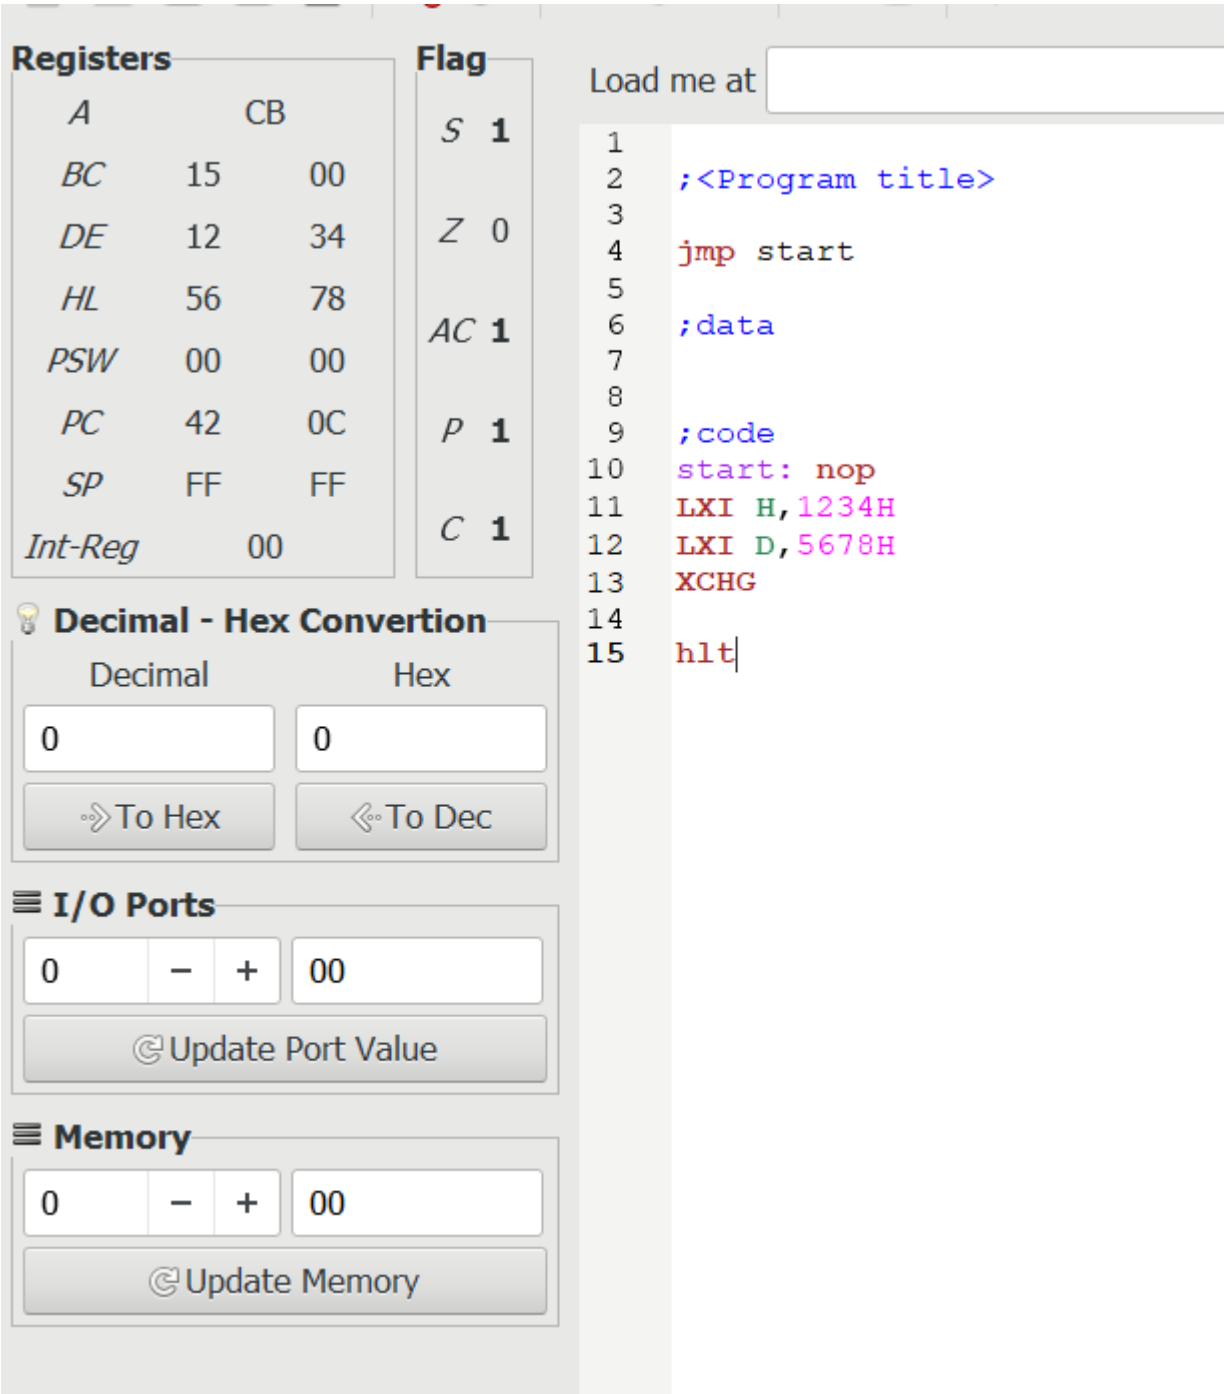
<u>Output:</u>