CN Assignment-09

Jeetu Mehra

U24AI032

1) Configure a wireless connection as shown in the below network.

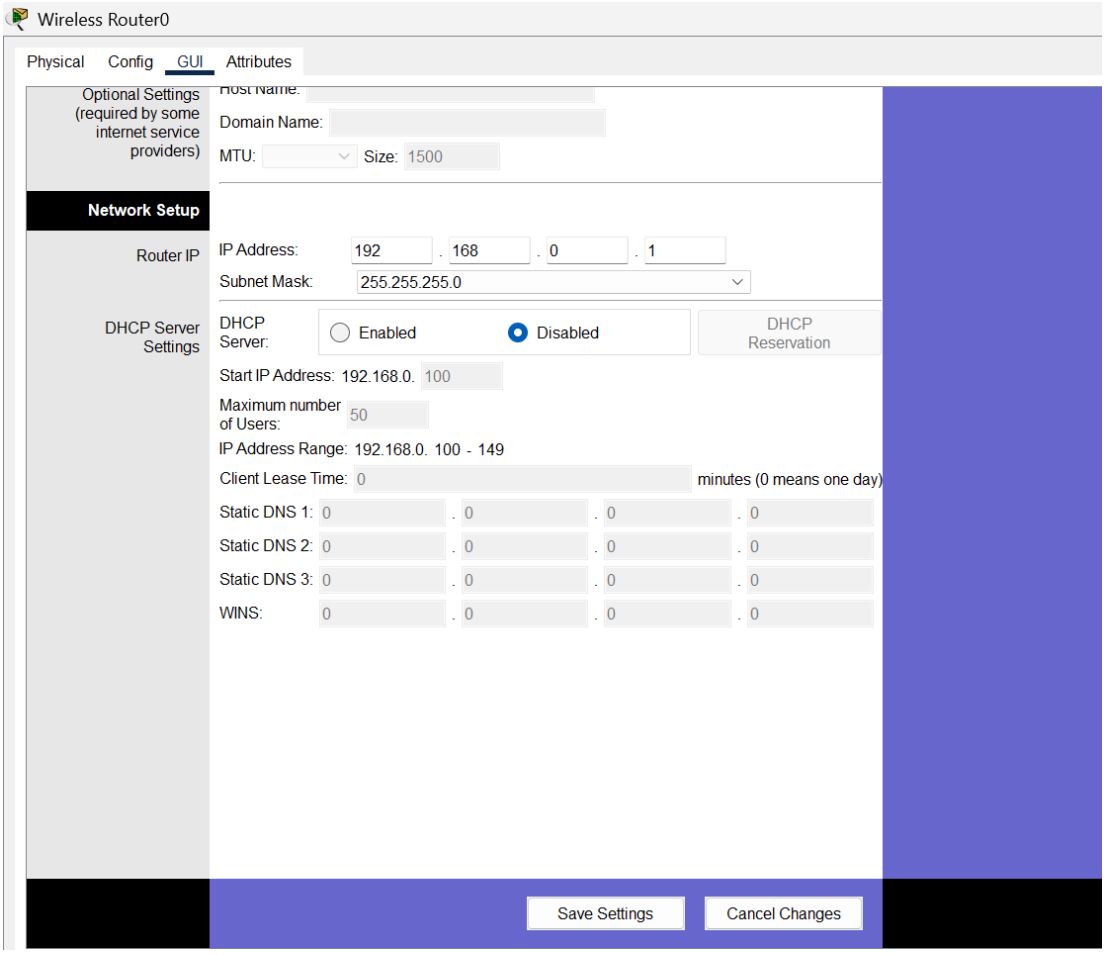

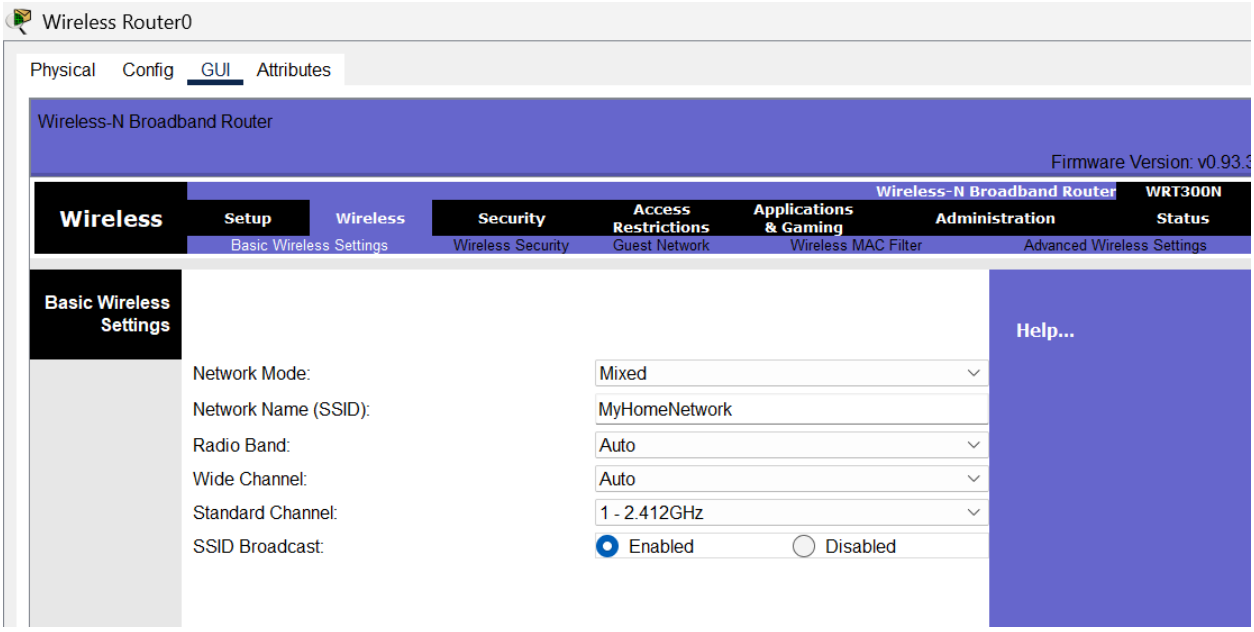

Save settings

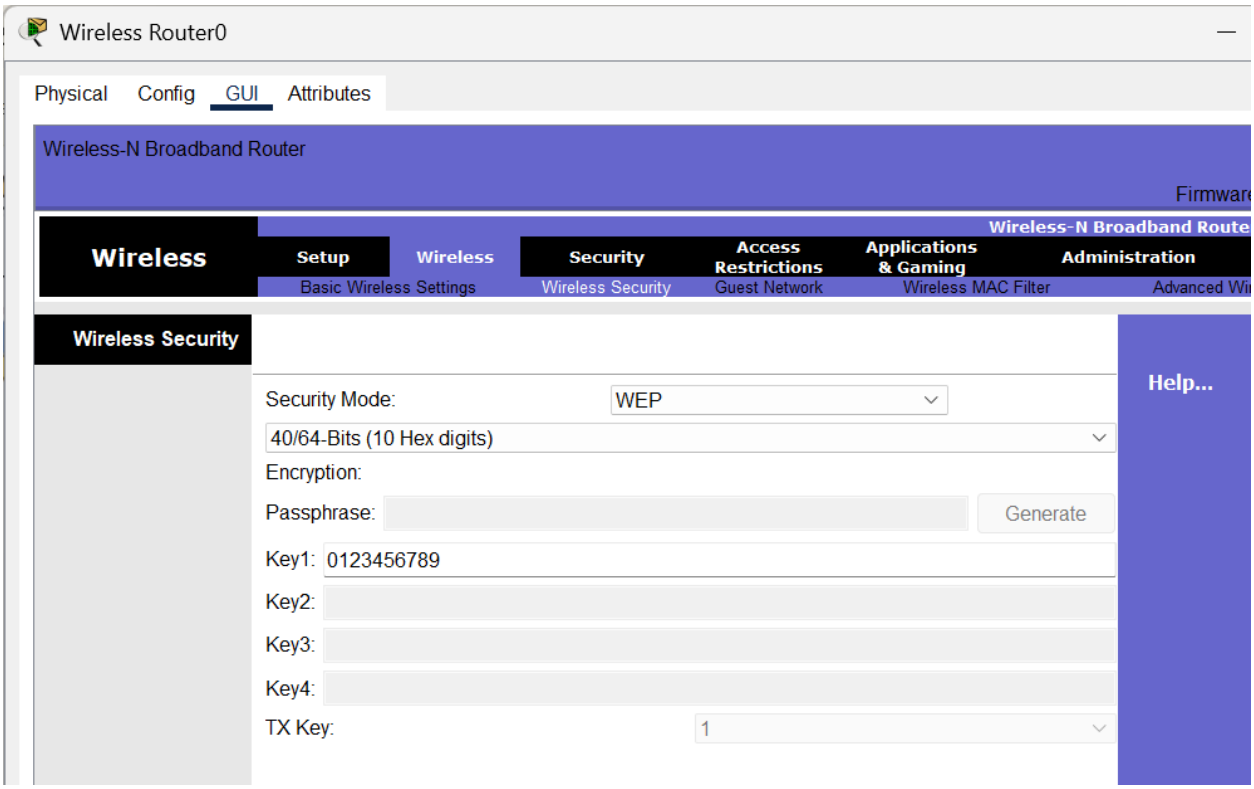

Save settings

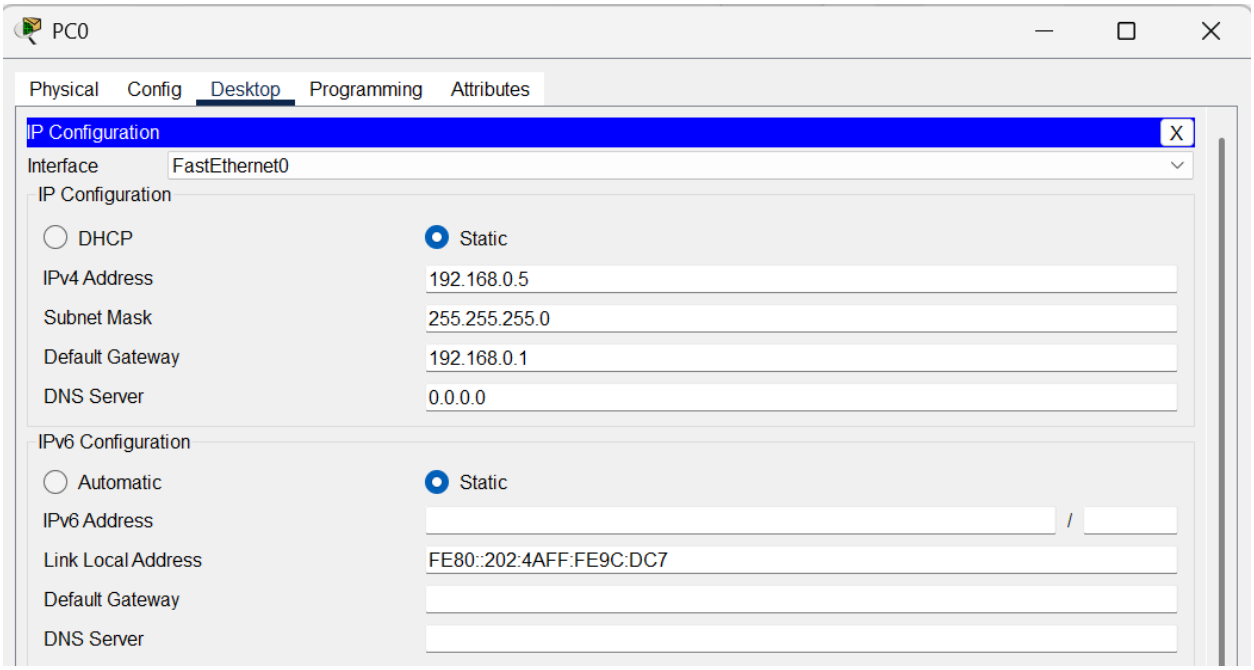
PC0
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.0.5
Subnet Mask
255.255.255.0
Default Gateway
192.168.0.1
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::202:4AFF:FE9C:DC7
Default Gateway
DNS Server

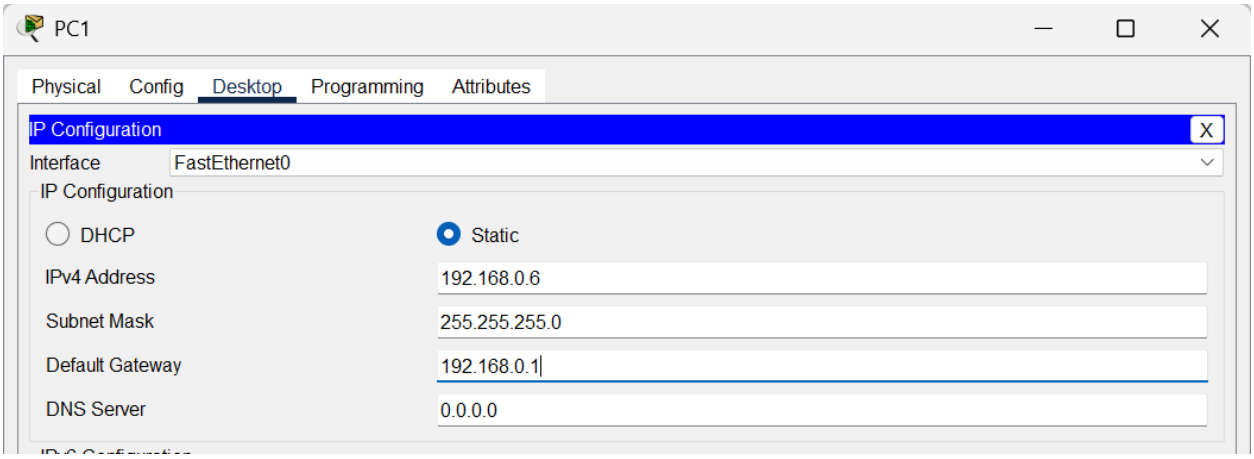
PC1
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.0.6
Subnet Mask
255.255.255.0
Default Gateway
192.168.0.1
DNS Server
0.0.0.0

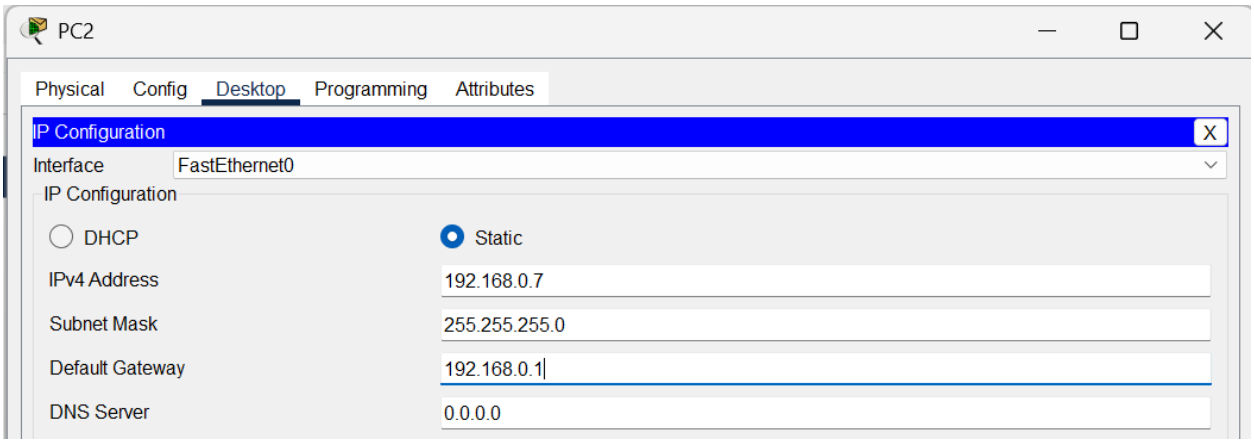
PC2
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.0.7
Subnet Mask
255.255.255.0
Default Gateway
192.168.0.1
DNS Server
0.0.0.0

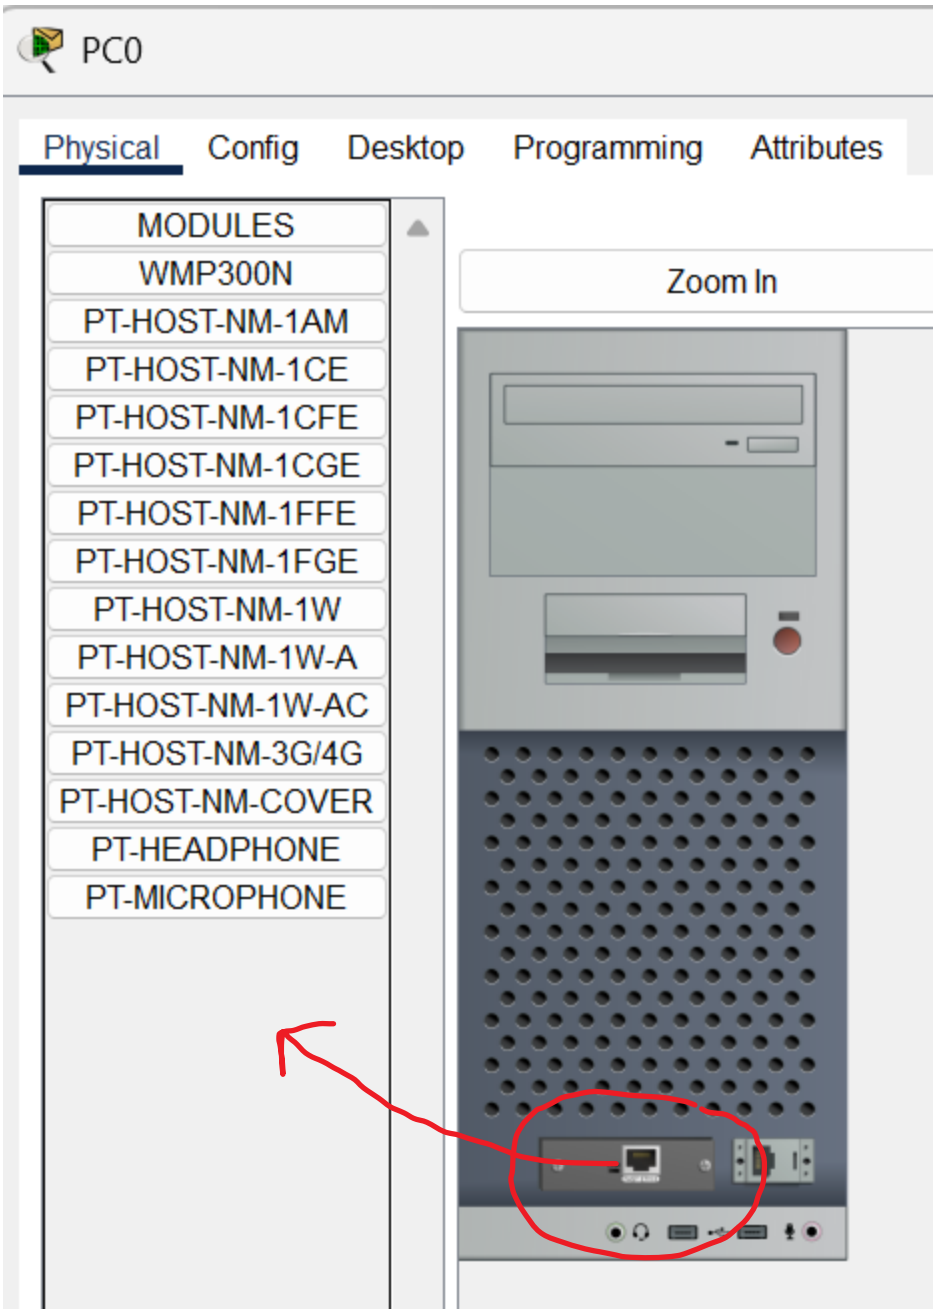

Click on red button first

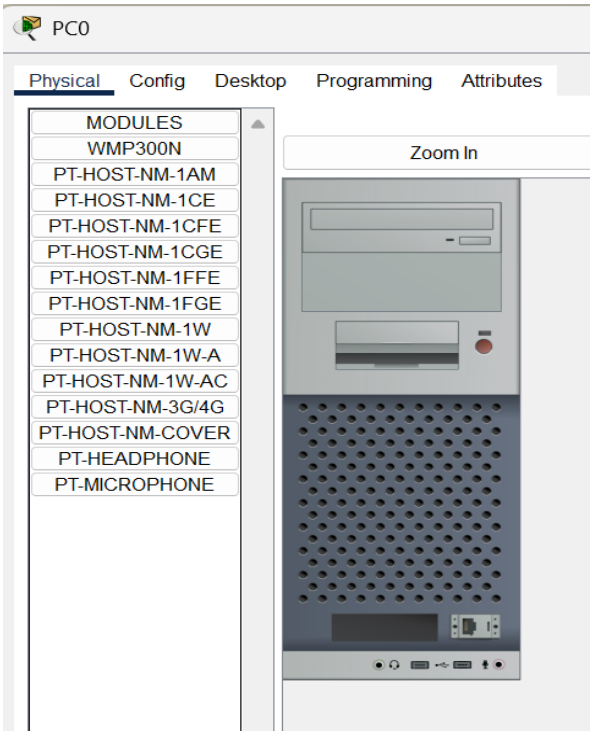
PC0
Physical
Config
Desktop
Programming
Attributes
MODULES
WMP300N
PT-HOST-NM-1AM
PT-HOST-NM-1CE
PT-HOST-NM-1CFE
PT-HOST-NM-1CGE
PT-HOST-NM-1FFE
PT-HOST-NM-1FGE
PT-HOST-NM-1W
PT-HOST-NM-1W-A
PT-HOST-NM-1W-AC
PT-HOST-NM-3G/4G
PT-HOST-NM-COVER
PT-HEADPHONE
PT-MICROPHONE
Zoom In

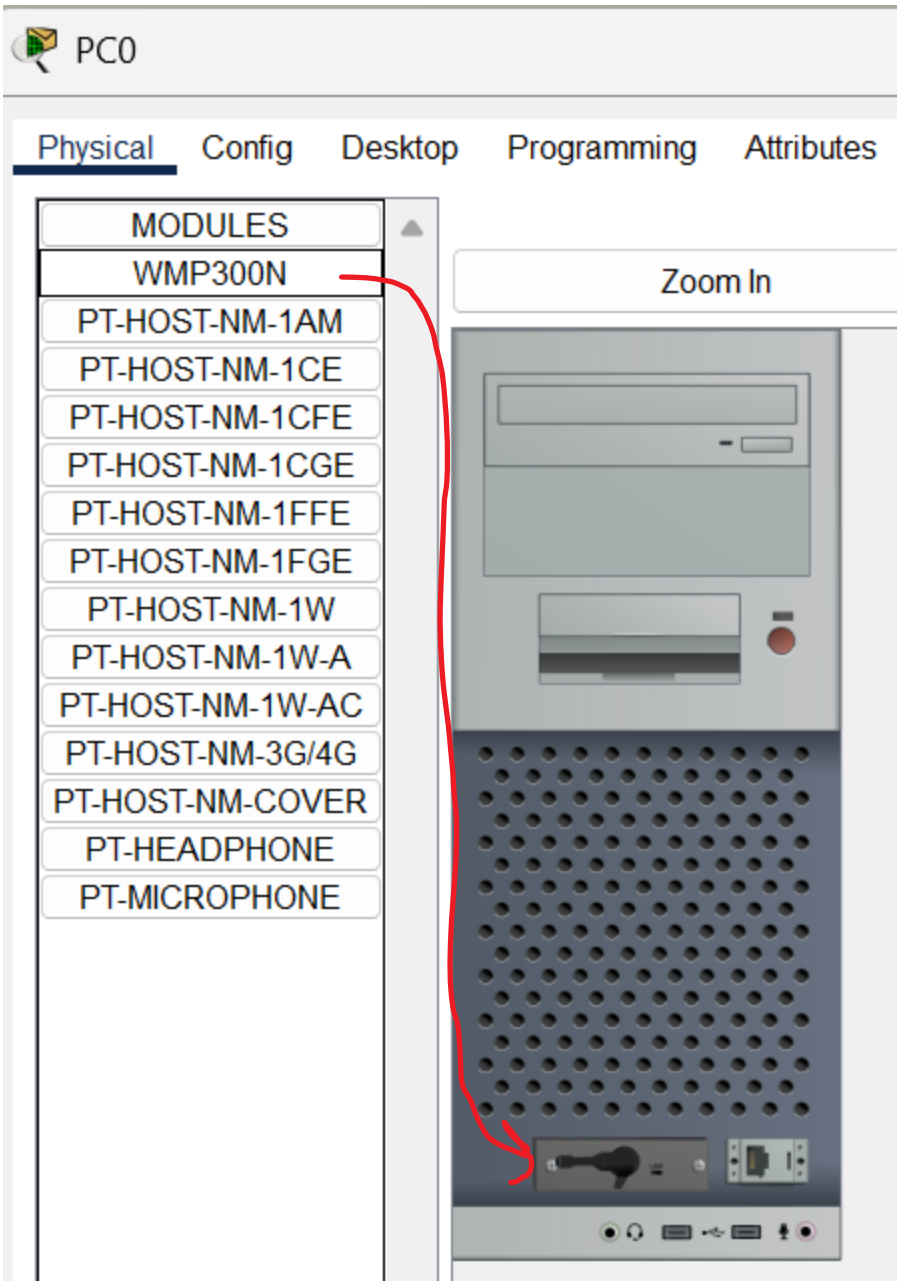

Turn off red button→Go to Desktop→Click on PC wireless

Link Information
Connect
Profiles
Below is a list of available wireless networks. To search for more wireless networks, click the Refresh button. To view more information about a network, select the wireless network name. To connect to that network, click the Connect button below.
2.4GHz
Wireless Network Name
CH
Signal
MyHomeNetwork
1
100%
Site Information
Wireless Mode Infrastructure
Network Type Mixed B/G/N
Radio Band Auto
Security WEP
MAC Address 0001.638E.6206
Refresh
Connect
Adapter is Inactive
Wireless-N Notebook Adapter
Wireless Network Monitor v1.0
Model No. WPC300N

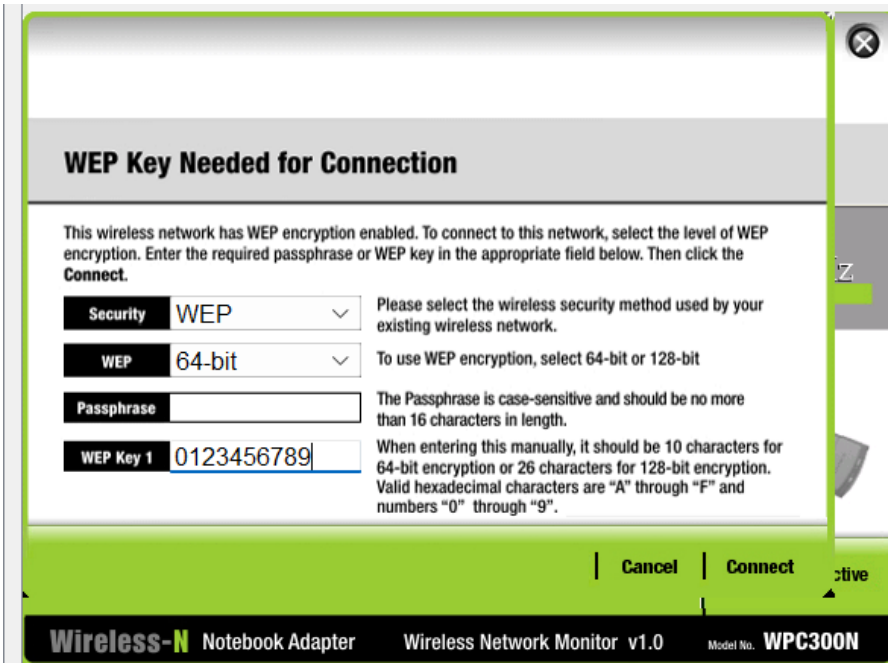
WEP Key Needed for Connection
This wireless network has WEP encryption enabled. To connect to this network, select the level of WEP encryption. Enter the required passphrase or WEP key in the appropriate field below. Then click the Connect.
Security
WEP
Please select the wireless security method used by your existing wireless network.
WEP
64-bit
To use WEP encryption, select 64-bit or 128-bit
Passphrase
The Passphrase is case-sensitive and should be no more than 16 characters in length.
WEP Key 1
0123456789
When entering this manually, it should be 10 characters for 64-bit encryption or 26 characters for 128-bit encryption. Valid hexadecimal characters are "A" through "F" and numbers "0" through "9".
Cancel
Connect
Wireless-N Notebook Adapter
Wireless Network Monitor v1.0
Model No. WPC300N

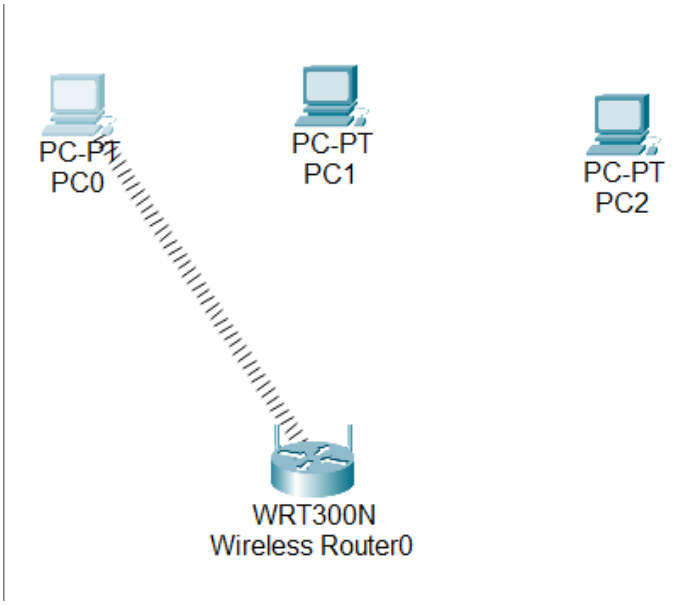

Repeat above steps for other PCs

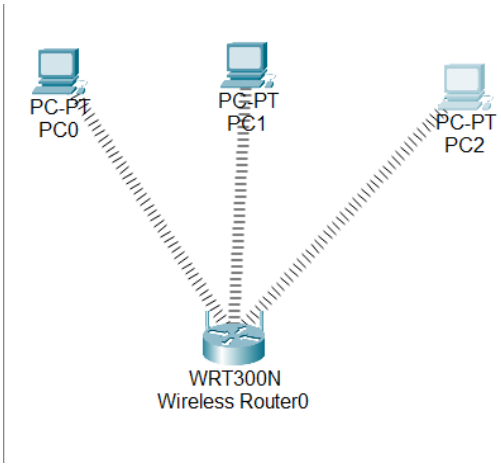

PC0

```
C:\>
C:\>ping 192.168.0.6

Pinging 192.168.0.6 with 32 bytes of data:

Reply from 192.168.0.6: bytes=32 time=40ms TTL=128
Reply from 192.168.0.6: bytes=32 time=21ms TTL=128
Reply from 192.168.0.6: bytes=32 time=33ms TTL=128
Reply from 192.168.0.6: bytes=32 time=36ms TTL=128

Ping statistics for 192.168.0.6:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 21ms, Maximum = 40ms, Average = 32ms

C:\>ping 192.168.0.7

Pinging 192.168.0.7 with 32 bytes of data:

Reply from 192.168.0.7: bytes=32 time=51ms TTL=128
Reply from 192.168.0.7: bytes=32 time=30ms TTL=128
Reply from 192.168.0.7: bytes=32 time=35ms TTL=128
Reply from 192.168.0.7: bytes=32 time=36ms TTL=128

Ping statistics for 192.168.0.7:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 30ms, Maximum = 51ms, Average = 38ms
```

2) Configure the below network using a server and connect wirelessly all the device.

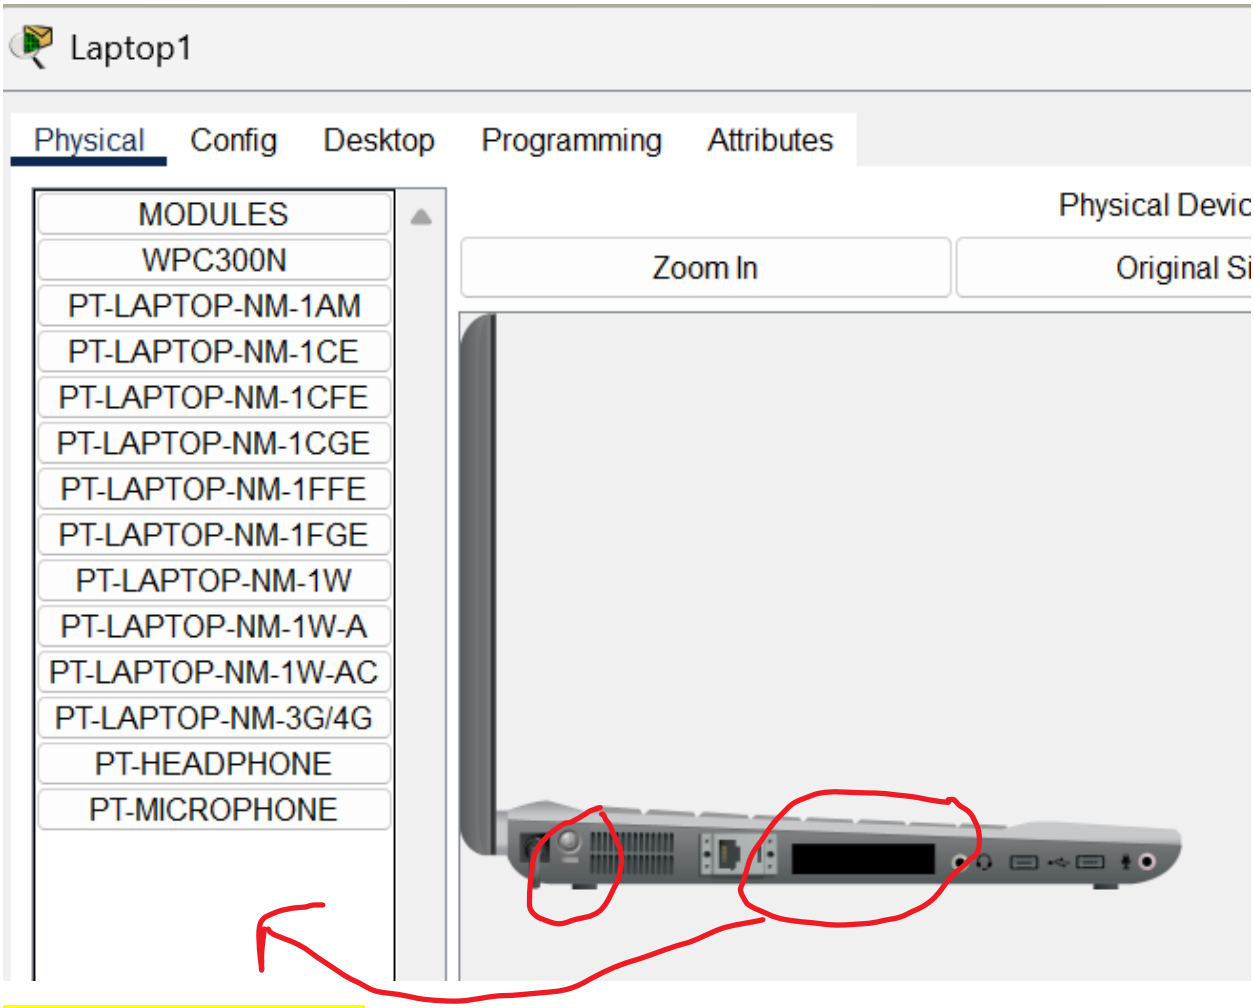

Turn off power first, then drag

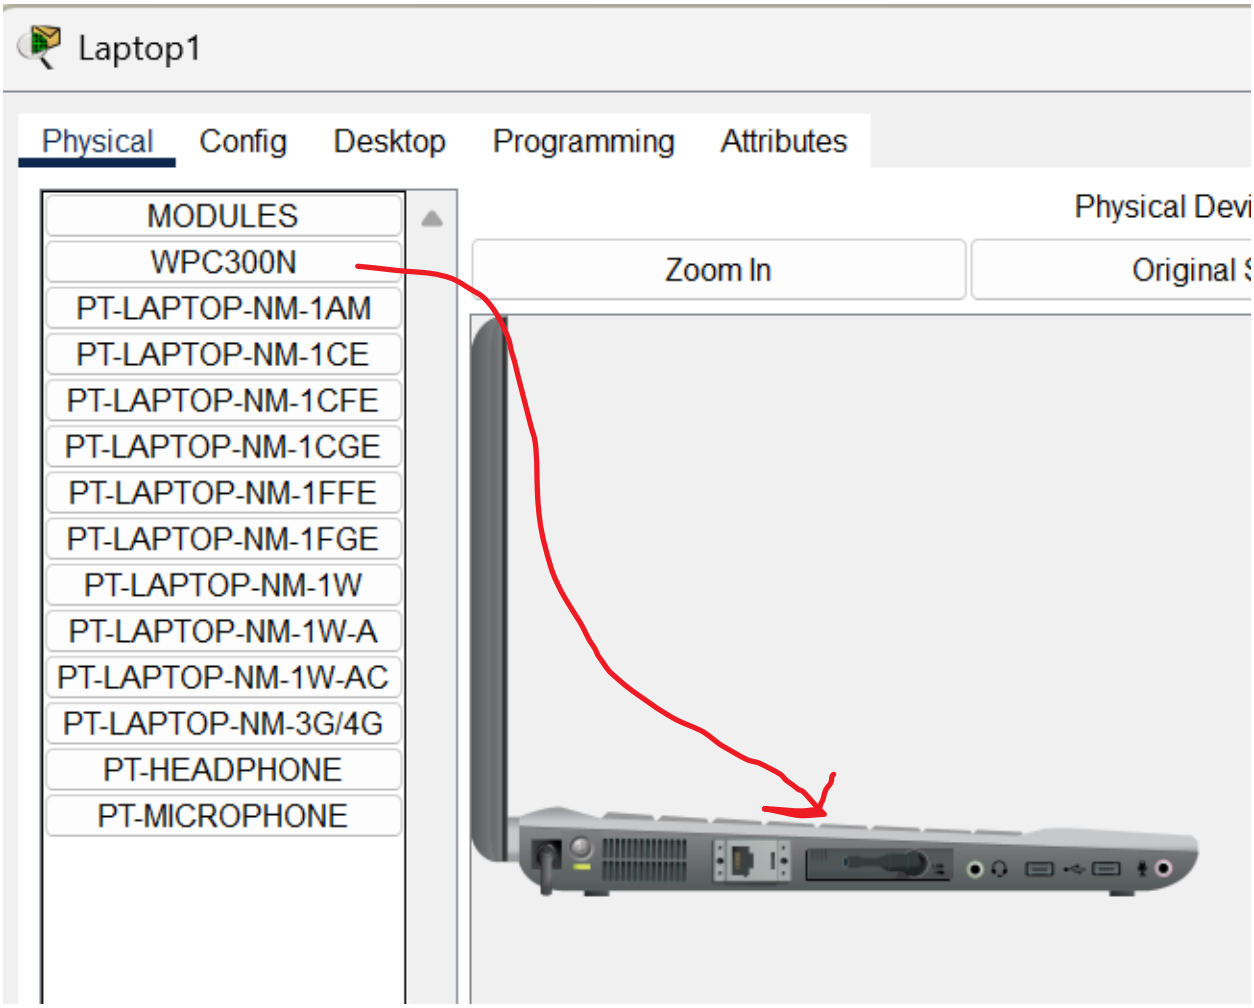

Drag first, then turn on power

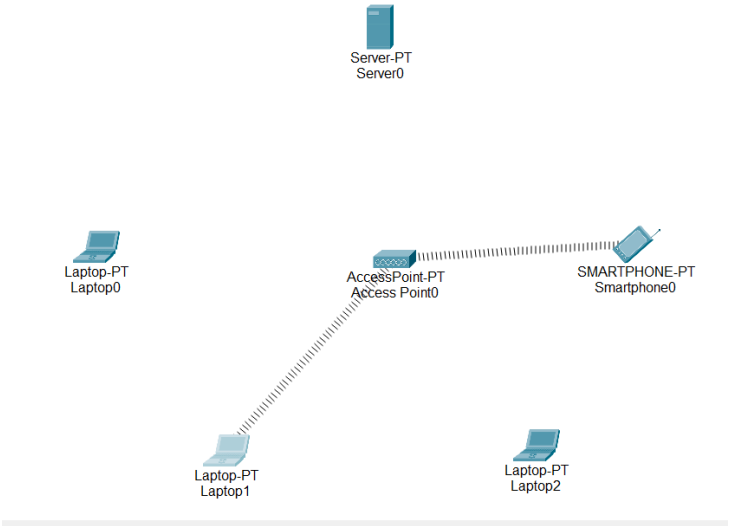

Repeat for other laptops

Go to server→Go to services→Click DHCP

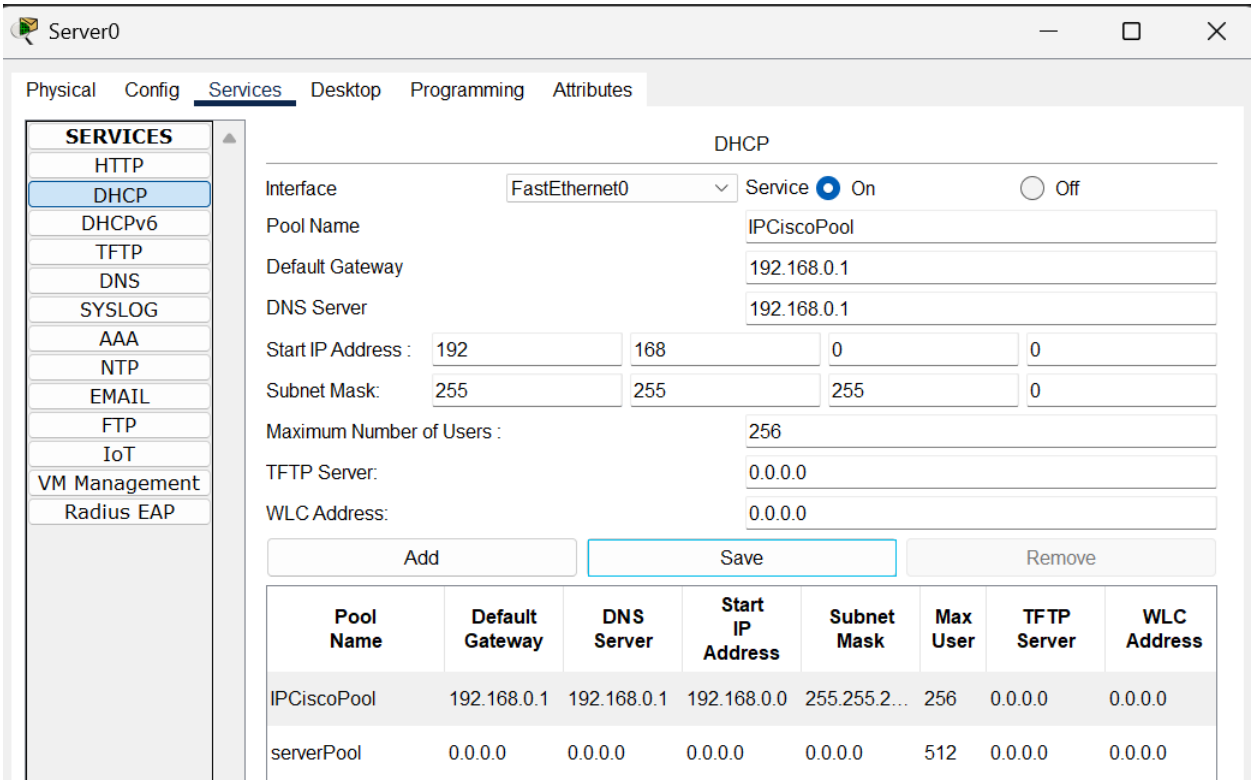

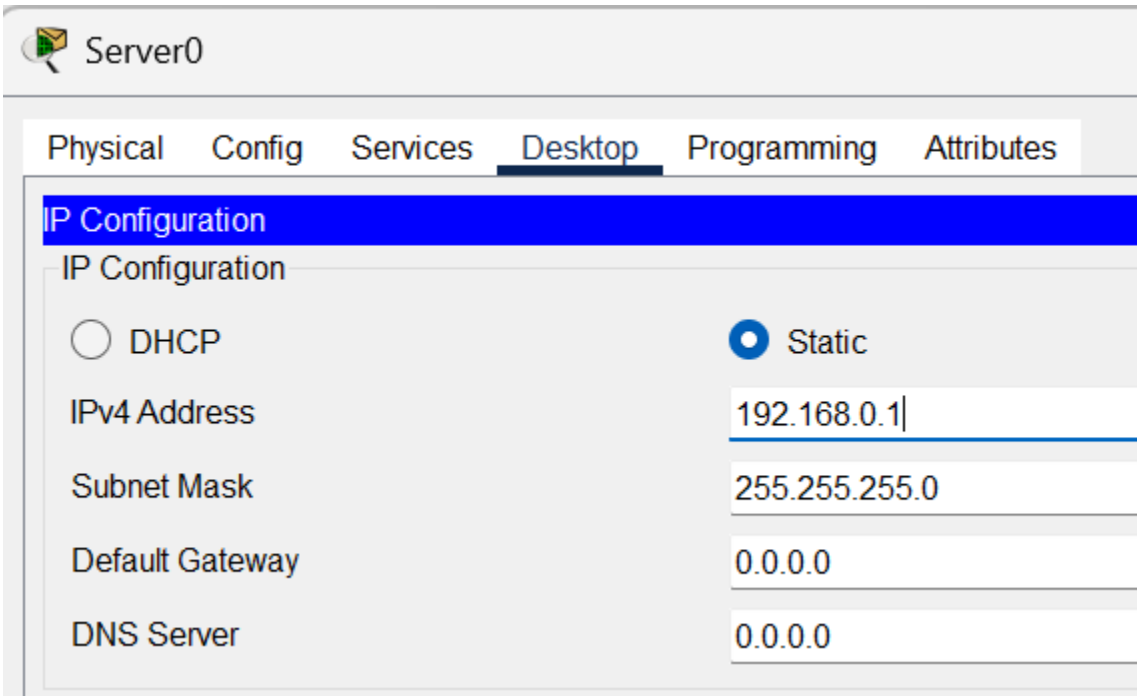

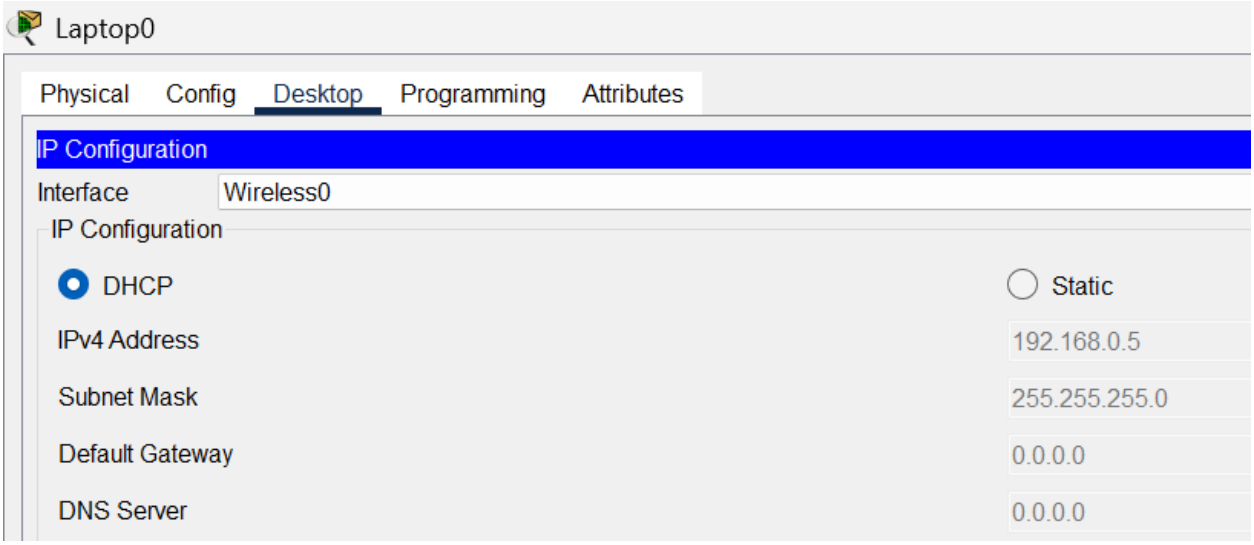
Laptop0
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
Wireless0
IP Configuration
DHCP
Static
IPv4 Address
192.168.0.5
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0

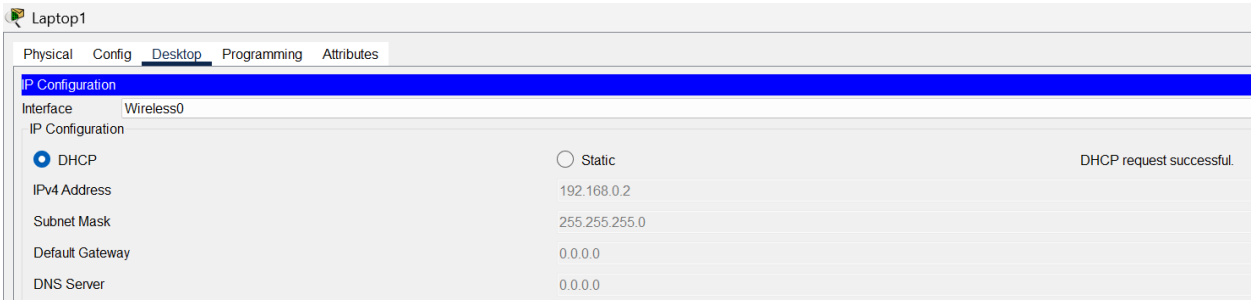
Laptop1
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
Wireless0
IP Configuration
DHCP
Static
DHCP request successful.
IPv4 Address
192.168.0.2
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0

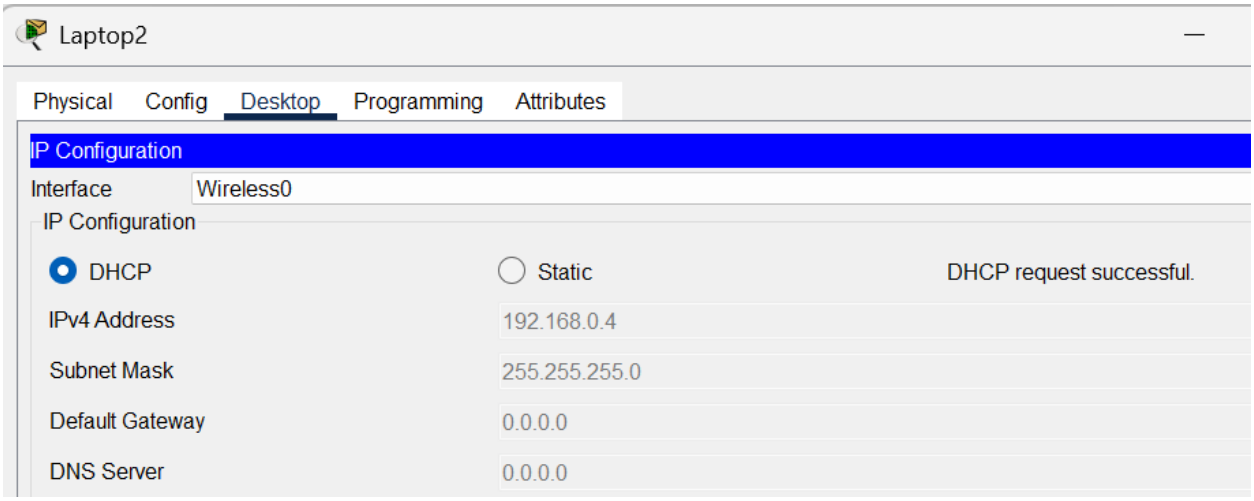
Laptop2
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
Wireless0
IP Configuration
DHCP
Static
DHCP request successful.
IPv4 Address
192.168.0.4
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0

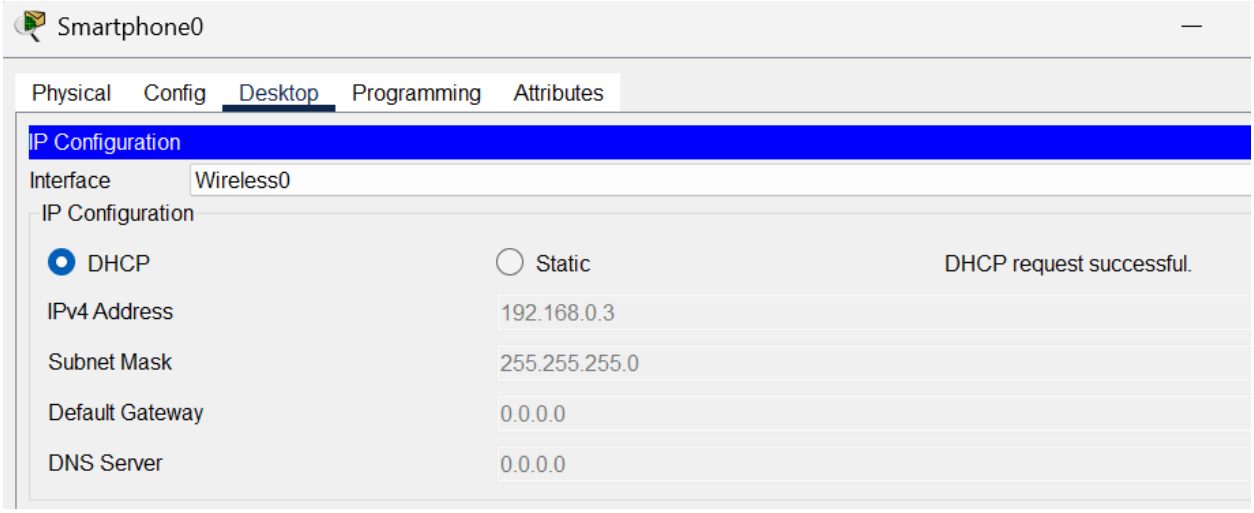
Smartphone0
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
Wireless0
IP Configuration
DHCP
Static
DHCP request successful.
IPv4 Address
192.168.0.3
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0

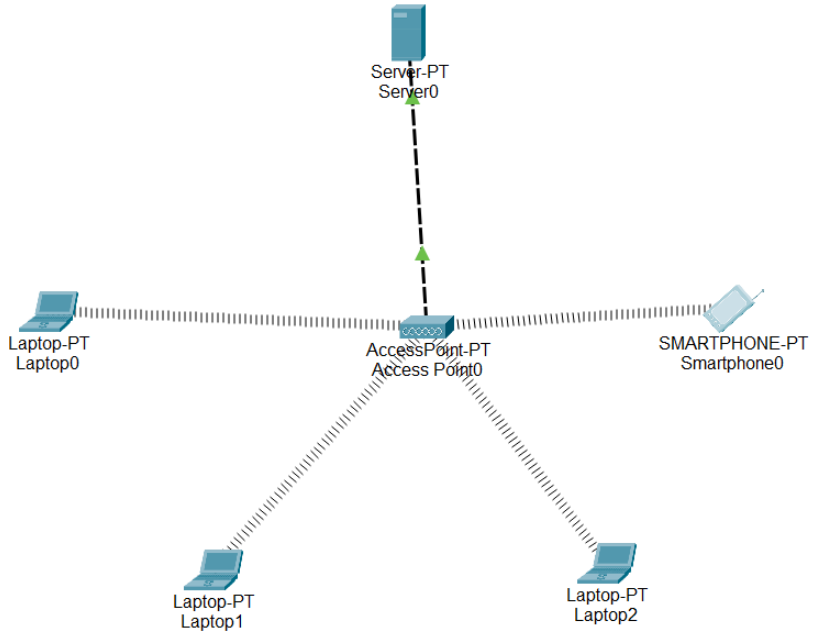
Server-PT
Server0
Laptop-PT
Laptop0
AccessPoint-PT
Access Point0
SMARTPHONE-PT
Smartphone0
Laptop-PT
Laptop1
Laptop-PT
Laptop2

Laptop0

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>

C:\>ping 192.168.0.2

Pinging 192.168.0.2 with 32 bytes of data:

Reply from 192.168.0.2: bytes=32 time=55ms TTL=128
Reply from 192.168.0.2: bytes=32 time=32ms TTL=128
Reply from 192.168.0.2: bytes=32 time=22ms TTL=128
Reply from 192.168.0.2: bytes=32 time=47ms TTL=128

Ping statistics for 192.168.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 22ms, Maximum = 55ms, Average = 39ms

C:\>ping 192.168.0.3

Pinging 192.168.0.3 with 32 bytes of data:

Reply from 192.168.0.3: bytes=32 time=57ms TTL=128
Reply from 192.168.0.3: bytes=32 time=26ms TTL=128
Reply from 192.168.0.3: bytes=32 time=31ms TTL=128
Reply from 192.168.0.3: bytes=32 time=40ms TTL=128

Ping statistics for 192.168.0.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 26ms, Maximum = 57ms, Average = 38ms

C:\>ping 192.168.0.4

Pinging 192.168.0.4 with 32 bytes of data:

Reply from 192.168.0.4: bytes=32 time=55ms TTL=128
Reply from 192.168.0.4: bytes=32 time=48ms TTL=128
Reply from 192.168.0.4: bytes=32 time=45ms TTL=128
Reply from 192.168.0.4: bytes=32 time=31ms TTL=128

Ping statistics for 192.168.0.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 31ms, Maximum = 55ms, Average = 44ms
```

```
C:\>ping 192.168.0.5

Pinging 192.168.0.5 with 32 bytes of data:

Reply from 192.168.0.5: bytes=32 time=6ms TTL=128
Reply from 192.168.0.5: bytes=32 time<1ms TTL=128
Reply from 192.168.0.5: bytes=32 time=15ms TTL=128
Reply from 192.168.0.5: bytes=32 time=9ms TTL=128

Ping statistics for 192.168.0.5:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 15ms, Average = 7ms
```