


EXPERIMENT-3


TITLE: Configure default route and static route to the routers

AIM: To configure and stimulate default and static route to the routers.


TOPOLOGY FOR STATIC ROUTING:

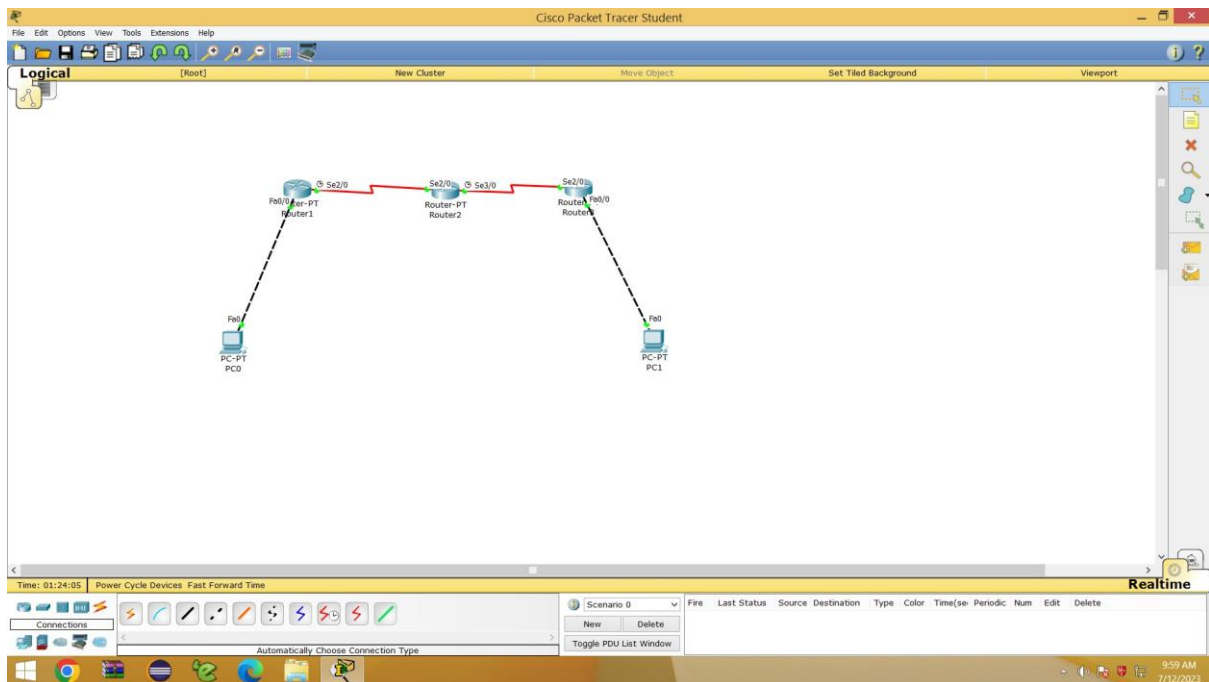


OUTPUT IN CMD: (before and after gateway is given)

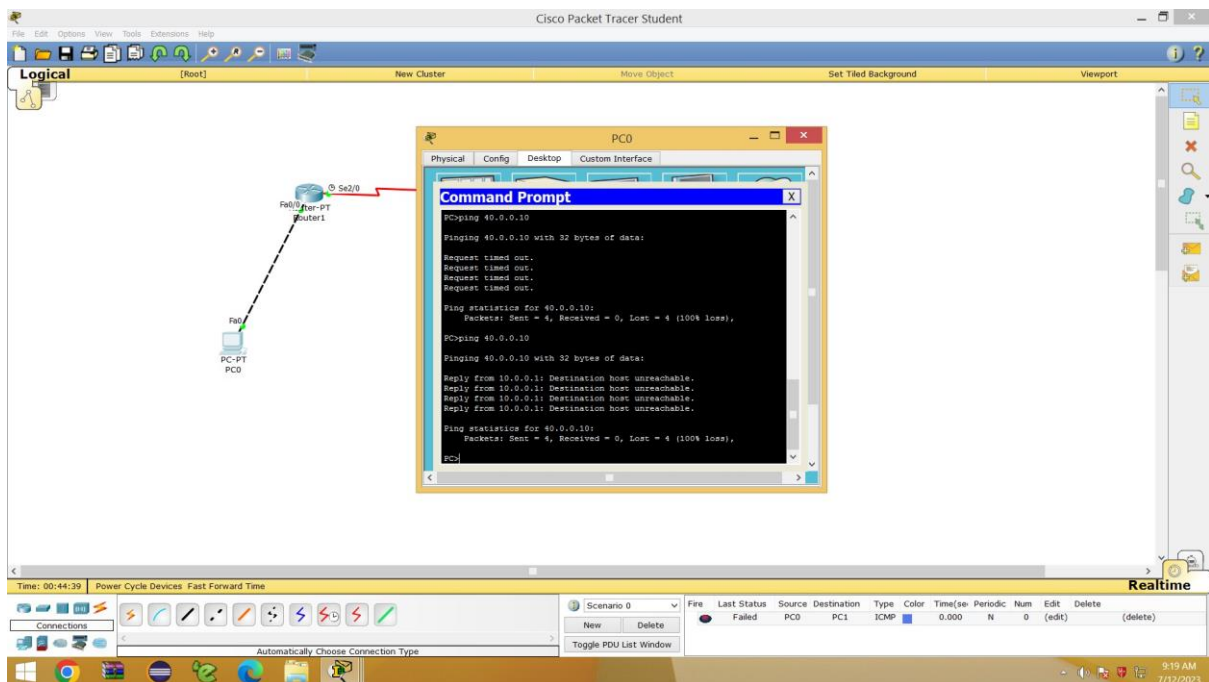


OUTPUT (after establishing IP routes):

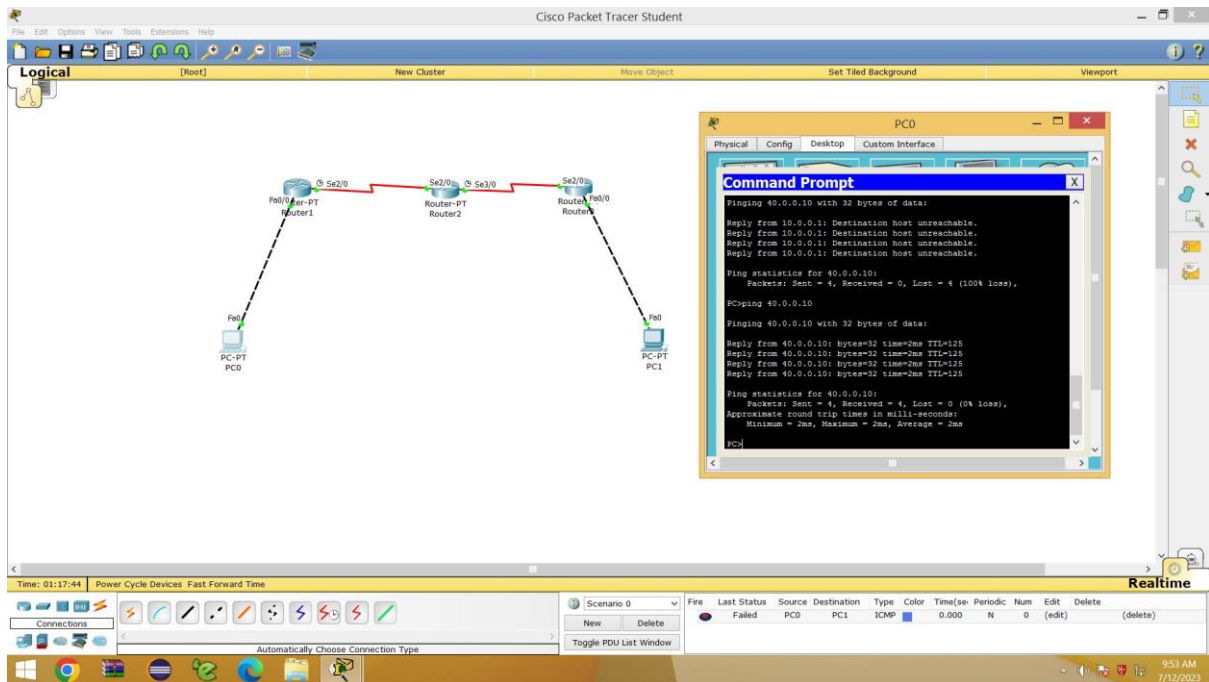

STIMULATION RESULTS:

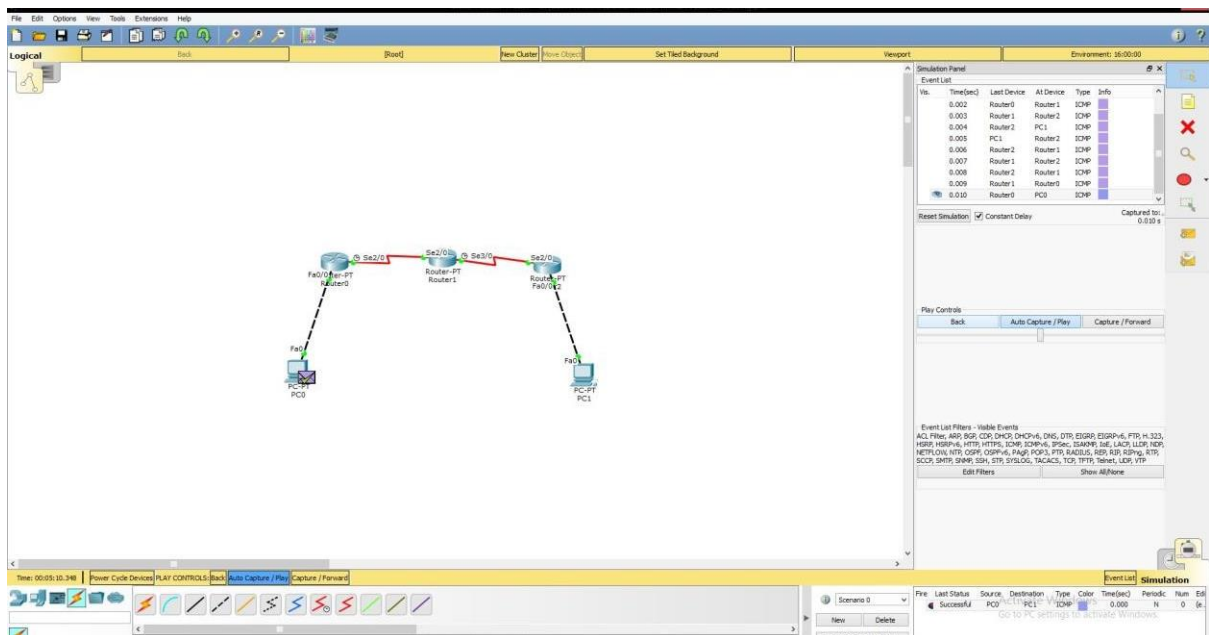

TOPOLOGY FOR DEFAULT ROUTING:

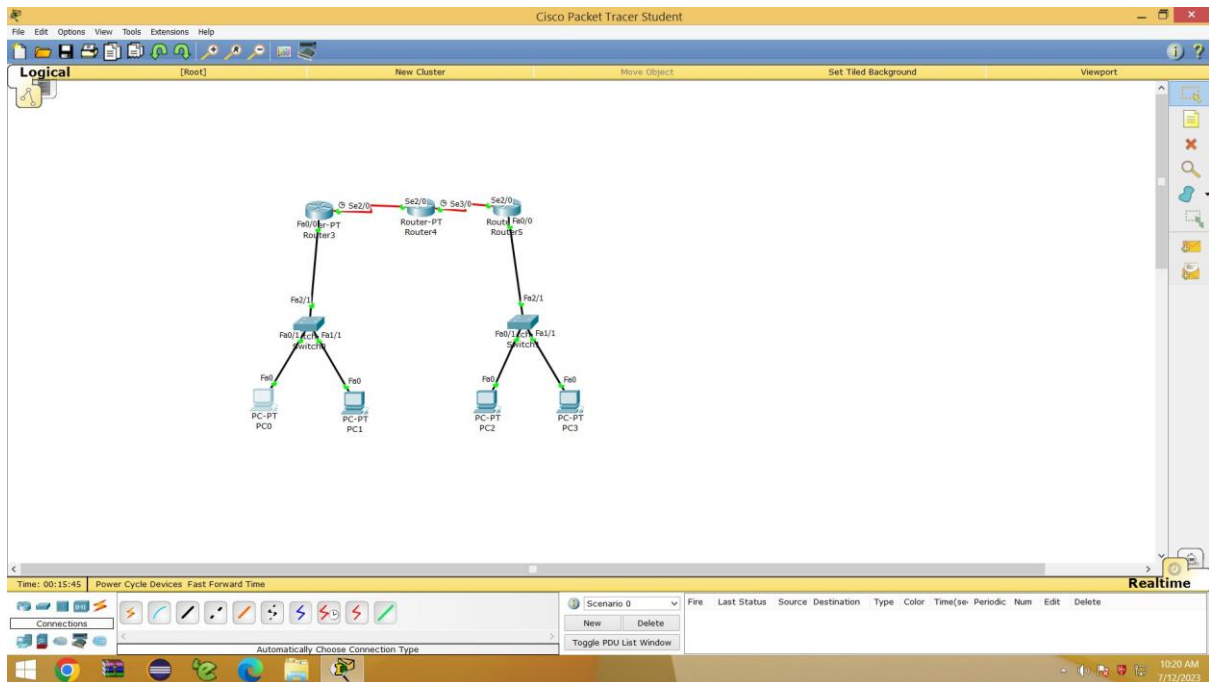

OUTPUT IN CMD:

