



TS18

Ultrasonic

Water Meter

Manual Product

Innovating Measurement Professional
Smart
Meter Manufacturer



Basic Information

TS8 is an advanced electronic ultrasonic water meter with large caliber and high precision. It is a metering instrument that uses the ultrasonic time-difference method to continuously measure, record, and display the volume of water flowing through the sensor. It can meet the strict requirements of water metering management departments for accurate measurement of water consumption. The TS8 ultrasonic metering water meter is compatible with IoT transmission technology, providing users with different customized solutions. It is widely used in water supply main lines, agricultural irrigation, industrial water use and other fields.

.No moving parts in the measuring mechanism, no wear, and the accuracy will not decrease during the service life of the meter;

.Supports 9-digit LCD display;

.Supports vertical/horizontal or inclined installation angles;

.Supports reverse flow detection for accurate measurement;

.Supports non-full pipe detection;


.Low pressure loss;

.IP68 protection level, adaptable to various harsh installation environments;


.Supports remote reading of meter data: wired reading via RS-485/M-Bus/pulse, wireless reading via LoRa/LoRaWAN/W-MBUS/NB-IoT.

Product Disassembly

- 1 Non-full Pipe Alarm
- 2 Drip/Leakage Alarm
- 3 Burst Pipe Alarm
- 4 Temperature Indicator
- 5 Low Pressure Alarm
- 6 Signal Strength 12
- 7 Water Flow Status Indicator
- 8 Fault/Alarm Indicator 8
- 9 Forward Flow Indicator
- 10 Reverse Flow Indicator
- 11 Meter Address
- 12 Signal Amplitude
- 13 Unit

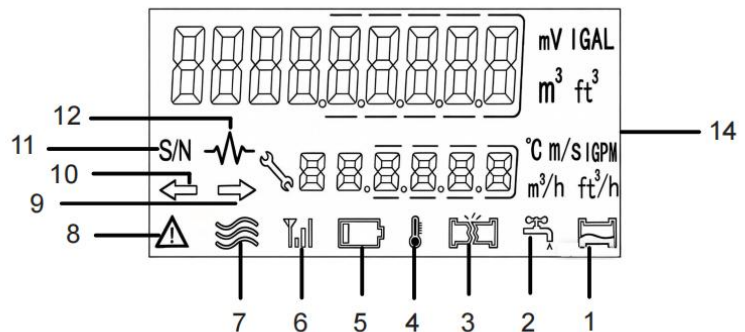

Nameplate

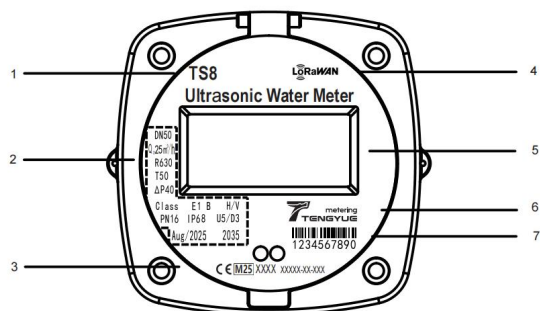

- 1 Model
- 2 Specifications / Meter Parameters
- 3 Certification Mark
- 4 Communication Method / Protocol
- 5 LCD Display Area
- 6 Manufacturer/Company Logo
- 7 Meter Address


1	DN50	Nominal Diameter
2	Q3 2.5m³/h	Permanent Flow Rate
3	R630	Q3/Q1
4	T50	Temperature Class
5	ΔP40	Pressure Loss Rating
6	Class 2	Accuracy Class
7	E1	Electromagnetic Environment Class
8	B	Environmental Class
9	H/V	Installation Method
10	PN16	Pressure Rating
11	IP68	Protection Rating
12	U5/D3	Sensitivity Class
13	Aug/2025	Manufacturing Date (Month/Year)
14	2035	Service Life

Technical Specifications


Model	Q4	Q3	Q2	Q1	R(Q3/Q1)	Minimum Flow Rate	Pressure Loss Class
DN	m³/h	m³/h	m³/h	m³/h	/	m³/h	ΔP(bar)
TS8-50	31.25	25	0.16	0.1	R250	0.0143	0.4
	50	40	0.16	0.1	R400		
TS8-65	50	40	0.256	0.16	R250	0.0229	0.4
	78.75	63	0.256	0.16	R400		
TS8-80	78.75	63	0.4	0.252	R250	0.036	0.25
			0.252	0.16	R400		
TS8W100	125	100	0.64	0.4	R250	0.0571	0.25
			0.4	0.25	R400		
TS8-125	200	160	1.024	0.64	R250	0.0914	0.25
			0.64	0.4	R400		
TS8-150	312.5	250	1.6	1	R250	0.1429	0.25
			1	0.625	R400		
TS8-200	500	400	2.56	1.6	R250	0.2286	0.16
			1.6	1	R400		
TS8-250	787.5	630	4.03	2.52	R250	0.36	0.16
			2.52	1.575	R400		
TS8-300	1250	1000	6.4	4	R250	0.5714	0.16
			4	2.5	R400		
			6.4	4	R400		

Description	Value	Unit
Accuracy Class	2	-
Q3/Q1	R250/R400	-
Maximum Reading	99999999.9	-
Maximum Working Pressure	1.6	MPa
Temperature Class	T30/T50/ (T70 optional)	°C
Installation Condition Sensitivity Class	U10/D5	-
Protection Level	IP68	-
Environmental Class	O	-
Electromagnetic Class	E1	-

► Standard Error Curve Chart

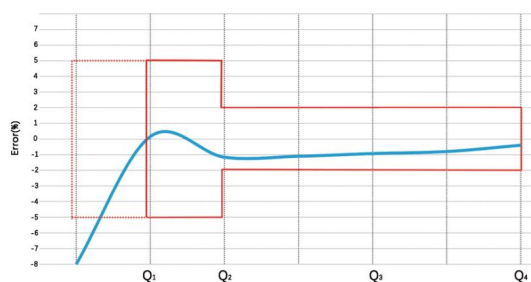


► Pressure Loss Curve Chart

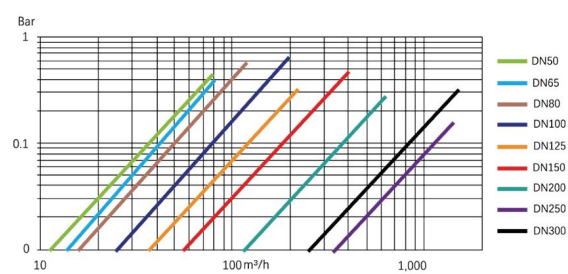

Feature	Description		
Mode	4G (Cat.1)	LoRaWAN	W-MBUS
Frequency Band	Full band	EU868/US925/AU923	433MHz/868MHz
Radiated Power	Maximum 23+2 dBm	Maximum 14 dBm	Maximum 14 dBm
Effective Range	5-15 km (open environment)	1-3 km (open environment)	300-500 m (open environment)
Protocol	3GPP	LoRaWAN v.1.0.3	EN13757 OMS
Communication Mode	TCP/UDP	Class A	T1 (default), C1
Power Supply	3.6V DC 8.5Ah	3.6V DC 8.5Ah	3.6V DC 8.5Ah
Upload Interval	24 h	12/24 h	30 min
Corresponding Mode	Timed/Interval	Timed	Timed

► Dimensions

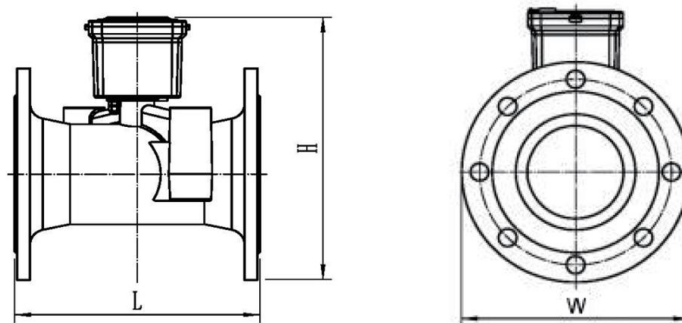

Nominal Diameter(mm)		Length L	Width W	Height H	Flange Connection		
					Flange Diameter	Bolt Circle Diameter	Bolt Size—M
DN50	2 Inch	200	170	215	170	125	4—M16
TS8W-65	2.5 Inch	200	185	220	185	145	4—M16
TS8W-80	3 Inch	225	200	235	200	160	8—M16
TS8W-100	4 Inch	250	220	255	220	180	8—M16
TS8W-125	5 Inch	250	250	285	250	210	8—M16
TS8W-150	6 Inch	300	285	335	285	240	8—M20
TS8W-200	8 Inch	350	340	405	340	295	12—M20
TS8W-250	10 Inch	450	405	490	405	355	12—M24
TS8W-300	12 Inch	500	460	550	460	410	12—M24

Legal Notice & Disclaimer

This document is prepared by Lianyungang Weizidom Group Electronic Technology Co., Ltd. (hereinafter referred to as “Weizidom Group Metering”) for the purpose of providing potential customers with technical information regarding our products and solutions. All readers are hereby advised and agree to the following terms:

Dynamic Nature of Technical Specifications

Weizidom Group Metering reserves the right to continuously iterate and optimize product hardware designs, software algorithms, system architectures, and technical parameters. Such modifications may be implemented without prior notice. All technical specifications, performance indicators, and functional descriptions contained herein represent the state of technology at the time of publication and do not constitute a final commitment to delivery. The definitive terms shall be governed exclusively by the formal Technical Agreement and Product Delivery List executed between the parties.

Applicability of Performance Data

All performance data and test results cited in this document are based on values obtained from testing conducted by Weizidom Group Metering under standard laboratory conditions. Actual system performance in a deployed environment may vary due to factors such as the complexity of the on-site environment, network topology, and the degree of integration with third-party systems. Weizidom Group Metering makes no warranties or representations regarding the performance of its products in specific, non-standard environments.

System Compatibility and Integration

The compatibility of Weizidom Group Metering’s software systems with third-party platforms or devices is subject to the officially published compatibility certification list. For integration solutions not included on this list, Weizidom Group Metering provides no technical support or guarantees of stability. Customers are responsible for conducting thorough compatibility testing prior to undertaking any system integration.

Intellectual Property Rights

The entire content of this document, including but not limited to technical solutions, architectural diagrams, code snippets, and textual descriptions, is the exclusive intellectual property of Weizidom Group Metering. Any disclosure, reproduction, or use for commercial purposes to any third party is strictly prohibited without the express written authorization of Weizidom Group Metering.

**WEIZIDOM GROUP**www.wsdvalves.com

South City, Longhu Town, Xinzheng City,
Zhengzhou City, Henan Province, China