




FULL DAQ REBOOT CHEAT SHEET

current as of March 25, 2016


1. From the main HPS_EPICS screen, click **DAQ Status** to open the status/reboot window.




2. From the DAQ status/reboot window, click **Reboot FULL DAQ** and confirm the popup that appears.





3. A terminal window will open, which may ask for the password for **clasrun**. If so, enter it and press return.

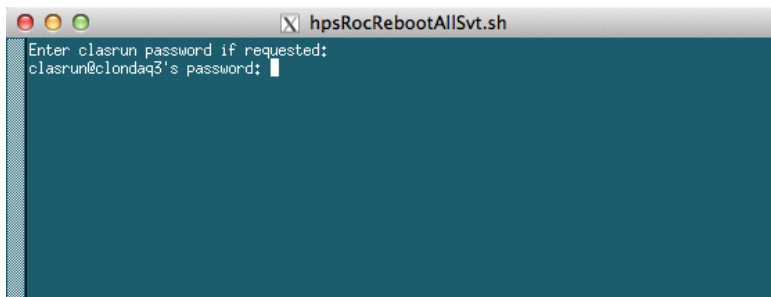

4. After the TDAQ is rebooted, press enter to proceed to rebooting the SVT DAQ, which may again require a password.

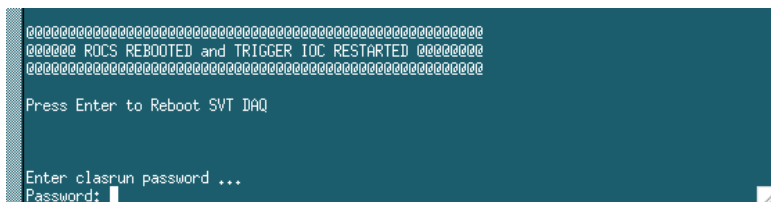

5. If the SVT DAQ reboot hangs at any point for more than a few seconds, abort with **ctrl-C** as instructed and then click the **Reboot SVT DAQ** button.



6. After the DAQ is rebooted, check that the **FEB Status**, **IOC Status**, and **Hybrid Status** lights are all green in the SVT Summary GUI and restart the Run Control GUI: as **clasrun** on **clondaq3**, run the command...

```
> runcontrol -rocs
```

(a window on clondaq3 is probably already open with this command in history.)

This procedure should take less than ten minutes. If this procedure fails, **call the DAQ expert!!!!**