

CAMPUS® Datasheet

SCHULADUR® PCR GF 45 - (PBT+PET)-GF45
LyondellBasell



Product Texts

45% glass fibre reinforced PBT with post consumer PET

For high surface quality choose upper temperature limits.


Rheological properties	Value	Unit	Test Standard
Melt volume-flow rate, MVR	11	cm ³ /10min	ISO 1133
Temperature	260	°C	ISO 1133
Load	2.16	kg	ISO 1133
Mechanical properties	Value	Unit	Test Standard
Tensile modulus	15500	MPa	ISO 527-1/-2
Stress at break	160	MPa	ISO 527-1/-2
Strain at break	1.7	%	ISO 527-1/-2
Charpy impact strength, +23°C	50	kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	50	kJ/m ²	ISO 179/1eU
Charpy notched impact strength, +23°C	8	kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	8	kJ/m ²	ISO 179/1eA
Thermal properties	Value	Unit	Test Standard
Temp. of deflection under load, 1.80 MPa	208	°C	ISO 75-1/-2
Temp. of deflection under load, 0.45 MPa	225	°C	ISO 75-1/-2
Vicat softening temperature, 50°C/h 50N	198	°C	ISO 306
Burning behavior at 1.5 mm nominal thickness	HB	class	IEC 60695-11-10
Thickness tested (1.5)	1.6	mm	IEC 60695-11-10
Yellow Card available	Yes	-	-
Burning behavior at thickness h	HB	class	IEC 60695-11-10
Thickness tested (h)	3.2	mm	IEC 60695-11-10
Yellow Card available	Yes	-	-
Burning rate, thickness 1 mm	25	mm/min	ISO 3795 (FMVSS 302)
Electrical properties	Value	Unit	Test Standard
Volume resistivity	>1E13	Ohm*m	IEC 62631-3-1
Surface resistivity	>1E15	Ohm	IEC 62631-3-2
Other properties	Value	Unit	Test Standard
Humidity absorption	0.25	%	Sim. to ISO 62
Density	1680	kg/m ³	ISO 1183

SCHULADUR® PCR GF 45 - (PBT+PET)-GF45


LyondellBasell

Diagrams

Viscosity-shear rate

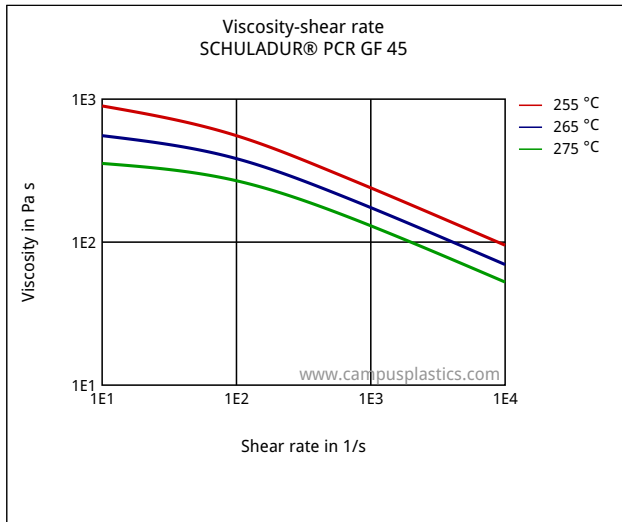

Shearstress-shear rate

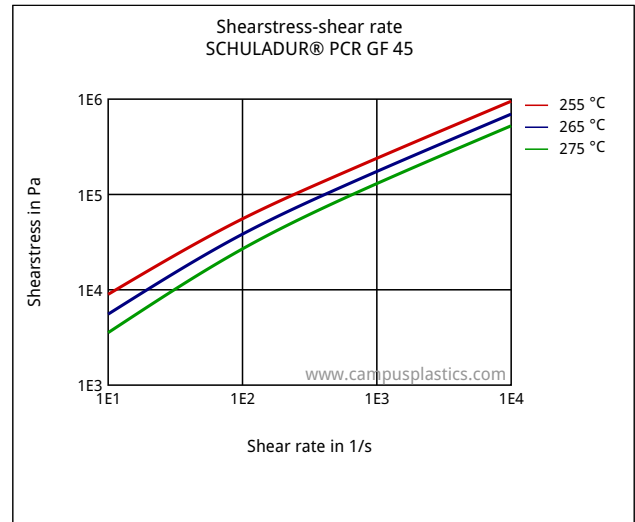

Characteristics

Processing

Injection Molding

Regional Availability

North America, Europe, Asia Pacific, South and Central America, Near East/Africa

Other text information

Injection molding

PREPROCESSING; Pretreatment

Predrying: 2-4h /120°C (Feuchte)

PROCESSING ;Processing:

Melttemperature 260 - 290 °C

Mouldtemperature 80 - 90 (120) °C

Product Storage and Handling

- Product should be stored in dry conditions at temperatures below 50°C and protected from UV-light
- Improper storage may bring damage to the packaging and can negatively affects on the quality of thisproduct
- Keep material completely dry for good processing

Company Information

For further information regarding the LyondellBasell company, please visit <http://www.lyb.com/>.

© LyondellBasell Industries Holdings, B.V. 2019

Disclaimer

Information in this document is accurate to the best of our knowledge at the date of publication. The document is designed to provide users general information for safe handling, use, processing, storage, transportation, disposal and release and does not constitute any warranty or quality specification, either express or implied, including any warranty of merchantability or fitness for any particular purpose. Users shall determine whether the product is suitable for their use and can be used safely and legally.

In addition to any prohibitions of use specifically noted in this document, LyondellBasell may further prohibit or restrict the sale of its products into certain applications. For further information, please contact a LyondellBasell representative.

Trademarks

The Trademark referenced within the product name is owned or used by the LyondellBasell family ofcompanies.

SCHULADUR® PCR GF 45 - (PBT+PET)-GF45
LyondellBasell

If there are questions to given information, to further properties or further LyondellBasell products please contact

A. Schulman GmbH, a LyondellBasell company
Huettenstrasse130-138
50170 Kerpen
Tel: 02273 / 561-0
Contact: ASI-EMEAEP.Application.Engineering@lyondellbasell.com
Subject: Material data