




THERMOSEAL soft-chem®

Unmatched expanded PTFE gasket sheet

THERMOSEAL soft-chem® expanded 100% virgin PTFE sealing material provides excellent corrosion resistance and impermeability along with superior creep resistance and sealability for use in all types of applications. A proprietary manufacturing process results in a uniform and highly fibrillated microstructure with equal tensile strength in all directions. And its superior memory characteristics ensure that bolts remain tight, so retorquing is not necessary. The material's high compressibility enables it to deform under load and conform to irregularities in flange faces for a tight seal with low, minimum sealing stress. Standardizing with it also helps to reduce maintenance, simplify inventory, and save money.

(/index.php/)

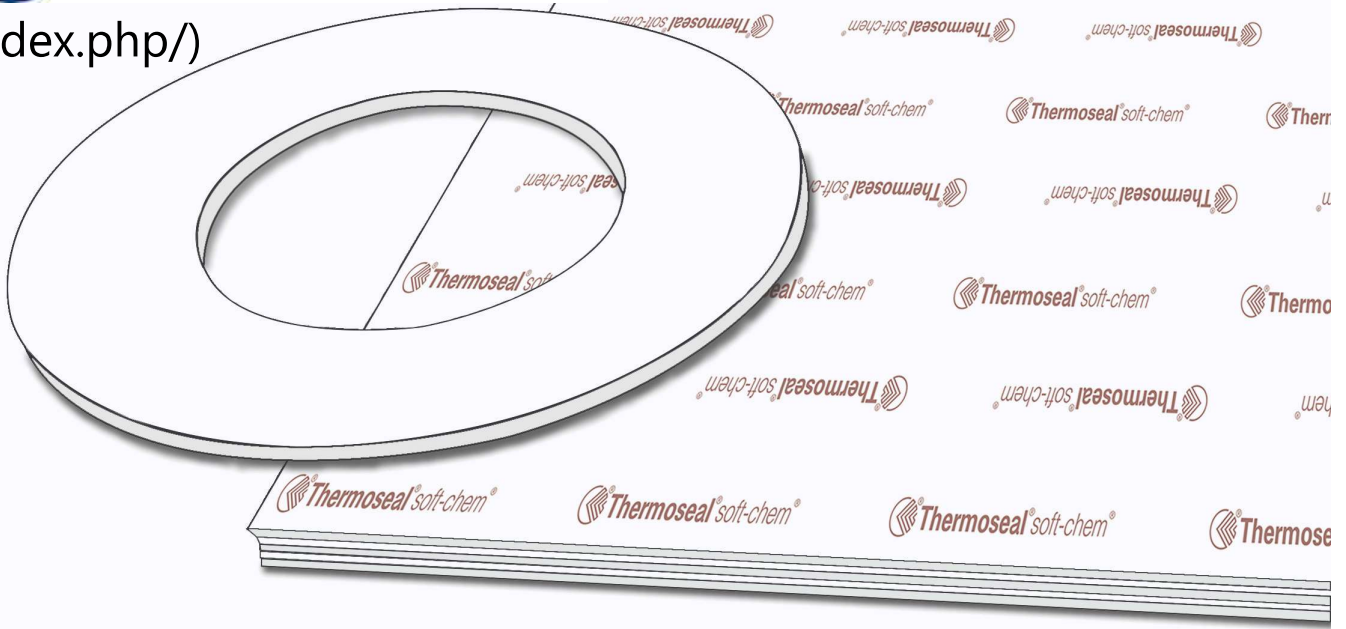

Pressure limit	2900 psi
Temperature range	-450°F to 500°F
Compressibility ASTM F36 M	45 %
Recovery ASTM F36 M	14 %
Stress relaxation DIN 52913	15 MPa
Tensile ASTM F152	> 20 MPa
Density	56 lb/ft ³ (0.90 g/cm ³)
Color	White

CERTIFICATES & APPROVALS

- » BAM tested

» TA-Luft (Clean air)
- » DIN-DVGW

» FDA conformity (must specify unbranded)

KEY FEATURES & BENEFITS




[SEARCH \(/search\)](#) | [CONTACT \(/form/contact\)](#)

» Dimensionally stable

» Can be used with more fragile piping systems including FRP flanges

» FDA compliant

The pressure/temperature graphs shown are the most current method of determining the suitability of a gasket material in a known environment. However, chemical compatibility must also be considered.

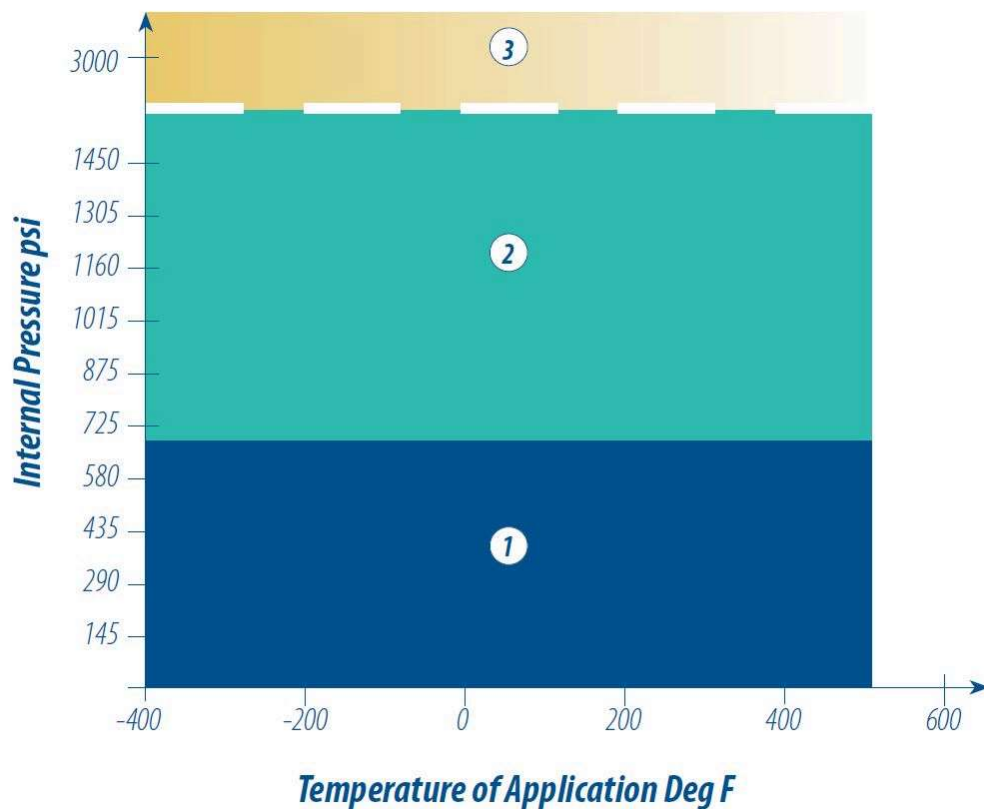

In area 1 the gasket material is suitable using common installment practices subject to chemical compatibility

In area 2 appropriate measures are necessary for installation of the gasket to ensure maximum performance. Please call or refer to KLINGERexpert for assistance.

In area 3 do not install gaskets in these applications without first referring to KLINGERexpert or contacting KLINGER Thermoseal's technical support service.

The ability of a gasket to make and maintain a seal depends not only on the style and quality of the gasket material, but also on medium being sealed, the flange design, the amount of pressure applied to the onto the flanges and tightened. These factors are of our [SEARCH \(/search\)](#) | [CONTACT \(/form/contact\)](#)



[\(/index.php/\)](#)

[↓ Download data sheet \(pdf\)](#)
[\(/sites/default/files/2023-02/Soft-chem%2001012023.pdf\)](#)

CONTACT (/FORM/CONTACT)

[Contact Us \(/form/contact\)](#)

[An ISO 9001 certified company \(/about-us\)](#)

TECHNICAL RESOURCES (/TECHNICAL-RESOURCES)

[Capabilities Brochure \(/capabilities-brochure\)](#)
[White Papers \(/technical-resources\)](#)
[Data Sheets \(/product-data-sheets\)](#)
[Tech Service Form \(/technical-service-questionnaire\)](#)
[Safety Data Sheets \(/safety-data-sheets\)](#)
[Legal Information \(/legal-information\)](#)

CONNECT ON SOCIAL MEDIA (/KLINGER-GROUP)

[\(/form/contact\)](#) [🐦 \(https://twitter.com/KLINGERUSA\)](https://twitter.com/KLINGERUSA)

[in \(https://www.linkedin.com/company/thermoseal-inc-/\)](https://www.linkedin.com/company/thermoseal-inc-/)

[f \(https://www.facebook.com/people/Klinger-Thermoseal/100086663391045/\)](https://www.facebook.com/people/Klinger-Thermoseal/100086663391045/)

2350 Campbell Road » Sidney, Ohio 45365 | T +1 937 498.2222 » F +1 937 498.4911

Email: info@klinger-thermoseal.com (<mailto:info@klinger-thermoseal.com>)

[Privacy Policy \(/privacy-policy\)](#)

© 2025 KLINGER Thermoseal All rights reserved.