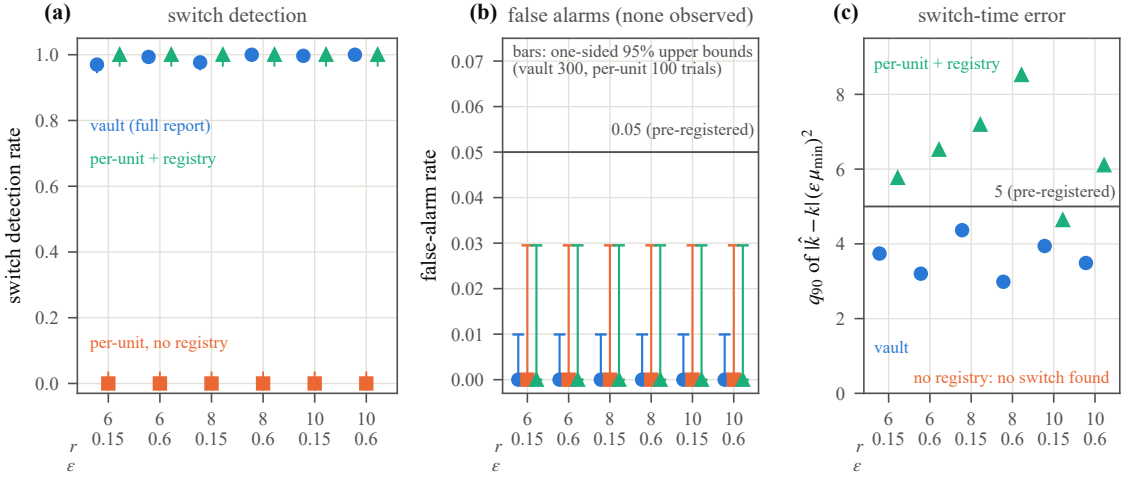
(a)
switch detection
switch detection rate
1.0
0.8
0.6
0.4
0.2
0.0
vault (full report)
per-unit + registry
per-unit, no registry
6 0.15
6 0.6
8 0.15
8 0.6
10 0.15
10 0.6
r
ε
(b)
false alarms (none observed)
bars: one-sided 95% upper bounds
(vault 300, per-unit 100 trials)
0.05 (pre-registered)
false-alarm rate
0.07
0.06
0.05
0.04
0.03
0.02
0.01
0.00
(c)
switch-time error
per-unit + registry
5 (pre-registered)
vault
no registry: no switch found
8
6
4
2
0